

## RF Exposure Considerations

### 1. Measuring Standard

KDB 680106 D01 RF Exposure Wireless Charging Apps v03

### 2. Requirements

According to the item 5.b of KDB 680106 D01v03:

Inductive wireless power transfer applications with supporting field strength results and meeting all of the following requirements are not required to submit a KDB inquiry for devices approved using SDoC or a PAG for equipment approved using certification to address RF exposure compliance. However, the responsible party is required to keep a copy of the test report in accordance with KDB 865664 D02. A copy of the test report is to be submitted with the application if the device is approved using certification.

(1) Power transfer frequency is less than 1 MHz.

Operation Frequency: 114.74 - 182.85kHz

(2) Output power from each primary coil is less than or equal to 15 watts.

Output power from each primary coil is 5 watts

(3) The transfer system includes only single primary and secondary coils. This includes charging systems that may have multiple primary coils and clients that are able to detect and allow coupling only between individual pairs of coils.

The transfer system includes only single primary and secondary coils.

(4) Client device is placed directly in contact with the transmitter.

Yes

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

The transfer system is Mobile device.


(6) The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.

Limits For Maximum Permissible Exposure (MPE)

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm <sup>2</sup> )	Averaging time (minutes)
<b>(A) Limits for Occupational/Controlled Exposures</b>				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f <sup>2</sup> )	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f <sup>2</sup> )	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz  
 \*=Plane-wave equivalent power density  
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

### 3. Test Setup

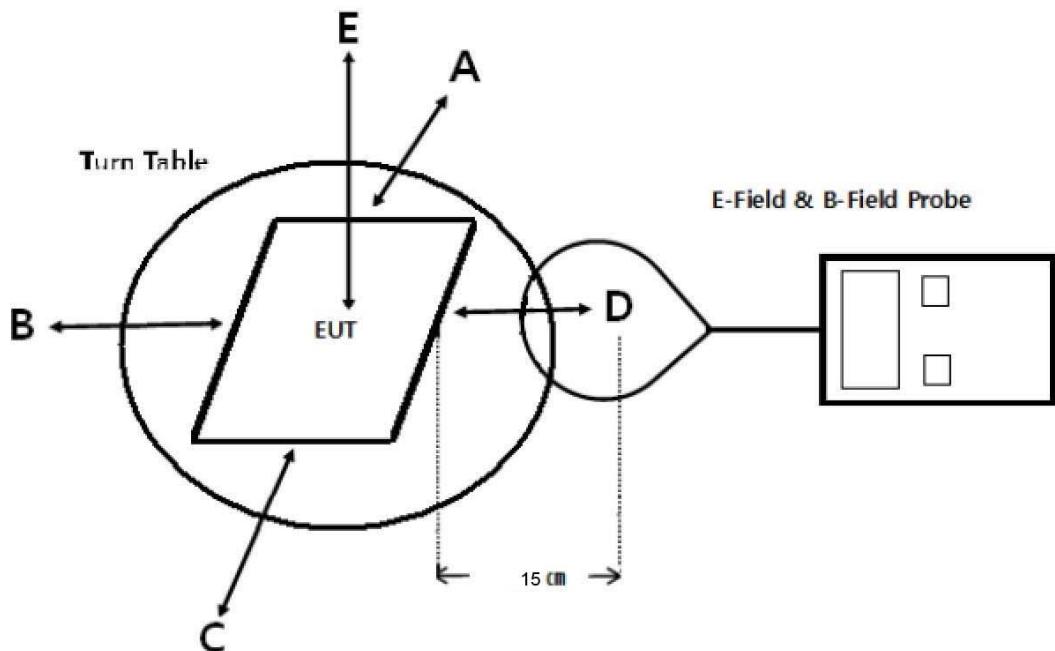

Note: Measurements should be made from all sides and the top of the primary/client pair, with the 15cm measured from the center of the probe(s) to the edge of the device.

### 4. Test Procedure

- 1) The RF exposure test was performed in anechoic chamber.
- 2) The measurement probe was placed at 15 cm surrounding the device and 20 cm above the top surface of the charger and the geometric center of probe.
- 3) The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- 4) The EUT was measured according to the dictates of KDB 680106 D01 v03.

Remark:

The EUT's test position A, B, C, D and E is valid for the E and H field measurements.

### 5. Test Equipment List

Equipment	Manufacturer	Model No.	Calibration Due
Magnetic field meter	NARDA	ELT-400	Jul. 25, 2019

### 6. Test Result

Zero charge:

E-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (V/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (V/m)	Limits Test (V/m)
114.74							
-	1.65	1.53	1.60	1.75	1.46	307	614
182.85							

H-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (A/m)	Limits Test ((A/m))
114.74							
-	0.221	0.165	0.196	0.175	0.182	0.815	1.63
182.85							

Intermediate charge:

E-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (V/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (V/m)	Limits Test (V/m)
114.74							
-	1.60	1.57	1.56	1.70	1.42	307	614
182.85							

H-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (A/m)	Limits Test ((A/m))
114.74							
-	0.212	0.158	0.181	0.166	0.176	0.815	1.63
182.85							

Full Load:

E-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (V/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (V/m)	Limits Test (V/m)
114.74							
-	1.62	1.46	1.51	1.61	1.41	307	614
182.85							

H-Filed Strength 15 cm surrounding the device and 20 cm above the top surface of the EUT (A/m)

Frequency Range (KHz)	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Reference Limits Test (A/m)	Limits Test ((A/m)
114.74							
-	0.209	0.152	0.185	0.160	0.172	0.815	1.63
182.85							

## 7. Test Set-up Photo

