

FCC Test Report

FCC ID:2AGAQDRAGON

Product : smartphone

Trade Name : APRIX, GEXX

Model Number : Red Dragon

X5, Red Dragon lite, Shark, X7, X7 elite, X7
lite, X8, X8 Elite, X8 Lite, X10, X10 Elite, X10

Serial Model : lite, X55, X55 Elite, X10 Elite, X10 LITE,
Panzer X5, Panzer X6, Panzer X7, Tab 10,
Tab 8 and Tab 7

Report No. : ISOT15100214E

Prepared for

Computel System SAS

Cra 16A #80-15, Bogota Colombia

Prepared by

Shenzhen ISOTek Standards Technical Services Co.,Ltd.

13/F, HuaFengRui Building, XinHu Rd., XiXiang, Bao'an
District, Shenzhen, China

Tel.: +86-755- 23087278 Fax.: +86-755-23087178
[Http://www.ISOTek.com.cn](http://www.ISOTek.com.cn)

TEST RESULT CERTIFICATION

Applicant's name : Computel System SAS

Address : Cra 16A #80-15, Bogota Colombia

Manufacturer's Name : Computel System SAS

Address : Cra 16A #80-15, Bogota Colombia

Product description

Product name : smartphone

Model and/or type reference : Red Dragon

FCC Part15B:01 Oct.2014

Standards : ANSI C63.4:2014

This device described above has been tested by ISOTek, and the test results show that the equipment under test (EUT) is in compliance with Part 15 of FCC Rules. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of ISOTek, this document may be altered or revised by ISOTek, personnel only, and shall be noted in the revision of the document.

Date of Test


Date (s) of performance of tests : 16 Oct. 2015 ~27 Oct. 2015

Date of Issue : 27 Oct. 2015

Test Result : **Pass**

Compiled by:

Approved by:



Lisa Huang/ Project Engineer

Richard Chen/ Manager

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST SETUP	8
2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	9
2.4 MEASUREMENT INSTRUMENTS LIST	10
3 . EMC EMISSION TEST	11
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.1.1 POWER LINE CONDUCTED EMISSION	11
3.1.2 TEST PROCEDURE	12
3.1.3 TEST SETUP	12
3.1.4 EUT OPERATING CONDITIONS	12
3.1.5 TEST RESULTS	13
3.2 RADIATED EMISSION MEASUREMENT	15
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	15
3.2.2 TEST PROCEDURE	15
3.2.3 TEST SETUP	17
3.2.4 TEST RESULTS	18
3.2.5 TEST RESULTS(1000~12400MHz)	20
4 . EUT TEST PHOTO	21

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
FCC Part15B:2014 ANSI C63.4: 2014	Conducted Emission	Class B	PASS	
	Radiated Emission	Class B	PASS	

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen ISOTek Standards Technical Services Co.,Ltd.

Add.: 13/F, HuaFengRui Building, XinHu Rd., XiXiang, Bao'an District, Shenzhen, China
FCC Registration No.: **918037**

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of **k=2** , providing a level of confidence of approximately **95 %**.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
ISOTekC01	ANSI	150 KHz ~ 30MHz	3.2	

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	U , (dB)	NOTE
ISOTekA01	ANSI	30MHz ~ 1000MHz	4.7	
		1GHz ~12.4GHz	5.0	

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	smartphone														
Model Name	Red Dragon														
Additional Model Number(s)	X5, Red Dragon lite, Shark, X7, X7 elite, X7 lite, X8, X8 Elite, X8 Lite, X10, X10 Elite, X10 lite, X55, X55 Elite, X10 Elite, X10 LITE, Panzer X5, Panzer X6, Panzer X7, Tab 10, Tab 8 and Tab 7														
Model Difference	Only the model name and color is different.														
Product Description	<p>The EUT is a smartphone.</p> <table border="1"> <tr> <td>Connecting I/O port:</td><td>USB, Earphone</td></tr> <tr> <td>Operation Frequency:</td><td> BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz GSM: 824.2-848.8MHz/1850.2-1909.8MHz WCDMA: 826.4-846.6MHz/ 1852.4-1907.6MHz </td></tr> <tr> <td>Modulation Type:</td><td> BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$-DQPSK BT EDR(3Mbps): 8-DPSK IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) GSM / DCS: GMSK WCDMA:QPSK </td></tr> <tr> <td>highest operating frequency</td><td>2480 MHz</td></tr> <tr> <td>Hardware version:</td><td>WMDBb</td></tr> <tr> <td>Software version:</td><td>Red_dragon_V1.0_20150901</td></tr> <tr> <td>IMEI</td><td>351769070000000</td></tr> </table>	Connecting I/O port:	USB, Earphone	Operation Frequency:	BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz GSM: 824.2-848.8MHz/1850.2-1909.8MHz WCDMA: 826.4-846.6MHz/ 1852.4-1907.6MHz	Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) GSM / DCS: GMSK WCDMA:QPSK	highest operating frequency	2480 MHz	Hardware version:	WMDBb	Software version:	Red_dragon_V1.0_20150901	IMEI	351769070000000
Connecting I/O port:	USB, Earphone														
Operation Frequency:	BT:2402~2480 MHz WIFI: 802.11b/g/n(20MHz): 2412~2462MHz 802.11n(40MHz):2422~2452MHz GSM: 824.2-848.8MHz/1850.2-1909.8MHz WCDMA: 826.4-846.6MHz/ 1852.4-1907.6MHz														
Modulation Type:	BT(1Mbps): GFSK BT EDR(2Mbps): $\pi/4$ -DQPSK BT EDR(3Mbps): 8-DPSK IEEE 802.11b : DSSS (CCK, QPSK, DBPSK) IEEE 802.11g/n (HT20/HT40) : OFDM (64QAM, 16QAM, QPSK, BPSK) GSM / DCS: GMSK WCDMA:QPSK														
highest operating frequency	2480 MHz														
Hardware version:	WMDBb														
Software version:	Red_dragon_V1.0_20150901														
IMEI	351769070000000														
Power Source	DC Voltage														
Adapter	Model:K05100-3 Input: 100-240V~, 50/60Hz, 0.3A Output: 5V---, 1.0A														
Battery	DC 3.8V ,2200mAh														

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	Data Exchange Mode
Mode 2	REC Mode
Mode 3	TF Card Playing Mode+Charging
Mode 4	GPS

For Conducted Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode


For Radiated Test	
Final Test Mode	Description
Mode 1	Data Exchange Mode

Note: Final Test Mode: Through Pre-scan, find the mode 1 is the worse case.


Only the worst case mode is recorded in the report.

2.2 DESCRIPTION OF TEST SETUP

RE

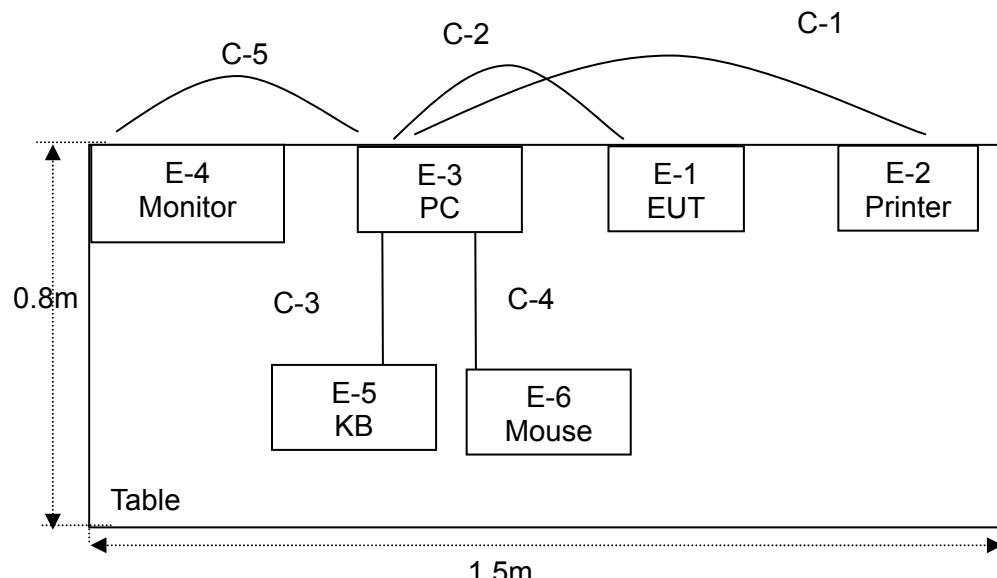

CE

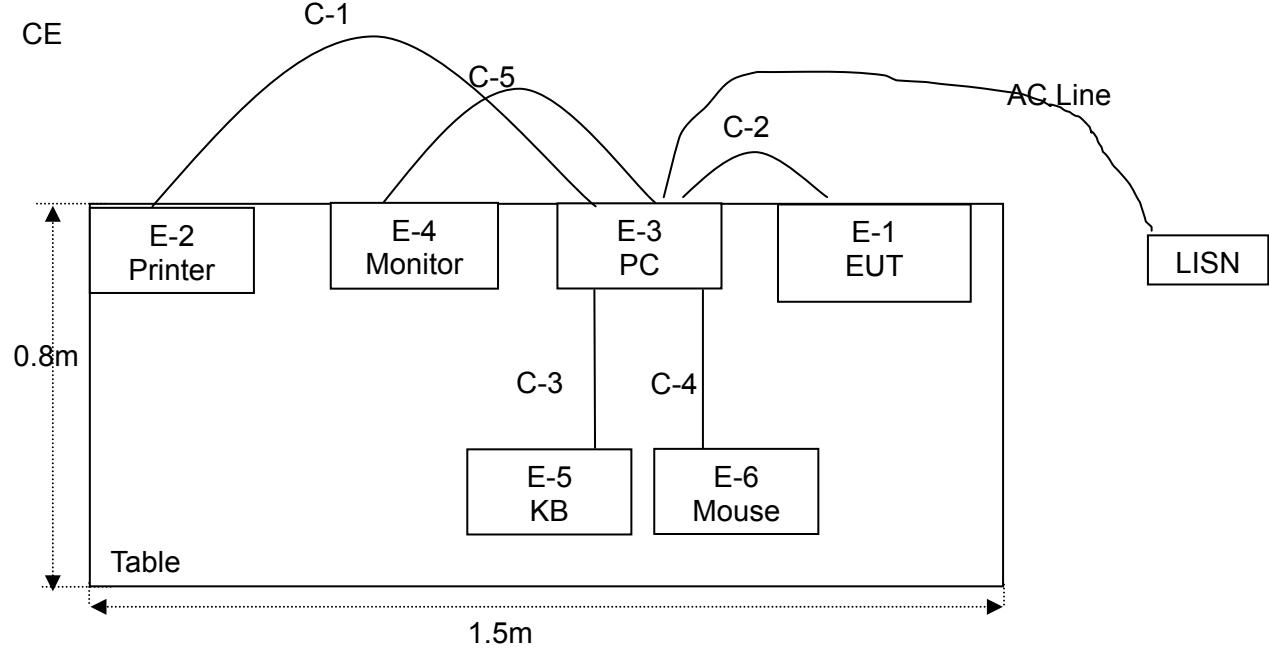

2.3 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	smartphone	N/A	Red Dragon	N/A	EUT
E-2	Printer	Canon	L11121E	LBP2900	
E-3	Personal computer	DELL	FT4Y23X	34413561645	
E-4	Monitor	DELL	IN2020MB	cn-0y6mhx-74261-11f-67es	
E-5	Keyboard	DELL	SK-8185	OY526KUS	
E-6	Mouse	DELL	MS111-P	cn-011d3v-71581-11e-1th7	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	1.2m	
C-2	NO	NO	1.0m	
C-3	NO	NO	1.0m	
C-4	NO	NO	1.0m	
C-5	NO	NO	1.0m	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" means "shielded" "with core"; "NO" means "unshielded" "without core".

2.4 MEASUREMENT INSTRUMENTS LIST

2.4.1 Radiatio Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Spectrum Analyzer	Aglient	E4446A	US44300451	2015.07.06	2016.07.05	1 year
2	EMI Test Receiver	R&S	ESCI	101165	2015.07.06	2016.07.05	1 year
3	Bilog Antenna	Schwarzbeck	VULB 9168	VULB9168-438	2015.07.06	2016.07.05	1 year
4	Horn Antenna	Schwarzbeck	BBHA 9120D	9170-182	2015.07.06	2016.07.05	1 year
5	Amplifier	Schwarzbeck	BBV9743	9743-019	2015.07.06	2016.07.05	1 year
6	Test Cable Below 1GHz	ATM	R-01	3564	2015.07.06	2016.07.05	1 year
7	Test Cable Above 1GHz	ATM	R-02	3565	2015.07.06	2016.07.05	1 year

Conduction Test equipment

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	LISN	messtec	AN3019	NO.1	Jul. 06, 2015	Jul. 05, 2016	1 year
2	LISN	SCHWARZB ECK	NNLK 8129	8126466	Jul. 06, 2015	Jul. 05, 2016	1 year
3	Pulse Limiter	SCHWARZB ECK	VTSD9596F	9618	Jul. 06, 2015	Jul. 05, 2016	1 year
4	EMI Test Receiver	R&S	ESCI	100843	Jul. 06, 2015	Jul. 05, 2016	1 year
5	Switch	Schwarzbeck	CX - 210	100196	Jul. 06, 2015	Jul. 05, 2016	1 year
6	Test Cable 9KHz-300MHz	ATM	C01	3566	Jul. 06, 2015	Jul. 05, 2016	1 year

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 -0.5	79.00	66.00	66 - 56 *	56 - 46 *
0.50 -5.0	73.00	60.00	56.00	46.00
5.0 -30.0	73.00	60.00	60.00	50.00

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 TEST SETUP

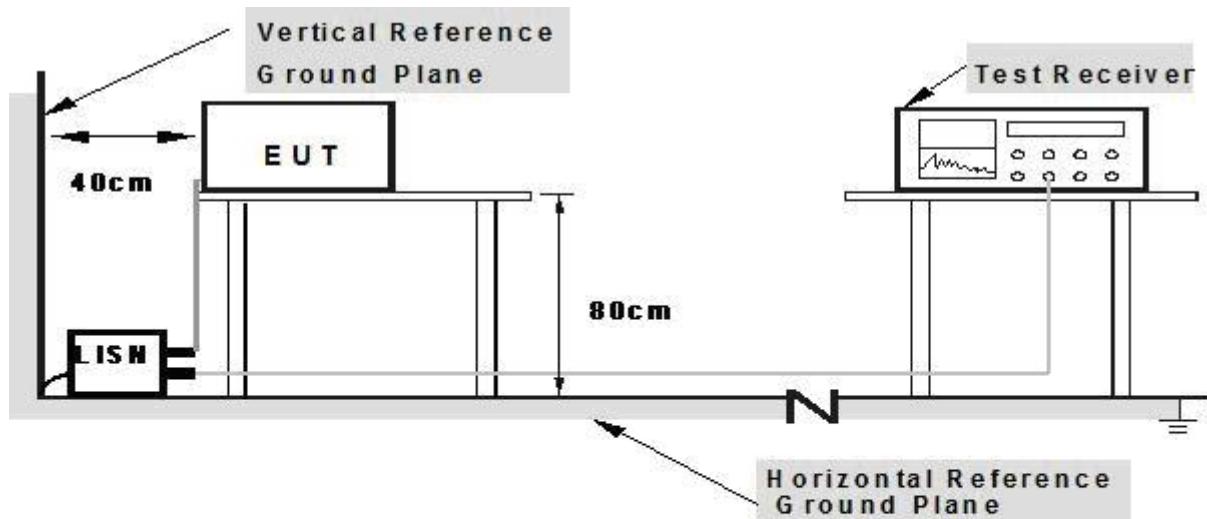

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMH) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.


3.1.5 TEST RESULTS

EUT :	smartphone	Model Name. :	Red Dragon
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-10-20
Test Mode :	Mode 1	Phase :	L
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency	Reading Level	Correct Factor	Measure-ment	Limits	Margin	Remark
(MHz)	(dB μ V)	(dB)	(dB μ V)	(dB μ V)	(dB)	
0.1819	29.21	9.61	38.82	64.39	-25.57	QP
0.1819	26.09	9.61	35.70	54.39	-18.69	AVG
0.2660	26.03	9.70	35.73	61.24	-25.51	QP
0.2660	25.53	9.70	35.23	51.24	-16.01	AVG
0.8580	26.11	9.75	35.86	56.00	-20.14	QP
0.8580	16.37	9.75	26.12	46.00	-19.88	AVG
1.9220	23.10	9.66	32.76	56.00	-23.24	QP
1.9220	16.84	9.66	26.50	46.00	-19.50	AVG
2.7980	23.37	9.67	33.04	56.00	-22.96	QP
2.7980	16.15	9.67	25.82	46.00	-20.18	AVG
3.9140	23.72	9.70	33.42	56.00	-22.58	QP
3.9140	19.09	9.70	28.79	46.00	-17.21	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

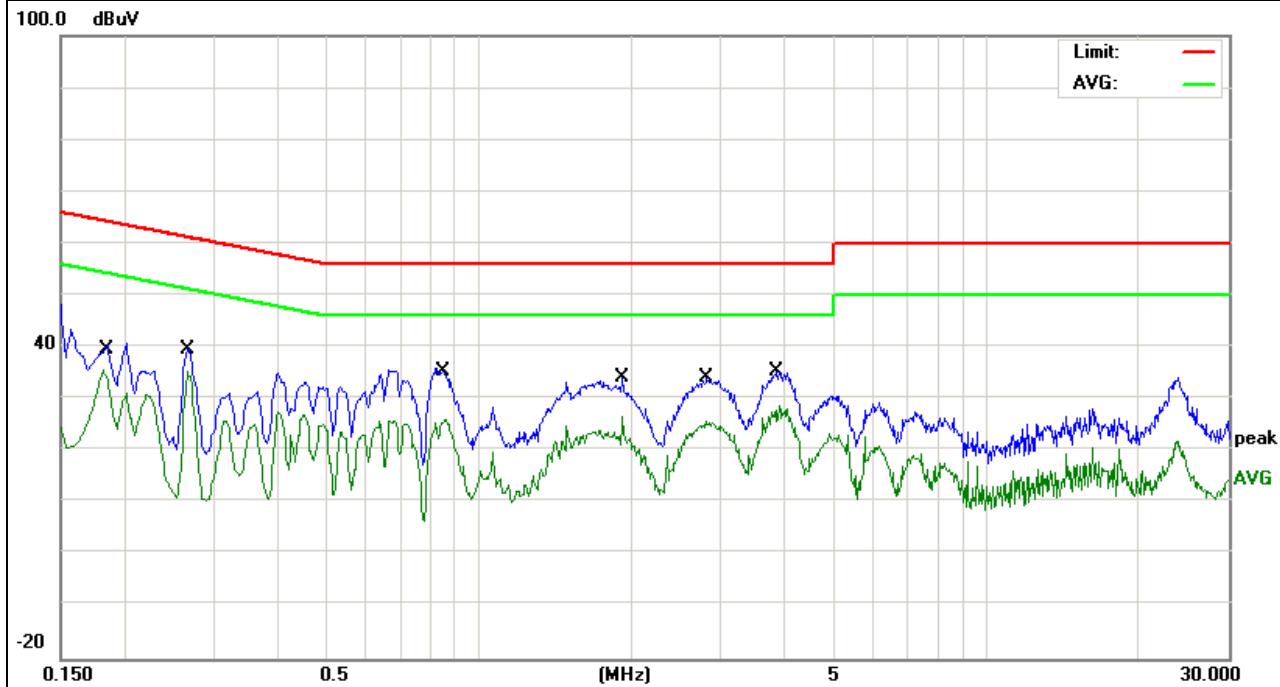


EUT :	smartphone	Model Name. :	Red Dragon
Temperature :	26 °C	Relative Humidity :	54%
Pressure :	1010hPa	Test Date :	2015-10-20
Test Mode :	Mode 1	Phase :	N
Test Voltage :	DC 5V From PC AC 120V/60Hz		

Frequency (MHz)	Reading Level (dB μ V)	Correct Factor (dB)	Measure-ment (dB μ V)	Limits (dB μ V)	Margin (dB)	Remark
0.1819	29.27	9.61	38.88	64.39	-25.51	QP
0.1819	26.00	9.61	35.61	54.39	-18.78	AVG
0.2660	26.63	9.62	36.25	61.24	-24.99	QP
0.2660	25.17	9.62	34.79	51.24	-16.45	AVG
0.8540	26.32	9.62	35.94	56.00	-20.06	QP
0.8540	16.79	9.62	26.41	46.00	-19.59	AVG
1.9220	23.19	9.55	32.74	56.00	-23.26	QP
1.9220	16.65	9.55	26.20	46.00	-19.80	AVG
3.9140	23.93	9.51	33.44	56.00	-22.56	QP
3.9140	18.81	9.51	28.32	46.00	-17.68	AVG
23.7380	20.60	9.92	30.52	60.00	-29.48	QP
23.7380	11.19	9.92	21.11	50.00	-28.89	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Factor = Insertion Loss + Cable Loss.

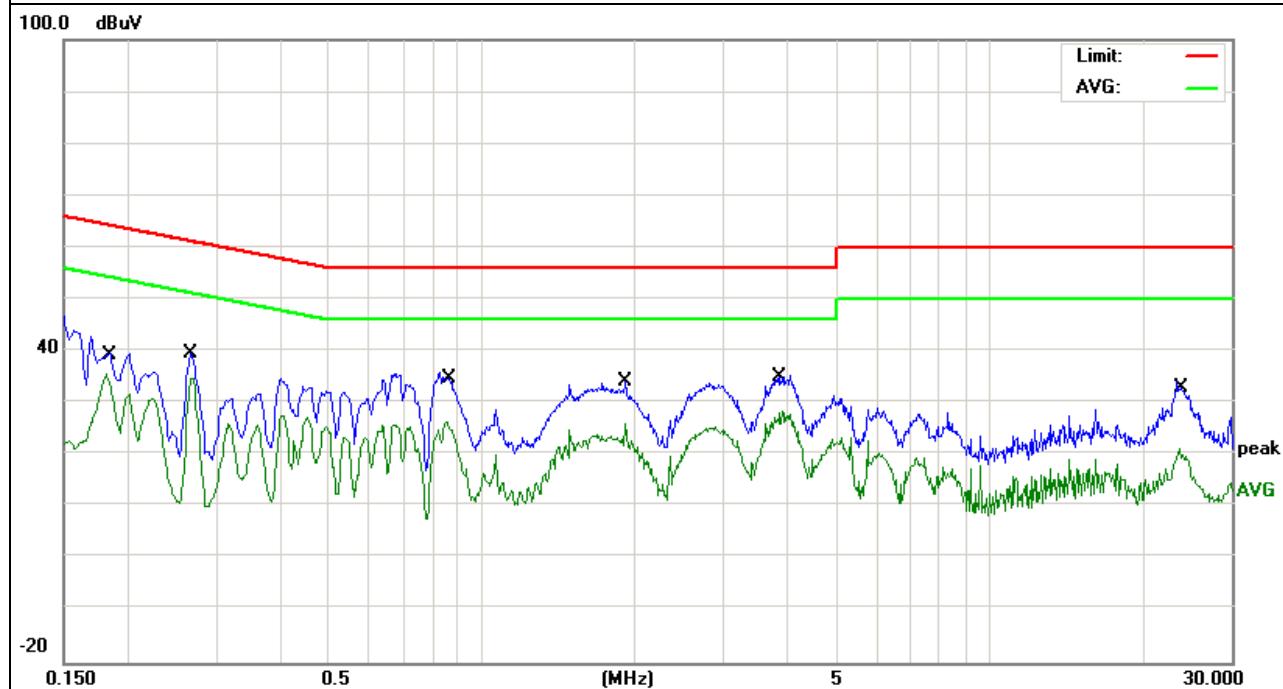

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (at 10m)	Class B (at 3m)
	dBuV/m	dBuV/m
30 ~ 88	39.0	40.0
88 ~ 216	43.5	43.5
216 ~ 960	46.5	46.0
Above 960	49.5	54.0

Notes:

- (1) The limit for radiated test was performed according to as following:
FCC PART 15B /ICES-003.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

3.2.2 TEST PROCEDURE

Test Arrangement for Radiated Emissions up to 1 GHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited test facility. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency below 1GHz.

Test Arrangement for Radiated Emissions above 1 GHz.

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at an accredited chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.


Note: For the hand-held device, the EUT should be measured for all 3 axes and only the worst case is recorded in the report

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:


Frequency Band (MHz)	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	QP	120 kHz	300 kHz
Above 1000	Peak	1 MHz	1 MHz
	Peak	1 MHz	10 Hz

3.2.3 TEST SETUP

For Radiated Emission 30~1000MHz

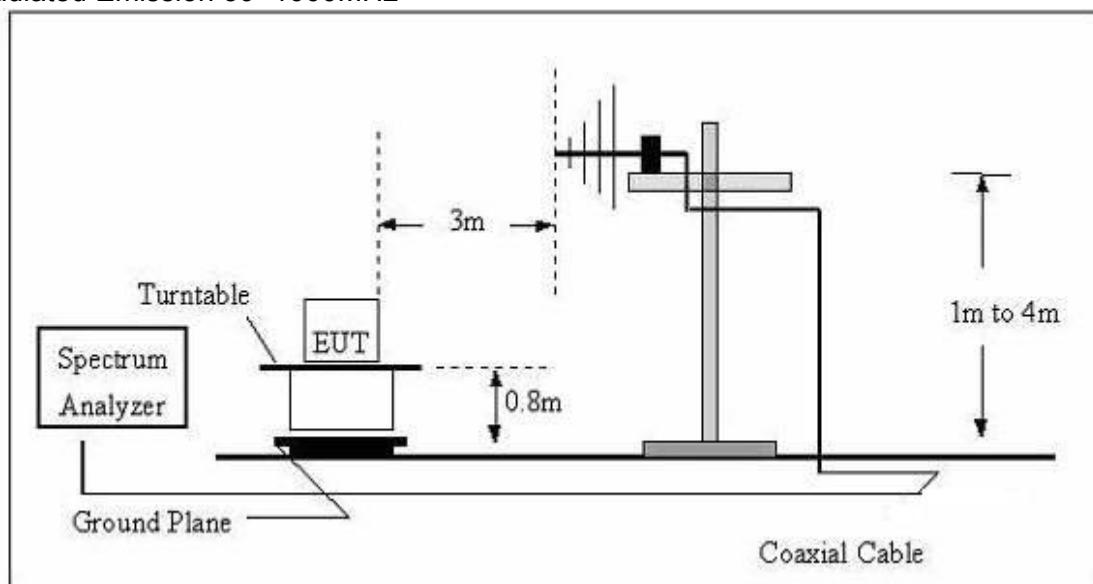

(B) Radiated Emission Test Set-Up Frequency Above 1GHz

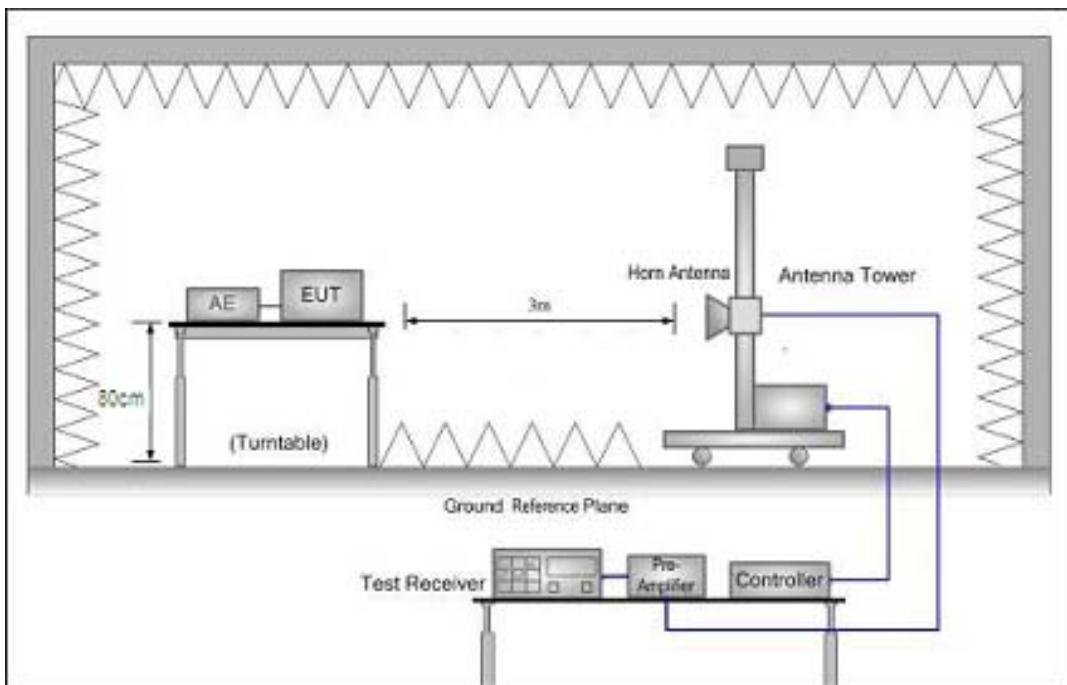

3.2.4 TEST RESULTS


TEST RESULTS (30~1000 MHz)

EUT :	smartphone	Model Name :	Red Dragon
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-10-20
Test Mode :	Mode 1	Polarization :	Horizontal
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
65.8031	26.61	6.52	33.13	40.00	-6.87	QP
195.822	27.93	10.75	38.68	43.50	-4.82	QP
360.4476	25.76	16.67	42.43	46.00	-3.57	QP
480.5276	21.13	19.91	41.04	46.00	-4.96	QP
668.1422	16.50	23.91	40.41	46.00	-5.59	QP
962.1621	16.25	27.38	43.63	54.00	-10.37	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

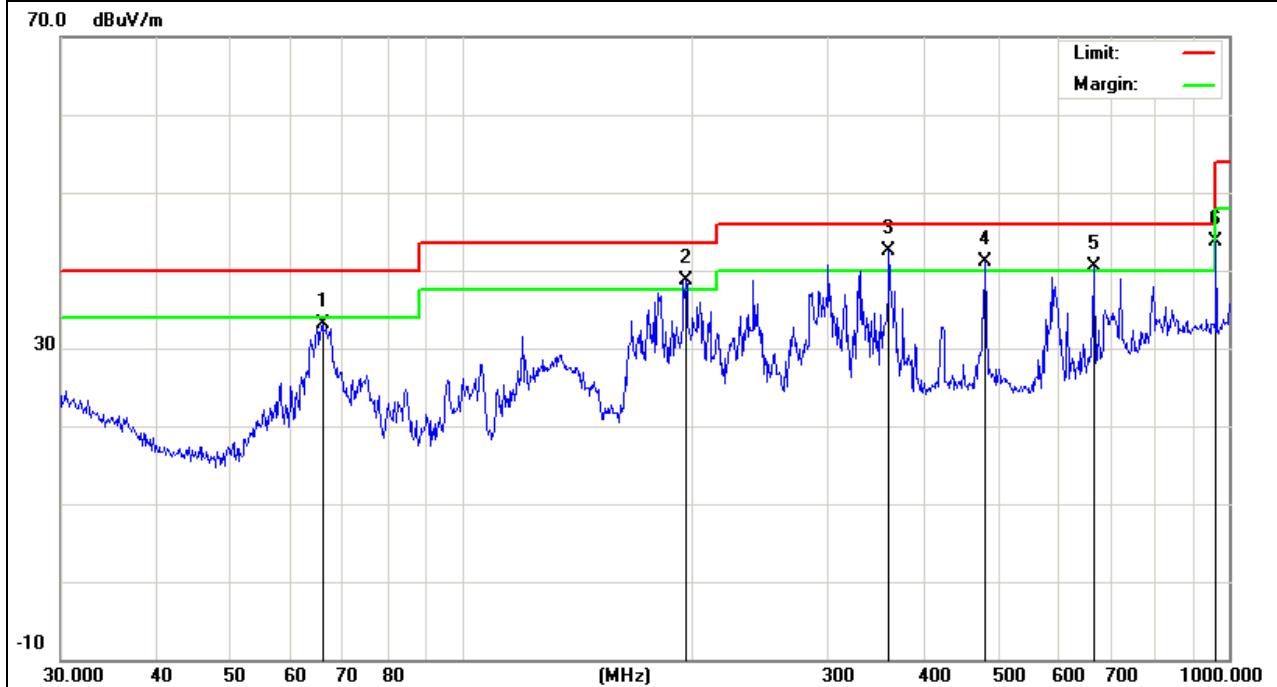


EUT :	smartphone	Model Name :	Red Dragon
Temperature :	24 °C	Relative Humidity :	54%
Pressure :	1010 hPa	Test Date :	2015-10-20
Test Mode :	Mode 1	Polarization :	Vertical
Test Power :	DC 5V From PC AC 120V/60Hz		

Freq. (MHz)	Reading (dBuV)	Factor (dBuV)	Measurement (dBuV)	Limit (dBuV)	Over (dB)	Remark
67.4381	26.62	6.15	32.77	40.00	-7.23	QP
195.8220	26.37	10.75	37.12	43.50	-6.38	QP
360.4476	26.45	16.67	43.12	46.00	-2.88	QP
480.5276	21.96	19.91	41.87	46.00	-4.13	QP
721.7259	15.28	25.36	40.64	46.00	-5.36	QP
962.1621	14.72	27.38	42.10	54.00	-11.90	QP

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

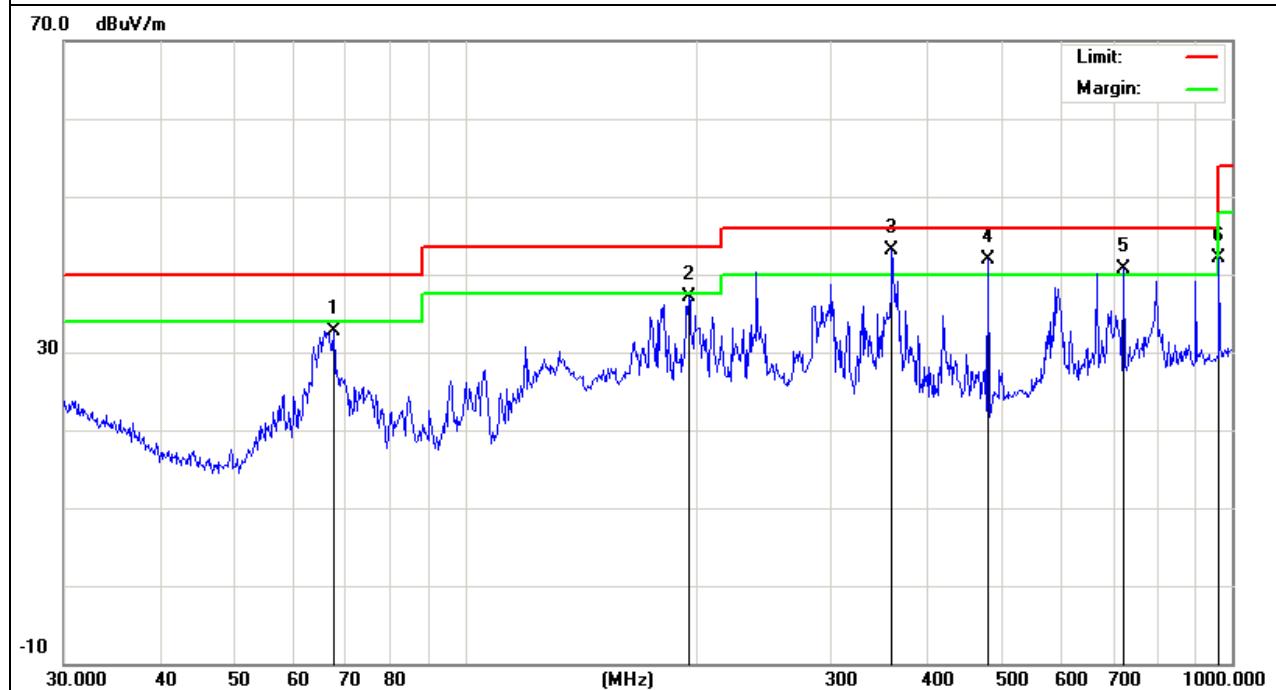

3.2.5 TEST RESULTS(1000~12400MHz)

Polar (H/V)	Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Remark
	(MHz)	(dBm)	(dB)	(dBm)	(dBm)	(dB)	
V	1178.632	65.46	-18.01	47.45	74	-26.55	peak
V	1178.632	43.06	-18.01	25.05	54	-28.95	AVG
V	1990.723	63.73	-13.04	50.69	74	-23.31	peak
V	1990.723	42.28	-13.04	29.24	54	-24.76	AVG
V	2316.109	63.27	-12.79	50.48	74	-23.52	peak
V	2316.109	40.68	-12.79	27.89	54	-26.11	AVG
V	2715.916	63.39	-11.52	51.87	74	-22.13	peak
V	2715.916	41.03	-11.52	29.51	54	-24.49	AVG
V	2916.004	62.68	-11.7	50.98	74	-23.02	peak
V	2916.004	42.64	-11.7	30.94	54	-23.06	AVG
V	4040.818	59.47	-5.72	53.75	74	-20.25	peak
V	4040.818	38.07	-5.72	32.35	54	-21.65	AVG
H	1379.122	60.29	-17.17	43.12	74	-30.88	peak
H	1379.122	40.12	-17.17	22.95	54	-31.05	AVG
H	1578.748	60.68	-16.24	44.44	74	-29.56	peak
H	1578.748	40.87	-16.24	24.63	54	-29.37	AVG
H	1990.637	59.09	-13.04	46.05	74	-27.95	peak
H	1990.637	38.48	-13.04	25.44	54	-28.56	AVG
H	2766.016	58.89	-11.35	47.54	74	-26.46	peak
H	2766.016	37.61	-11.35	26.26	54	-27.74	AVG
H	3853.801	55.53	-6.96	48.57	74	-25.43	peak
H	3853.801	33.93	-6.99	26.94	54	-27.06	AVG
H	4828.645	53.39	-3.27	50.12	74	-23.88	peak
H	4828.645	32.33	-3.29	29.04	54	-24.96	AVG

Remark:

Absolute Level= ReadingLevel+ Factor, Margin= Absolute Level - Limit

4. EUT TEST PHOTO**Radiated Measurement Photos**

Conducted Measurement Photos

