
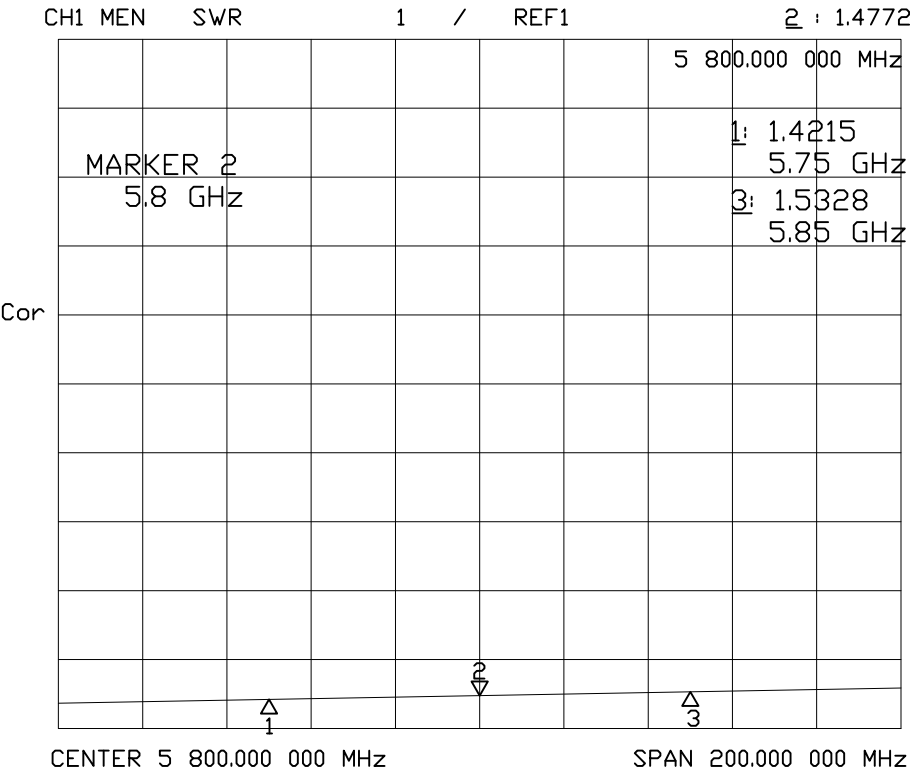


DTTX

大唐通信

DTMG5.8G-SMA-JW-59

Shenzhen Datang Communication Equipment Co., Ltd.
Unit F1, 4th Floor, Building 1, Financial Service Technology Innovation
Base, No.8 Keda Road, Nanshan District, Shenzhen

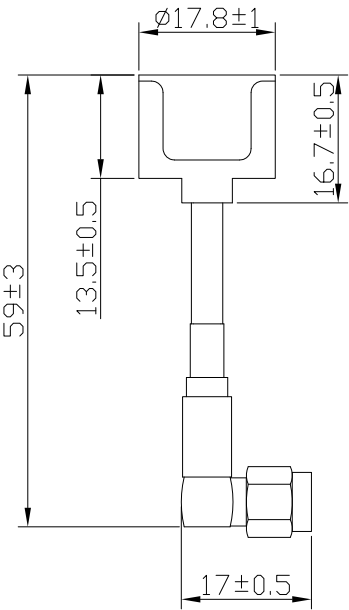

电性能指标 ELECTRICAL SPECIFICATIONS		机械性能 MECHANICAL SPECIFICATIONS	
产品名称 Product Type	蘑菇天线	产品名称 Product Type	蘑菇天线
型号 model Type	DTMG5.8G-SMA-JW-59	型号 model Type	DTMG5.8G-SMA-JW-59
频率范围 Frequency Range	5500-6000Mhz	高度 Height	59±3mm
输入阻抗 Impedance	50Ω	最大直径 Max diameter	17.8mm
驻波比 VSWR	<2.0	最小直径 Min diameter	-----
增益 Gain	7.87dBi	接口 Connector	SMA公头公针弯头
极化 Polarization	RHCP	雷电保护 Lighting protection	直流接地
方向性 Radiation	全向	颜色 Color	黑色
最大功率 Max power	50W		

Gain&Efficiency&PhaseCenter 增益、效率和相位中心			
frequency 频率(MHz)	gain 增益(dBi)	efficiency 效率(dB)	efficiency 效率(%)
5500.00	6.84	-2.49	56.40
5600.00	7.87	-1.59	69.29
5700.00	5.61	-2.46	56.70
5800.00	4.48	-2.67	54.10
5900.00	4.14	-2.75	53.12
6000.00	6.04	-1.34	73.46
Vertical Analysis			
Frequency 频率(MHz)			
5500.00			
5600.00			
5700.00			
5800.00			
5900.00			
6000.00			
Vertical Analysis			
Frequency 频率(MHz)			
5500.00			
5600.00			
5700.00			
5800.00			
5900.00			
6000.00			
Horizontal Analysis			
Frequency 频率(MHz)			
5500.00			
5600.00			
5700.00			
5800.00			
5900.00			
6000.00			

