



RF TEST REPORT

Product Name: explorer digital receiver goggles

Model Name: GF003, GF002, GF001, GF004

FCC ID: 2AGB8-GF003

Issued For : FXT Technology Co., Limited

14th D, Fusen Building, Dongzhou Community, GuangMing
Street, Guangming District, Shenzhen, China

Issued By : Shenzhen LGT Test Service Co., Ltd.

Room 205, Building 13, Zone B, Zhenxiong Industrial Park,
No.177, Renmin West Road, Jinsha, Kengzi Street,
Pingshan District, Shenzhen, Guangdong, China

Report Number: LGT25D078RF06

Sample Received Date: April 11, 2025

Date of Test: April 11, 2025 ~ Aug. 13, 2025

Date of Issue: Aug. 18, 2025

The test report is effective only with both signature and specialized stamp. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report only apply to the tested sample.



TEST REPORT CERTIFICATION

Applicant: FXT Technology Co., Limited
Address: 14th D, Fusen Building, Dongzhou Community, GuangMing Street, Guangming District, Shenzhen, China
Manufacturer: FXT Technology Co., Limited
Address: 14th D, Fusen Building, Dongzhou Community, GuangMing Street, Guangming District, Shenzhen, China
Product Name: explorer digital receiver goggles
Trademark: FXT
Model Name: GF003
Series Model: GF002, GF001, GF004
Sample Status: Normal

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
FCC Part 15.407, Subpart E ANSI C63.10-2013	PASS

Prepared by:

Zane Shan

Zane Shan
Engineer

Approved by:

Vita Li

Vita Li
Technical Director





Table of Contents

Page

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	10
2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	11
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	12
3 . EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT	18
4. POWER SPECTRAL DENSITY TEST	29
4.1 LIMIT	29
4.2 TEST PROCEDURE	29
4.3 DEVIATION FROM STANDARD	29
4.4 TEST SETUP	30
4.5 EUT OPERATION CONDITIONS	30
4.6 TEST RESULTS	30
5. BANDWIDTH MEASUREMENT	31
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	31
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	32
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	33
6. MAXIMUM CONDUCTED OUTPUT POWER	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34
6.5 EUT OPERATION CONDITIONS	34
6.6 TEST RESULTS	34
7. CONDUCTED BANDEDGE	35
7.1 LIMIT	35
7.2 TEST PROCEDURE	35
7.3 DEVIATION FROM STANDARD	35



Table of Contents	Page
7.4 TEST SETUP	35
7.5 EUT OPERATION CONDITIONS	35
7.6 TEST RESULTS	35
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	35
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	36
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	36
9. ANTENNA REQUIREMENT	37
9.1 STANDARD REQUIREMENT	37
9.2 EUT ANTENNA	37
APPENDIX I - TEST RESULTS	38
DUTY CYCLE	38
MAXIMUM CONDUCTED OUTPUT POWER	45
-26DB BANDWIDTH	46
OCCUPIED CHANNEL BANDWIDTH	50
MAXIMUM POWER SPECTRAL DENSITY LEVEL	57
BAND EDGE	64
-6DB BANDWIDTH	69
APPENDIX II - MEASUREMENT PHOTOS	73



Revision History

Rev.	Issue Date	Contents
00	Aug. 18, 2025	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

Part 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b)/15.205/15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407(c)	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

NOTE:

(1) 'N/A' denotes test is not applicable in this Test Report.

(2) All tests are according to ANSI C63.10-2013.



1.1 TEST FACTORY

Company Name:	Shenzhen LGT Test Service Co., Ltd.
Address:	Room 205, Building 13, Zone B, Zhenxiong Industrial Park, No.177, Renmin West Road, Jinsha, Kengzi Street, Pingshan District, Shenzhen, Guangdong, China
Accreditation Certificate:	A2LA Certificate No.: 6727.01
	FCC Registration No.: 746540
	CAB ID: CN0136

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95** %.

No.	Item	Uncertainty
1	Occupied Channel Bandwidth	$\pm 0.46\%$
2	RF Output Power, Conducted	$\pm 0.71\text{dB}$
3	Power Spectral Density, Conducted	$\pm 1.57\text{ dB}$
4	Unwanted Emission, Conducted	$\pm 0.63\text{dB}$
5	Conducted emission	$\pm 2.80\text{dB}$
6	All Emissions, Radiated (0.009-30MHz)	$\pm 2.16\text{dB}$
7	All Emissions, Radiated (30MHz-1GHz)	$\pm 4.40\text{dB}$
8	All Emissions, Radiated (1GHz-18GHz)	$\pm 5.49\text{dB}$
9	Temperature	$\pm 0.5^{\circ}\text{C}$
10	Humidity	$\pm 2\%$
11	Duty Cycle	$\pm 2.3\%$

Note: The measurement uncertainty is not included in the test result.



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name:	explorer digital receiver goggles										
Trademark:	FXT										
Model Name:	GF003										
Series Model:	GF002, GF001, GF004										
Model Difference:	Only model difference.										
Product Description:	<table><tr><td rowspan="2">Operation Frequency:</td><td>IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz</td></tr><tr><td>IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz</td></tr><tr><td>Modulation Type:</td><td>802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</td></tr><tr><td>Antenna Designation:</td><td>External Antenna</td></tr><tr><td>Antenna Gain(dBi)</td><td>7.87dBi</td></tr></table> More details of EUT technical specification, please refer to the User Manual.		Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz	IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz	Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM	Antenna Designation:	External Antenna	Antenna Gain(dBi)	7.87dBi
Operation Frequency:	IEEE 802.11a/n(HT20)/ac(VHT20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40): 5.190GHz-5.230GHz										
	IEEE 802.11a/n(HT20)/ac(VHT20): 5.745GHz-5.825GHz IEEE 802.11a/n(HT40)/ac(VHT40): 5.755GHz-5.795GHz										
Modulation Type:	802.11a(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11n(OFDM): BPSK, QPSK, 16-QAM, 64-QAM 802.11ac (OFDM): BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM										
Antenna Designation:	External Antenna										
Antenna Gain(dBi)	7.87dBi										
Test Channel:	Please refer to the Note 3.										
Rating:	Input: DC 5V 1A										
Battery:	Capacity: 2000mAh Rated Voltage: 3.7V										
Hardware Version:	B										
Software Version:	V018										
Connecting I/O Port(s):	Please refer to the Note 1.										



Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna information refers to the manufacturer provide report, applicable only to the tested sample identified in the report. Due to the incorrect antenna information, a series of problems such as the accuracy of the test results will be borne by the customer.

3.

Operation Frequency of channel			
5.180GHz-5.240GHz		5.745GHz-5.825GHz	
Channel	Frequency	Channel	Frequency
36	5180	149	5745
38	5190	151	5755
40	5200	153	5765
42	5210	157	5785
44	5220	159	5795
46	5230	161	5805
48	5240	165	5825

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

Channel List for 802.11a/n/ac(20MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	--	--	--	--	--	--
40	5200	--	--	--	--	--	--
48	5240	--	--	--	--	--	--

Channel List for 802.11n/ac(40MHz)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	--	--	--	--	--	--
46	5230	--	--	--	--	--	--
--	--	--	--	--	--	--	--



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 3	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 4	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 5	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The battery is fully-charged during the radiated and RF conducted test.
(5) All 20M, 40M bandwidth modes have been tested, and the report only shows the worst mode data

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 6: TX Mode

2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test software Version	Test program: 5G WIFI	
sscom5.13.1	Mode Or Modulation type	Power setting
	a	31
	n20	30
	n40	29
Test software Version	Test program: 5G WIFI B4	
sscom5.13.1	Mode Or Modulation type	Power setting
	a	31
	n20	30
	n40	29



2.4 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Accessories Equipment

Description	Manufacturer	Model	S/N	Rating
USB-A to USB-C Cable	N/A	N/A	N/A	0.3m

Auxiliary Equipment

Description	Manufacturer	Model	S/N	Rating
Laptop	Lenovo	HKF-16	N/A	N/A
USB TO TTL	N/A	CP2102 MODULES	N/A	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

Conducted Emission					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
LISN	COM-POWER	LI-115	02032	2025.03.05	2026.03.04
LISN	SCHWARZBECK	NNLK 8122	00160	2025.03.05	2026.03.04
Transient Limiter	CYBERTEK	EM5010A	E225010004 9	2025.03.05	2026.03.04
Coaxial cables (9kHz-30MHz)	Juncoax	JMR600- NMNM-2M	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

Radiated Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
EMI Test Receiver	R&S	ESU8	100372	2025.03.06	2026.03.05
Active loop Antenna	ETS	6502	00049544	2025.03.11	2028.03.10
Spectrum Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Trilog Broadband Antenna (30M-1G)	SCHWARZBECK	VULB 9168	2705	2024.05.17	2027.05.16
Horn Antenna(1-18G)	SCHWARZBECK	3115	10SL0060	2025.03.10	2028.03.09
Horn Antenna(18-40G)	SCHWARZBECK	BBHA 9170	685	2023.10.23	2026.10.22
Pre-amplifier(30M-1G)	EMtrace	RP01A	02019	2025.03.06	2026.03.05
Pre-amplifier(1-26.5G)	Agilent	8449B	3008A4722	2025.03.06	2026.03.05
Pre-amplifier(18-40G)	SCHWARZBECK	BBV 9721	9721-019	2024.10.21	2025.10.20
Coaxial cables (9kHz-1GHz)	Juncoax	JMR600- NMNM-8M	N.A	2025.03.06	2026.03.05
Coaxial cables (1GHz-18GHz)	TaiHe	UCD460B- NMSM- 1M9	N.A	2025.03.06	2026.03.05
Coaxial cables (18GHz-40GHz)	Junkosha Inc.	MWX241- 05000KMS KMS	N.A	2025.03.08	2026.03.07
Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Antenna Tower	SAEMC	BK-4AT- BS-D	SK20210930 08	N.A	N.A
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Testing Software	EMC-I_V1.4.0.3_SKET				

RF Conducted Test equipment					
Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Until
Signal Analyzer	Keysight	N9010B	MY60242508	2025.03.05	2026.03.04
Signal Analyzer	Keysight	N9020A	MY50530994	2025.03.05	2026.03.04
Signal Analyzer	R&S	FSV40-N	102245	2025.02.17	2026.02.16
Power Sensor	R&S	NRP8S	149.0006K02 -104963-Ae	2025.03.06	2026.03.05
RF Automatic Test system	MW	MW100 -RFCB	MW220324L G-33	2025.03.06	2026.03.05
MXG Vector Signal Generator	Keysight	N5182B	MY59100717	2025.03.05	2026.03.04



Temperature& Humidity test chamber	AISRY	LX-1000L	171200018	2024.08.05	2025.08.04
Attenuator	eastsheep	90db	N.A	2025.03.06	2026.03.05
Temperature & Humidity	JINGCHUANG	BT-3	N.A	2025.03.10	2026.03.09
Digital multimeter	MASTECH	MS8261	MBGBC8305 3	2025.03.05	2026.03.04
DC source	Jiuyuan	QJ6010E	N.A	2025.03.09	2026.03.08
Testing Software	MTS8310_V2.0.0.0_MW				



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz




3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

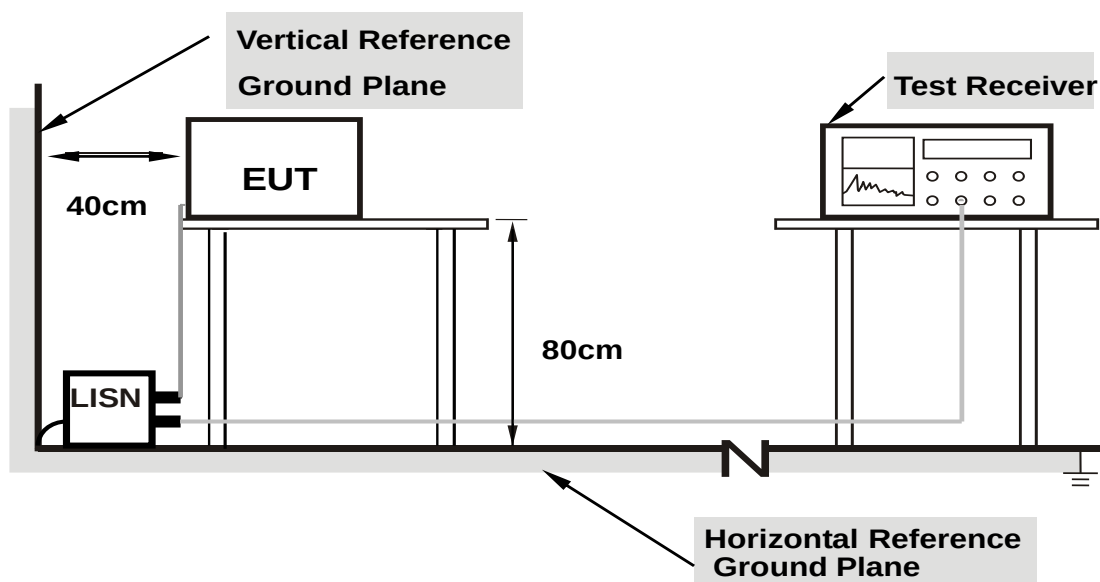

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.


3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.6 TEST RESULTS


Project: LGT25D078	Test Engineer: LiuH
EUT: explorer digital receiver goggles	Temperature: 23°C
M/N: GF003	Humidity: 46%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-04-17
Test Mode: TX 802.11a 5180	
Note:	

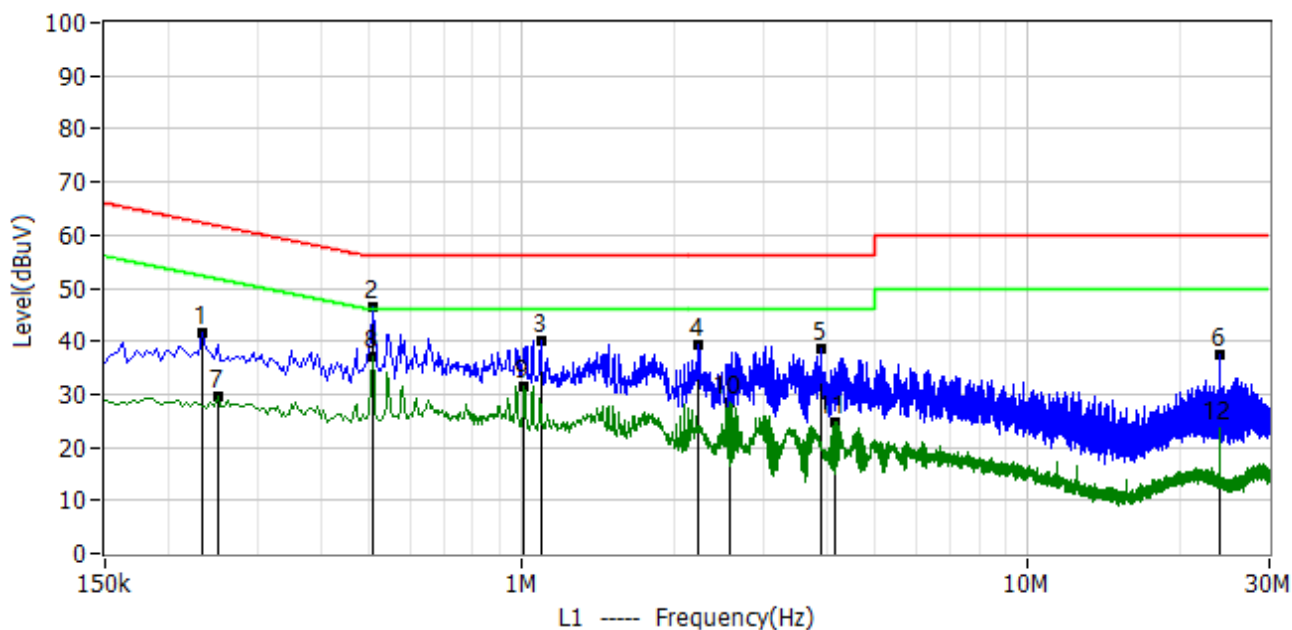

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.234	30.73	10.71	41.44	62.31	-20.87	QP	L1
2*	0.506	35.59	10.84	46.43	56.00	-9.57	QP	L1
3*	1.090	29.05	10.90	39.95	56.00	-16.05	QP	L1
4*	2.238	28.36	11.03	39.39	56.00	-16.61	QP	L1
5*	3.910	27.60	11.09	38.69	56.00	-17.31	QP	L1
6*	24.006	25.79	11.85	37.64	60.00	-22.36	QP	L1
7*	0.250	18.87	10.72	29.59	51.76	-22.16	AV	L1
8*	0.506	26.19	10.84	37.03	46.00	-8.97	AV	L1
9*	1.010	20.64	10.90	31.54	46.00	-14.46	AV	L1
10*	2.566	17.47	11.02	28.49	46.00	-17.51	AV	L1
11*	4.162	13.60	11.12	24.72	46.00	-21.28	AV	L1
12*	24.006	11.78	11.85	23.63	50.00	-26.37	AV	L1



Project: LGT25D078	Test Engineer: LiuH
EUT: explorer digital receiver goggles	Temperature: 23°C
M/N: GF003	Humidity: 46%RH
Test Voltage: AC 120V/60Hz	Test Data: 2025-04-17
Test Mode: TX 802.11a 5180	
Note:	

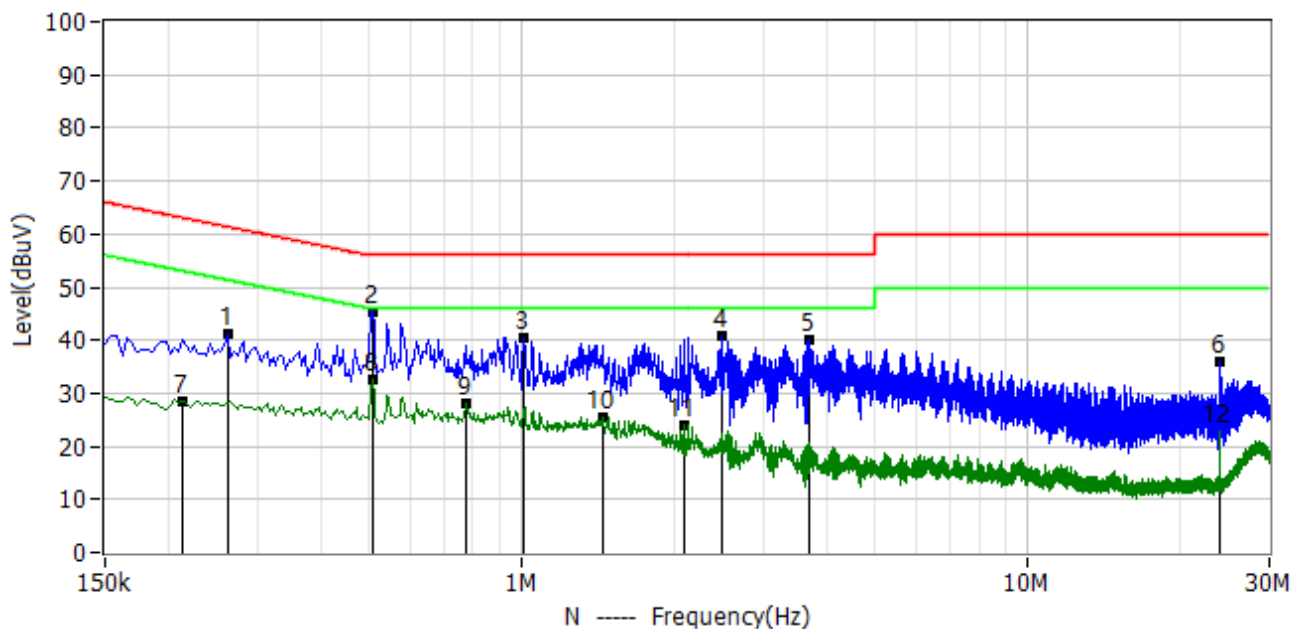

No.	Frequency MHz	Reading dBuV	Factor dB	Level dBuV	Limit dBuV	Margin dB	Detector	Polar
1*	0.262	30.32	10.79	41.11	61.37	-20.26	QP	N
2*	0.506	34.56	10.87	45.43	56.00	-10.57	QP	N
3*	1.006	29.66	10.93	40.59	56.00	-15.41	QP	N
4*	2.486	29.65	11.03	40.68	56.00	-15.32	QP	N
5*	3.682	28.98	11.05	40.03	56.00	-15.97	QP	N
6*	24.002	24.17	11.79	35.96	60.00	-24.04	QP	N
7*	0.214	17.72	10.77	28.49	53.05	-24.56	AV	N
8*	0.506	21.69	10.87	32.56	46.00	-13.44	AV	N
9*	0.778	17.15	10.91	28.06	46.00	-17.94	AV	N
10*	1.442	14.51	10.96	25.47	46.00	-20.53	AV	N
11*	2.094	13.03	11.02	24.05	46.00	-21.95	AV	N
12*	24.006	11.04	11.79	22.83	50.00	-27.17	AV	N

Remark

Level = Reading + Factor

Margin = Level – Limit



3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&15.205/209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	68.2	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.



LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: $\text{dBuV/m(at 3M)} = \text{EIRP(dBm)} + 95.2$.

Peak Limit = $-27\text{dBm/MHz} + 95.2 = 68.2 \text{ dBuV/m}$.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

- The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

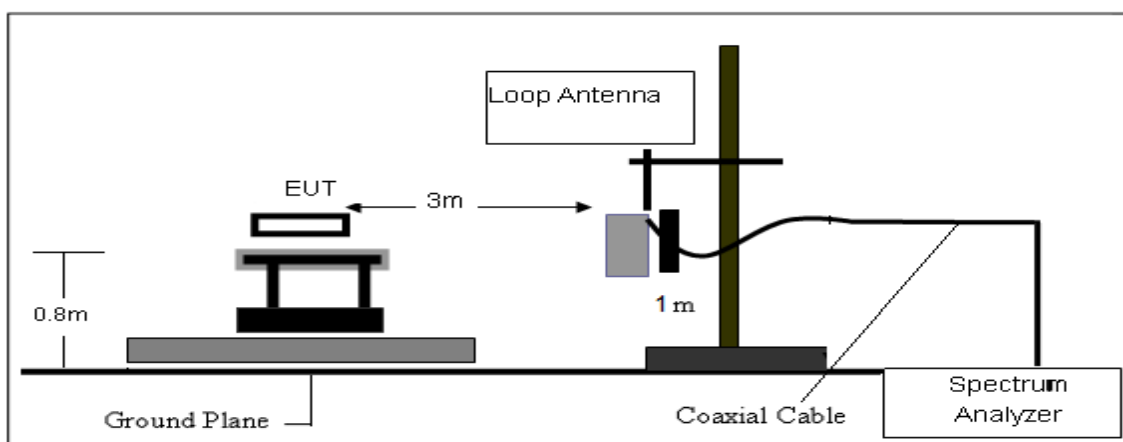

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

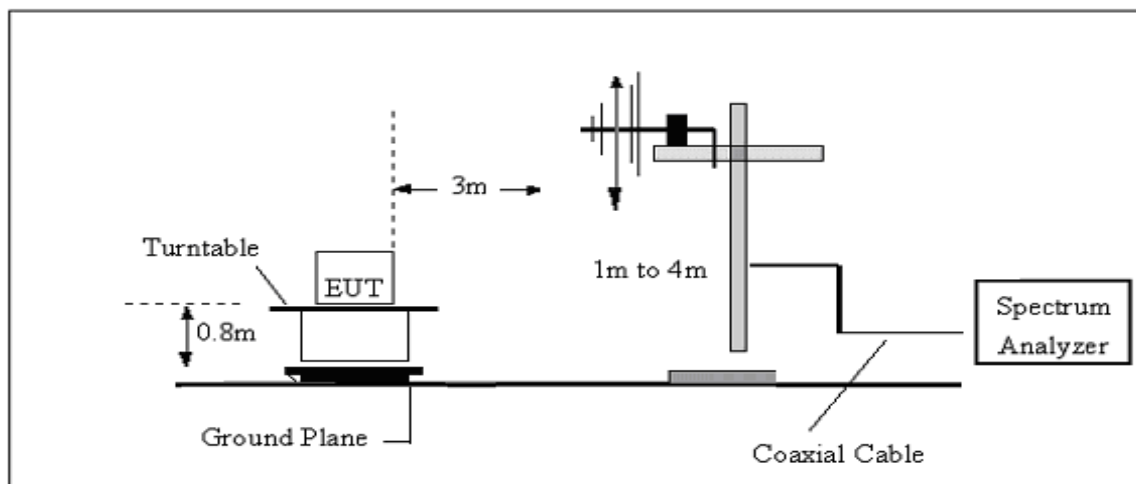

(C) Radiated Emission Test-Up Frequency Above 1GHz

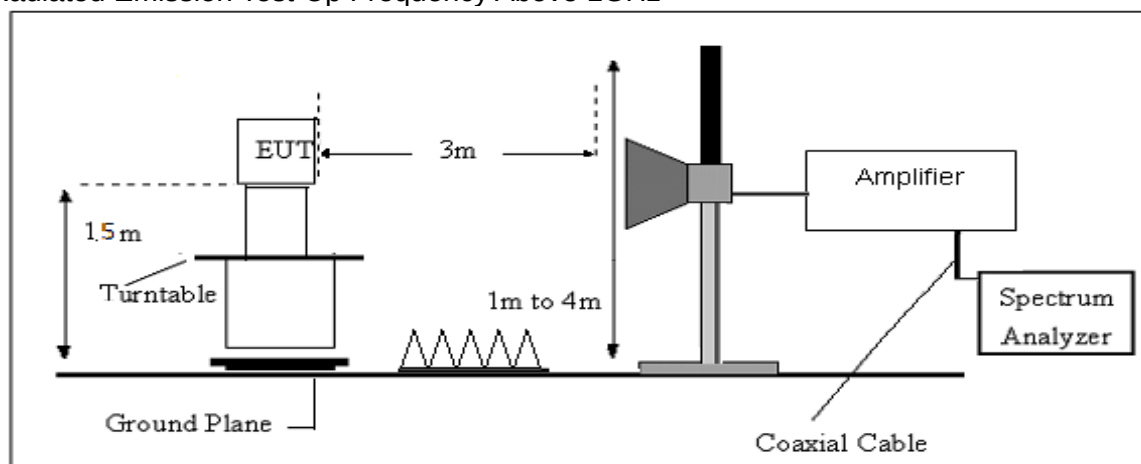



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULTS

Results of Radiated Emissions (9 KHz~30MHz)

No.	Frequency	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Remark
1*	-	-	-	-	-	-	-	See Note

Note:

The emission from 9 kHz to 30MHz was pre-tested and found the result was 20dB lower than the limit, and the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.




Results of Radiated Emissions (30MHz~1000MHz)

Project: LGT25D078	Test Engineer: LiuH
EUT: explorer digital receiver goggles	Temperature: 29.2°C
M/N: GF003	Humidity: 55%RH
Test Voltage: Battery	Test Data: 2025-04-18
Test Mode: TX 802.11a 5180	
Note:	

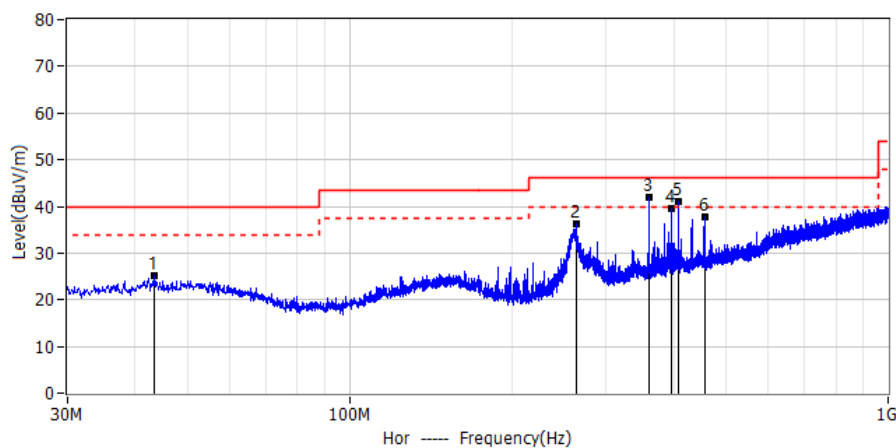

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	43.459	4.07	21.03	25.10	40.00	-14.90	QP	Hor
2*	264.013	15.72	20.51	36.23	46.00	-9.77	QP	Hor
3*	360.043	18.17	23.63	41.80	46.00	-4.20	QP	Hor
4*	396.054	14.49	25.18	39.67	46.00	-6.33	QP	Hor
5*	407.936	15.54	25.49	41.03	46.00	-4.97	QP	Hor
6*	456.073	11.25	26.47	37.72	46.00	-8.28	QP	Hor

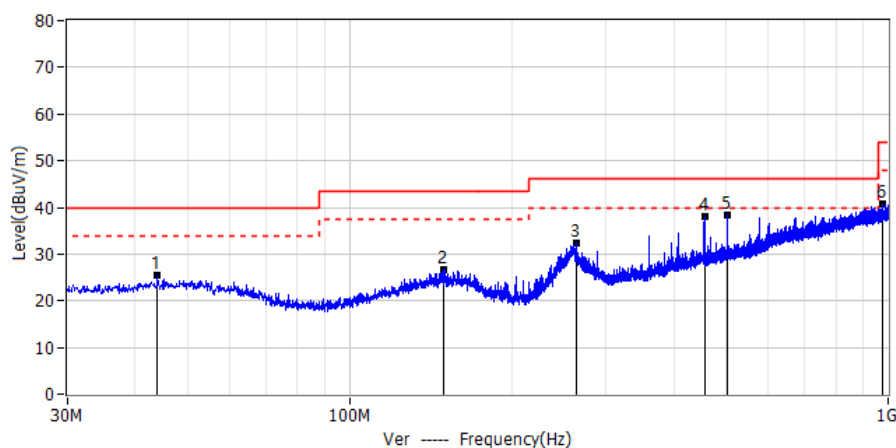

No.	Frequency MHz	Reading dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Margin dB	Detector	Polar
1*	44.065	4.57	20.97	25.54	40.00	-14.46	QP	Ver
2*	150.038	4.92	21.80	26.72	43.50	-16.78	QP	Ver
3*	264.013	11.75	20.51	32.26	46.00	-13.74	QP	Ver
4*	456.073	11.64	26.47	38.11	46.00	-7.89	QP	Ver
5*	504.088	10.48	27.78	38.26	46.00	-7.74	QP	Ver
6*	976.478	5.72	35.02	40.74	54.00	-13.26	QP	Ver

Remark

Level = Reading + Factor

Margin = Level – Limit



Results of Radiated Emissions (Above 1000MHz)

Band I(5.15-5.25) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5180 MHz)							
3993.46	52.90	-6.89	46.01	74.00	-27.99	PK	Vertical
3993.46	42.43	-6.89	35.54	54.00	-18.46	AV	Vertical
3988.69	52.43	-6.89	45.54	74.00	-28.46	PK	Horizontal
3988.69	43.16	-6.89	36.27	54.00	-17.73	AV	Horizontal
8926.31	54.42	-3.80	50.62	68.20	-17.58	PK	Vertical
8926.31	43.09	-3.80	39.29	54.00	-14.71	AV	Vertical
8912.40	54.39	-3.80	50.59	68.20	-17.61	PK	Horizontal
8912.40	43.80	-3.80	40.00	54.00	-14.00	AV	Horizontal
10360.04	56.11	-2.92	53.19	68.20	-15.01	PK	Vertical
10360.04	45.32	-2.92	42.40	54.00	-11.60	AV	Vertical
10359.96	56.09	-2.92	53.17	68.20	-15.03	PK	Horizontal
10359.96	44.38	-2.92	41.46	54.00	-12.54	AV	Horizontal
13280.94	53.66	-0.67	52.99	74.00	-21.01	PK	Vertical
13280.94	44.46	-0.67	43.79	54.00	-10.21	AV	Vertical
13285.12	54.78	-0.67	54.11	74.00	-19.89	PK	Horizontal
13285.12	43.84	-0.67	43.17	54.00	-10.83	AV	Horizontal
Mid Channel (802.11/ 5200 MHz)							
3998.02	52.80	-6.89	45.91	74.00	-28.09	PK	Vertical
3998.02	43.12	-6.89	36.23	54.00	-17.77	AV	Vertical
3996.84	53.21	-6.89	46.32	74.00	-27.68	PK	Horizontal
3996.84	42.06	-6.89	35.17	54.00	-18.83	AV	Horizontal
7233.87	53.20	-3.80	49.40	68.20	-18.80	PK	Vertical
7233.87	43.61	-3.80	39.81	54.00	-14.19	AV	Vertical
7217.19	54.07	-3.80	50.27	68.20	-17.93	PK	Horizontal
7217.19	43.44	-3.80	39.64	54.00	-14.36	AV	Horizontal
10399.94	56.01	-2.92	53.09	68.20	-15.11	PK	Vertical
10399.94	45.49	-2.92	42.57	54.00	-11.43	AV	Vertical
10400.09	55.14	-2.92	52.22	68.20	-15.98	PK	Horizontal
10400.09	44.61	-2.92	41.69	54.00	-12.31	AV	Horizontal
13299.62	53.98	-0.67	53.31	74.00	-20.69	PK	Vertical
13299.62	44.80	-0.67	44.13	54.00	-9.87	AV	Vertical
13298.64	54.79	-0.67	54.12	74.00	-19.88	PK	Horizontal
13298.64	44.57	-0.67	43.90	54.00	-10.10	AV	Horizontal
High Channel (802.11/ 5240 MHz)							
3986.86	53.48	-6.89	46.59	74.00	-27.41	PK	Vertical
3986.86	42.58	-6.89	35.69	54.00	-18.31	AV	Vertical
3984.98	52.87	-6.89	45.98	74.00	-28.02	PK	Horizontal
3984.98	43.28	-6.89	36.39	54.00	-17.61	AV	Horizontal
7236.05	53.98	-3.80	50.18	68.20	-18.02	PK	Vertical
7236.05	43.44	-3.80	39.64	54.00	-14.36	AV	Vertical
7235.79	53.63	-3.80	49.83	68.20	-18.37	PK	Horizontal
7235.79	44.22	-3.80	40.42	54.00	-13.58	AV	Horizontal
10480.00	56.10	-2.92	53.18	68.20	-15.02	PK	Vertical
10480.00	44.25	-2.92	41.33	54.00	-12.67	AV	Vertical
10479.98	56.29	-2.92	53.37	68.20	-14.83	PK	Horizontal
10479.98	44.46	-2.92	41.54	54.00	-12.46	AV	Horizontal
13299.91	54.81	-0.67	54.14	74.00	-19.86	PK	Vertical
13299.91	43.76	-0.67	43.09	54.00	-10.91	AV	Vertical
13284.88	53.73	-0.67	53.06	74.00	-20.94	PK	Horizontal
13284.88	44.96	-0.67	44.29	54.00	-9.71	AV	Horizontal



Band IV(5.725-5.85) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
Low Channel (802.11/ 5745 MHz)							
3998.48	53.18	-6.89	46.29	74.00	-27.71	PK	Vertical
3998.48	43.40	-6.89	36.51	54.00	-17.49	AV	Vertical
3987.41	52.54	-6.89	45.65	74.00	-28.35	PK	Horizontal
3987.41	42.82	-6.89	35.93	54.00	-18.07	AV	Horizontal
8921.00	54.18	-3.80	50.38	68.20	-17.82	PK	Vertical
8921.00	44.11	-3.80	40.31	54.00	-13.69	AV	Vertical
8920.87	53.48	-3.80	49.68	68.20	-18.52	PK	Horizontal
8920.87	44.07	-3.80	40.27	54.00	-13.73	AV	Horizontal
11487.00	56.17	-2.92	53.25	74.00	-20.75	PK	Vertical
11487.00	44.59	-2.92	41.67	54.00	-12.33	AV	Vertical
11473.62	55.59	-2.92	52.67	74.00	-21.33	PK	Horizontal
11473.62	44.61	-2.92	41.69	54.00	-12.31	AV	Horizontal
13289.82	53.81	-0.35	53.46	74.00	-20.54	PK	Vertical
13289.82	43.99	-0.35	43.64	54.00	-10.36	AV	Vertical
13294.95	54.00	-0.35	53.65	74.00	-20.35	PK	Horizontal
13294.95	44.04	-0.35	43.69	54.00	-10.31	AV	Horizontal
Mid Channel (802.11/ 5785 MHz)							
3998.61	53.22	-6.89	46.33	74.00	-27.67	PK	Vertical
3998.61	42.57	-6.89	35.68	54.00	-18.32	AV	Vertical
3989.94	52.02	-6.89	45.13	74.00	-28.87	PK	Horizontal
3989.94	42.93	-6.89	36.04	54.00	-17.96	AV	Horizontal
8907.48	53.19	-3.80	49.39	68.20	-18.81	PK	Vertical
8907.48	44.20	-3.80	40.40	54.00	-13.60	AV	Vertical
8912.16	53.31	-3.80	49.51	68.20	-18.69	PK	Horizontal
8912.16	44.50	-3.80	40.70	54.00	-13.30	AV	Horizontal
11556.14	56.35	-2.92	53.43	74.00	-20.57	PK	Vertical
11556.14	45.44	-2.92	42.52	54.00	-11.48	AV	Vertical
11555.30	56.19	-2.92	53.27	74.00	-20.73	PK	Horizontal
11555.30	45.15	-2.92	42.23	54.00	-11.77	AV	Horizontal
13284.06	53.79	-0.35	53.44	74.00	-20.56	PK	Vertical
13284.06	44.01	-0.35	43.66	54.00	-10.34	AV	Vertical
13286.62	54.26	-0.35	53.91	74.00	-20.09	PK	Horizontal
13286.62	44.49	-0.35	44.14	54.00	-9.86	AV	Horizontal
High Channel (802.11/ 5825 MHz)							
3995.24	52.91	-6.89	46.02	74.00	-27.98	PK	Vertical
3995.24	43.35	-6.89	36.46	54.00	-17.54	AV	Vertical
3980.32	52.67	-6.89	45.78	74.00	-28.22	PK	Horizontal
3980.32	42.03	-6.89	35.14	54.00	-18.86	AV	Horizontal
8910.13	54.36	-3.80	50.56	68.20	-17.64	PK	Vertical
8910.13	43.96	-3.80	40.16	54.00	-13.84	AV	Vertical
8906.41	53.89	-3.80	50.09	68.20	-18.11	PK	Horizontal
8906.41	43.63	-3.80	39.83	54.00	-14.17	AV	Horizontal
11637.27	55.24	-2.92	52.32	74.00	-21.68	PK	Vertical
11637.27	44.49	-2.92	41.57	54.00	-12.43	AV	Vertical
11650.02	55.08	-2.92	52.16	74.00	-21.84	PK	Horizontal
11650.02	44.70	-2.92	41.78	54.00	-12.22	AV	Horizontal
13288.76	53.85	-0.35	53.50	74.00	-20.50	PK	Vertical
13288.76	44.71	-0.35	44.36	54.00	-9.64	AV	Vertical
13283.24	54.01	-0.35	53.66	74.00	-20.34	PK	Horizontal
13283.24	43.80	-0.35	43.45	54.00	-10.55	AV	Horizontal

Remark:

Result = Reading + Corrected Factor, Margin = Result – Limit

In frequency ranges 18~25GHz no any other harmonic emissions detected which are tested to compliance with the limit. No recording in the test report. No any other emissions level which are attenuated less than 20dB below the limit. No recording in the test report.



3.2.7 TEST RESULTS(Band edge Requirements)

Band I(5.15-5.35) GHz							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5150	55.96	-7.51	48.45	74	-25.55	PK	Vertical
5150	44.33	-7.51	36.82	54	-17.18	AV	Vertical
5150	56.41	-7.51	48.90	74	-25.10	PK	Horizontal
5150	44.95	-7.51	37.44	54	-16.56	AV	Horizontal
5350	55.29	-8.19	47.10	74	-26.90	PK	Vertical
5350	44.65	-8.19	36.46	54	-17.54	AV	Vertical
5350	55.29	-8.19	47.10	74	-26.90	PK	Horizontal
5350	44.85	-8.19	36.66	54	-17.34	AV	Horizontal
802.11n BW40MHz							
5150	55.59	-7.51	48.08	74	-25.92	Peak	Vertical
5150	44.81	-7.51	37.30	54	-16.70	AVG	Vertical
5150	55.80	-7.51	48.29	74	-25.71	Peak	Horizontal
5150	44.07	-7.51	36.56	54	-17.44	AVG	Horizontal
5350	54.27	-8.19	46.08	74	-27.92	Peak	Vertical
5350	44.24	-8.19	36.05	54	-17.95	AVG	Vertical
5350	55.27	-8.19	47.08	74	-26.92	Peak	Horizontal
5350	43.87	-8.19	35.68	54	-18.32	AVG	Horizontal
802.11ac BW80MHz							
5150	55.87	-7.51	48.36	74	-25.64	Peak	Vertical
5150	45.25	-7.51	37.74	54	-16.26	AVG	Vertical
5150	55.01	-7.51	47.50	74	-26.50	Peak	Horizontal
5150	44.62	-7.51	37.11	54	-16.89	AVG	Horizontal
5350	54.06	-8.19	45.87	74	-28.13	Peak	Vertical
5350	43.77	-8.19	35.58	54	-18.42	AVG	Vertical
5350	54.70	-8.19	46.51	74	-27.49	Peak	Horizontal
5350	44.60	-8.19	36.41	54	-17.59	AVG	Horizontal



Band IV(5.725-5.85 GHz)							
Frequency (MHz)	Reading (dBμV)	Corrected Factor (dB)	Result (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector	Polarity
802.11n BW20MHz							
5460	53.96	-8.27	45.69	74	-28.31	PK	Vertical
5460	43.80	-8.27	35.53	54	-18.47	AV	Vertical
5460	53.20	-8.27	44.93	74	-29.07	PK	Horizontal
5460	42.99	-8.27	34.72	54	-19.28	AV	Horizontal
7250	54.96	-6.33	48.63	74	-25.37	PK	Vertical
7250	44.43	-6.33	38.10	54	-15.90	AV	Vertical
7250	54.81	-6.33	48.48	74	-25.52	PK	Horizontal
7250	44.54	-6.33	38.21	54	-15.79	AV	Horizontal
802.11n BW40MHz							
5460	54.01	-8.27	45.74	74	-28.26	PK	Vertical
5460	43.73	-8.27	35.46	54	-18.54	AV	Vertical
5460	53.04	-8.27	44.77	74	-29.23	PK	Horizontal
5460	42.95	-8.27	34.68	54	-19.32	AV	Horizontal
7250	54.74	-6.33	48.41	74	-25.59	PK	Vertical
7250	44.45	-6.33	38.12	54	-15.88	AV	Vertical
7250	55.06	-6.33	48.73	74	-25.27	PK	Horizontal
7250	44.25	-6.33	37.92	54	-16.08	AV	Horizontal
802.11ac BW80MHz							
5460	53.49	-8.27	45.22	74	-28.78	PK	Vertical
5460	43.62	-8.27	35.35	54	-18.65	AV	Vertical
5460	54.26	-8.27	45.99	74	-28.01	PK	Horizontal
5460	42.98	-8.27	34.71	54	-19.29	AV	Horizontal
7250	54.65	-6.33	48.32	74	-25.68	PK	Vertical
7250	43.68	-6.33	37.35	54	-16.65	AV	Vertical
7250	54.51	-6.33	48.18	74	-25.82	PK	Horizontal
7250	44.34	-6.33	38.01	54	-15.99	AV	Horizontal

Remark:

Result = Reading + Corrected Factor,

Margin = Result – Limit



4. POWER SPECTRAL DENSITY TEST

4.1 LIMIT

1. For mobile and portable client devices in the 5.15-5.25 GHz band, , the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
2. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
3. For the band 5.725-5.850 GHz, the peak power spectral density shall not exceed 30 dBm in any 500KHz band. If transmitting antenna directional gain is greater than 6 dBi, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.2 TEST PROCEDURE

1. The setting follows Method SA-1 of FCC KDB 789033 D02 General U-NII Test Procedures New Rules v02r01.

For devices operating in the band, the rules specify a measurement bandwidth of 500 kHz. Many spectrum analyzers do not have 500 kHz RBW, thus a narrower RBW may need to be used. The rules permit the use of a RBWs less than 1 MHz, or 500 kHz, “provided that the measured power is integrated over the full reference bandwidth” to show the total power over the specified measurement bandwidth (*i.e.*, 1 MHz, or 500 kHz). If measurements are performed using a reduced resolution bandwidth (< 1 MHz, or < 500 kHz) and integrated over 1 MHz, or 500 KHz bandwidth, the following adjustments to the procedures apply:

- a) Set $RBW \geq 1/T$, where T is defined in section II.B.I.a).
- b) Set $VBW \geq 3 RBW$.
- c) If measurement bandwidth of Maximum PSD is specified in 500 kHz, add $10 \log (500\text{kHz}/RBW)$ to the measured result, whereas $RBW (< 500 \text{ kHz})$ is the reduced resolution bandwidth of the spectrum analyzer set during measurement.
- d) If measurement bandwidth of Maximum PSD is specified in 1 MHz, add $10 \log (1\text{MHz}/RBW)$ to the measured result, whereas $RBW (< 1 \text{ MHz})$ is the reduced resolution bandwidth of spectrum analyzer set during measurement.
- e) Care must be taken to ensure that the measurements are performed during a period of continuous transmission or are corrected upward for duty cycle.

Note: As a practical matter, it is recommended to use reduced RBW of 100 kHz for the sections 5.c) and 5.d) above, since $RBW=100 \text{ KHz}$ is available on nearly all spectrum analyzers.

4.3 DEVIATION FROM STANDARD

No deviation.



4.4 TEST SETUP



4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.1 Unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS

For the measurement records, refer to the appendix I.



5. BANDWIDTH MEASUREMENT

5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT

The following procedure shall be used for measuring 26 bandwidth.

5.1.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW $\geq$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT

The following procedure shall be used for measuring (99 %) power bandwidth.

5.2.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).
7. If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

5.2.2 DEVIATION FROM STANDARD

No deviation.

5.2.3 TEST SETUP



5.2.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.2.5 TEST RESULTS

For the measurement records, refer to the appendix I.



5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT

Section 15.407(e) specifies the minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz. The following procedure shall be used for measuring this bandwidth.

5.3.1 TEST PROCEDURE

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures v02r01.

a) Set RBW = 100 kHz.

b) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.

c) Detector = Peak.

d) Trace mode = max hold.

e) Sweep = auto couple.

f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

5.3.2 DEVIATION FROM STANDARD

No deviation.

5.3.3 TEST SETUP



5.3.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.3.5 TEST RESULTS

For the measurement records, refer to the appendix I.



6. MAXIMUM CONDUCTED OUTPUT POWER

6.1 LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10 log B, where B is the 26 dB emission bandwidth in megahertz, If transmitting antennas of directional gain greater than 6 dBi are used.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. If transmitting antennas of directional gain greater than 6 dBi are used.

FCC Part15 (15.407) , Subpart E				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.407(a) (1) (iv)	Output Power	0.25 watt	5150-5250	PASS
		The lesser of 250 mW or 11 dBm + 10 log (26 dB emission bandwidth)	5250-5350 5470-5725	
15.407(a) (3)		1 watt	5725-5825	


6.2 TEST PROCEDURE

The EUT was directly connected to the Power Sensor&PC.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

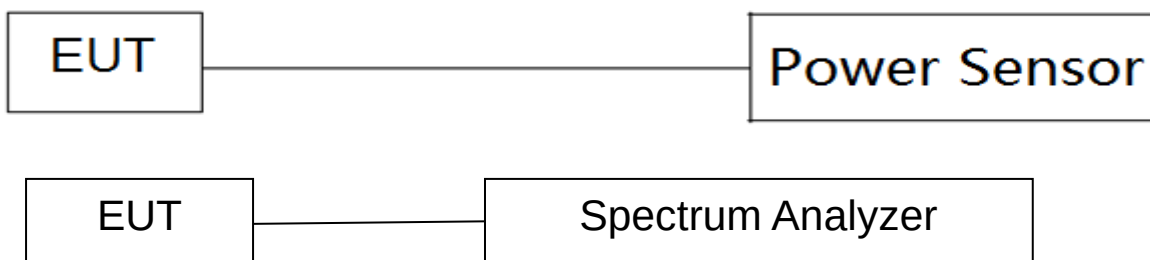

6.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 5 Unless otherwise a special operating condition is specified in the follows during the testing.

6.6 TEST RESULTS

For the measurement records, refer to the appendix I.



7. CONDUCTED BANDEDGE

7.1 LIMIT

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - a) 27 dBm/MHz at frequencies from the band edges decreasing linearly to 15.6 dBm/MHz at 5 MHz above or below the band edges;
 - b) 15.6 dBm/MHz at 5 MHz above or below the band edges decreasing linearly to 10 dBm/MHz at 25 MHz above or below the band edges;
 - c) 10 dBm/MHz at 25 MHz above or below the band edges decreasing linearly to -27 dBm/MHz at 75 MHz above or below the band edges; and
 - d) -27 dBm/MHz at frequencies more than 75 MHz above or below the band edges.

7.2 TEST PROCEDURE

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 3 MHz

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

7.6 TEST RESULTS

For the measurement records, refer to the appendix I.

8. AUTOMATICALLY DISCONTINUE TRANSMISSION



8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization to describe how this requirement is met.

8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION

During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission



9. ANTENNA REQUIREMENT

9.1 STANDARD REQUIREMENT

Part 15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

9.2 EUT ANTENNA


The EUT antenna is External Antenna. It comply with the standard requirement.





APPENDIX I - TEST RESULTS


Duty Cycle


Condition	Mode	Frequency (MHz)	On Time (ms)	Period (ms)	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	a	5180	1.392	1.409	98.79	0	0.72
NVNT	a	5200	1.393	1.41	98.79	0	0.72
NVNT	a	5240	1.392	1.409	98.79	0	0.72
NVNT	a	5745	1.393	1.409	98.86	0	0.72
NVNT	a	5785	1.393	1.41	98.79	0	0.72
NVNT	a	5825	1.392	1.409	98.79	0	0.72
NVNT	n20	5180	5.084	5.102	99.65	0	0.2
NVNT	n20	5200	5.084	5.102	99.65	0	0.2
NVNT	n20	5240	5.084	5.102	99.65	0	0.2
NVNT	n20	5745	5.084	5.102	99.65	0	0.2
NVNT	n20	5785	5.084	5.102	99.65	0	0.2
NVNT	n20	5825	5.084	5.102	99.65	0	0.2
NVNT	n40	5190	2.468	2.486	99.28	0	0.41
NVNT	n40	5230	2.468	2.486	99.28	0	0.41
NVNT	n40	5755	2.47	2.486	99.36	0	0.4
NVNT	n40	5795	2.468	2.486	99.28	0	0.41

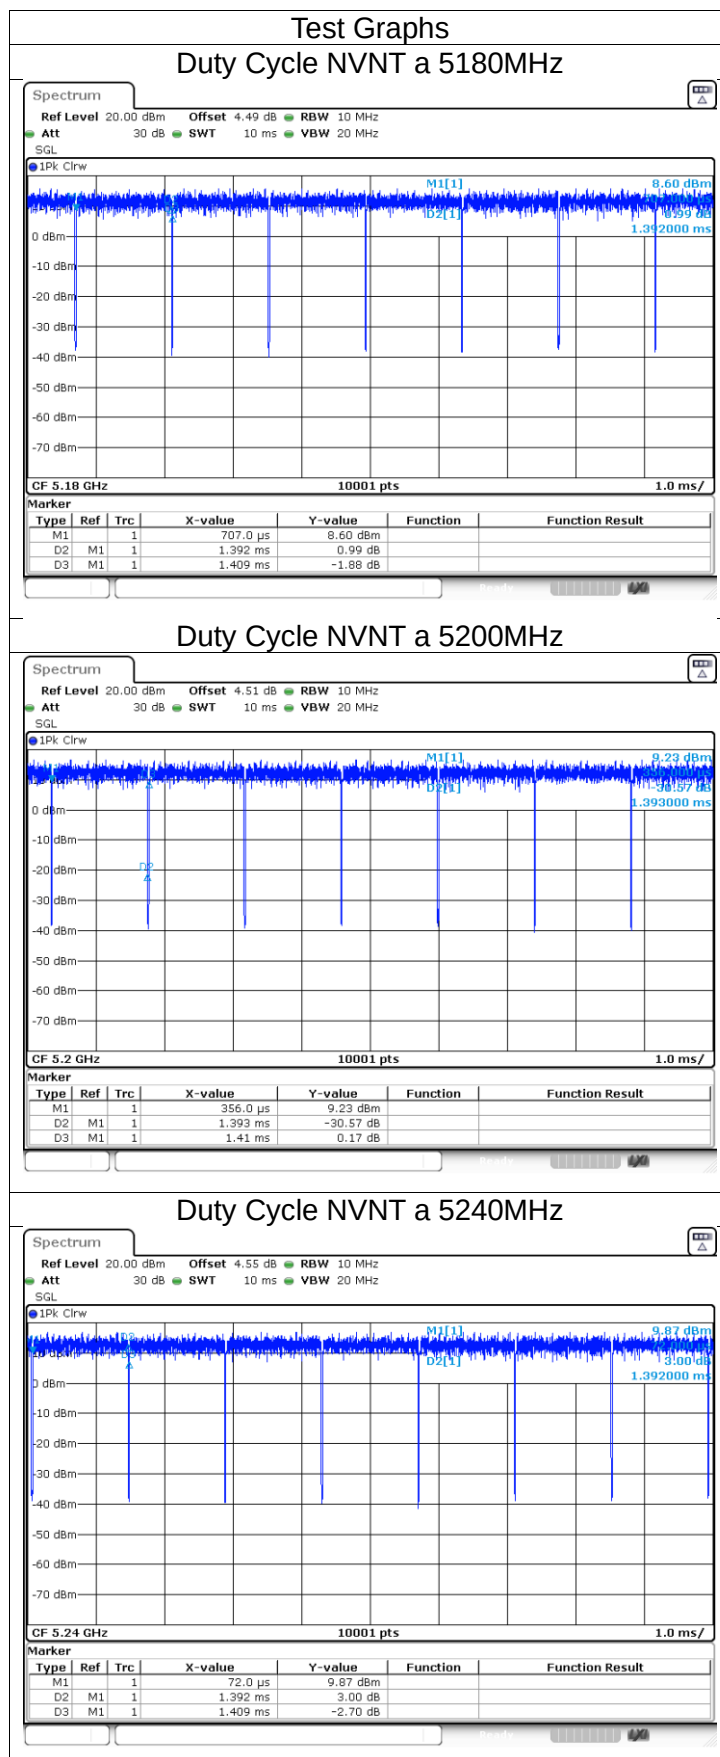


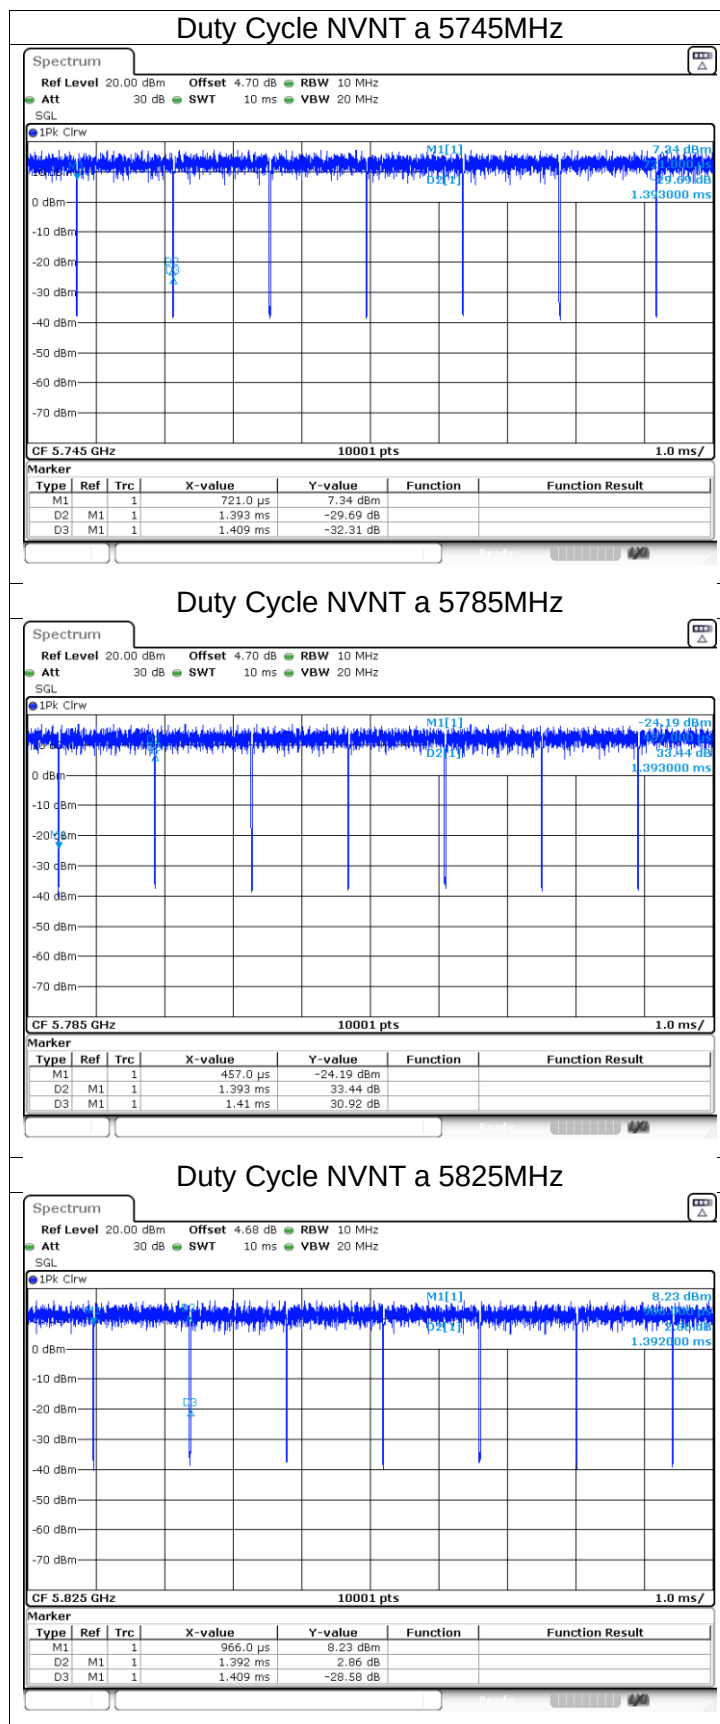

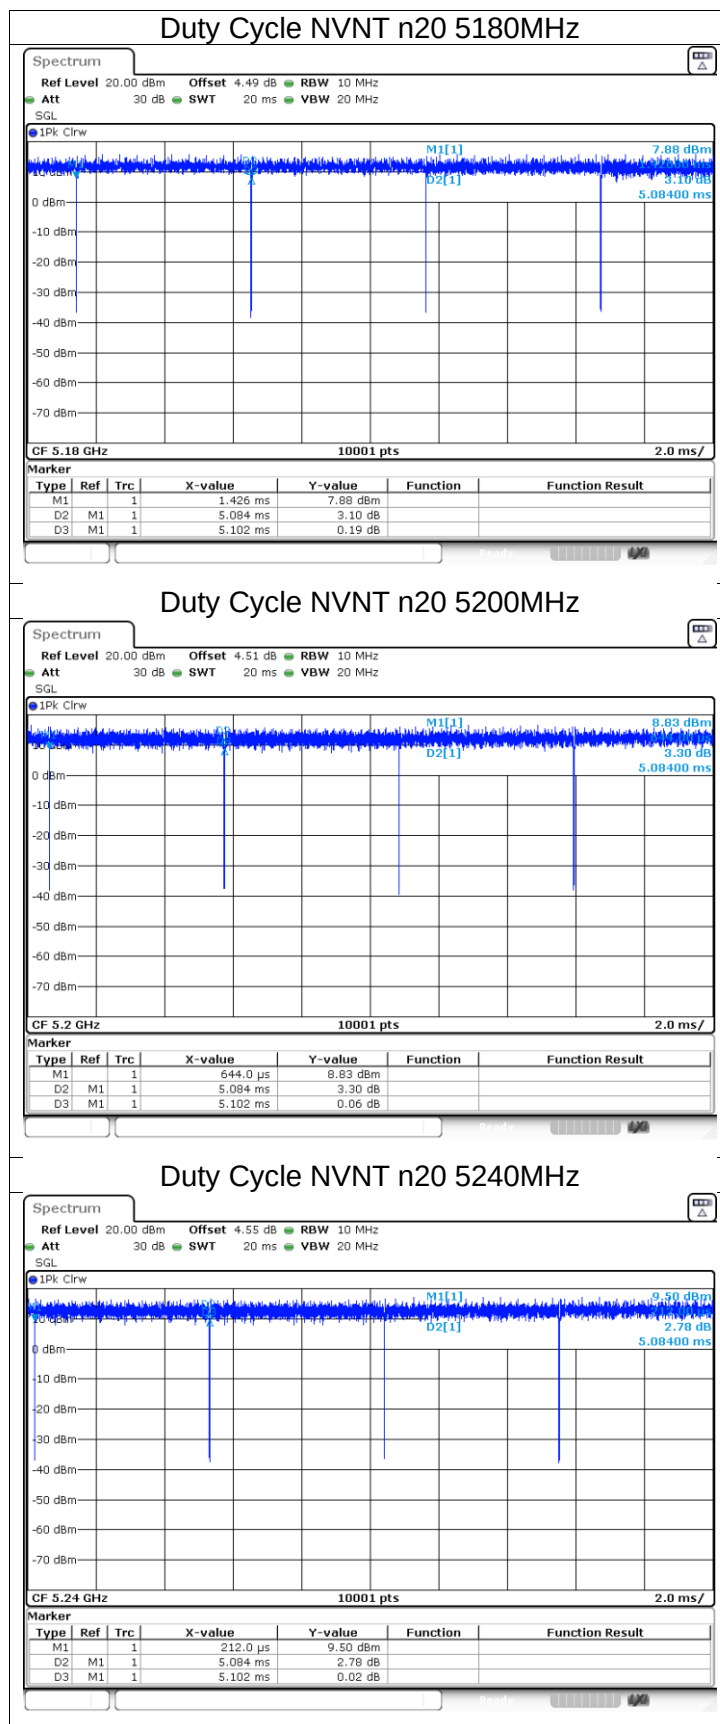

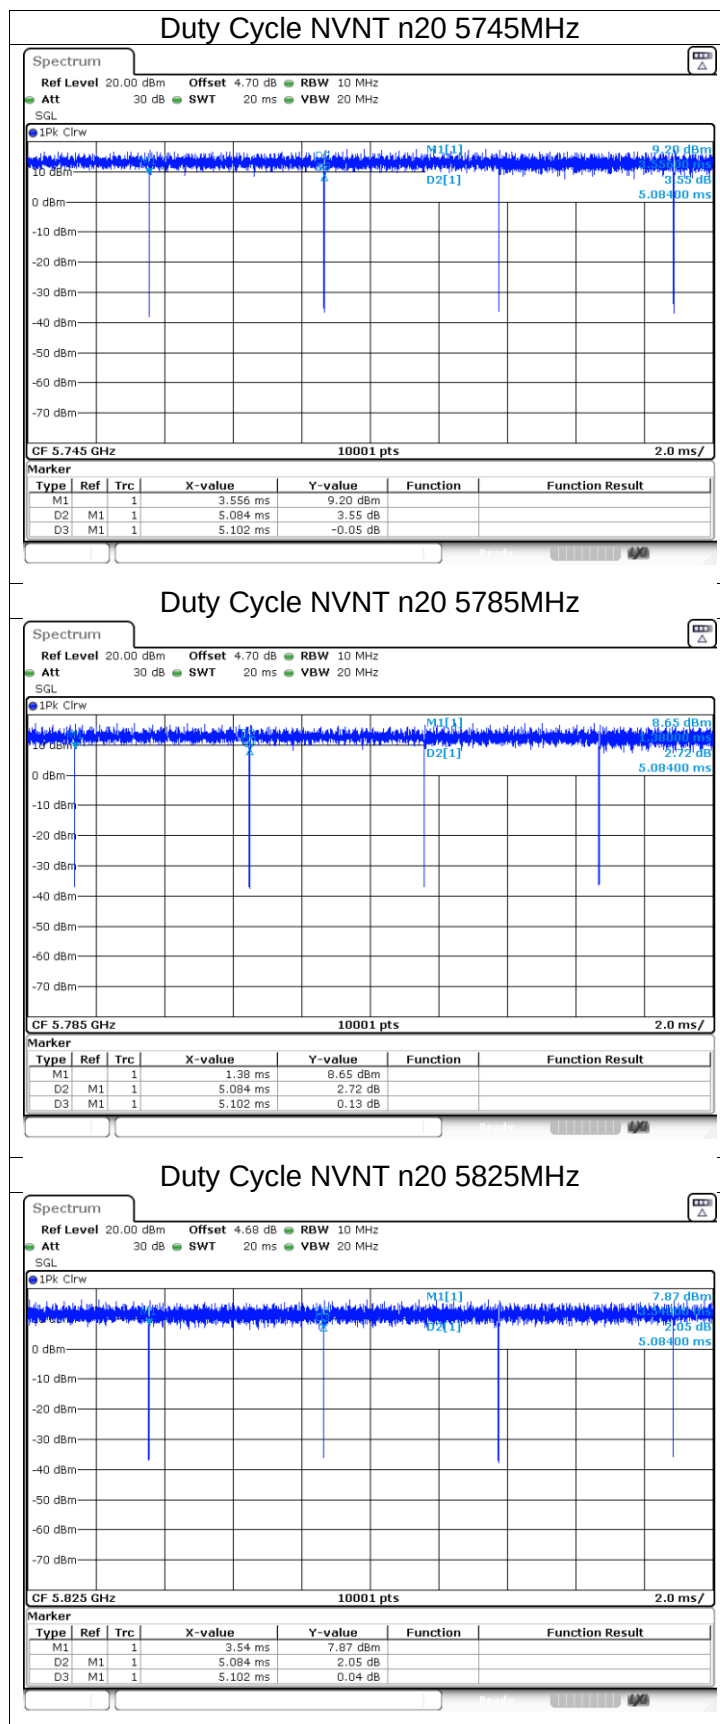

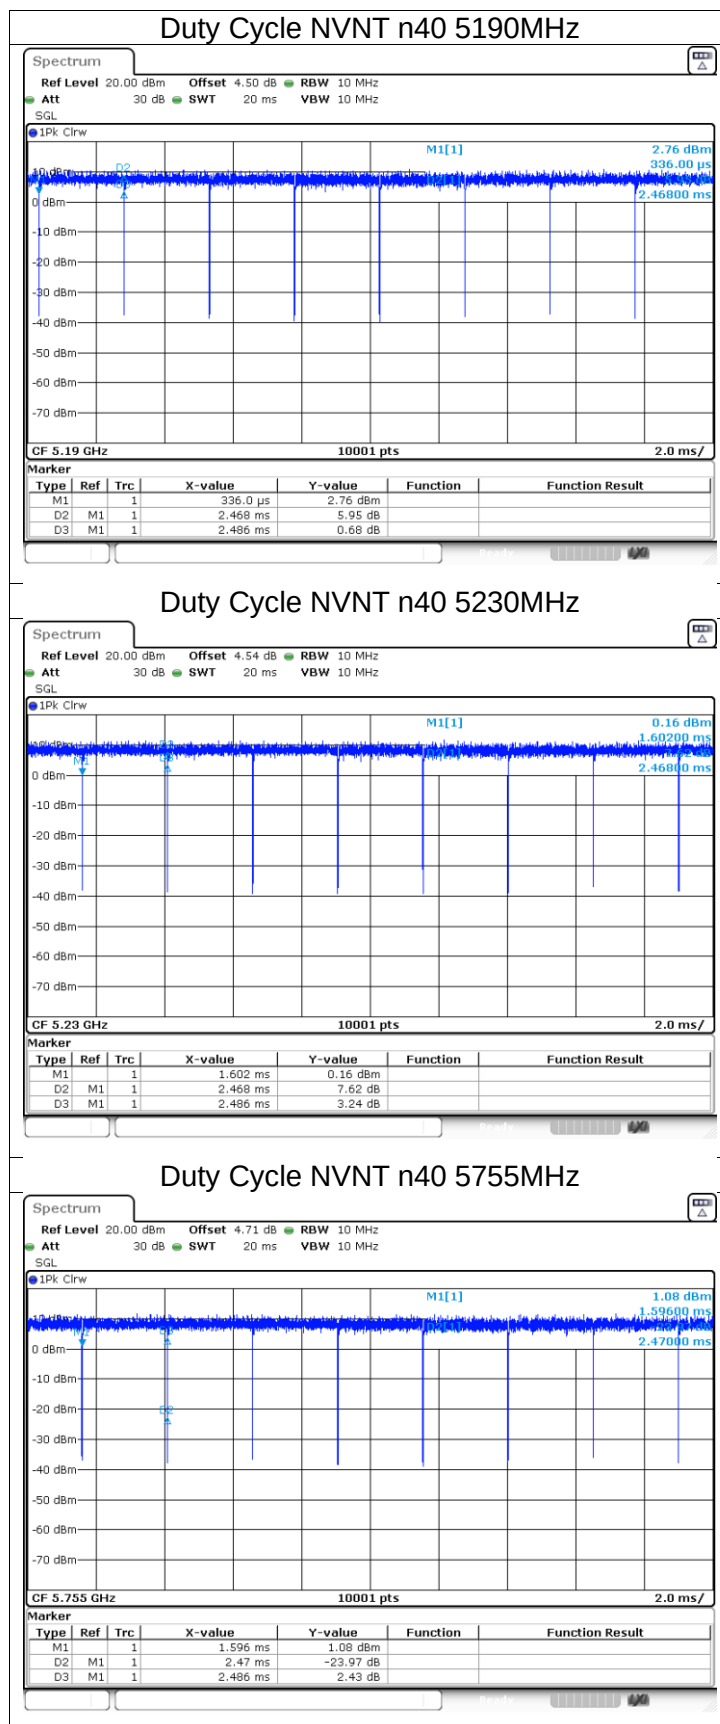

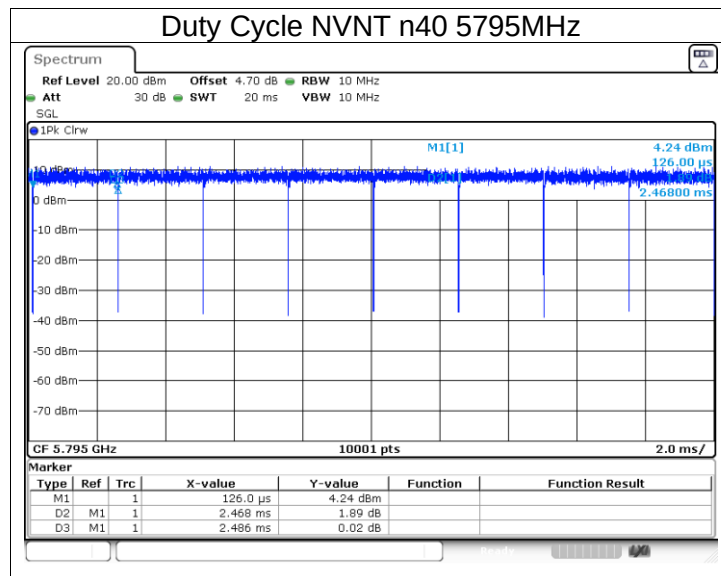



Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	6.31	0	6.31	21.13	Pass
NVNT	a	5200	7.03	0	7.03	21.13	Pass
NVNT	a	5240	7.43	0	7.43	21.13	Pass
NVNT	a	5745	7.16	0	7.16	27.13	Pass
NVNT	a	5785	6.84	0	6.84	27.13	Pass
NVNT	a	5825	5.8	0	5.8	27.13	Pass
NVNT	n20	5180	5.9	0	5.9	21.13	Pass
NVNT	n20	5200	6.61	0	6.61	21.13	Pass
NVNT	n20	5240	7.29	0	7.29	21.13	Pass
NVNT	n20	5745	7.1	0	7.1	27.13	Pass
NVNT	n20	5785	6.69	0	6.69	27.13	Pass
NVNT	n20	5825	5.73	0	5.73	27.13	Pass
NVNT	n40	5190	5.43	0	5.43	21.13	Pass
NVNT	n40	5230	6.18	0	6.18	21.13	Pass
NVNT	n40	5755	6.01	0	6.01	27.13	Pass
NVNT	n40	5795	5.53	0	5.53	27.13	Pass



-26dB Bandwidth

Condition	Mode	Frequency (MHz)	-26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	20.383	Pass
NVNT	a	5200	20.256	Pass
NVNT	a	5240	20.507	Pass
NVNT	n20	5180	20.589	Pass
NVNT	n20	5200	20.743	Pass
NVNT	n20	5240	20.732	Pass
NVNT	n40	5190	40.905	Pass
NVNT	n40	5230	40.779	Pass













Occupied Channel Bandwidth


Condition	Mode	Frequency (MHz)	99% OBW (MHz)
NVNT	a	5180	16.714
NVNT	a	5200	16.684
NVNT	a	5240	16.699
NVNT	a	5745	16.717
NVNT	a	5785	16.714
NVNT	a	5825	16.717
NVNT	n20	5180	17.812
NVNT	n20	5200	17.788
NVNT	n20	5240	17.794
NVNT	n20	5745	17.806
NVNT	n20	5785	17.803
NVNT	n20	5825	17.815
NVNT	n40	5190	36.32
NVNT	n40	5230	36.302
NVNT	n40	5755	36.35
NVNT	n40	5795	36.344

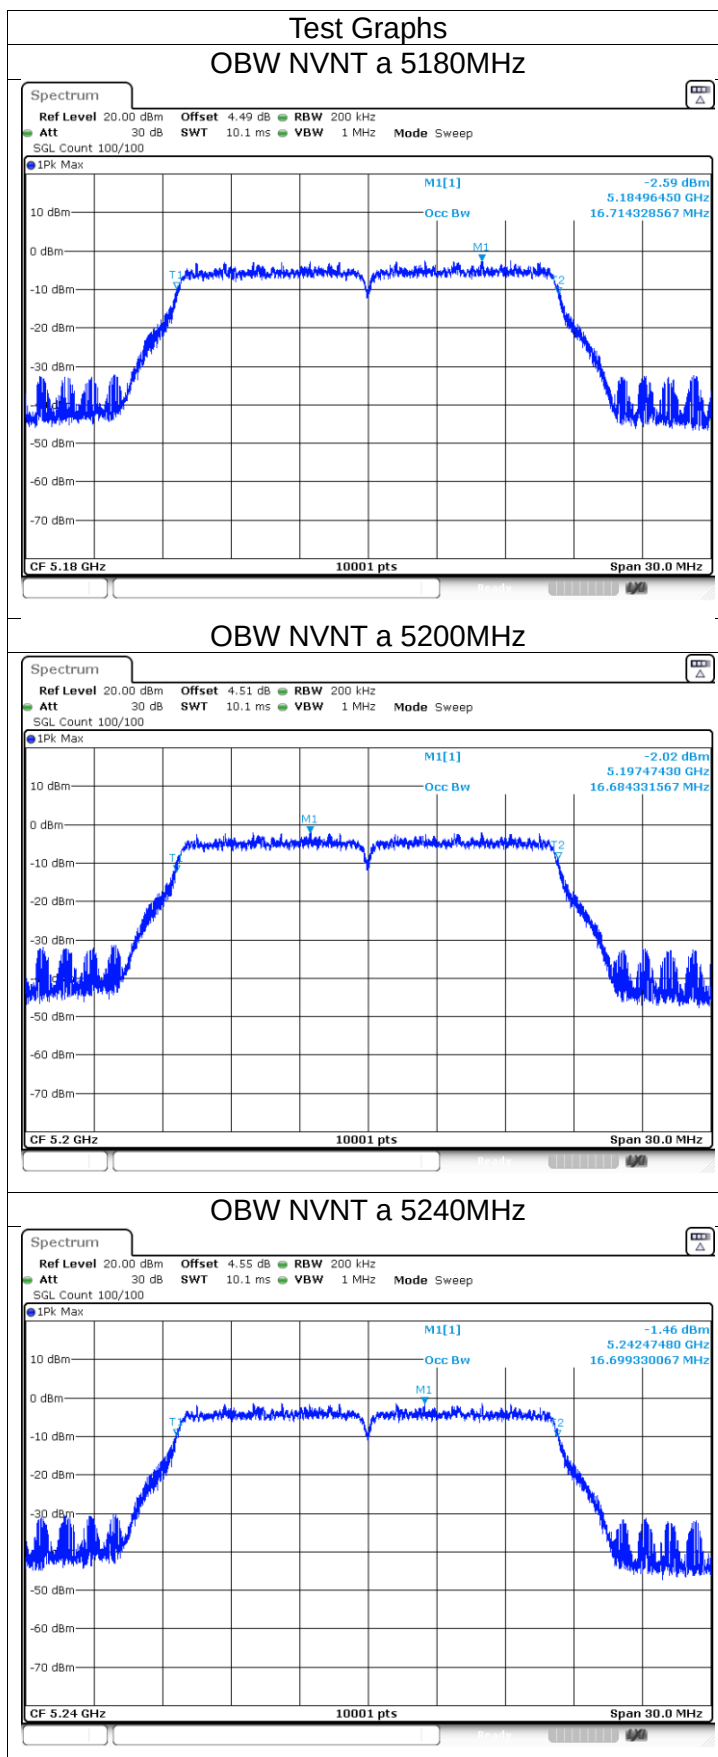


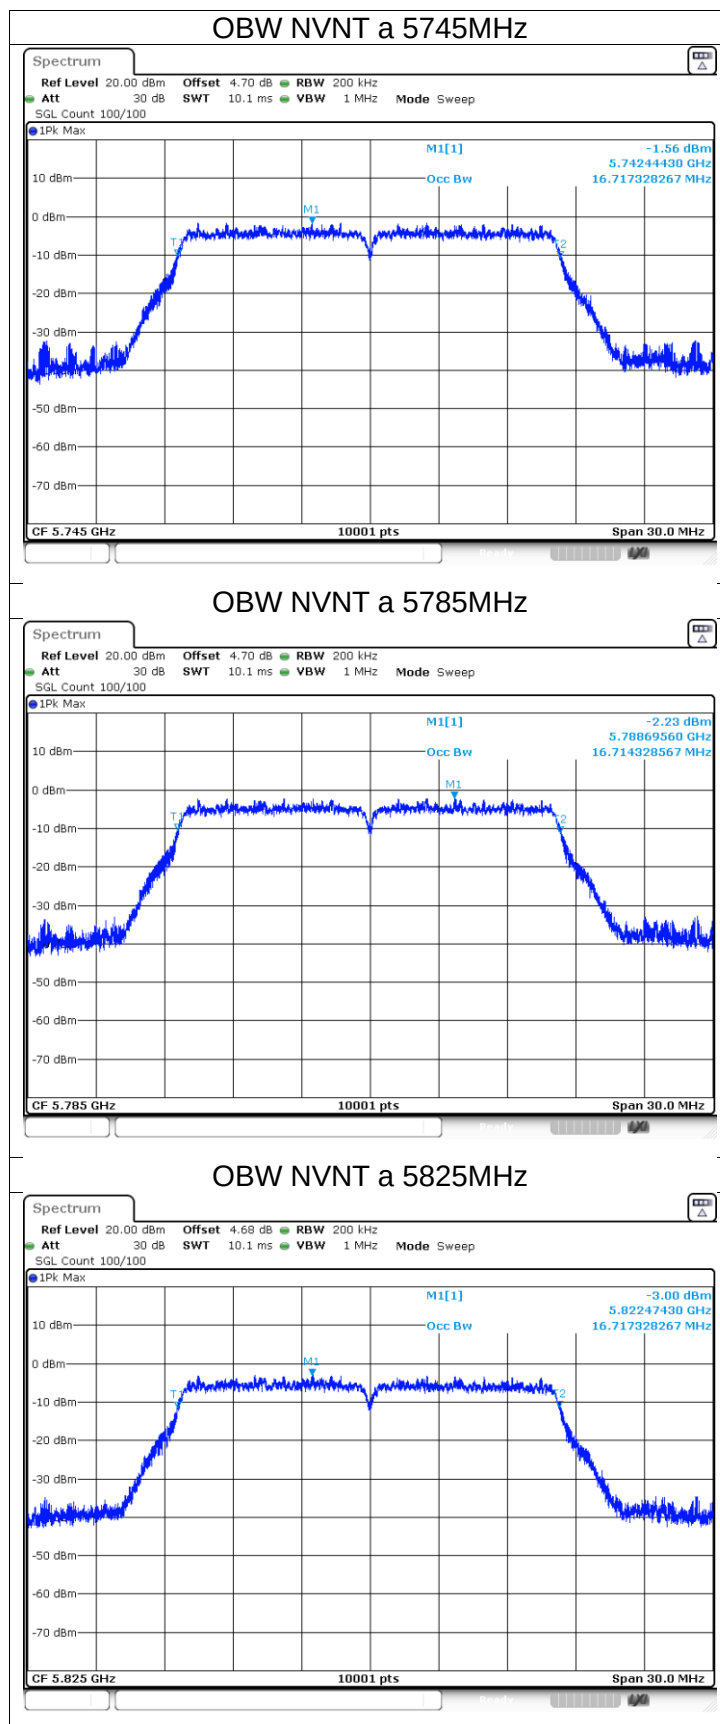

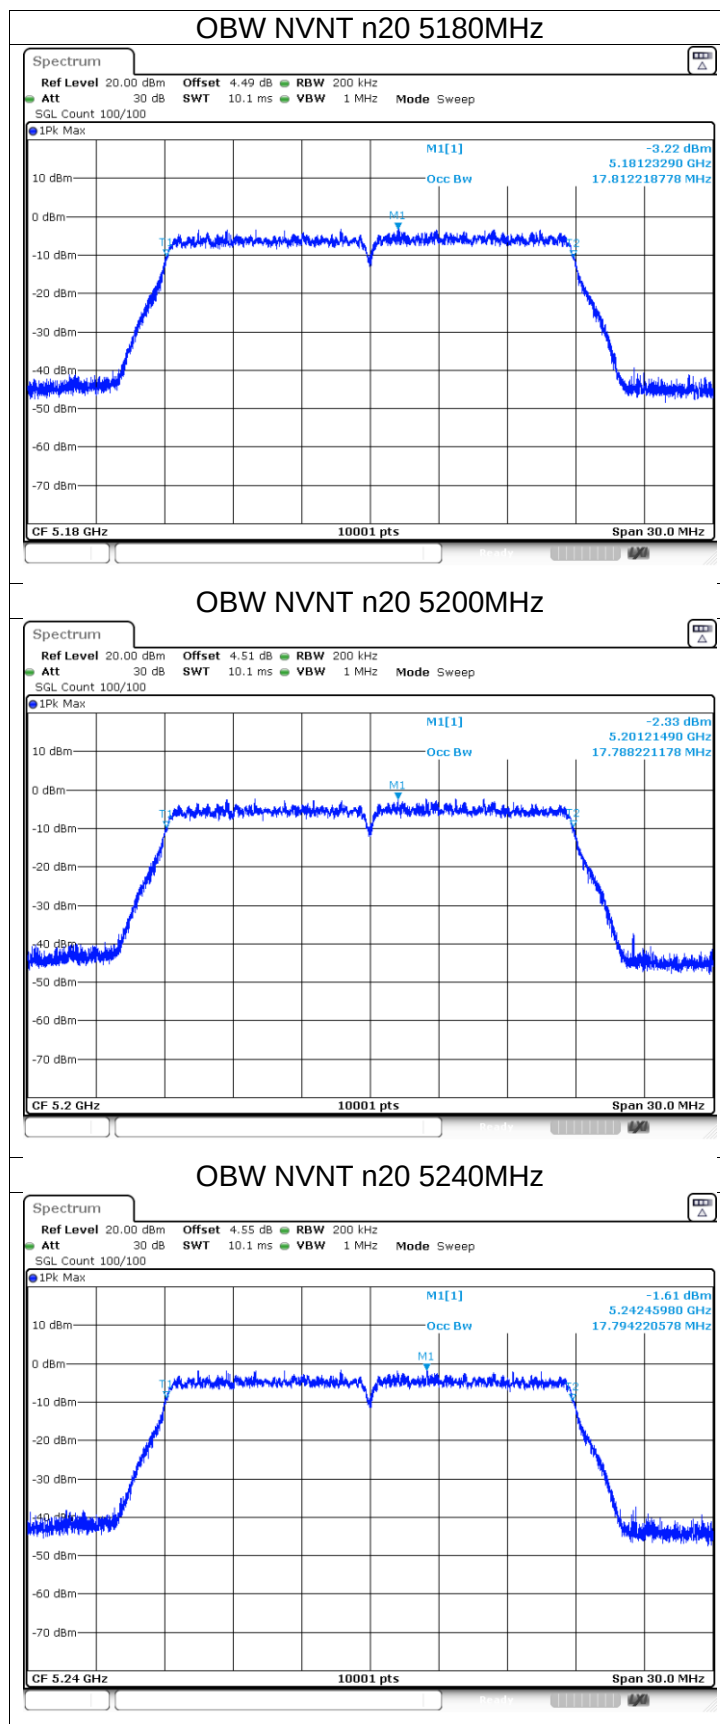

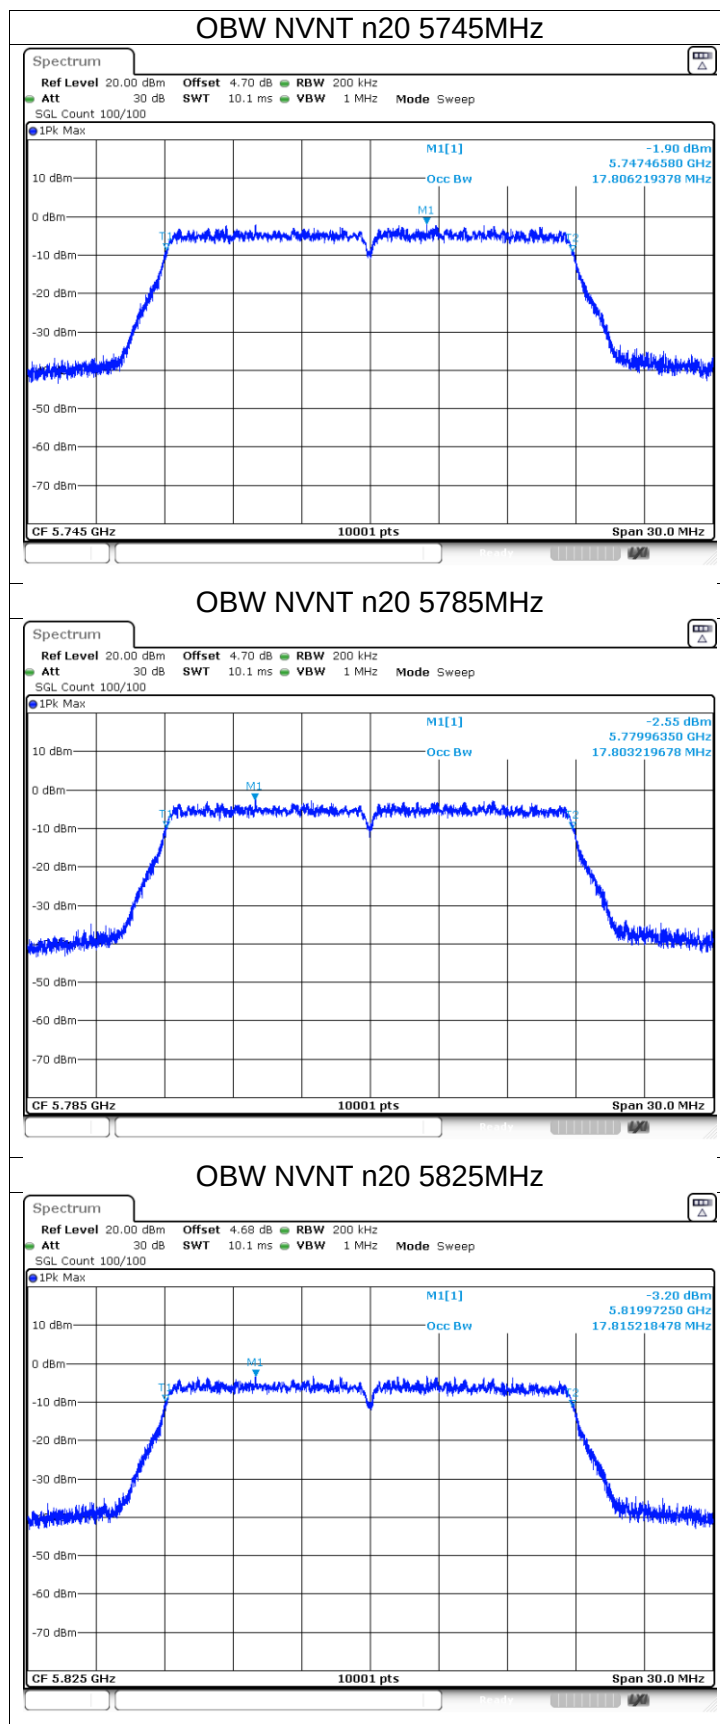

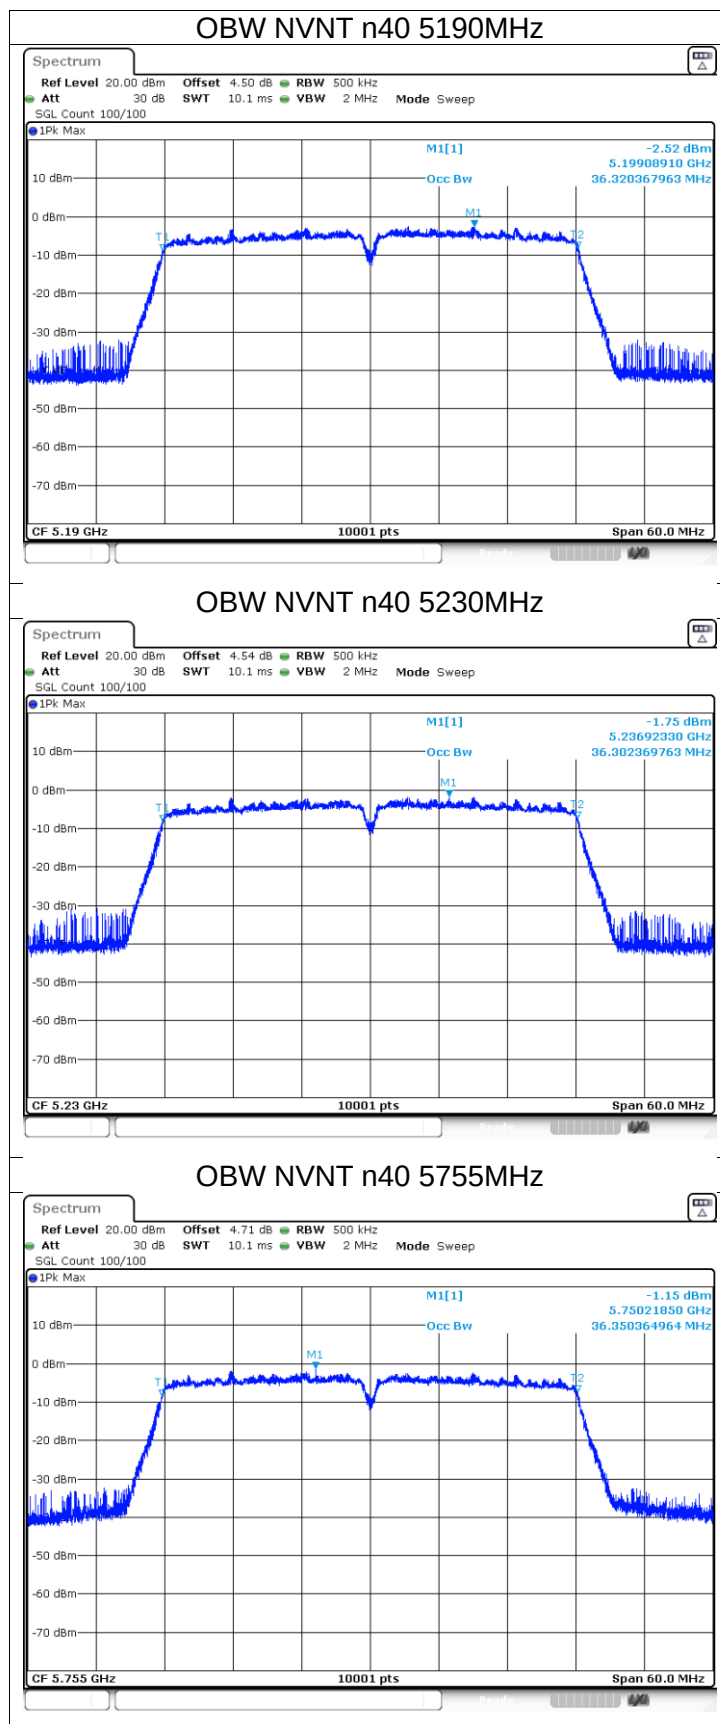


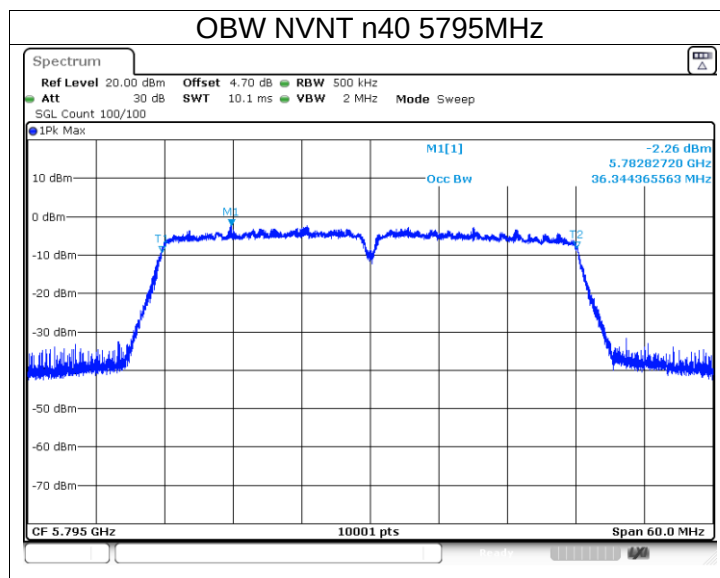






Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	-0.08	0	-0.08	8.13	Pass
NVNT	a	5200	0.42	0	0.42	8.13	Pass
NVNT	a	5240	1.06	0	1.06	8.13	Pass
NVNT	n20	5180	-0.42	0	-0.42	8.13	Pass
NVNT	n20	5200	0.23	0	0.23	8.13	Pass
NVNT	n20	5240	0.7	0	0.7	8.13	Pass
NVNT	n40	5190	-3.79	0	-3.79	8.13	Pass
NVNT	n40	5230	-3.22	0	-3.22	8.13	Pass
Condition	Mode	Frequency (MHz)	Conducted PSD (dBm/ 500kHz)	Duty Factor (dB)	Total PSD (dBm/ 500kHz)	Limit (dBm/ 500kHz)	Verdict
NVNT	a	5745	-2.88	0	-2.88	27.13	Pass
NVNT	a	5785	-3.11	0	-3.11	27.13	Pass
NVNT	a	5825	-4.01	0	-4.01	27.13	Pass
NVNT	n20	5745	-2.92	0	-2.92	27.13	Pass
NVNT	n20	5785	-3.46	0	-3.46	27.13	Pass
NVNT	n20	5825	-3.98	0	-3.98	27.13	Pass
NVNT	n40	5755	-7.41	0	-7.41	27.13	Pass
NVNT	n40	5795	-7.58	0	-7.58	27.13	Pass

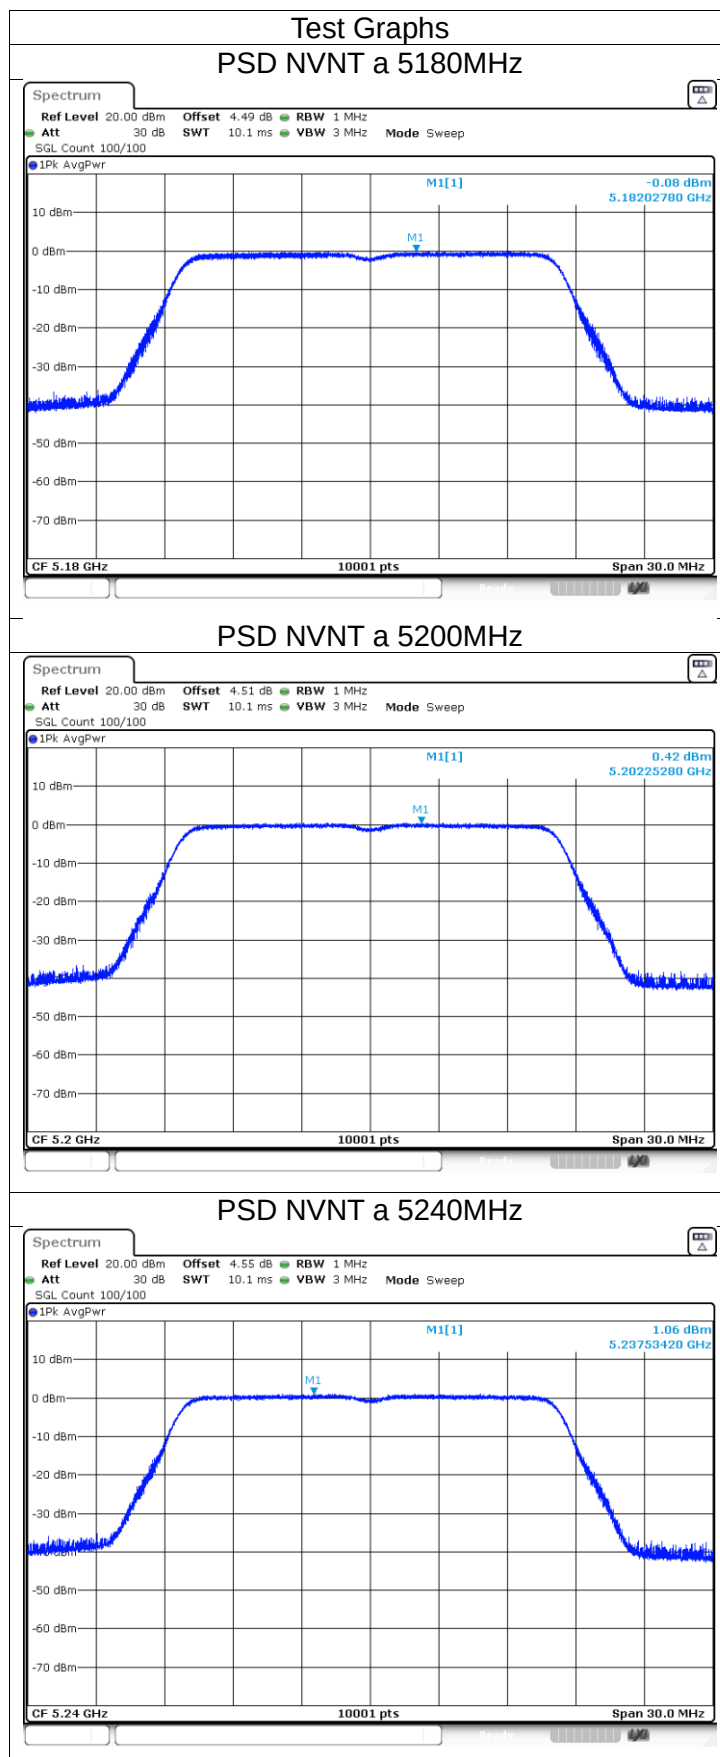


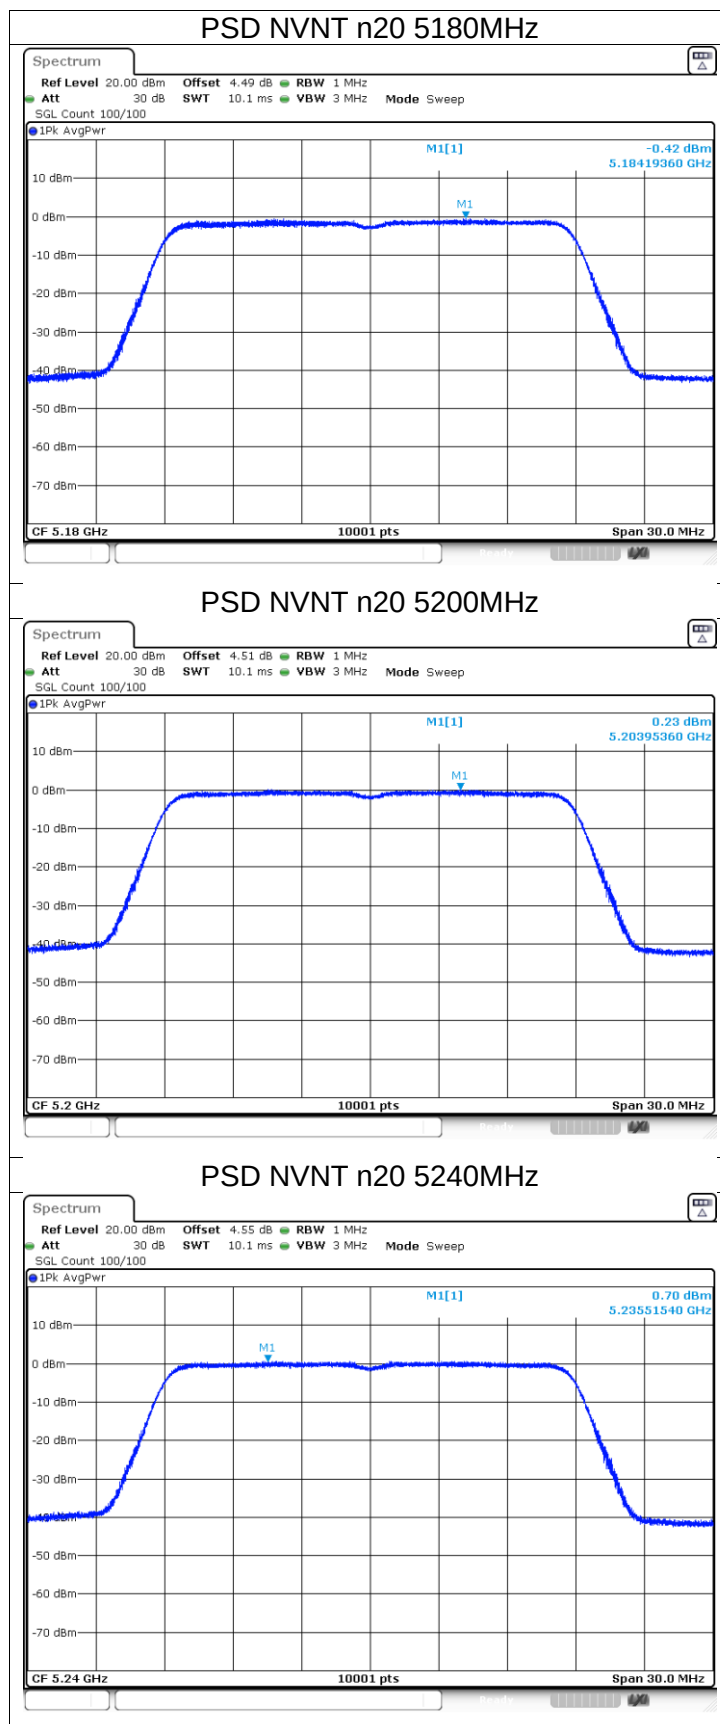

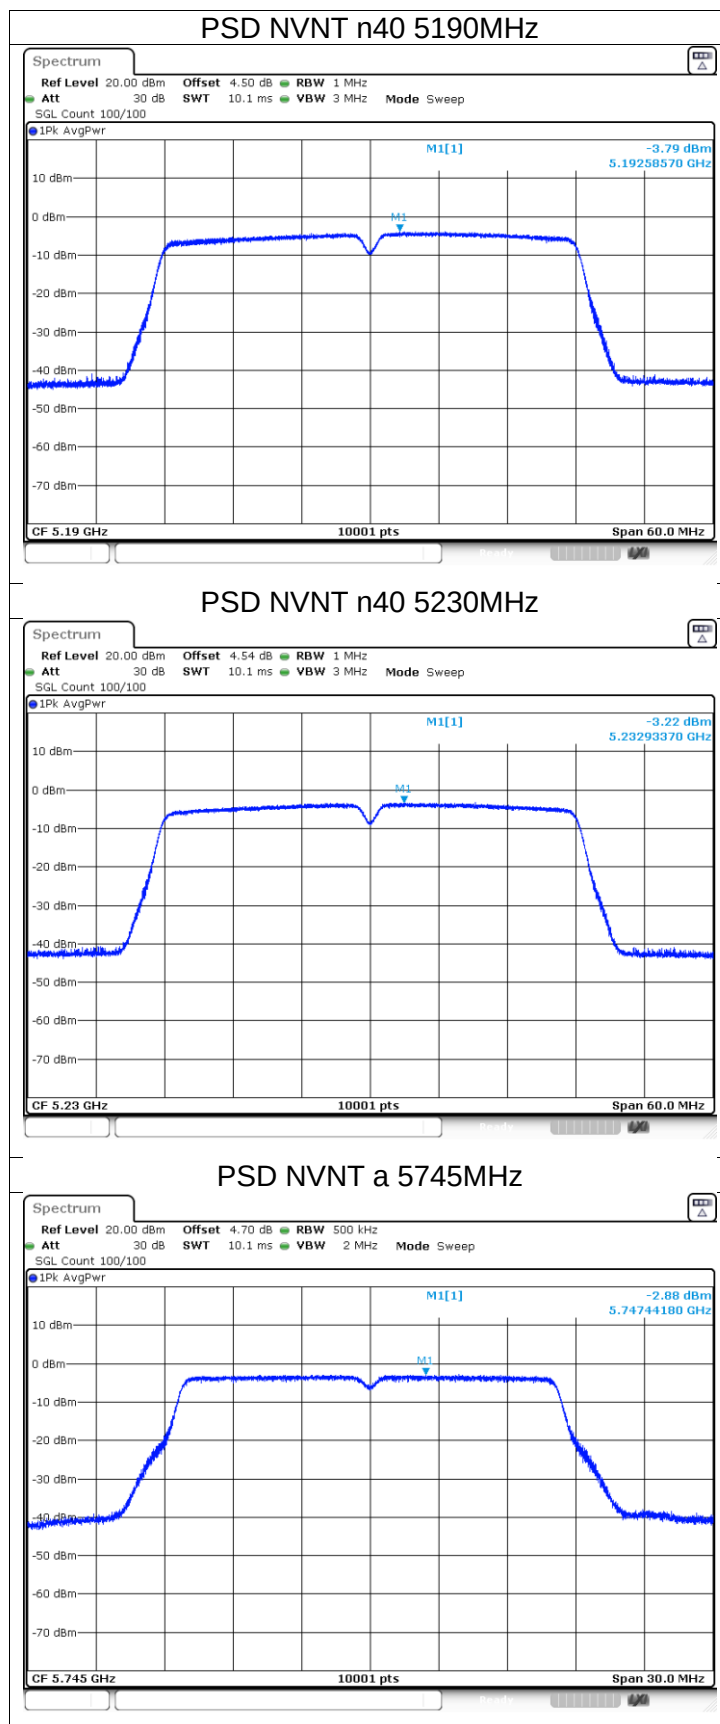

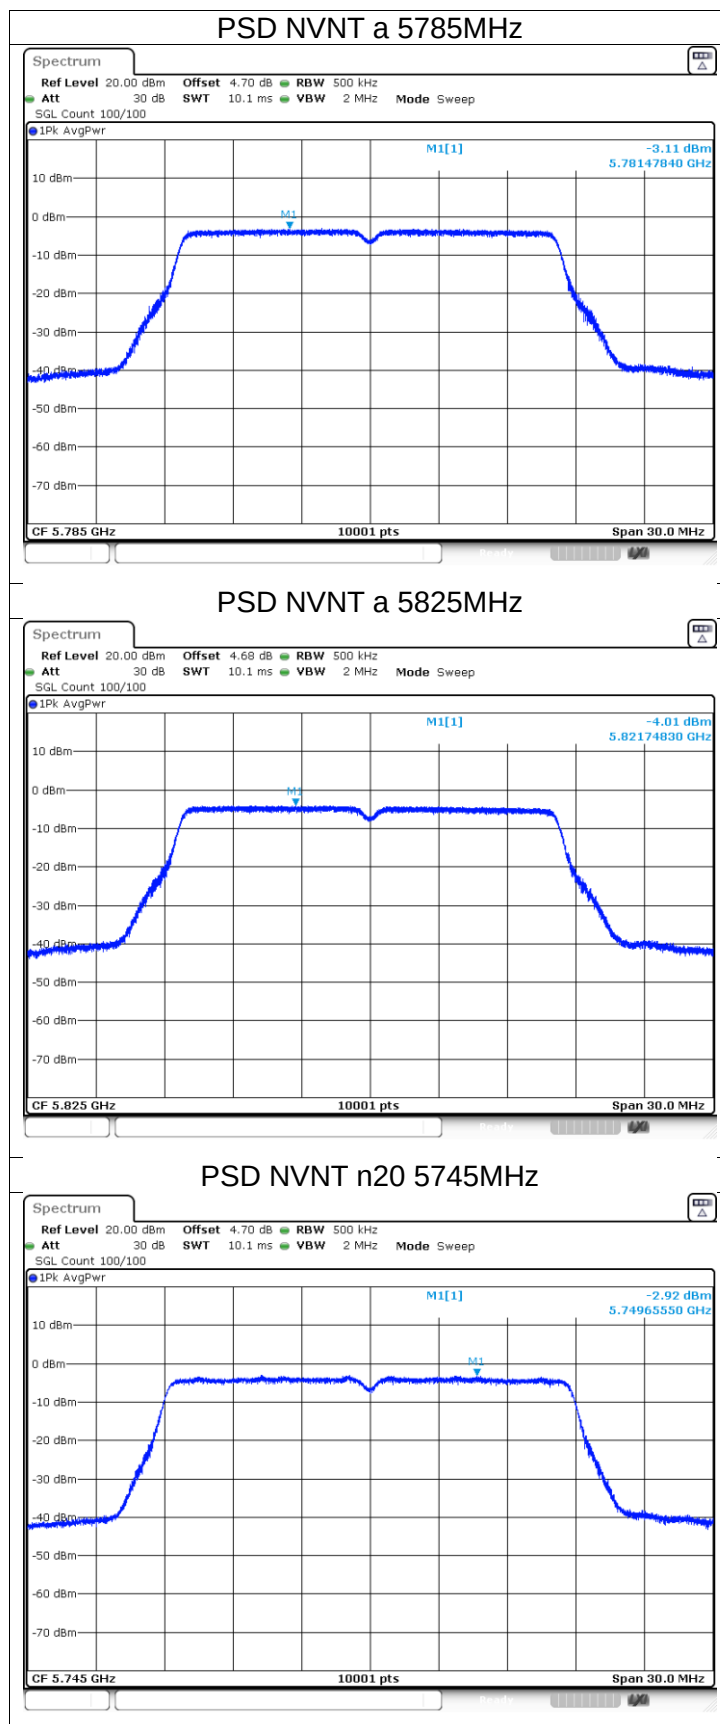

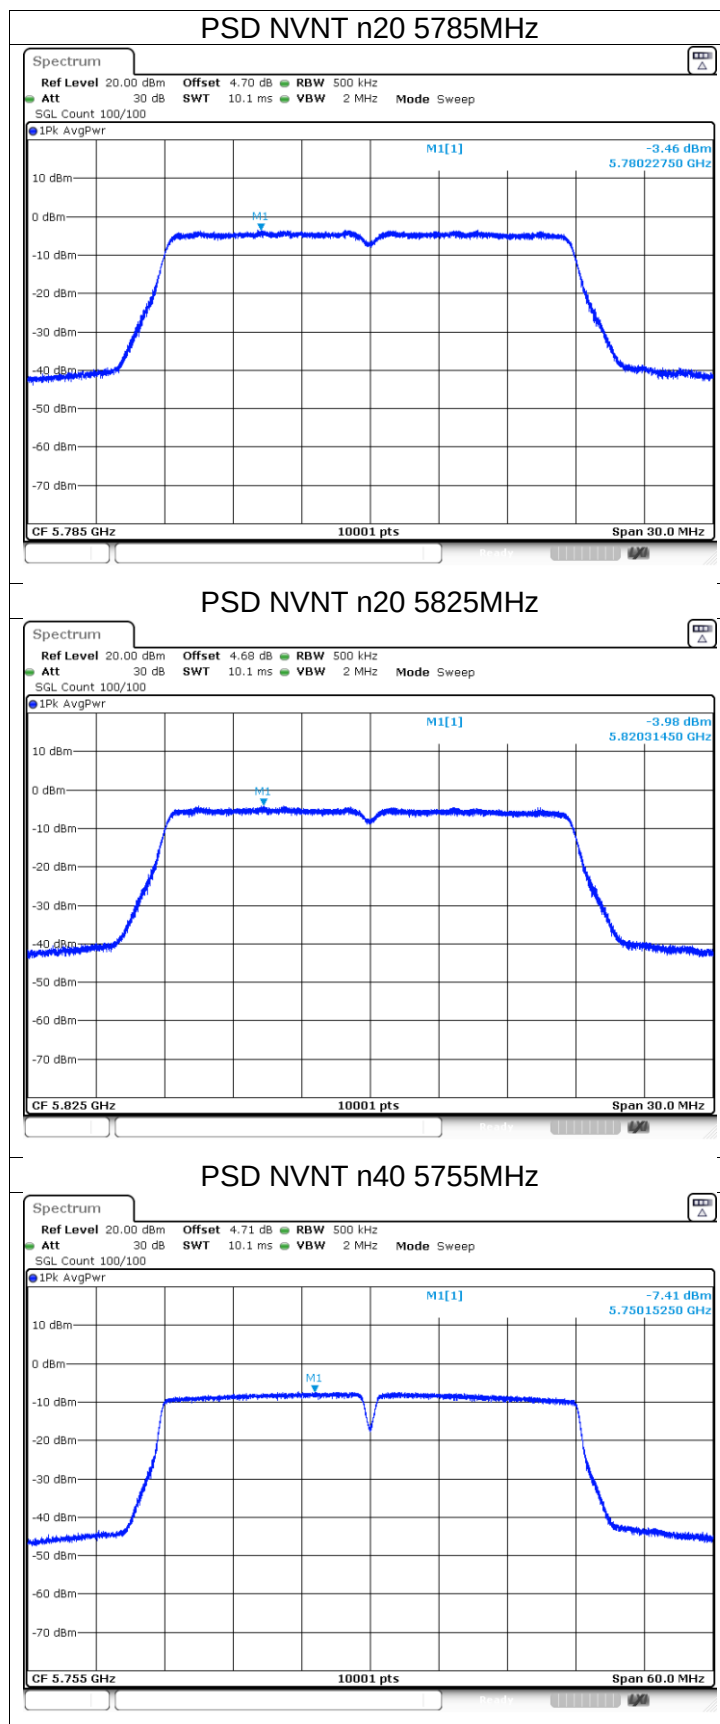


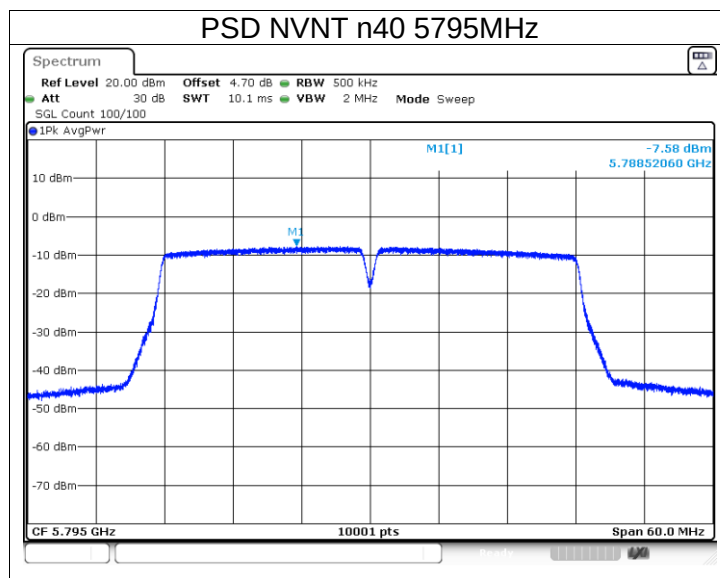




Band Edge


Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	a	5180	-35.1	-27	Pass
NVNT	a	5240	-32.85	-27	Pass
NVNT	n20	5180	-35.13	-27	Pass
NVNT	n20	5240	-33.8	-27	Pass
NVNT	n40	5190	-35.31	-27	Pass
NVNT	n40	5230	-33.99	-27	Pass
Condition	Mode	Frequency (MHz)	Max Value (dBm)	Limit (dBm)	Verdict
NVNT	a	5745	-32.52	15.6	Pass
NVNT	a	5825	-33.57	15.6	Pass
NVNT	n20	5745	-31.04	15.6	Pass
NVNT	n20	5825	-33.53	15.6	Pass
NVNT	n40	5755	-27.58	15.6	Pass
NVNT	n40	5795	-33.16	15.6	Pass

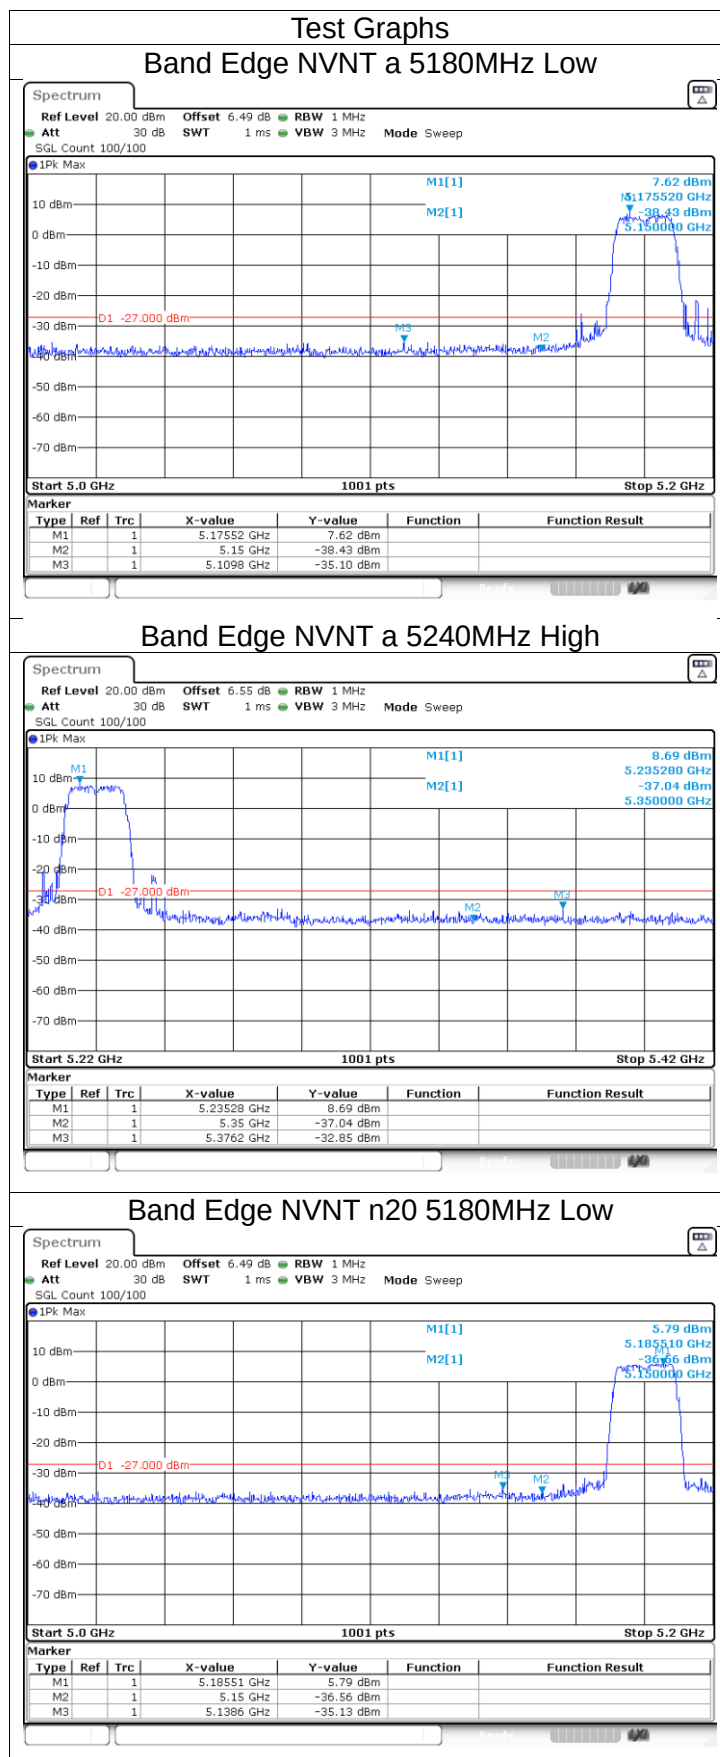

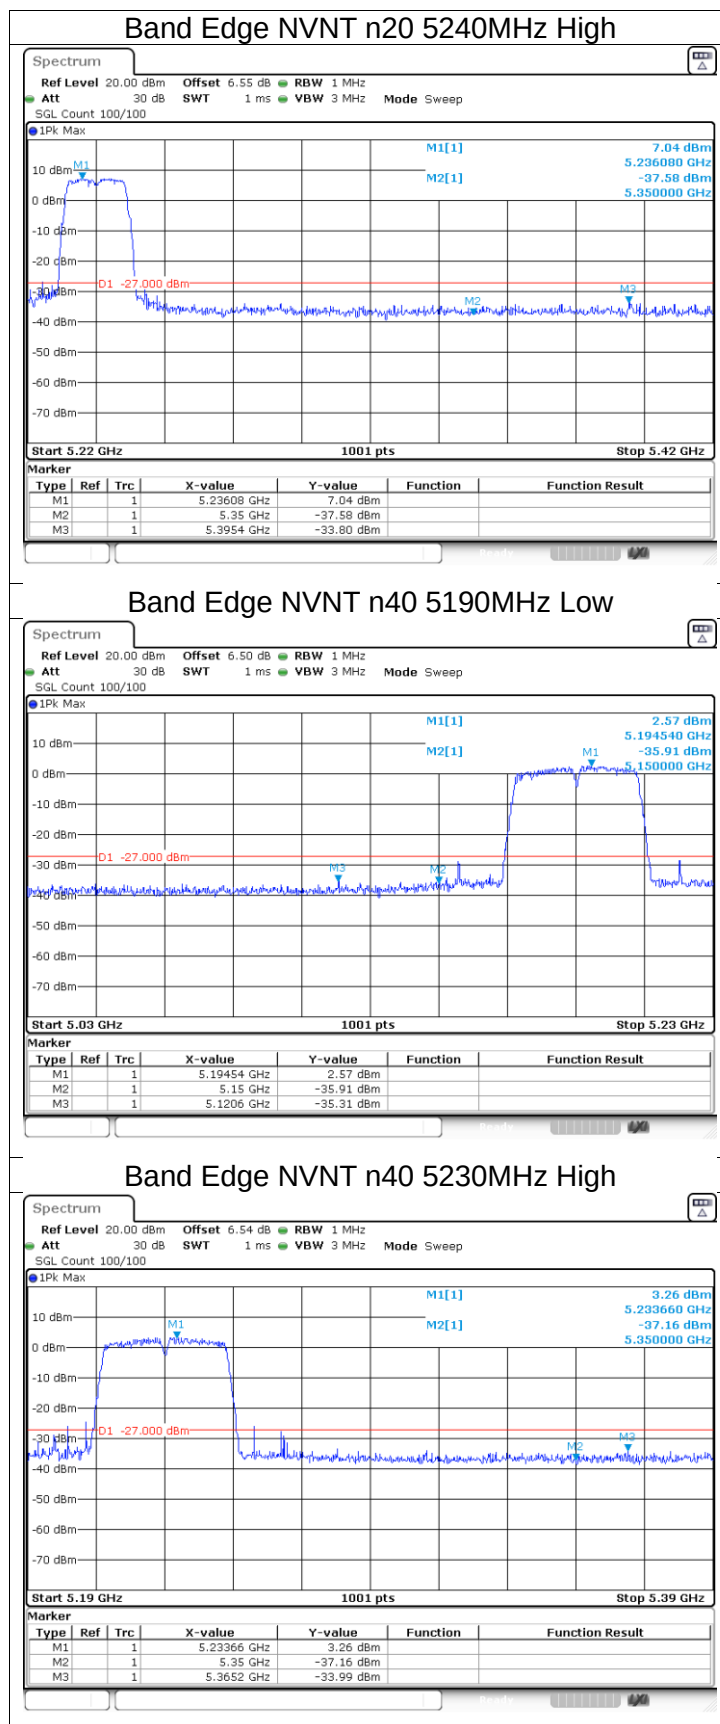





Band Edge NVNT a 5745MHz Low

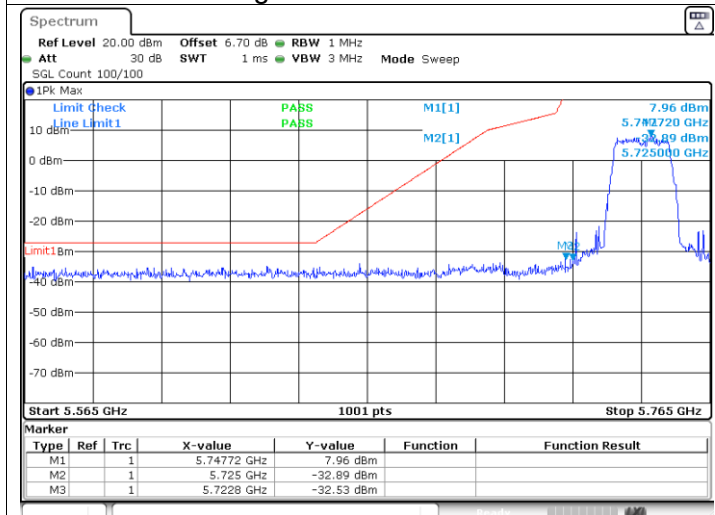


Band Edge NVNT a 5825MHz High

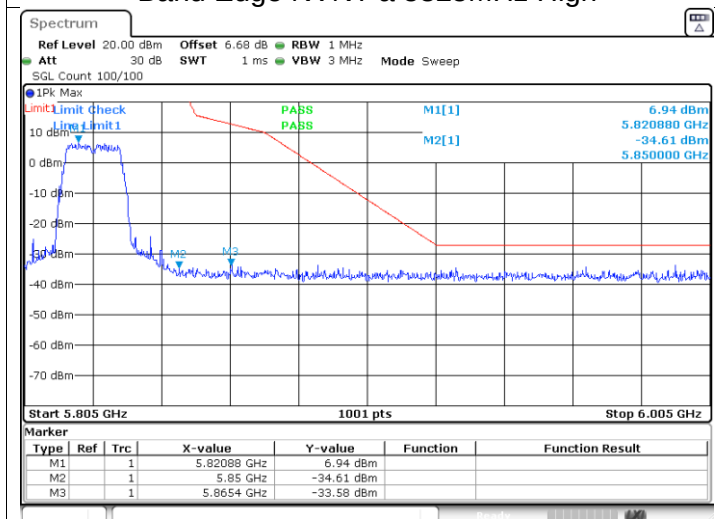

Band Edge NVNT n20 5745MHz Low

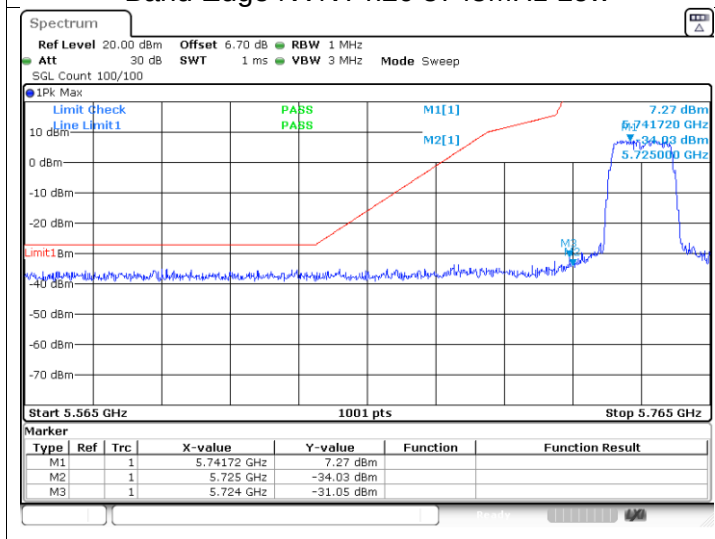

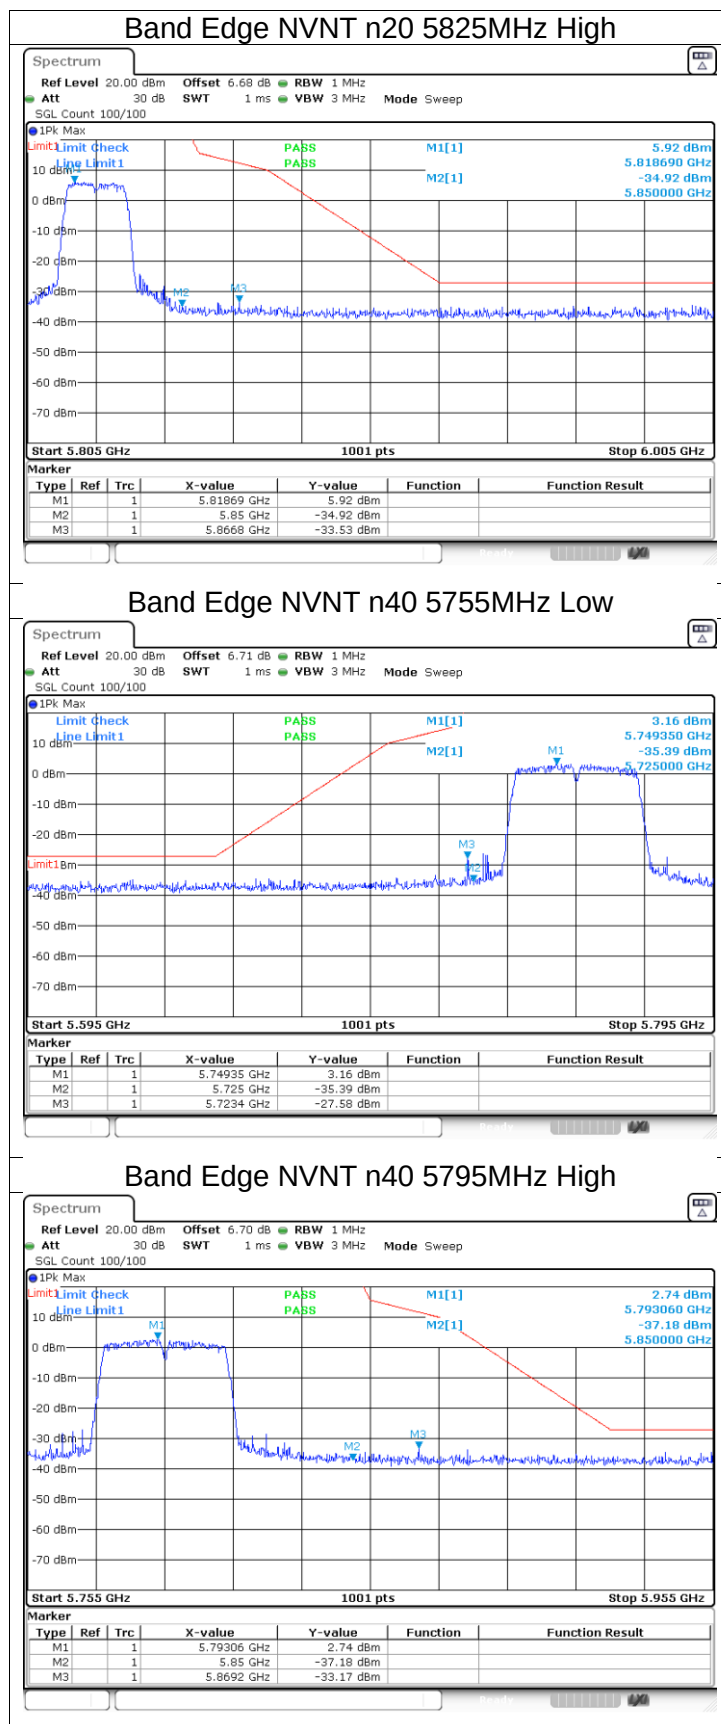



-6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	a	5745	16.348	0.5	Pass
NVNT	a	5785	16.348	0.5	Pass
NVNT	a	5825	16.351	0.5	Pass
NVNT	n20	5745	17.59	0.5	Pass
NVNT	n20	5785	17.597	0.5	Pass
NVNT	n20	5825	17.608	0.5	Pass
NVNT	n40	5755	36.025	0.5	Pass
NVNT	n40	5795	35.649	0.5	Pass









APPENDIX II - MEASUREMENT PHOTOS

Note: Please see the attached RF_Test Setup photos for FCC ID & IC.

※※※※※END OF THE REPORT※※※※※