

#### Shenzhen Huatongwei International Inspection Co., Ltd.

1/F,Bldg 3,Hongfa Hi-tech Industrial Park,Genyu Road, Tianliao,Gongming,Shenzhen,China Phone:86-755-26748019 Fax:86-755-26748089 http://www.szhtw.com.cn



# **FCC REPORT**

R/C..... 87804 Report Reference No.....:: TRE1601013006

FCC ID.....:: 2AGBLMV1

Applicant's name.....: **OBI Connect FZE** 

Address..... B-21, Dubai Airport Free zone, Dubai, United Arab Emirates

Manufacturer..... ShenZhenHipad Telecommunication Technology Co.,LTD

Room502-503, Unit3, Building C, Kexing Science Park, Keyuan Address....: Road, Hi-tech Industrial Park, Nanshan District, Shenzhen, China

Test item description .....: Worldphone

Trade Mark .....: Obi

Model/Type reference..... MV1

Listed Model(s) .....: B5-5.0-OB2

47 CFR FCC Part 15 Subpart B - Unintentional Radiators Standard .....::

ANSI C63.4: 2014

Date of receipt of test sample..... Jan.22, 2016

Jan.23, 2016 ~ Feb.16, 2016 Date of testing.....

Date of issue..... Feb.17, 2016

Result.....: **Pass** 

Compiled by

( position+printed name+signature)..: File administrators Candy Liu

Supervised by

( position+printed name+signature)..: Project Engineer Lion Cai Condy Lin Cron Con

Approved by

( position+printed name+signature)..: RF Manager Hans Hu

Testing Laboratory Name .....: Shenzhen Huatongwei International Inspection Co., Ltd

Address....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road,

Tianliao, Gongming, Shenzhen, China

Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Report No: TRE1601013006 Page: 2 of 18 Issued: 2016-02-17

# Contents

Test Standards	3
SUMMARY	4
Client Information	4
Product Description	4
EUT operation mode	5
EUT configuration	5
Configuration of Tested System	6
TEST ENVIRONMENT	7
Address of the test laboratory	7
Test Facility	7
Environmental conditions	8
Statement of the measurement uncertainty	8
Equipments Used during the Test	8
TEST CONDITIONS AND RESULTS	9
Conducted Emissions Test	9
Radiated Emission Test	12
TEST SETUP PHOTOS OF THE EUT	16

Report No: TRE1601013006 Page: 3 of 18 Issued: 2016-02-17

# 1. TEST STANDARDS AND TEST DESCRIPTION

# 1.1. Test Standards

The tests were performed according to following standards:

47 CFR FCC Part 15 Subpart B - Unintentional Radiators

<u>ANSI C63.4: 2014</u> – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40GHz

Report No: TRE1601013006 Page: 4 of 18 Issued: 2016-02-17

# 2. SUMMARY

# 2.1. Client Information

Applicant:	OBI Connect FZE
Address:	B-21,Dubai Airport Free zone,Dubai,United Arab Emirates
Manufacturer:	ShenZhenHipad Telecommunication Technology Co.,LTD
Address:	Room502-503,Unit3,Building C, Kexing Science Park,KeyuanRoad,Hi-tech Industrial Park, Nanshan District, Shenzhen,China

# 2.2. Product Description

Name of EUT	Worldphone
Trade Mark:	Obi
Model No.:	MV1
Listed Model(s):	B5-5.0-OB2
IMEI 1:	352593066027101
IMEI 2:	352593066027119
Power supply:	DC 3.8V From internal battery
Adapter information:	Input:AC 100-240V 50/60Hz 0.2A Max
	Output: 5Vd.c., 1.0A

Report No: TRE1601013006 Page: 5 of 18 Issued: 2016-02-17

# 2.3. EUT operation mode

Test mode	Playing Video	Data Transfer	Camera	AC Adapter
1				
2		•		
3				

#### Note:

1. ■ is operation mode.

Pre-scan above all test mode, found below test mode which it was worse case mode.

Test item	Test mode (Worse case mode)		
Conducted emission	Mode 2		
Radiated emission	Mode 2		

# 2.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:


- supplied by the manufacturer
- - supplied by the lab

	Length (m):	1
	Shield :	1
	Detachable :	1
	Manufacturer :	1
	Model No.:	1

Report No: TRE1601013006 Page: 6 of 18 Issued: 2016-02-17

# 2.5. Configuration of Tested System

# **Configuration of Tested System**

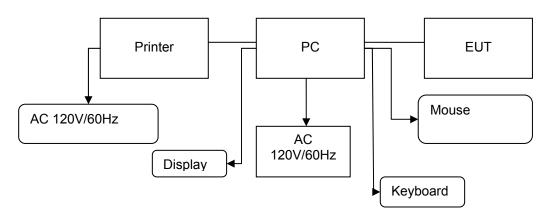

**Equipment Used in Tested System** 

	Equipment Used in Tested System									
No.	Equipment	Manufacturer	Model No.	Serial No.	Length	shielded/unshielded	Notes			
1	PC	DELL	DIMEN SION E520	SION 1RNN42X / /		DOC				
2	Printer	ESPOn	C3990	C3990A	1	1	DOC			
3	Mouse	DELL	MO56U OA	G0E02SY7	1.00m	unshielded	DOC			
4	Display	DELL	1707FPt	CN-OFC237-71618- 65G-AAKC	1	/	DOC			
5	Keyboard	DELL	L100	CNRH65665890726 009L	1	/	DOC			
6	USB Cable (EUT to PC)	ITALCOM GROUP	USB 2.0	N/A	0.80m	unshielded	N/A			
7	USB Cable (Printer to PC)	Genshuo	USB 2.0	N/A	1.20m	unshielded	N/A			
8	Power line	1	/	N/A	1.00m	unshielded	N/A			

Report No: TRE1601013006 Page: 7 of 18 Issued: 2016-02-17

# 3. TEST ENVIRONMENT

### 3.1. Address of the test laboratory

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China Phone: 86-755-26748019 Fax: 86-755-26748089

### 3.2. Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS-Lab Code: L1225

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

#### A2LA-Lab Cert. No. 3902.01

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for tec hnical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until December 31, 2016.

#### FCC-Registration No.: 317478

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FC C is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

#### IC-Registration No.: 5377A&5377B

The 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377A on Dec. 31, 2013, valid time is until Dec. 31, 2016.

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Aust ralian C-Tick mark as a result of our A2LA accreditation.

#### VCCI

The 3m Semi-

anechoic chamber (12.2m×7.95m×6.7m) of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2484. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 29, 2015.

Radiated disturbance above 1GHz measurement of Shenzhen Huatongwei International Inspection Co., Ltd. h as been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-292. Date of Registration: Dec. 24, 2013. Valid time is until Dec. 23, 2016.

Main Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: C-2726. Date of Registration: Dec. 20, 2012. Valid time is until Dec. 19, 2015.

Telecommunication Ports Conducted Interference Measurement of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: T-1837. Date of Registration: May 07, 2013. Valid time is until May 06, 2016.

## DNV

Shenzhen Huatongwei International Inspection Co., Ltd. has been found to comply with the requirements of D NV towards subcontractor of EMC and safety testing services in conjunction with the EMC and Low voltage Di rectives and in the voluntary field. The acceptance is based on a formal quality Audit and follow-ups according to relevant parts of ISO/IEC Guide 17025 (2005), in accordance with the requirements of the D NV Laboratory Quality Manual towards subcontractors. Valid time is until Aug. 24, 2016.

Report No: TRE1601013006 Page: 8 of 18 Issued: 2016-02-17

#### 3.3. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

 Temperature:
 15-35 ° C

 Humidity:
 30-60 %

Atmospheric pressure: 950-1050mbar

# 3.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods — Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test	Range	Measurement Uncertainty	Notes
Radiated Emission	30~1000MHz	4.24 dB	(1)
Radiated Emission	1~18GHz	5.16 dB	(1)
Radiated Emission	18-40GHz	5.54 dB	(1)
Conducted Disturbance	0.15~30MHz	3.39 dB	(1)

<sup>(1)</sup> This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

### 3.5. Equipments Used during the Test

Cond	Conducted Emission							
Item	m Test Equipment Manufacturer Model No. Serial No. Last Cal.							
1	EMI TEST RECEIVER	Rohde & Schwarz	ESCI	100106	2015/11/2			
2	ARTIFICIAL MAINS	Rohde & Schwarz	ESH2-Z5	100028	2015/11/2			
3	PULSE LIMITER	Rohde & Schwarz	ESHSZ2	100044	2015/11/2			
4	EMI TEST SOFTWARE	Rohde & Schwarz	ES-K1	N/A	N/A			

Radia	Radiated Emission						
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.		
1	ULTRA-BROADBAND ANTENNA	ShwarzBeck	VULB9163	538	2015/11/2		
2	EMI TEST RECEIVER	Rohde & Schwarz	ESI 26	100009	2015/11/2		
3	EMI TEST Software	Audix	E3	N/A	N/A		
4	TURNTABLE	MATURO	TT2.0		N/A		
5	ANTENNA MAST	MATURO	TAM-4.0-P		N/A		
6	EMI TEST Software	Rohde & Schwarz	ESK1	N/A	N/A		
7	ULTRA-BROADBAND ANTENNA	Rohde&Schwarz	HL562	100015	2015/11/2		
8	Amplifer	Sonoma	310N	E009-13	2015/11/2		
9	JS amplifer	Rohde & Schwarz	JS4-00101800- 28-5A	F201504	2015/11/2		
11	TURNTABLE	ETS	2088	2149	N/A		
12	ANTENNA MAST	ETS	2075	2346	N/A		
13	HORN ANTENNA	Rohde&Schwarz	HF906	100039	2015/11/2		


The calibration interval was one year.

Report No: TRE1601013006 Page: 9 of 18 Issued: 2016-02-17

# 4. TEST CONDITIONS AND RESULTS

#### 4.1. Conducted Emissions Test

#### **TEST CONFIGURATION**

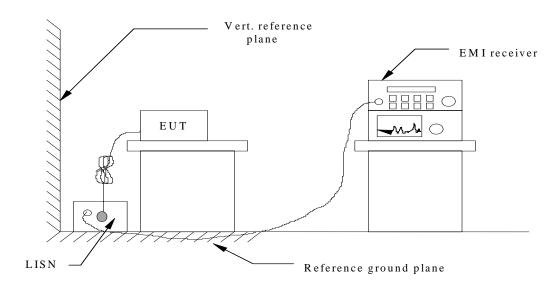

#### **TEST PROCEDURE**

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system; a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4-2014.
- 2. Support equipment, if needed, was placed as per ANSI C63.4-2014
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4-2014.
- 4. The EUT received DC 5.0 from USB powered from AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5. All support equipments received AC power from a second LISN, if any.
- 6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.

#### **CONDUCTED POWER LINE EMISSION LIMIT**


For unintentional device, according to § 15.107(a) Line Conducted Emission Limits is as following:

Eroguanov	Maximum RF Line Voltage (dBμV)					
Frequency (MHz)	CLAS	SS A	CLASS B			
(IVITIZ)	Q.P.	Ave.	Q.P.	Ave.		
0.15 - 0.50	79	66	66-56*	56-46*		
0.50 - 5.00	73	60	56	46		
5.00 - 30.0	73	60	60	50		

<sup>\*</sup> Decreasing linearly with the logarithm of the frequency

#### **TEST RESULTS**

Report No: TRE1601013006 Page: 10 of 18 Issued: 2016-02-17

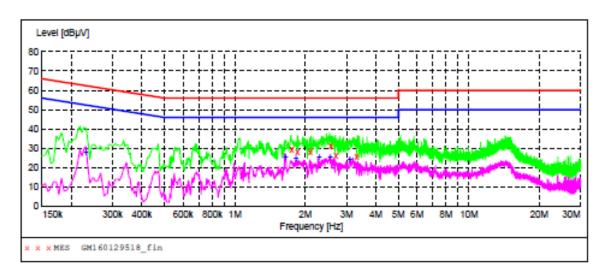


# MEASUREMENT RESULT: "GM160129518\_fin"

1,	1/29/2016 1:57PM							
	Frequency MHs	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
	1.752000 1.846500	29.40	10.2		26.6 27.9		L1 L1	GND
	2.098500	27.80	10.2	56	28.2	QP	Ll	GND
	2.566500 2.701500	30.90 26.00	10.3	56 56	25.1 30.0	_	L1 L1	GND
	3.318000	25.60	10.3	56	30.4	QP	L1	GND

# MEASUREMENT RESULT: "GM160129518\_fin2"

1/29/2016 1	L:57PM						
Frequency MHs	•	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.231000	28.10	10.2	52	24.3	AV	Ll	GND
1.644000	25.60	10.2	46	20.4	AV	L1	GND
1.824000	25.10	10.2	46	20.9	AV	L1	GND
2.287500	25.50	10.3	46	20.5	AV	L1	GND
2.557500	25.60	10.3	46	20.4	AV	L1	GND
3.093000	24.40	10.3	46	21.6	AV	L1	GND

Report No: TRE1601013006 Page: 11 of 18 Issued: 2016-02-17

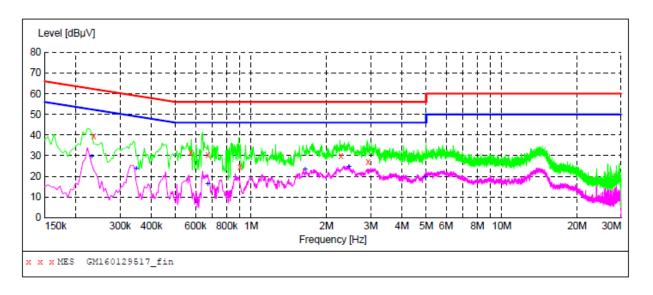

# MEASUREMENT RESULT: "GM160129517 fin"

1/29/2016 1:	54PM						
Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.235500	39.30	10.2	62	23.0	QP	N	GND
0.573000	31.70	10.2	56	24.3	QP	N	GND
0.672000	30.20	10.2	56	25.8	QP	N	GND
0.901500	24.50	10.2	56	31.5	QP	N	GND
2.283000	29.80	10.3	56	26.2	QP	N	GND
2.931000	26.90	10.3	56	29.1	QP	N	GND

# MEASUREMENT RESULT: "GM160129517\_fin2"


	16 1:541 uency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line	PE
0.2	31000	29.60	10.2	52	22.8	AV	N	GND
0.3	48000	23.80	10.2	49	25.2	AV	N	GND
0.6	72000	16.30	10.2	46	29.7	AV	N	GND
1.6	39500	23.30	10.2	46	22.7	AV	N	GND
2.4	58500	24.60	10.3	46	21.4	AV	N	GND
4.9	56000	19.70	10.4	46	26.3	AV	N	GND

Report No: TRE1601013006 Page: 12 of 18 Issued: 2016-02-17


#### 4.2. Radiated Emission Test

#### **TEST CONFIGURATION**

a) Radiated Emission Test Set-Up, Frequency below 1000MHz

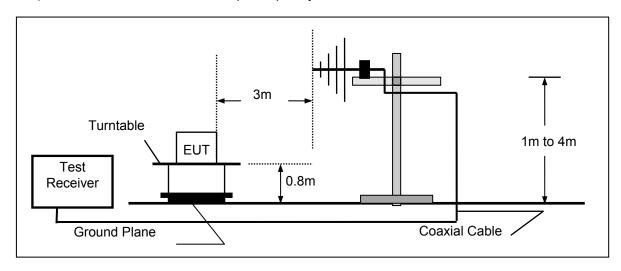

b) Radiated Emission Test Set-Up, Frequency above 1000MHz

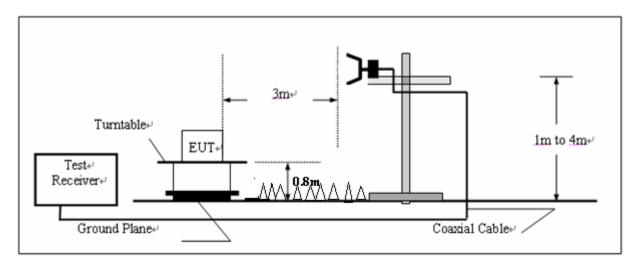

### **TEST PROCEDURE**

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Repeat above procedures until the measurements for all frequencies are complete.

Report No: TRE1601013006 Page: 13 of 18 Issued: 2016-02-17

### **FIELD STRENGTH CALCULATION**

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

#### FS = RA + AF + CL - AG

Where FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
RA = Reading Amplitude	AG = Amplifier Gain
AF = Antenna Factor	

#### For example

Frequency	FS	RA	AF	CL	AG	Transd
(MHz)	(dBµV/m)	(dBµV/m)	(dB)	(dB)	(dB)	(dB)
300.00	40	58.1	12.2	1.6	31.90	-18.1

Transd=AF +CL-AG


#### **RADIATION LIMIT**

For unintentional device, according to § 15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency (MHz)	Distance (Meters)	Radiated (dBµV/m)	Radiated (µV/m)
30-88	3	40.0	100
88-216	3	43.5	150
216-960	3	46.0	200
Above 960	3	54.0	500


Report No: TRE1601013006 Page: 14 of 18 Issued: 2016-02-17

# **TEST RESULTS**

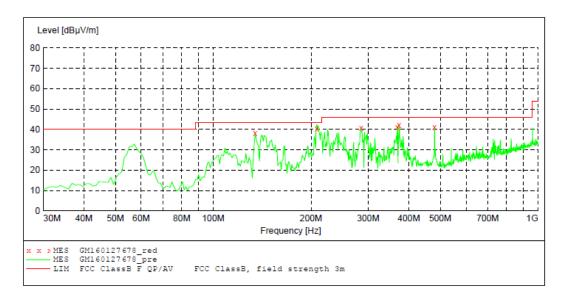

#### MEASUREMENT RESULT: "GM160127678\_red"

1/27/2016 5:4 Frequency MHz			Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
134.760000	38.00	-17.7	43.5	5.5	QP	300.0	152.00	HORIZONTAL
208.480000	40.50	-13.9	43.5	3.0	QP	100.0	328.00	HORIZONTAL
285.110000	40.70	-14.2	46.0	5.3	QP	100.0	360.00	HORIZONTAL
368.530000	41.10	-11.6	46.0	4.9	QP	100.0	303.00	HORIZONTAL
373.380000	42.00	-11.5	46.0	4.0	QP	100.0	280.00	HORIZONTAL
480.080000	40.90	-7.9	46.0	5.1	QP	300.0	56.00	HORIZONTAL

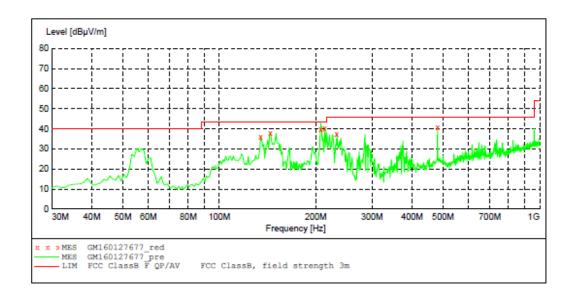


### MEASUREMENT RESULT: "GM160127677\_red"

1/27/2016 5:3 Frequency MHz			Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
134.760000	36.00	-17.7	43.5	7.5	OP	100.0	259.00	VERTICAL
144.460000	38.00	-18.1	43.5	5.5	ΟP	100.0	259.00	VERTICAL
207.510000	40.00	-13.9	43.5	3.0	QP	100.0	187.00	VERTICAL
213.330000	40.50	-14.1	43.5	3.0	QP	100.0	163.00	VERTICAL
232.730000	37.60	-14.9	46.0	8.4	QP	100.0	187.00	VERTICAL
480.080000	40.60	-7.9	46.0	5.4	QP	100.0	163.00	VERTICAL


Report No: TRE1601013006 Page: 15 of 18 Issued: 2016-02-17

# **HORIZONTAL**

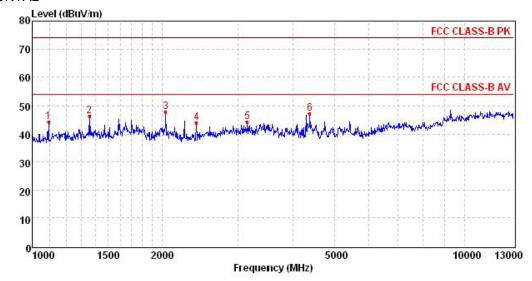

Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Le∨el dBuV/m	Limit dBuV/m	O∨er limit	Remark
1	1091.12	52.14	24.31	4.25	36.38	44.32	74.00	-29.68	Peak
2	1356.94	53.49	24.58	4.89	36.69	46.27	74.00	-27.73	Peak
3	2040.22	52.53	26.26	6.23	37.29	47.73	74.00	-26.27	Peak
4	2404.19	47.31	27.57	6.84	37.58	44.14	74.00	-29.86	Peak
5	3155.34	45.21	28.57	8.38	37.99	44.17	74.00	-29.83	Peak
6	4381.59	46.10	30.58	8.90	38.26	47.32	74.00	-26.68	Peak

# **VERTICAL**

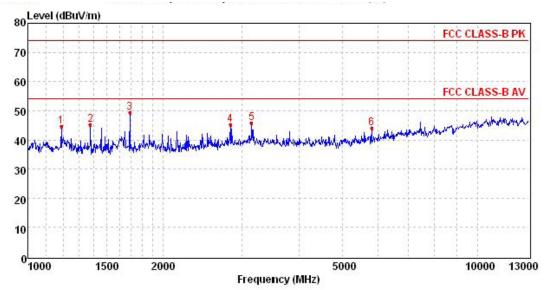


Mark	Frequency MHz	Reading dBuV/m	Antenna dB	Cable dB	Preamp dB	Le∨el dBuV/m	Limit dBuV/m	O∨er limit	Remark
1	1187.50	52.12	24.41	4.50	36.50	44.53	74.00	-29.47	Peak
2	1377.98	52.34	24.60	4.94	36.71	45.17	74.00	-28.83	Peak
3	1687.50	55.48	25.27	5.58	37.00	49.33	74.00	-24.67	Peak
4	2825.84	47.05	28.30	7.79	37.88	45.26	74.00	-28.74	Peak
5	3155.34	46.91	28.57	8.38	37.99	45.87	74.00	-28.13	Peak
6	5809.85	39.50	32.91	9.71	38.03	44.09	74.00	-29.91	Peak


Report No: TRE1601013006 Page: 16 of 18 Issued: 2016-02-17

# 5. Test Setup Photos of the EUT

Conducted Emission (AC Mains)



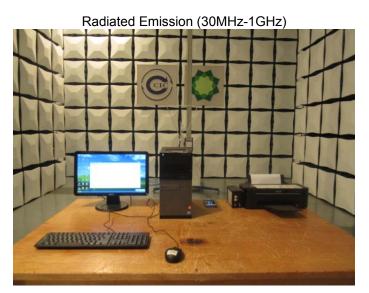

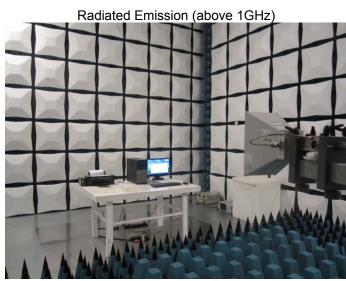

Report No: TRE1601013006 Page: 17 of 18 Issued: 2016-02-17



Report No: TRE1601013006 Page: 18 of 18 Issued: 2016-02-17

# 6. External and Internal Photos of the EUT

Reference to the test report	No. TRE1601013001	
	End of Report	