




1 2 3 4 5

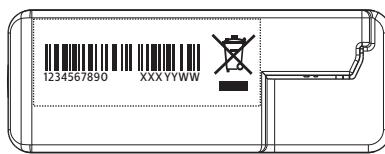

label printing to stick on the housing

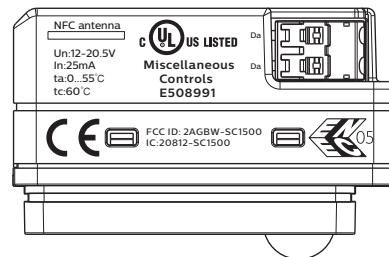

laster mark on the housing

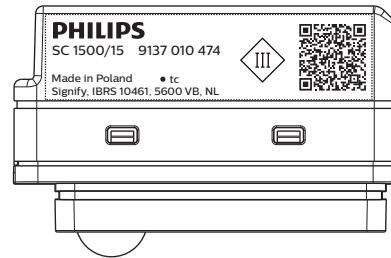

label printing to stick on the housing

Specification:


Printing Color: Black

Fonts: Centrale Sans (Medium)

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

CE need to be at least 5mm height

Label needs to comply with UL PGDQ2 and PGAA or PGJ12 and PGAA



01-23-45-67-89-AB, //," is needed

01-23-45-67-89-AB-CD-EF

Barcode thermal transfer Specification:

Printing Color: Black

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

Type of Barcode: Code 128 as specified in ISOIEC 15417

YYWW=Year, Week Week production data code

XXX=PFT


Barcode: 10digit numerical Code 128

10 digit number: Index number




A	PCM1028793	PRINTING TYPE PLATE Mainstream Sensor Bundle Plus	4422-947-4658*	1	2019-11-13
REV	CHANGE NO				
Drawn by : Jia Zhang	Checked by STL:				
Revised by: Ding Lujia	Checked by CE: Wang Zhi Pei	Approved by PM:		SIGNIFY (CHINA) INVESTMENT CO., LTD.	
1	2	3	4	5	A4


1 2 3 4 5

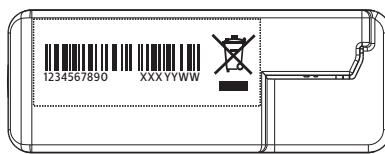

label printing to stick on the housing

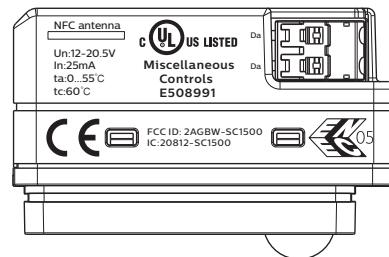

laster mark on the housing

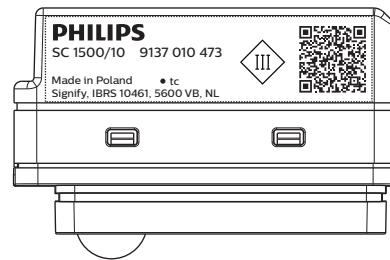

label printing to stick on the housing

Specification:


Printing Color: Black

Fonts: Centrale Sans (Medium)

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

CE need to be at least 5mm height

Label needs to comply with UL PGDQ2 and PGAA or PGJ12 and PGAA



01-23-45-67-89-AB, //," is needed

01-23-45-67-89-AB-CD-EF

Barcode thermal transfer Specification:

Printing Color: Black

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

Type of Barcode: Code 128 as specified in ISOIEC 15417

YYWW=Year, Week Week production data code

XXX=PFT


Barcode: 10digit numerical Code 128

10 digit number: Index number




A	PCM1028793		PRINTING TYPE PLATE Mainstream Sensor Bundle Plus			4422-947-4659*	1	2019-11-13
REV	CHANGE NO	DATE						
Drawn by : Jia Zhang	Checked by STL:	Checked by engineer: Zhipei Wang	SH	114 - 1	SH	1	10	A4
Revised by: Ding Lujia	Checked by CE: Wang Zhi Pei	Approved by PM:	SIGNIFY (CHINA) INVESTMENT CO., LTD.					


1 2 3 4 5

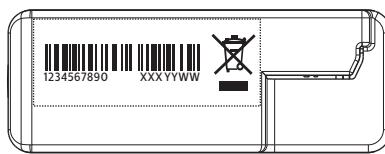

label printing to stick on the housing

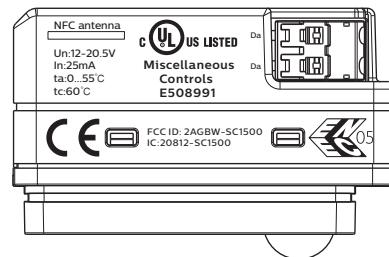

laster mark on the housing

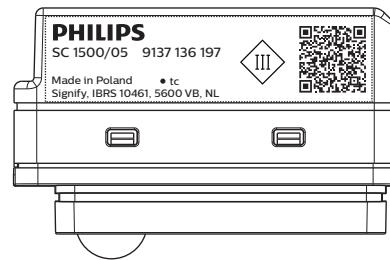

label printing to stick on the housing

Specification:


Printing Color: Black

Fonts: Centrale Sans (Medium)

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

CE need to be at least 5mm height

Label needs to comply with UL PGDQ2 and PGAA or PGJ12 and PGAA



01-23-45-67-89-AB, //," is needed

01-23-45-67-89-AB-CD-EF

Barcode thermal transfer Specification:

Printing Color: Black

Printing Quality: Water and petrol resistant
(according to IEC61347-1 clause 7.2)

Type of Barcode: Code 128 as specified in ISOIEC 15417

YYWW=Year, Week Week production data code

XXX=PFT

Barcode: 10digit numerical Code 128

10 digit number: Index number



A	PCM1028793		PRINTING TYPE PLATE Mainstream Sensor Bundle Plus			4422-947-3452*	1	2019-11-13
REV	CHANGE NO	DATE						
Drawn by : Jia Zhang	Checked by STL:	Checked by engineer: Zhipei Wang	SH	114 - 1	SH	1	10	A4
Revised by: Ding Lujia	Checked by CE: Wang Zhi Pei	Approved by PM:	SIGNIFY (CHINA) INVESTMENT CO., LTD.					