



TESTING LABORATORY
CERTIFICATE#4323.01



FCC PART 15.247

TEST REPORT

For

Signify (China) Investment Co., Ltd.

Building no.9, Lane 888, Tianlin Road, Minhang District, Shanghai, 200233, China

FCC ID:2AGBW9290024691X

Report Type: Original Report	Product Type: LED Lamp
Test Engineer:	Chao Gao <i>Chao Gao</i>
Report Number:	RXM210113051-00C
Report Date:	2021-02-23
Reviewed By:	Oscar Ye <i>Oscar Ye</i> EMC Manager
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION.....	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
EUT EXERCISE SOFTWARE	7
SUPPORT EQUIPMENT LIST AND DETAILS	10
EXTERNAL I/O CABLE.....	10
BLOCK DIAGRAM OF TEST SETUP	11
SUMMARY OF TEST RESULTS	13
TEST EQUIPMENT LIST	14
FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)	15
CALCULATED FORMULARY:.....	15
FCC §15.203 - ANTENNA REQUIREMENT.....	16
APPLICABLE STANDARD	16
ANTENNA CONNECTOR CONSTRUCTION	16
FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS	17
APPLICABLE STANDARD	17
EUT SETUP	17
EMI TEST RECEIVER SETUP.....	17
TEST PROCEDURE	18
CORRECTED FACTOR & OVER LIMIT CALCULATION.....	18
TEST RESULTS SUMMARY	18
TEST DATA	18
FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS.....	27
APPLICABLE STANDARD	27
EUT SETUP.....	27
EMI TEST RECEIVER SETUP.....	28
TEST PROCEDURE	28
FACTOR & OVER LIMIT CALCULATION - BELOW 1 GHz.....	28
CORRECTED AMPLITUDE & MARGIN CALCULATION - ABOVE 1 GHz.....	28
TEST RESULTS SUMMARY	29
TEST DATA	29
FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH.....	58
APPLICABLE STANDARD	58
TEST PROCEDURE	58
TEST DATA	58
FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER.....	67
APPLICABLE STANDARD	67
TEST PROCEDURE	67
TEST DATA	68

FCC §15.247(d) – BAND EDGE.....	76
APPLICABLE STANDARD	76
TEST PROCEDURE	76
TEST DATA	76
FCC §15.247(e) - POWER SPECTRAL DENSITY	81
APPLICABLE STANDARD	81
TEST PROCEDURE	81
TEST DATA	81

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant:	Signify (China) Investment Co., Ltd
Tested Model:	9290024691
Product Type:	LED Lamp
Power Supply:	AC 110~130V
RF Function:	BLE
Max Conducted Peak Output Power:	9.90dBm(125Kbps);9.74dBm(500Kbps); 9.93dBm(1Mbps);9.69dBm(2Mbps)
Operating Band/Frequency:	2402-2480MHz
Channel Number:	40
Channel Separation:	2 MHz
Modulation Type	GFSK
Antenna Type:	PCB Antenna
*Maximum Antenna Gain:	-1.5 dBi

Note: The antenna gain was provided by the applicant.

**All measurement and test data in this report was gathered from production sample serial number: RXM210113051-1(Assigned by BACL, Kunshan). The EUT was received on 2021-01-13.*

Objective

This report is prepared on behalf of *Signify (China) Investment Co., Ltd.* in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communications Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Related Submittal(s)/Grant(s)

FCC Part 15.247 Zigbee DTS submittal with FCC ID: 2AGBW9290024691X.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices and FCC KDB 558074 D01 15.247 Meas Guidance v05r02.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

Item		Uncertainty
AC Power Lines Conducted Emissions		3.19dB
RF conducted test with spectrum		0.9dB
RF Output Power with Power meter		0.5dB
Radiated emission	30MHz~1GHz	6.11dB
	1GHz~6GHz	4.45dB
	6GHz~18GHz	5.23dB
	18GHz~40GHz	5.65dB
Occupied Bandwidth		0.5kHz
Temperature		1.0°C
Humidity		6%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

Channel List for BLE mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	21	2444
2	2406	22	2446
3	2408	23	2448
4	2410	24	2450
5	2412	25	2452
6	2414	26	2454
7	2416	27	2456
8	2418	28	2458
9	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480

EUT was tested with channel 0, 20 and 39.

Equipment Modifications

No modification was made to the EUT tested.


EUT Exercise Software

RF test software: UartAssist.exe

Power Level Setting: BLE(125Kbps): Default;BLE(500Kbps) : Default;BLE (1Mbps): Default; BLE (2Mbps): Default


Duty Cycle:

BLE(125Kbps): Middle Channel: 2442MHz

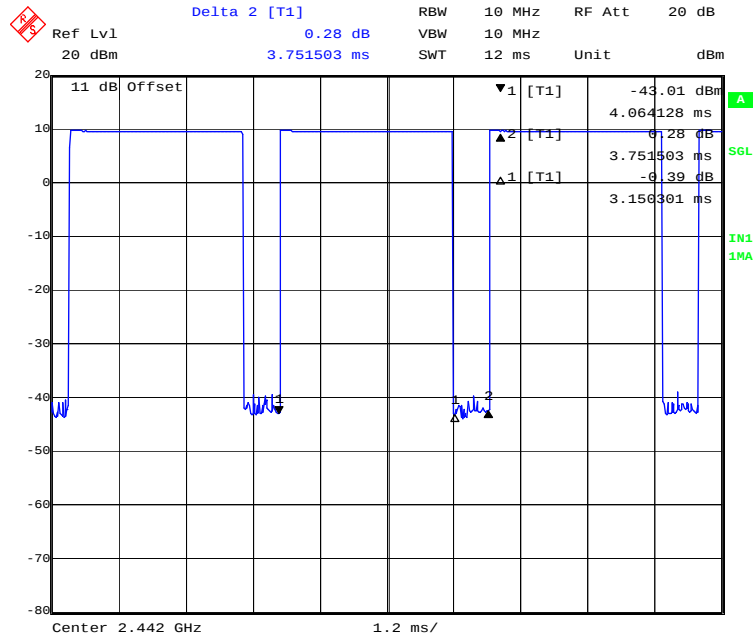


Date: 22.FEB.2021 18:14:45

BLE(500Kbps): Middle Channel: 2442MHz

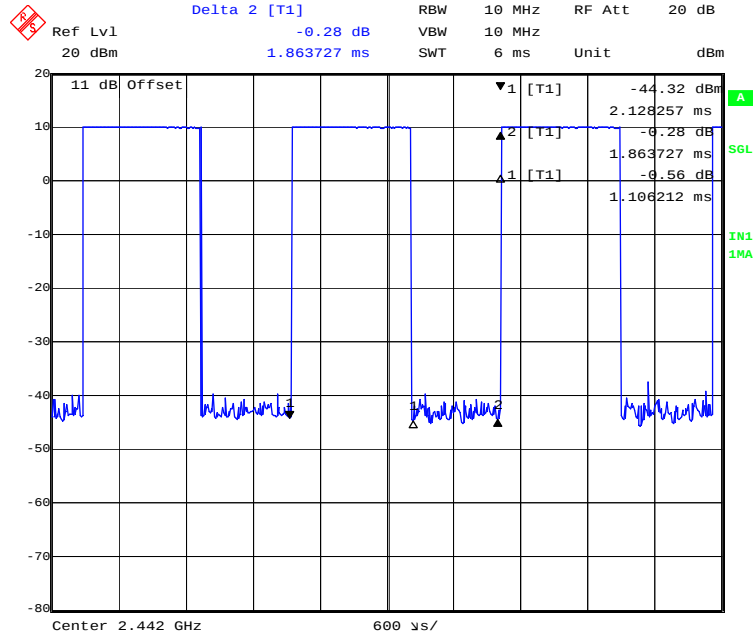


Date: 22.FEB.2021 19:50:47

BLE (1Mbps): Middle Channel: 2442MHz

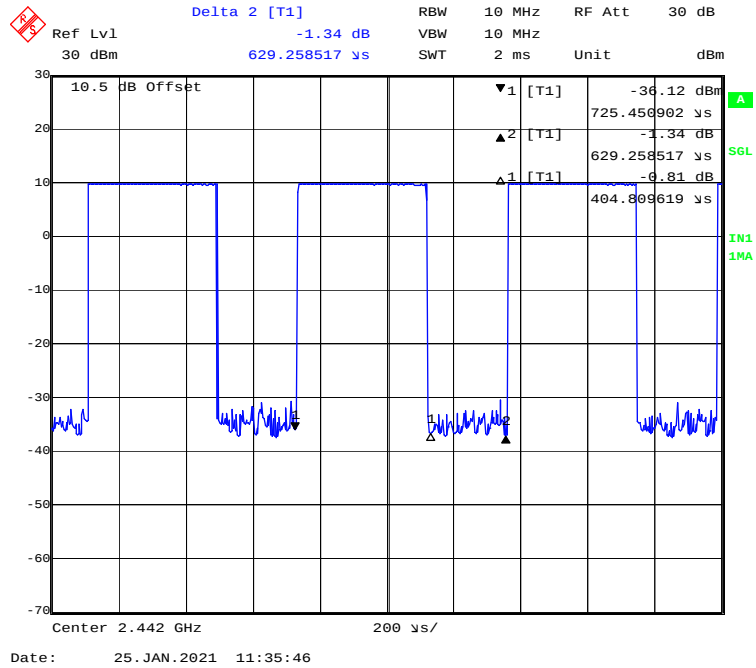

BLE (2Mbps): Middle Channel: 2442MHz

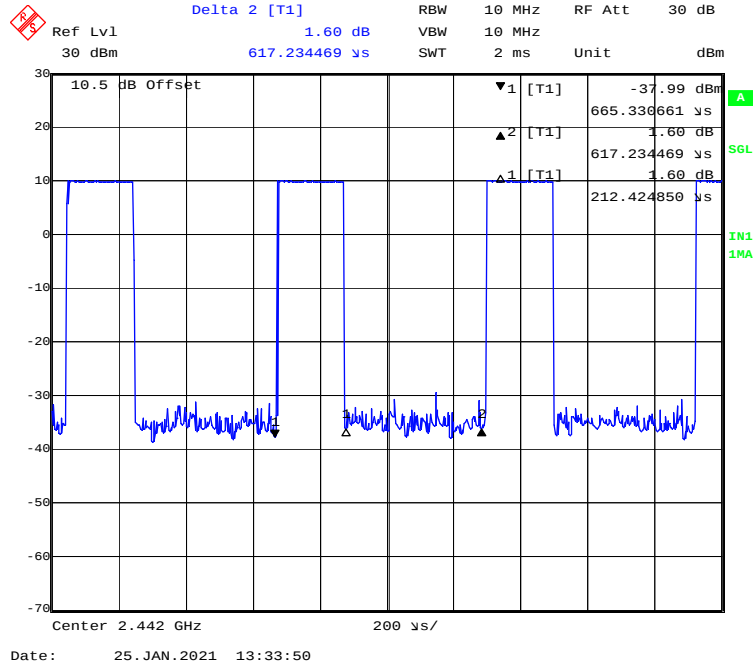

Mode	Duty Cycle (%)	T(ms)	1/T(kHz)	10log(1/x)
BLE(125Kbps)	83.96	3.150	0.32	0.76
BLE(500Kbps)	59.33	1.106	0.90	2.27
BLE (1Mbps)	64.39	0.405	2.47	1.91
BLE (2Mbps)	34.36	0.212	4.72	4.64

Note: “x” means the Duty Cycle.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To Port
Power Cable	1.0	EUT	LISN/AC Source

Block Diagram of Test Setup


For Conducted Emissions:

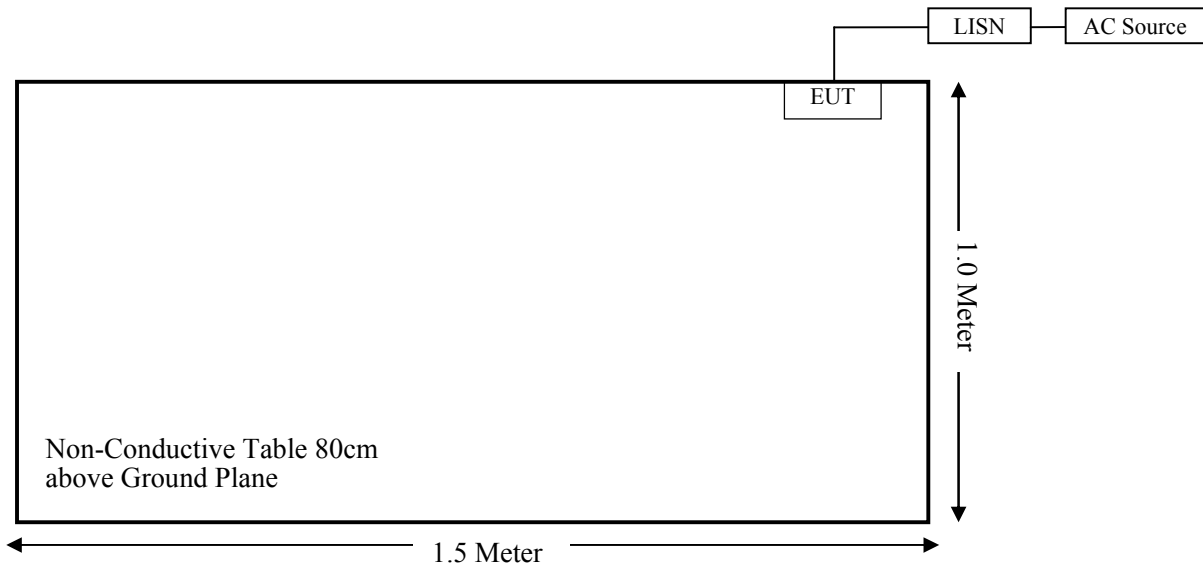

For Radiated Emissions (Below 1GHz):

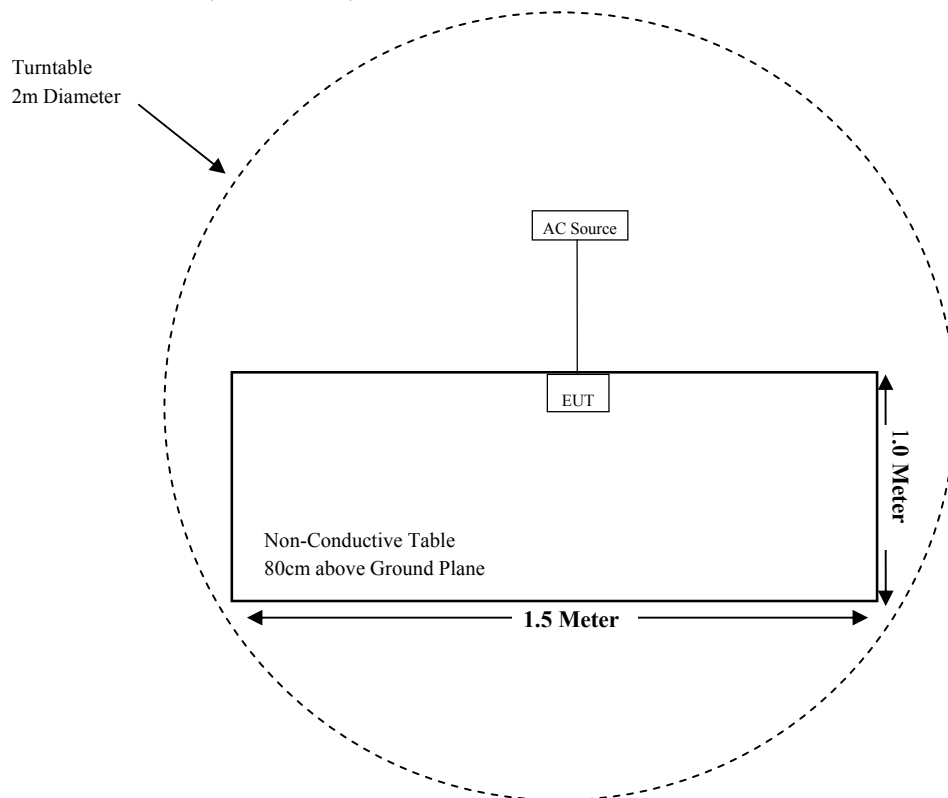

For Radiated Emissions (Above 1GHz):

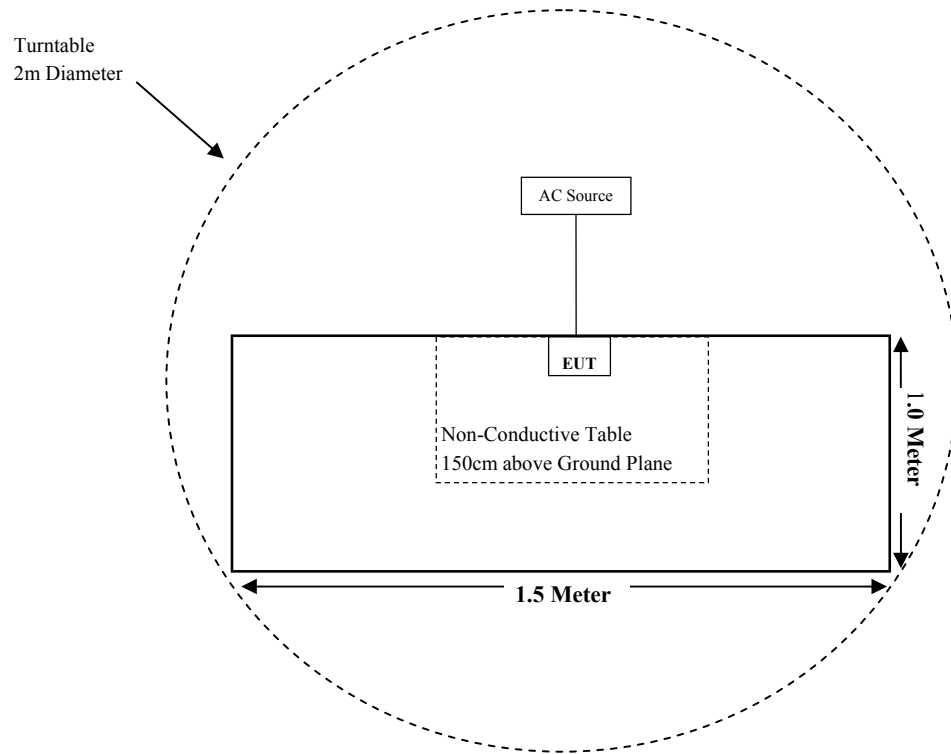

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310 & §2.1091	Maximum Permissible Exposure (MPE)	Compliant
§15.203	Antenna Requirement	Compliant
§15.207 (a)	AC Line Conducted Emissions	Compliant
§15.247(d)	Spurious Emissions at Antenna Port	Compliant
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliant
§15.247 (a)(2)	6 dB Emission Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test (Chamber 1#)					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Sunol Sciences	Broadband Antenna	JB3	A090314-1	2020-08-05	2021-08-04
Sonoma Instrument	Pre-amplifier	310N	171205	2020-08-14	2021-08-13
Audix	Test Software	e3	V9	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-8	008	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2020-08-15	2021-08-14
Radiated Emission Test (Chamber 2#)					
Rohde & Schwarz	EMI Test Receiver	ESU40	100207	2020-04-01	2021-03-31
ETS-LINDGREN	Horn Antenna	3115	9207-3900	2020-07-15	2023-07-14
ETS-LINDGREN	Horn Antenna	3116	00084159	2020-01-07	2023-01-06
A.H.Systems, inc	Amplifier	PAM-0118P	512	2020-02-20	2021-02-19
SELECTOR	Amplifier	EM18G40G	060726	2020-03-22	2021-03-21
MICRO-TRONICS	Band Reject Filter	BRM50702	G024	2020-08-05	2021-08-04
Rohde & Schwarz	Auto test Software	EMC32	100361	N/A	N/A
MICRO-COAX	Coaxial Cable	Cable-6	006	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-11	011	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-12	012	2020-08-15	2021-08-14
MICRO-COAX	Coaxial Cable	Cable-13	013	2020-08-15	2021-08-14
RF Conducted Test					
Rohde & Schwarz	EMI Test Receiver	ESIB26	100146	2020-11-27	2021-11-26
Narda	Attenuator	10dB	010	2020-08-15	2021-08-14
Signify	RF Cable	Signify C01	N/A	Each Time	N/A
Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2020-08-05	2021-08-04
Rohde & Schwarz	LISN	ENV216	101115	2020-11-27	2021-11-26
Audix	Test Software	e3	V9	N/A	N/A
Rohde & Schwarz	Pulse limiter	ESH3-Z2	0357.8810.54	2020-08-10	2021-08-09
MICRO-COAX	Coaxial Cable	Cable-15	015	2020-08-15	2021-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §1.1310 & §2.1091 – MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

According to subpart §2.1091 and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm²)	Averaging Time (minutes)
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Calculated Formulary:

Predication of MPE limit at a given distance

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

Calculated Data:

Mode	Frequency Range (MHz)	Antenna Gain		Tune-up Conducted Power		Evaluation Distance (cm)	Power Density (mW/cm²)	MPE Limit (mW/cm²)
		(dBi)	(numeric)	(dBm)	(mW)			
Zigbee	2405~2480	-1.5	0.71	10.00	10.00	20	0.0014	1.0
BLE(125Kbps)	2402~2480	-1.5	0.71	10.00	10.00	20	0.0014	1.0
BLE(500Kbps)	2402~2480	-1.5	0.71	10.00	10.00	20	0.0014	1.0
BLE(1Mbps)	2402~2480	-1.5	0.71	10.00	10.00	20	0.0014	1.0
BLE(2Mbps)	2402~2480	-1.5	0.71	10.00	10.00	20	0.0014	1.0

Note: (1) The tune-up conducted power was declared by the manufacturer.

(2) Zigbee and BLE can't transmit simultaneously.

Conclusion: The device meets FCC MPE at 20 cm distance.

FCC §15.203 - ANTENNA REQUIREMENT

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has a PCB antenna for BLE, which the antenna gain is -1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

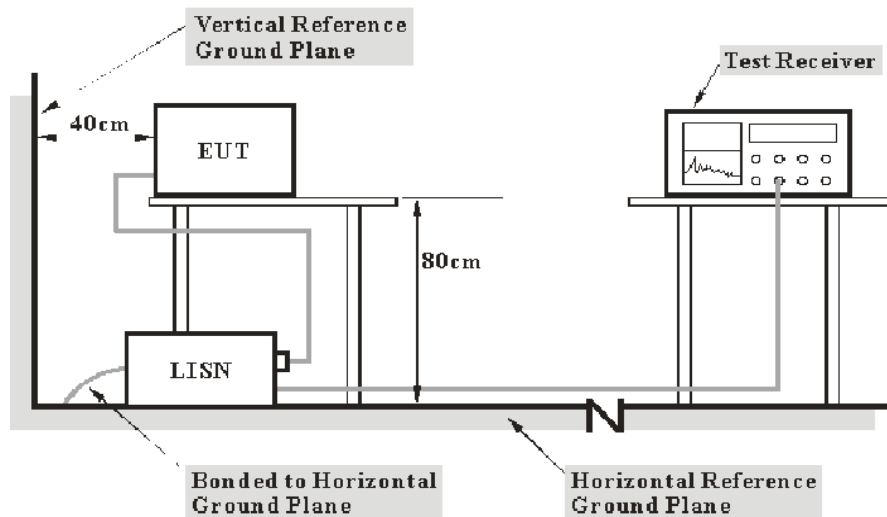

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

ANSI C63.10-2013 clause 6.2

During the conducted emission test, the EUT was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Over Limit Calculation

The Corrected Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuation (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of 7 dB means the emission is 7 dB above the limit. The equation for over limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Part 15.207.


Test Data

Environmental Conditions

Temperature:	24.3-25.1 °C
Relative Humidity:	50-52 %
ATM Pressure:	101.1-102.3 kPa


The testing was performed by Chao Gao from 2021-01-21 to 2021-02-18.

EUT operation mode: Transmitting in low channel (worst case)

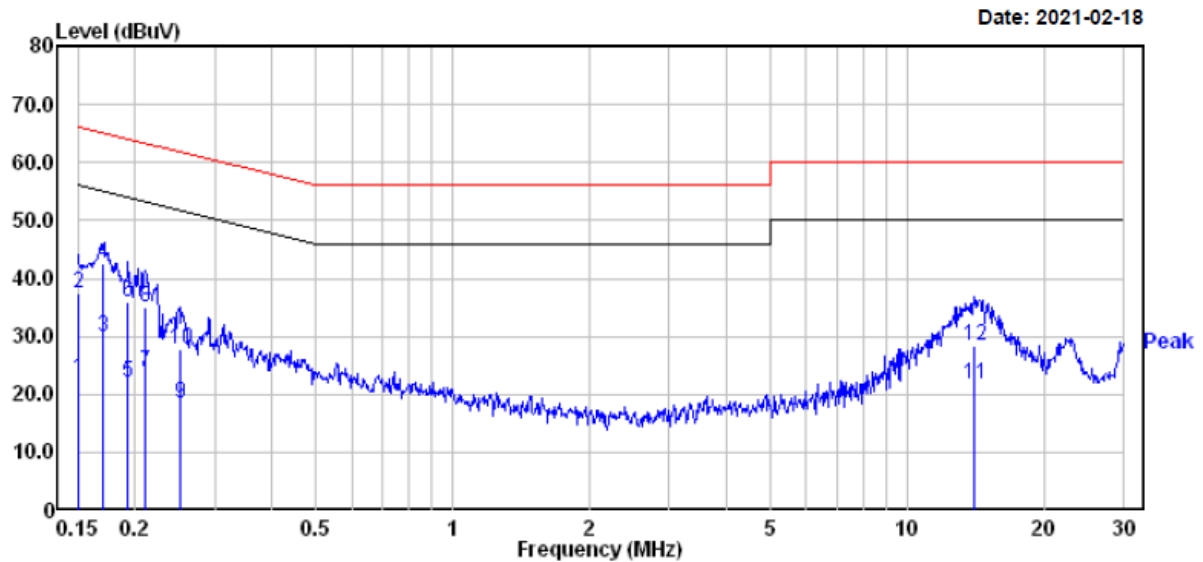BLE (125Kbps)**AC 120V/60 Hz, Line**

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.150	2.90	19.82	22.72	56.00	-33.28 Average
2	0.150	17.60	19.82	37.42	66.00	-28.58 QP
3	0.169	10.00	19.83	29.83	54.99	-25.16 Average
4	0.169	22.70	19.83	42.53	64.99	-22.46 QP
5	0.193	2.10	19.82	21.92	53.89	-31.97 Average
6	0.193	16.10	19.82	35.92	63.89	-27.97 QP
7	0.211	3.90	19.82	23.72	53.18	-29.46 Average
8	0.211	15.30	19.82	35.12	63.18	-28.06 QP
9	0.251	-1.30	19.82	18.52	51.73	-33.21 Average
10	0.251	7.90	19.82	27.72	61.73	-34.01 QP
11	14.063	2.00	19.62	21.62	50.00	-28.38 Average
12	14.063	8.80	19.62	28.42	60.00	-31.58 QP


AC 120V/60 Hz, Neutral

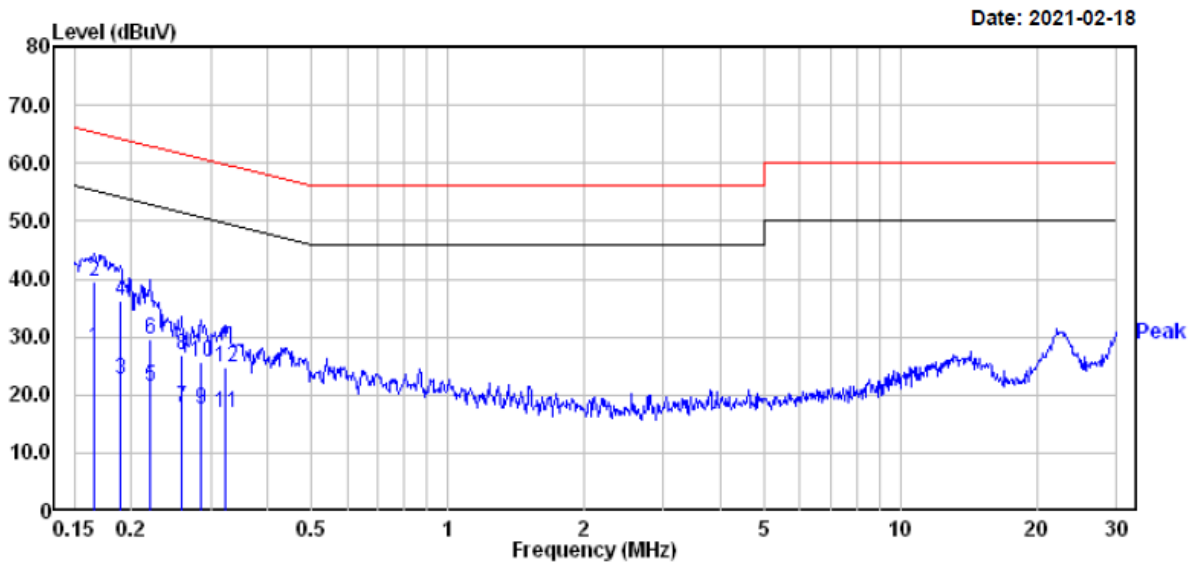


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.165	8.10	19.83	27.93	55.21	-27.28	Average
2	0.165	19.80	19.83	39.63	65.21	-25.58	QP
3	0.189	2.80	19.82	22.62	54.06	-31.44	Average
4	0.189	16.30	19.82	36.12	64.06	-27.94	QP
5	0.221	1.50	19.82	21.32	52.79	-31.47	Average
6	0.221	9.90	19.82	29.72	62.79	-33.07	QP
7	0.259	-1.90	19.82	17.92	51.47	-33.55	Average
8	0.259	7.10	19.82	26.92	61.47	-34.55	QP
9	0.285	-2.40	19.82	17.42	50.68	-33.26	Average
10	0.285	5.70	19.82	25.52	60.68	-35.16	QP
11	0.322	-2.80	19.82	17.02	49.66	-32.64	Average
12	0.322	4.80	19.82	24.62	59.66	-35.04	QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

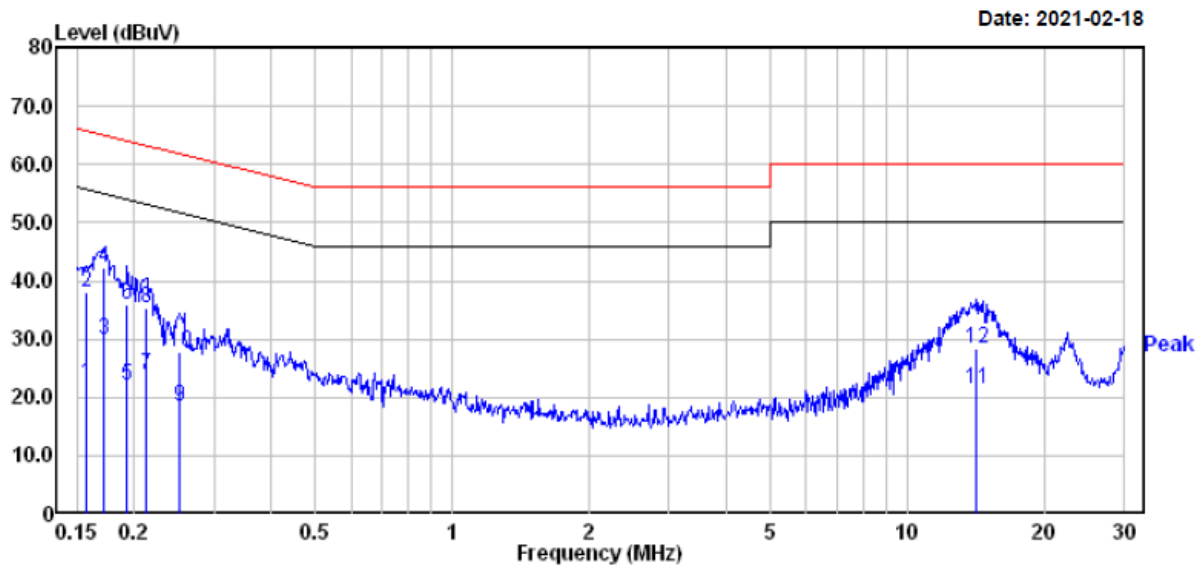BLE (500Kbps)**AC 120V/60 Hz, Line**


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	2.50	19.82	22.32	55.65	-33.33	Average
2	0.156	18.10	19.82	37.92	65.65	-27.73	QP
3	0.171	10.10	19.83	29.93	54.90	-24.97	Average
4	0.171	22.50	19.83	42.33	64.90	-22.57	QP
5	0.193	2.10	19.82	21.92	53.89	-31.97	Average
6	0.193	16.10	19.82	35.92	63.89	-27.97	QP
7	0.212	3.90	19.82	23.72	53.14	-29.42	Average
8	0.212	15.40	19.82	35.22	63.14	-27.92	QP
9	0.251	-1.40	19.82	18.42	51.73	-33.31	Average
10	0.251	8.00	19.82	27.82	61.73	-33.91	QP
11	14.213	1.90	19.62	21.52	50.00	-28.48	Average
12	14.213	8.70	19.62	28.32	60.00	-31.68	QP

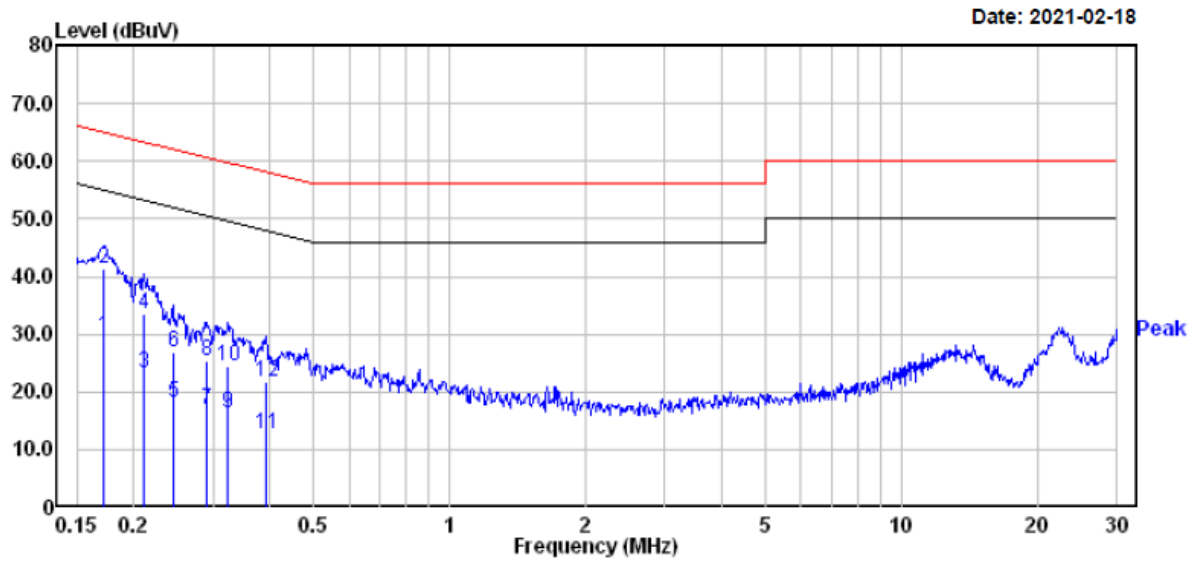AC 120V/60 Hz, Neutral


	Freq	Read		Limit	Over	
	MHz	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.172	9.90	19.83	29.73	54.86	-25.13 Average
2	0.172	21.60	19.83	41.43	64.86	-23.43 QP
3	0.211	3.30	19.82	23.12	53.18	-30.06 Average
4	0.211	13.70	19.82	33.52	63.18	-29.66 QP
5	0.244	-1.60	19.82	18.22	51.95	-33.73 Average
6	0.244	7.00	19.82	26.82	61.95	-35.13 QP
7	0.291	-3.00	19.82	16.82	50.50	-33.68 Average
8	0.291	5.60	19.82	25.42	60.50	-35.08 QP
9	0.323	-3.60	19.82	16.22	49.62	-33.40 Average
10	0.323	4.50	19.82	24.32	59.62	-35.30 QP
11	0.391	-7.00	19.75	12.75	48.03	-35.28 Average
12	0.391	2.00	19.75	21.75	58.03	-36.28 QP

Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

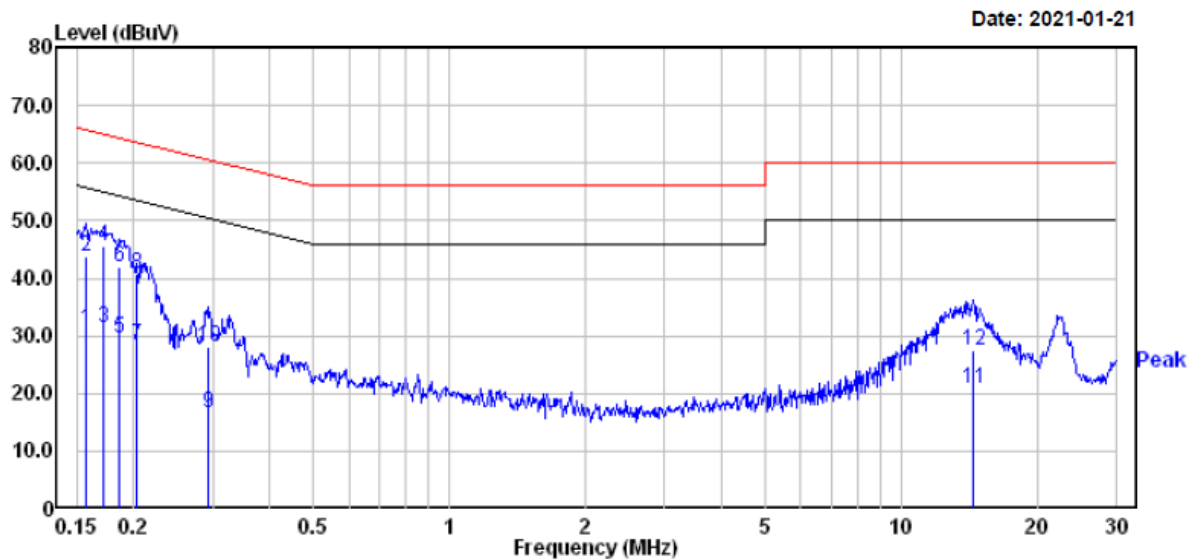BLE (1Mbps)**AC 120V/60 Hz, Line**


	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	11.20	19.82	31.02	55.65	-24.63	Average
2	0.156	24.10	19.82	43.92	65.65	-21.73	QP
3	0.171	11.60	19.83	31.43	54.90	-23.47	Average
4	0.171	25.70	19.83	45.53	64.90	-19.37	QP
5	0.186	9.71	19.82	29.53	54.20	-24.67	Average
6	0.186	22.21	19.82	42.03	64.20	-22.17	QP
7	0.204	8.60	19.82	28.42	53.45	-25.03	Average
8	0.204	20.90	19.82	40.72	63.45	-22.73	QP
9	0.294	-3.10	19.83	16.73	50.41	-33.68	Average
10	0.294	8.10	19.83	27.93	60.41	-32.48	QP
11	14.440	1.10	19.62	20.72	50.00	-29.28	Average
12	14.440	8.00	19.62	27.62	60.00	-32.38	QP

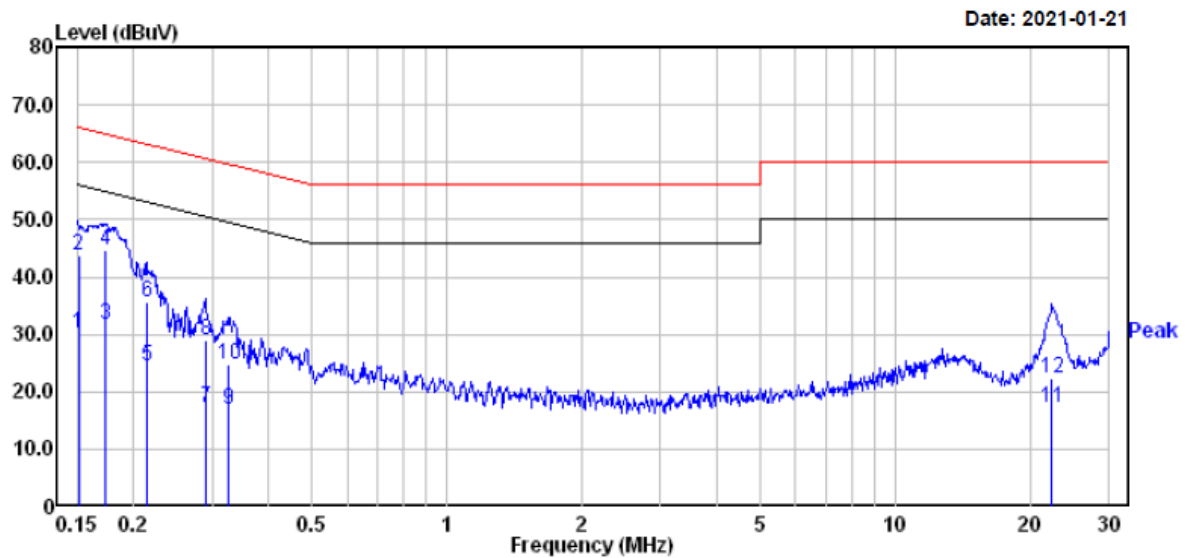AC 120V/60 Hz, Neutral

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.151	10.50	19.82	30.32	55.96	-25.64	Average
2	0.151	24.00	19.82	43.82	65.96	-22.14	QP
3	0.173	12.00	19.83	31.83	54.81	-22.98	Average
4	0.173	24.70	19.83	44.53	64.81	-20.28	QP
5	0.214	4.60	19.82	24.42	53.05	-28.63	Average
6	0.214	15.70	19.82	35.52	63.05	-27.53	QP
7	0.289	-2.50	19.82	17.32	50.54	-33.22	Average
8	0.289	9.10	19.82	28.92	60.54	-31.62	QP
9	0.325	-2.80	19.82	17.02	49.57	-32.55	Average
10	0.325	4.90	19.82	24.72	59.57	-34.85	QP
11	22.416	-2.50	19.82	17.32	50.00	-32.68	Average
12	22.416	2.40	19.82	22.22	60.00	-37.78	QP


Note:

- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

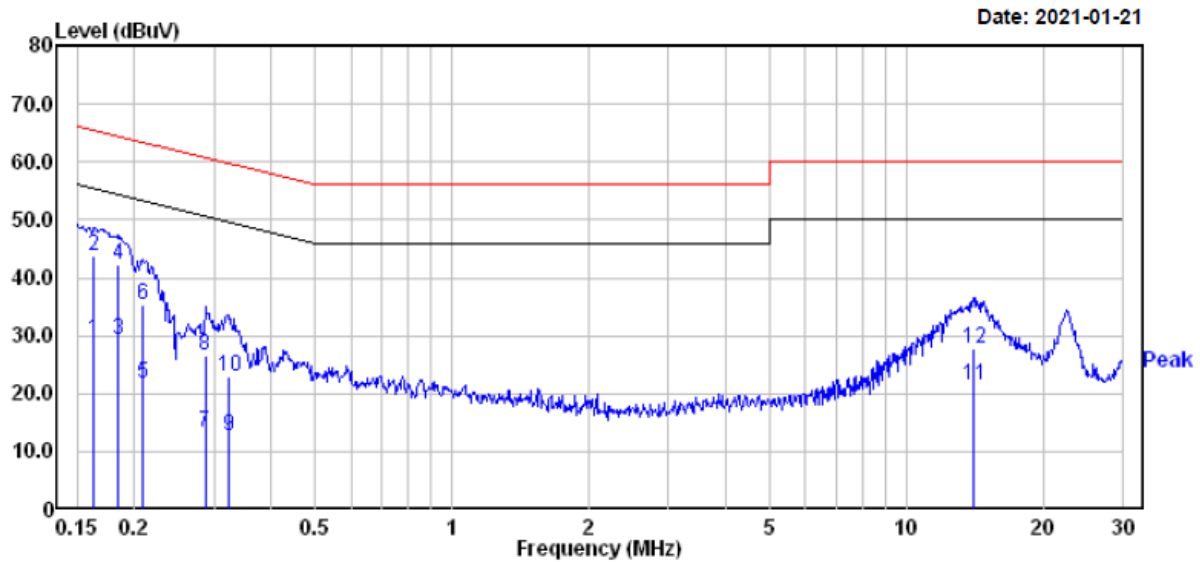BLE (2Mbps)**AC 120V/60 Hz, Line**

	Freq	Read		Limit	Over	
	MHz	Level	Factor	Level	Line	Limit Remark
	MHz	dBuV	dB	dBuV	dBuV	dB
1	0.163	9.60	19.83	29.43	55.30	-25.87 Average
2	0.163	24.00	19.83	43.83	65.30	-21.47 QP
3	0.184	9.51	19.82	29.33	54.28	-24.95 Average
4	0.184	22.31	19.82	42.13	64.28	-22.15 QP
5	0.208	1.80	19.82	21.62	53.27	-31.65 Average
6	0.208	15.60	19.82	35.42	63.27	-27.85 QP
7	0.286	-6.50	19.82	13.32	50.63	-37.31 Average
8	0.286	6.60	19.82	26.42	60.63	-34.21 QP
9	0.322	-7.00	19.82	12.82	49.66	-36.84 Average
10	0.322	3.00	19.82	22.82	59.66	-36.84 QP
11	14.063	1.70	19.62	21.32	50.00	-28.68 Average
12	14.063	8.20	19.62	27.82	60.00	-32.18 QP

AC 120V/60 Hz, Neutral

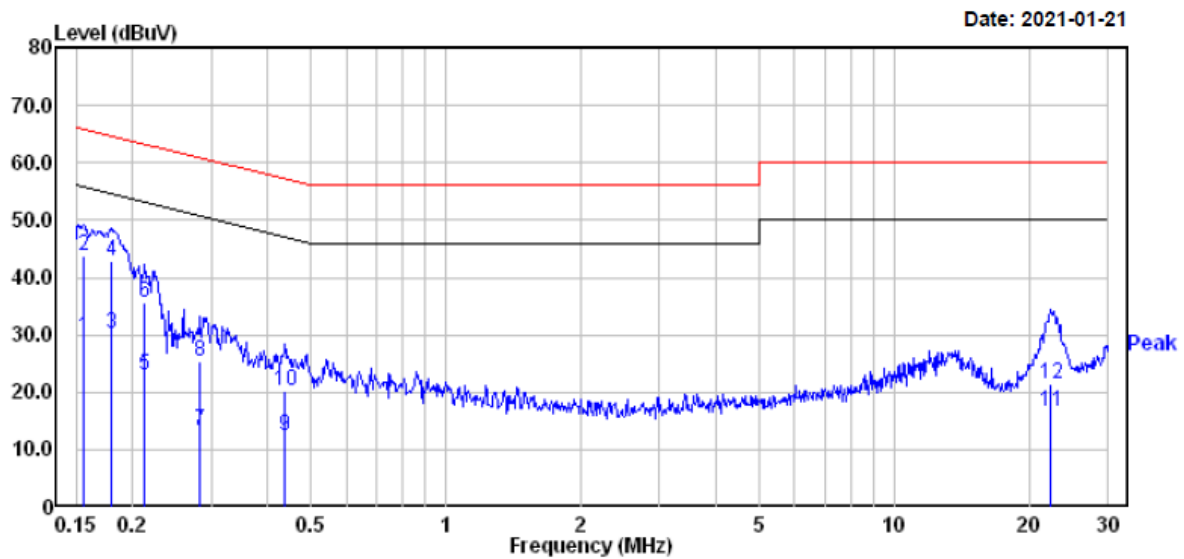

		Read			Limit	Over	
	Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.156	9.80	19.82	29.62	55.69	-26.07	Average
2	0.156	24.00	19.82	43.82	65.69	-21.87	QP
3	0.179	10.30	19.83	30.13	54.55	-24.42	Average
4	0.179	23.10	19.83	42.93	64.55	-21.62	QP
5	0.213	3.20	19.82	23.02	53.10	-30.08	Average
6	0.213	15.90	19.82	35.72	63.10	-27.38	QP
7	0.283	-6.40	19.82	13.42	50.72	-37.30	Average
8	0.283	5.40	19.82	25.22	60.72	-35.50	QP
9	0.437	-7.50	19.75	12.25	47.11	-34.86	Average
10	0.437	0.50	19.75	20.25	57.11	-36.86	QP
11	22.298	-3.10	19.83	16.73	50.00	-33.27	Average
12	22.298	1.70	19.83	21.53	60.00	-38.47	QP

Note:


- 1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuation (dB)
- 2) Over Limit (dB) = Read level (dBμV) + Factor (dB) - Limit (dBμV)

FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS**Applicable Standard**


FCC §15.247 (d); §15.209; §15.205;

EUT Setup

Below 1 GHz:

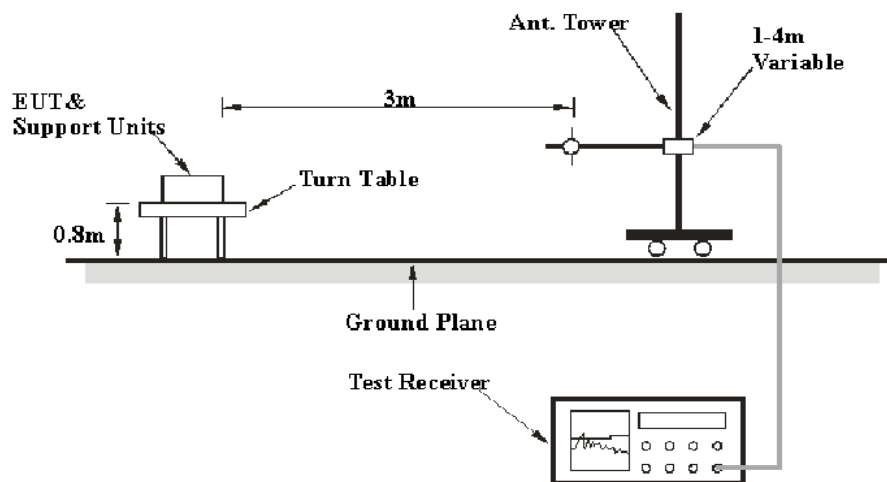

Above 1GHz:

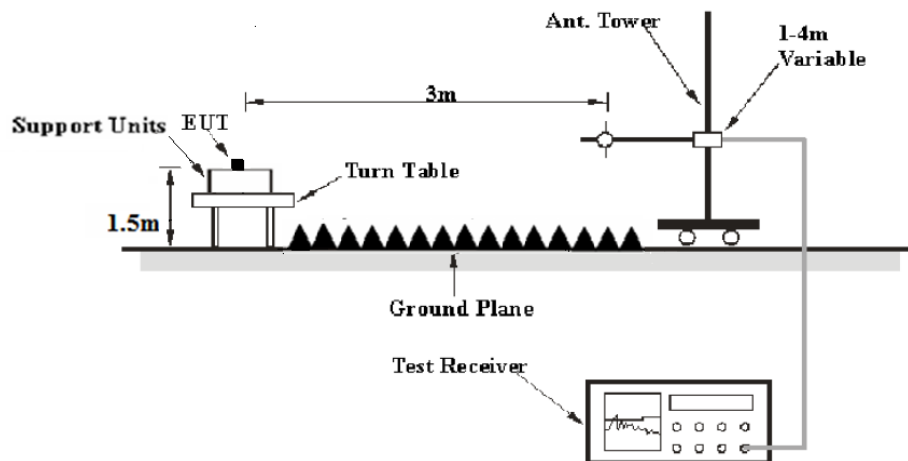

The radiated emission tests were performed in the 3 meters test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver Setup was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Factor & Over Limit Calculation - Below 1 GHz

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation - Above 1 GHz

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude (dB}\mu\text{V/m)} = \text{Meter Reading (dB}\mu\text{V)} + \text{Antenna Factor (dB/m)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin (dB)} = \text{Limit (dB}\mu\text{V/m)} - \text{Corrected Amplitude (dB}\mu\text{V/m)}$$

Test Results Summary

According to the recorded data in following table, the EUT complied with the FCC Title 47, Part 15, Subpart C, section 15.205, 15.209 and 15.247.

Test Data**Environmental Conditions**

Temperature:	23.6~24.3℃
Relative Humidity:	50~52%
ATM Pressure:	101.1~101.3 kPa


The testing was performed by Chao Gao from 2021-01-18 to 2021-02-22.

Test Result: Compliant.

EUT operation mode: Transmitting

Spurious Emission Test:**BLE (125Kbps)****30MHz-1GHz**

(Pre-scan with Low channel, Middle channel, High channel of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

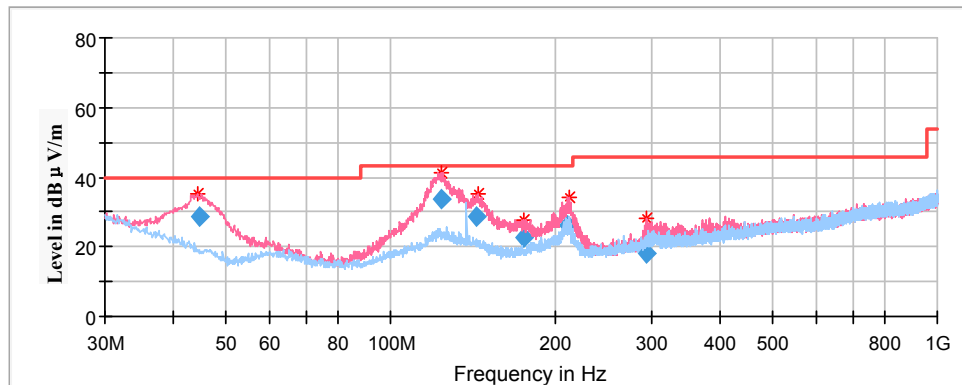

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
	QuasiPeak (dBµV/m)	Height (cm)	Polar (H/V)				
44.538800	28.83	100.0	V	193.0	-13.6	40.00	11.17
123.734650	33.47	100.0	V	354.0	-10.6	43.50	10.03
143.771350	28.73	100.0	V	70.0	-11.6	43.50	14.77
175.664900	22.41	100.0	V	199.0	-13.0	43.50	21.09
210.479550	26.25	200.0	V	245.0	-11.8	43.50	17.25
293.512450	18.18	100.0	V	125.0	-11.1	46.00	27.82

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

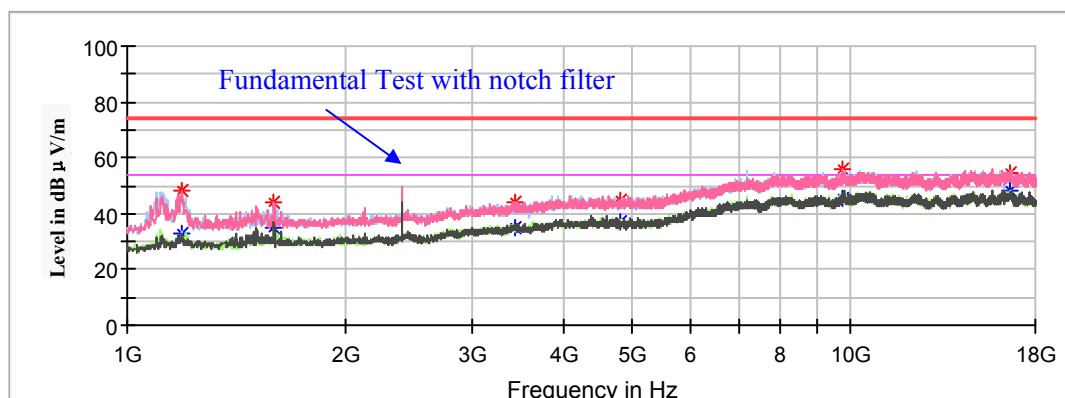

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1192.100000	47.97	---	150.0	V	283.0	-11.3	74.00	26.03
1192.100000	---	32.94	150.0	V	283.0	-11.3	54.00	21.06
1595.000000	---	34.72	200.0	V	228.0	-9.1	54.00	19.28
1595.000000	44.00	---	200.0	V	228.0	-9.1	74.00	30.00
3427.600000	---	35.07	150.0	H	0.0	-2.0	54.00	18.93
3427.600000	44.01	---	150.0	H	0.0	-2.0	74.00	29.99
4804.000000	---	37.37	200.0	V	291.0	1.0	54.00	16.63
4804.000000	44.45	---	200.0	V	291.0	1.0	74.00	29.55
9736.300000	55.84	---	150.0	V	97.0	11.9	74.00	18.16
9736.300000	---	45.19	150.0	V	97.0	11.9	54.00	8.81
16623.000000	54.80	---	200.0	H	304.0	11.9	74.00	19.20
16623.000000	---	48.42	200.0	H	304.0	11.9	54.00	5.58

Middle Channel: 2442MHz


Full Spectrum

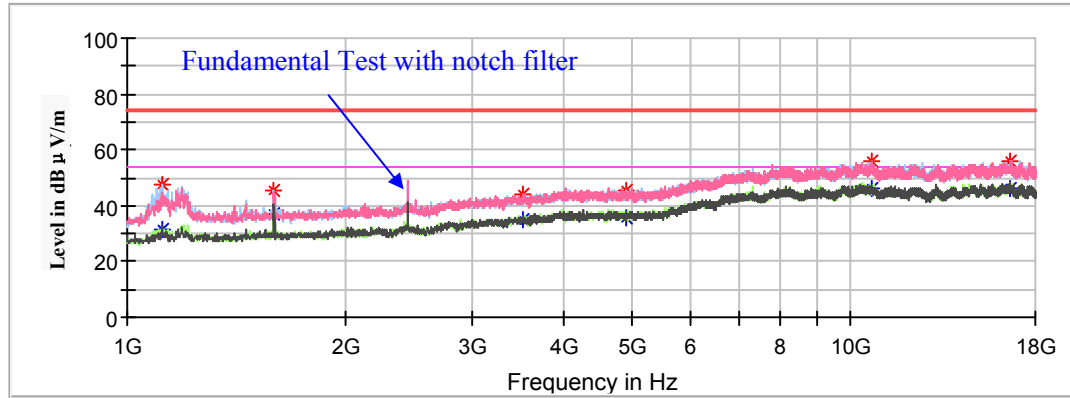

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1119.000000	47.57	---	200.0	H	8.0	-11.8	74.00	26.43
1119.000000	---	31.39	200.0	H	8.0	-11.8	54.00	22.61
1595.000000	---	37.05	150.0	H	169.0	-9.1	54.00	16.95
1595.000000	45.32	---	150.0	H	169.0	-9.1	74.00	28.68
3526.200000	43.94	---	150.0	V	352.0	-1.7	74.00	30.06
3526.200000	---	34.99	150.0	V	352.0	-1.7	54.00	19.01
4884.000000	---	35.82	150.0	H	77.0	1.1	54.00	18.18
4884.000000	45.47	---	150.0	H	77.0	1.1	74.00	28.53
10664.500000	56.00	---	150.0	V	329.0	12.5	74.00	18.00
10664.500000	---	46.45	150.0	V	329.0	12.5	54.00	7.55
16645.100000	---	45.96	150.0	V	81.0	11.9	54.00	8.04
16645.100000	55.97	---	150.0	V	81.0	11.9	74.00	18.03

High Channel: 2480MHz

Full Spectrum

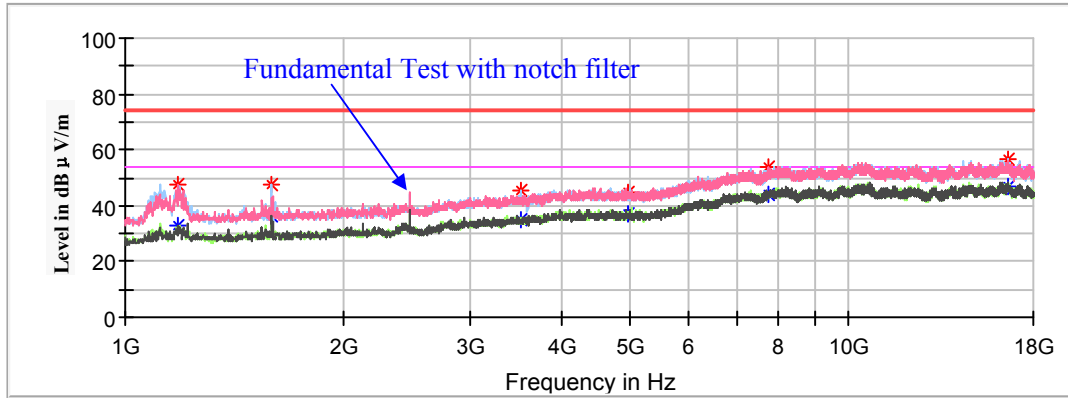


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1185.300000	47.77	---	150.0	V	289.0	-11.4	74.00	26.23
1185.300000	---	32.79	150.0	V	289.0	-11.4	54.00	21.21
1593.300000	---	36.15	200.0	V	231.0	-9.1	54.00	17.85
1593.300000	47.27	---	200.0	V	231.0	-9.1	74.00	26.73
3514.300000	45.33	---	200.0	H	284.0	-1.7	74.00	28.67
3514.300000	---	35.29	200.0	H	284.0	-1.7	54.00	18.71
4960.000000	---	37.07	200.0	V	199.0	1.1	54.00	16.93
4960.000000	45.05	---	200.0	V	199.0	1.1	74.00	28.95
7720.100000	---	44.12	150.0	H	0.0	9.9	54.00	9.88
7720.100000	53.52	---	150.0	H	0.0	9.9	74.00	20.48
16612.800000	56.73	---	200.0	H	352.0	11.9	74.00	17.27
16612.800000	---	47.13	200.0	H	352.0	11.9	54.00	6.87

18GHz-25GHz:


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle** channel of operation in Y-axis of orientation was recorded)

Horizontal

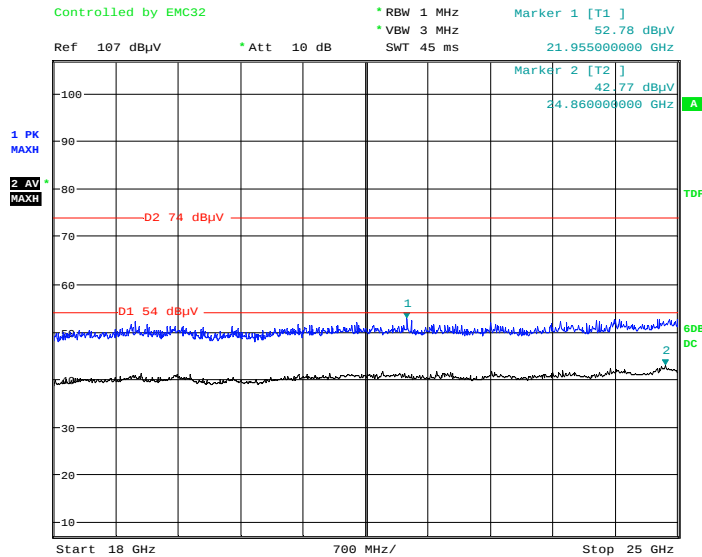

Date: 22.FEB.2021 10:33:24


Vertical

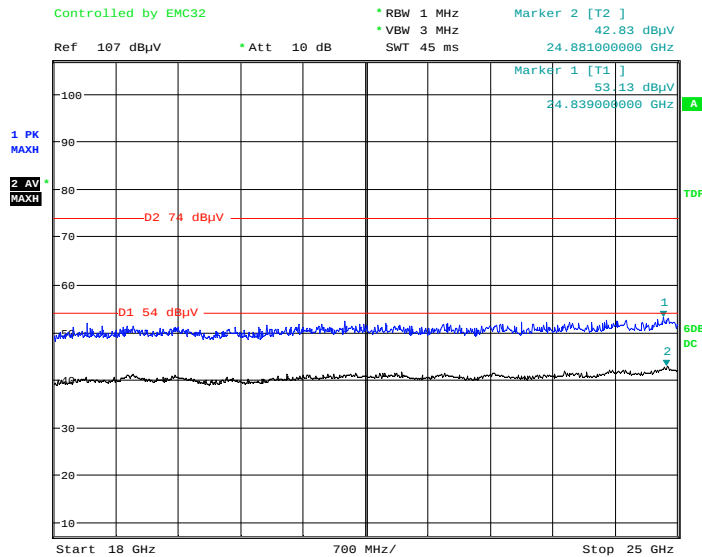

Date: 22.FEB.2021 10:35:11

BLE (500Kbps)**30MHz-1GHz**

(Pre-scan with Low channel, Middle channel, High channel of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

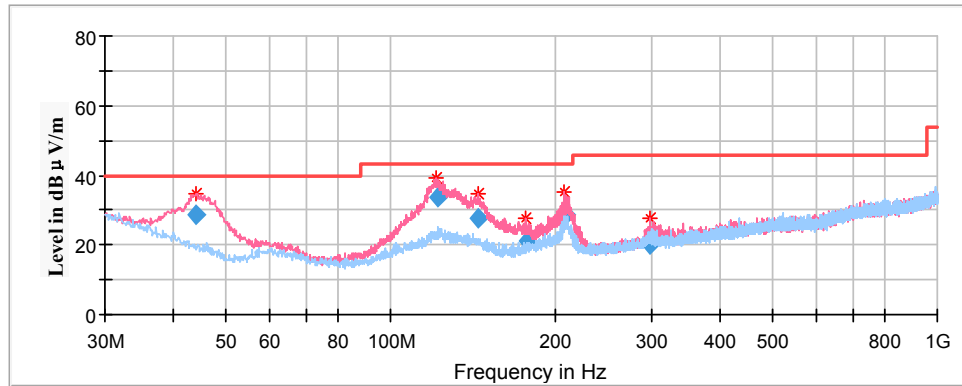

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
44.078000	28.60	100.0	V	84.0	-12.8	40.00	11.40
121.696100	33.72	100.0	V	5.0	-10.9	43.50	9.78
144.396350	27.90	100.0	V	188.0	-11.7	43.50	15.60
177.516950	20.90	100.0	V	224.0	-12.7	43.50	22.60
208.756300	28.50	200.0	V	42.0	-11.6	43.50	15.00
297.892650	20.32	100.0	V	114.0	-10.9	46.00	25.68

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

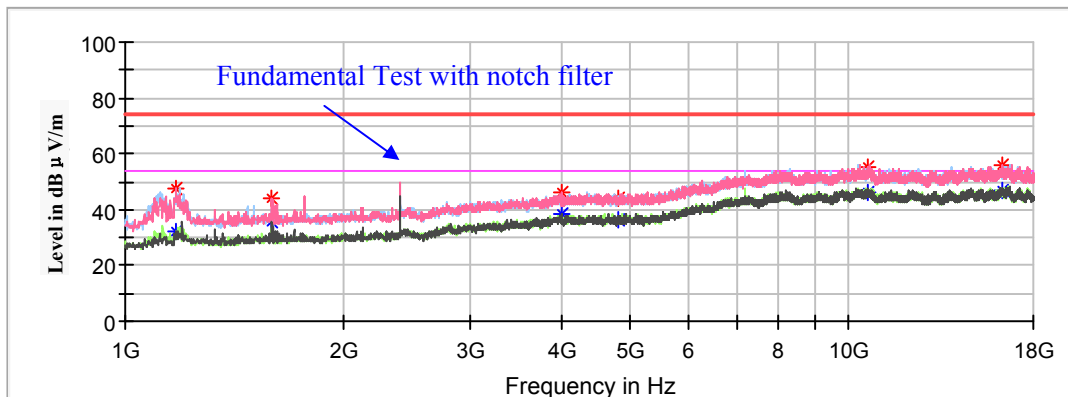

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1173.400000	---	32.03	200.0	H	320.0	-11.4	54.00	21.97
1173.400000	47.36	---	200.0	H	320.0	-11.4	74.00	26.64
1596.700000	44.22	---	200.0	V	231.0	-9.1	74.00	29.78
1596.700000	---	36.00	200.0	V	231.0	-9.1	54.00	18.00
4007.300000	---	38.14	200.0	V	62.0	0.4	54.00	15.86
4007.300000	46.04	---	200.0	V	62.0	0.4	74.00	27.96
4804.000000	---	36.38	200.0	H	151.0	1.0	54.00	17.62
4804.000000	44.24	---	200.0	H	151.0	1.0	74.00	29.76
10652.600000	55.31	---	150.0	V	0.0	12.5	74.00	18.69
10652.600000	---	46.14	150.0	V	0.0	12.5	54.00	7.86
16323.800000	---	46.82	200.0	H	335.0	12.1	54.00	7.18
16323.800000	55.94	---	200.0	H	335.0	12.1	74.00	18.06

Middle Channel: 2442MHz


Full Spectrum

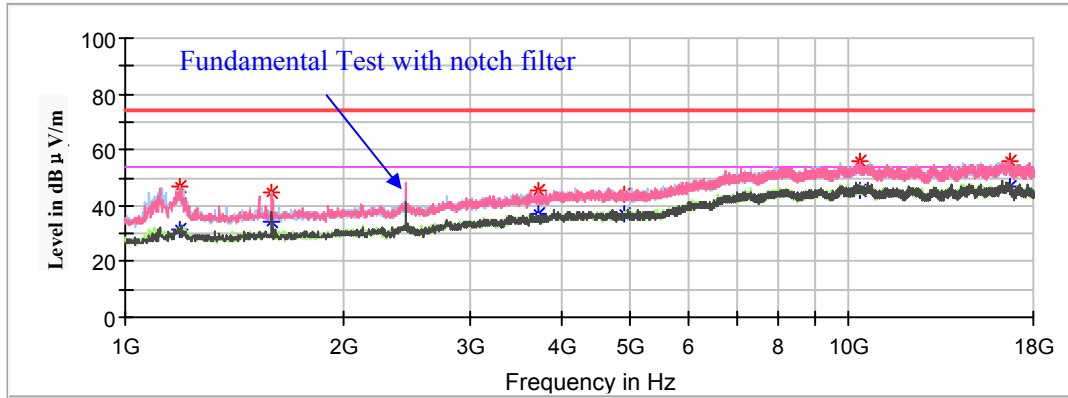

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1190.400000	---	31.33	150.0	H	0.0	-11.3	54.00	22.67
1190.400000	46.96	---	150.0	H	0.0	-11.3	74.00	27.04
1595.000000	44.88	---	150.0	H	199.0	-9.1	74.00	29.12
1595.000000	---	34.08	150.0	H	199.0	-9.1	54.00	19.92
3730.200000	---	36.88	200.0	H	15.0	-0.8	54.00	17.12
3730.200000	45.23	---	200.0	H	15.0	-0.8	74.00	28.77
4884.000000	---	36.84	200.0	H	269.0	1.1	54.00	17.16
4884.000000	44.08	---	200.0	H	269.0	1.1	74.00	29.92
10351.700000	56.00	---	150.0	V	87.0	12.7	74.00	18.00
10351.700000	---	45.32	150.0	V	87.0	12.7	54.00	8.68
16719.900000	---	46.73	150.0	V	334.0	11.9	54.00	7.27
16719.900000	56.01	---	150.0	V	334.0	11.9	74.00	17.99

High Channel: 2480MHz

Full Spectrum

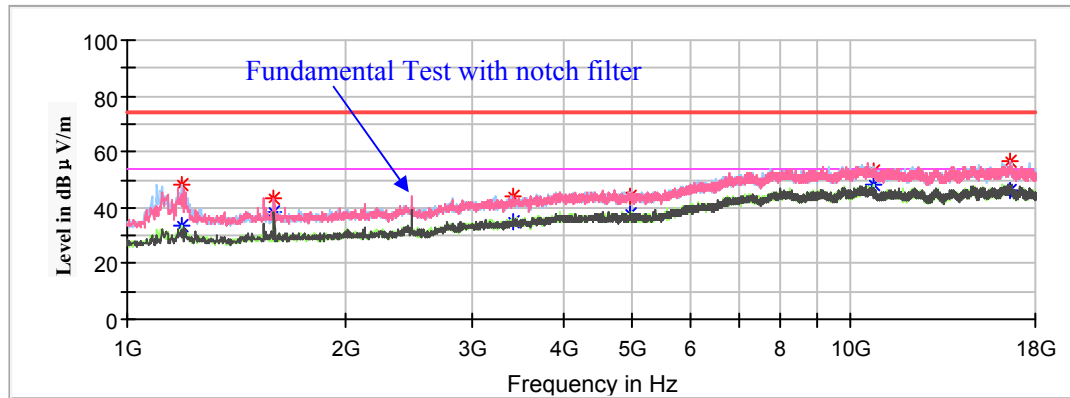


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1190.400000	---	33.23	200.0	H	49.0	-11.3	54.00	20.77
1190.400000	47.94	---	200.0	H	49.0	-11.3	74.00	26.06
1596.700000	43.03	---	200.0	V	231.0	-9.1	74.00	30.97
1596.700000	---	38.43	200.0	V	231.0	-9.1	54.00	15.57
3419.100000	---	35.12	150.0	V	315.0	-2.0	54.00	18.88
3419.100000	44.31	---	150.0	V	315.0	-2.0	74.00	29.69
4960.000000	44.33	---	200.0	V	278.0	1.1	74.00	29.67
4960.000000	---	37.86	200.0	V	278.0	1.1	54.00	16.14
10742.700000	---	48.39	150.0	H	108.0	12.3	54.00	5.61
10742.700000	53.42	---	150.0	H	108.0	12.3	74.00	20.58
16568.600000	56.33	---	200.0	H	191.0	11.9	74.00	17.67
16568.600000	---	46.47	200.0	H	191.0	11.9	54.00	7.53

18GHz-25GHz:


(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle** channel of operation in Y-axis of orientation was recorded)

Horizontal

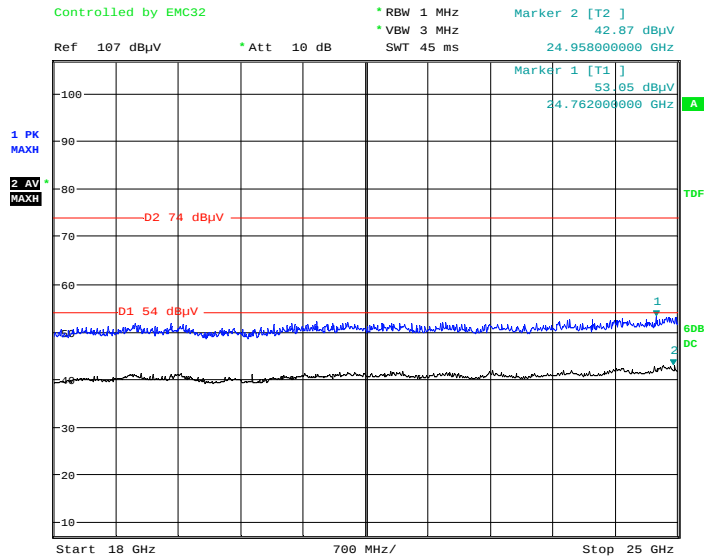

Date: 22.FEB.2021 10:37:43


Vertical

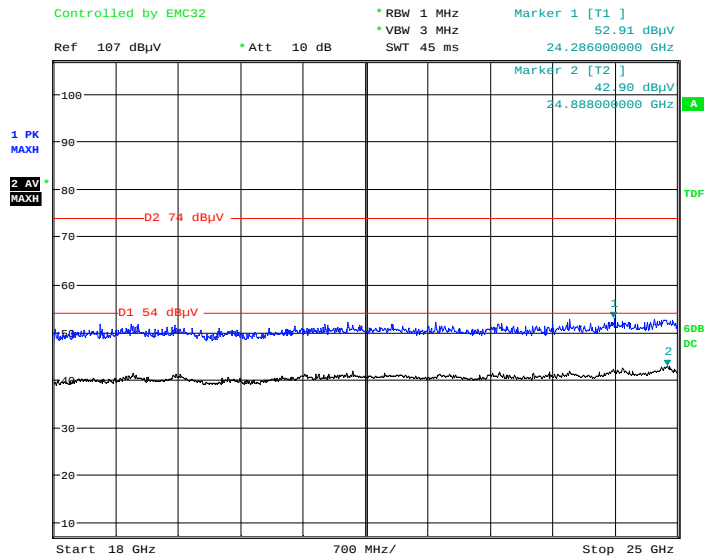

Date: 22.FEB.2021 10:39:12

BLE (1Mbps)**30MHz-1GHz**

(Pre-scan with Low channel, Middle channel, High channel of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

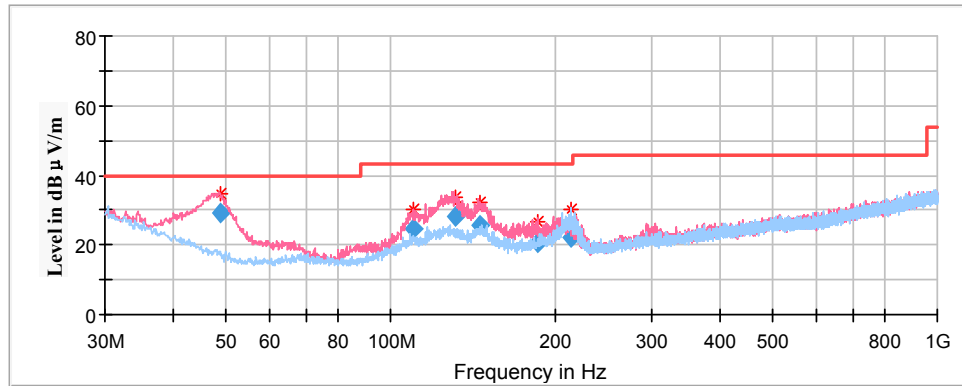

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
48.919950	29.07	100.0	V	53.0	-16.5	40.00	10.93
109.923000	24.58	100.0	V	221.0	-12.7	43.50	18.92
131.208150	27.96	100.0	V	167.0	-10.7	43.50	15.54
145.339650	25.75	100.0	V	221.0	-11.3	43.50	17.75
185.587850	20.87	100.0	V	215.0	-11.8	43.50	22.63
213.138900	22.18	199.0	H	330.0	-12.1	43.50	21.32

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

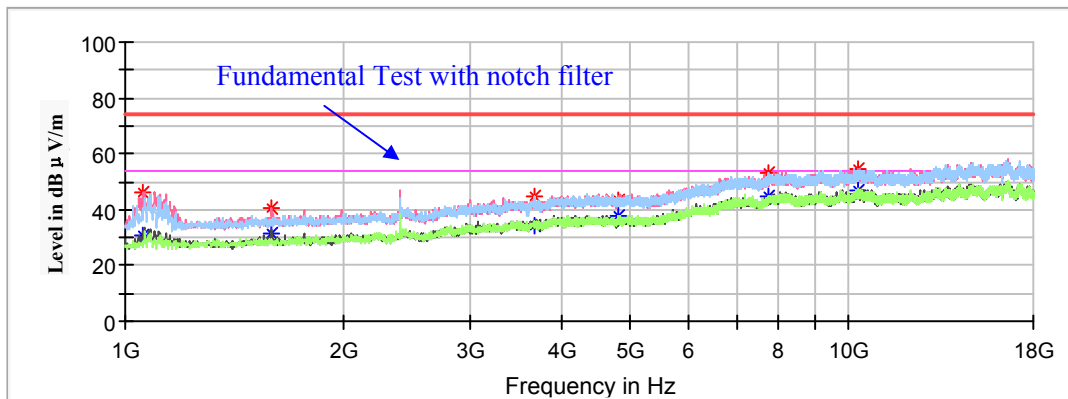

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1057.800000	45.98	---	200.0	V	273.0	-12.1	74.00	28.02
1057.800000	---	30.49	200.0	V	273.0	-12.1	54.00	23.51
1595.000000	40.57	---	150.0	V	305.0	-9.1	74.00	33.43
1595.000000	---	31.28	150.0	V	305.0	-9.1	54.00	22.72
3674.100000	44.57	---	200.0	H	25.0	-1.0	74.00	29.43
3674.100000	---	34.45	200.0	H	25.0	-1.0	54.00	19.55
4804.000000	---	37.63	150.0	V	56.0	1.0	54.00	16.37
4804.000000	43.40	---	150.0	V	56.0	1.0	74.00	30.60
7749.000000	53.45	---	150.0	H	254.0	10.0	74.00	20.55
7749.000000	---	44.60	150.0	H	254.0	10.0	54.00	9.40
10278.600000	---	46.55	150.0	V	6.0	12.5	54.00	7.45
10278.600000	54.76	---	150.0	V	6.0	12.5	74.00	19.24

Middle Channel: 2442MHz


Full Spectrum

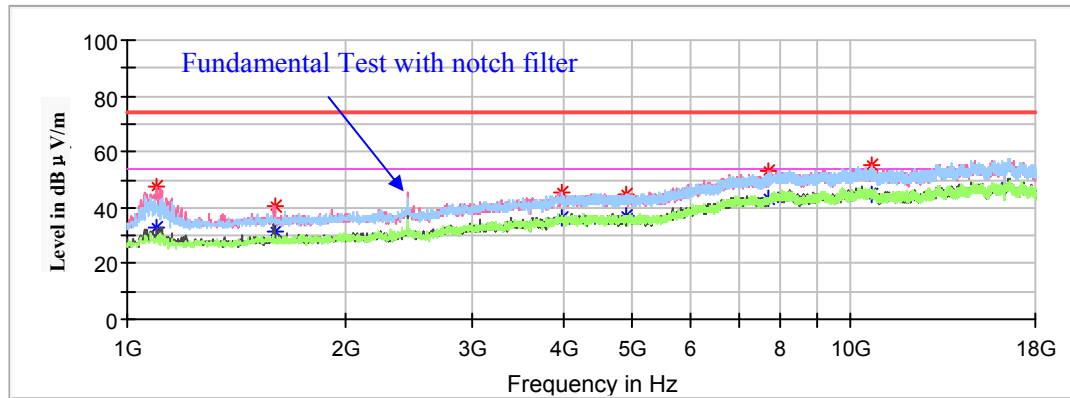

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1100.300000	---	32.75	200.0	V	277.0	-11.9	54.00	21.25
1100.300000	47.39	---	200.0	V	277.0	-11.9	74.00	26.61
1598.400000	---	31.19	200.0	V	277.0	-9.1	54.00	22.81
1598.400000	40.64	---	200.0	V	277.0	-9.1	74.00	33.36
3993.700000	---	36.33	200.0	H	181.0	0.4	54.00	17.67
3993.700000	45.79	---	200.0	H	181.0	0.4	74.00	28.21
4884.000000	---	37.07	150.0	H	132.0	1.1	54.00	16.93
4884.000000	44.97	---	150.0	H	132.0	1.1	74.00	29.03
7708.200000	53.19	---	200.0	V	214.0	9.9	74.00	20.81
7708.200000	---	43.08	200.0	V	214.0	9.9	54.00	10.92
10661.100000	---	44.54	150.0	H	0.0	12.5	54.00	9.46
10661.100000	55.58	---	150.0	H	0.0	12.5	74.00	18.42

High Channel: 2480MHz


Full Spectrum

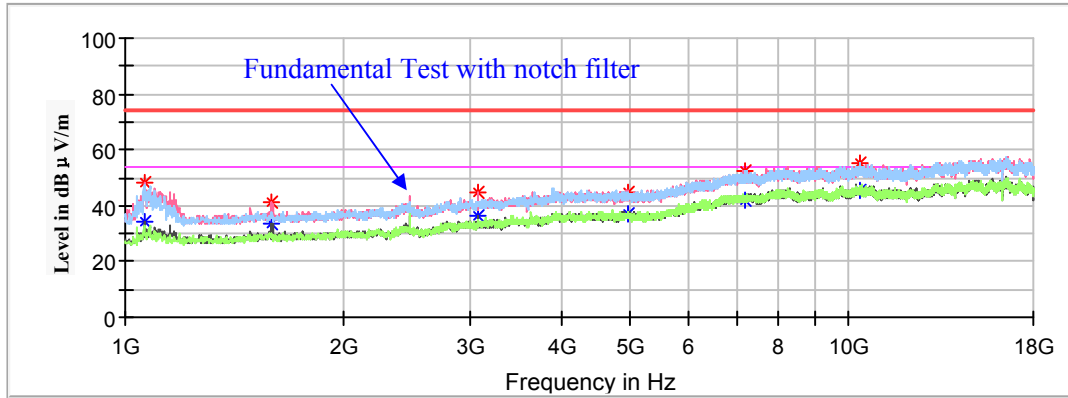


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1062.900000	---	34.07	200.0	V	324.0	-12.1	54.00	19.93
1062.900000	48.31	---	200.0	V	324.0	-12.1	74.00	25.69
1591.600000	---	33.73	200.0	V	253.0	-9.1	54.00	20.27
1591.600000	41.01	---	200.0	V	253.0	-9.1	74.00	32.99
3070.600000	---	36.57	200.0	V	192.0	-3.0	54.00	17.43
3070.600000	44.93	---	200.0	V	192.0	-3.0	74.00	29.07
4960.000000	---	36.77	150.0	H	244.0	1.1	54.00	17.23
4960.000000	44.95	---	150.0	H	244.0	1.1	74.00	29.05
7171.000000	---	42.16	150.0	V	279.0	9.0	54.00	11.84
7171.000000	52.67	---	150.0	V	279.0	9.0	74.00	21.33
10370.400000	---	45.78	200.0	H	131.0	12.7	54.00	8.22
10370.400000	55.20	---	200.0	H	131.0	12.7	74.00	18.80

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle** channel of operation in Y-axis of orientation was recorded)

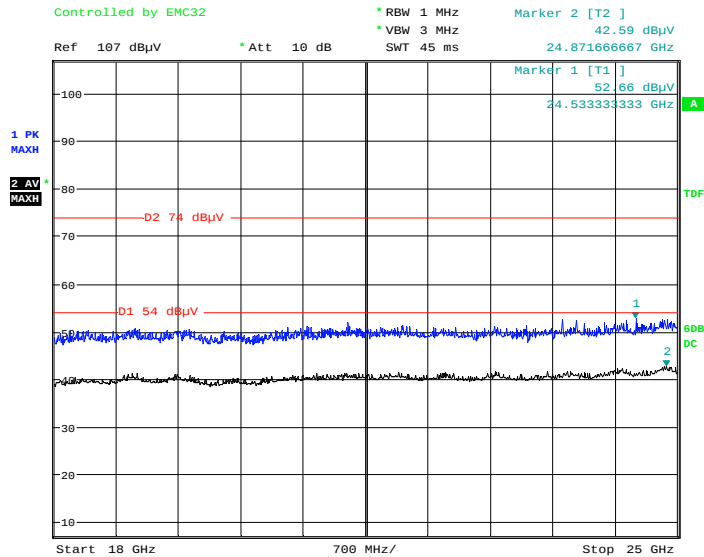Horizontal


Date: 21.JAN.2021 15:35:39

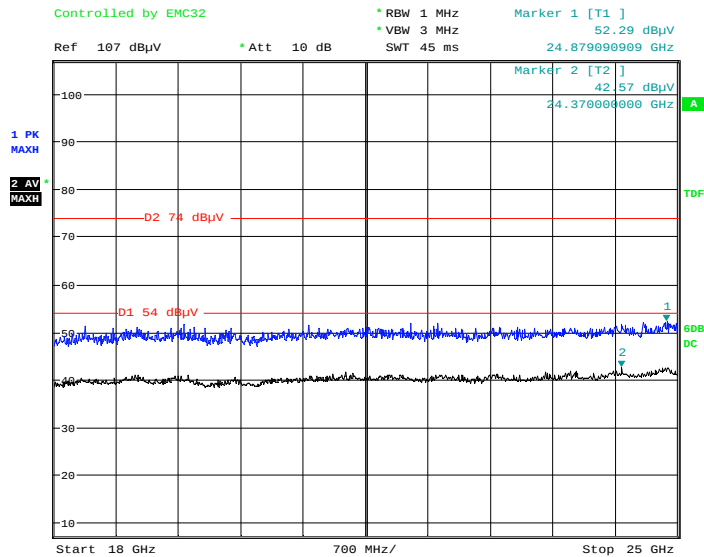Vertical

Date: 21.JAN.2021 15:46:11

BLE (2Mbps)**30MHz-1GHz**

(Pre-scan with Low channel, Middle channel, High channel of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

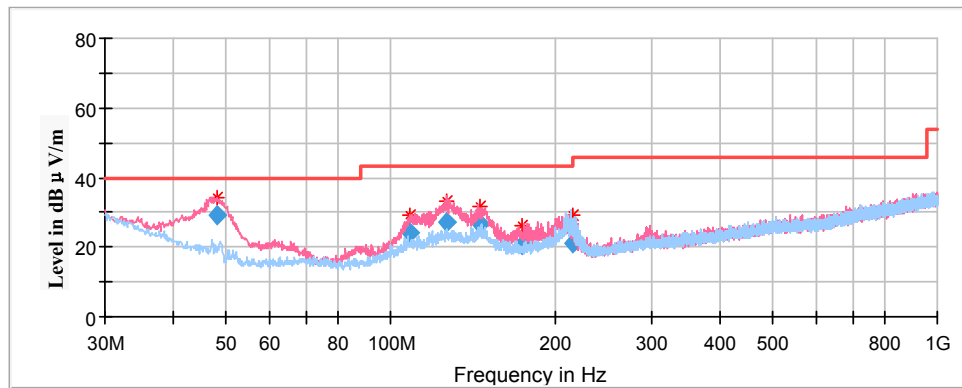

Frequency (MHz)	Corrected Amplitude	Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	QuasiPeak (dBμV/m)	Height (cm)	Polar (H/V)				
48.008250	29.43	100.0	V	173.0	-15.9	40.00	10.57
108.432400	24.39	100.0	V	114.0	-12.9	43.50	19.11
126.672100	27.25	100.0	V	179.0	-10.5	43.50	16.25
145.971000	26.47	100.0	V	173.0	-11.4	43.50	17.03
173.829900	20.55	100.0	V	203.0	-12.6	43.50	22.95
215.093100	21.13	199.0	H	173.0	-12.2	43.50	22.37

1GHz-18GHz:


(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded)

Note:

1. This test was performed with the 2.4-2.5GHz notch filter.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dBμV/m) = Corrected Factor (dB/m) + Reading (dBμV)
 Margin (dB) = Limit (dBμV/m) – Corrected Amplitude (dBμV/m)

Low Channel: 2402MHz


Full Spectrum

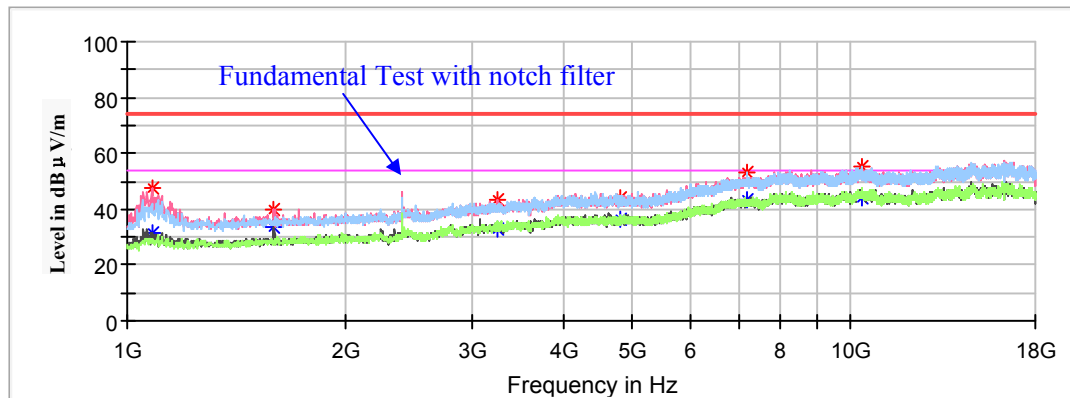

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
1081.600000	---	31.31	200.0	V	338.0	-12.0	54.00	22.69
1081.600000	47.23	---	200.0	V	338.0	-12.0	74.00	26.77
1596.700000	---	33.72	150.0	V	278.0	-9.1	54.00	20.28
1596.700000	39.98	---	150.0	V	278.0	-9.1	74.00	34.02
3250.800000	---	33.06	200.0	V	278.0	-2.5	54.00	20.94
3250.800000	43.11	---	200.0	V	278.0	-2.5	74.00	30.89
4804.000000	---	36.25	150.0	V	356.0	1.0	54.00	17.75
4804.000000	43.96	---	150.0	V	356.0	1.0	74.00	30.04
7206.000000	---	43.48	150.0	V	356.0	1.0	54.00	10.52
7206.000000	52.89	---	150.0	V	356.0	1.0	74.00	21.11
10333.000000	---	43.97	150.0	V	324.0	12.6	54.00	10.03
10333.000000	55.23	---	150.0	V	324.0	12.6	74.00	18.77

Middle Channel: 2442MHz


Full Spectrum

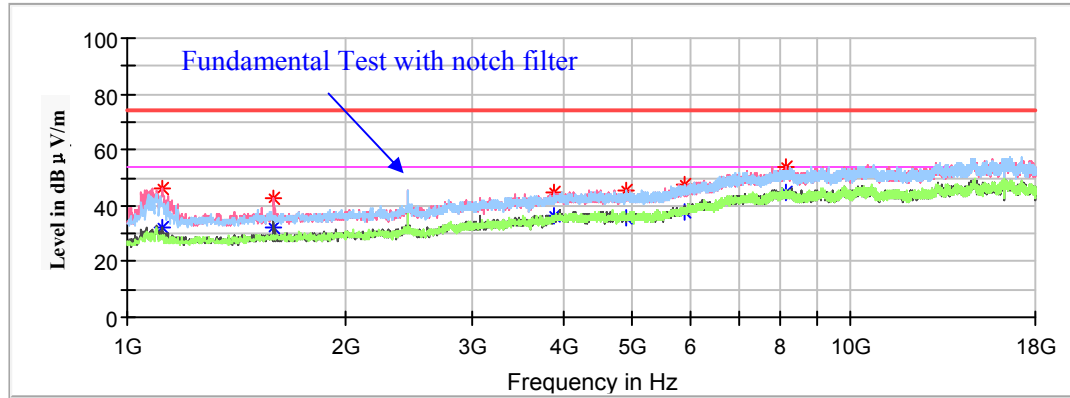

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1117.300000	---	31.94	200.0	V	261.0	-11.8	54.00	22.06
1117.300000	46.16	---	200.0	V	261.0	-11.8	74.00	27.84
1595.000000	42.70	---	200.0	V	292.0	-9.1	74.00	31.30
1596.700000	---	31.99	200.0	V	261.0	-9.1	54.00	22.01
3896.800000	---	36.24	150.0	H	4.0	0.0	54.00	17.76
3896.800000	45.02	---	150.0	H	4.0	0.0	74.00	28.98
4884.000000	---	35.91	150.0	V	348.0	1.1	54.00	18.09
4884.000000	45.44	---	150.0	V	348.0	1.1	74.00	28.56
5911.300000	---	37.79	200.0	H	4.0	4.6	54.00	16.21
5911.300000	47.80	---	200.0	H	4.0	4.6	74.00	26.20
8126.400000	---	44.66	150.0	V	179.0	10.8	54.00	9.34
8126.400000	53.76	---	150.0	V	179.0	10.8	74.00	20.24

High Channel: 2480MHz


Full Spectrum

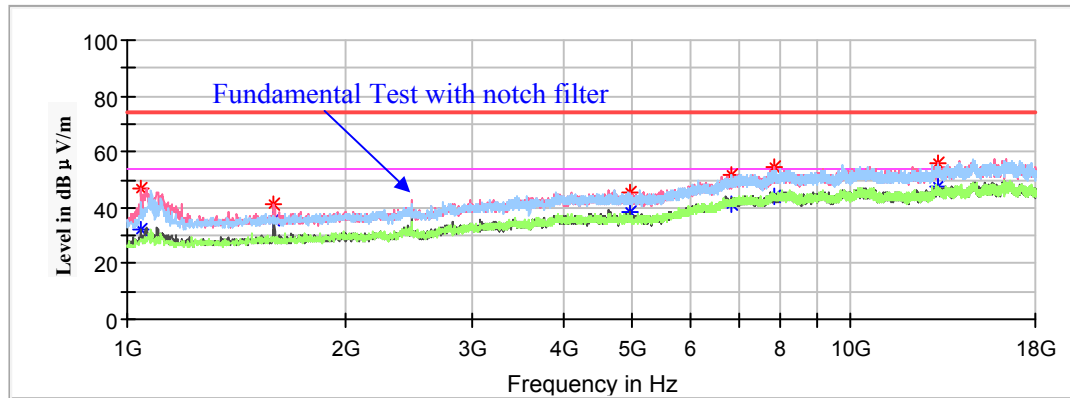


Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dB μ V/m)	Margin (dB)
	MaxPeak (dB μ V/m)	Average (dB μ V/m)	Height (cm)	Polar (H/V)				
1045.900000	46.57	---	200.0	V	238.0	-12.2	74.00	27.43
1045.900000	---	31.84	200.0	V	238.0	-12.2	54.00	22.16
1596.700000	40.93	---	150.0	V	290.0	-9.1	74.00	33.07
1596.700000	---	35.44	150.0	V	290.0	-9.1	54.00	18.56
4960.000000	---	38.44	200.0	V	161.0	1.1	54.00	15.56
4960.000000	45.37	---	200.0	V	161.0	1.1	74.00	28.63
6837.800000	---	41.38	150.0	H	245.0	8.2	54.00	12.62
6837.800000	51.94	---	150.0	H	245.0	8.2	74.00	22.06
7839.100000	54.32	---	200.0	V	320.0	10.3	74.00	19.68
7839.100000	---	43.83	200.0	V	320.0	10.3	54.00	10.17
13173.700000	55.87	---	150.0	V	114.0	13.0	74.00	18.13
13173.700000	---	47.59	150.0	V	114.0	13.0	54.00	6.41

18GHz-25GHz:

(Pre-scan with low, middle and high channels of operation in the X,Y and Z axes of orientation, the worst case **middle channel of operation in Y-axis of orientation** was recorded)

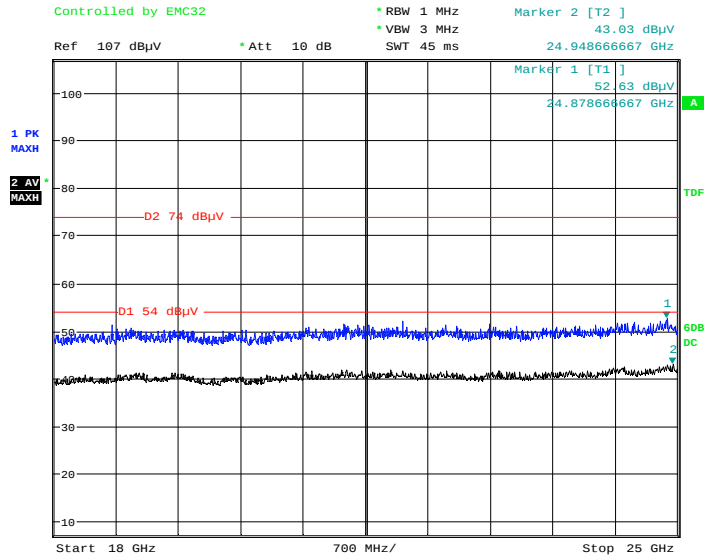Horizontal

Date: 21.JAN.2021 15:57:45

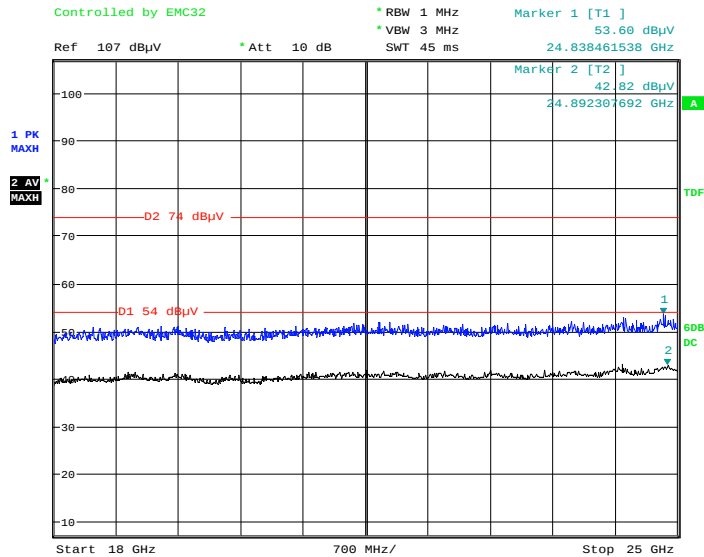Vertical

Date: 21.JAN.2021 16:00:33

Restricted Bands Emissions Test:

(Pre-scan in the X,Y and Z axes of orientation, the worst case **Y-axis of orientation** was recorded.)

Note:

1. The test is performed with a 10dB Attenuator.
2. Corrected Factor (dB/m) = Antenna factor (RX) (dB/m) + Cable Loss (dB) – Amplifier Factor (dB)
 Corrected Amplitude (dB μ V/m) = Corrected Factor (dB/m) + Reading (dB μ V)
 Margin (dB) = Limit (dB μ V/m) – Corrected Amplitude (dB μ V/m)

BLE (125Kbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	52.25	---	150.0	H	151.0	3.8	74.00	21.75
2390.00	---	45.62	150.0	H	151.0	3.8	54.00	8.38
High Channel: 2480MHz								
2483.50	---	46.33	200.0	V	12.0	4.2	54.00	7.67
2483.50	58.73	---	200.0	V	12.0	4.2	74.00	15.27

BLE (500Kbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	51.34	---	200.0	H	147.0	3.8	74.00	22.66
2390.00	---	46.17	200.0	H	147.0	3.8	54.00	7.83
High Channel: 2480MHz								
2483.50	---	47.16	200.0	V	5.0	4.2	54.00	6.84
2483.50	58.00	---	200.0	V	5.0	4.2	74.00	16.00

BLE (1Mbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	50.43	---	200.0	H	81.0	3.8	74.00	23.57
2390.00	---	46.28	200.0	H	81.0	3.8	54.00	7.72
High Channel: 2480MHz								
2483.50	51.21	---	150.0	V	357.0	4.1	74.00	22.79
2483.50	---	45.50	150.0	V	357.0	4.1	54.00	8.50

BLE (2Mbps)

Frequency (MHz)	Corrected Amplitude		Rx Antenna		Turntable Degree	Corrected Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
	MaxPeak (dBμV/m)	Average (dBμV/m)	Height (cm)	Polar (H/V)				
Low Channel: 2402MHz								
2390.00	50.59	---	200.0	V	326.0	3.8	74.00	23.41
2390.00	---	44.61	200.0	V	326.0	3.8	54.00	9.39
High Channel: 2480MHz								
2483.50	50.97	---	150.0	V	284.0	4.1	74.00	23.03
2483.50	---	45.99	150.0	V	284.0	4.1	54.00	8.01

BLE (125Kbps)

Ref Lvl 20 dBm
 Marker 1 [T1] -49.69 dBm
 RBW 100 kHz
 VBW 300 kHz
 RF Att 20 dB
 6.3529058 GHz
 SWT 6.4 s
 Unit dBm

11 dB Offset
 ▼1 [T1] -49.69 dBm
 6.3529058 GHz

D1 6.73 dBm
 D2 -13.27 dBm
 1

Start 30 MHz
 2.497 GHz/
 Stop 25 GHz


Date: 22.FEB.2021 17:38:13

Ref Lvl 20 dBm RBW 100 kHz RF Att 20 dB
 -49.42 dBm VBW 300 kHz
 6.53521042 GHz SWT 6.4 s Unit dBm


11 dB Offset
 -49.42 dBm
 6.53521042 GHz
 -D1 7.49 dBm
 -12.51 dBm
 1MAX
 1
 Start 30 MHz 2.497 GHz/ Stop 25 GHz
 Date: 22.FEB.2021 18:09:48

The screenshot displays a spectrum analyzer interface. At the top, various parameters are listed: RBW is 100 kHz, RF Att is 20 dB, Ref Lvl is 20 dBm, Marker 1 [T1] is -49.51 dBm, VBW is 300 kHz, SWT is 6.4 s, and Unit is dBm. The main plot area shows a blue trace representing the signal spectrum. A prominent peak is visible at 6.63529058 GHz, reaching a level of approximately 11 dB. Two horizontal red reference lines are present: D1 at 6.95 dBm and D2 at -13.05 dBm. A green label 'IMAX' points to the peak. A black arrow labeled '1' points to a small feature on the baseline. The x-axis ranges from Start 30 MHz to Stop 25 GHz, with a center frequency of 2.497 GHz/. The y-axis ranges from -80 to 20 dB.


Low Channel: 2402MHz

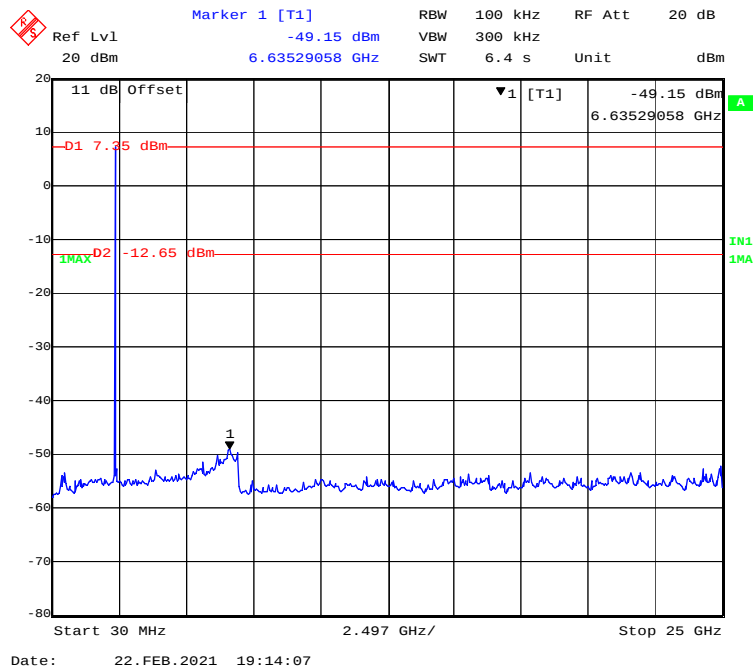

Middle Channel: 2442MHz

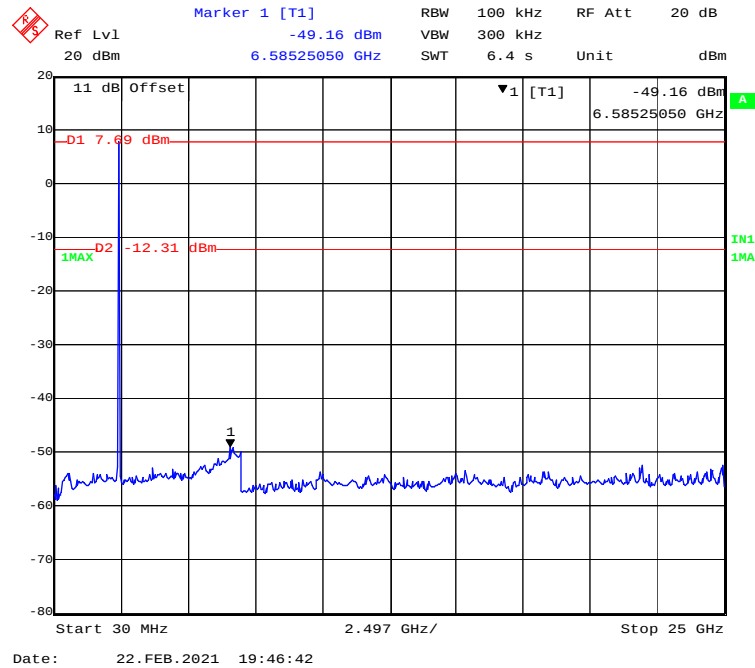


High Channel: 2480MHz

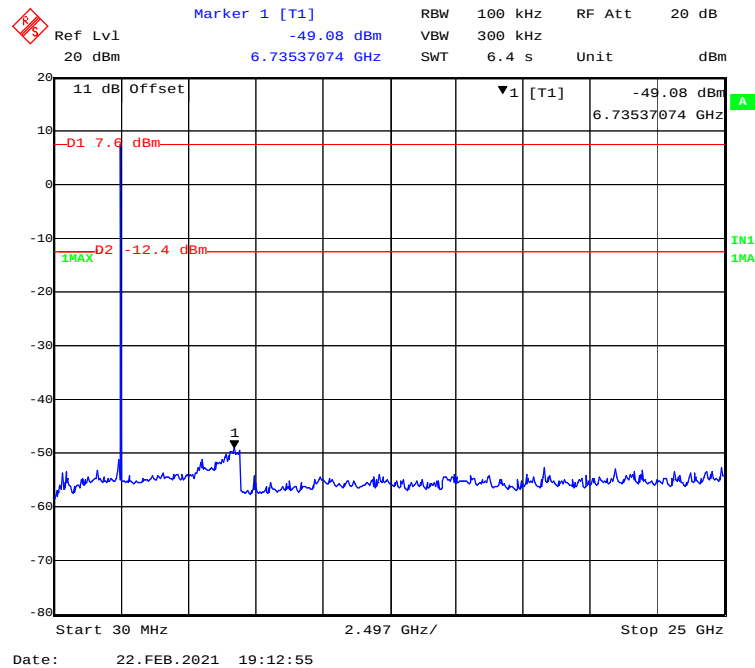


BLE (1Mbps)


Low Channel: 2402MHz

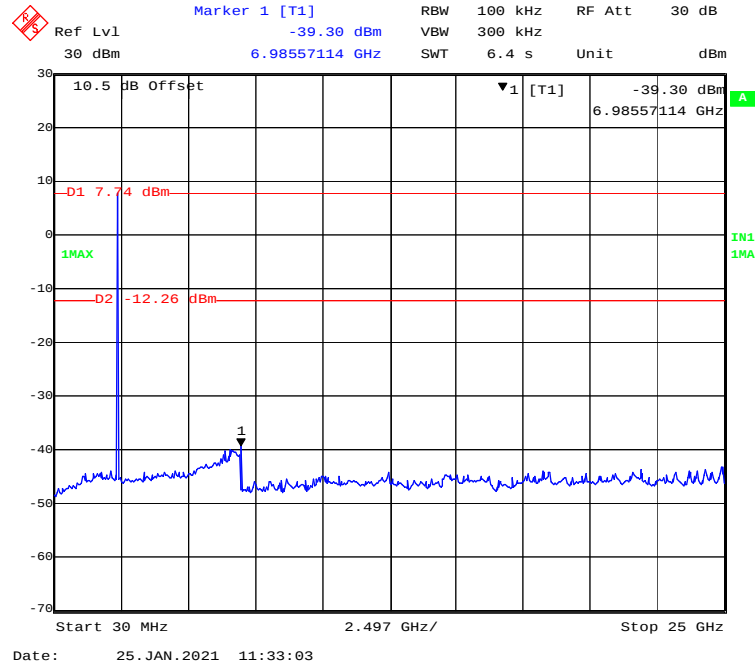

Middle Channel: 2442MHz

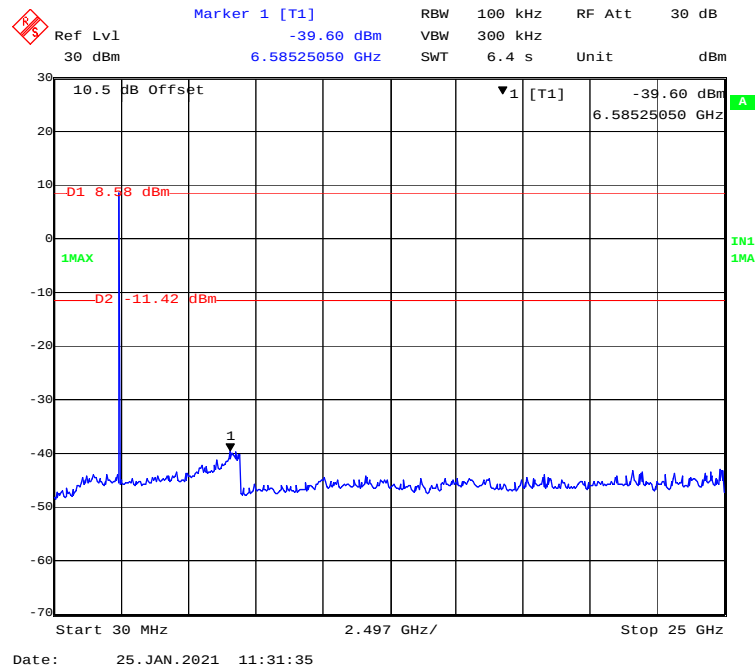


High Channel: 2480MHz

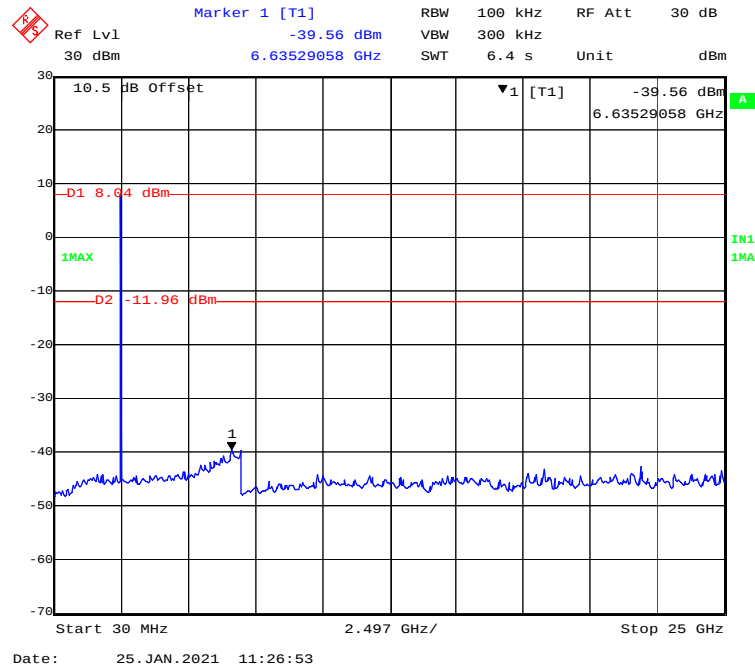


BLE (2Mbps)


Low Channel: 2402MHz

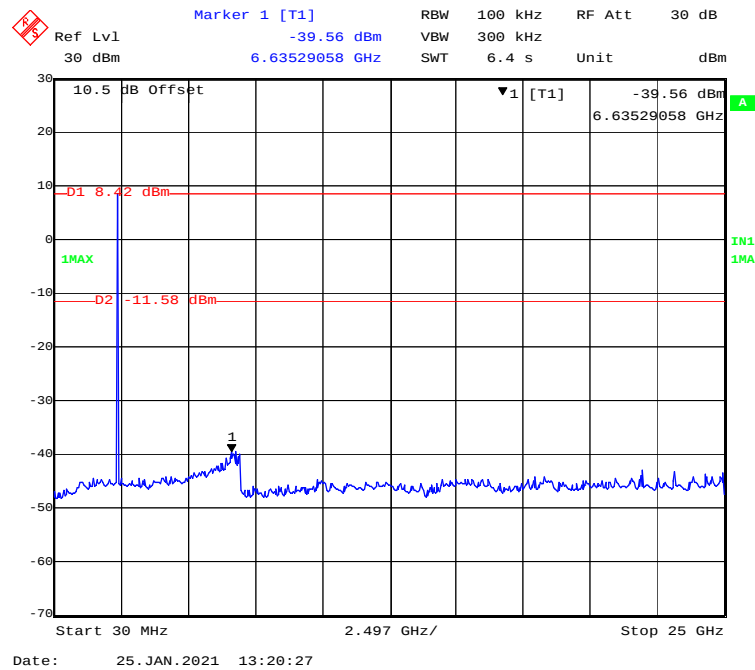

Middle Channel: 2442MHz

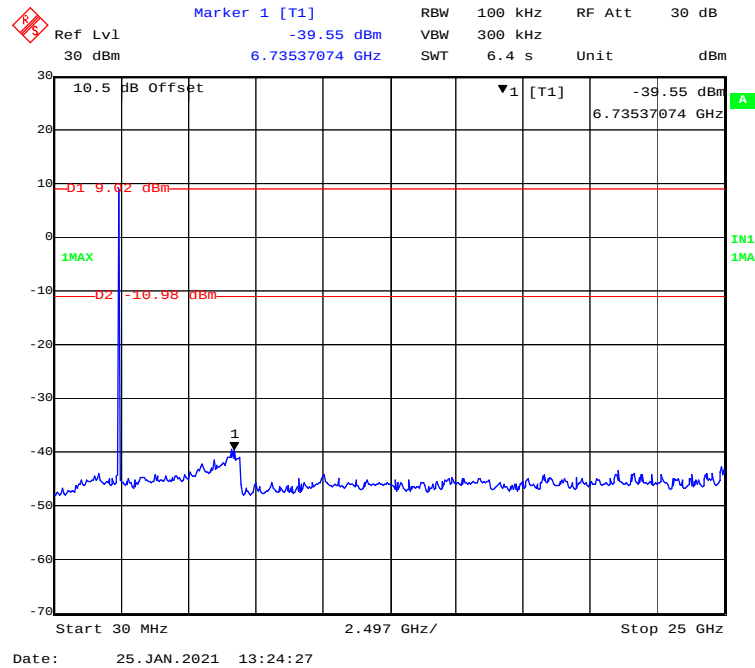

High Channel: 2480MHz

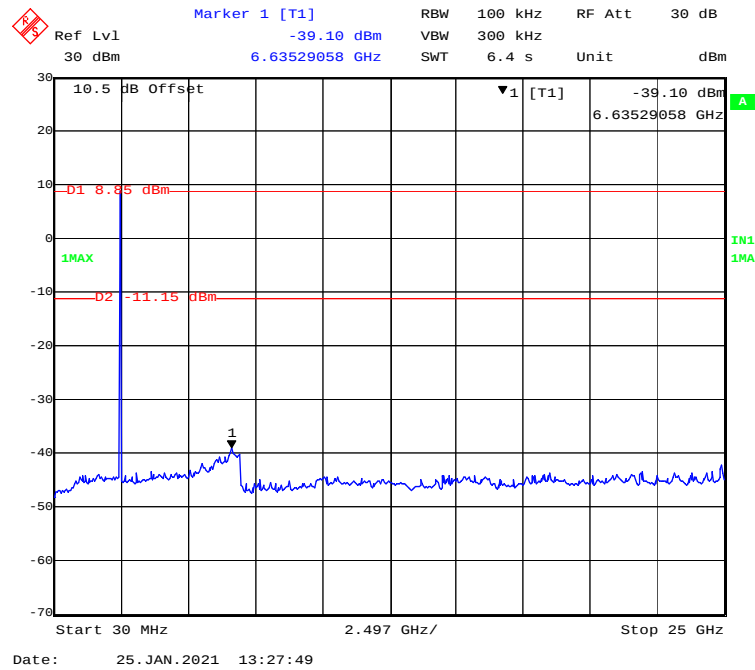

FCC §15.247(a) (2) – 6 dB EMISSION BANDWIDTH


Applicable Standard

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.8.1

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 * \text{RBW}$.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



Test Data

Environmental Conditions

Temperature:	25.2-26 °C
Relative Humidity:	48-51 %
ATM Pressure:	101.2-102.6kPa


The testing was performed by Chao Gao from 2021-01-25 to 2021-02-22.

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (125Kbps)


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.739	≥ 0.5
Middle	2442	0.733	≥ 0.5
High	2480	0.727	≥ 0.5

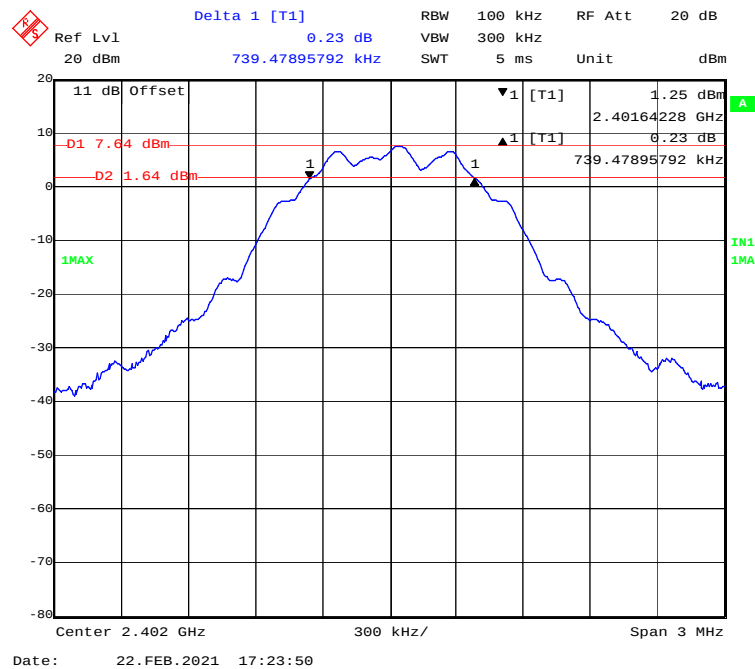Low Channel: 2402MHz

Middle Channel: 2442MHz

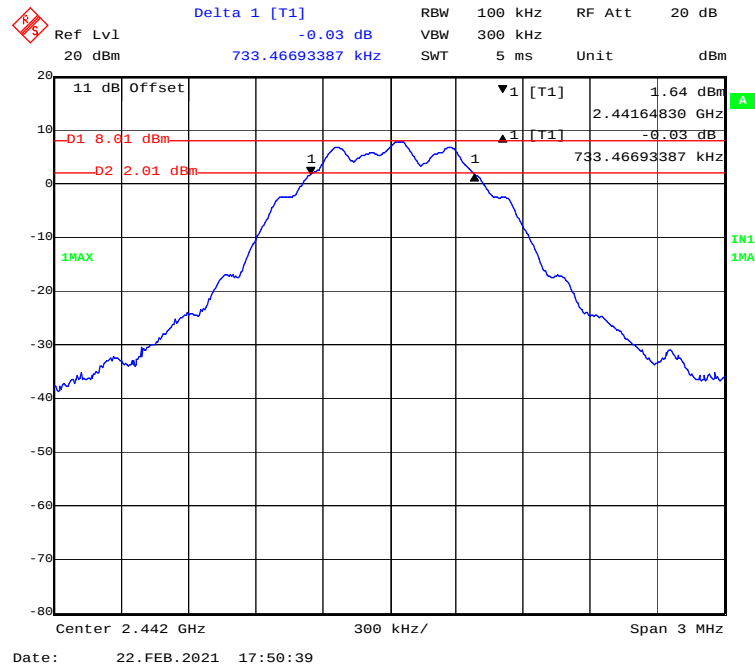

High Channel: 2480MHz

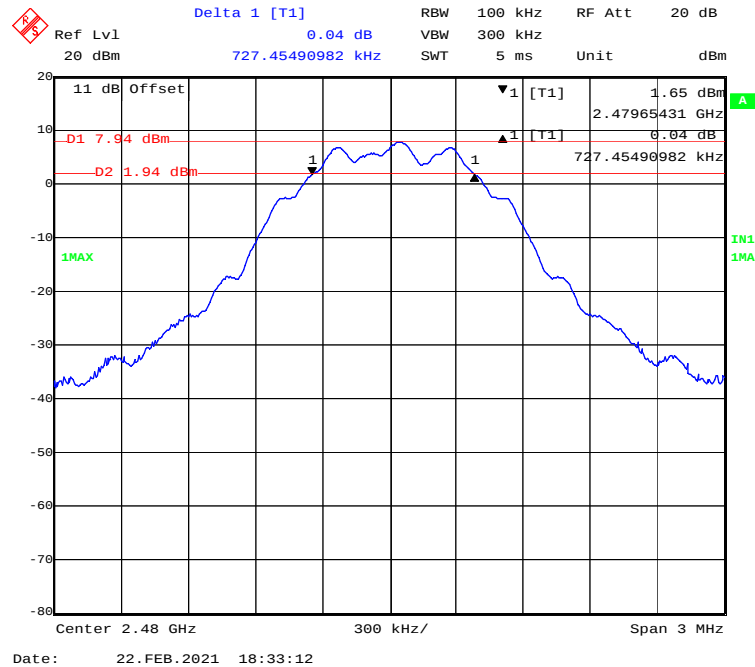

Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.758	≥0.5
Middle	2442	0.752	≥0.5
High	2480	0.752	≥0.5

Delta 1 [T1] 0.28 dB

RBW 100 kHz RF Att 20 dB

Ref Lvl 20 dBm 757.51503006 kHz Unit dBm

11 dB Offset

D1 8.87 dBm

D2 2.87 dBm

1 [T1] 2.27 dBm

2.40163627 GHz

0.28 dB

1 [T1]

1

1

1MAX


IN1

1MA


Center 2.402 GHz 300 kHz/ Span 3 MHz

Date: 22. FEB. 2021 19:33:57

Middle Channel: 2442MHz

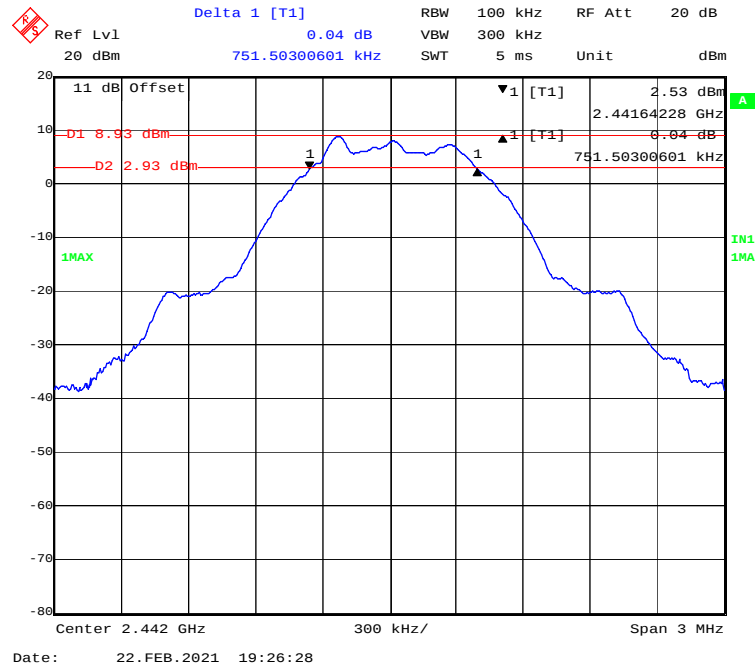


High Channel: 2480MHz

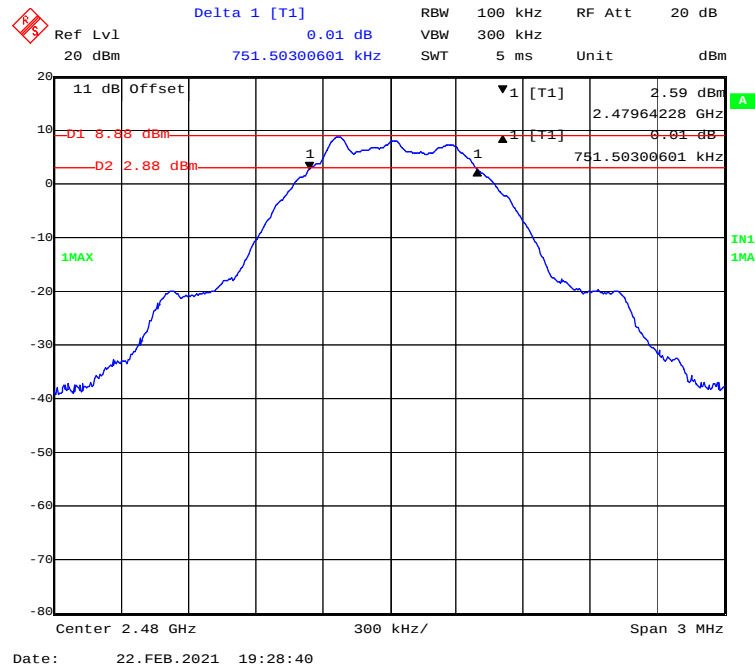


BLE (1Mbps)


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	0.727	≥ 0.5
Middle	2442	0.721	≥ 0.5
High	2480	0.721	≥ 0.5

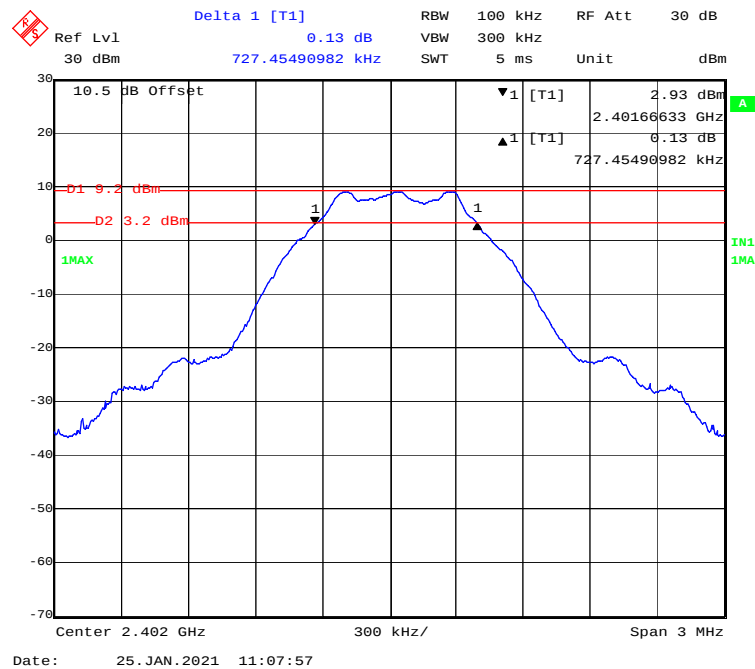Low Channel: 2402MHz

Middle Channel: 2442MHz

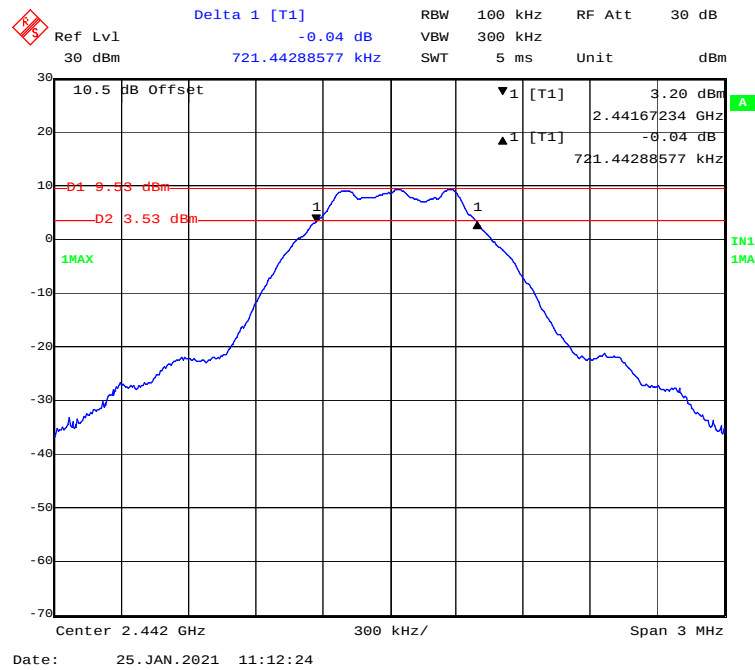


High Channel: 2480MHz

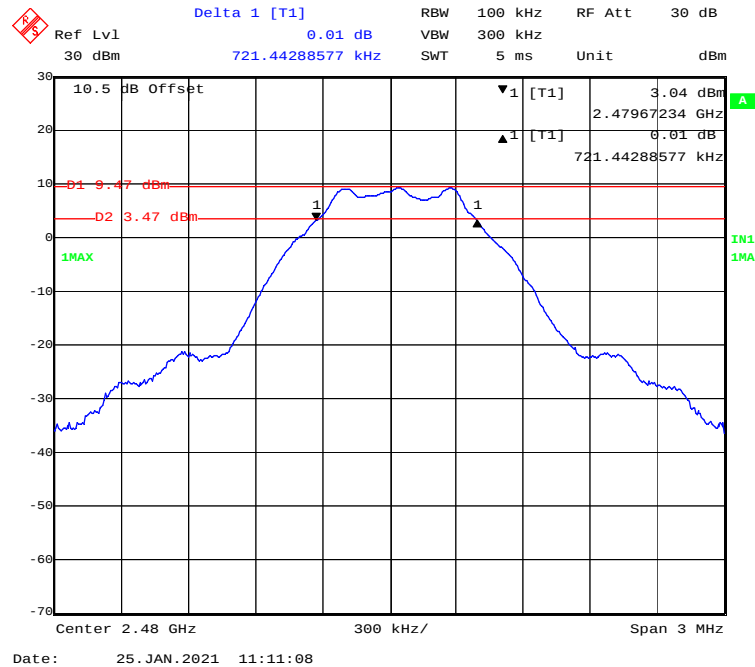


BLE (2Mbps)


Channel	Frequency (MHz)	6 dB Emission Bandwidth (MHz)	Limit (MHz)
Low	2402	1.152	≥ 0.5
Middle	2442	1.152	≥ 0.5
High	2480	1.152	≥ 0.5

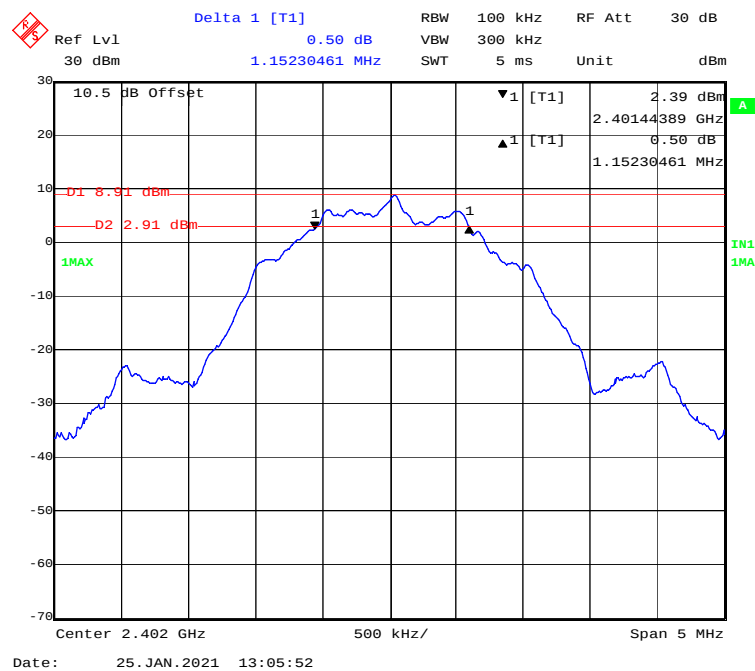Low Channel: 2402MHz

Middle Channel: 2442MHz

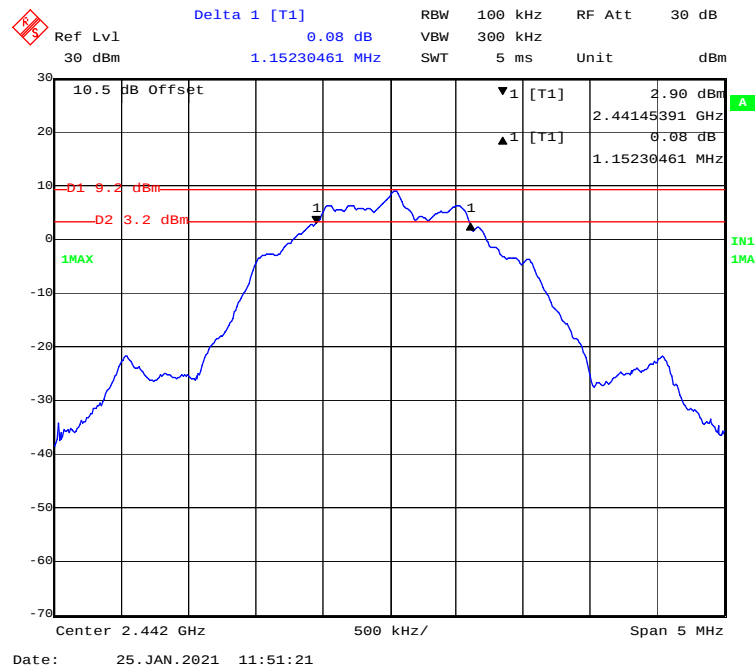

High Channel: 2480MHz

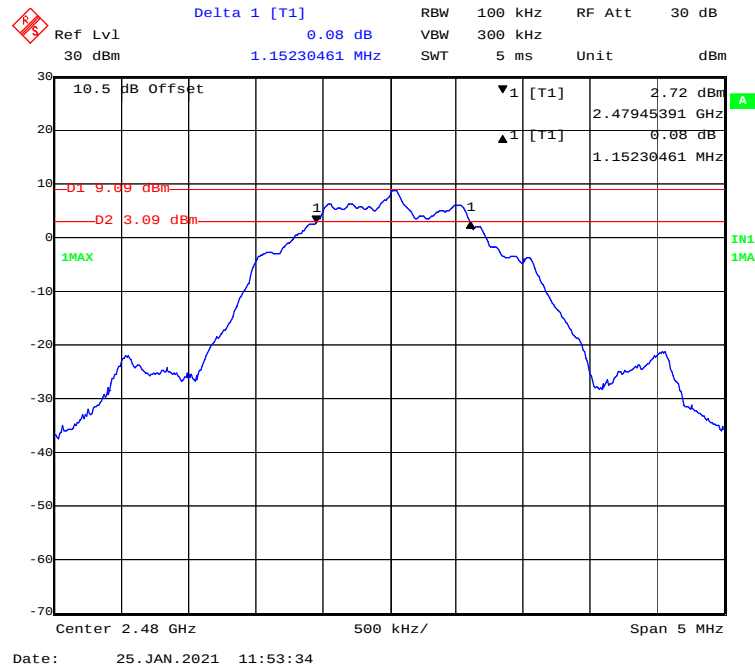

FCC §15.247(b) (3) - MAXIMUM CONDUCTED OUTPUT POWER

Applicable Standard

According to FCC §15.247(b) (3), for systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.9.1.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq 3 * \text{RBW}$.
3. Set span $\geq 3 * \text{RBW}$
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.



Test Data**Environmental Conditions**

Temperature:	25.2 -25.5°C
Relative Humidity:	51-52 %
ATM Pressure:	101.2 -102.1kPa


The testing was performed by Chao Gao from 2021-01-25 to 2021-02-22.

Test Result: Compliant.


EUT operation mode: Transmitting

BLE (125Kbps)


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	9.59	30	Pass
Middle	2442	9.90	30	Pass
High	2480	9.77	30	Pass

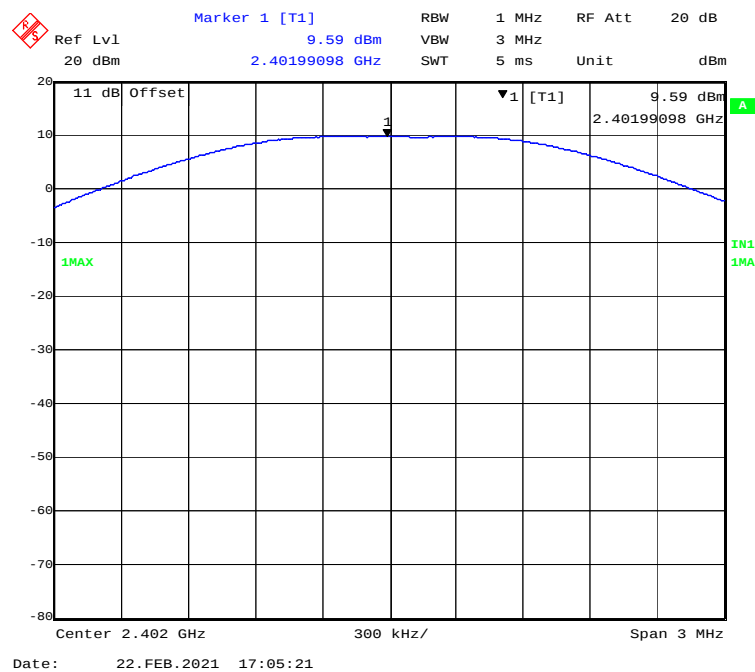Low Channel: 2402MHz

Middle Channel: 2442MHz

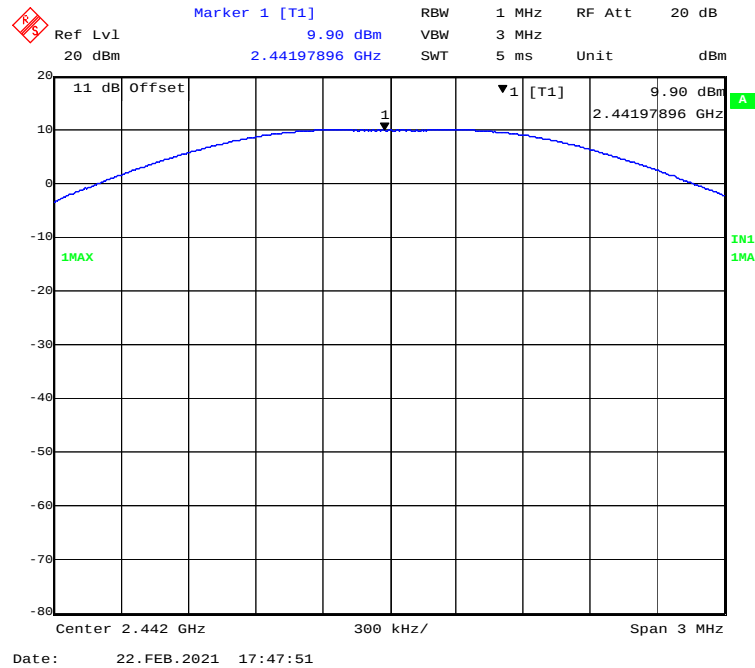


High Channel: 2480MHz

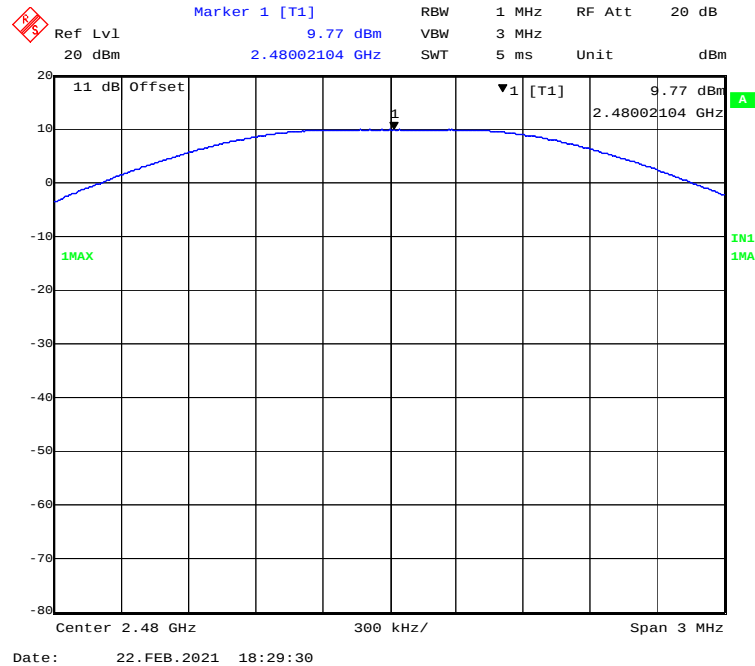


BLE (500Kbps)


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	9.33	30	Pass
Middle	2442	9.74	30	Pass
High	2480	9.50	30	Pass

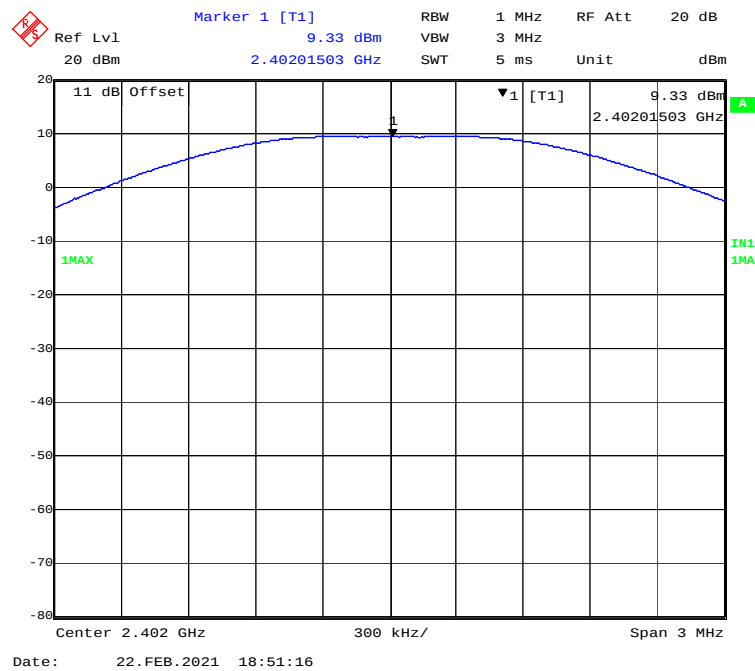Low Channel: 2402MHz

Middle Channel: 2442MHz

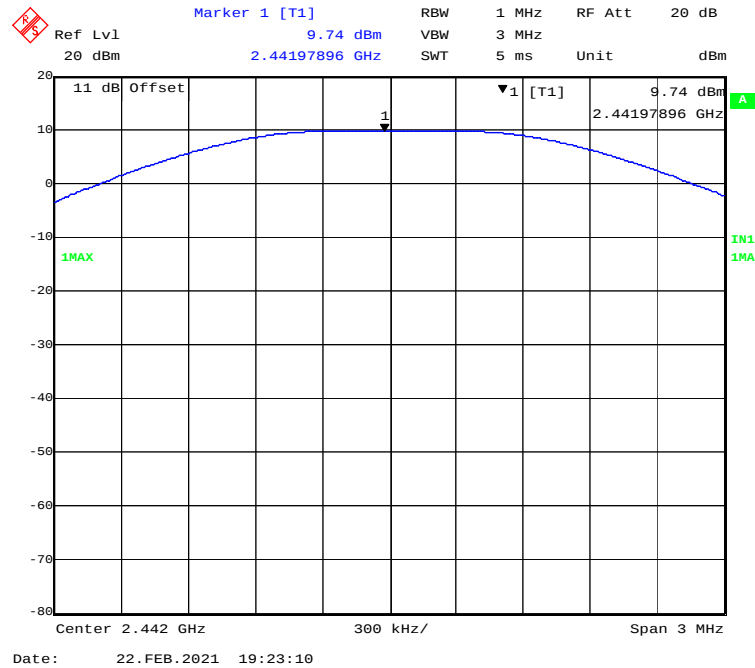


High Channel: 2480MHz

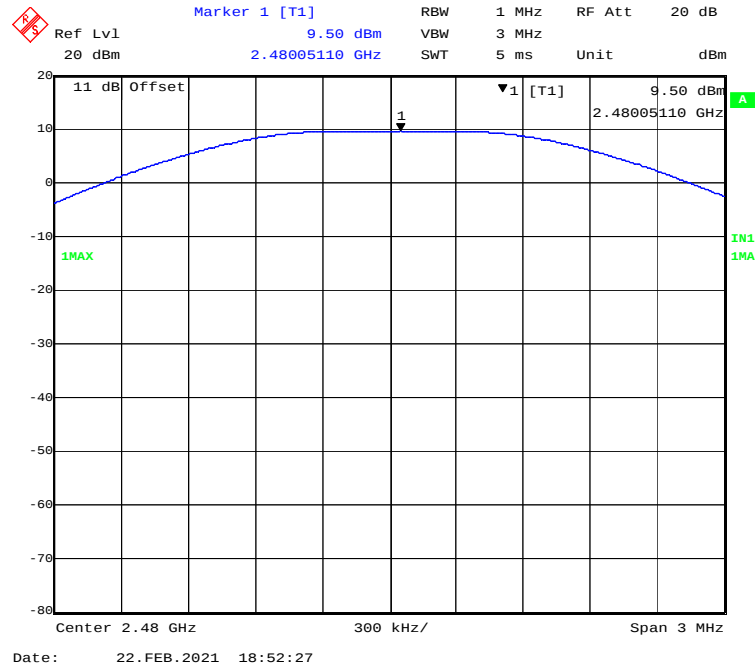


BLE (1Mbps)


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	9.79	30	Pass
Middle	2442	9.93	30	Pass
High	2480	9.92	30	Pass

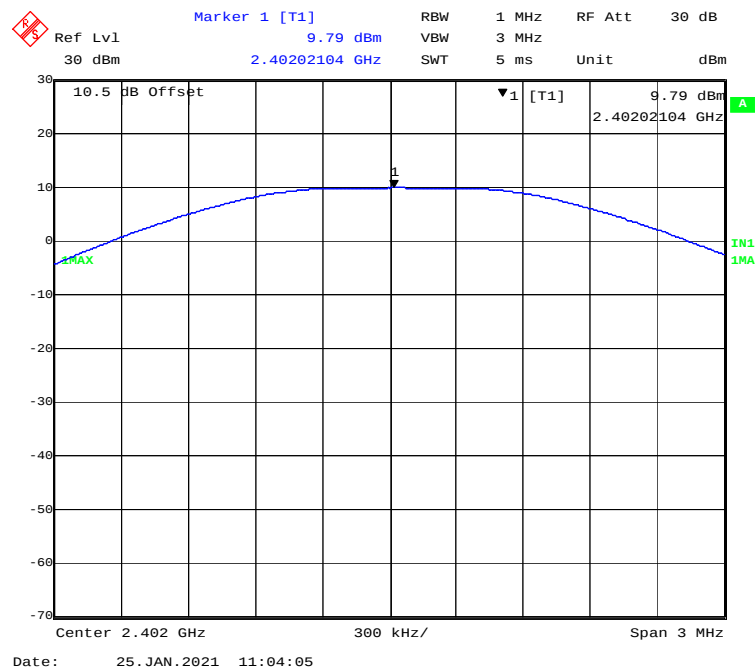Low Channel: 2402MHz

Middle Channel: 2442MHz

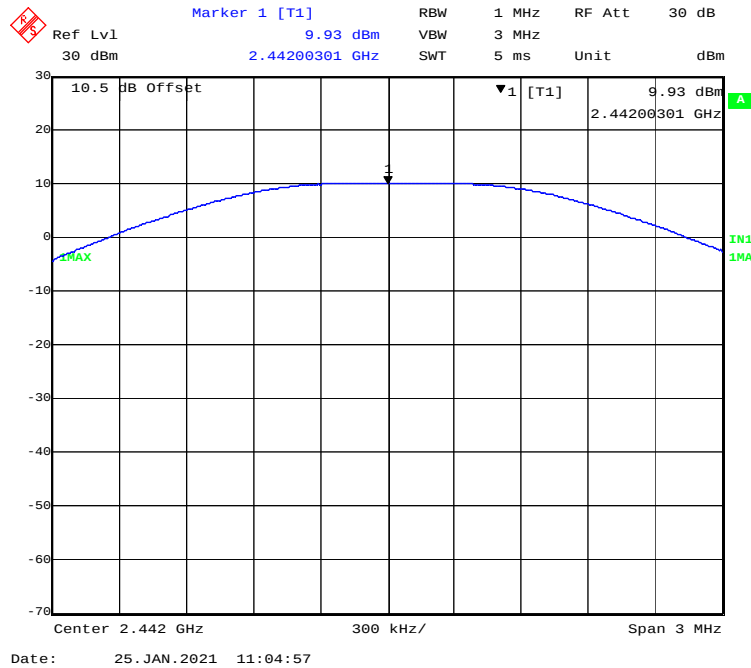


High Channel: 2480MHz

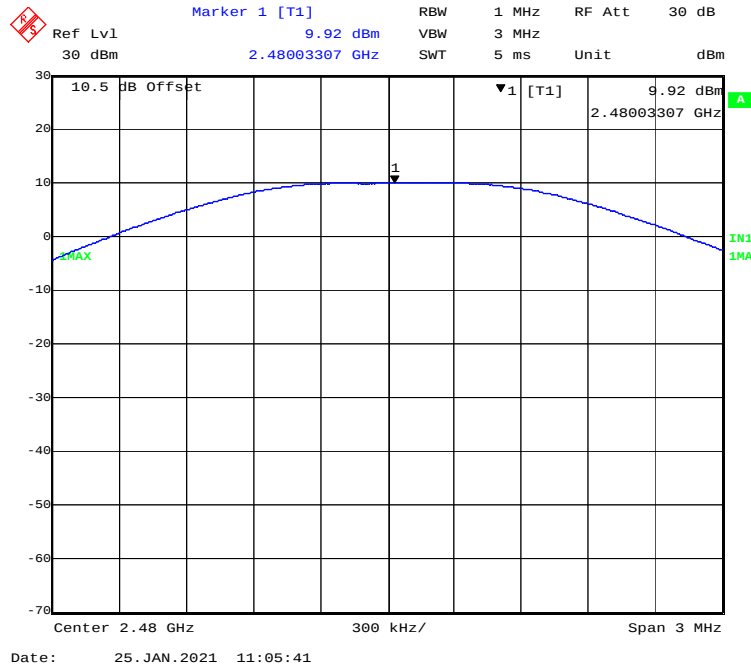


BLE (2Mbps)


Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)	Limit (dBm)	Result
Low	2402	9.43	30	Pass
Middle	2442	9.69	30	Pass
High	2480	9.56	30	Pass

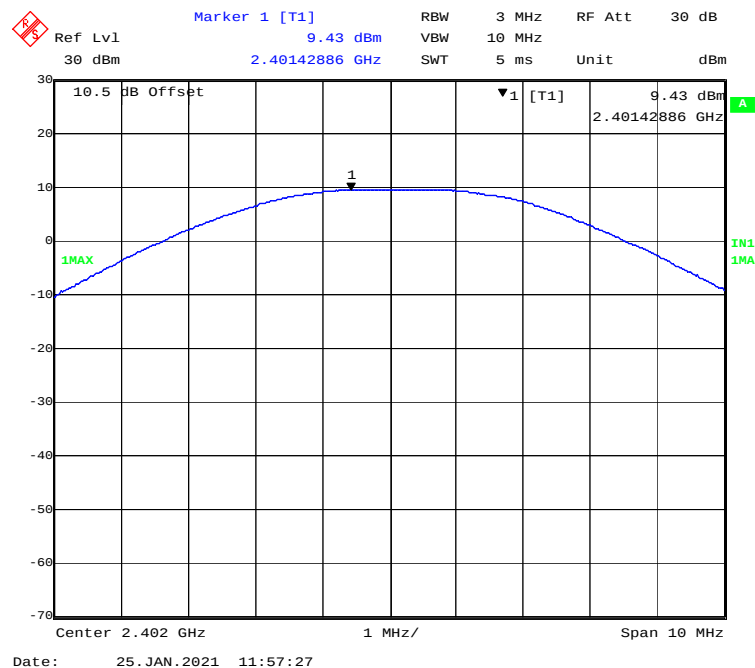Low Channel: 2402MHz

Middle Channel: 2442MHz

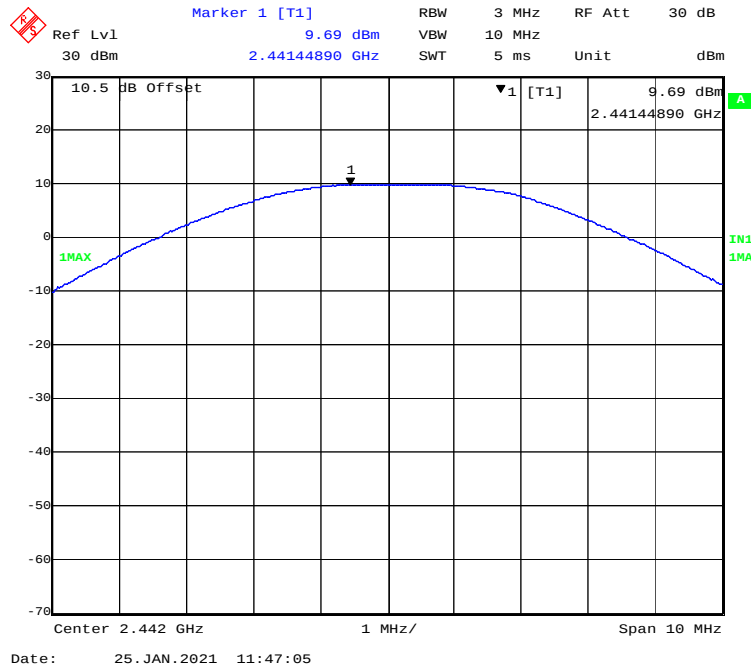

High Channel: 2480MHz

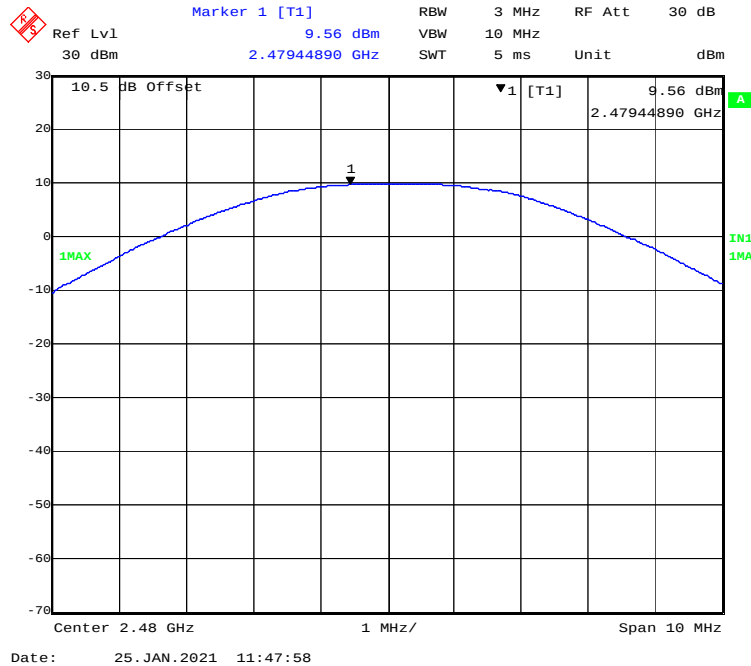

FCC §15.247(d) – BAND EDGE

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

According to ANSI C63.10-2013 sub-clause 6.10.

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data

Environmental Conditions

Temperature:	25.2 -26°C
Relative Humidity:	51-53 %
ATM Pressure:	101.2-103 kPa


The testing was performed by Chao Gao from 2021-01-25 to 2021-02-22.

Test Result: Compliant.


EUT operation mode: Transmitting

(125Kbps)

Left Side

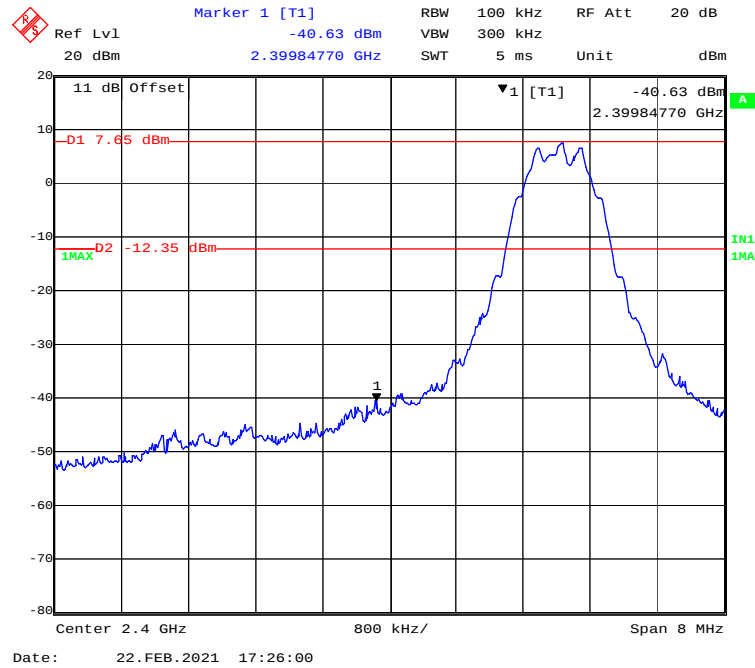


Right Side

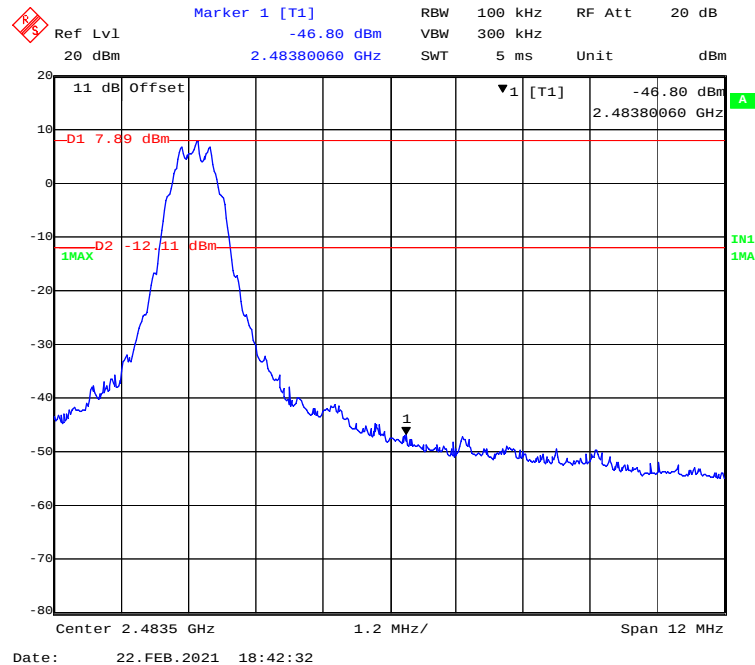


(500Kbps)

Left Side

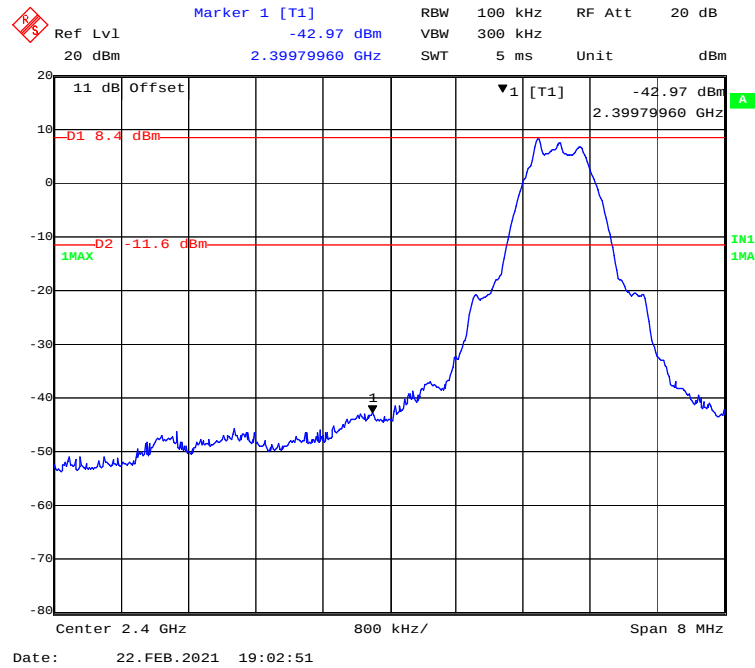

Right Side

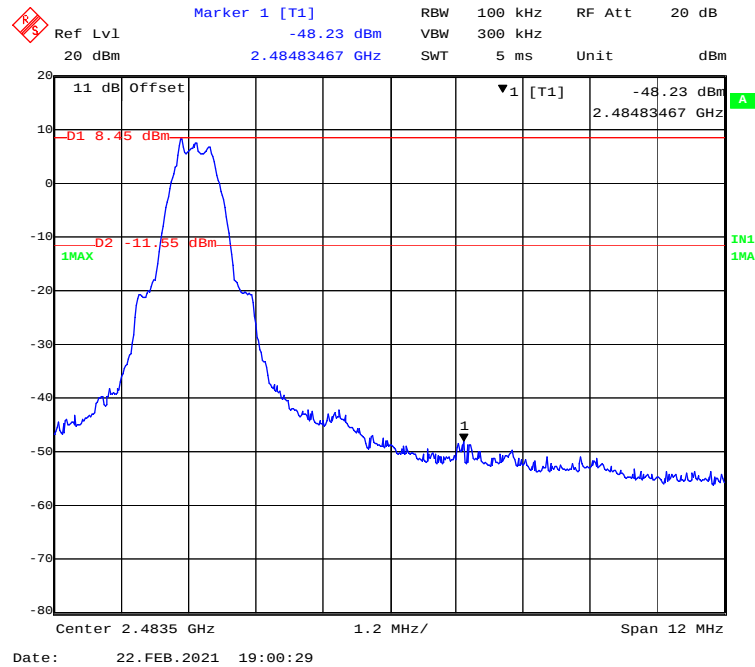

Left Side



Left Side



FCC §15.247(e) - POWER SPECTRAL DENSITY

Applicable Standard

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

Test Procedure

According to ANSI C63.10-2013 sub-clause 11.10.2

The following procedure shall be used if maximum peak conducted output power was used to determine compliance, and it is optional if the maximum conducted (average) output power was used to determine compliance:

1. Set the RBW to: $3\text{kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
2. Set the VBW $\geq 3 * \text{RBW}$.
3. Set the span to 1.5 times the DTS bandwidth.
4. Detector = peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use the peak marker function to determine the maximum amplitude level within the RBW.
9. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Test Data

Environmental Conditions

Temperature:	25.2 -26°C
Relative Humidity:	51 -53%
ATM Pressure:	101.2 -102.5kPa

The testing was performed by Chao Gao from 2021-01-25 to 2021-02-22.


Test Result: Compliant.

EUT operation mode: Transmitting


BLE (125Kbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	3.58	≤ 8
Middle	2442	4.04	≤ 8
High	2480	3.99	≤ 8


Low Channel: 2402MHz

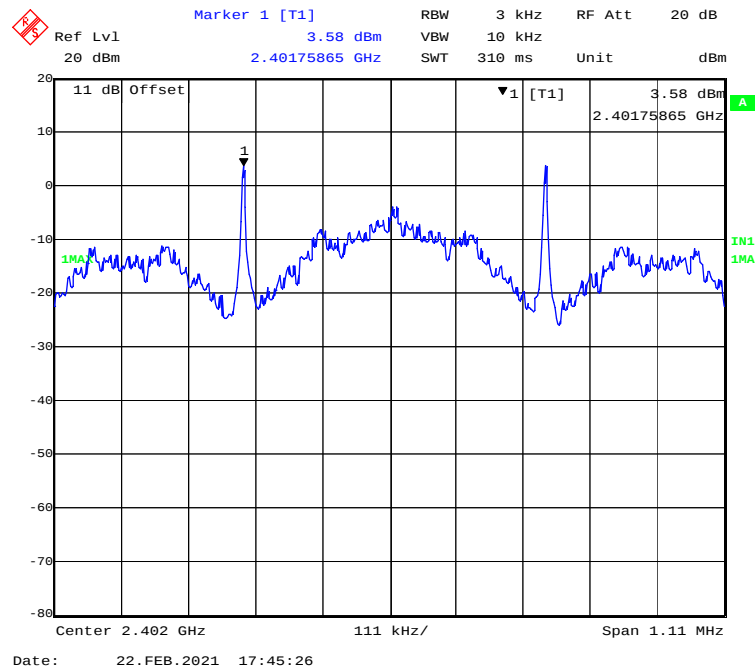

Middle Channel: 2442MHz

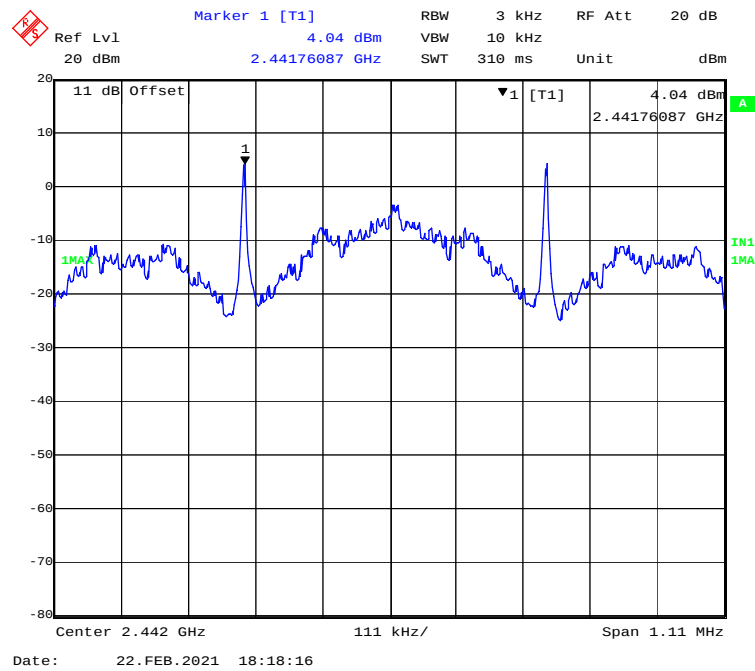


High Channel: 2480MHz

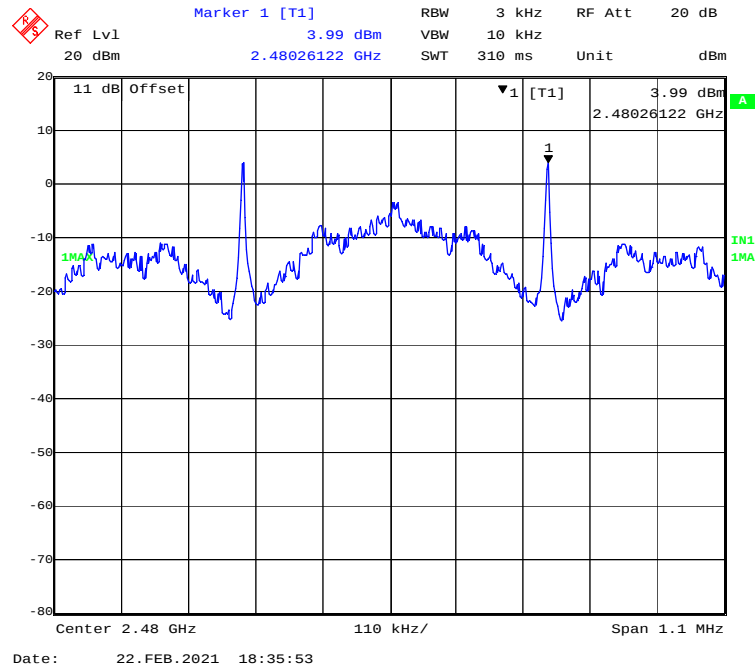


BLE (500Kbps)


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	2.16	≤ 8
Middle	2442	2.79	≤ 8
High	2480	2.48	≤ 8

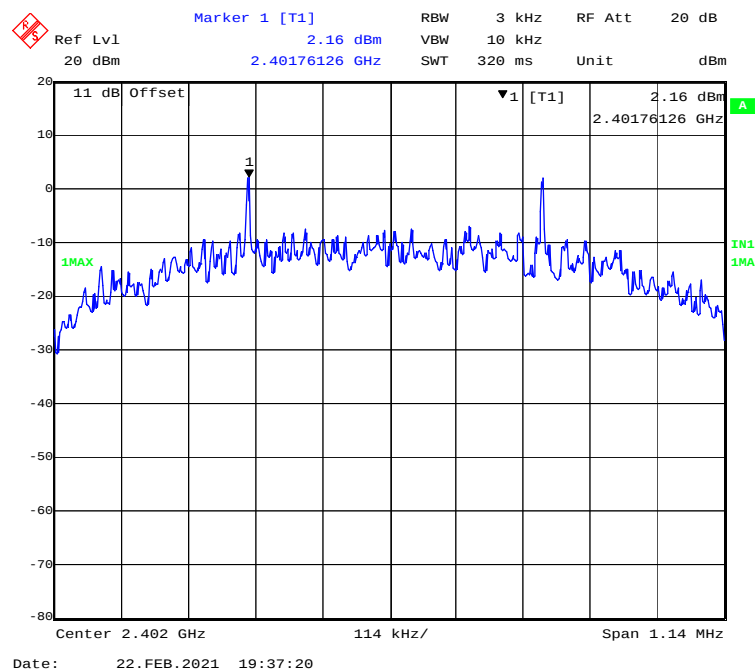Low Channel: 2402MHz

Middle Channel: 2442MHz

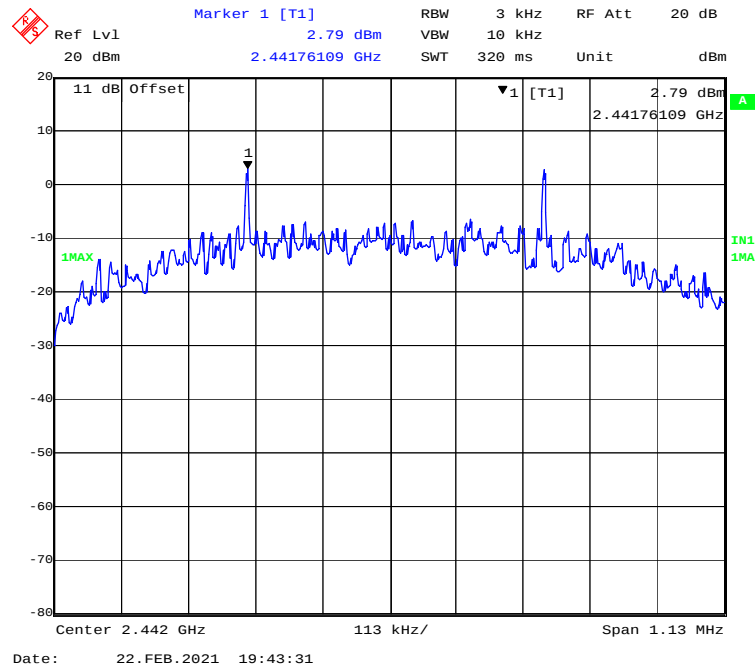


High Channel: 2480MHz

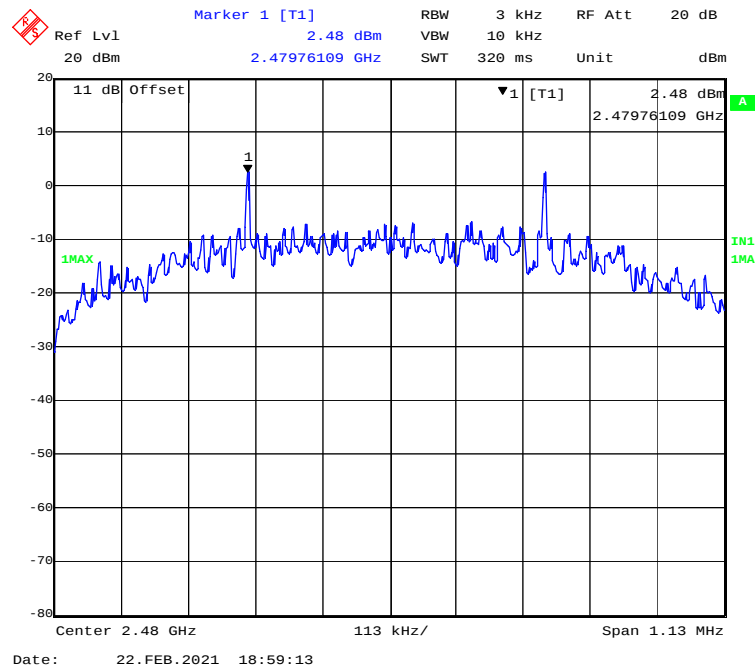


BLE (1Mbps)

Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-5.54	≤8
Middle	2442	-5.43	≤8
High	2480	-5.53	≤8


Low Channel: 2402MHz

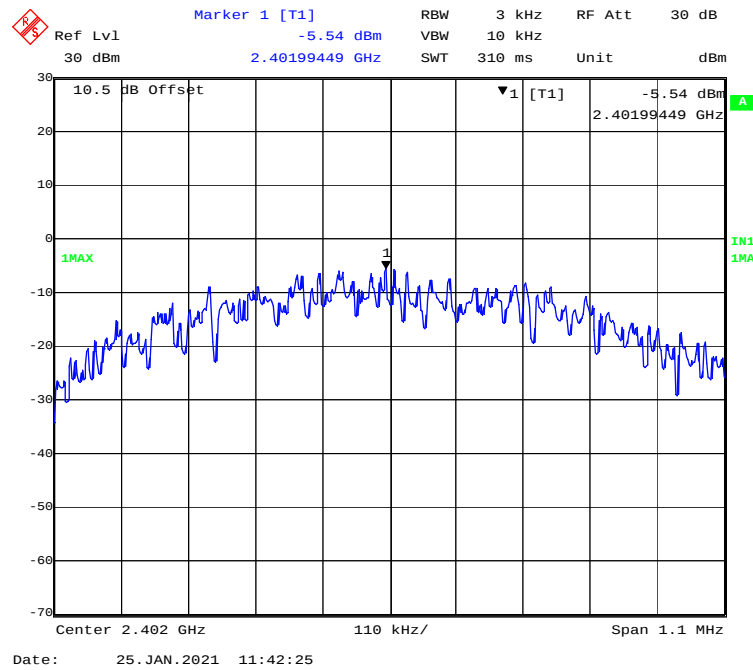

Middle Channel: 2442MHz

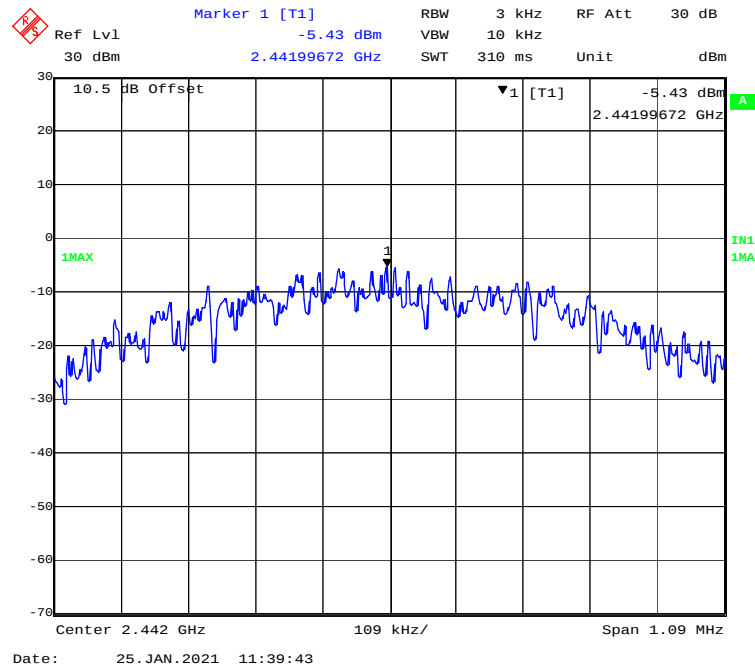


High Channel: 2480MHz

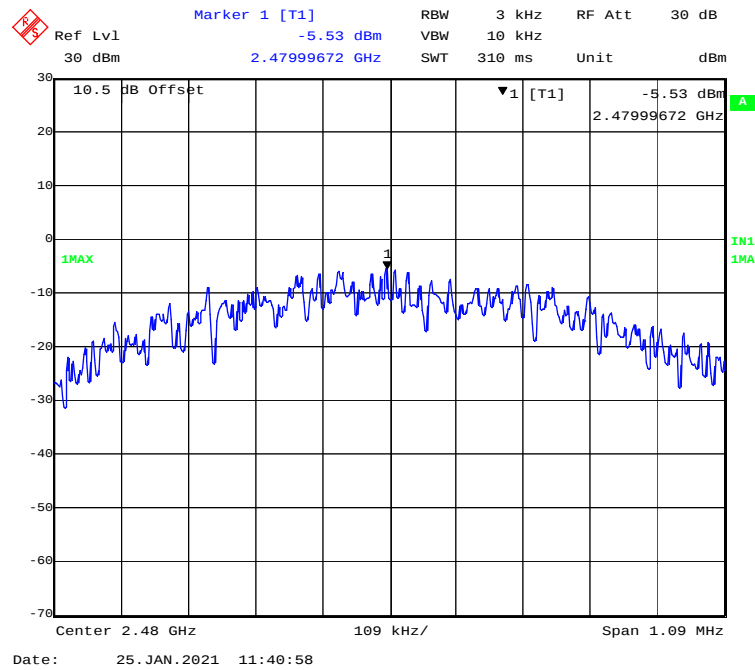


BLE (2Mbps)


Channel	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)
Low	2402	-6.59	≤ 8
Middle	2442	-6.47	≤ 8
High	2480	-6.53	≤ 8

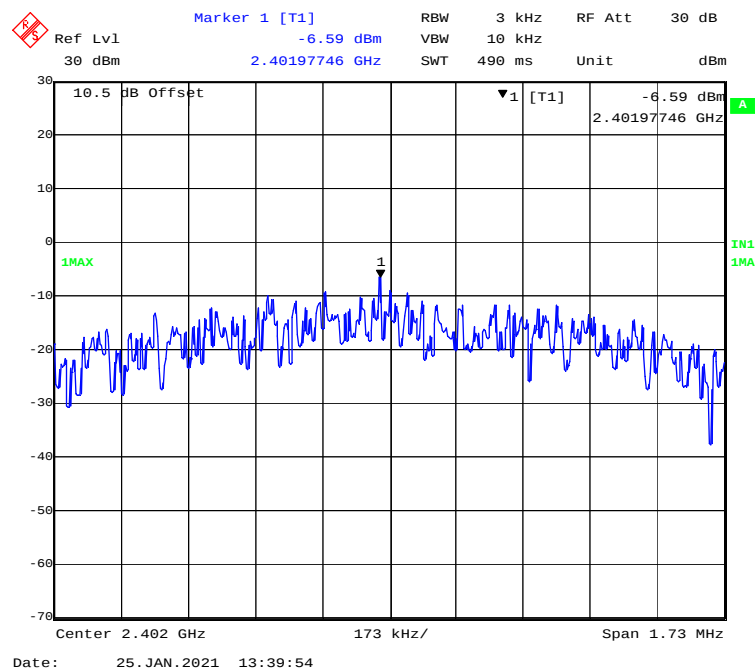Low Channel: 2402MHz

Middle Channel: 2442MHz

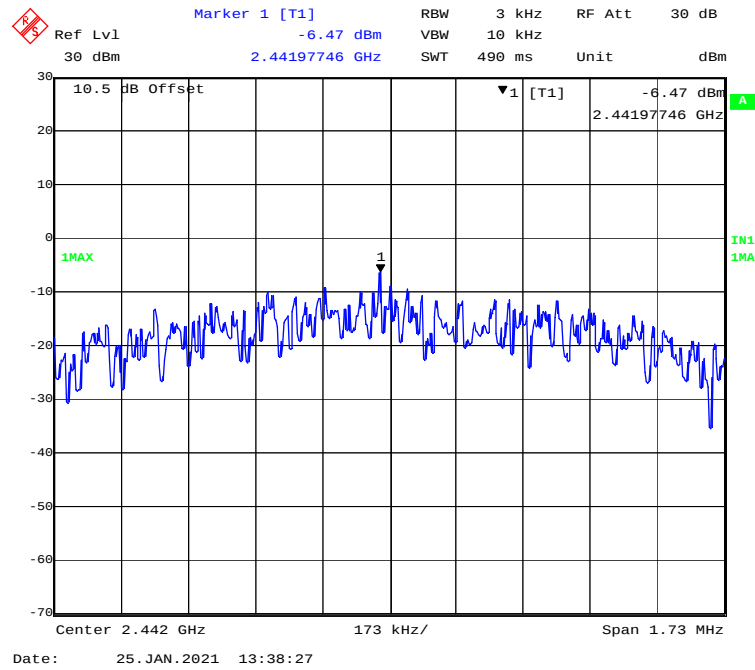

High Channel: 2480MHz

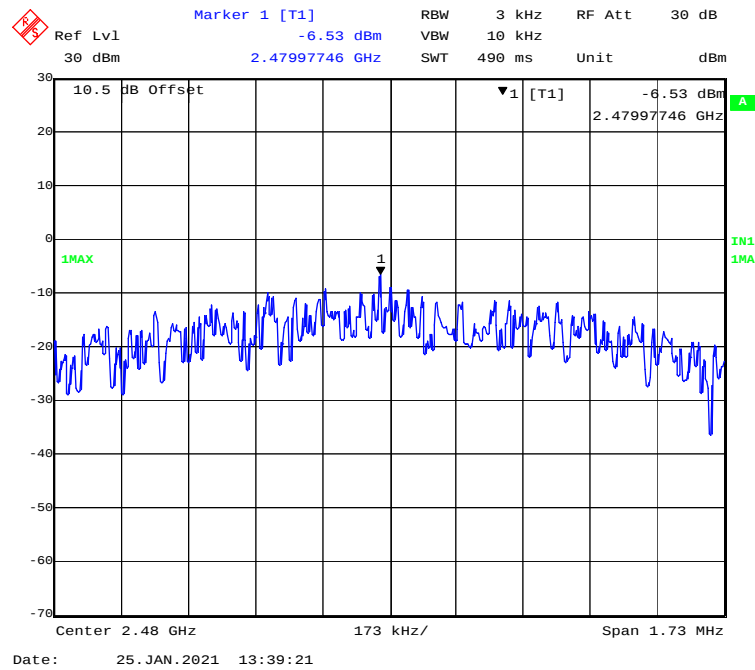

Declarations

1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

5: This report cannot be reproduced except in full, without prior written approval of the Company.

6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******