

**CFR 47 FCC PART 15 SUBPART C
ISED RSS-247 Issue 3**

TEST REPORT

For

Digital device

MODEL NUMBER: 9290037453B, 9290037595B

HVIN: 37453B, 37595B

REPORT NUMBER: 4791364519-1-RF-1

ISSUE DATE: July 3, 2024

FCC ID: 2AGBW9290037453BX

IC: 20812-37453BX

Prepared for

**Signify (China) Investment Co Ltd
Bldg 9, Ln 888, Tianlin Rd Minhang District, Shanghai, 200233 CHINA**

Prepared by

UL Verification Services (Guangzhou) Co., Ltd, Song Shan Lake Branch

Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China

Tel: +86 769 22038881

Fax: +86 769 33244054

Website: www.ul.com

The results reported herein have been performed in accordance with the laboratory's terms of accreditation. This report shall not be reproduced except in full without the written approval of the Laboratory. The results in this report apply to the test sample(s) mentioned above at the time of the testing period only and are not to be used to indicate applicability to other similar products.

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	July 3, 2024	Initial Issue	

Summary of Test Results

Test Item	Clause	Limit/Requirement	Result
Antenna Requirement	N/A	FCC Part 15.203/15.247 (c) RSS-GEN Clause 6.8	Pass
AC Power Line Conducted Emission	ANSI C63.10-2013, Clause 6.2	FCC Part 15.207 RSS-GEN Clause 8.8	Pass
Conducted Output Power	ANSI C63.10-2013, Clause 11.9.1.3	FCC Part 15.247 (b)(3) RSS-247 Clause 5.4 (d)	Pass
6dB Bandwidth and 99% Occupied Bandwidth	ANSI C63.10-2013, Clause 11.8.1	FCC Part 15.247 (a)(2) RSS-247 Clause 5.2 (a) RSS-Gen Clause 6.7	Pass
Power Spectral Density	ANSI C63.10-2013, Clause 11.10.2	FCC Part 15.247 (e) RSS-247 Clause 5.2 (b)	Pass
Conducted Band edge and spurious emission	ANSI C63.10-2013, Clause 11.11	FCC Part 15.247(d) RSS-247 Clause 5.5	Pass
Radiated Band edge and Spurious Emission	ANSI C63.10-2013, Clause 11.12 & Clause 11.13	FCC Part 15.247 (d) FCC Part 15.205/15.209 RSS-247 Clause 5.5 RSS-GEN Clause 8.9	Pass
Duty Cycle	ANSI C63.10-2013, Clause 11.6	None; for reporting purposes only.	Pass

*This test report is only published to and used by the applicant, and it is not for evidence purpose in China.

*The measurement result for the sample received is <Pass> according to <CFR 47 FCC PART 15 SUBPART C, ISSED RSS-247 Issue 3> when <Simple Acceptance> decision rule is applied.

CONTENTS

1. ATTESTATION OF TEST RESULTS	6
2. FACILITIES AND ACCREDITATION	7
3. TEST METHODOLOGY	8
4. CALIBRATION AND UNCERTAINTY	8
4.1. MEASURING INSTRUMENT CALIBRATION	8
4.2. MEASUREMENT UNCERTAINTY	8
5. EQUIPMENT UNDER TEST	9
5.1. DESCRIPTION OF EUT	9
5.2. CHANNEL LIST	9
5.3. MAXIMUM POWER	9
5.4. TEST CHANNEL CONFIGURATION	10
5.5. THE WORSE CASE POWER SETTING PARAMETER	10
5.6. DESCRIPTION OF AVAILABLE ANTENNAS	11
5.7. SUPPORT UNITS FOR SYSTEM TEST	12
6. MEASURING EQUIPMENT AND SOFTWARE USED	13
7. ANTENNA PORT TEST RESULTS	16
7.1. CONDUCTED OUTPUT POWER	16
7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH	17
7.3. POWER SPECTRAL DENSITY	19
7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION	21
7.5. DUTY CYCLE	23
8. RADIATED TEST RESULTS	24
8.1. RESTRICTED BANDEDGE	32
8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)	50
8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)	56
8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)	80
8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)	83
8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)	85
9. ANTENNA REQUIREMENT	87
10. AC POWER LINE CONDUCTED EMISSION	88
11. TEST DATA	92

APPENDIX A: Duty Cycle	92
APPENDIX B: Maximum Conducted Output Power	95
APPENDIX C: 6dB Bandwidth	96
APPENDIX D: Occupied Channel Bandwidth	101
APPENDIX E: Maximum Power Spectral Density Level	106
APPENDIX F: Band Edge.....	111
APPENDIX G: Conducted RF Spurious Emission.....	118

1. ATTESTATION OF TEST RESULTS

Applicant Information

Company Name: Signify (China) Investment Co Ltd
Address: Bldg 9, Ln 888, Tianlin Rd Minhang District, Shanghai, 200233
CHINA

Manufacturer Information


Company Name: Signify (China) Investment Co Ltd
Address: Bldg 9, Ln 888, Tianlin Rd Minhang District, Shanghai, 200233
CHINA

EUT Information

EUT Name: Digital device
Model: 9290037453B (HVIN: 37453B)
Series Model: 9290037595B (HVIN: 37595B)
Model different: All are the same except for color.
Brand: **PHILIPS**, hue, 
Sample Received Date: June 13, 2024
Sample Status: Normal
Sample ID: 7311771
Date of Tested: June 13, 2024 to July 3, 2024

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 FCC PART 15 SUBPART C ISED RSS-247 Issue 3	Pass


Prepared By:



Fanny Huang

Engineer Project Associate

Checked By:



Kebo Zhang

Senior Project Engineer

Approved By:



Stephen Guo

Operations Manager

2. FACILITIES AND ACCREDITATION

Accreditation Certificate	A2LA (Certificate No.: 4102.01) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with A2LA. FCC (FCC Designation No.: CN1187) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. Has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules ISED (Company No.: 21320) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been registered and fully described in a report filed with ISED. The Company Number is 21320 and the test lab Conformity Assessment Body Identifier (CABID) is CN0046. VCCI (Registration No.: G-20192, C-20153, T-20155 and R-20202) UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch. has been assessed and proved to be in compliance with VCCI, the Membership No. is 3793. Facility Name: Chamber D, the VCCI registration No. is G-20192 and R-20202 Shielding Room B, the VCCI registration No. is C-20153 and T-20155
---------------------------	---

Note 1:

All tests measurement facilities use to collect the measurement data are located at Building 10, Innovation Technology Park, No. 1, Li Bin Road, Song Shan Lake Hi-Tech Development Zone Dongguan, 523808, People's Republic of China.

Note 2:

The test anechoic chamber in UL Verification Services (Guangzhou) Co., Ltd. Song Shan Lake Branch had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

Note 3:

For below 30 MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. And these measurements below 30 MHz had been correlated to measurements performed on an OFS.

3. TEST METHODOLOGY

All tests were performed in accordance with the standard CFR 47 FCC PART 15 SUBPART C ISSED RSS-247 Issue 3, KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, ANSI C63.10-2013 and ISSED RSS-GEN Issue 5.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.62 dB
Radiated Emission (Included Fundamental Emission) (9 kHz ~ 30 MHz)	2.2 dB
Radiated Emission (Included Fundamental Emission) (30 MHz ~ 1 GHz)	4.00 dB
Radiated Emission (Included Fundamental Emission) (1 GHz to 26 GHz)	5.78 dB (1 GHz ~ 18 GHz)
	5.23 dB (18 GHz ~ 26 GHz)
Duty Cycle	±0.028%
DTS and 99% Occupied Bandwidth	±0.0196%
Maximum Conducted Output Power	±0.686 dB
Maximum Power Spectral Density Level	±0.743 dB
Conducted Band-edge Compliance	±1.328 dB
Conducted Unwanted Emissions In Non-restricted Frequency Bands	±0.746 dB (9 kHz ~ 1 GHz)
	±1.328dB (1 GHz ~ 26 GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

EUT Name	Digital device
Model	9290037453B(HVIN: 37453B)
Series Model:	9290037595B(HVIN: 37595B)
Model different:	All are the same except for color.

Frequency Range:	2402 MHz to 2480 MHz
Type of Modulation:	GFSK
Data Rates:	1Mbps/2Mbps/125kbps/500kbps
Power supply:	100-240V~ 50/60Hz 0.1A

5.2. CHANNEL LIST

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2466	/	/

5.3. MAXIMUM POWER

Test Mode	Frequency (MHz)	Channel Number	Maximum Peak Output Power (dBm)	Maximum EIRP (dBm)
LE 1M	2402 ~ 2480	0-39[40]	10.14	11.67
LE 2M	2402 ~ 2480	0-39[40]	10.25	11.78
LE 125k	2402 ~ 2480	0-39[40]	10.16	11.69
LE 500k	2402 ~ 2480	0-39[40]	10.20	11.73

5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel	Frequency
LE 1M	CH 0(Low Channel), CH 20(MID Channel), CH 39(High Channel)	2402 MHz, 2442 MHz, 2480 MHz
LE 2M	CH 0(Low Channel), CH 20(MID Channel), CH 39(High Channel)	2402 MHz, 2442 MHz, 2480 MHz
LE 125k	CH 0(Low Channel), CH 20(MID Channel), CH 39(High Channel)	2402 MHz, 2442 MHz, 2480 MHz
LE 500k	CH 0(Low Channel), CH 20(MID Channel), CH 39(High Channel)	2402 MHz, 2442 MHz, 2480 MHz

5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software Version		sscom		
Modulation Type	Transmit Antenna Number	Test Software setting value		
		CH 0	CH 19	CH 39
GFSK(1Mbps)	1	10	10	10
GFSK(2Mbps)	1	10	10	10
GFSK(125kbps)	1	10	10	10
GFSK(500kbps)	1	10	10	10

5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Antenna	Frequency (MHz)	Antenna Type	MAX Antenna Gain (dBi)
1	2402-2480	PCB Antenna	1.53

Test Mode	Transmit and Receive Mode	Description
LE 1M	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.
LE 2M	☒ 1TX, 1RX	Antenna 1 can be used as transmitting/receiving antenna.

5.7. SUPPORT UNITS FOR SYSTEM TEST

SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Remarks
1	Laptop	Lenovo	E42-80	R303U5AG
2	UART	/	/	/
3	Socket	/	/	/

I/O CABLES

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	/	/	1.0	/


ACCESSORIES

Item	Accessory	Brand Name	Model Name	Description
/	/	/	/	/

TEST SETUP

The EUT can work in engineering mode with a software through a Laptop.

SETUP DIAGRAM FOR TESTS

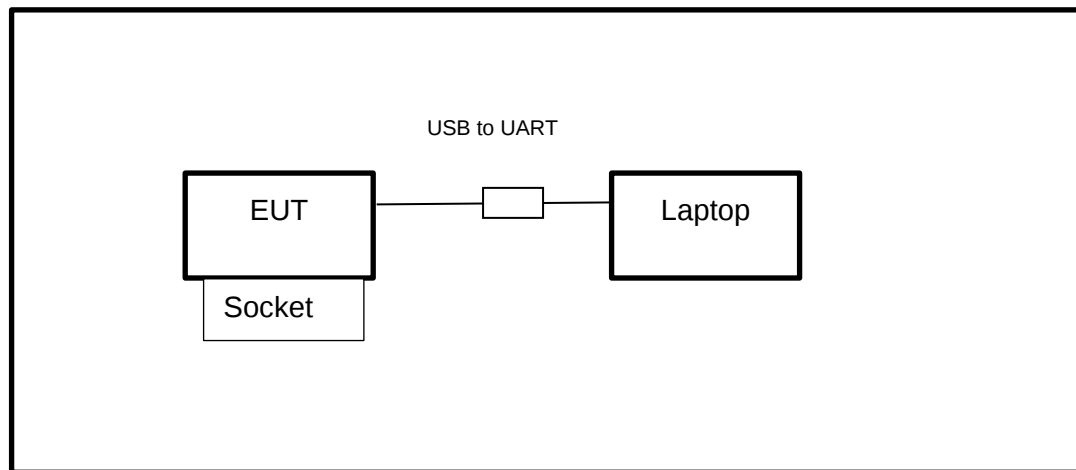

6. MEASURING EQUIPMENT AND SOFTWARE USED

R&S TS 8997 Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Power sensor, Power Meter	R&S	OSP120	100921	Mar.25,2024	Mar.24,2025
Vector Signal Generator	R&S	SMBV100A	261637	Oct.12, 2023	Oct.11, 2024
Signal Generator	R&S	SMB100A	178553	Oct.12, 2023	Oct.11, 2024
Signal Analyzer	R&S	FSV40	101118	Oct.12, 2023	Oct.11, 2024
Software					
Description	Manufacturer		Name	Version	
For R&S TS 8997 Test System	Rohde & Schwarz		EMC 32	10.60.10	
Tonsend RF Test System					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due. Date
Wideband Radio Communication Tester	R&S	CMW500	155523	Oct.12, 2023	Oct.11, 2024
Wireless Connectivity Tester	R&S	CMW270	1201.0002N75-102	Sep.25, 2023	Sep.24, 2024
PXA Signal Analyzer	Keysight	N9030A	MY55410512	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5182B	MY56200284	Oct.12, 2023	Oct.11, 2024
MXG Vector Signal Generator	Keysight	N5172B	MY56200301	Oct.12, 2023	Oct.11, 2024
DC power supply	Keysight	E3642A	MY55159130	Oct.12, 2023	Oct.11, 2024
Temperature & Humidity Chamber	SANMOOD	SG-80-CC-2	2088	Oct.12, 2023	Oct.11, 2024
Attenuator	Aglient	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024
RF Control Unit	Tonscend	JS0806-2	23B80620666	Mar.25,2024	Mar.24,2025
Software					
Description	Manufacturer	Name		Version	
Tonsend SRD Test System	Tonsend	JS1120-3 RF Test System		V3.2.22	

Conducted Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
EMI Test Receiver	R&S	ESR3	101961	Oct.13, 2023	Oct.12, 2024
Two-Line V-Network	R&S	ENV216	101983	Oct.13, 2023	Oct.12, 2024
Artificial Mains Networks	Schwarzbeck	NSLK 8126	8126465	Oct.13, 2023	Oct.12, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Conducted Emissions			Farad	EZ-EMC	Ver. UL-3A1

Radiated Emissions					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
MXE EMI Receiver	KESIGHT	N9038A	MY56400036	Oct.12, 2023	Oct.11, 2024
Hybrid Log Periodic Antenna	TDK	HLP-3003C	130959	Aug.02, 2021	Aug.01, 2024
Preamplifier	HP	8447D	2944A09099	Oct.12, 2023	Oct.11, 2024
EMI Measurement Receiver	R&S	ESR26	101377	Oct.12, 2023	Oct.11, 2024
Horn Antenna	TDK	HRN-0118	130940	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-0118	TRS-305-00067	Oct.12, 2023	Oct.11, 2024
Horn Antenna	Schwarzbeck	BBHA9170	697	July 20, 2021	July 19, 2024
Preamplifier	TDK	PA-02-2	TRS-307-00003	Oct.12, 2023	Oct.11, 2024
Preamplifier	TDK	PA-02-3	TRS-308-00002	Oct.12, 2023	Oct.11, 2024
Loop antenna	Schwarzbeck	1519B	00008	Dec.14, 2021	Dec.13, 2024
Preamplifier	TDK	PA-02-001-3000	TRS-302-00050	Oct.12, 2023	Oct.11, 2024
High Pass Filter	Wi	WHKX10-2700-3000-18000-40SS	23	Oct.12, 2023	Oct.11, 2024
Band Reject Filter	Wainwright	WRCJV8-2350-2400-2483.5-2533.5-40SS	4	Oct.12, 2023	Oct.11, 2024
Software					
Description			Manufacturer	Name	Version
Test Software for Radiated Emissions			Farad	EZ-EMC	Ver. UL-3A1

Other Instrument					
Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Due Date
Temperature humidity probe	OMEGA	ITHX-SD-5	18470007	Oct.21, 2023	Oct.20, 2024
Barometer	Yiyi	Baro	N/A	Oct.19, 2023	Oct.18, 2024
Attenuator	Agilent	8495B	2814a12853	Oct.12, 2023	Oct.11, 2024

7. ANTENNA PORT TEST RESULTS

7.1. CONDUCTED OUTPUT POWER

LIMITS


CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(b)(3) ISED RSS-247 5.4 (d)	Peak Conduct Output Power	1 watt or 30 dBm	2400-2483.5

TEST PROCEDURE

Connect the EUT to a low loss RF cable from the antenna port to the power sensor (video bandwidth is greater than the occupied bandwidth).

Measure peak emission level, the indicated level is the peak output power, after any corrections for external attenuators and cables.

TEST SETUP



TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	57.2%
Atmosphere Pressure	101.2kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 20, 2024	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix B

7.2. 6DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6 dB Bandwidth	≥ 500 kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only.	2400-2483.5

TEST PROCEDURE


Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: Enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5.0 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

a) Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.

b) Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

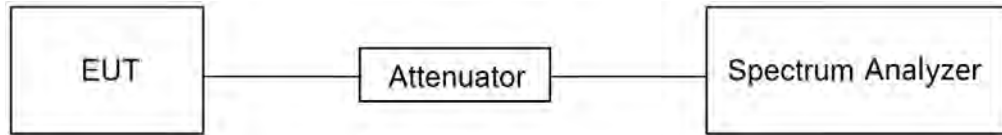TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5℃	Relative Humidity	57.2%
Atmosphere Pressure	101.2kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 20, 2024	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix C&D

7.3. POWER SPECTRAL DENSITY

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC §15.247 (e) ISED RSS-247 5.2 (b)	Power Spectral Density	8 dBm in any 3 kHz band	2400-2483.5

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.10.2.


Connect the EUT to the spectrum analyzer and use the following settings:

Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	$1.5 \times \text{DTS bandwidth}$
Trace	Max hold
Sweep time	Auto couple

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

TEST SETUP

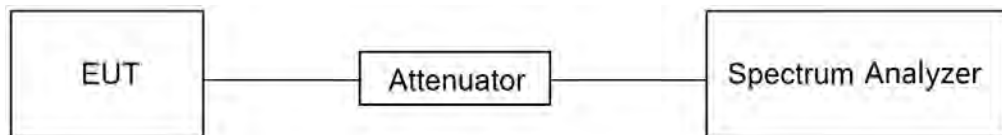

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	57.2%
Atmosphere Pressure	101.2kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 20, 2024	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix E

7.4. CONDUCTED BAND EDGE AND SPURIOUS EMISSION

LIMITS

CFR 47 FCC Part15 (15.247) Subpart C ISED RSS-247 ISSUE 3		
Section	Test Item	Limit
CFR 47 FCC §15.247 (d) ISED RSS-247 5.5	Conducted Bandedge and Spurious Emissions	at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.11 and 11.13.

Connect the EUT to the spectrum analyzer and use the following settings for reference level measurement:


Center Frequency	The center frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level.

Change the settings for emission level measurement:

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times \text{RBW}$
measurement points	$\geq \text{span}/\text{RBW}$
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum PSD level. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11.

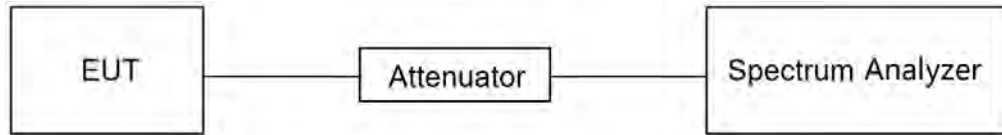TEST SETUP**TEST ENVIRONMENT**

Temperature	22.5℃	Relative Humidity	57.2%
Atmosphere Pressure	101.2kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 20, 2024	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix F&G

7.5. DUTY CYCLE


LIMITS

None; for reporting purposes only.

TEST PROCEDURE

Refer to ANSI C63.10-2013 clause 11.6 Zero – Span Spectrum Analyzer method.

TEST SETUP

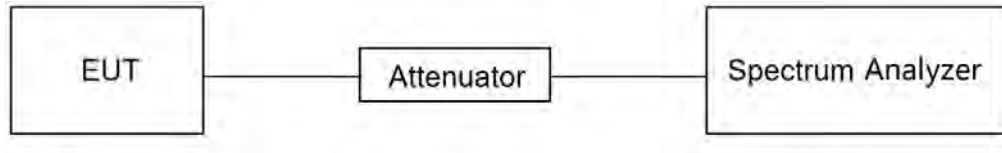

TEST ENVIRONMENT

Temperature	22.5°C	Relative Humidity	57.2%
Atmosphere Pressure	101.2kPa	Test Voltage	AC 120V 60Hz

TEST DATE / ENGINEER

Test Date	June 20, 2024	Test By	Walker Yuan
-----------	---------------	---------	-------------

TEST RESULTS

Please refer to section "Test Data" - Appendix A

8. RADIATED TEST RESULTS

LIMITS

Please refer to CFR 47 FCC §15.205 and §15.209.

Please refer to ISSED RSS-GEN Clause 8.9 and Clause 8.10.

Radiation Disturbance Test Limit for FCC (Class B) (9 kHz ~ 1 GHz)

Emissions radiated outside of the specified frequency bands above 30 MHz			
Frequency Range (MHz)	Field Strength Limit ($\mu\text{V/m}$) at 3 m	Field Strength Limit (dB $\mu\text{V/m}$) at 3 m	
		Quasi-Peak	
30 - 88	100	40	
88 - 216	150	43.5	
216 - 960	200	46	
Above 960	500	54	
Above 1000	500	Peak	Average
		74	54

FCC Emissions radiated outside of the specified frequency bands below 30 MHz		
Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30

ISSED General field strength limits at frequencies below 30 MHz

Table 6 – General field strength limits at frequencies below 30 MHz		
Frequency	Magnetic field strength (H-Field) ($\mu\text{A/m}$)	Measurement distance (m)
9 - 490 kHz ^{Note 1}	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

Note 1: The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

ISED Restricted bands please refer to ISED RSS-GEN Clause 8.10

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.6
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4
5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		

Note 1: Certain frequency bands listed in table 7 and in bands above 38.6 GHz are designated for licence-exempt applications. These frequency bands and the requirements that apply to related devices are set out in the 200 and 300 series of RSSs.

FCC Restricted bands of operation refer to FCC §15.205 (a):

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Note: ¹Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

²Above 38.6c

TEST PROCEDURE

Below 30 MHz

The setting of the spectrum analyzer

RBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
VBW	200 Hz (From 9 kHz to 0.15 MHz)/ 9 kHz (From 0.15 MHz to 30 MHz)
Sweep	Auto

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.4.
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1 m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz Radiated emission limits in these three bands are based on measurements employing an average detector.
6. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak and average detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak and average detector and reported.
7. Although these tests were performed other than open field site, adequate comparison measurements were confirmed against 30m open field site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field site based on KDB 414788.
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of 377Ω . For example, the measurement frequency X kHz resulted in a level of Y dBuV/m, which is equivalent to $Y-51.5 = Z$ dBuA/m, which has the same margin, W dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1 GHz and above 30 MHz

The setting of the spectrum analyzer

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.5.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 80 cm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1 GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.


Above 1 GHz

The setting of the spectrum analyzer

RBW	1 MHz
VBW	PEAK: 3 MHz AVG: see note 6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013 clause 6.6.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5 m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1 GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements and 1 MHz resolution bandwidth with 1/T video bandwidth with peak detector for average measurements. For the Duty Cycle please refer to clause 7.5. ON TIME AND DUTY CYCLE.

X axis, Y axis, Z axis positions:

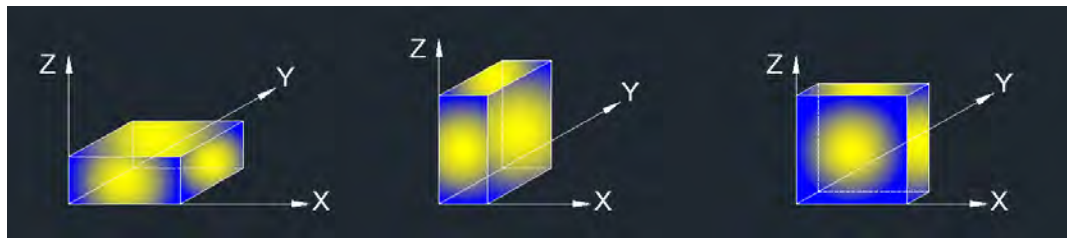

Note 1: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data recorded in the report.

For Restricted Bandedge:

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. PK=Peak: Peak detector.
4. AV=Average: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Only the worst data was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.
7. Both horizontal and vertical have been tested, only the worst data was recorded in the report.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (9 kHz ~ 30 MHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All 3 polarizations (Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.
4. All modes have been tested, but only the worst data was recorded in the report.
5. $\text{dBuA/m} = \text{dBuV/m} - 20\log_{10}[120\pi] = \text{dBuV/m} - 51.5$

For Radiate Spurious Emission (30 MHz ~ 1 GHz):

Note:

1. Result Level = Read Level + Correct Factor.
2. If the peak values are less than the QP limit, the QP result is deemed to comply with QP limit.
3. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (1 GHz ~ 3 GHz):

Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: VBW=1/Ton, where: Ton is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band reject filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious Emission (3 GHz ~ 18 GHz):

Note:


1. Peak Result = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. AVG: $VBW=1/T_{on}$, where: T_{on} is the transmitting duration.
5. For the transmitting duration, please refer to clause 7.5.
6. Filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for High Pass Filter losses.
7. Proper operation of the transmitter prior to adding the filter to the measurement chain.
8. All modes have been tested, but only the worst data was recorded in the report.

For Radiate Spurious emission (18 GHz ~ 26 GHz):


Note:

1. Measurement = Reading Level + Correct Factor.
2. If the peak values are less than the average limit of 54 dBuV/m, the average result is deemed to comply with average limit.
3. Peak: Peak detector.
4. All modes have been tested, but only the worst data was recorded in the report.


TEST SETUP

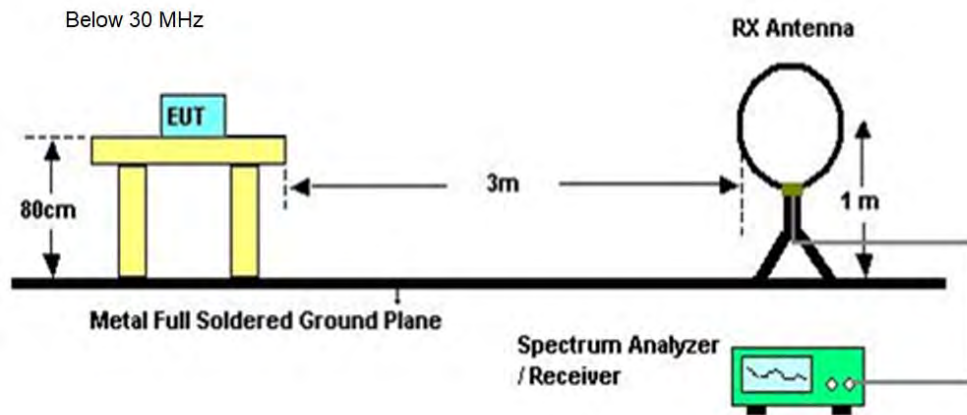

Below 1 GHz and above 30 MHz

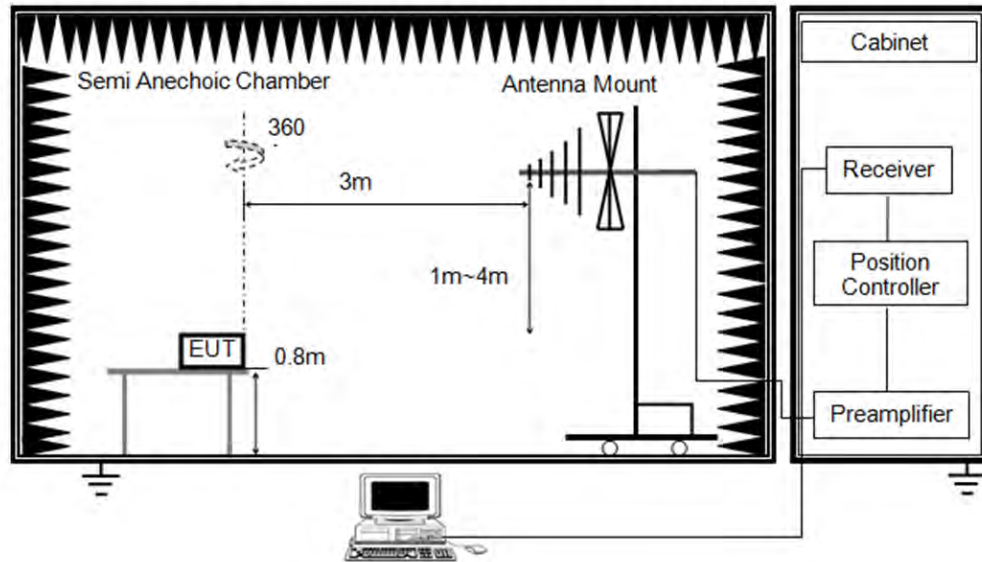

Above 1 GHz

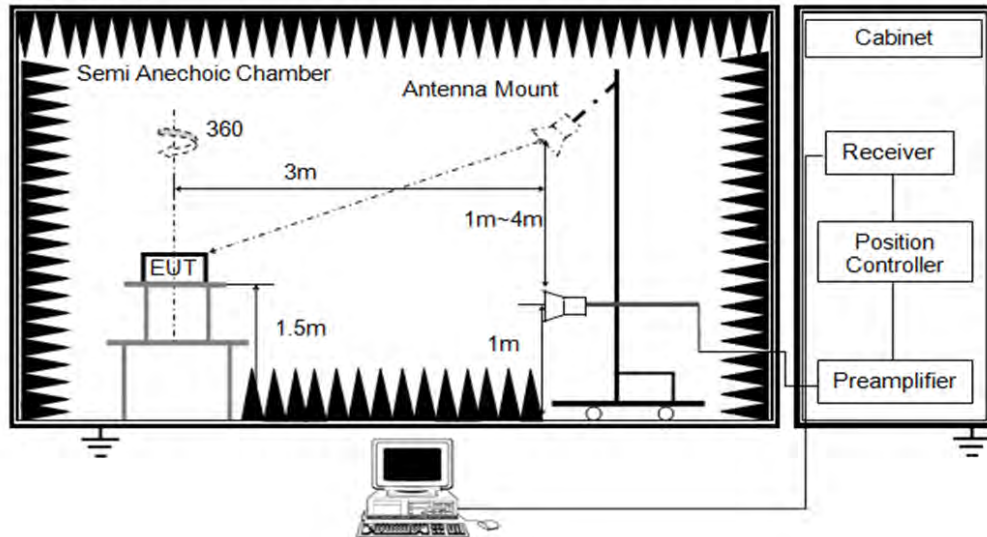

TEST ENVIRONMENT

Temperature	21.5°C	Relative Humidity	61.3%
Atmosphere Pressure	101kPa	Test Voltage	


TEST DATE / ENGINEER

Test Date	July 2, 2024	Test By	Mason Wang
-----------	--------------	---------	------------

TEST RESULTS


8.1. RESTRICTED BANDEDGE

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

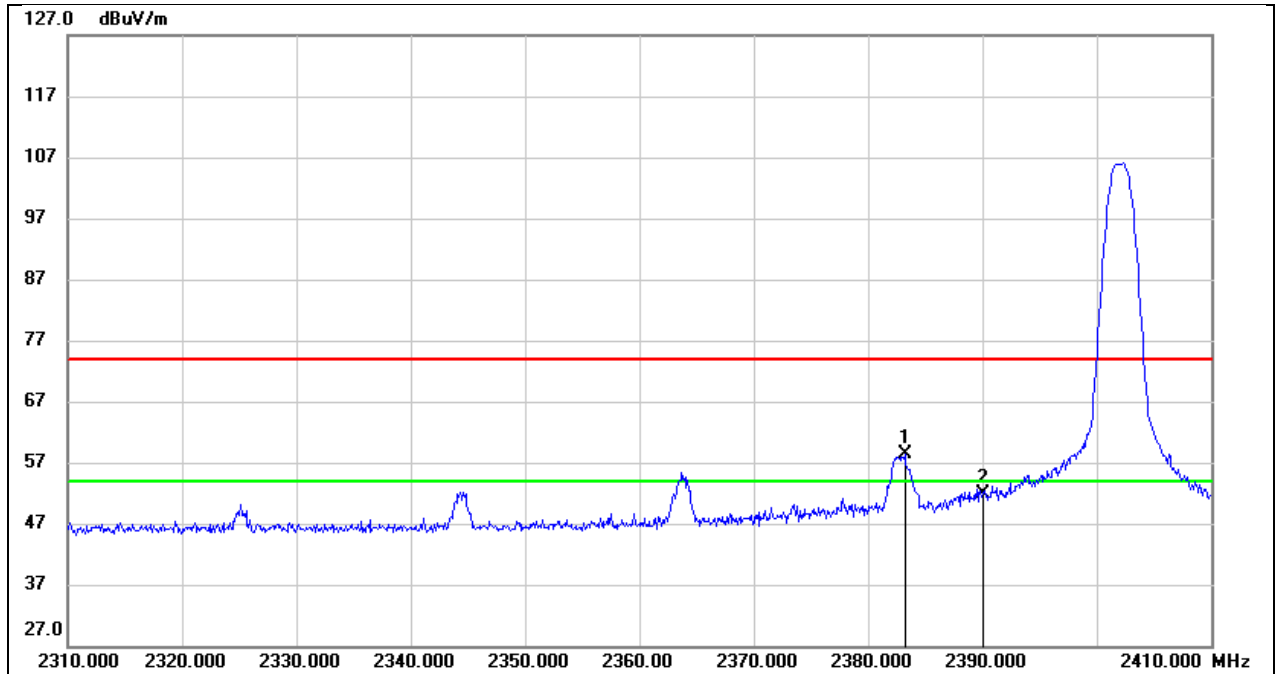


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.200	25.40	32.89	58.29	74.00	-15.71	peak
2	2390.000	18.85	32.92	51.77	74.00	-22.23	peak

Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

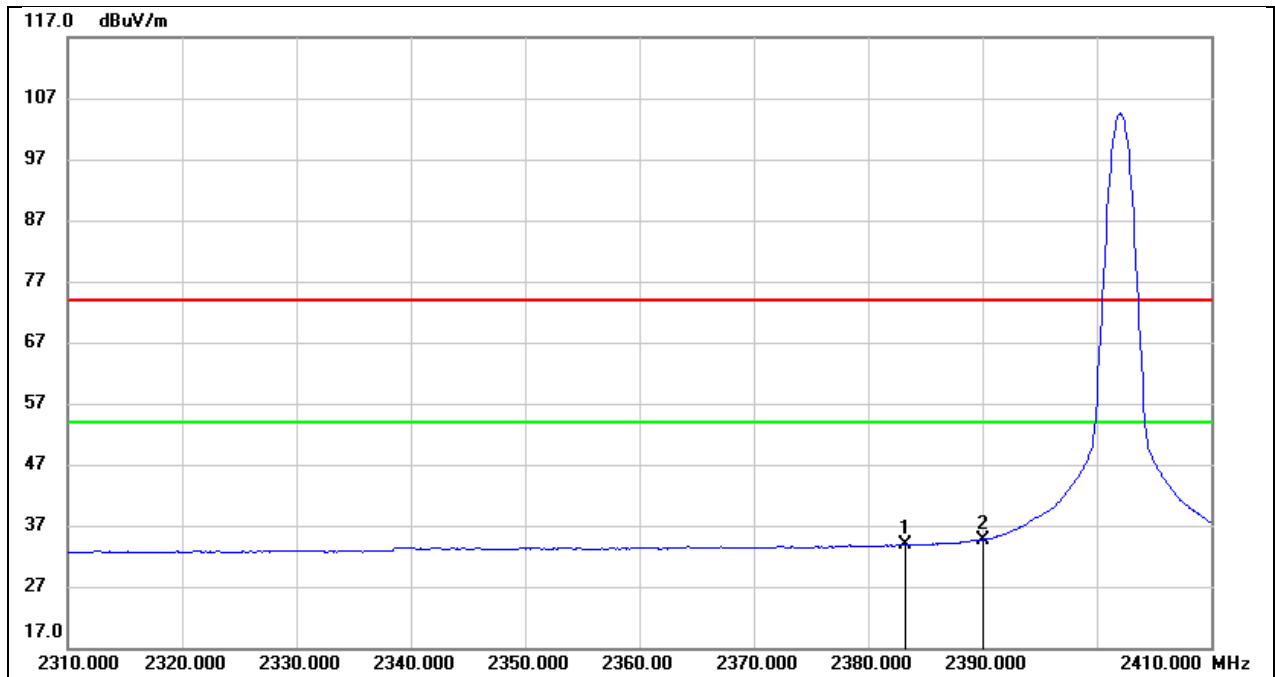


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.200	0.93	32.89	33.82	54.00	-20.18	AVG
2	2390.000	1.82	32.92	34.74	54.00	-19.26	AVG

Test Mode:	BLE 1M PK	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

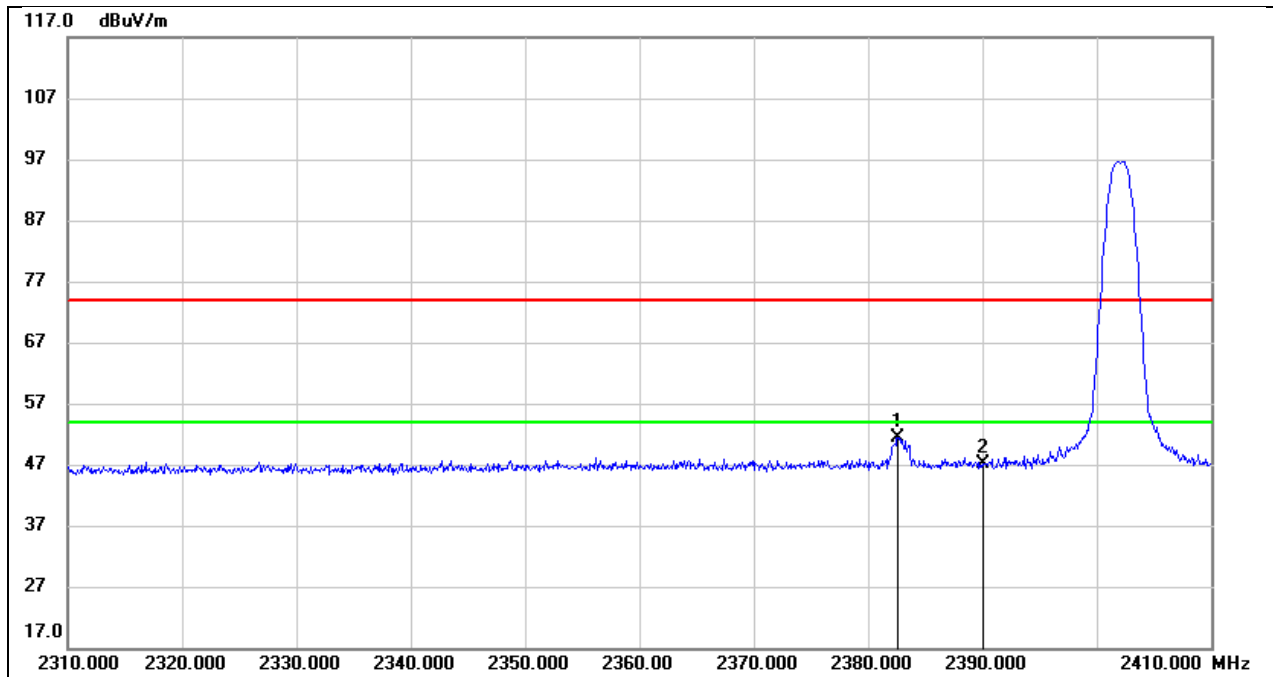


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.600	18.61	32.88	51.49	74.00	-22.51	peak
2	2390.000	14.26	32.92	47.18	74.00	-26.82	peak

Test Mode:	BLE 1M AV	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

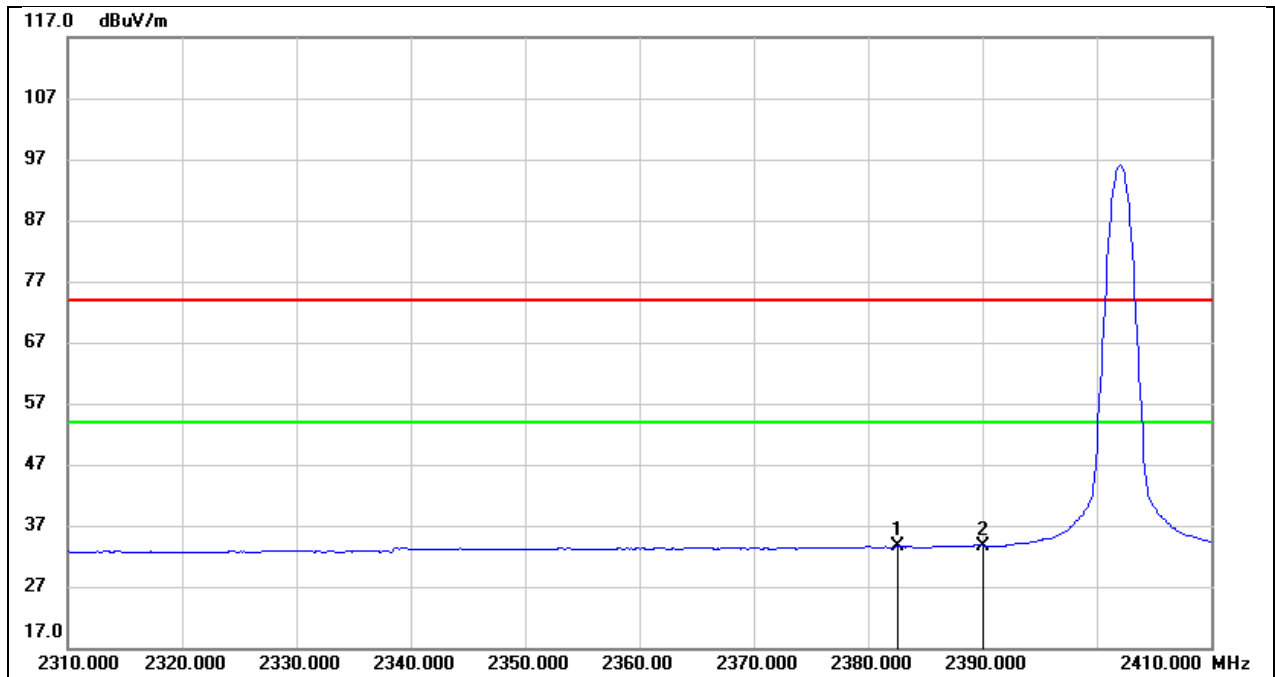


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.600	0.69	32.88	33.57	54.00	-20.43	AVG
2	2390.000	0.80	32.92	33.72	54.00	-20.28	AVG

Test Mode:	BLE 1M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

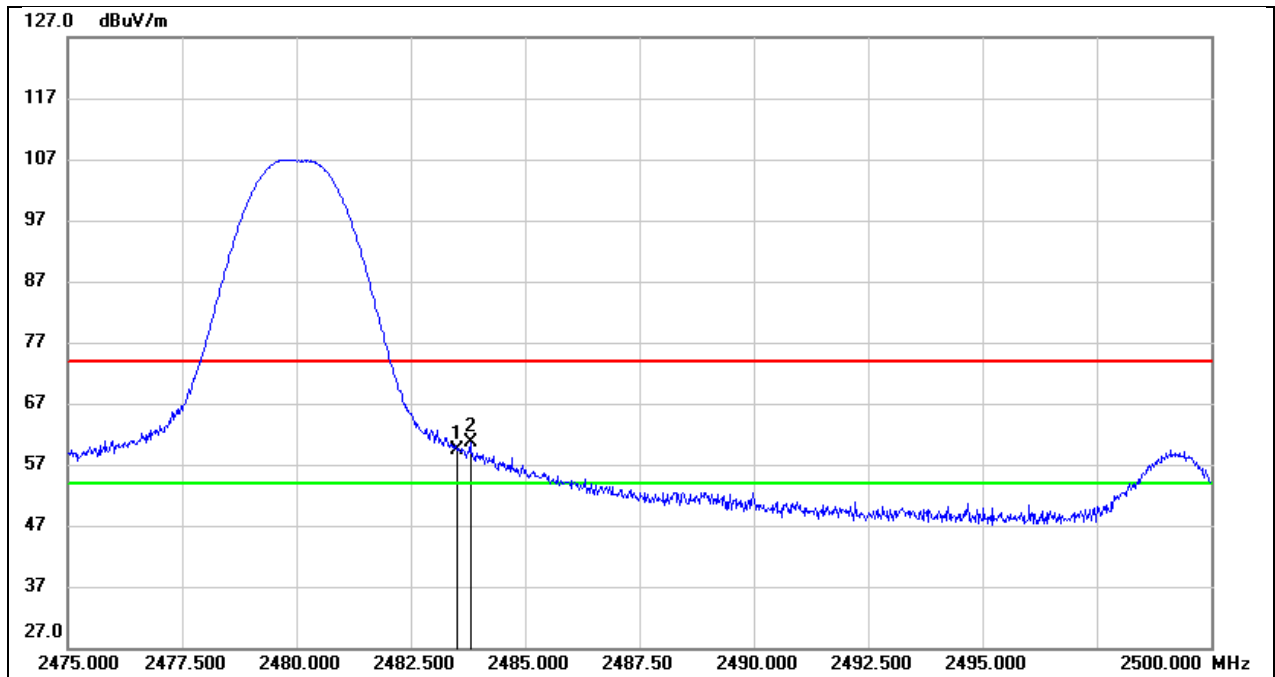


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	26.44	32.94	59.38	74.00	-14.62	peak
2	2483.800	27.60	32.94	60.54	74.00	-13.46	peak

Test Mode:	BLE 1M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

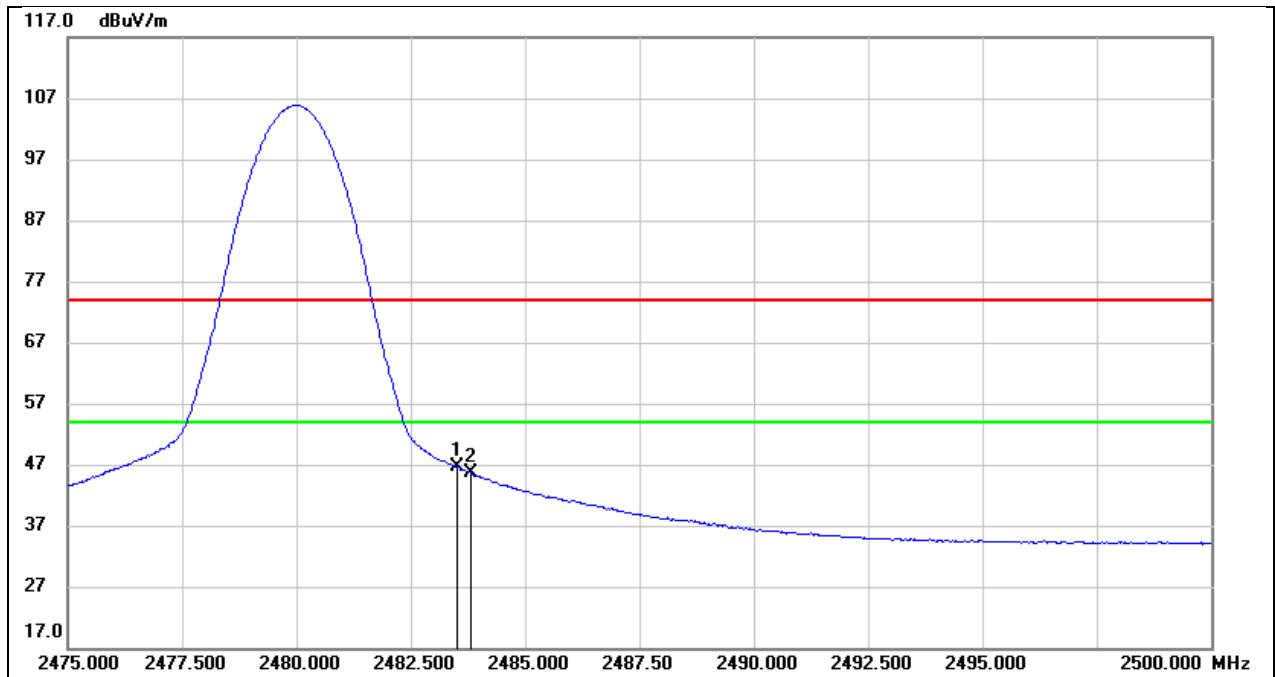


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	13.60	32.94	46.54	54.00	-7.46	AVG
2	2483.800	12.73	32.94	45.67	54.00	-8.33	AVG

Test Mode:	BLE 2M PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

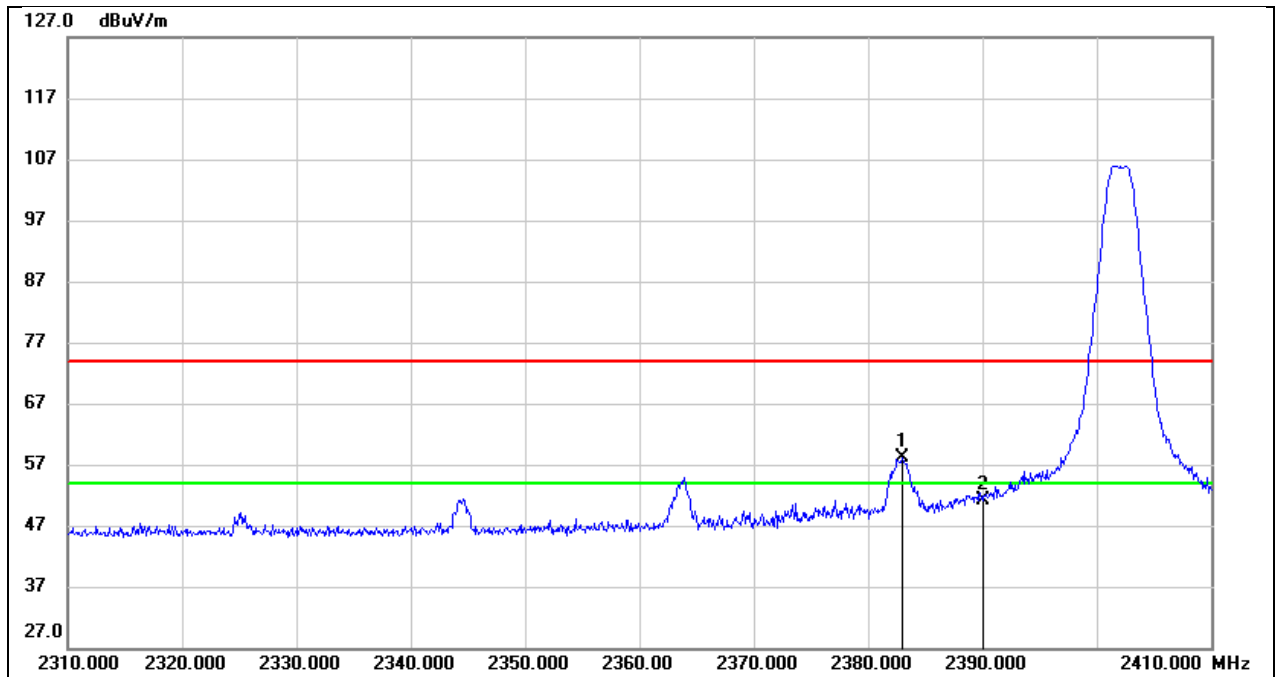


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.000	25.20	32.89	58.09	74.00	-15.91	peak
2	2390.000	18.24	32.92	51.16	74.00	-22.84	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

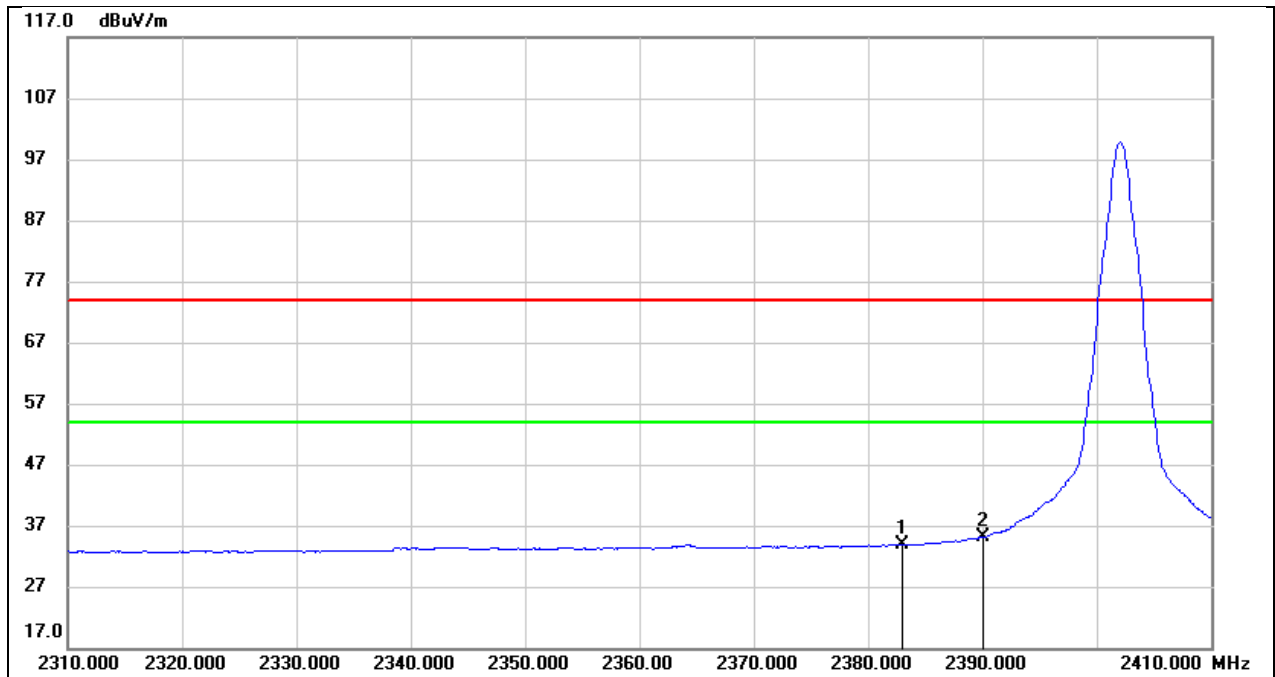


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.000	0.97	32.89	33.86	54.00	-20.14	AVG
2	2390.000	2.22	32.92	35.14	54.00	-18.86	AVG

Test Mode:	BLE 2M PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

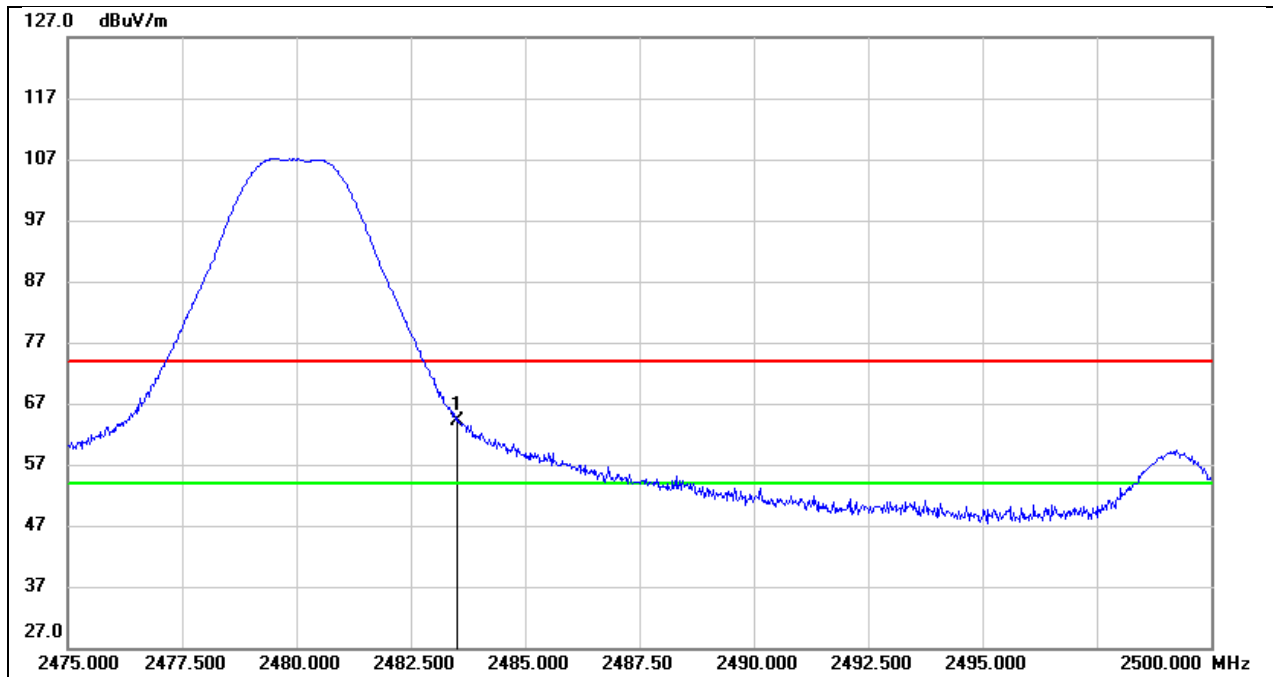


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	31.26	32.94	64.20	74.00	-9.80	peak

Test Mode:	BLE 2M AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

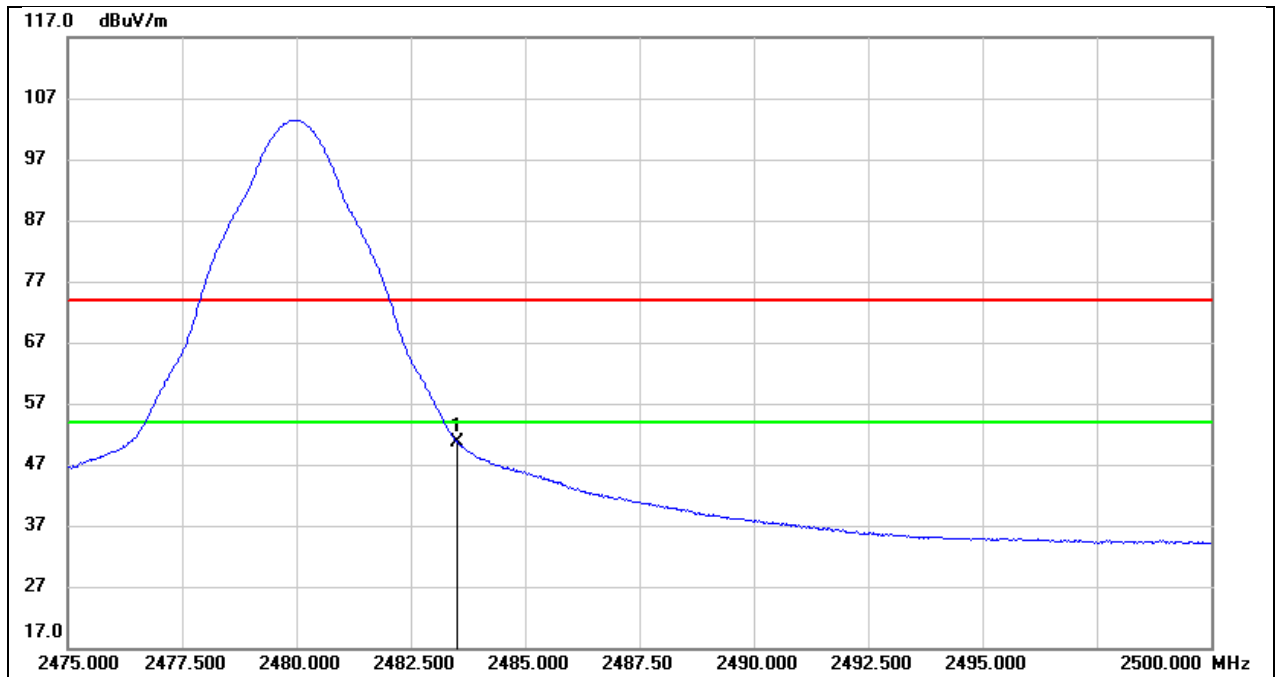


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	17.79	32.94	50.73	54.00	-3.27	AVG

Test Mode:	BLE 125k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

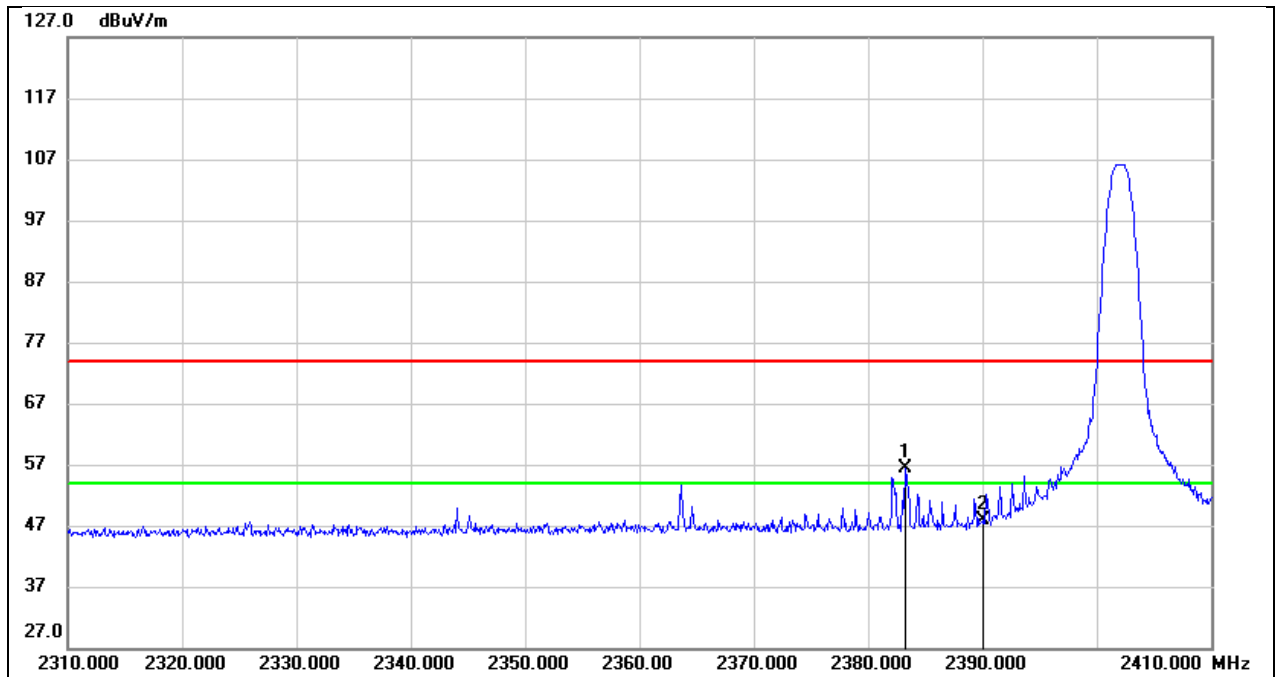


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.200	23.39	32.89	56.28	74.00	-17.72	peak
2	2390.000	14.86	32.92	47.78	74.00	-26.22	peak

Test Mode:	BLE 125k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

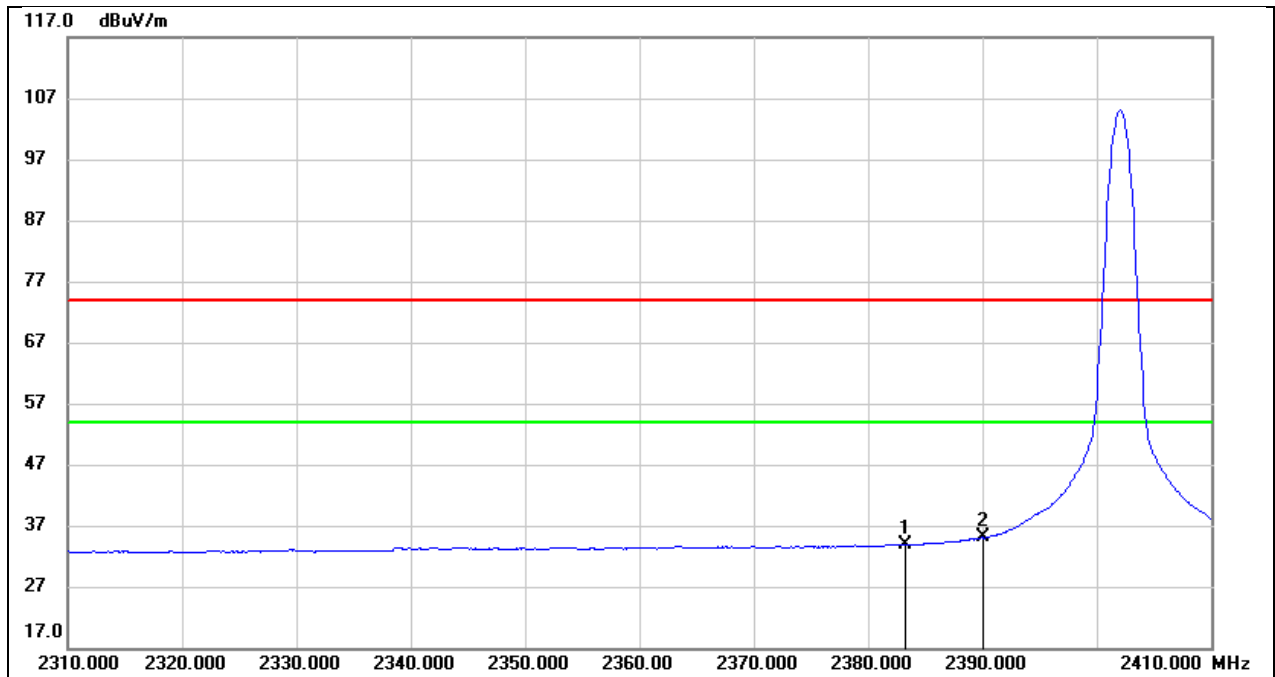


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2383.200	0.91	32.89	33.80	54.00	-20.20	AVG
2	2390.000	2.09	32.92	35.01	54.00	-18.99	AVG

Test Mode:	BLE 125k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

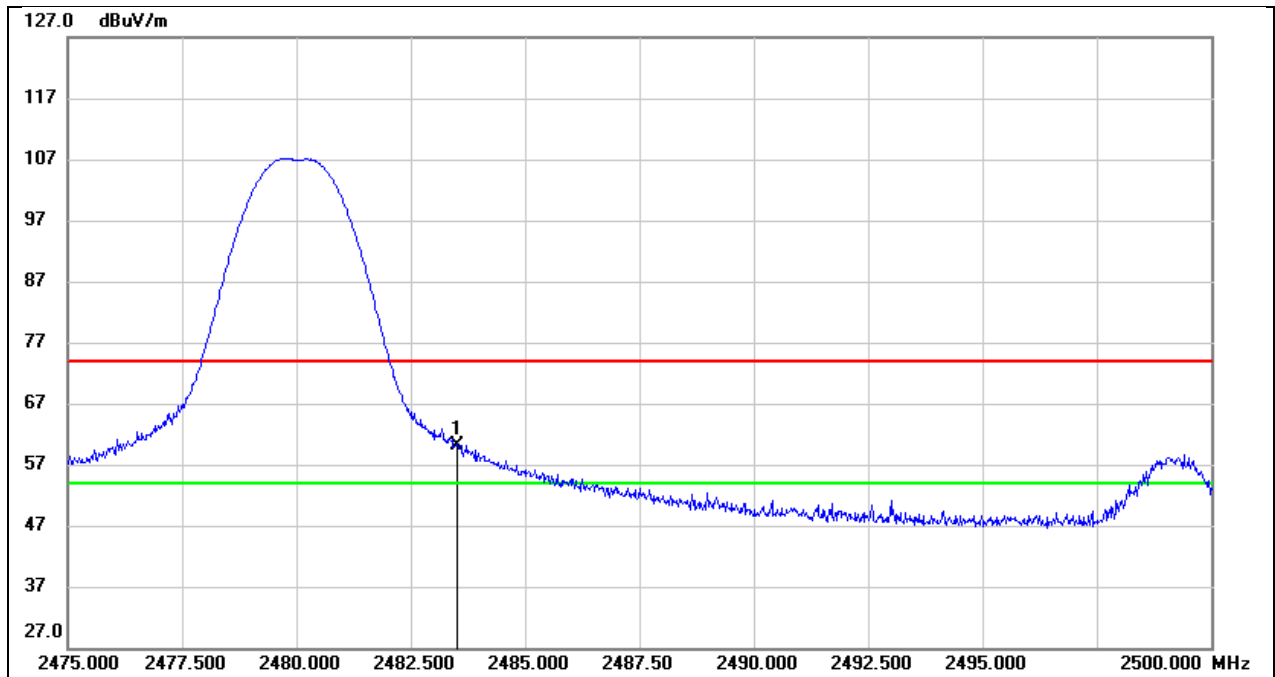


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.09	32.94	60.03	74.00	-13.97	peak

Test Mode:	BLE 125k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

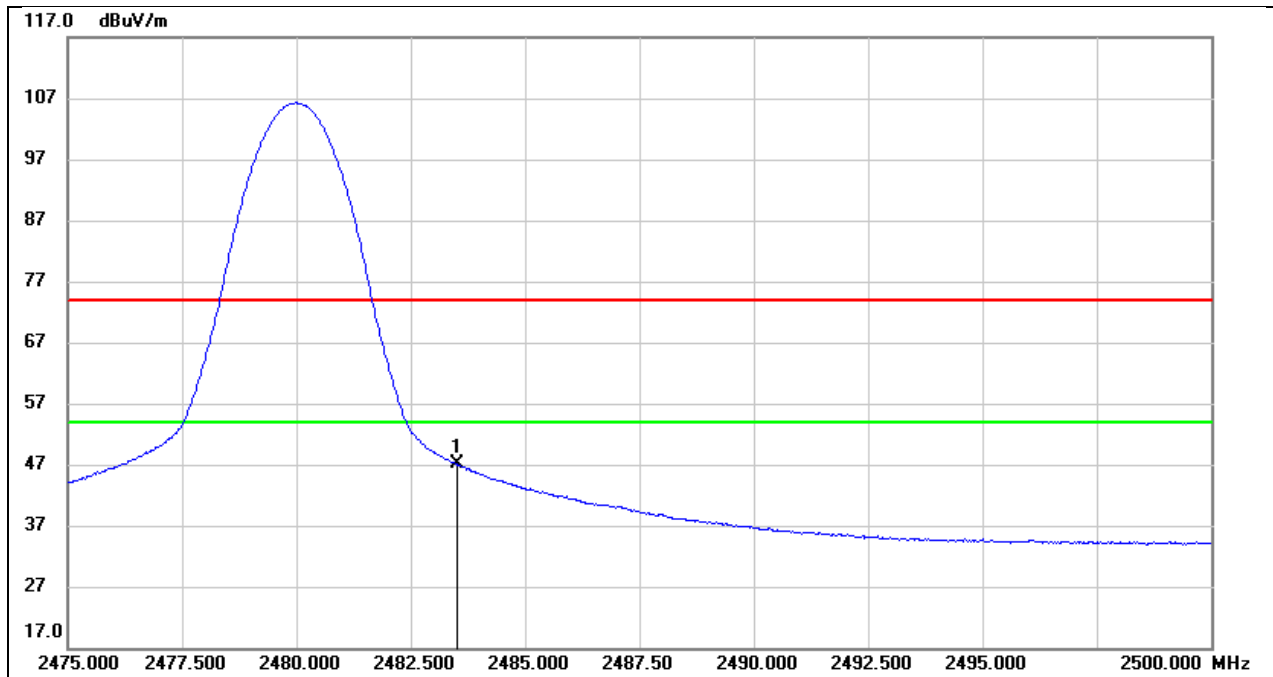


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.13	32.94	47.07	54.00	-6.93	AVG

Test Mode:	BLE 500k PK	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

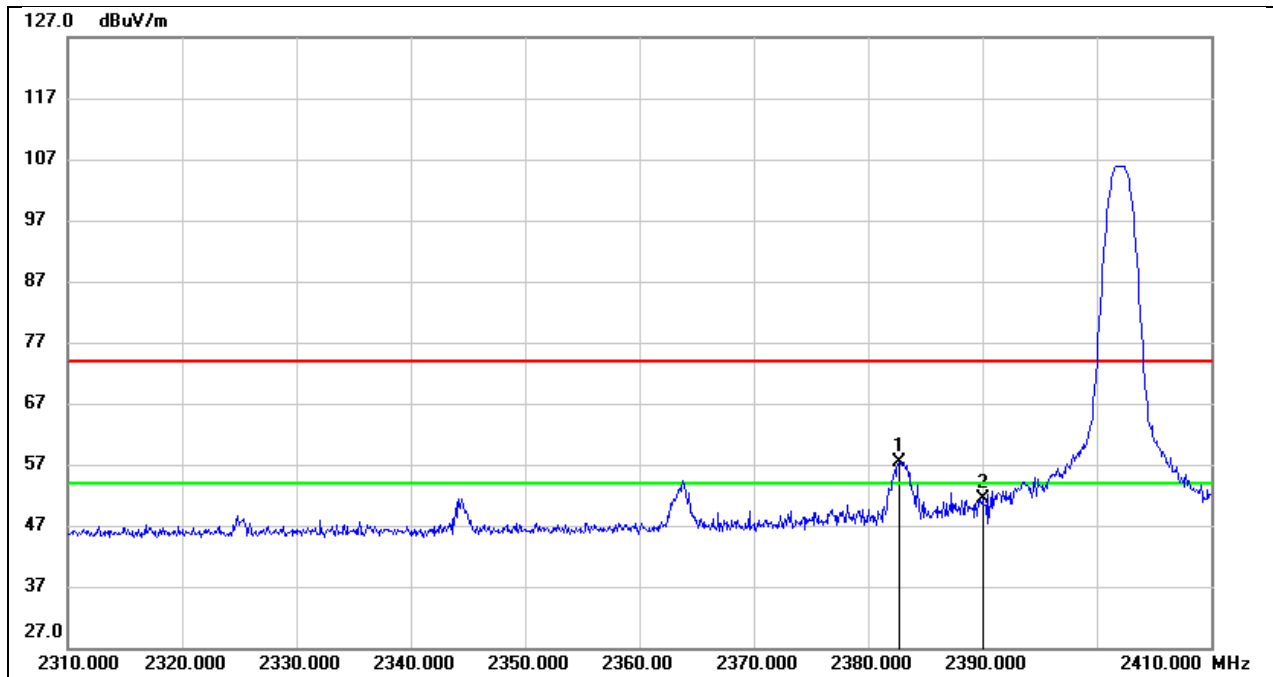


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.700	24.51	32.89	57.40	74.00	-16.60	peak
2	2390.000	18.44	32.92	51.36	74.00	-22.64	peak

Test Mode:	BLE 500k AV	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

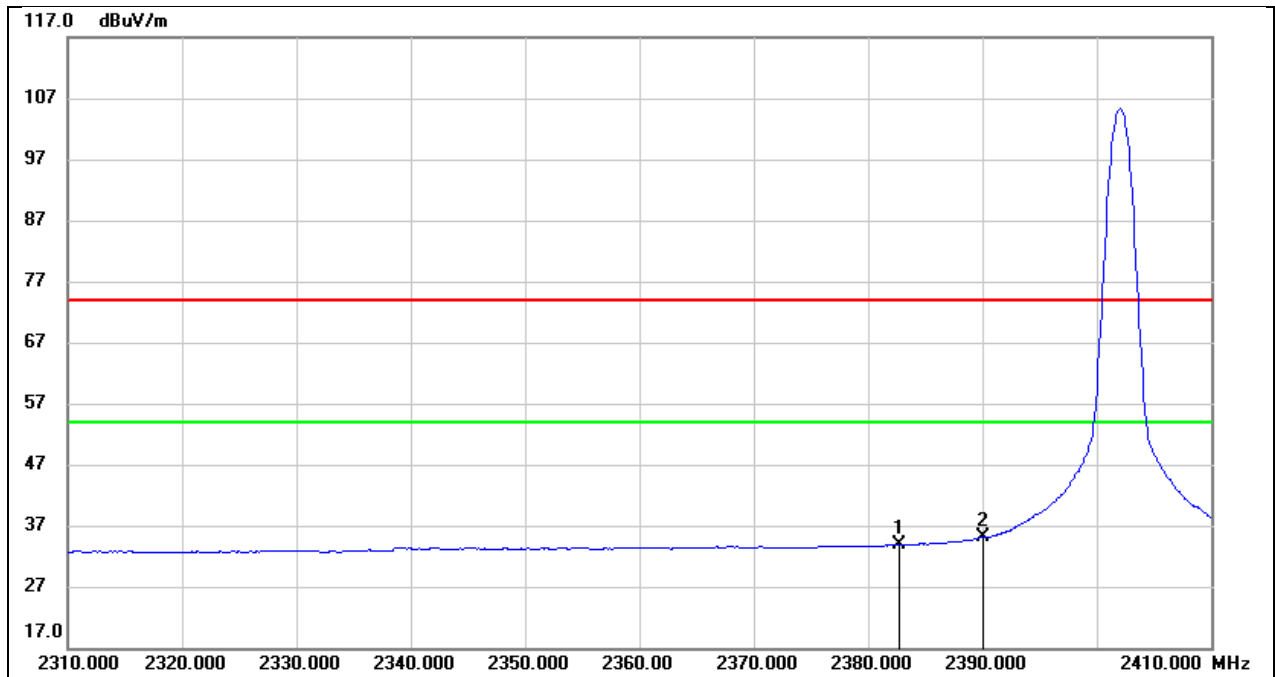


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2382.700	1.01	32.89	33.90	54.00	-20.10	AVG
2	2390.000	2.20	32.92	35.12	54.00	-18.88	AVG

Test Mode:	BLE 500k PK	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

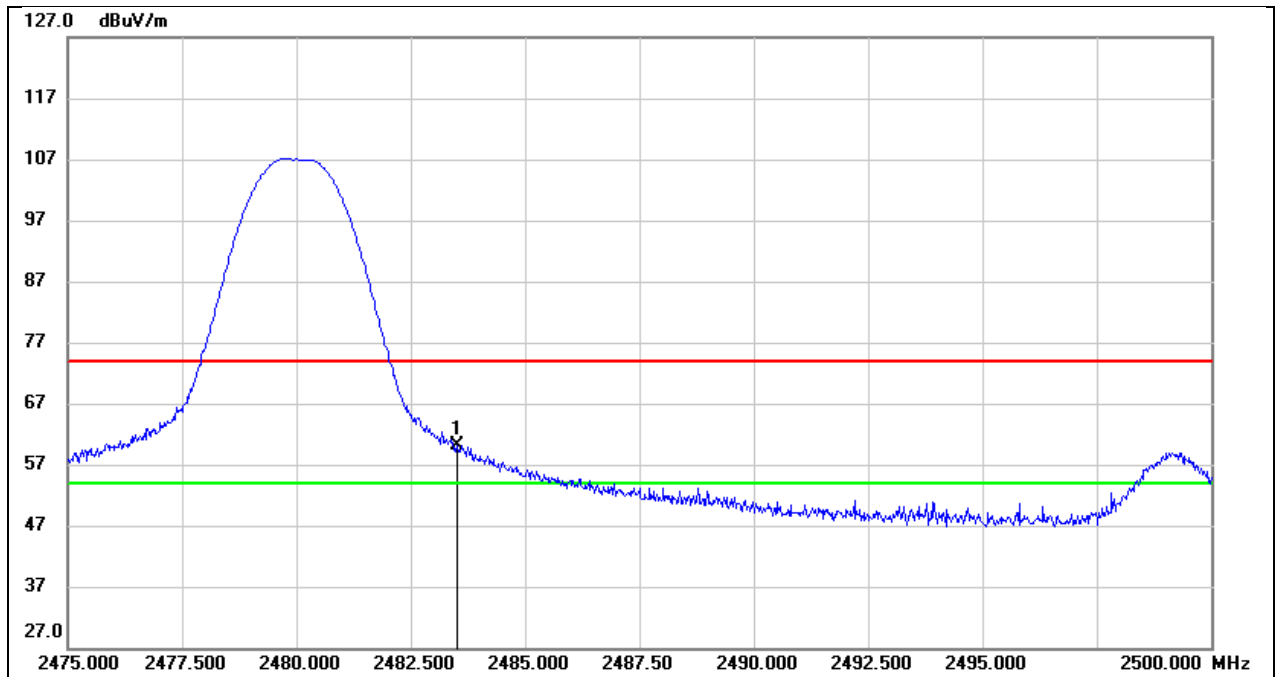

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	27.14	32.94	60.08	74.00	-13.92	peak


Test Mode:	BLE 500k AV	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

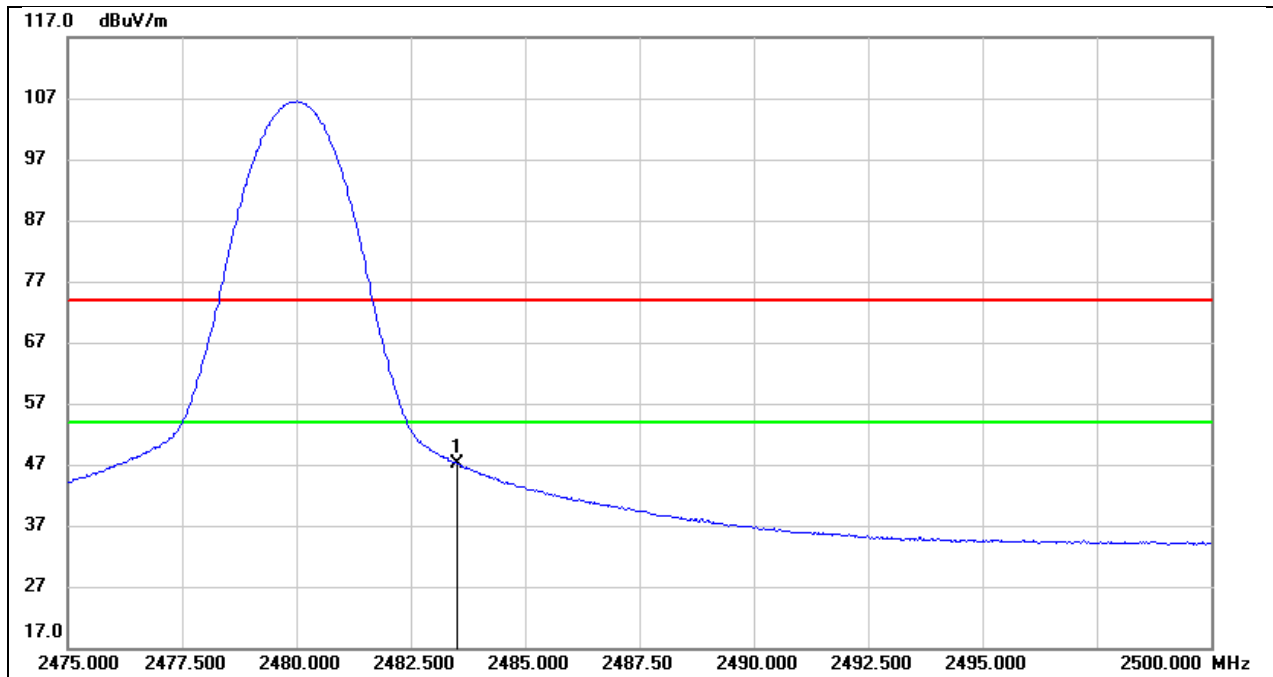

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	14.22	32.94	47.16	54.00	-6.84	AVG


8.2. SPURIOUS EMISSIONS(1 GHZ~3 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

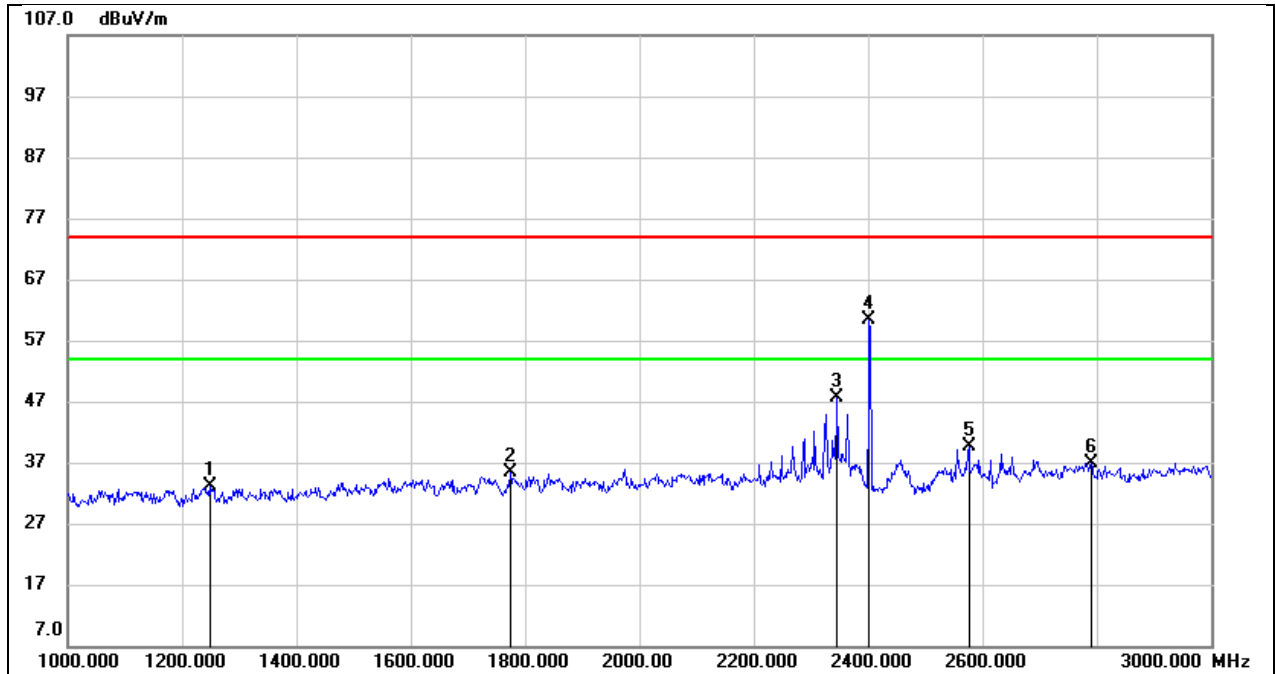


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1248.000	45.67	-12.59	33.08	74.00	-40.92	peak
2	1774.000	45.66	-10.36	35.30	74.00	-38.70	peak
3	2346.000	55.40	-7.80	47.60	74.00	-26.40	peak
4	2402.000	67.85	-7.40	60.45	/	/	fundamental
5	2576.000	47.25	-7.64	39.61	74.00	-34.39	peak
6	2790.000	43.83	-6.85	36.98	74.00	-37.02	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

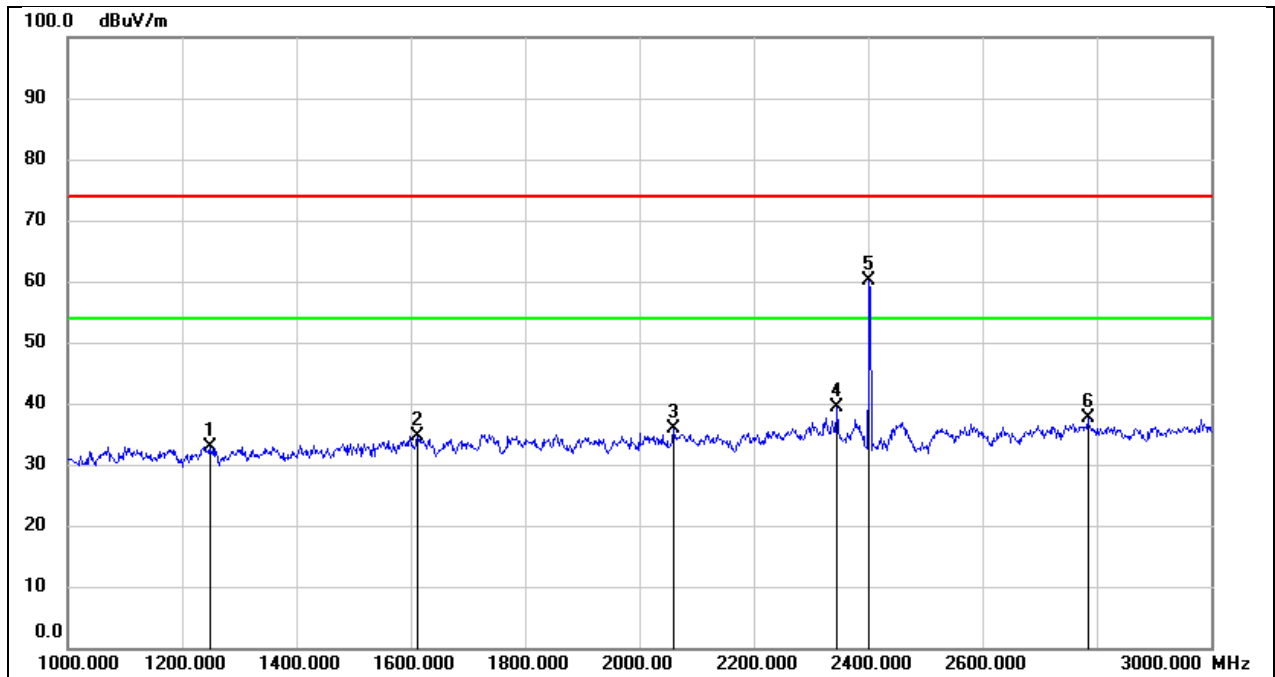


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1248.000	45.58	-12.59	32.99	74.00	-41.01	peak
2	1612.000	45.75	-11.11	34.64	74.00	-39.36	peak
3	2060.000	45.65	-9.74	35.91	74.00	-38.09	peak
4	2346.000	47.23	-7.80	39.43	74.00	-34.57	peak
5	2402.000	67.64	-7.40	60.24	/	/	fundamental
6	2784.000	44.42	-6.87	37.55	74.00	-36.45	peak

Test Mode:	BLE 1M	Frequency(MHz):	2442
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

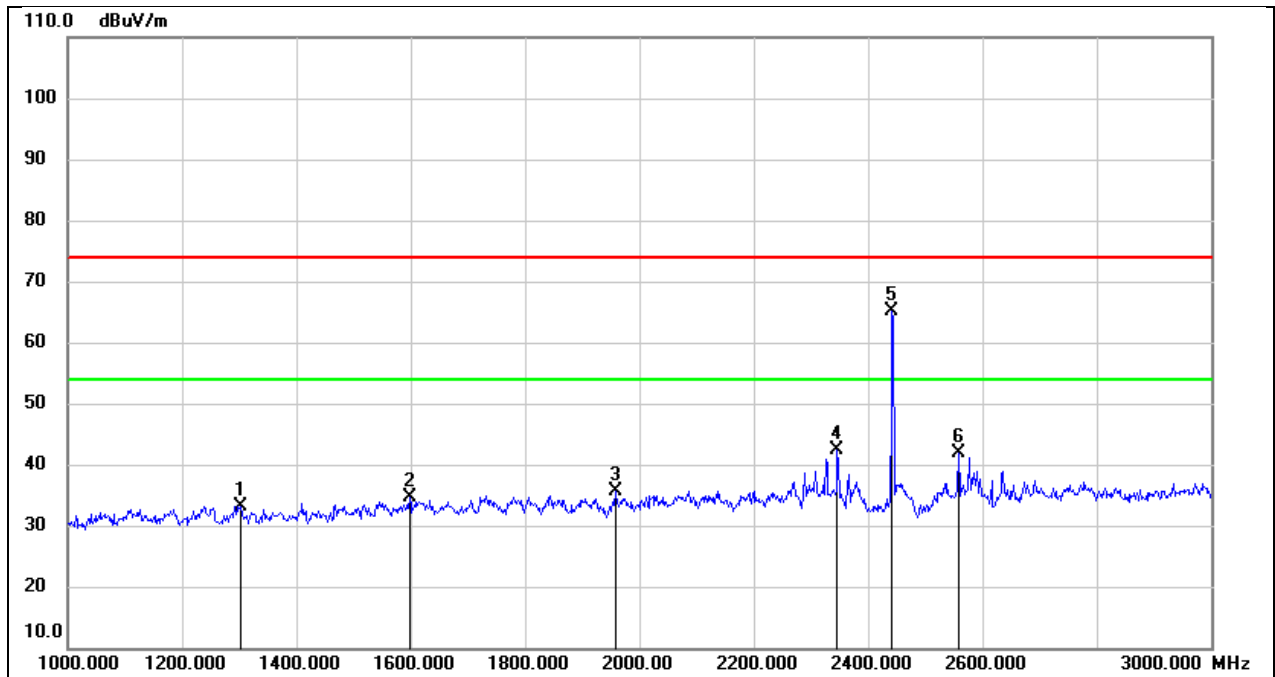


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1302.000	45.75	-12.52	33.23	74.00	-40.77	peak
2	1598.000	45.69	-11.18	34.51	74.00	-39.49	peak
3	1958.000	45.85	-10.14	35.71	74.00	-38.29	peak
4	2346.000	50.16	-7.80	42.36	74.00	-31.64	peak
5	2442.000	72.66	-7.44	65.22	/	/	fundamental
6	2558.000	49.49	-7.61	41.88	74.00	-32.12	peak

Test Mode:	BLE 1M	Frequency(MHz):	2442
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

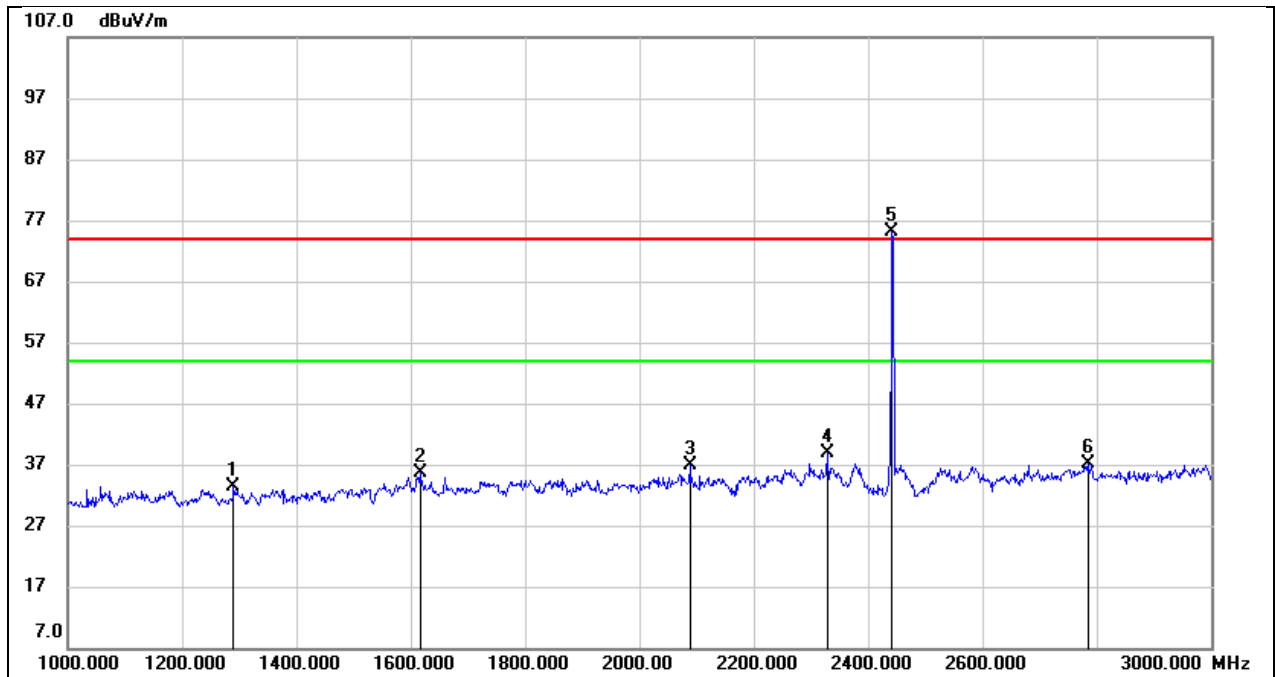


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1290.000	45.91	-12.53	33.38	74.00	-40.62	peak
2	1616.000	46.69	-11.09	35.60	74.00	-38.40	peak
3	2088.000	46.50	-9.57	36.93	74.00	-37.07	peak
4	2328.000	46.70	-7.94	38.76	74.00	-35.24	peak
5	2442.000	82.59	-7.44	75.15	/	/	fundamental
6	2784.000	44.08	-6.87	37.21	74.00	-36.79	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

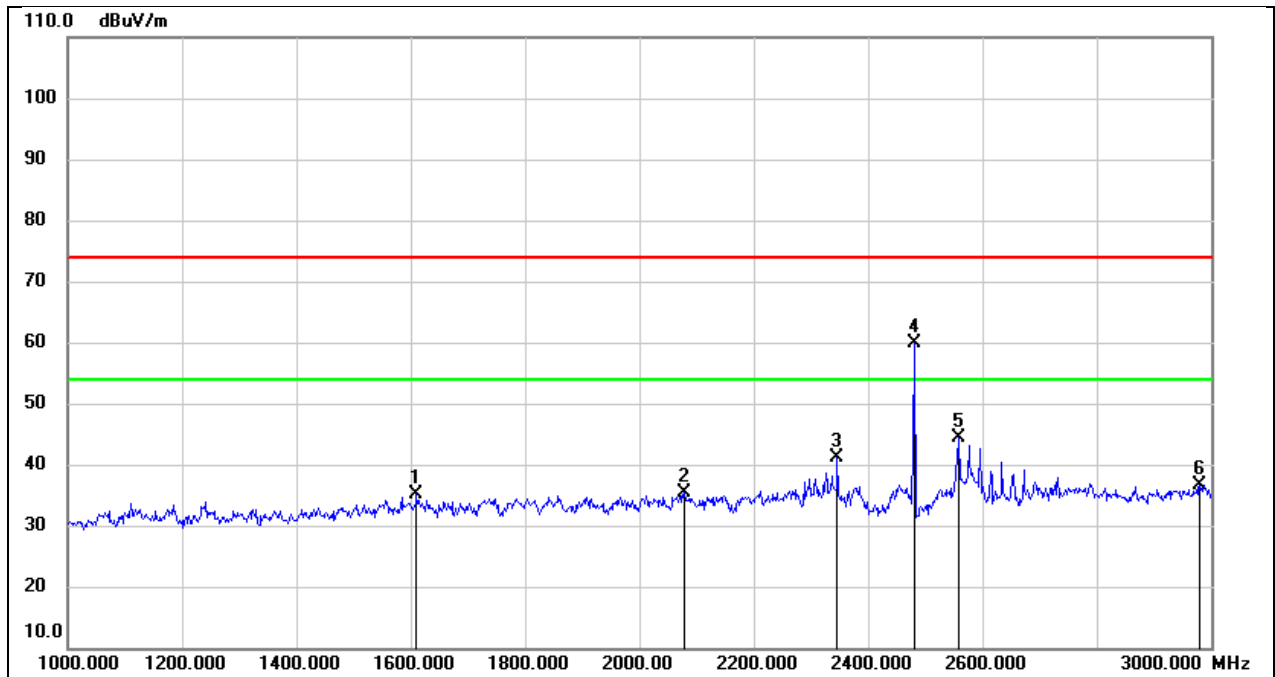

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1610.000	46.36	-11.13	35.23	74.00	-38.77	peak
2	2078.000	45.05	-9.64	35.41	74.00	-38.59	peak
3	2346.000	48.96	-7.80	41.16	74.00	-32.84	peak
4	2480.000	67.36	-7.47	59.89	/	/	fundamental
5	2558.000	52.11	-7.61	44.50	74.00	-29.50	peak
6	2980.000	42.62	-5.98	36.64	74.00	-37.36	peak


Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

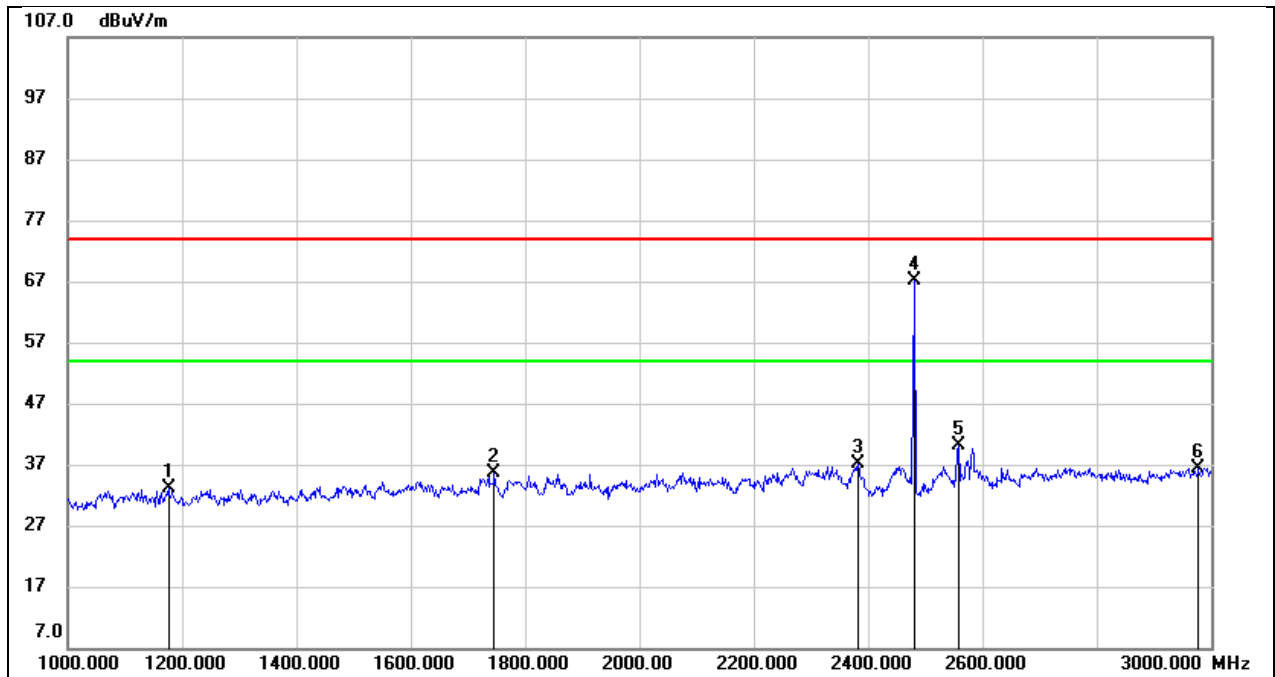

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	1176.000	46.08	-12.85	33.23	74.00	-40.77	peak
2	1746.000	46.03	-10.49	35.54	74.00	-38.46	peak
3	2382.000	44.62	-7.53	37.09	74.00	-36.91	peak
4	2480.000	74.58	-7.47	67.11	/	/	fundamental
5	2558.000	47.69	-7.61	40.08	74.00	-33.92	peak
6	2978.000	42.42	-6.00	36.42	74.00	-37.58	peak


8.3. SPURIOUS EMISSIONS(3 GHZ~18 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

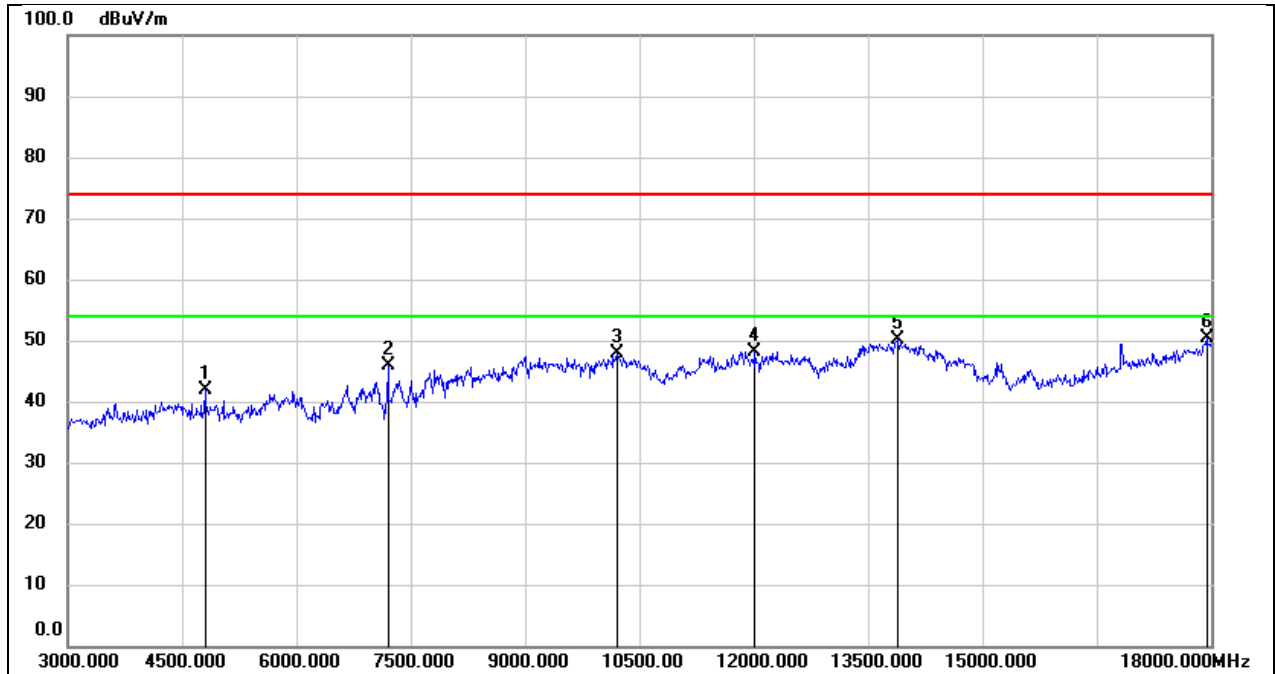


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.39	0.46	41.85	74.00	-32.15	peak
2	7200.000	39.59	6.26	45.85	74.00	-28.15	peak
3	10200.000	35.50	12.48	47.98	74.00	-26.02	peak
4	12015.000	29.73	18.49	48.22	74.00	-25.78	peak
5	13890.000	27.56	22.69	50.25	74.00	-23.75	peak
6	17940.000	23.74	26.61	50.35	74.00	-23.65	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

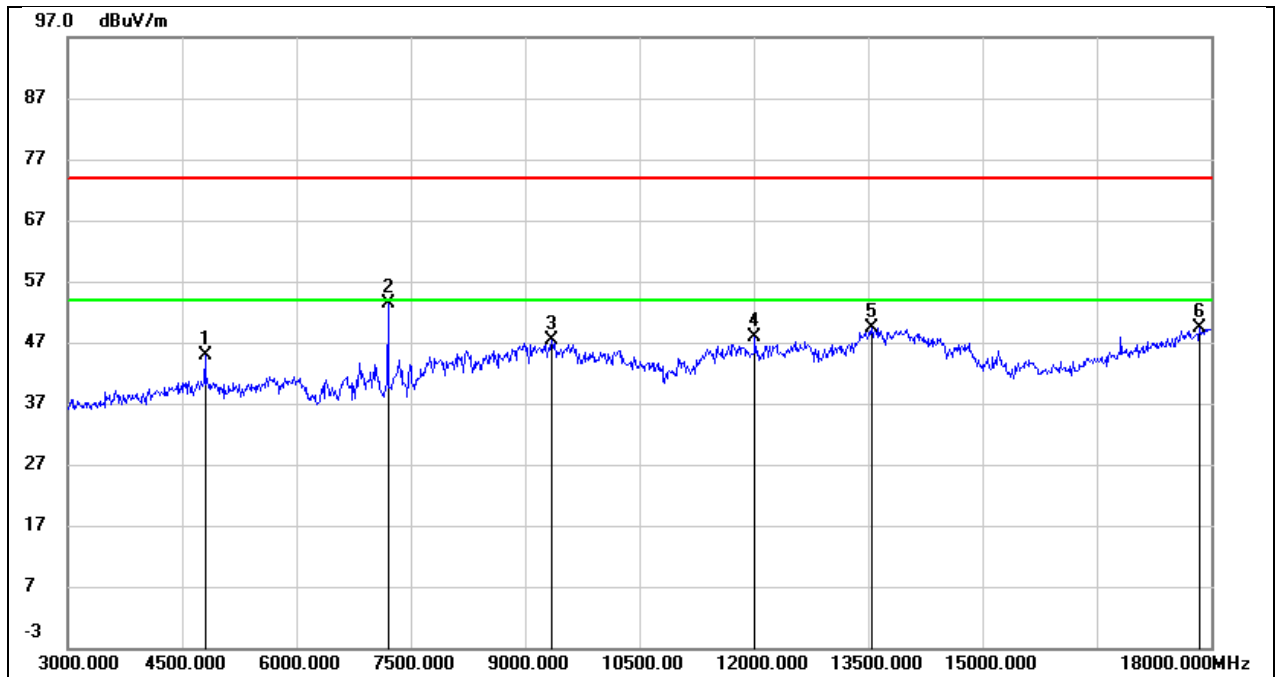


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.41	0.46	44.87	74.00	-29.13	peak
2*	7200.000	47.01	6.26	53.27	/	/	peak
3	9345.000	37.07	10.32	47.39	74.00	-26.61	peak
4	12015.000	29.34	18.49	47.83	74.00	-26.17	peak
5	13545.000	27.81	21.68	49.49	74.00	-24.51	peak
6	17850.000	23.13	26.28	49.41	74.00	-24.59	peak

Test Mode:	BLE 1M	Frequency(MHz):	2442
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

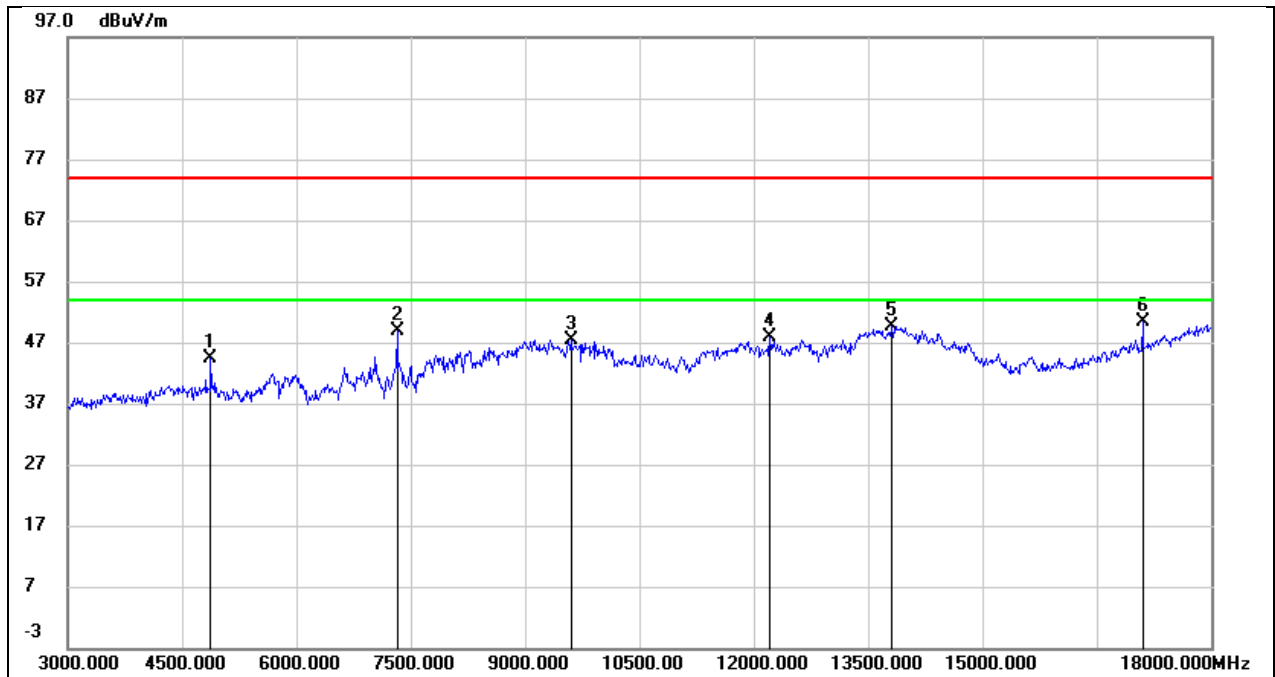


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.72	0.61	44.33	74.00	-29.67	peak
2	7320.000	41.98	6.98	48.96	74.00	-25.04	peak
3	9600.000	36.38	11.06	47.44	74.00	-26.56	peak
4	12210.000	29.64	18.35	47.99	74.00	-26.01	peak
5	13815.000	26.92	22.65	49.57	74.00	-24.43	peak
6	17100.000	28.01	22.25	50.26	74.00	-23.74	peak

Test Mode:	BLE 1M	Frequency(MHz):	2442
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

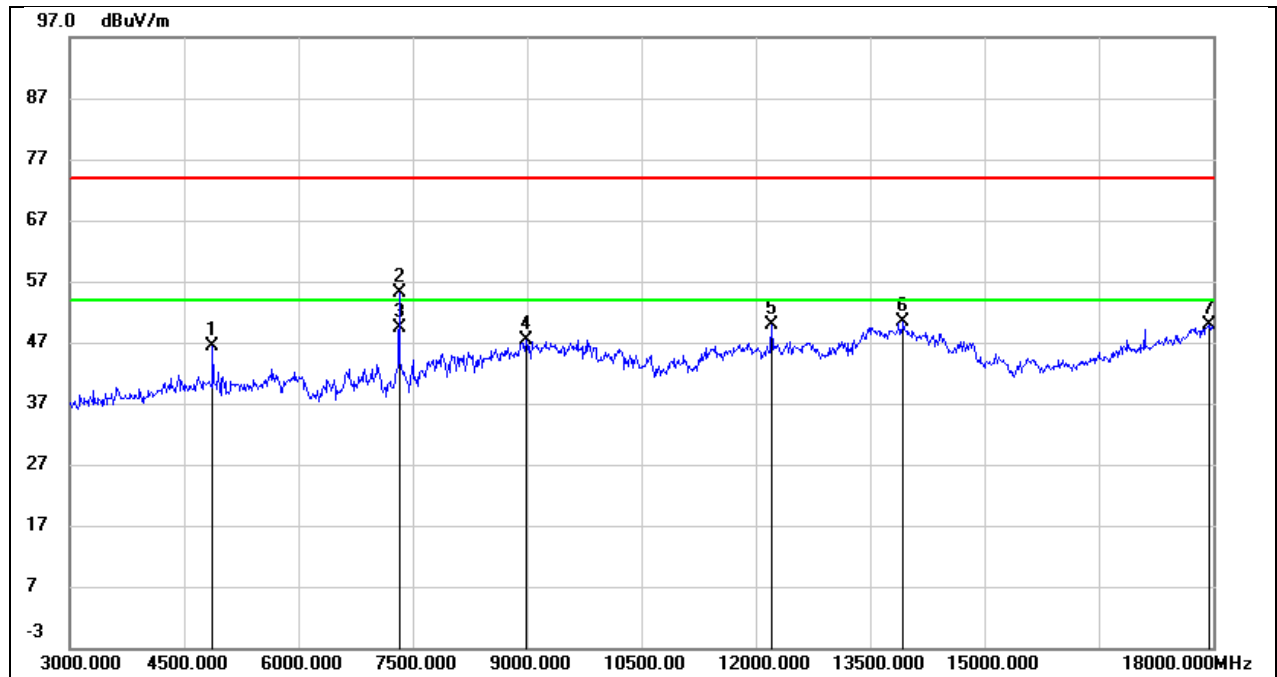


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	45.76	0.61	46.37	74.00	-27.63	peak
2	7320.000	48.24	6.98	55.22	74.00	-18.78	peak
3	7320.000	42.32	6.98	49.30	54.00	-4.70	AVG
4	8985.000	36.51	10.97	47.48	74.00	-26.52	peak
5	12210.000	31.53	18.35	49.88	74.00	-24.12	peak
6	13935.000	27.59	22.72	50.31	74.00	-23.69	peak
7	17940.000	23.39	26.61	50.00	74.00	-24.00	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

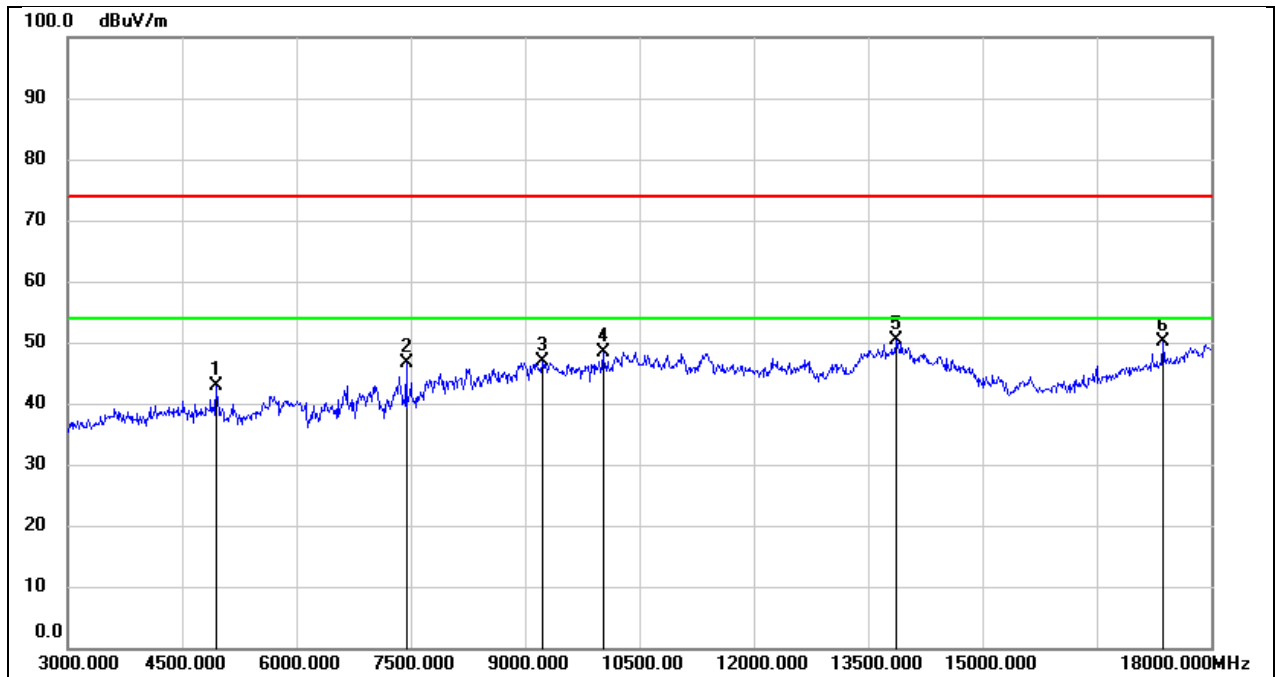


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.18	0.74	42.92	74.00	-31.08	peak
2	7440.000	39.16	7.36	46.52	74.00	-27.48	peak
3	9225.000	36.81	10.07	46.88	74.00	-27.12	peak
4	10020.000	35.94	12.48	48.42	74.00	-25.58	peak
5	13875.000	27.65	22.68	50.33	74.00	-23.67	peak
6	17370.000	26.69	23.42	50.11	74.00	-23.89	peak

Test Mode:	BLE 1M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

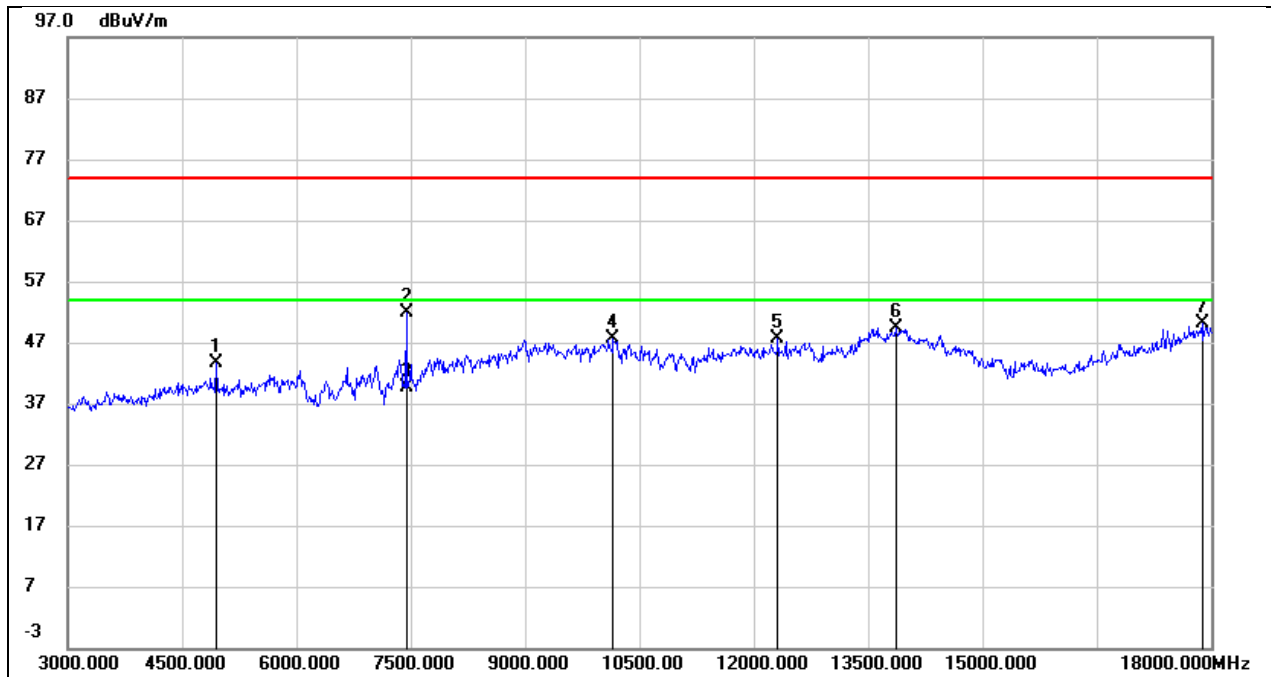


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.78	0.74	43.52	74.00	-30.48	peak
2	7440.000	44.43	7.36	51.79	74.00	-22.21	peak
3	7440.000	32.24	7.36	39.60	54.00	-14.40	AVG
4	10155.000	35.19	12.48	47.67	74.00	-26.33	peak
5	12315.000	28.84	18.71	47.55	74.00	-26.45	peak
6	13860.000	26.80	22.68	49.48	74.00	-24.52	peak
7	17880.000	23.75	26.39	50.14	74.00	-23.86	peak

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

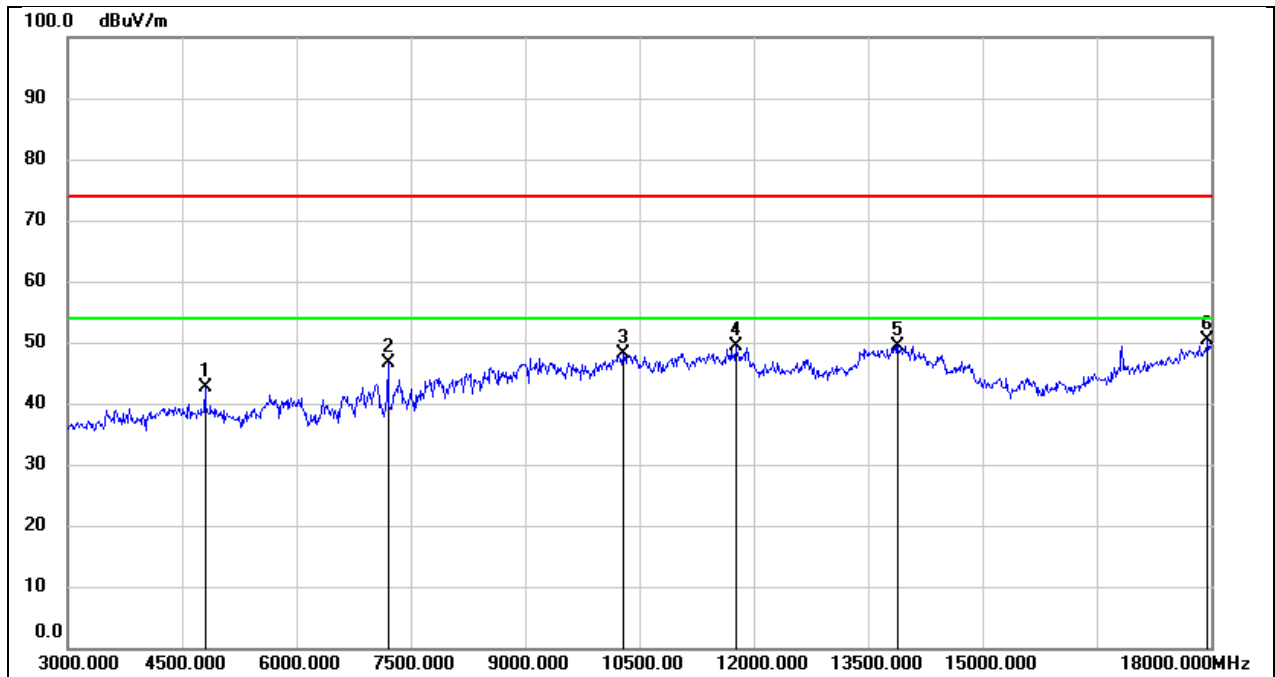


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.12	0.46	42.58	74.00	-31.42	peak
2	7200.000	40.27	6.26	46.53	74.00	-27.47	peak
3	10290.000	35.21	12.93	48.14	74.00	-25.86	peak
4	11760.000	31.76	17.51	49.27	74.00	-24.73	peak
5	13890.000	26.76	22.69	49.45	74.00	-24.55	peak
6	17955.000	23.84	26.66	50.50	74.00	-23.50	peak

Test Mode:	BLE 2M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

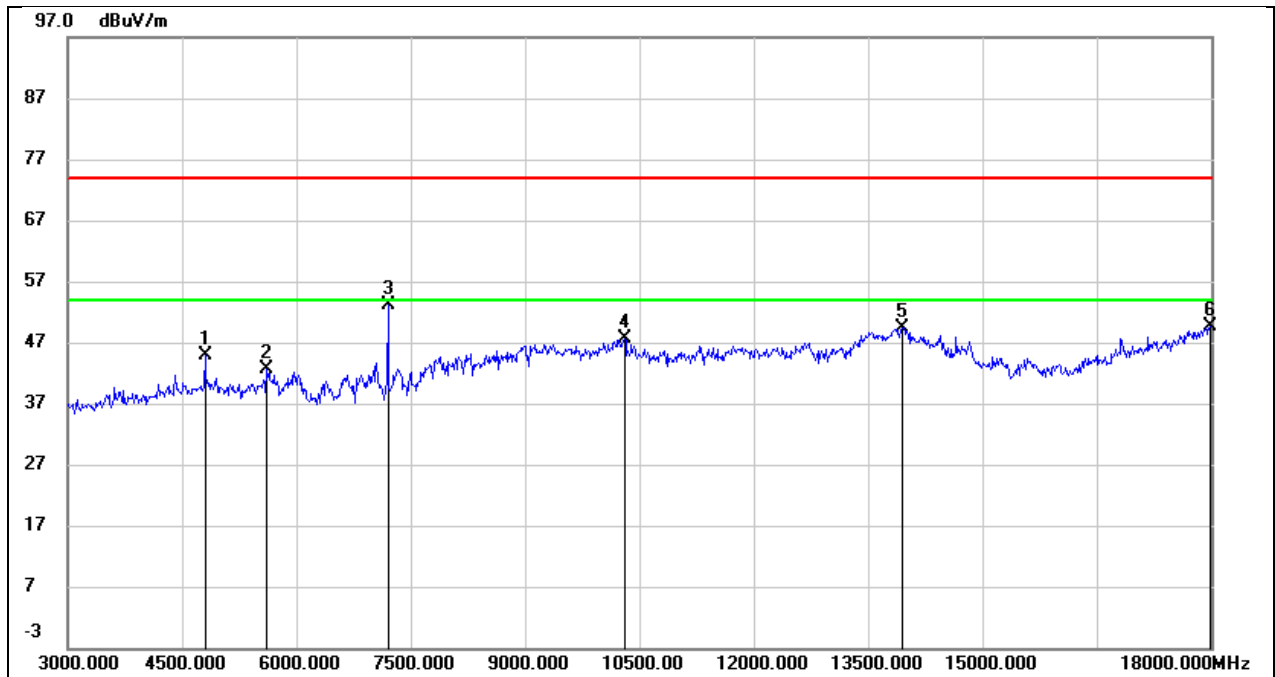


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.35	0.46	44.81	74.00	-29.19	peak
2	5610.000	39.79	2.78	42.57	74.00	-31.43	peak
3*	7200.000	46.79	6.26	53.05	/	/	peak
4	10305.000	34.70	13.00	47.70	74.00	-26.30	peak
5	13950.000	26.58	22.73	49.31	74.00	-24.69	peak
6	17985.000	22.90	26.77	49.67	74.00	-24.33	peak

Test Mode:	BLE 2M	Frequency(MHz):	2442
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

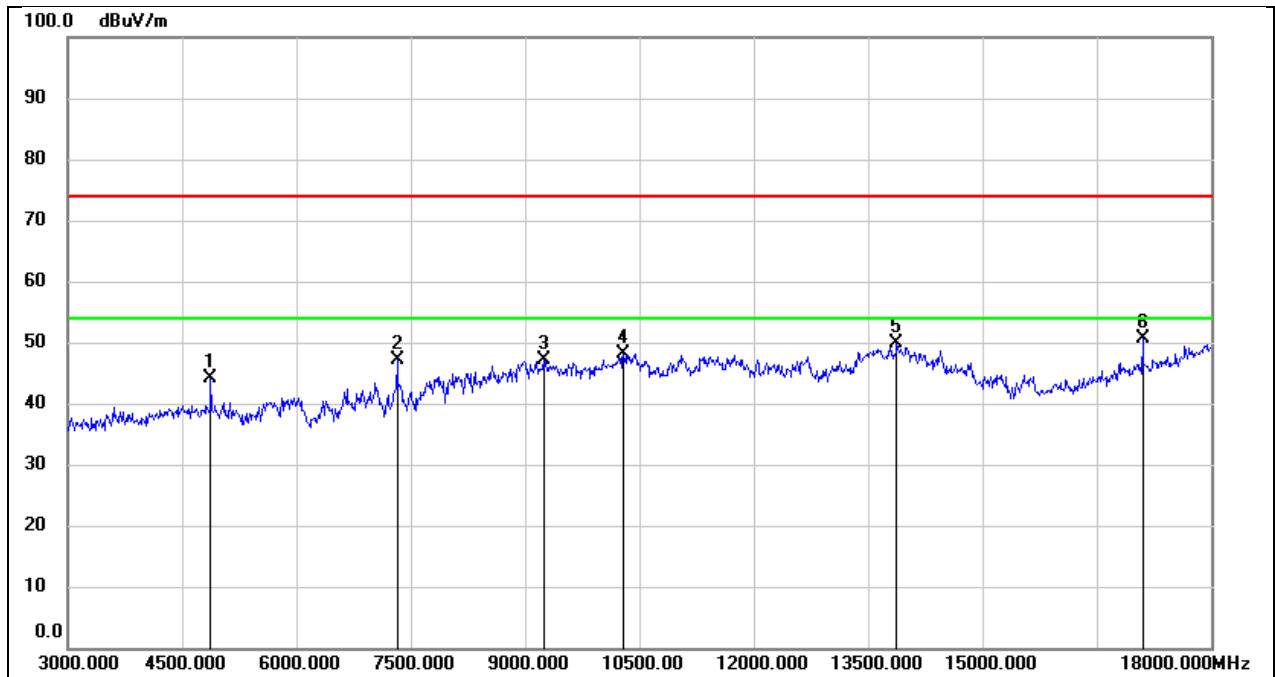


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.62	0.61	44.23	74.00	-29.77	peak
2	7320.000	40.04	6.98	47.02	74.00	-26.98	peak
3	9240.000	37.06	10.10	47.16	74.00	-26.84	peak
4	10290.000	35.32	12.93	48.25	74.00	-25.75	peak
5	13875.000	27.12	22.68	49.80	74.00	-24.20	peak
6	17100.000	28.35	22.25	50.60	74.00	-23.40	peak

Test Mode:	BLE 2M	Frequency(MHz):	2442
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

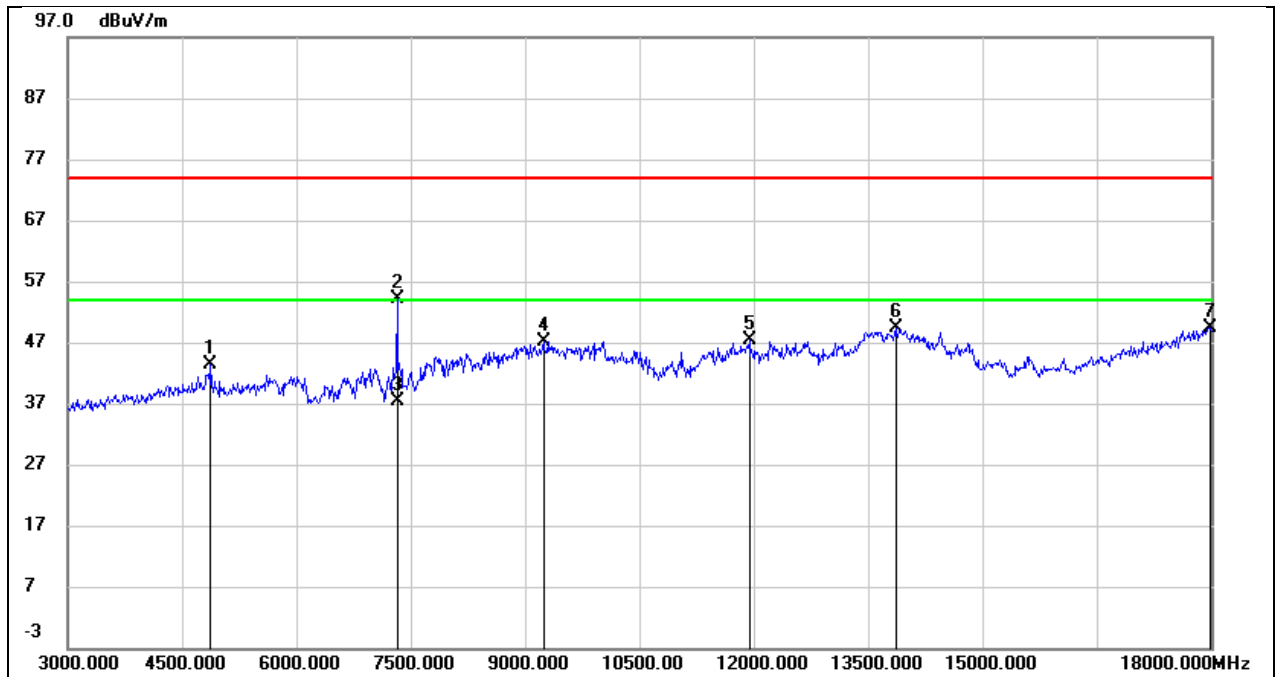


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	42.73	0.61	43.34	74.00	-30.66	peak
2	7320.000	47.20	6.98	54.18	74.00	-19.82	peak
3	7320.000	30.42	6.98	37.40	54.00	-16.60	AVG
4	9240.000	37.13	10.10	47.23	74.00	-26.77	peak
5	11940.000	29.14	18.24	47.38	74.00	-26.62	peak
6	13860.000	26.65	22.68	49.33	74.00	-24.67	peak
7	17985.000	22.73	26.77	49.50	74.00	-24.50	peak

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

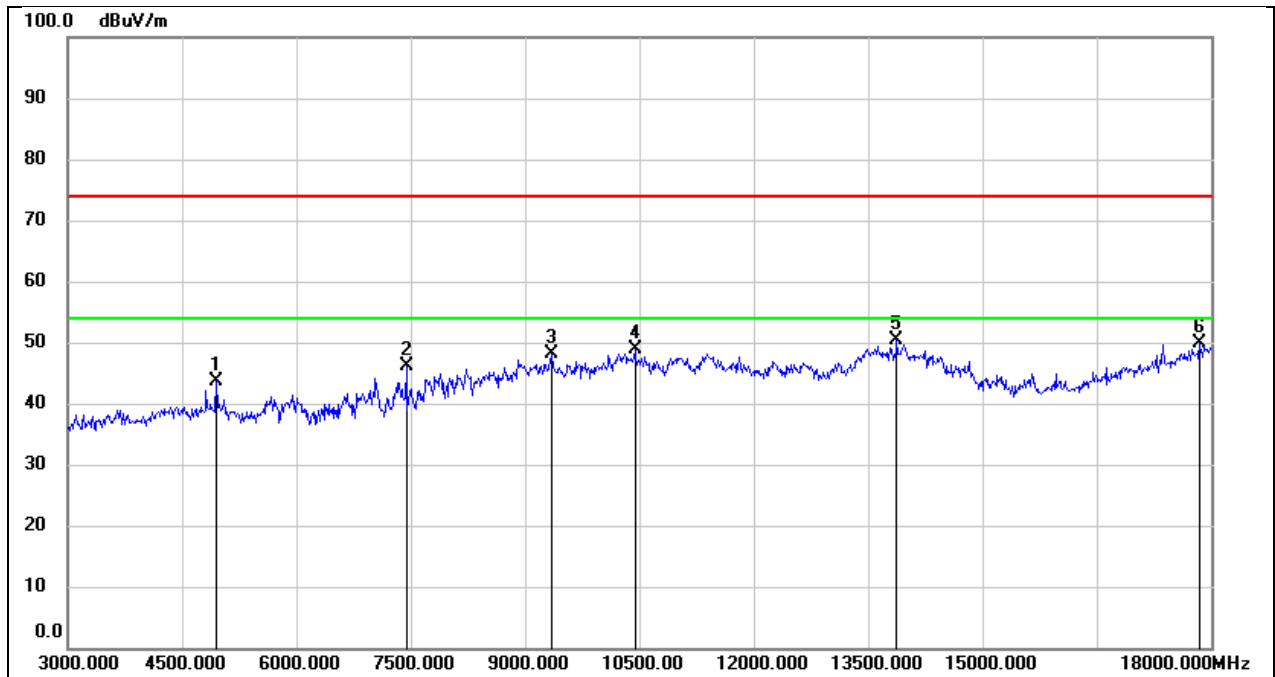


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.93	0.74	43.67	74.00	-30.33	peak
2	7440.000	38.70	7.36	46.06	74.00	-27.94	peak
3	9345.000	37.72	10.32	48.04	74.00	-25.96	peak
4	10440.000	35.38	13.56	48.94	74.00	-25.06	peak
5	13875.000	27.61	22.68	50.29	74.00	-23.71	peak
6	17850.000	23.66	26.28	49.94	74.00	-24.06	peak

Test Mode:	BLE 2M	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

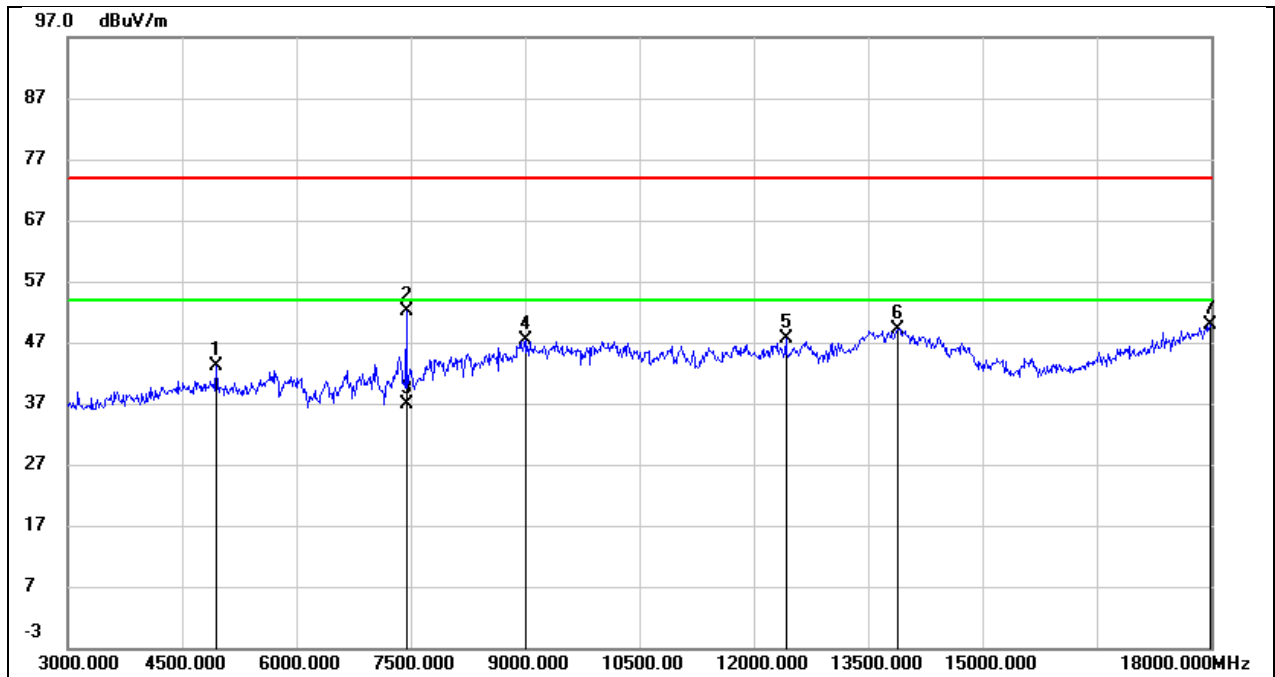


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.29	0.74	43.03	74.00	-30.97	peak
2	7440.000	44.76	7.36	52.12	74.00	-21.88	peak
3	7440.000	29.44	7.36	36.80	54.00	-17.20	AVG
4	9000.000	36.25	11.17	47.42	74.00	-26.58	peak
5	12420.000	28.63	18.90	47.53	74.00	-26.47	peak
6	13890.000	26.55	22.69	49.24	74.00	-24.76	peak
7	17985.000	23.04	26.77	49.81	74.00	-24.19	peak

Test Mode:	BLE 125k	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

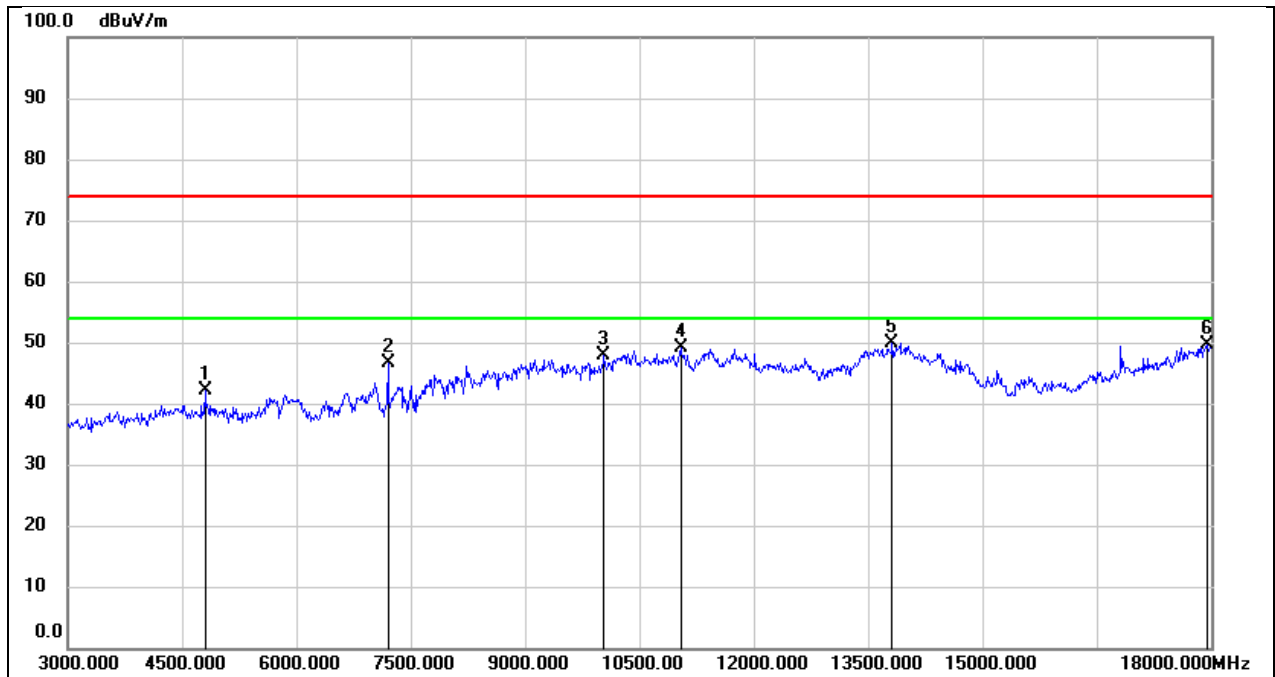


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	41.64	0.46	42.10	74.00	-31.90	peak
2	7200.000	40.36	6.26	46.62	74.00	-27.38	peak
3	10035.000	35.50	12.48	47.98	74.00	-26.02	peak
4	11040.000	34.22	15.01	49.23	74.00	-24.77	peak
5	13815.000	27.30	22.65	49.95	74.00	-24.05	peak
6	17940.000	22.98	26.61	49.59	74.00	-24.41	peak

Test Mode:	BLE 125k	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

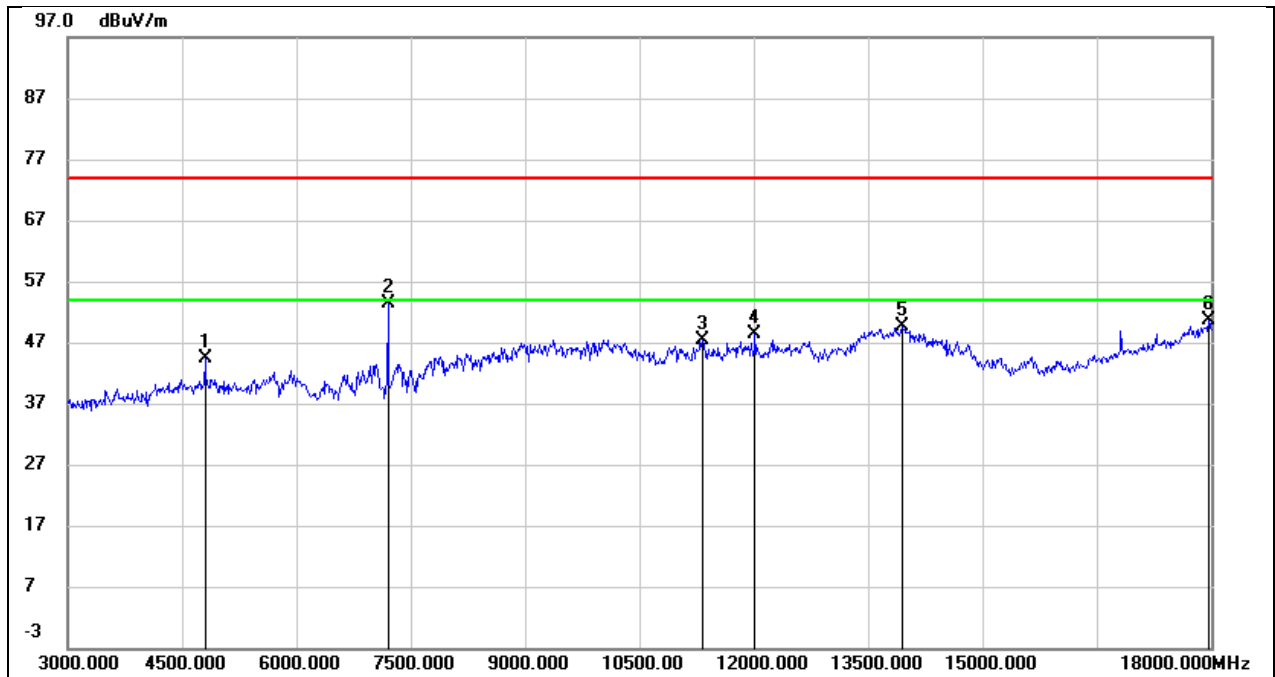


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	43.96	0.46	44.42	74.00	-29.58	peak
2*	7200.000	47.19	6.26	53.45	/	/	peak
3	11325.000	31.40	16.10	47.50	74.00	-26.50	peak
4	12015.000	29.84	18.49	48.33	74.00	-25.67	peak
5	13950.000	26.92	22.73	49.65	74.00	-24.35	peak
6	17970.000	23.80	26.72	50.52	74.00	-23.48	peak

Test Mode:	BLE 125k	Frequency(MHz):	2442
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

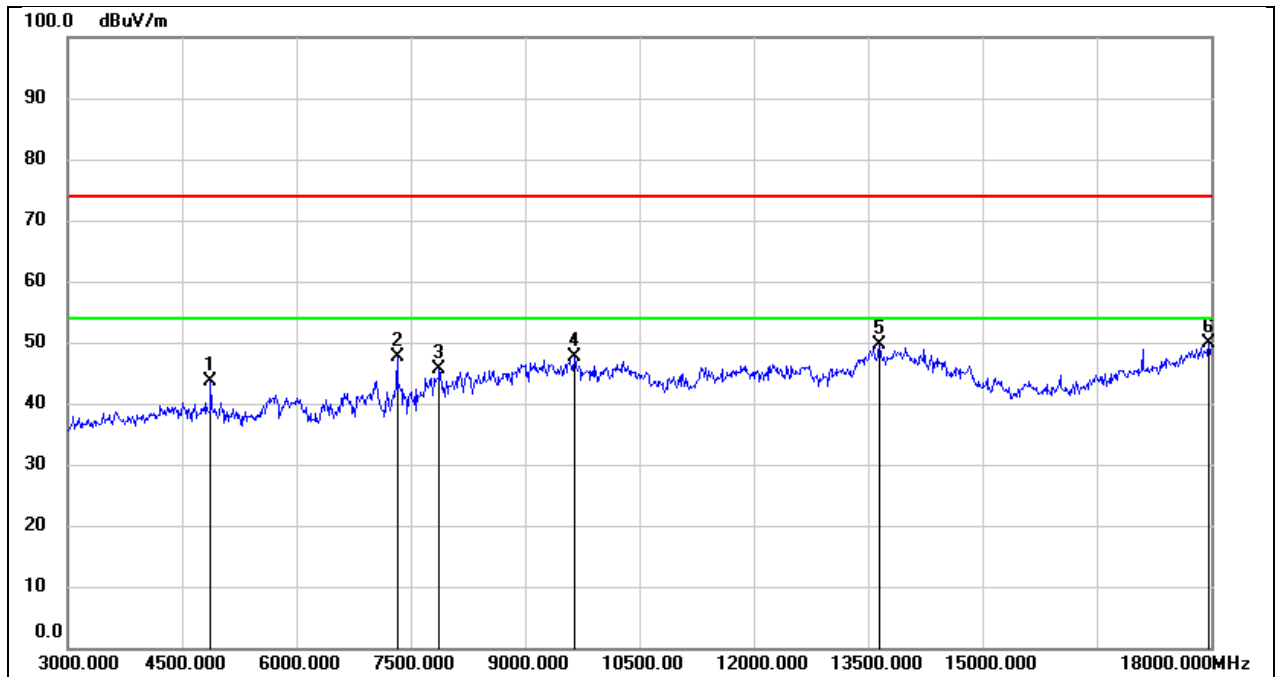


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.03	0.61	43.64	74.00	-30.36	peak
2	7320.000	40.64	6.98	47.62	74.00	-26.38	peak
3	7875.000	38.38	7.33	45.71	74.00	-28.29	peak
4	9645.000	36.35	11.17	47.52	74.00	-26.48	peak
5	13650.000	27.73	21.90	49.63	74.00	-24.37	peak
6	17970.000	23.06	26.72	49.78	74.00	-24.22	peak

Test Mode:	BLE 125k	Frequency(MHz):	2442
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

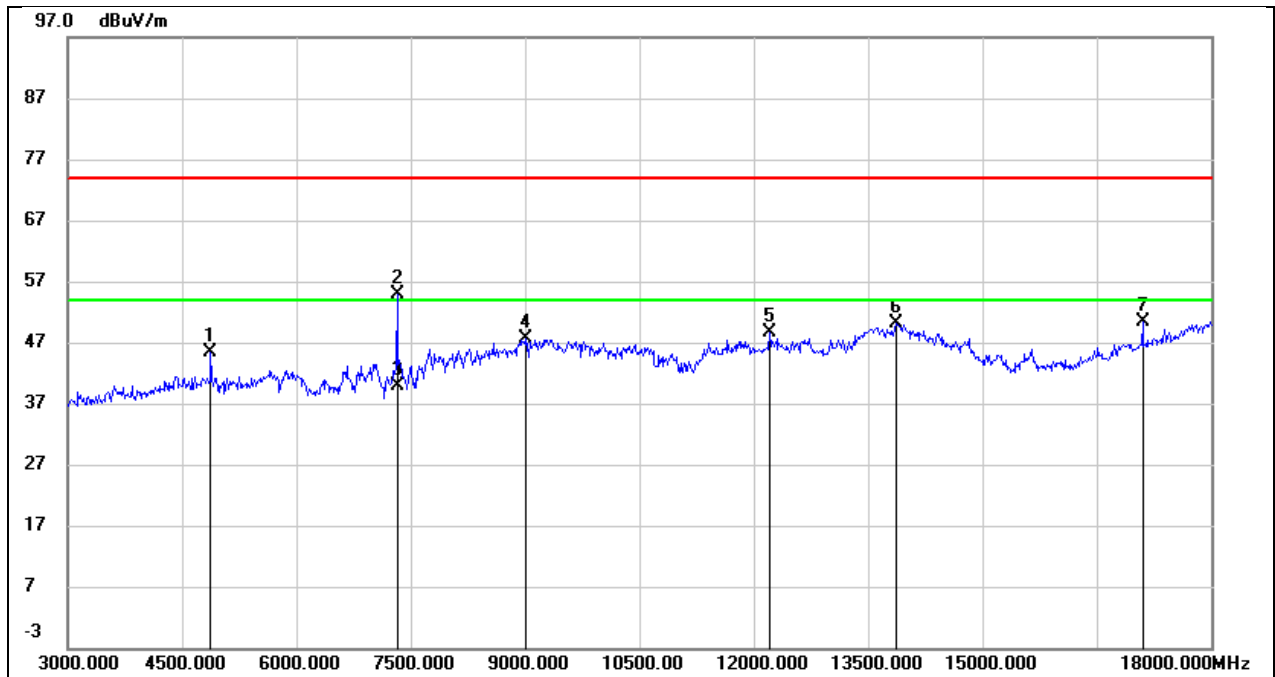


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	44.67	0.61	45.28	74.00	-28.72	peak
2*	7320.000	47.84	6.98	54.82	/	/	peak
3	7320.000	32.82	6.98	39.80	54.00	-14.20	AVG
4	9015.000	36.67	11.08	47.75	74.00	-26.25	peak
5	12210.000	30.32	18.35	48.67	74.00	-25.33	peak
6	13860.000	27.38	22.68	50.06	74.00	-23.94	peak
7	17100.000	28.12	22.25	50.37	74.00	-23.63	peak

Test Mode:	BLE 125k	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

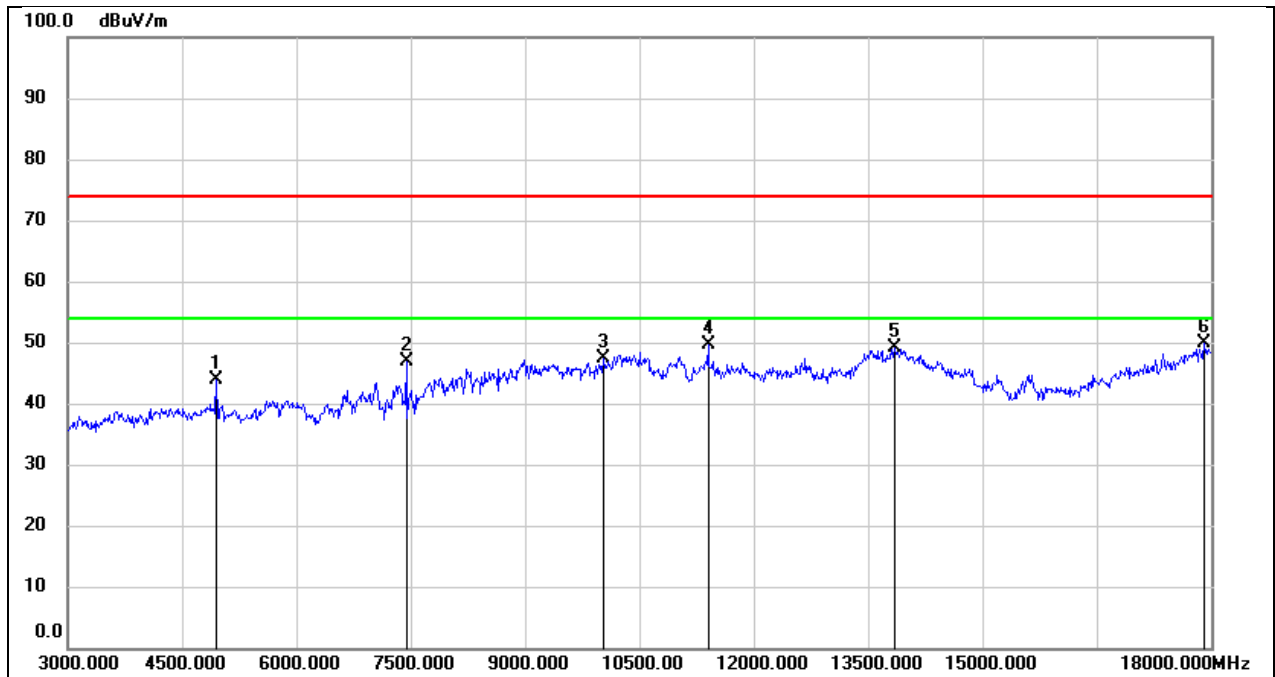


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	43.15	0.74	43.89	74.00	-30.11	peak
2	7440.000	39.61	7.36	46.97	74.00	-27.03	peak
3	10035.000	34.93	12.48	47.41	74.00	-26.59	peak
4	11400.000	33.10	16.54	49.64	74.00	-24.36	peak
5	13845.000	26.51	22.67	49.18	74.00	-24.82	peak
6	17910.000	23.32	26.50	49.82	74.00	-24.18	peak

Test Mode:	BLE 125k	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

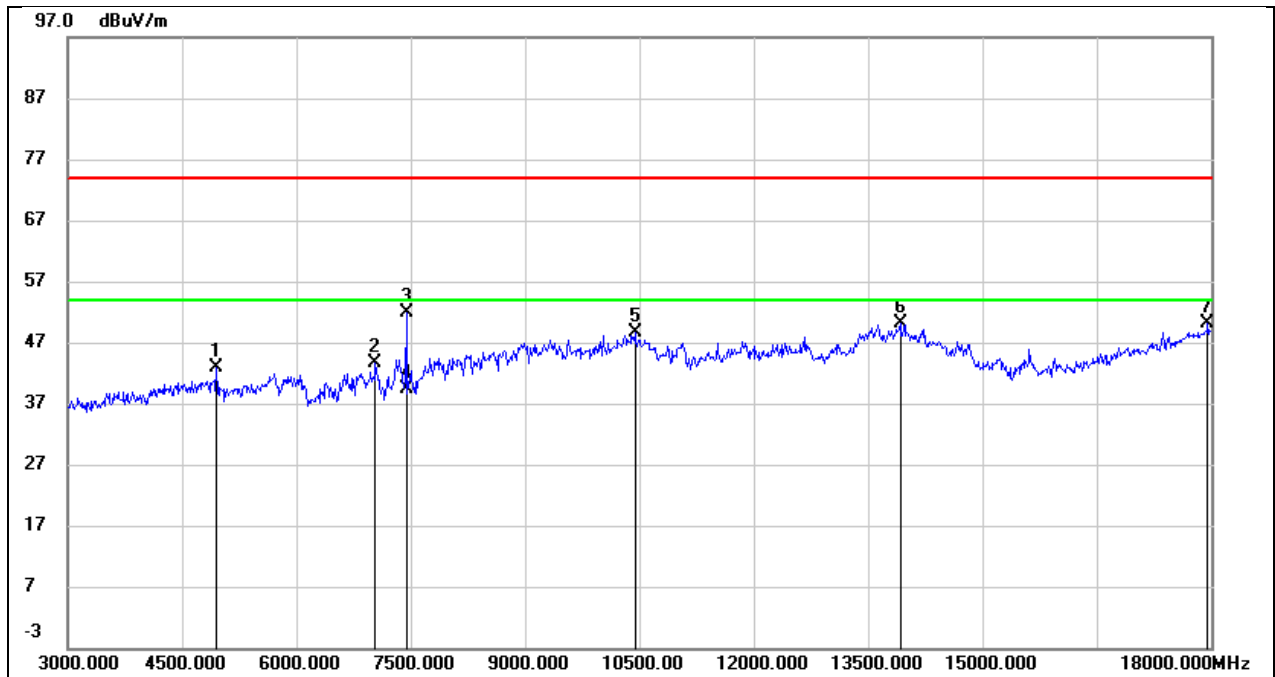


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.21	0.74	42.95	74.00	-31.05	peak
2	7035.000	36.41	7.28	43.69	74.00	-30.31	peak
3	7440.000	44.40	7.36	51.76	74.00	-22.24	peak
4	7440.000	32.14	7.36	39.50	54.00	-14.50	AVG
5	10440.000	34.97	13.56	48.53	74.00	-25.47	peak
6	13920.000	27.53	22.71	50.24	74.00	-23.76	peak
7	17955.000	23.49	26.66	50.15	74.00	-23.85	peak

Test Mode:	BLE 500k	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

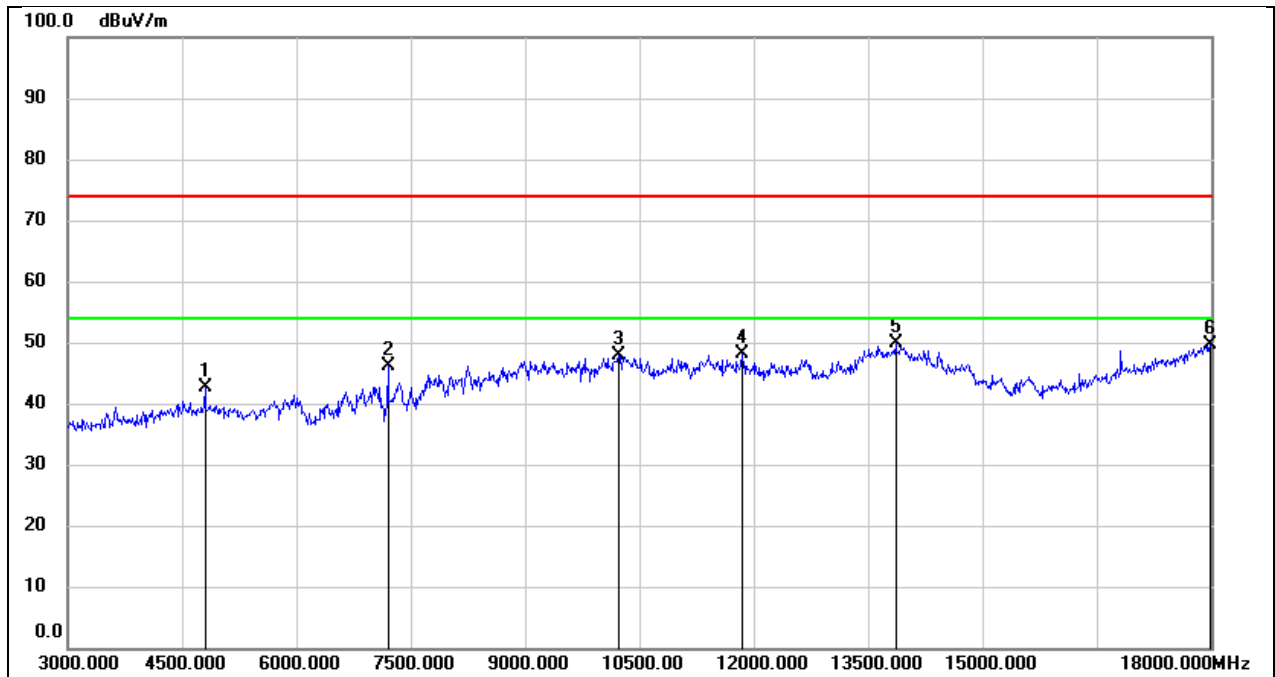


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	42.19	0.46	42.65	74.00	-31.35	peak
2	7200.000	39.97	6.26	46.23	74.00	-27.77	peak
3	10230.000	35.18	12.62	47.80	74.00	-26.20	peak
4	11850.000	30.31	17.84	48.15	74.00	-25.85	peak
5	13860.000	27.09	22.68	49.77	74.00	-24.23	peak
6	17985.000	22.75	26.77	49.52	74.00	-24.48	peak

Test Mode:	BLE 500k	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

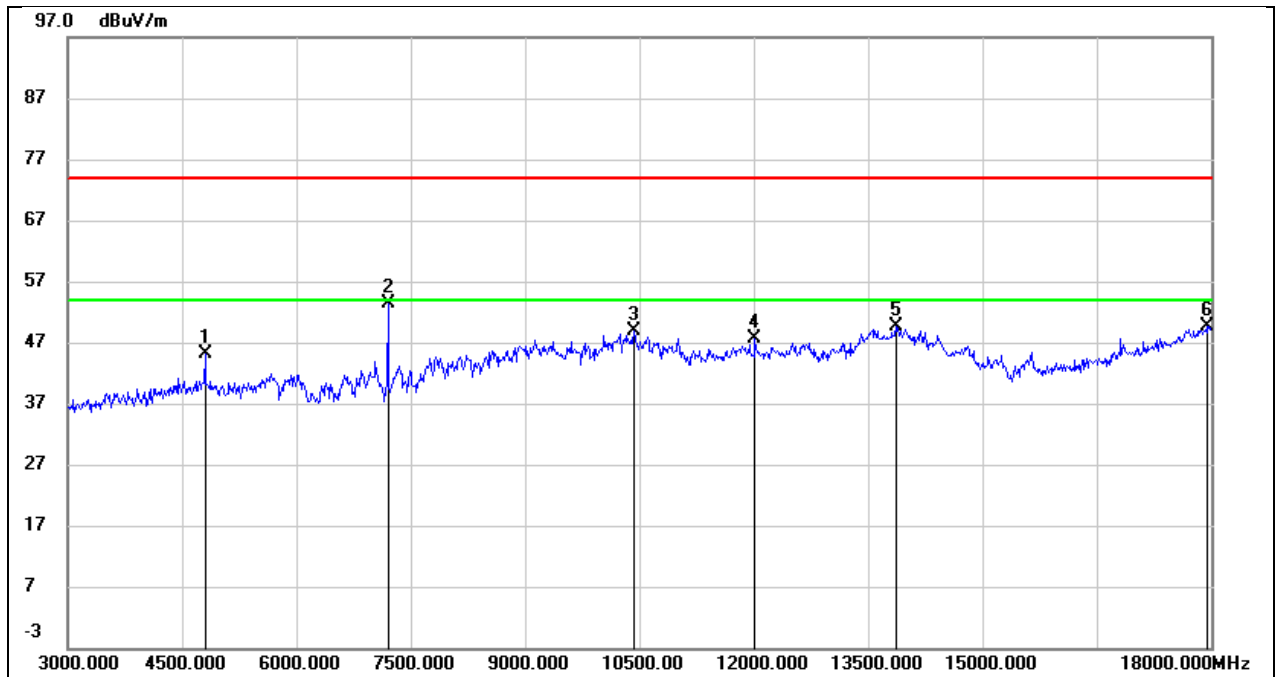


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4800.000	44.56	0.46	45.02	74.00	-28.98	peak
2*	7200.000	47.08	6.26	53.34	/	/	peak
3	10425.000	35.26	13.51	48.77	74.00	-25.23	peak
4	12015.000	29.17	18.49	47.66	74.00	-26.34	peak
5	13860.000	27.06	22.68	49.74	74.00	-24.26	peak
6	17940.000	23.13	26.61	49.74	74.00	-24.26	peak

Test Mode:	BLE 500k	Frequency(MHz):	2442
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

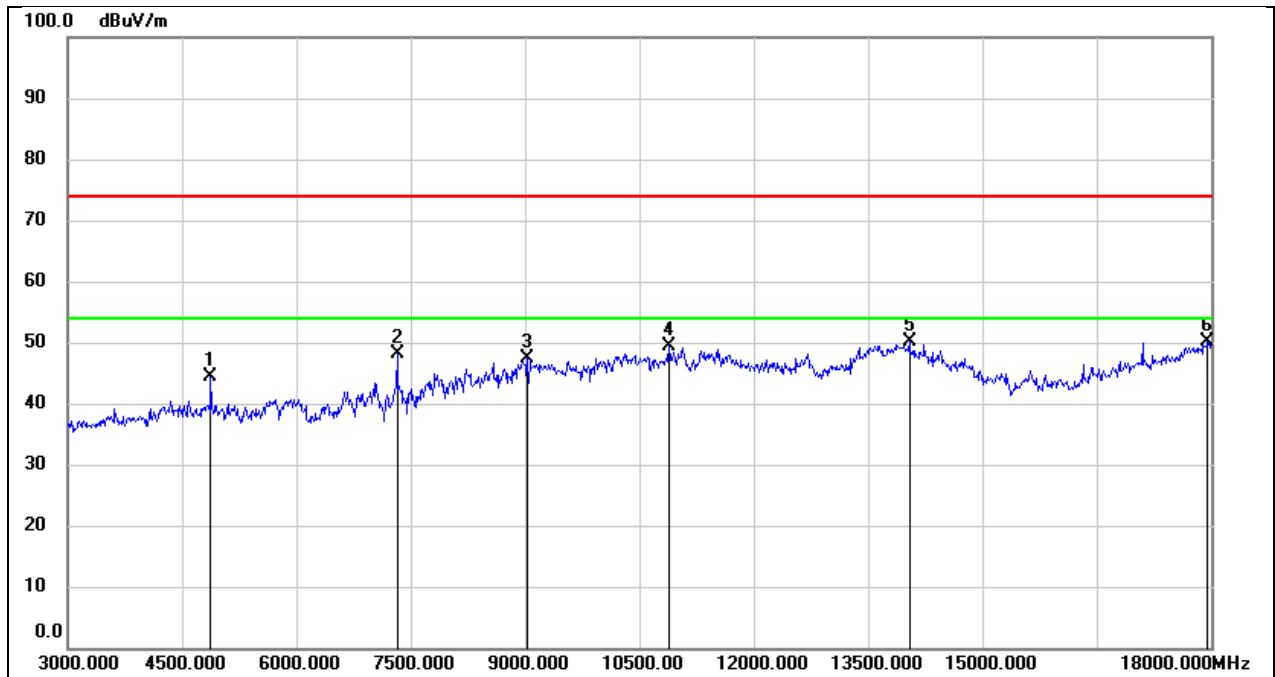


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.86	0.61	44.47	74.00	-29.53	peak
2	7320.000	41.12	6.98	48.10	74.00	-25.90	peak
3	9030.000	36.46	11.00	47.46	74.00	-26.54	peak
4	10890.000	34.97	14.39	49.36	74.00	-24.64	peak
5	14040.000	27.61	22.63	50.24	74.00	-23.76	peak
6	17955.000	23.42	26.66	50.08	74.00	-23.92	peak

Test Mode:	BLE 500k	Frequency(MHz):	2442
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

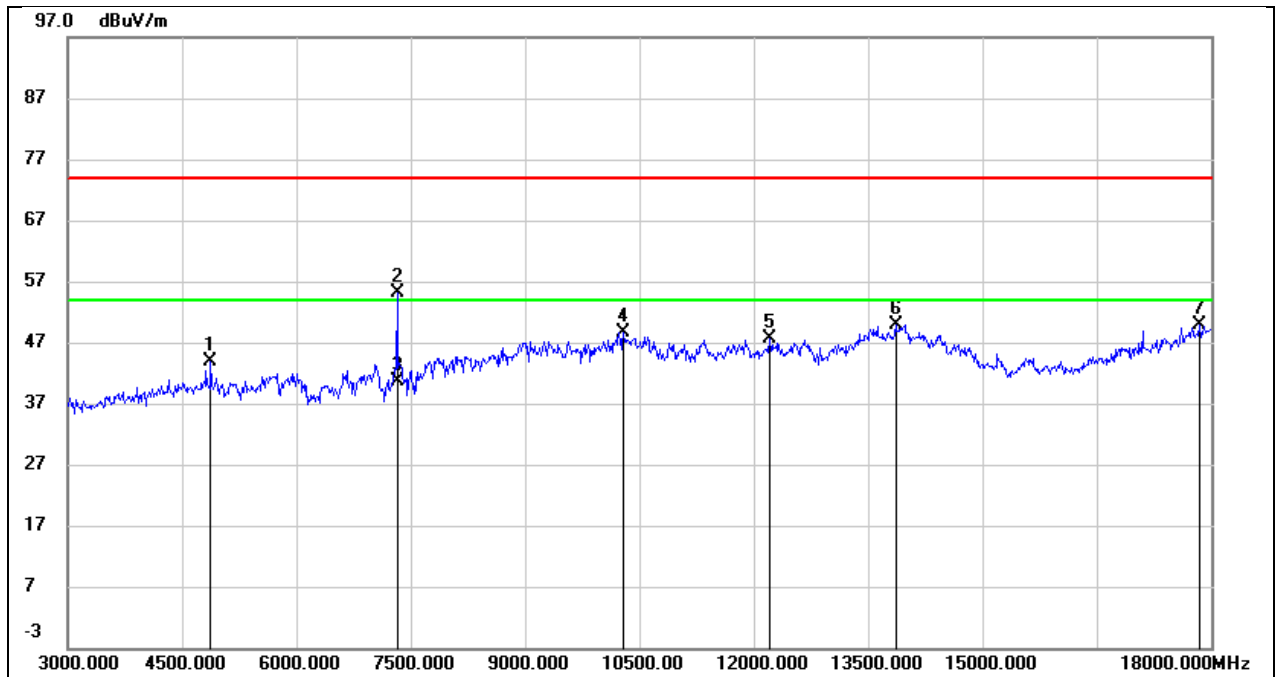


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4875.000	43.17	0.61	43.78	74.00	-30.22	peak
2	7320.000	48.07	6.98	55.05	74.00	-18.95	peak
3	7320.000	33.72	6.98	40.70	54.00	-13.30	AVG
4	10290.000	35.81	12.93	48.74	74.00	-25.26	peak
5	12210.000	29.17	18.35	47.52	74.00	-26.48	peak
6	13860.000	27.17	22.68	49.85	74.00	-24.15	peak
7	17850.000	23.65	26.28	49.93	74.00	-24.07	peak

Test Mode:	BLE 500k	Frequency(MHz):	2480
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

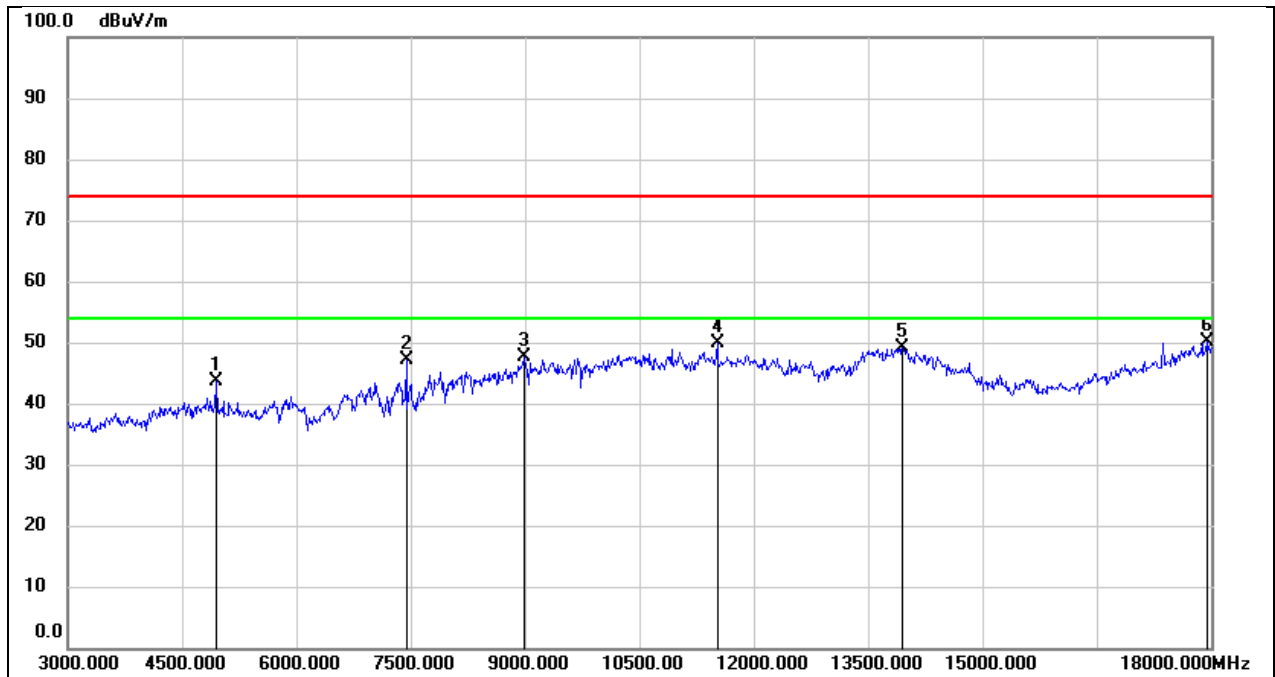

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	42.89	0.74	43.63	74.00	-30.37	peak
2	7440.000	39.84	7.36	47.20	74.00	-26.80	peak
3	8985.000	36.61	10.97	47.58	74.00	-26.42	peak
4	11520.000	33.03	16.91	49.94	74.00	-24.06	peak
5	13950.000	26.51	22.73	49.24	74.00	-24.76	peak
6	17940.000	23.50	26.61	50.11	74.00	-23.89	peak


Test Mode:	BLE 500k	Frequency(MHz):	2480
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

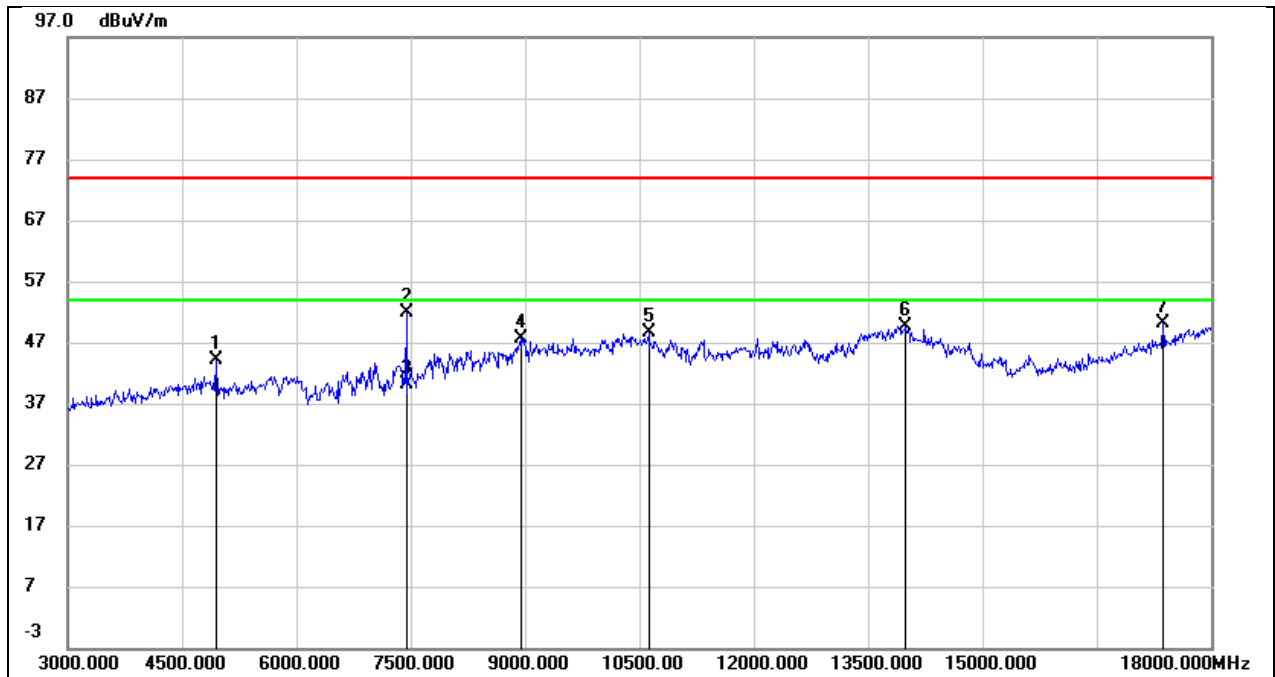

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4950.000	43.41	0.74	44.15	74.00	-29.85	peak
2	7440.000	44.54	7.36	51.90	74.00	-22.10	peak
3	7440.000	32.84	7.36	40.20	54.00	-13.80	AVG
4	8940.000	37.30	10.35	47.65	74.00	-26.35	peak
5	10620.000	34.63	13.95	48.58	74.00	-25.42	peak
6	13995.000	26.97	22.76	49.73	74.00	-24.27	peak
7	17370.000	26.72	23.42	50.14	74.00	-23.86	peak


8.4. SPURIOUS EMISSIONS(9 KHZ~30 MHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

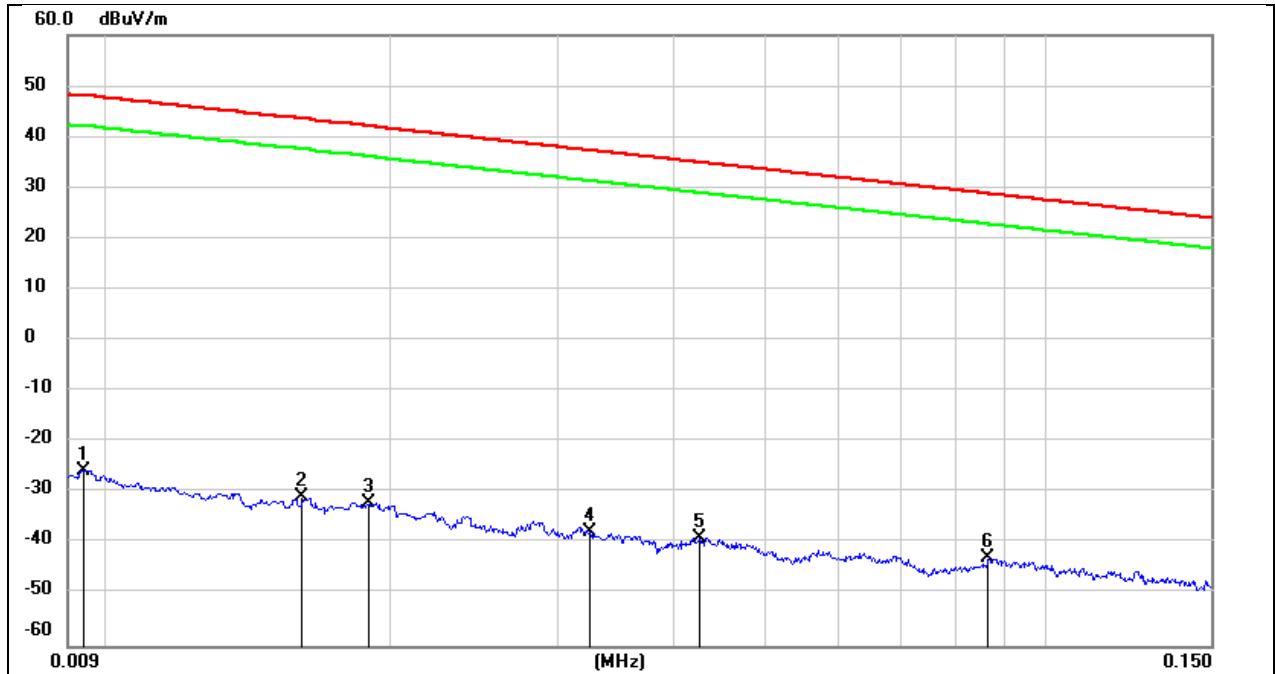


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.0094	75.66	-101.35	-25.69	48.05	-77.19	-3.45	-73.74	peak
2	0.0160	70.47	-101.37	-30.90	43.52	-82.40	-7.98	-74.42	peak
3	0.0189	69.49	-101.35	-31.86	42.07	-83.36	-9.43	-73.93	peak
4	0.0325	63.69	-101.40	-37.71	37.36	-89.21	-14.14	-75.07	peak
5	0.0427	62.64	-101.45	-38.81	34.99	-90.31	-16.51	-73.80	peak
6	0.0868	58.89	-101.69	-42.80	28.83	-94.30	-22.67	-71.63	peak

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

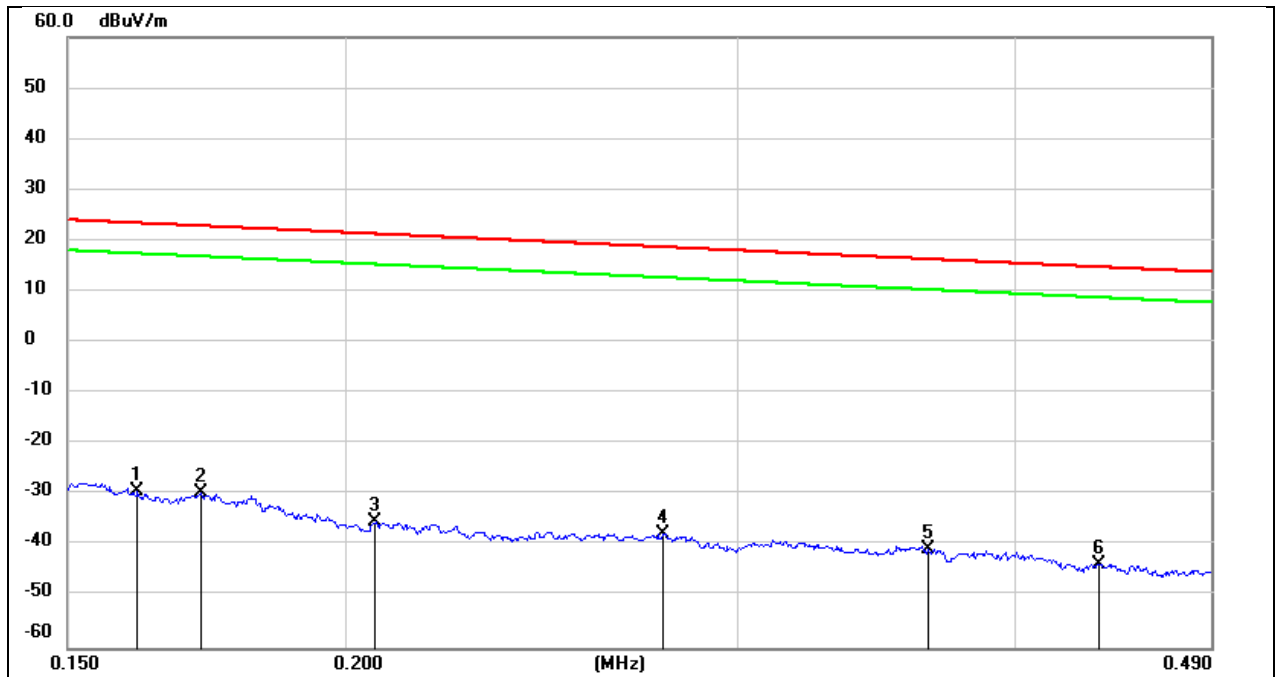

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.1612	72.37	-101.65	-29.28	23.46	-80.78	-28.04	-52.74	peak
2	0.1720	72.19	-101.67	-29.48	22.90	-80.98	-28.60	-52.38	peak
3	0.2064	66.54	-101.73	-35.19	21.31	-86.69	-30.19	-56.50	peak
4	0.2782	64.29	-101.83	-37.54	18.71	-89.04	-32.79	-56.25	peak
5	0.3654	61.31	-101.93	-40.62	16.35	-92.12	-35.15	-56.97	peak
6	0.4364	58.36	-101.99	-43.63	14.80	-95.13	-36.70	-58.43	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

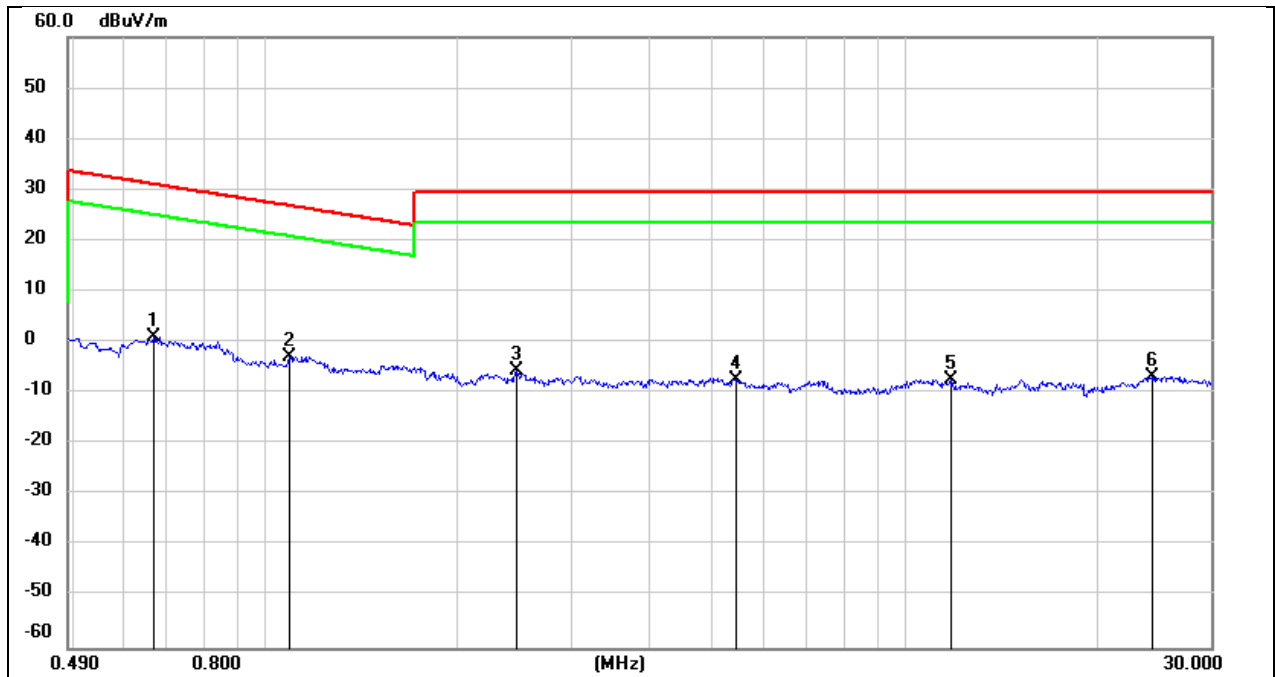

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	FCC Result (dBuV/m)	FCC Limit (dBuV/m)	ISED Result (dBuA/m)	ISED Limit (dBuA/m)	Margin (dB)	Remark
1	0.6671	63.25	-62.10	1.15	31.12	-50.35	-20.38	-29.97	peak
2	1.0886	59.41	-62.22	-2.81	26.87	-54.31	-24.63	-29.68	peak
3	2.4672	56.16	-61.71	-5.55	29.54	-57.05	-21.96	-35.09	peak
4	5.4180	54.16	-61.43	-7.27	29.54	-58.77	-21.96	-36.81	peak
5	11.7628	53.53	-60.88	-7.35	29.54	-58.85	-21.96	-36.89	peak
6	24.3045	53.80	-60.51	-6.71	29.54	-58.21	-21.96	-36.25	peak


8.5. SPURIOUS EMISSIONS(18 GHZ~26 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

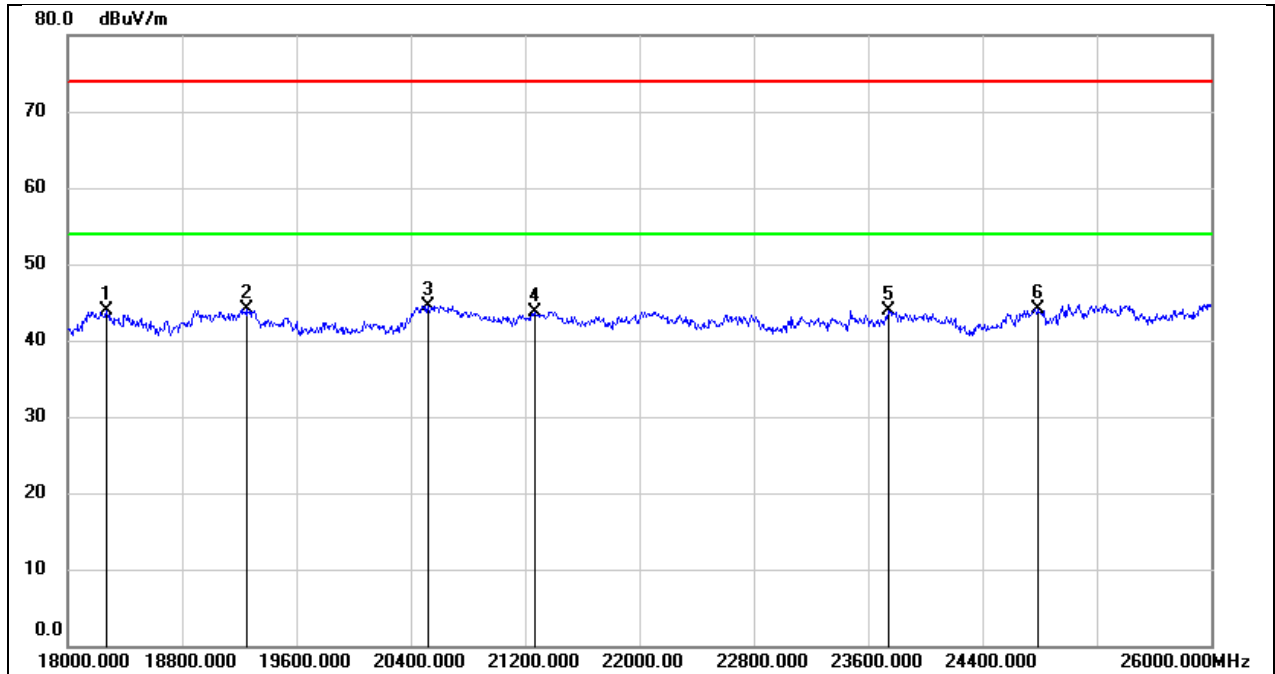

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18272.000	49.41	-5.53	43.88	74.00	-30.12	peak
2	19248.000	49.74	-5.58	44.16	74.00	-29.84	peak
3	20520.000	49.86	-5.33	44.53	74.00	-29.47	peak
4	21264.000	48.54	-4.76	43.78	74.00	-30.22	peak
5	23744.000	47.15	-3.20	43.95	74.00	-30.05	peak
6	24792.000	46.48	-2.28	44.20	74.00	-29.80	peak


Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

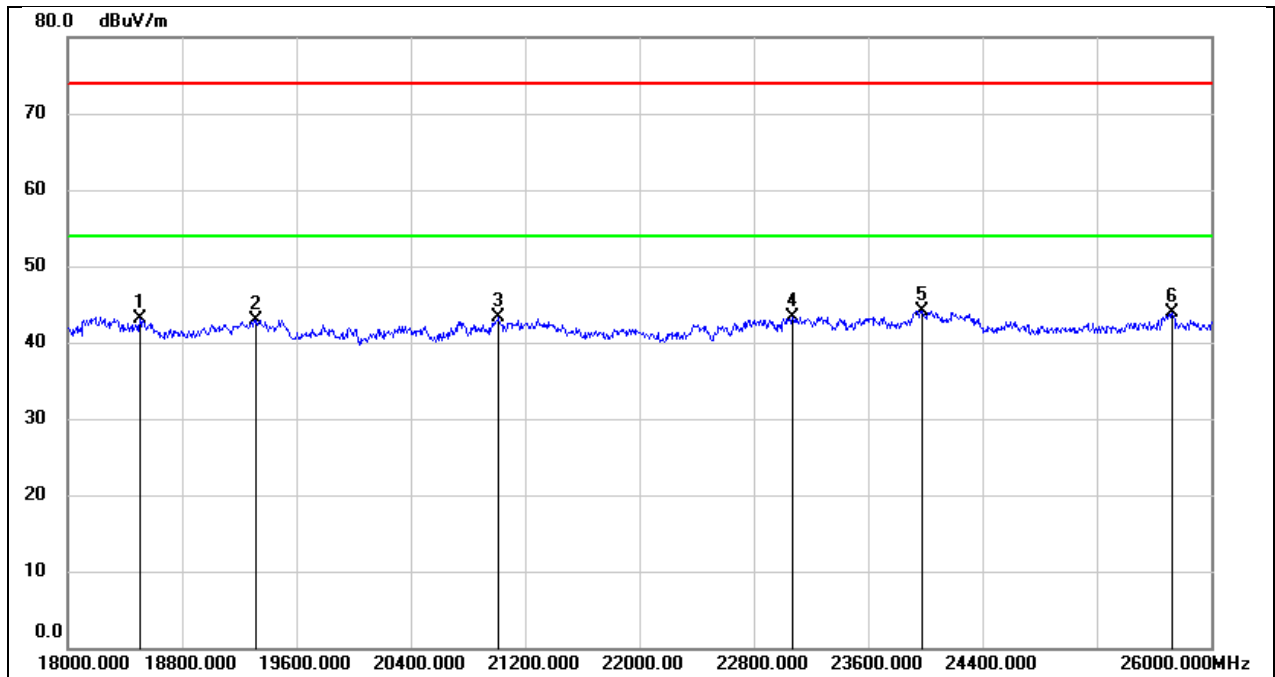

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	18504.000	48.27	-5.25	43.02	74.00	-30.98	peak
2	19312.000	48.55	-5.57	42.98	74.00	-31.02	peak
3	21016.000	48.13	-4.88	43.25	74.00	-30.75	peak
4	23072.000	46.78	-3.42	43.36	74.00	-30.64	peak
5	23976.000	46.97	-2.80	44.17	74.00	-29.83	peak
6	25728.000	44.61	-0.72	43.89	74.00	-30.11	peak


8.6. SPURIOUS EMISSIONS(30 MHZ~1 GHZ)

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Horizontal	Test Voltage:	AC 120V_60Hz

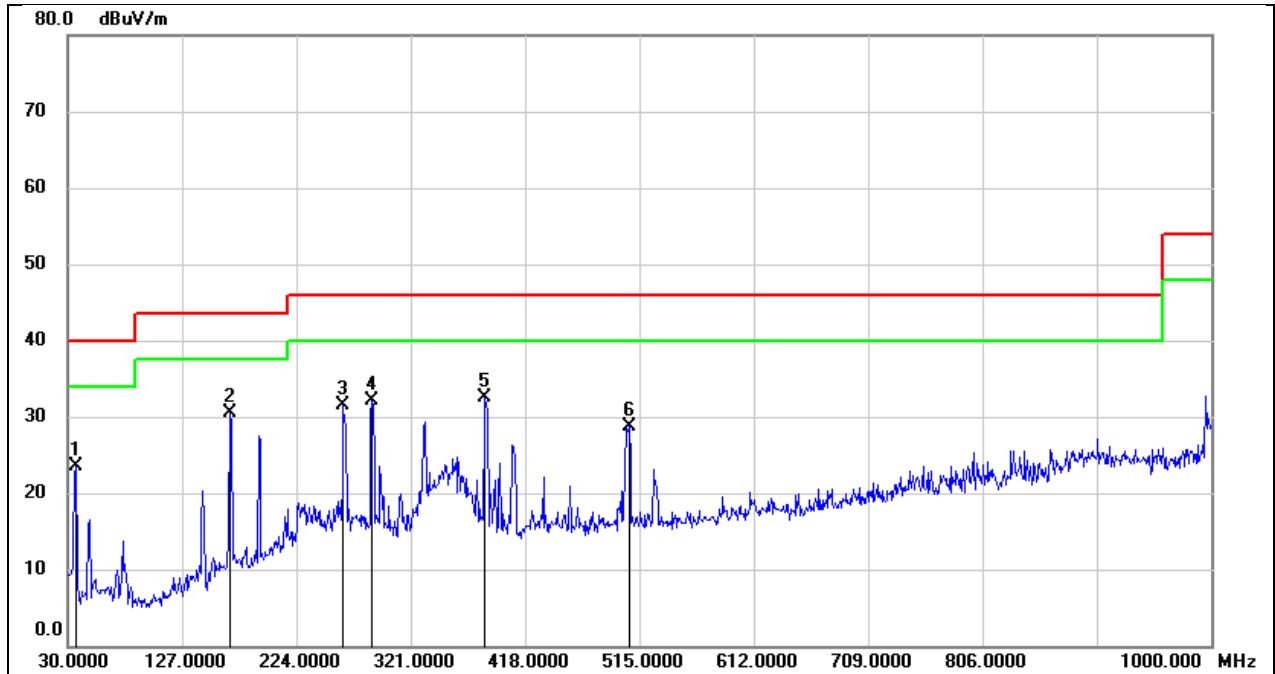

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	36.7900	38.54	-14.99	23.55	40.00	-16.45	QP
2	167.7400	42.72	-12.29	30.43	43.50	-13.07	QP
3	263.7700	45.29	-13.74	31.55	46.00	-14.45	QP
4	288.0200	44.26	-12.23	32.03	46.00	-13.97	QP
5	384.0500	42.38	-9.85	32.53	46.00	-13.47	QP
6	506.2700	36.65	-7.99	28.66	46.00	-17.34	QP

Test Mode:	BLE 1M	Frequency(MHz):	2402
Polarity:	Vertical	Test Voltage:	AC 120V_60Hz

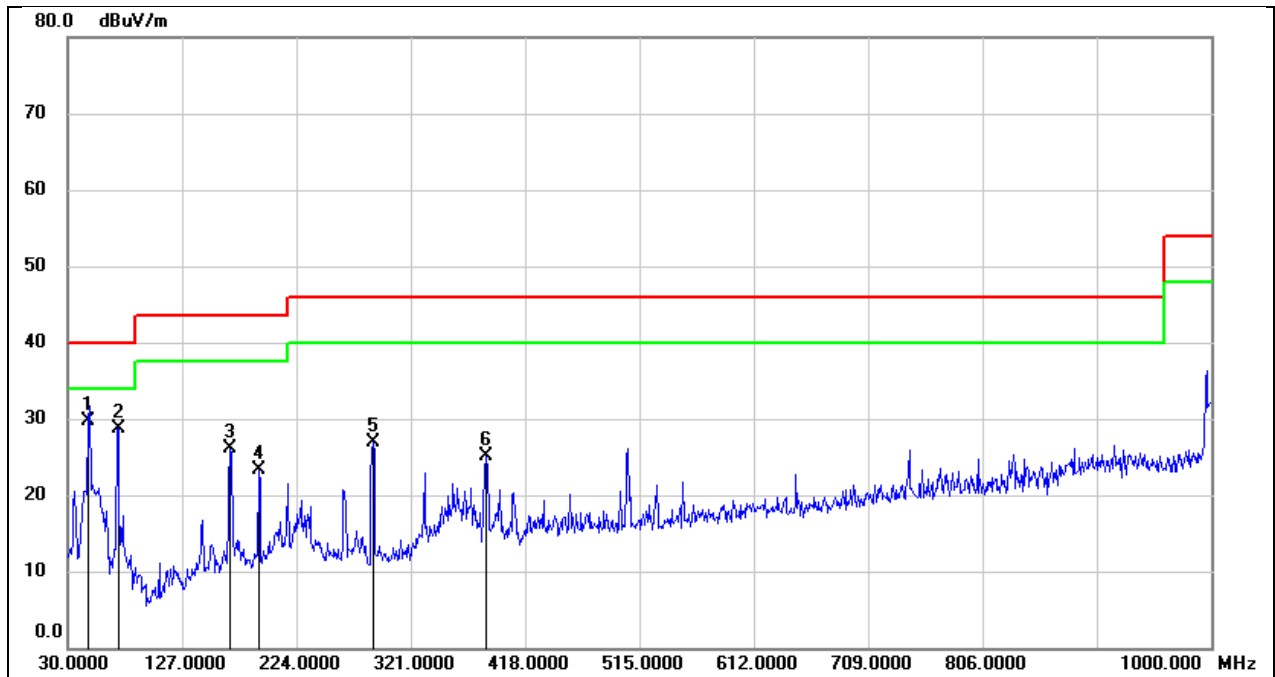

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	47.4600	45.15	-15.43	29.72	40.00	-10.28	QP
2	72.6800	44.34	-15.63	28.71	40.00	-11.29	QP
3	167.7400	38.41	-12.29	26.12	43.50	-17.38	QP
4	191.9900	35.51	-12.20	23.31	43.50	-20.19	QP
5	288.9900	39.03	-12.18	26.85	46.00	-19.15	QP
6	385.0200	34.86	-9.85	25.01	46.00	-20.99	QP

9. ANTENNA REQUIREMENT

REQUIREMENT

Please refer to FCC part 15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC part 15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

DESCRIPTION

Pass

10. AC POWER LINE CONDUCTED EMISSION

LIMITS

Please refer to CFR 47 FCC §15.207 (a) and ISED RSS-Gen Clause 8.8


FREQUENCY (MHz)	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

TEST PROCEDURE

The EUT is put on a table of non-conducting material that is 80 cm high. The vertical conducting wall of shielding is located 40 cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9 kHz.

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

TEST SETUP

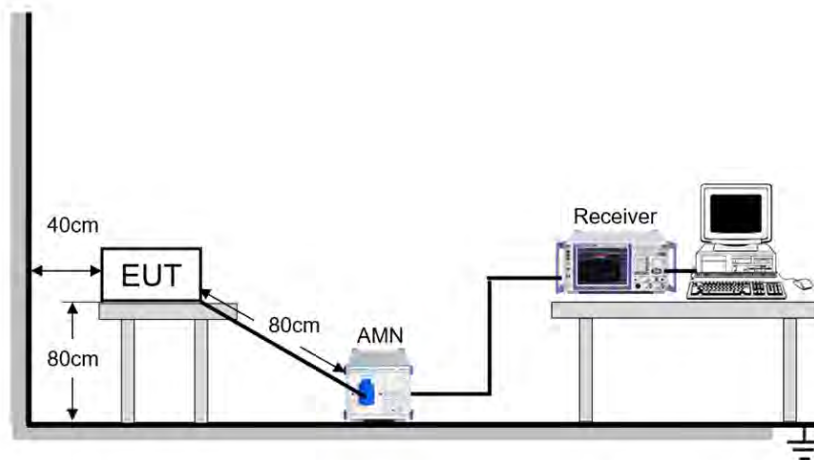

TEST ENVIRONMENT


Temperature	22.8°C	Relative Humidity	65%
Atmosphere Pressure	101kPa	Test Voltage	AC 120 V, 60 Hz

TEST DATE / ENGINEER

Test Date	June 28, 2024	Test By	Fanny Huang
-----------	---------------	---------	-------------

TEST RESULTS

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Line		

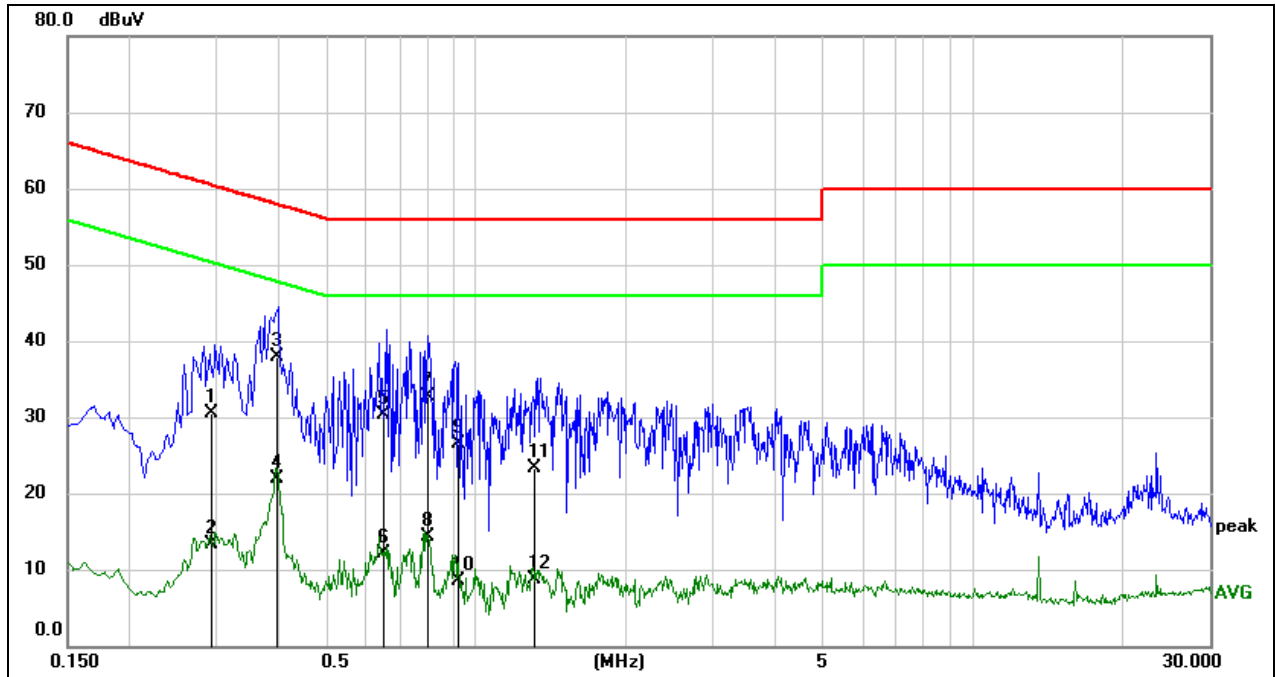


No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2930	20.21	10.24	30.45	60.44	-29.99	QP
2	0.2930	3.07	10.24	13.31	50.44	-37.13	AVG
3	0.3953	27.63	10.24	37.87	57.95	-20.08	QP
4	0.3953	11.70	10.24	21.94	47.95	-26.01	AVG
5	0.6518	20.09	10.23	30.32	56.00	-25.68	QP
6	0.6518	1.88	10.23	12.11	46.00	-33.89	AVG
7	0.7941	22.44	10.17	32.61	56.00	-23.39	QP
8	0.7941	4.18	10.17	14.35	46.00	-31.65	AVG
9	0.9236	16.45	10.08	26.53	56.00	-29.47	QP
10	0.9236	-1.64	10.08	8.44	46.00	-37.56	AVG
11	1.3114	13.26	10.00	23.26	56.00	-32.74	QP
12	1.3114	-1.27	10.00	8.73	46.00	-37.27	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

Test Mode:	BLE 1M	Frequency(MHz):	2402
Line:	Neutral		

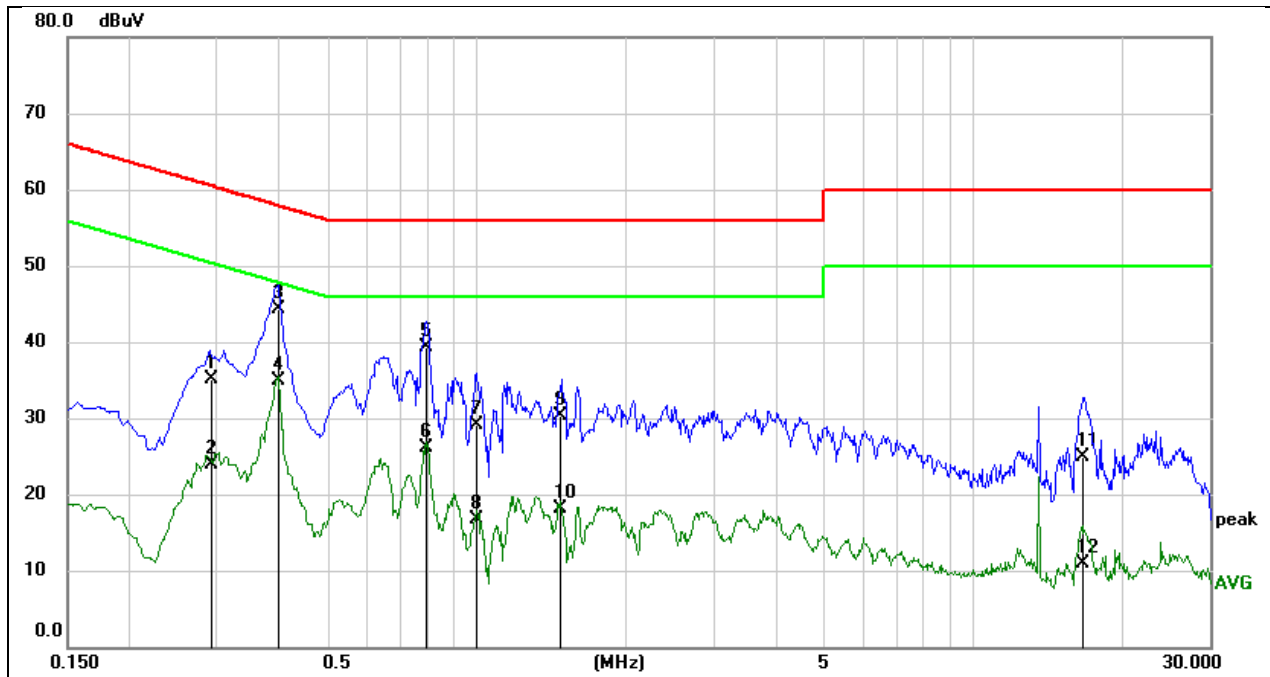

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.2931	24.93	10.11	35.04	60.44	-25.40	QP
2	0.2931	13.86	10.11	23.97	50.44	-26.47	AVG
3	0.3963	34.16	10.07	44.23	57.93	-13.70	QP
4	0.3963	24.88	10.07	34.95	47.93	-12.98	AVG
5	0.7929	29.24	9.97	39.21	56.00	-16.79	QP
6	0.7929	16.21	9.97	26.18	46.00	-19.82	AVG
7	1.0039	19.30	9.83	29.13	56.00	-26.87	QP
8	1.0039	6.83	9.83	16.66	46.00	-29.34	AVG
9	1.4700	20.33	9.93	30.26	56.00	-25.74	QP
10	1.4700	8.15	9.93	18.08	46.00	-27.92	AVG
11	16.6528	14.18	10.74	24.92	60.00	-35.08	QP
12	16.6528	0.09	10.74	10.83	50.00	-39.17	AVG

Note:

1. Result = Reading + Correct Factor.
2. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 200 Hz (9 kHz ~ 150 kHz), 9 kHz (150 kHz ~ 30 MHz).
4. Step size: 80 Hz (0.009 MHz ~ 0.15 MHz), 4 kHz (0.15 MHz ~ 30 MHz), Scan time: auto.

Note: All the modes have been tested, only the worst data was recorded in the report.

11. TEST DATA

APPENDIX A: Duty Cycle

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE 125k	16.74	16.99	0.9853	98.53	0.06	0.06	1
BLE 500k	4.48	4.73	0.9471	94.71	0.24	0.22	1

Test Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	1/T Minimum VBW (kHz)	Final setting For VBW (kHz)
BLE 1M	2.1	2.34	0.8974	89.74	0.47	0.48	1
BLE 2M	1.06	1.31	0.8092	80.92	0.92	0.94	1


Note:

Duty Cycle Correction Factor= $10\log(1/x)$.

Where: x is Duty Cycle (Linear)

Where: T is On Time

If that calculated VBW is not available on the analyzer then the next higher value should be used.

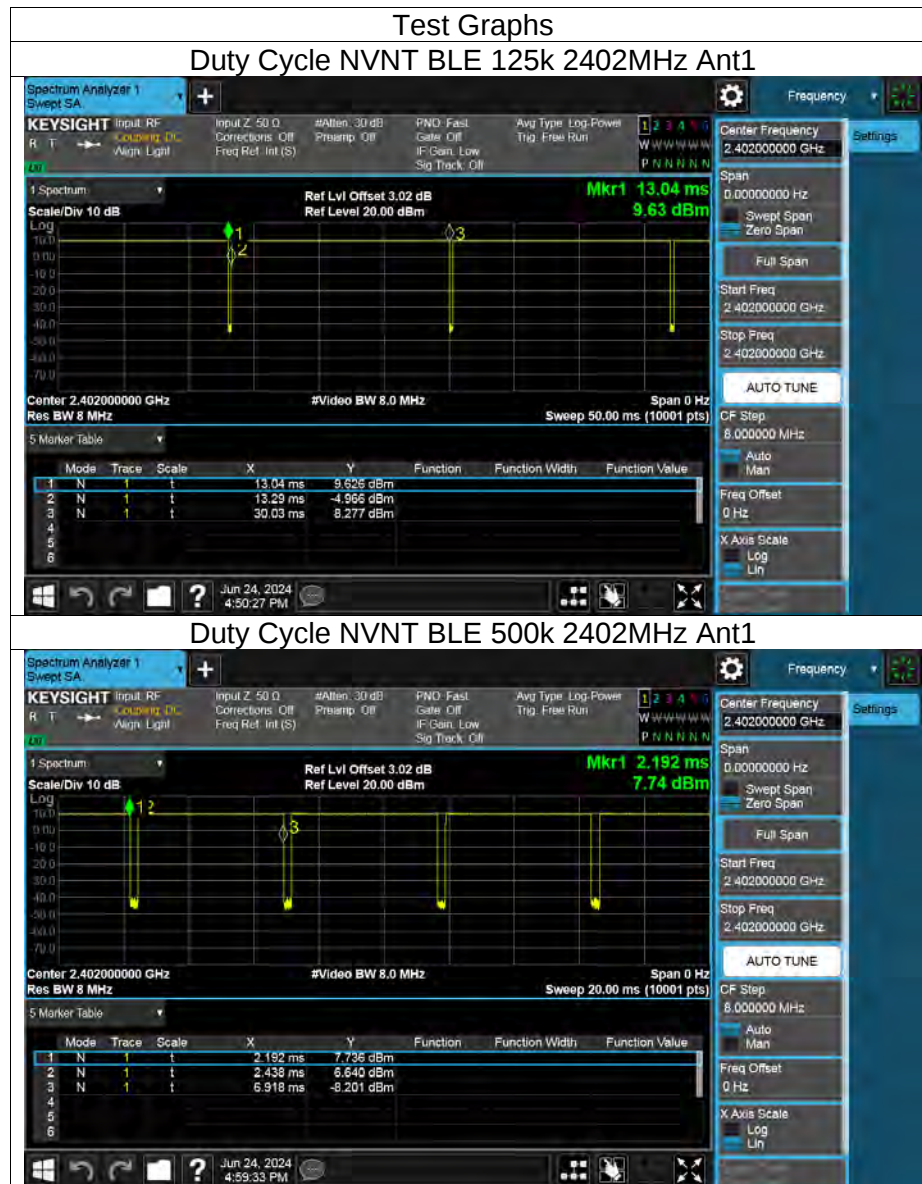



APPENDIX B: Maximum Conducted Output Power

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 125k	2402	Ant1	9.68	30	Pass
BLE 125k	2442	Ant1	10.16	30	Pass
BLE 125k	2480	Ant1	9.9	30	Pass
BLE 500k	2402	Ant1	9.72	30	Pass
BLE 500k	2442	Ant1	10.2	30	Pass
BLE 500k	2480	Ant1	9.96	30	Pass

Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	Ant1	9.72	30	Pass
BLE 1M	2442	Ant1	10.14	30	Pass
BLE 1M	2480	Ant1	10.04	30	Pass
BLE 2M	2402	Ant1	9.98	30	Pass
BLE 2M	2442	Ant1	10.25	30	Pass
BLE 2M	2480	Ant1	10.03	30	Pass

APPENDIX C: 6dB Bandwidth

Mode	Frequency (MHz)	Antenna	6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 125k	2402	Ant1	0.66	≥ 0.5	Pass
BLE 125k	2442	Ant1	0.66	≥ 0.5	Pass
BLE 125k	2480	Ant1	0.66	≥ 0.5	Pass
BLE 500k	2402	Ant1	0.65	≥ 0.5	Pass
BLE 500k	2442	Ant1	0.64	≥ 0.5	Pass
BLE 500k	2480	Ant1	0.62	≥ 0.5	Pass

Mode	Frequency (MHz)	Antenna	6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	Ant1	0.73	≥ 0.5	Pass
BLE 1M	2442	Ant1	0.67	≥ 0.5	Pass
BLE 1M	2480	Ant1	0.7	≥ 0.5	Pass
BLE 2M	2402	Ant1	1.08	≥ 0.5	Pass
BLE 2M	2442	Ant1	1.11	≥ 0.5	Pass
BLE 2M	2480	Ant1	1.08	≥ 0.5	Pass





6dB Bandwidth NVNT BLE 1M 2402MHz Ant1



6dB Bandwidth NVNT BLE 1M 2442MHz Ant1



6dB Bandwidth NVNT BLE 1M 2480MHz Ant1



6dB Bandwidth NVNT BLE 2M 2402MHz Ant1



6dB Bandwidth NVNT BLE 2M 2442MHz Ant1




6dB Bandwidth NVNT BLE 2M 2480MHz Ant1



APPENDIX D: Occupied Channel Bandwidth

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
BLE 125k	2402	Ant1	1.07
BLE 125k	2442	Ant1	1.067
BLE 125k	2480	Ant1	1.069
BLE 500k	2402	Ant1	1.029
BLE 500k	2442	Ant1	1.025
BLE 500k	2480	Ant1	1.019

Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
BLE 1M	2402	Ant1	1.059
BLE 1M	2442	Ant1	1.059
BLE 1M	2480	Ant1	1.056
BLE 2M	2402	Ant1	2.085
BLE 2M	2442	Ant1	2.076
BLE 2M	2480	Ant1	2.081

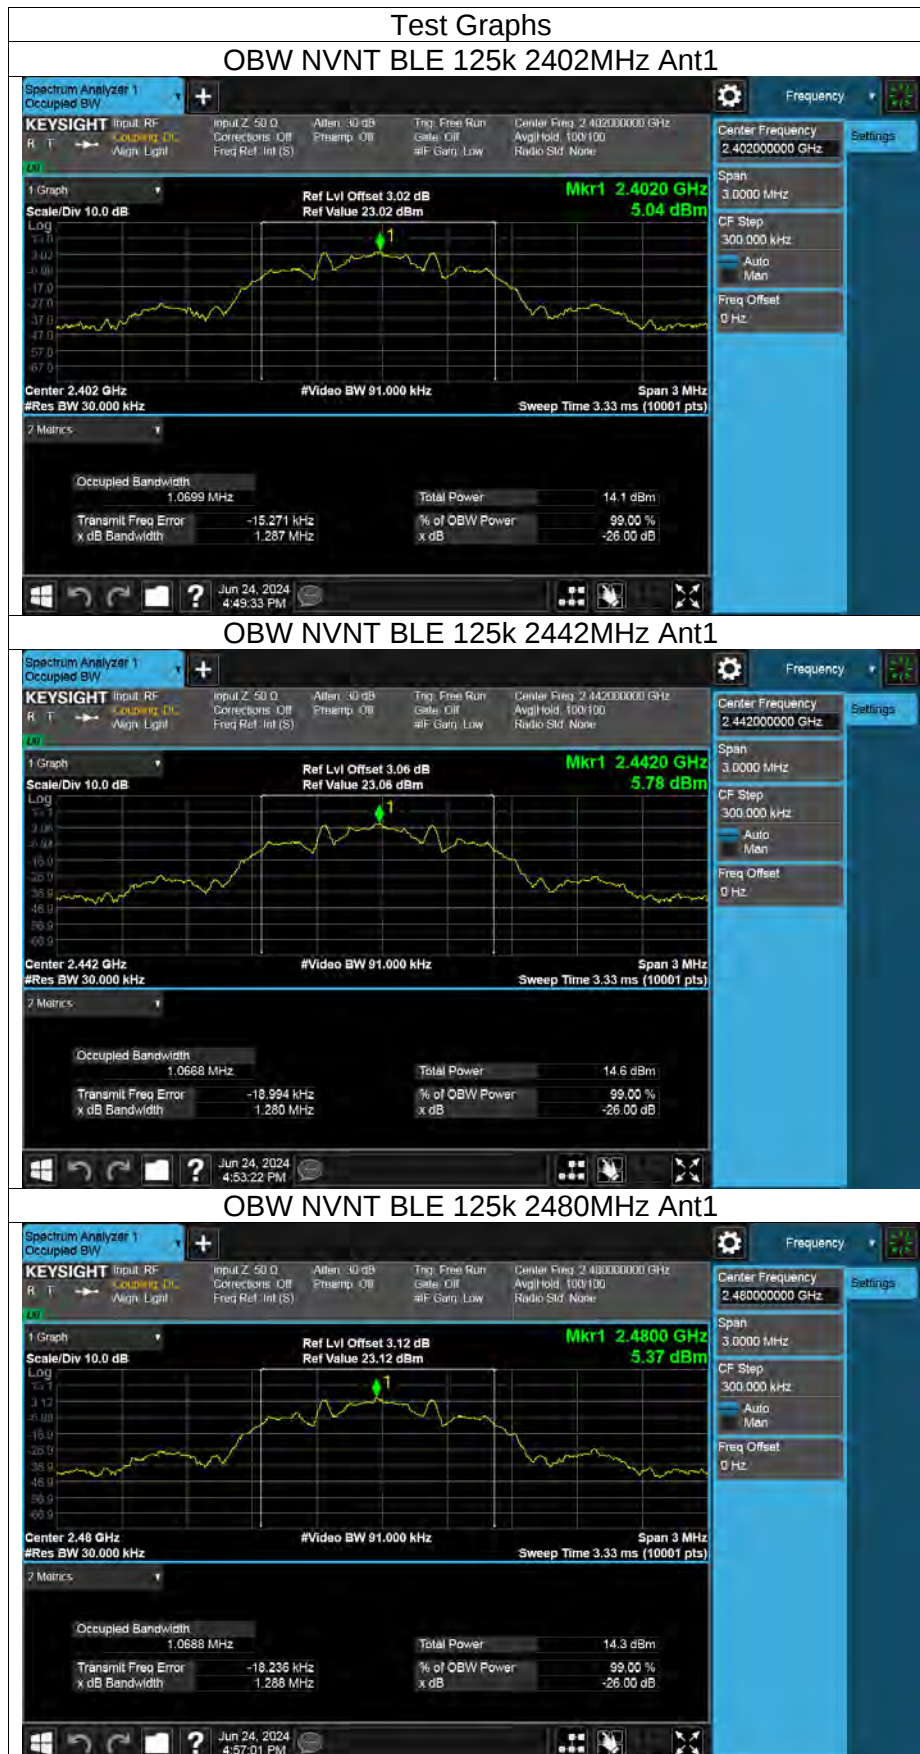

OBW NVNT BLE 500k 2402MHz Ant1



OBW NVNT BLE 500k 2442MHz Ant1



OBW NVNT BLE 500k 2480MHz Ant1





OBW NVNT BLE 2M 2402MHz Ant1



OBW NVNT BLE 2M 2442MHz Ant1



OBW NVNT BLE 2M 2480MHz Ant1




APPENDIX E: Maximum Power Spectral Density Level

Mode	Frequency (MHz)	Antenna	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 125k	2402	Ant1	3.5	≤8	Pass
BLE 125k	2442	Ant1	3.98	≤8	Pass
BLE 125k	2480	Ant1	3.64	≤8	Pass
BLE 500k	2402	Ant1	3.4	≤8	Pass
BLE 500k	2442	Ant1	3.76	≤8	Pass
BLE 500k	2480	Ant1	3.34	≤8	Pass


Mode	Frequency (MHz)	Antenna	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	Ant1	-2.76	≤8	Pass
BLE 1M	2442	Ant1	-1.77	≤8	Pass
BLE 1M	2480	Ant1	-2.91	≤8	Pass
BLE 2M	2402	Ant1	-6.6	≤8	Pass
BLE 2M	2442	Ant1	-5.64	≤8	Pass
BLE 2M	2480	Ant1	-5.45	≤8	Pass




PSD NVNT BLE 500k 2402MHz Ant1

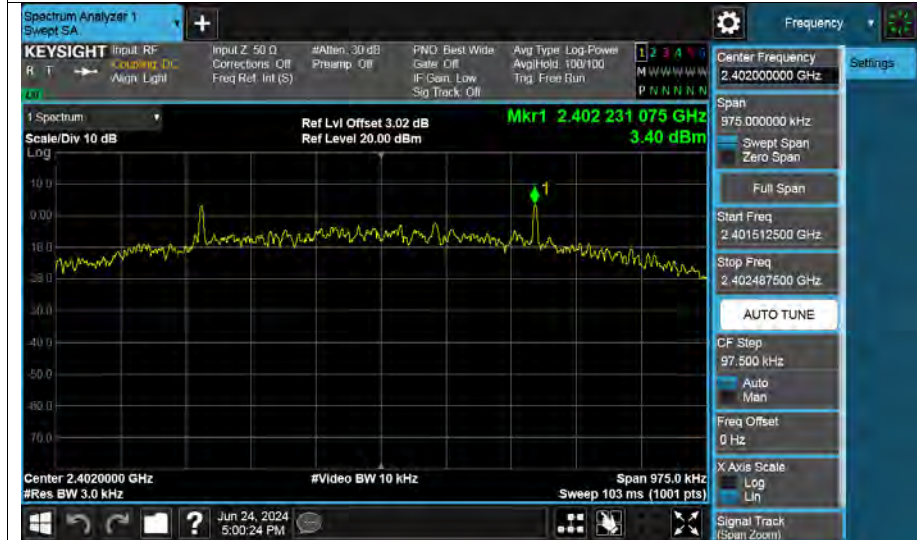



PSD NVNT BLE 500k 2442MHz Ant1

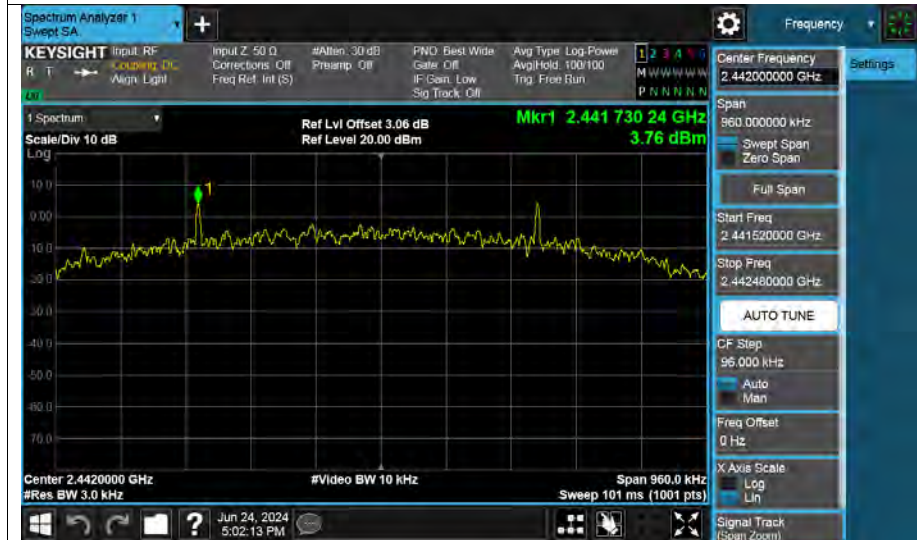

PSD NVNT BLE 500k 2480MHz Ant1

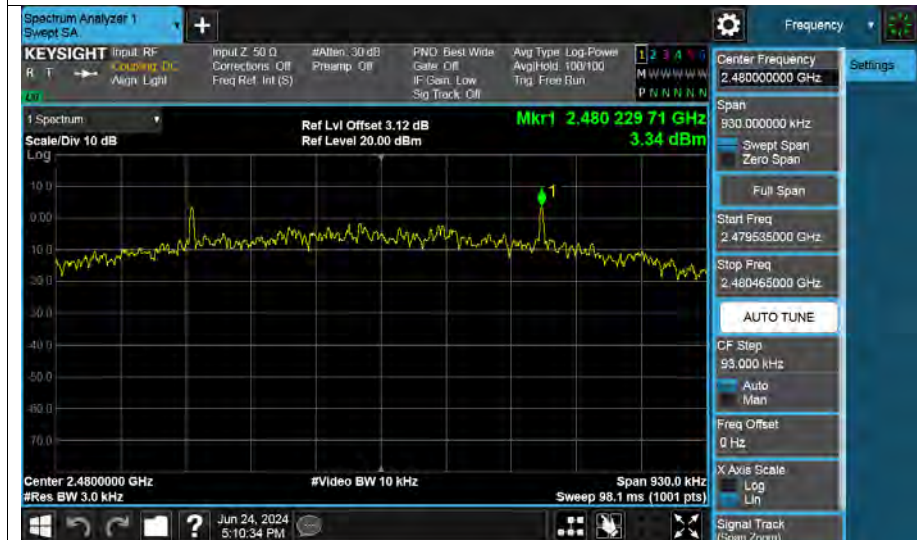

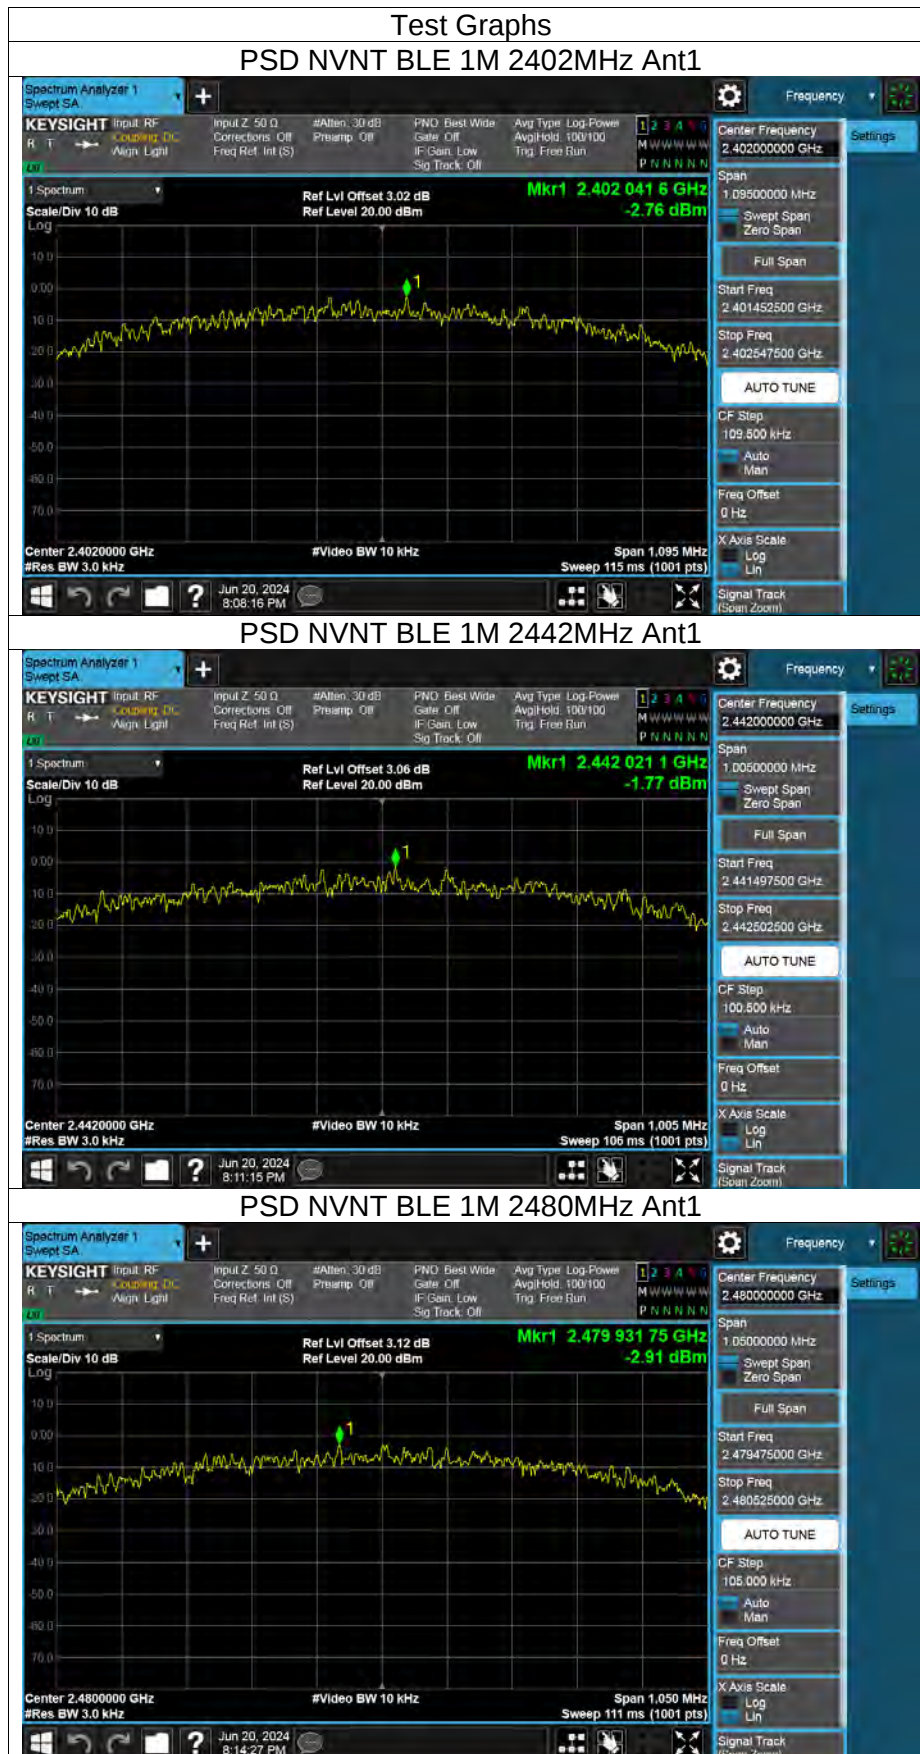


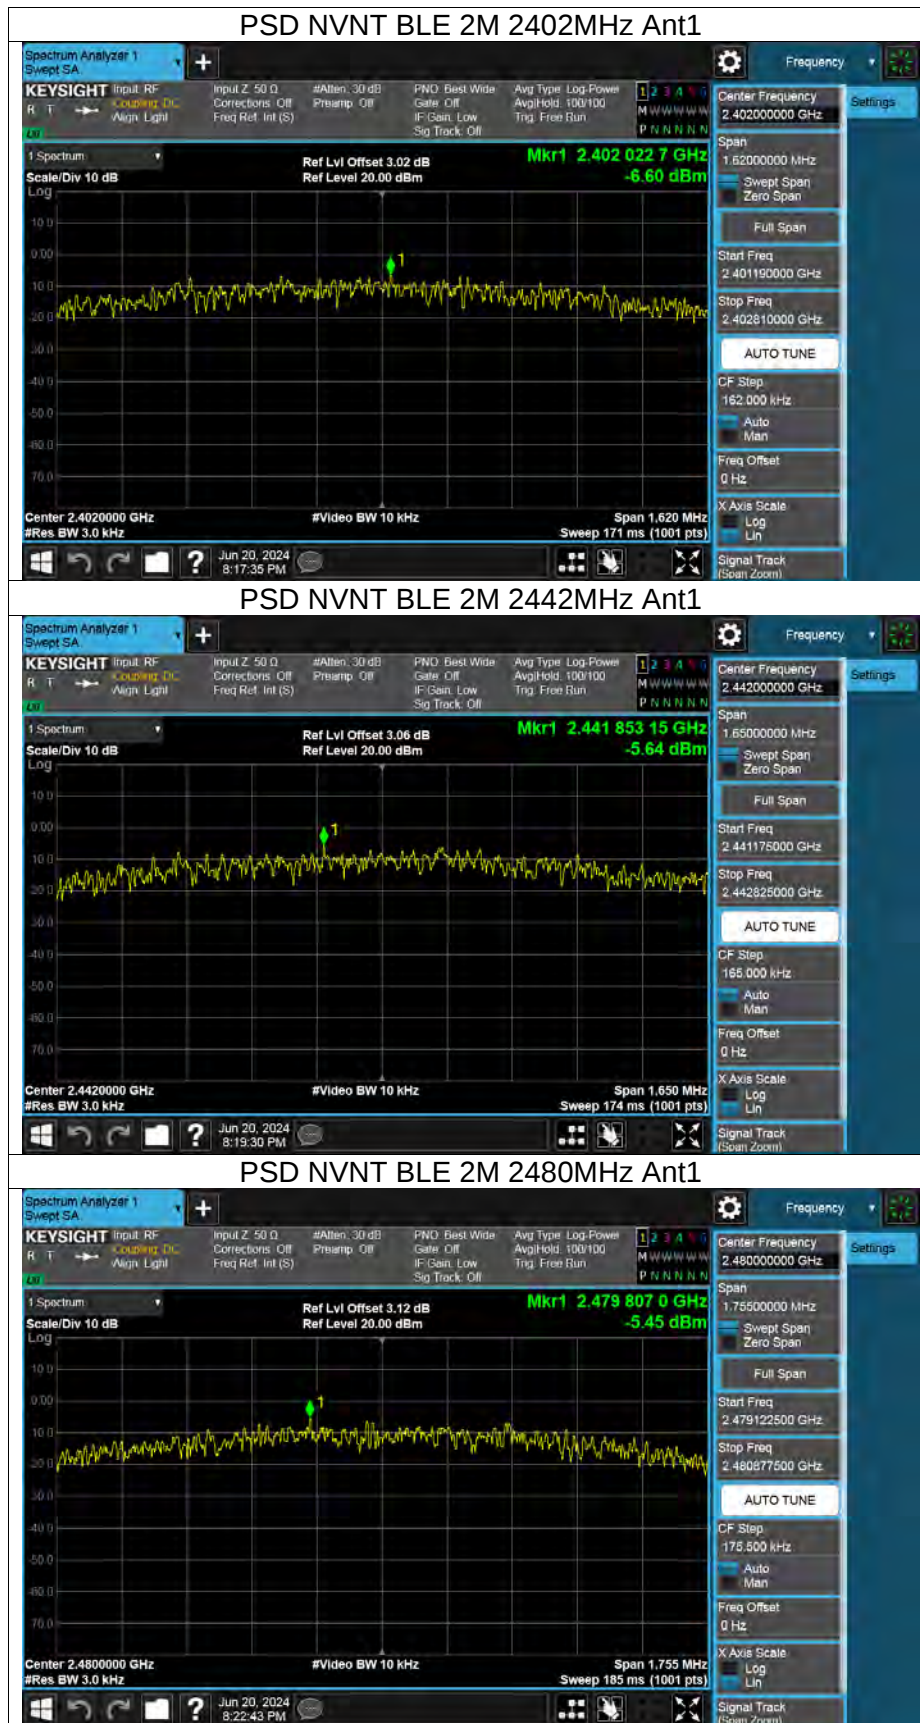

APPENDIX F: Band Edge

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
BLE 125k	2402	Ant1	-50.64	-20	Pass
BLE 125k	2480	Ant1	-55.75	-20	Pass
BLE 500k	2402	Ant1	-52.53	-20	Pass
BLE 500k	2480	Ant1	-56.97	-20	Pass


Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	Ant1	-53.06	-20	Pass
BLE 1M	2480	Ant1	-57.48	-20	Pass
BLE 2M	2402	Ant1	-33.69	-20	Pass
BLE 2M	2480	Ant1	-54.62	-20	Pass

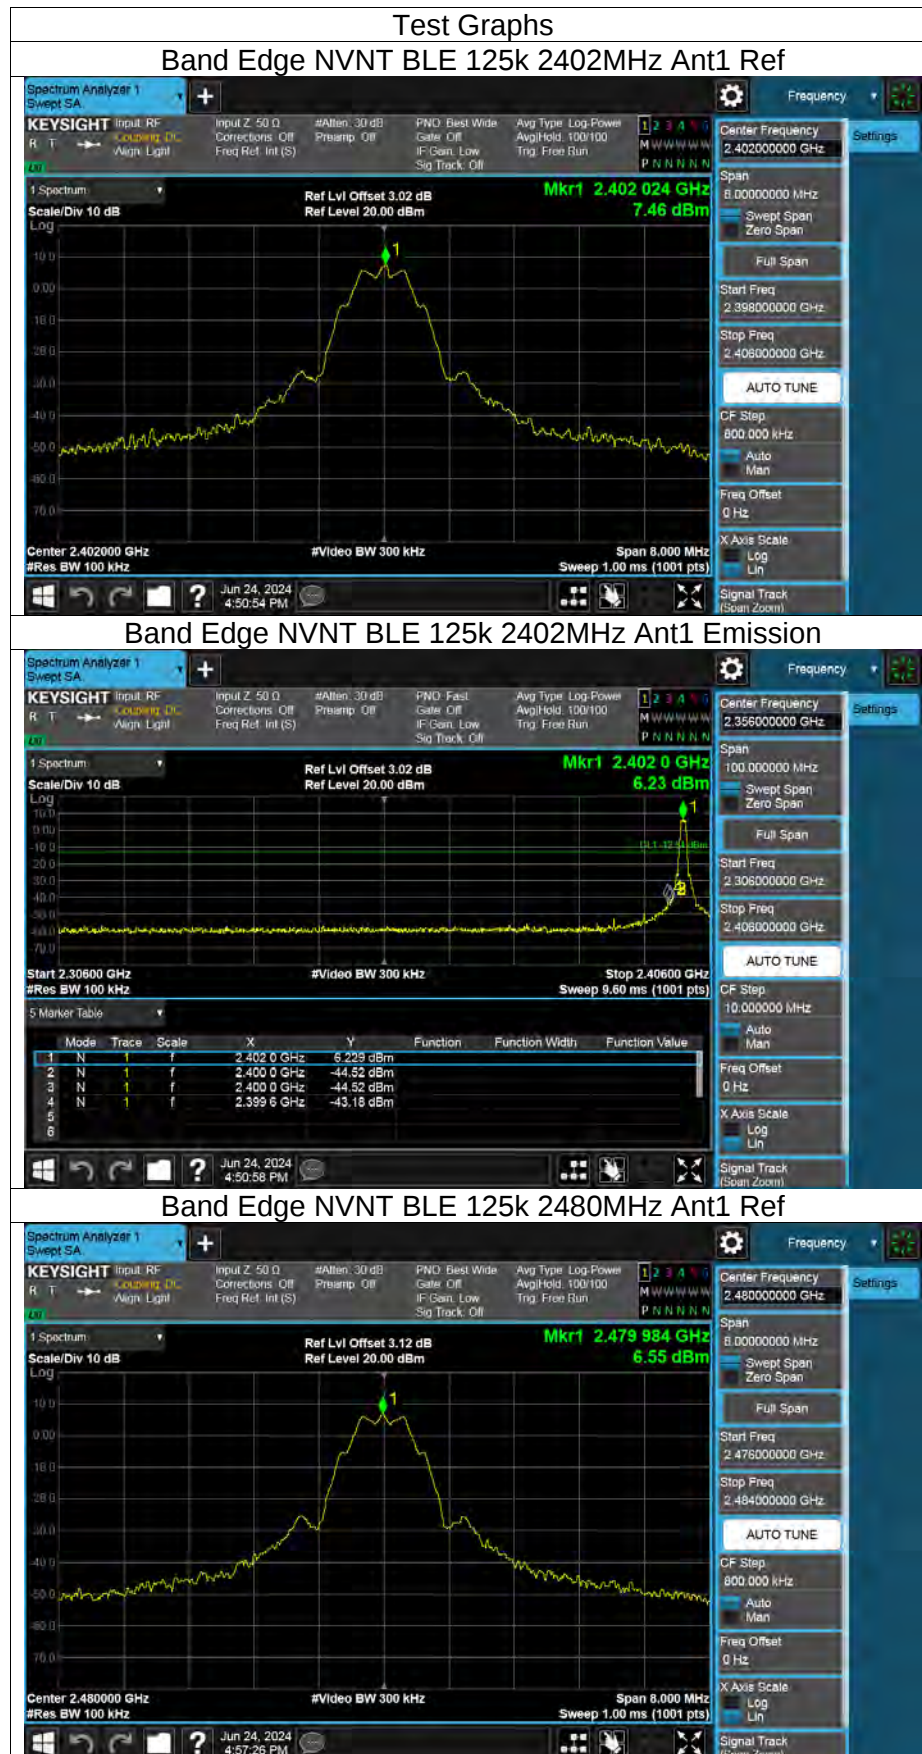

Band Edge NVNT BLE 125k 2480MHz Ant1 Emission




Band Edge NVNT BLE 500k 2402MHz Ant1 Ref

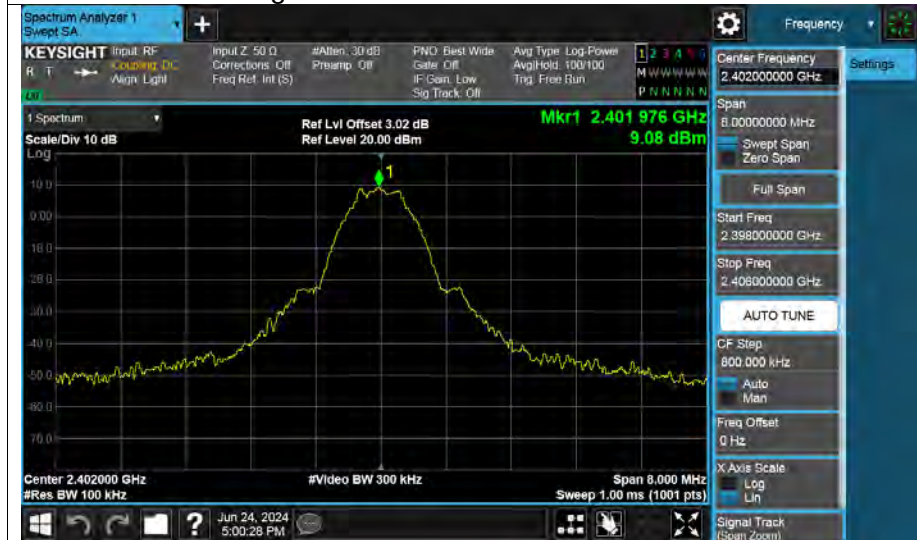

Band Edge NVNT BLE 500k 2402MHz Ant1 Emission



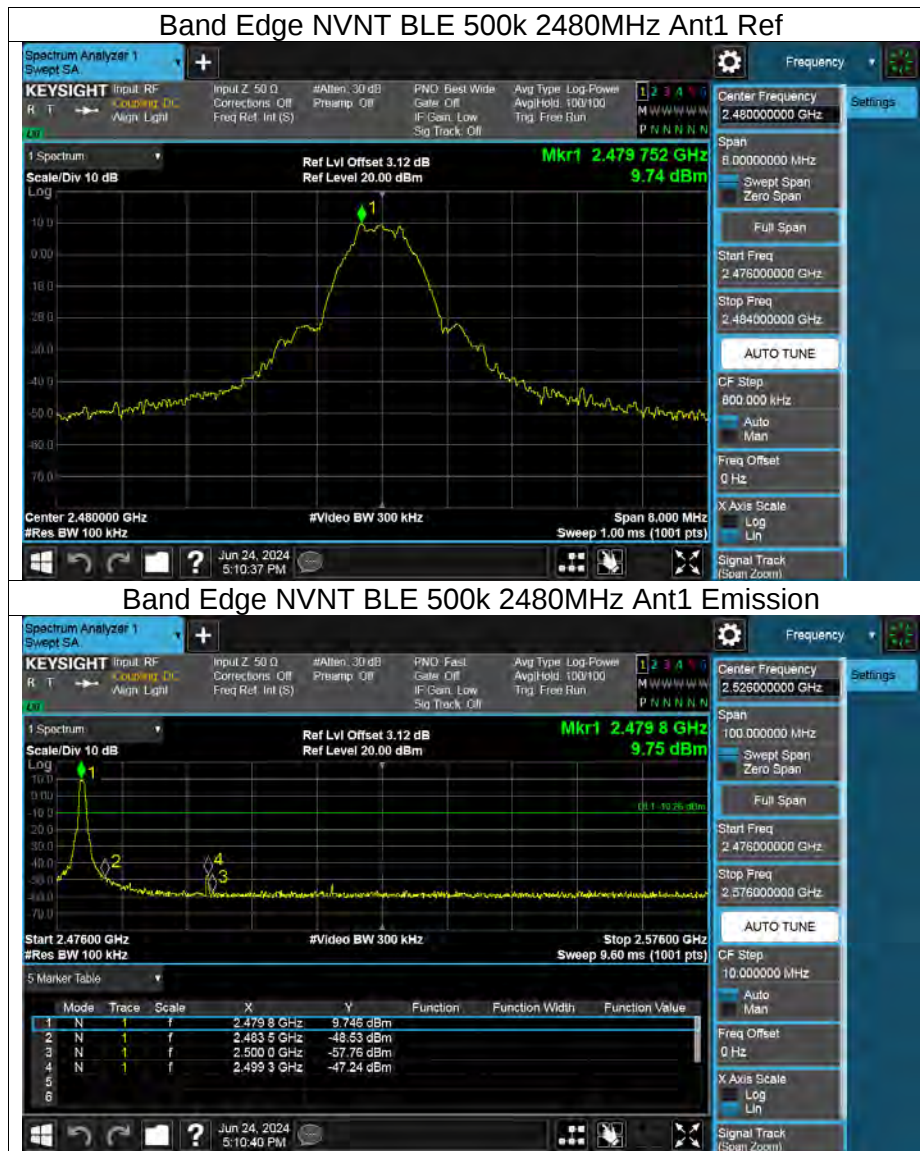


Test Graphs

Band Edge NVNT BLE 1M 2402MHz Ant1 Ref




Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

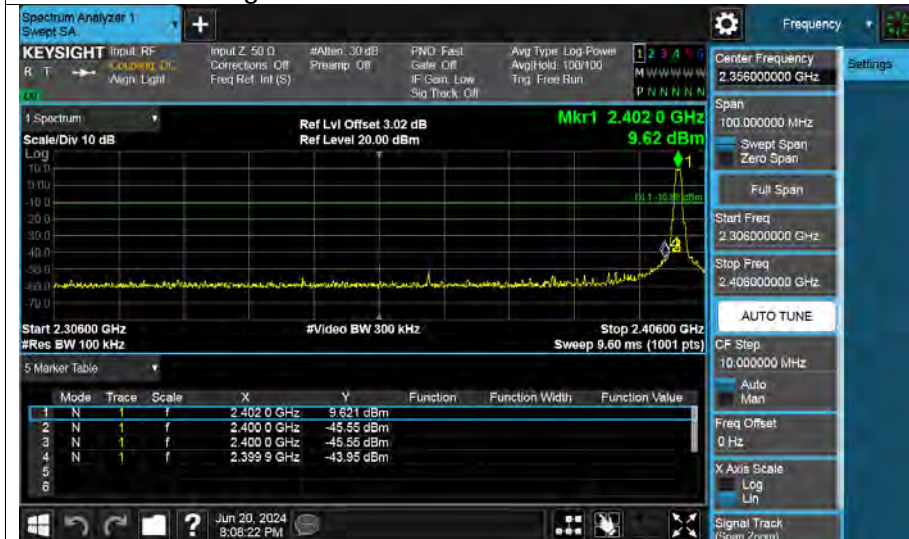

Band Edge NVNT BLE 1M 2480MHz Ant1 Ref



Band Edge NVNT BLE 1M 2480MHz Ant1 Emission

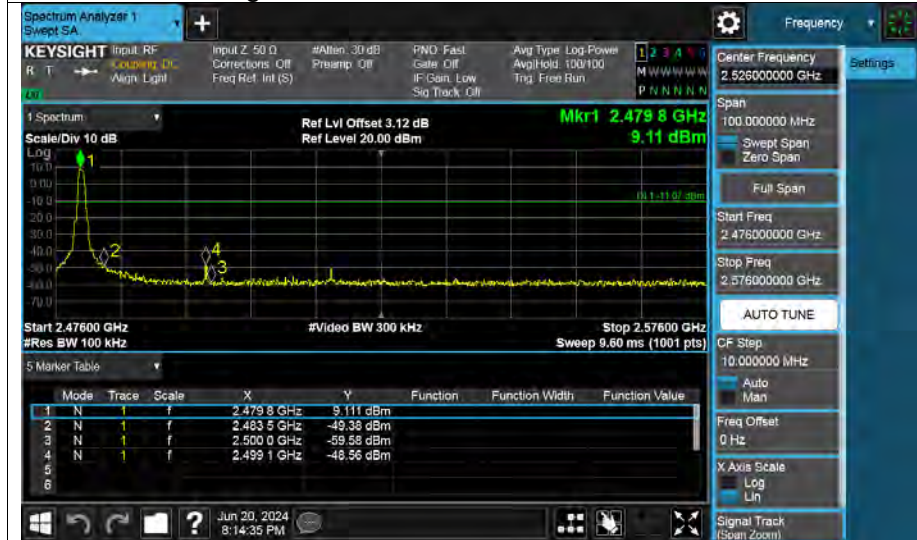


Band Edge NVNT BLE 2M 2402MHz Ant1 Ref



Band Edge NVNT BLE 2M 2402MHz Ant1 Emission



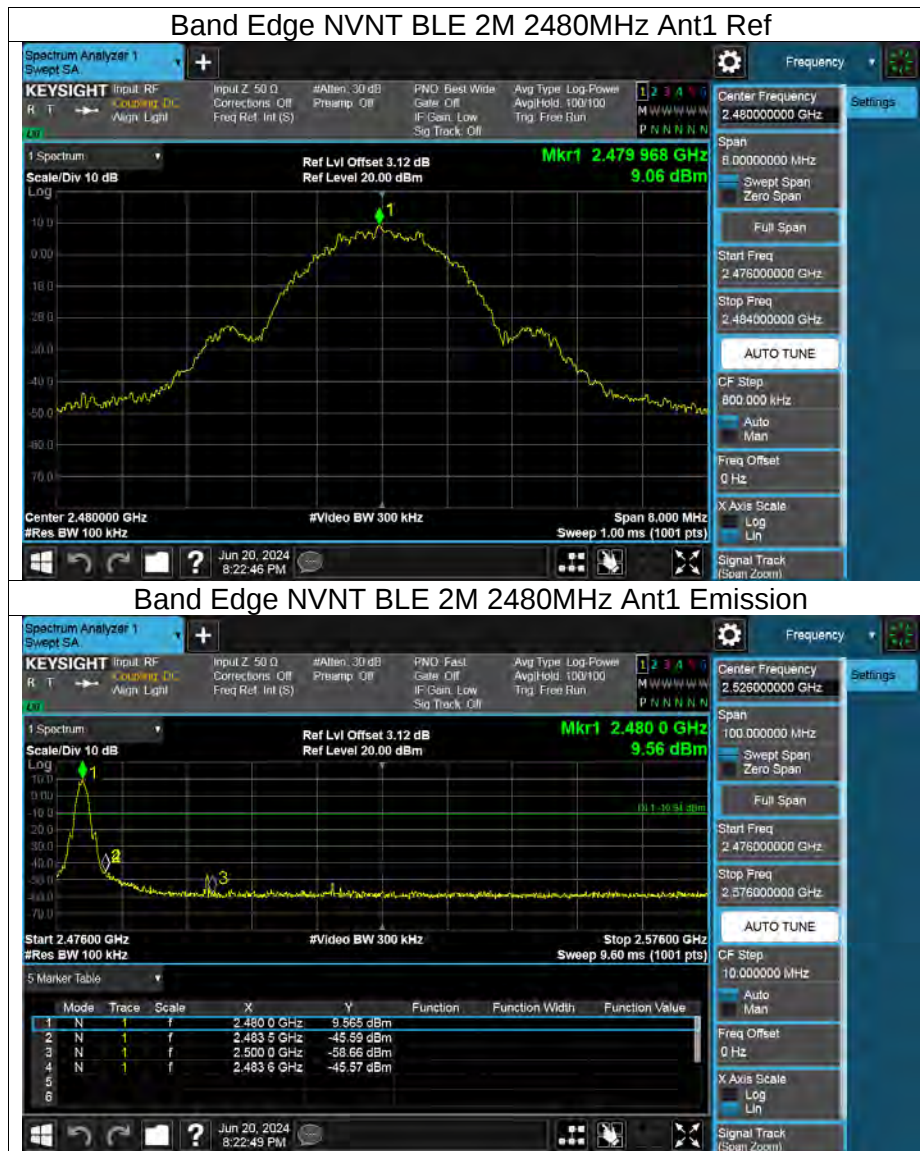

APPENDIX G: Conducted RF Spurious Emission

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
BLE 125k	2402	Ant1	-55.06	-20	Pass
BLE 125k	2442	Ant1	-55.39	-20	Pass
BLE 125k	2480	Ant1	-55.03	-20	Pass
BLE 500k	2402	Ant1	-52.56	-20	Pass
BLE 500k	2442	Ant1	-54.27	-20	Pass
BLE 500k	2480	Ant1	-54.69	-20	Pass

Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	Ant1	-52.37	-20	Pass
BLE 1M	2442	Ant1	-55.35	-20	Pass
BLE 1M	2480	Ant1	-51.98	-20	Pass
BLE 2M	2402	Ant1	-56.33	-20	Pass
BLE 2M	2442	Ant1	-57.94	-20	Pass
BLE 2M	2480	Ant1	-55.86	-20	Pass

Test Graphs

Tx. Spurious NVNT BLE 125k 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 125k 2402MHz Ant1 Emission



Tx. Spurious NVNT BLE 125k 2442MHz Ant1 Ref





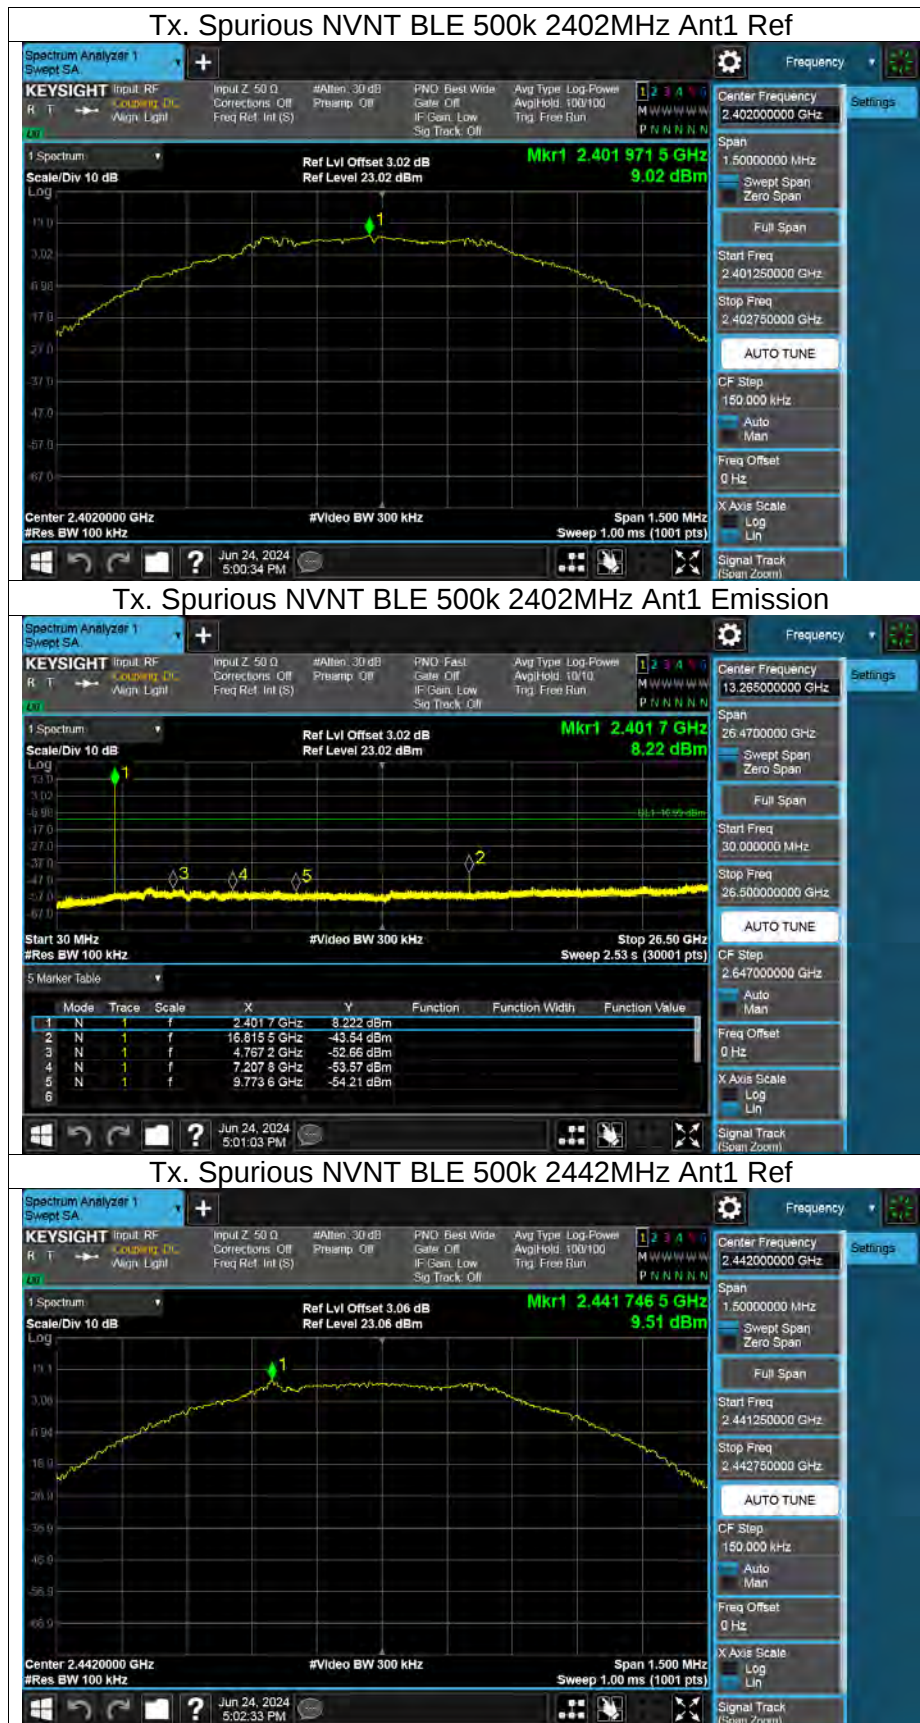

Tx. Spurious NVNT BLE 500k 2442MHz Ant1 Emission



Tx. Spurious NVNT BLE 500k 2480MHz Ant1 Ref



Tx. Spurious NVNT BLE 500k 2480MHz Ant1 Emission



Test Graphs

Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission



Tx. Spurious NVNT BLE 1M 2442MHz Ant1 Ref



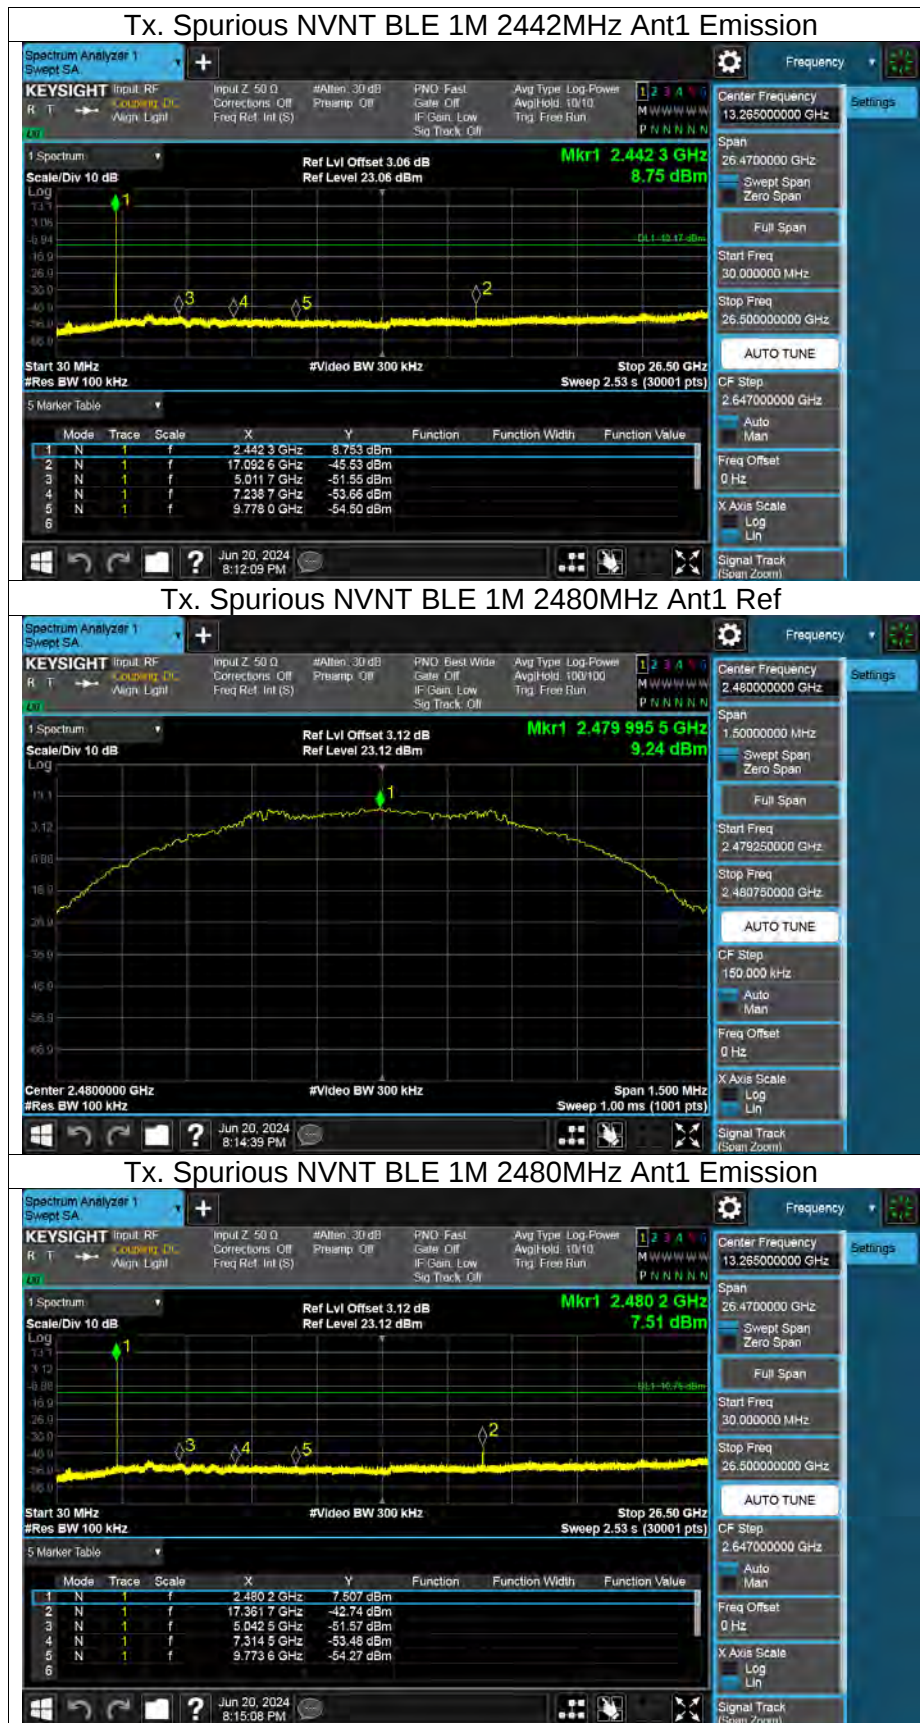

Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Ref




Tx. Spurious NVNT BLE 2M 2402MHz Ant1 Emission



Tx. Spurious NVNT BLE 2M 2442MHz Ant1 Ref



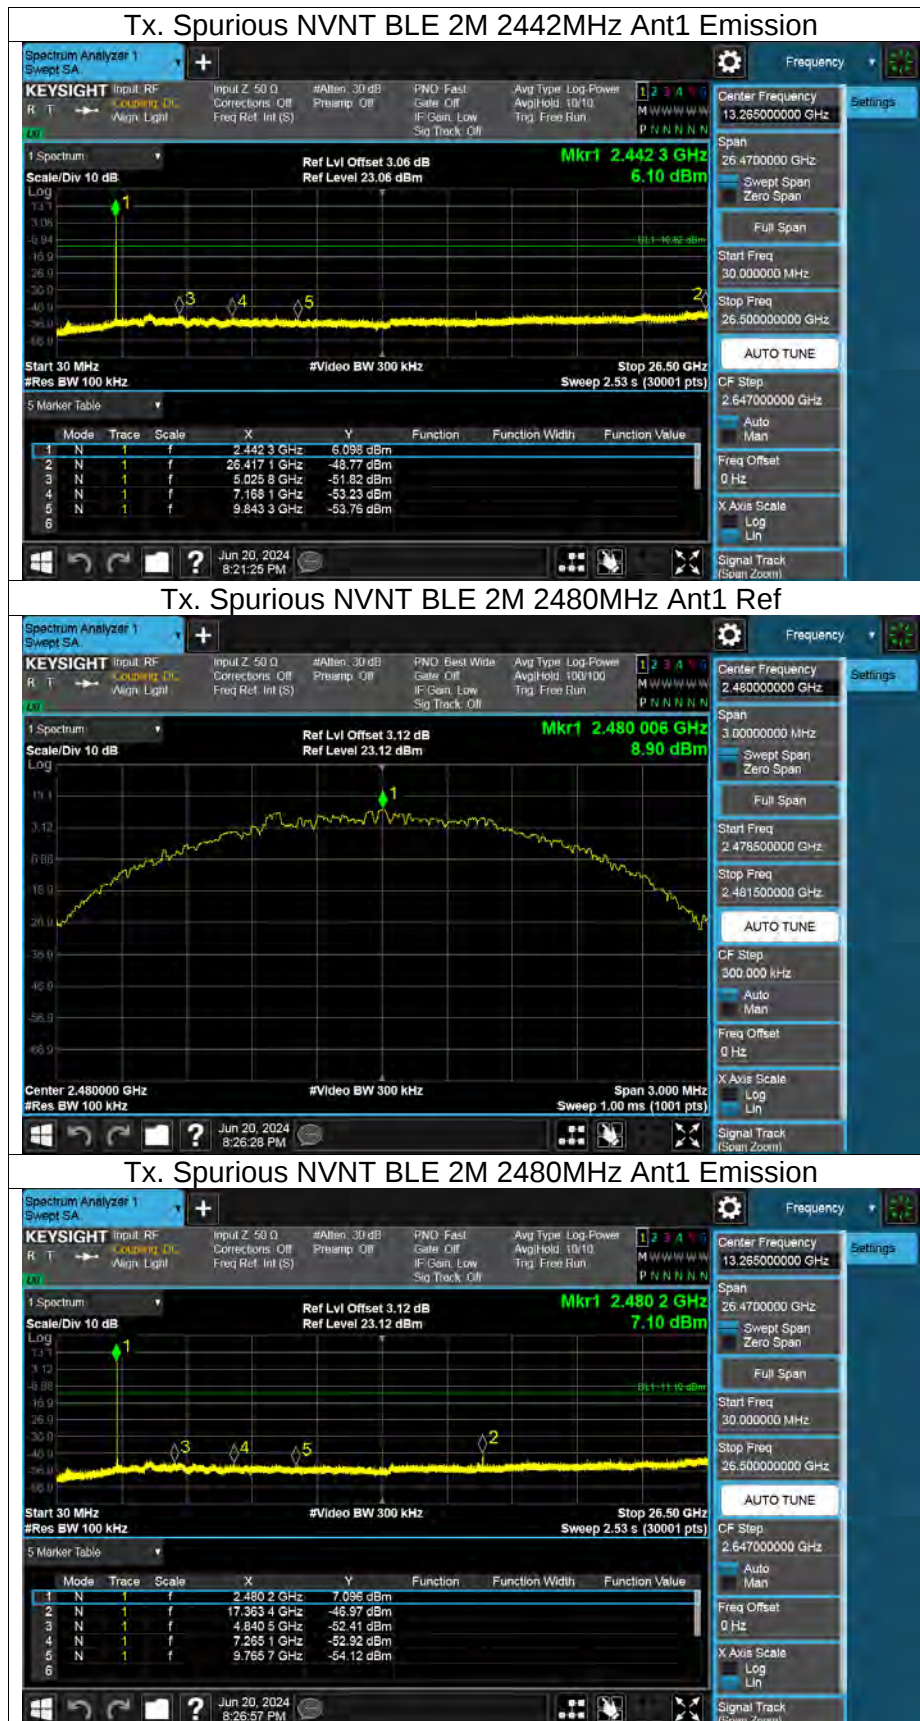

END OF REPORT