




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 72 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5320 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 63

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

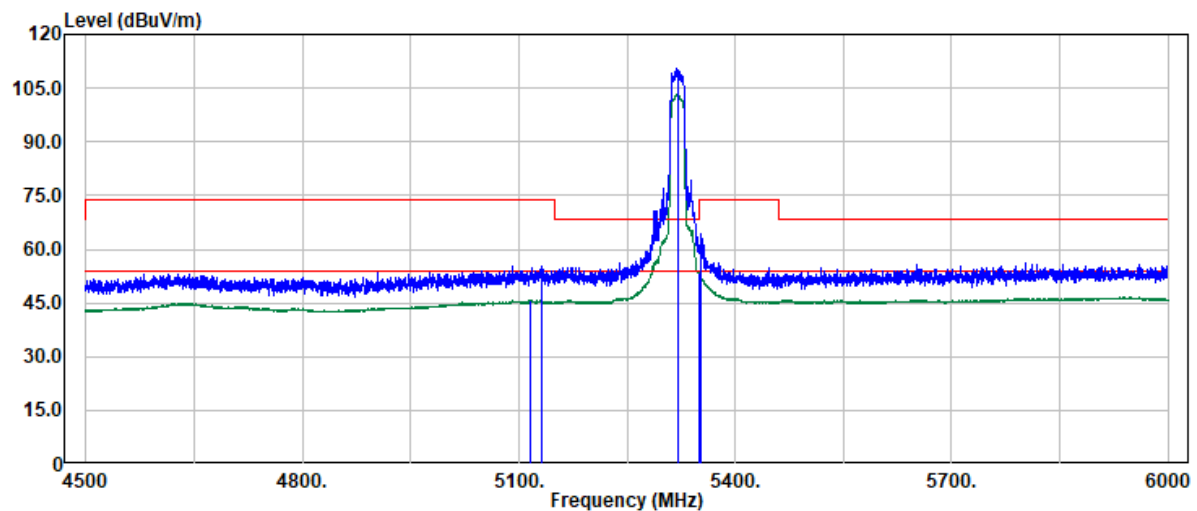

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5115.44	32.59	13.24	45.83	54.00	-8.17	Average
5131.68	41.84	13.26	55.10	74.00	-18.90	Peak
5320.00	96.83	13.54	110.37	--	--	Peak
5320.00	89.78	13.54	103.32	--	--	Average
5350.08	39.84	13.63	53.47	54.00	-0.53	Average
5351.57	50.55	13.63	64.18	74.00	-9.82	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 73 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band2
Frequency : 5310 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 55

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

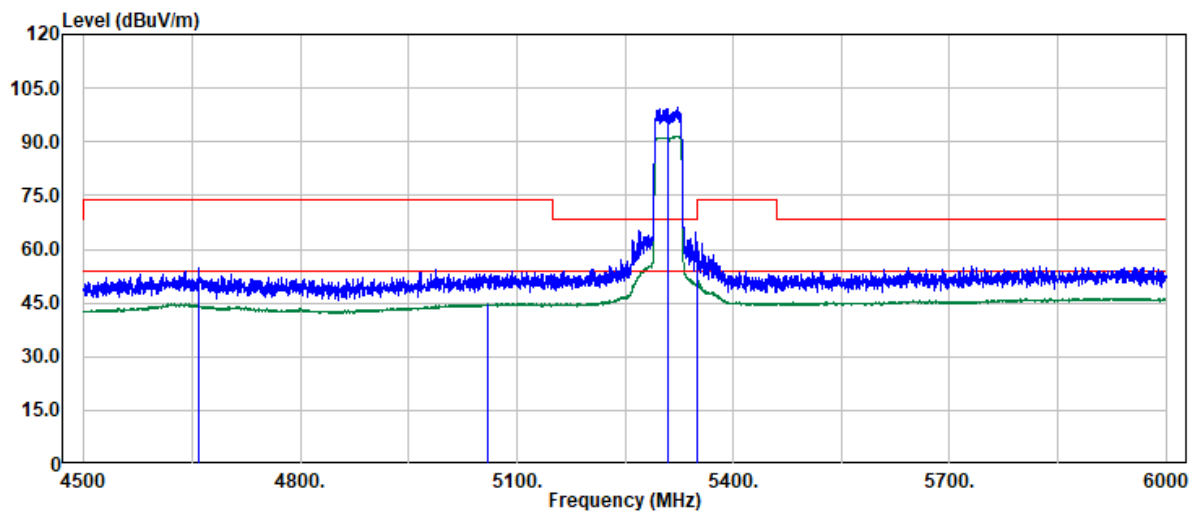

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4658.40	42.66	12.17	54.83	74.00	-19.17	Peak
5059.20	31.86	13.05	44.91	54.00	-9.09	Average
5310.00	86.13	13.52	99.65	--	--	Peak
5310.00	78.01	13.52	91.53	--	--	Average
5350.50	48.42	13.63	62.05	74.00	-11.95	Peak
5351.10	37.71	13.63	51.34	54.00	-2.66	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 74 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band2
Frequency : 5310 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 55

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

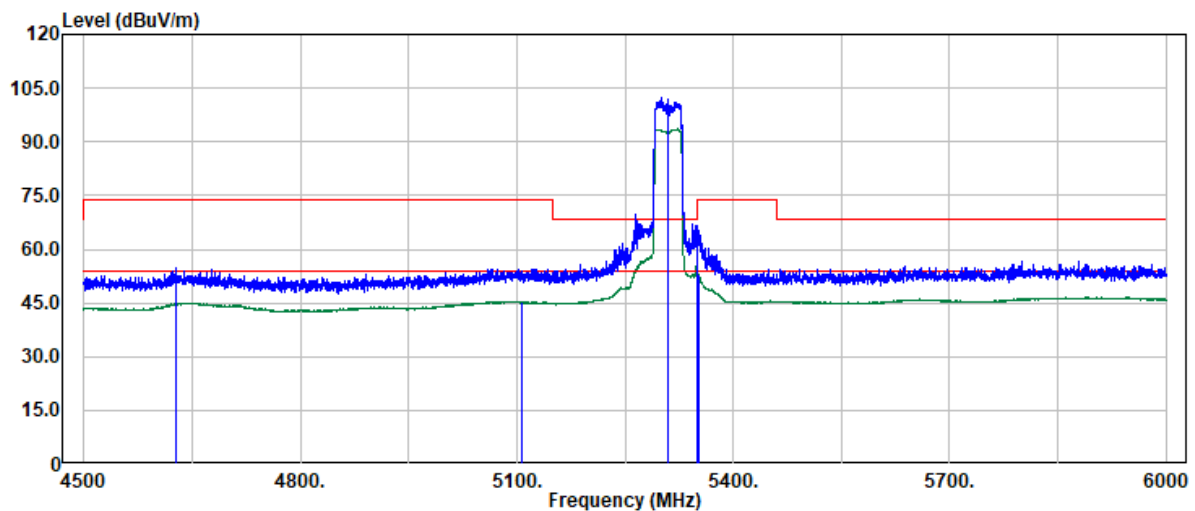

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
4628.40	42.64	12.28	54.92	74.00	-19.08	Peak
5107.80	32.24	13.24	45.48	54.00	-8.52	Average
5310.00	88.84	13.52	102.36	--	--	Peak
5310.00	80.06	13.52	93.58	--	--	Average
5350.80	52.42	13.63	66.05	74.00	-7.95	Peak
5351.40	39.14	13.63	52.77	54.00	-1.23	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 75 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 57

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

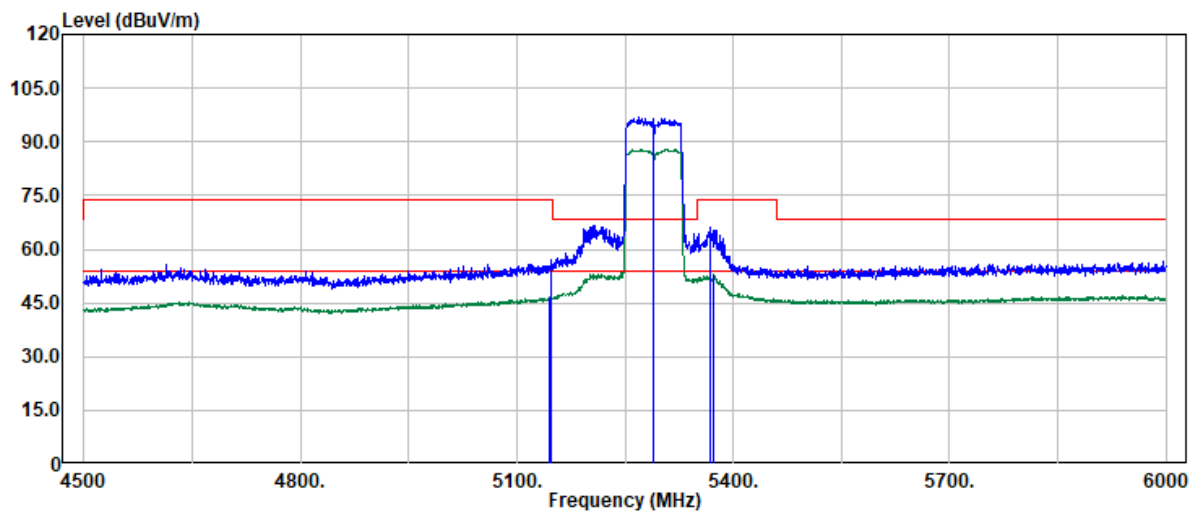

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5145.79	33.21	13.27	46.48	54.00	-7.52	Average
5147.78	43.74	13.27	57.01	74.00	-16.99	Peak
5290.00	83.34	13.47	96.81	--	--	Peak
5290.00	74.47	13.47	87.94	--	--	Average
5369.21	52.54	13.67	66.21	74.00	-7.79	Peak
5373.71	39.47	13.68	53.15	54.00	-0.85	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 76 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 57

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

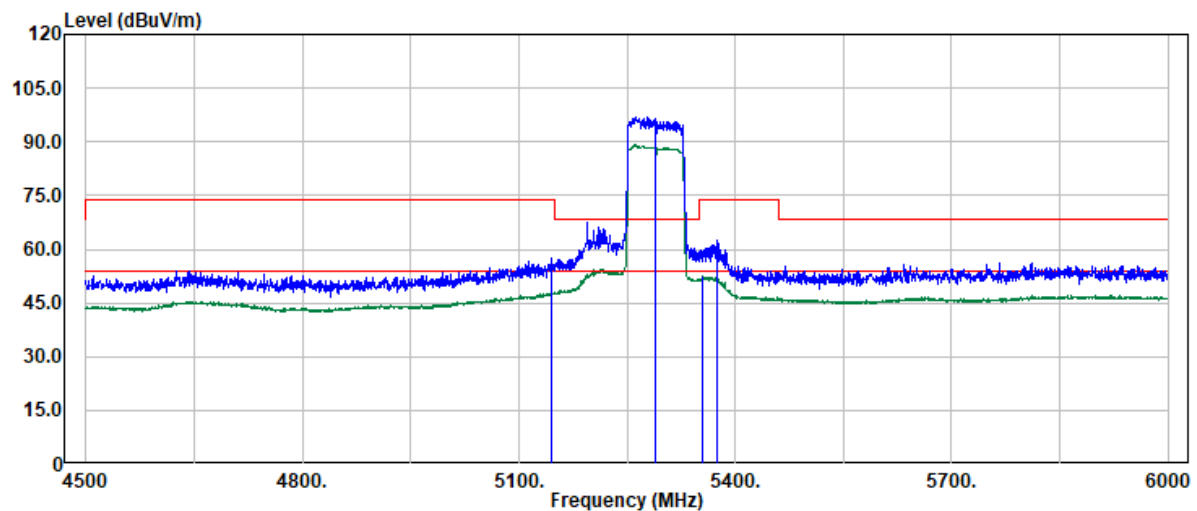


Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5144.79	44.23	13.27	57.50	74.00	-16.50	Peak
5145.29	34.54	13.27	47.81	54.00	-6.19	Average
5290.00	83.51	13.47	96.98	--	--	Peak
5290.00	75.82	13.47	89.29	--	--	Average
5354.22	38.67	13.64	52.31	54.00	-1.69	Average
5375.21	48.61	13.67	62.28	74.00	-11.72	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 77 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11a_Band3	Temp./Humi.	: 24.4/59
Frequency	: 5500 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 60		

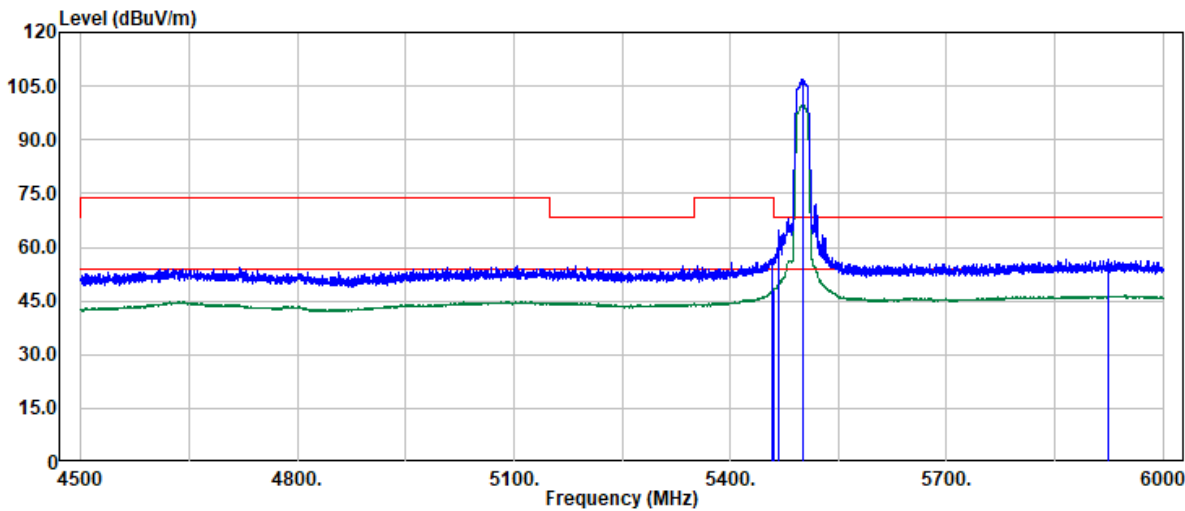

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5459.27	42.52	14.00	56.52	74.00	-17.48	Peak
5460.00	34.09	14.00	48.09	54.00	-5.91	Average
5467.52	50.98	14.00	64.98	68.20	-3.22	Peak
5500.00	92.98	14.02	107.00	--	--	Peak
5500.00	85.85	14.02	99.87	--	--	Average
5925.04	41.30	15.29	56.59	68.20	-11.61	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 78 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band3
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 60

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

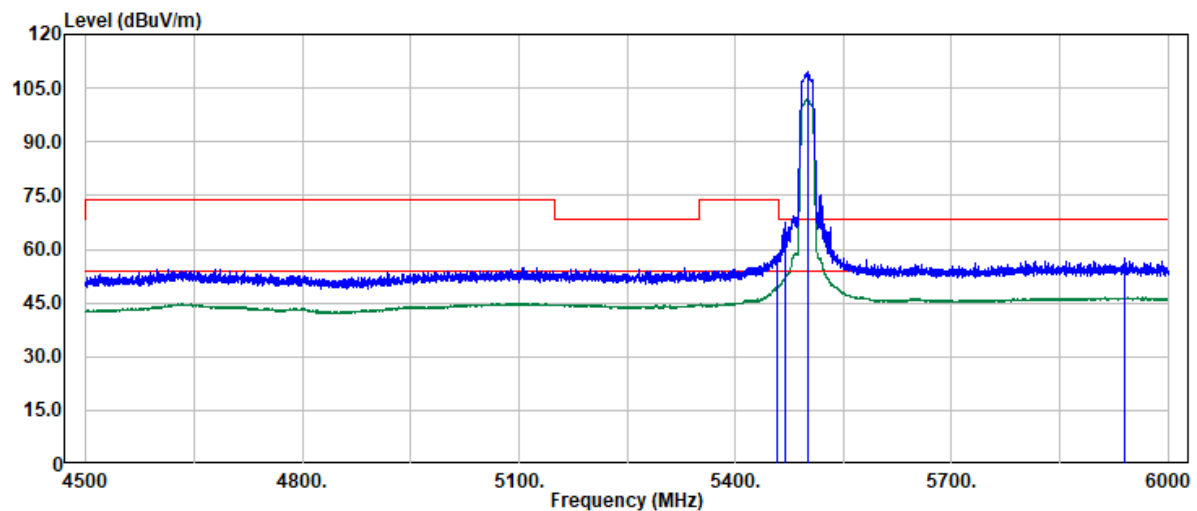

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5458.52	44.21	14.00	58.21	74.00	-15.79	Peak
5459.02	35.98	14.00	49.98	54.00	-4.02	Average
5468.52	53.69	14.00	67.69	68.20	-0.51	Peak
5500.00	95.40	14.02	109.42	--	--	Peak
5500.00	87.98	14.02	102.00	--	--	Average
5939.03	42.14	15.29	57.43	68.20	-10.77	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 79 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 67

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

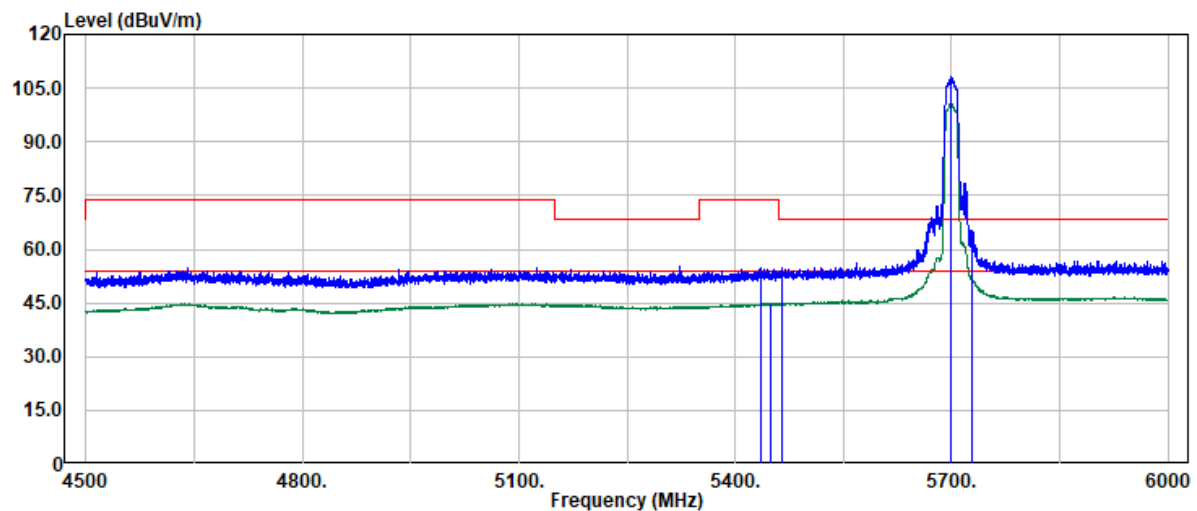

Trace: 1						
Freq	Read	Factor	Actual	Limit		Detector
-----	-----	-----	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5436.78	40.65	13.92	54.57	74.00	-19.43	Peak
5449.28	30.89	13.99	44.88	54.00	-9.12	Average
5465.27	40.73	14.00	54.73	68.20	-13.47	Peak
5700.00	92.98	15.10	108.08	--	--	Peak
5700.00	85.58	15.10	100.68	--	--	Average
5727.89	50.16	15.27	65.43	68.20	-2.77	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 80 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 67

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

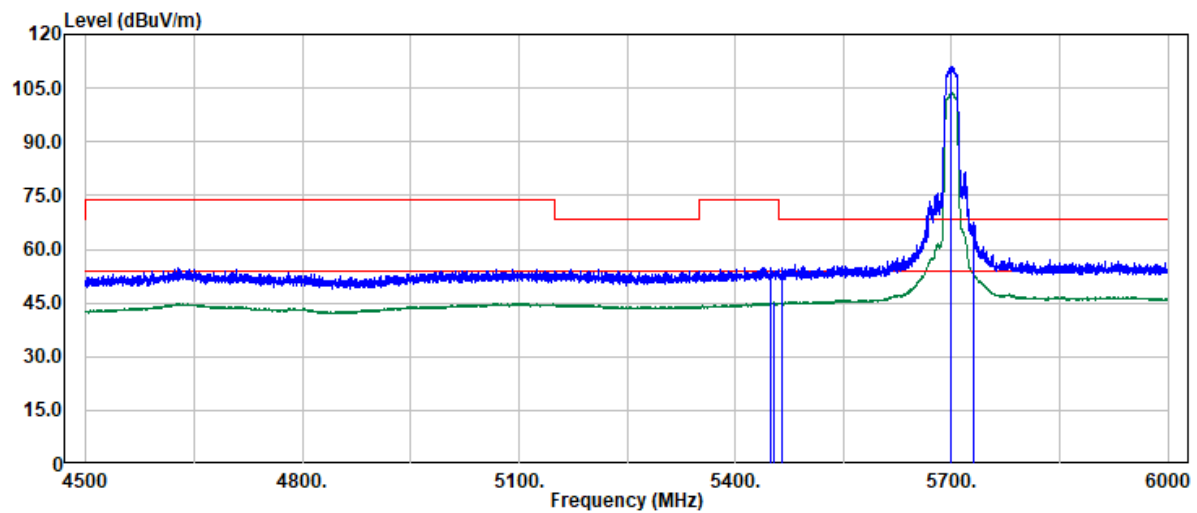

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5450.03	40.85	14.00	54.85	74.00	-19.15	Peak
5454.02	31.25	14.00	45.25	54.00	-8.75	Average
5466.02	40.68	14.00	54.68	68.20	-13.52	Peak
5700.00	95.94	15.10	111.04	--	--	Peak
5700.00	88.81	15.10	103.91	--	--	Average
5730.64	52.19	15.30	67.49	68.20	-0.71	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 81 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 60

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

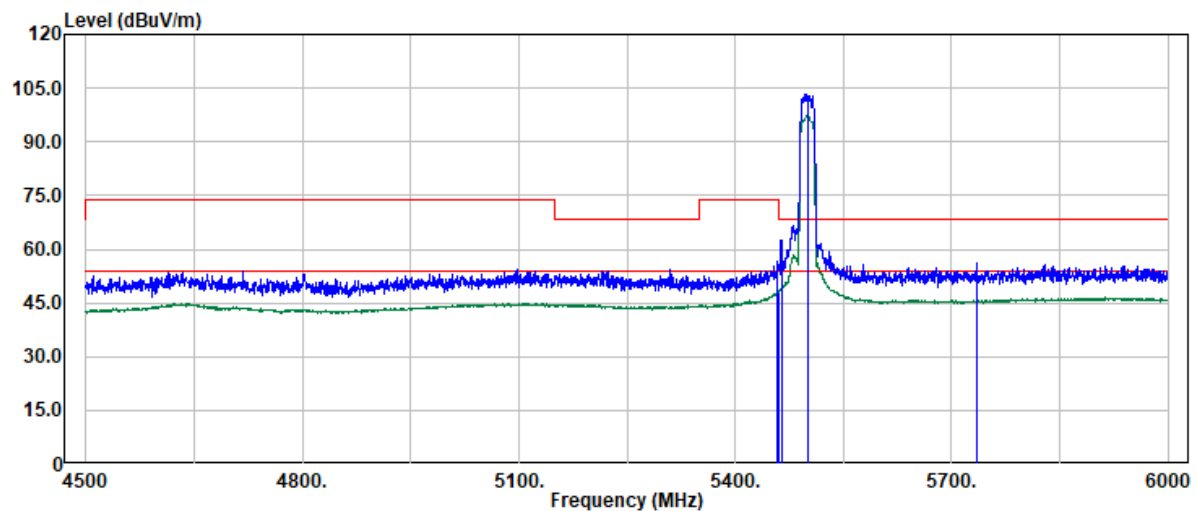

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5459.18	42.62	14.00	56.62	74.00	-17.38	Peak
5460.18	34.06	14.00	48.06	54.00	-5.94	Average
5464.18	48.56	14.00	62.56	68.20	-5.64	Peak
5500.00	89.24	14.02	103.26	--	--	Peak
5500.00	83.18	14.02	97.20	--	--	Average
5734.59	40.69	15.31	56.00	68.20	-12.20	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 82 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5500 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 60

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

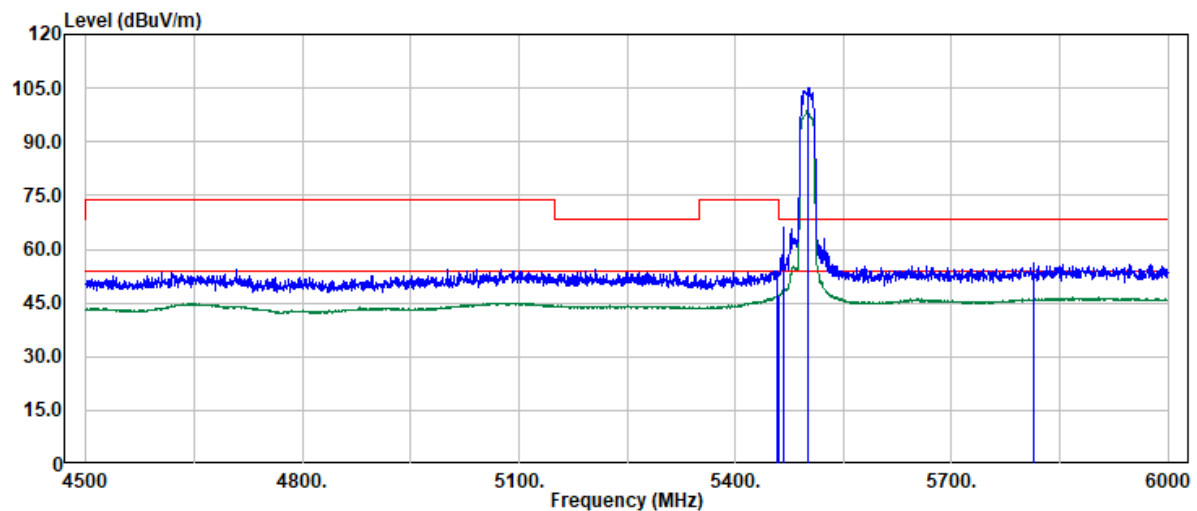

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5457.68	40.07	14.00	54.07	74.00	-19.93	Peak
5459.68	33.22	14.00	47.22	54.00	-6.78	Average
5468.24	52.43	14.00	66.43	68.20	-1.77	Peak
5500.00	91.25	14.02	105.27	--	--	Peak
5500.00	84.50	14.02	98.52	--	--	Average
5814.06	40.61	15.43	56.04	68.20	-12.16	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 83 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 51

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

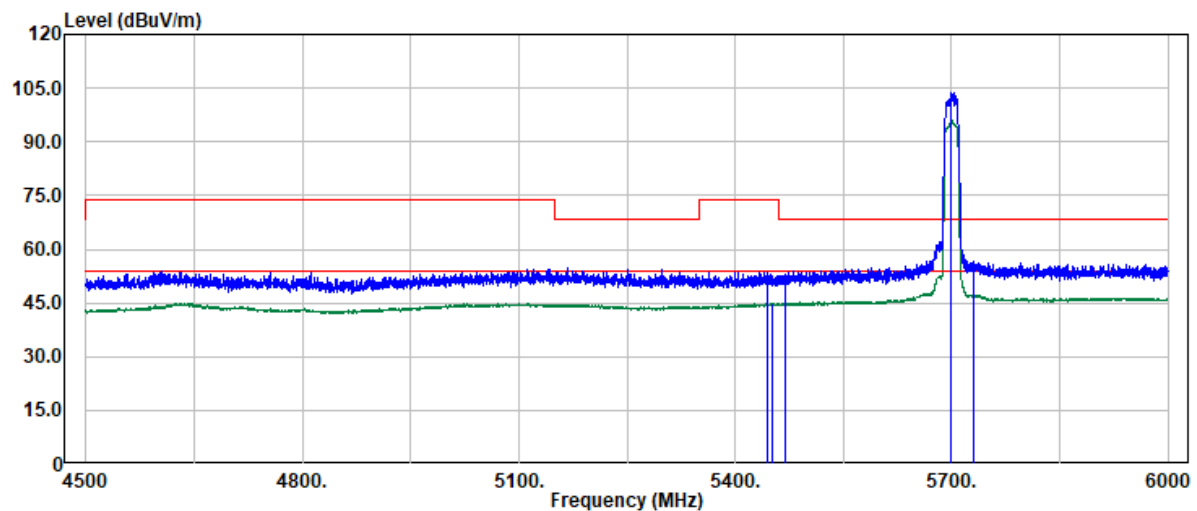

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5444.78	39.68	13.97	53.65	74.00	-20.35	Peak
5452.27	30.78	14.00	44.78	54.00	-9.22	Average
5468.52	38.87	14.00	52.87	68.20	-15.33	Peak
5700.00	88.44	15.10	103.54	--	--	Peak
5700.00	80.78	15.10	95.88	--	--	Average
5731.13	41.25	15.30	56.55	68.20	-11.65	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 84 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5700 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 51

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

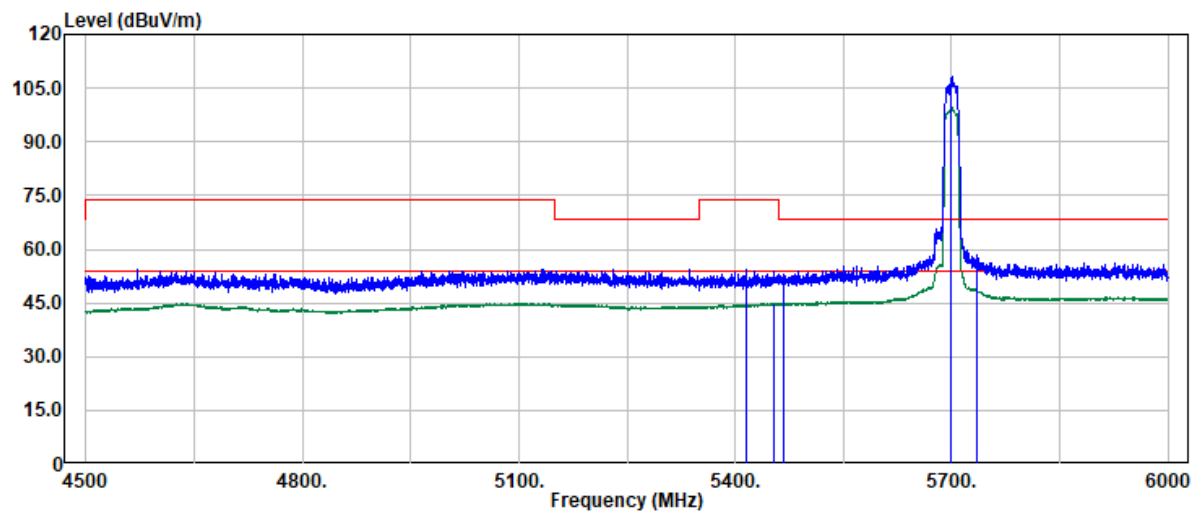

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5414.79	40.36	13.81	54.17	74.00	-19.83	Peak
5454.77	30.88	14.00	44.88	54.00	-9.12	Average
5468.27	38.94	14.00	52.94	68.20	-15.26	Peak
5700.00	92.94	15.10	108.04	--	--	Peak
5700.00	84.53	15.10	99.63	--	--	Average
5735.88	43.09	15.32	58.41	68.20	-9.79	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 85 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 57

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

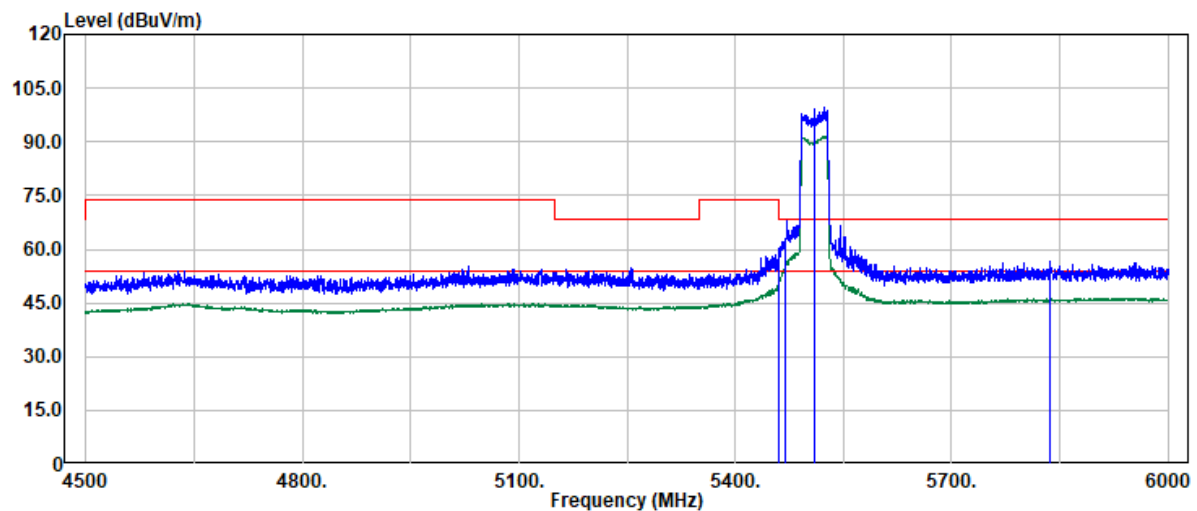

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5460.00	45.52	14.00	59.52	74.00	-14.48	Peak
5460.00	36.52	14.00	50.52	54.00	-3.48	Average
5468.70	49.04	14.00	63.04	68.20	-5.16	Peak
5510.00	85.50	14.07	99.57	--	--	Peak
5510.00	77.32	14.07	91.39	--	--	Average
5835.90	41.42	15.38	56.80	68.20	-11.40	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 86 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5510 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 57

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

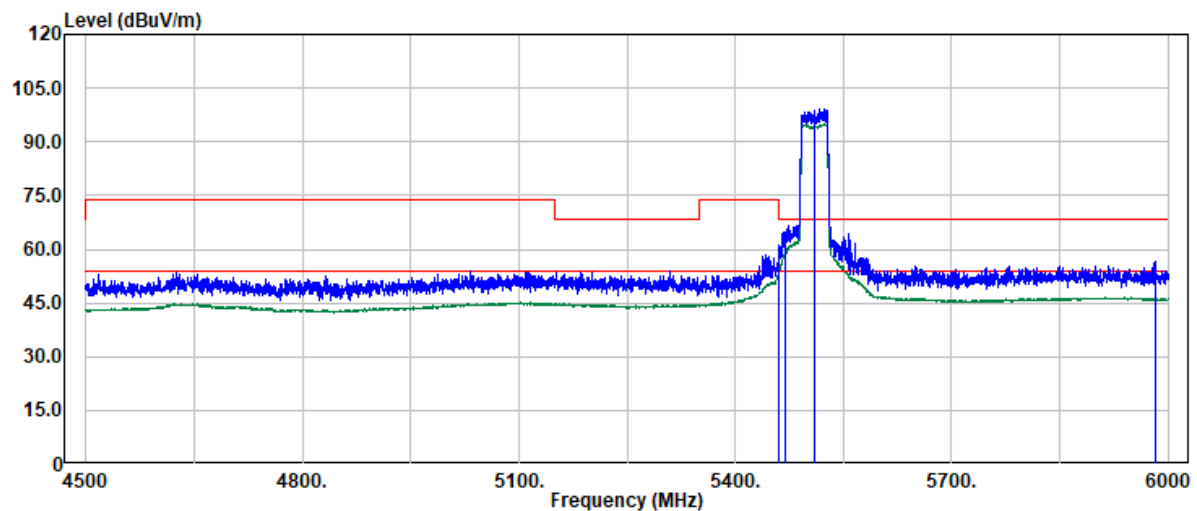

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5459.70	44.93	14.00	58.93	74.00	-15.07	Peak
5460.00	39.40	14.00	53.40	54.00	-0.60	Average
5469.90	50.97	14.00	64.97	68.20	-3.23	Peak
5510.00	85.18	14.07	99.25	--	--	Peak
5510.00	80.83	14.07	94.90	--	--	Average
5981.70	41.41	15.27	56.68	68.20	-11.52	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 87 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5670 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 60

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

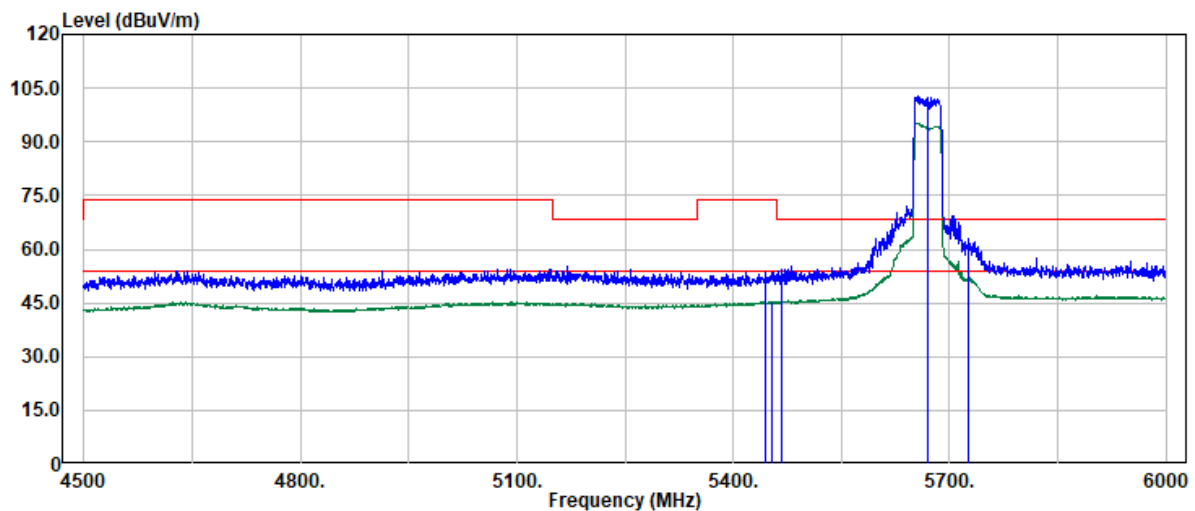

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5445.69	39.66	13.97	53.63	74.00	-20.37	Peak
5453.18	31.32	14.00	45.32	54.00	-8.68	Average
5467.18	40.50	14.00	54.50	68.20	-13.70	Peak
5670.00	87.61	15.01	102.62	--	--	Peak
5670.00	80.16	15.01	95.17	--	--	Average
5725.59	47.75	15.25	63.00	68.20	-5.20	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 88 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5670 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 60

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

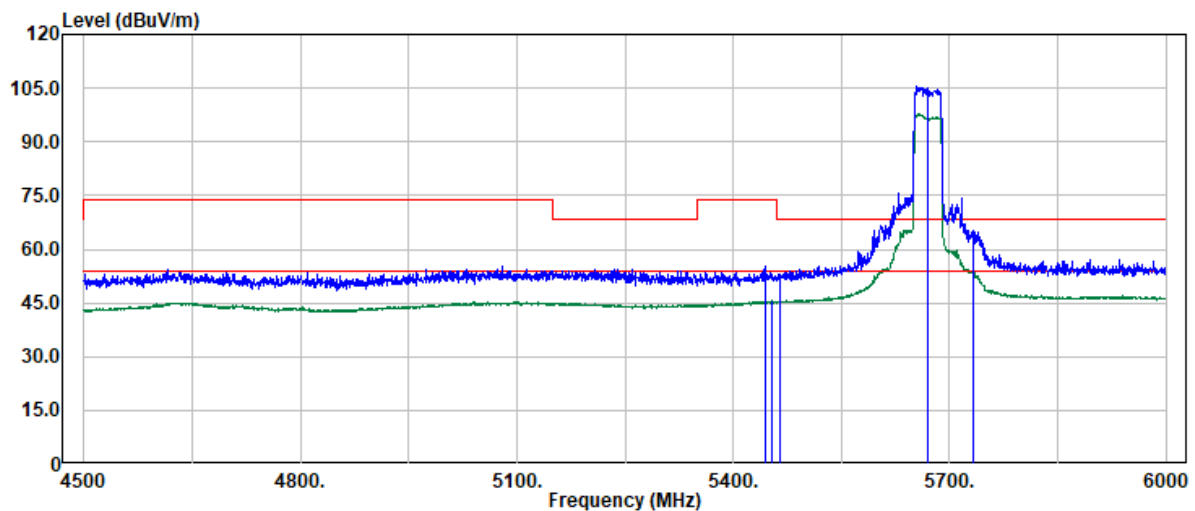

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5443.69	41.13	13.96	55.09	74.00	-18.91	Peak
5454.68	31.59	14.00	45.59	54.00	-8.41	Average
5465.68	39.20	14.00	53.20	68.20	-15.00	Peak
5670.00	90.58	15.01	105.59	--	--	Peak
5670.00	82.70	15.01	97.71	--	--	Average
5733.59	50.13	15.30	65.43	68.20	-2.77	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 89 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 54

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

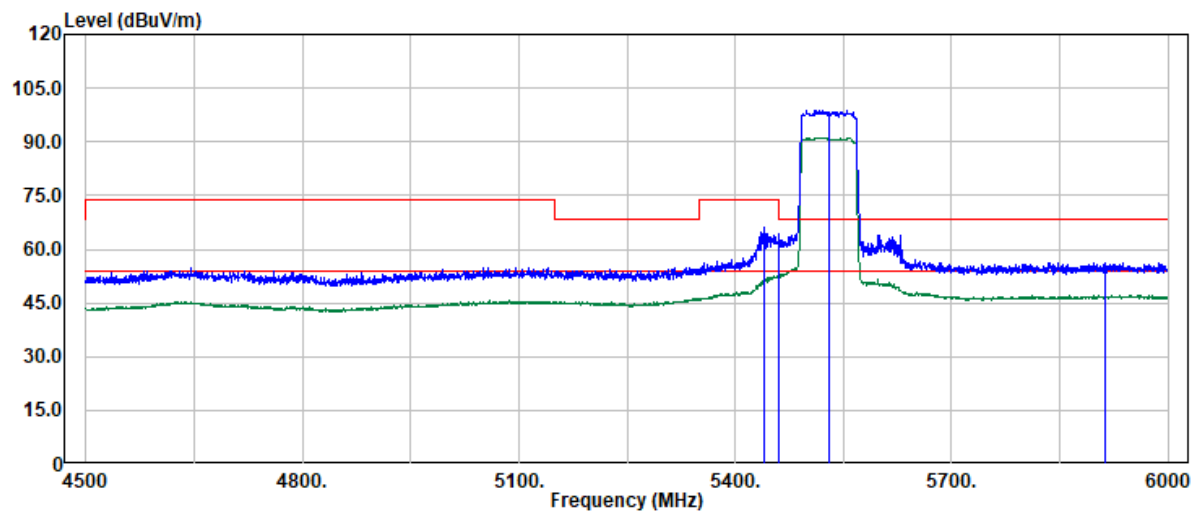


Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5439.69	52.09	13.94	66.03	74.00	-7.97	Peak
5460.00	38.67	14.00	52.67	54.00	-1.33	Average
5461.18	50.08	14.00	64.08	68.20	-4.12	Peak
5530.00	84.70	14.17	98.87	--	--	Peak
5530.00	77.02	14.17	91.19	--	--	Average
5912.03	41.04	15.28	56.32	68.20	-11.88	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 90 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11ac80_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5530 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: Bandedge	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 54		

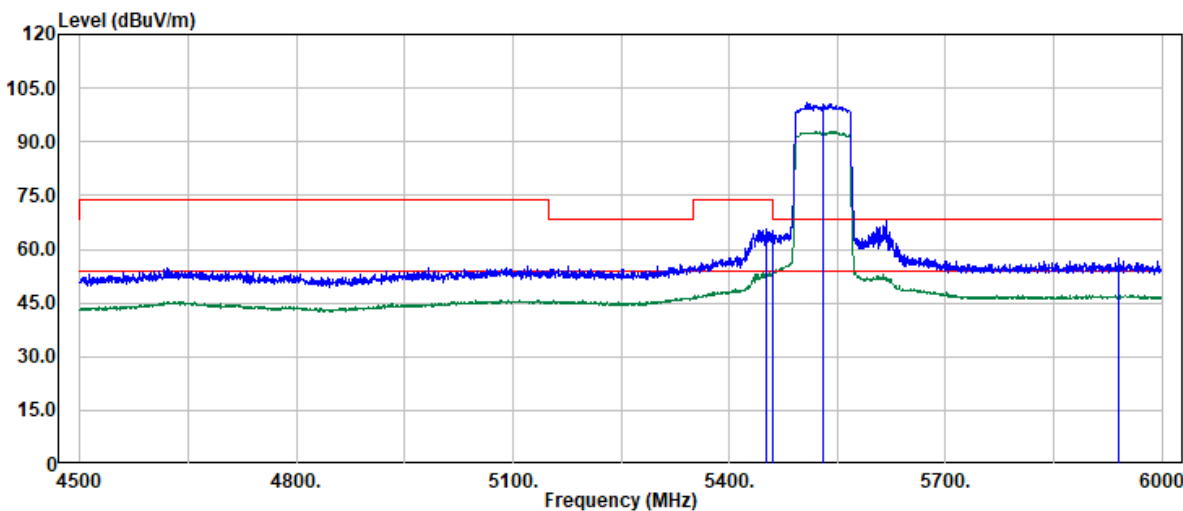


Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5451.68	51.84	14.00	65.84	74.00	-8.16	Peak
5460.00	39.55	14.00	53.55	54.00	-0.45	Average
5461.18	51.09	14.00	65.09	68.20	-3.11	Peak
5530.00	86.79	14.17	100.96	--	--	Peak
5530.00	78.63	14.17	92.80	--	--	Average
5940.02	42.03	15.29	57.32	68.20	-10.88	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 91 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11ac80_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5610 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: Bandedge	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 72		

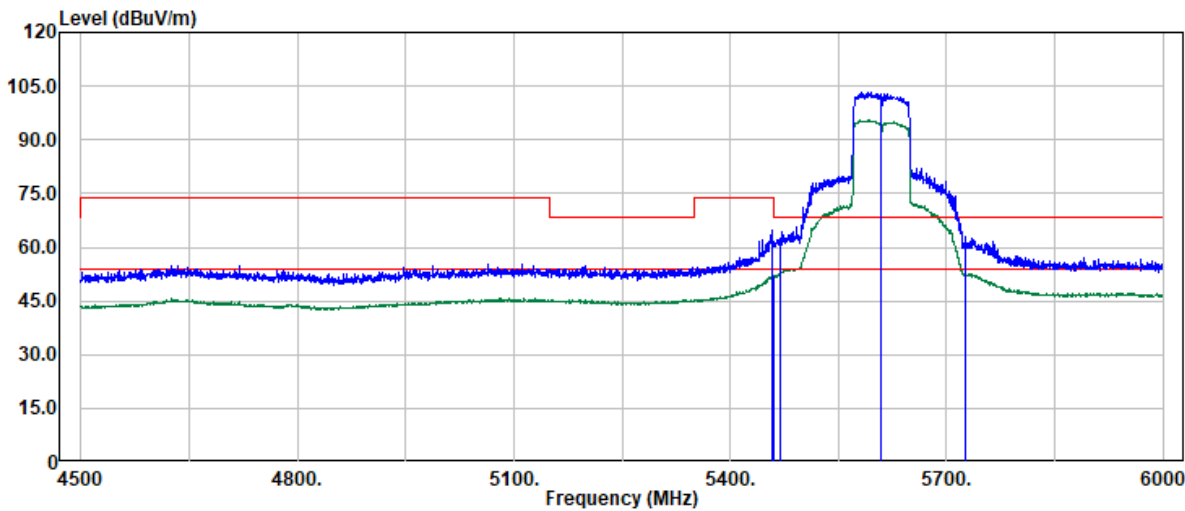

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5458.68	50.94	14.00	64.94	74.00	-9.06	Peak
5460.00	38.13	14.00	52.13	54.00	-1.87	Average
5469.18	48.59	14.00	62.59	68.20	-5.61	Peak
5610.00	88.80	14.48	103.28	--	--	Peak
5610.00	80.91	14.48	95.39	--	--	Average
5726.59	47.65	15.26	62.91	68.20	-5.29	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 92 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 72

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

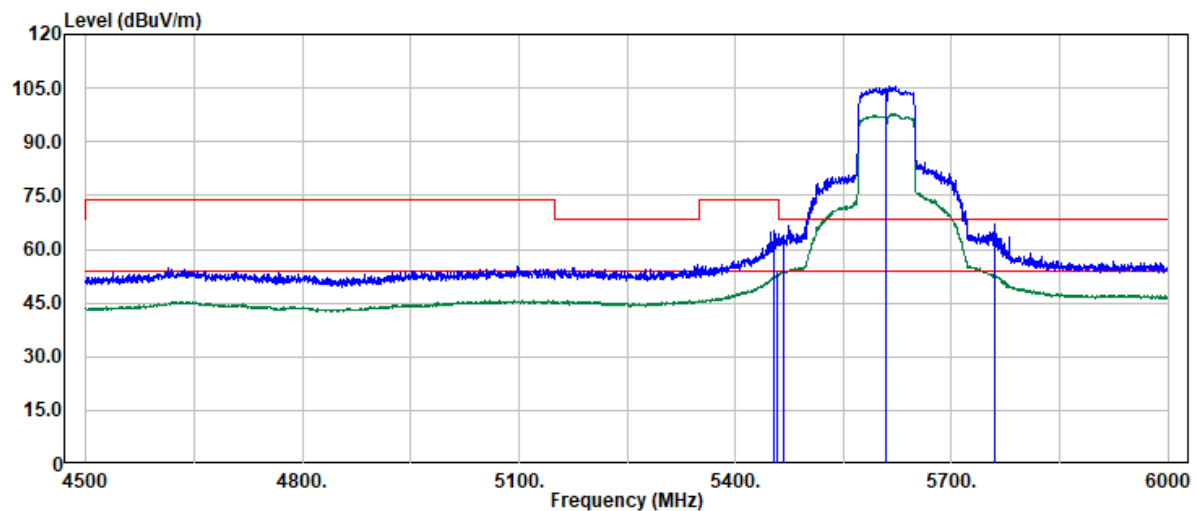

Trace: 1						
Freq	Read	Factor	Actual	Limit	Detector	
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5454.18	51.15	14.00	65.15	74.00	-8.85	Peak
5458.18	39.44	14.00	53.44	54.00	-0.56	Average
5466.18	49.80	14.00	63.80	68.20	-4.40	Peak
5610.00	91.20	14.48	105.68	--	--	Peak
5610.00	83.35	14.48	97.83	--	--	Average
5760.58	51.64	15.42	67.06	68.20	-1.14	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 93 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

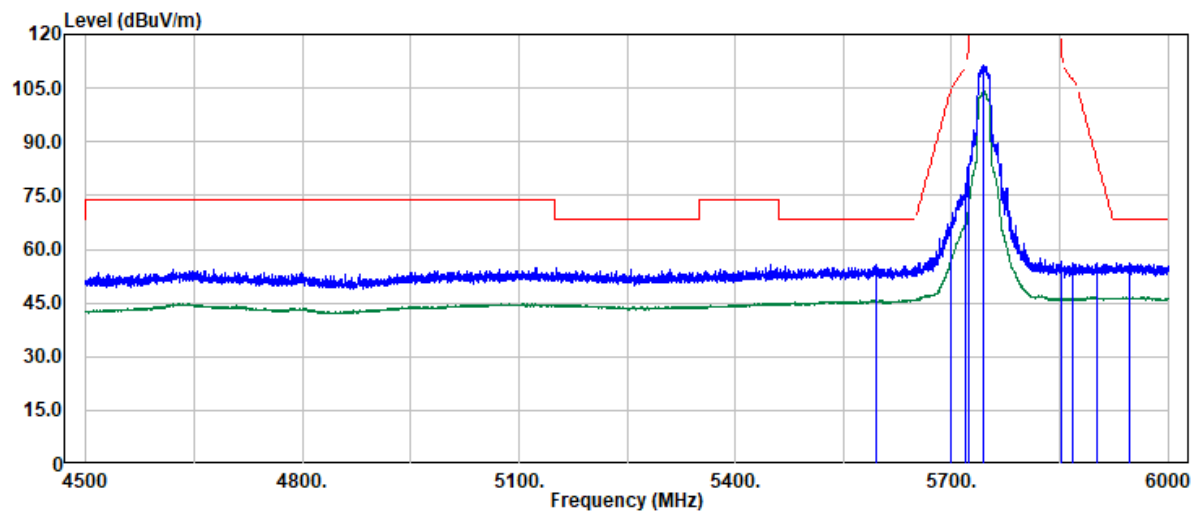

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5595.20	41.57	14.35	55.92	68.20	-12.28	Peak
5699.15	52.43	15.10	67.53	104.57	-37.04	Peak
5719.39	62.47	15.22	77.69	110.63	-32.94	Peak
5723.14	68.37	15.25	83.62	117.96	-34.34	Peak
5745.00	96.04	15.37	111.41	--	--	Peak
5745.00	88.78	15.37	104.15	--	--	Average
5851.82	41.24	15.36	56.60	118.04	-61.44	Peak
5867.82	40.61	15.32	55.93	107.21	-51.28	Peak
5900.80	40.72	15.27	55.99	86.07	-30.08	Peak
5947.03	40.94	15.30	56.24	68.20	-11.96	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 94 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

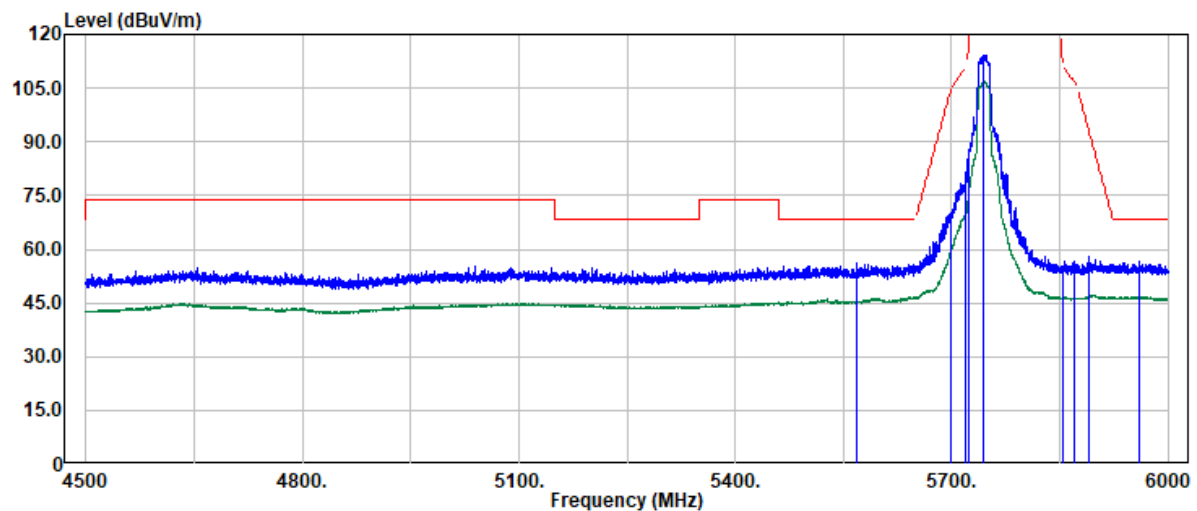

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5567.72	42.05	14.30	56.35	68.20	-11.85	Peak
5698.65	54.69	15.09	69.78	104.21	-34.43	Peak
5719.64	66.36	15.22	81.58	110.70	-29.12	Peak
5724.89	72.32	15.26	87.58	121.94	-34.36	Peak
5745.00	98.81	15.37	114.18	--	--	Peak
5745.00	91.75	15.37	107.12	--	--	Average
5853.32	40.03	15.35	55.38	114.62	-59.24	Peak
5870.81	41.45	15.32	56.77	106.37	-49.60	Peak
5891.30	42.53	15.28	57.81	93.10	-35.29	Peak
5960.77	41.11	15.29	56.40	68.20	-11.80	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 95 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

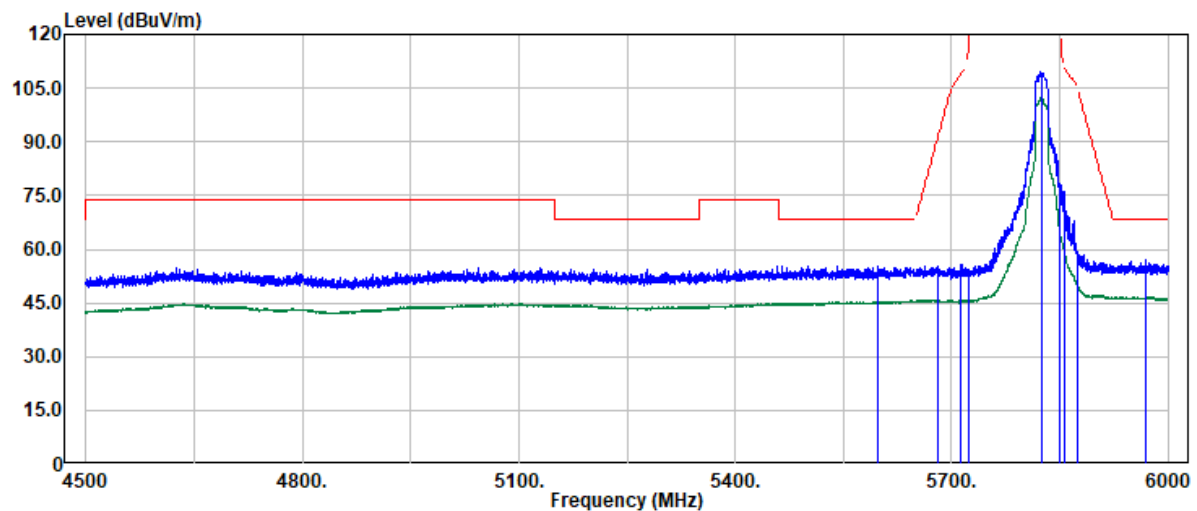

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5598.20	41.08	14.36	55.44	68.20	-12.76	Peak
5680.91	40.15	15.04	55.19	91.11	-35.92	Peak
5713.64	40.49	15.19	55.68	109.02	-53.34	Peak
5724.89	39.26	15.26	54.52	121.94	-67.42	Peak
5825.00	94.33	15.41	109.74	--	--	Peak
5825.00	86.94	15.41	102.35	--	--	Average
5850.58	62.81	15.36	78.17	120.89	-42.72	Peak
5855.82	60.81	15.35	76.16	110.57	-34.41	Peak
5875.31	43.39	15.31	58.70	104.97	-46.27	Peak
5970.02	41.82	15.27	57.09	68.20	-11.11	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 96 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.4/59
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

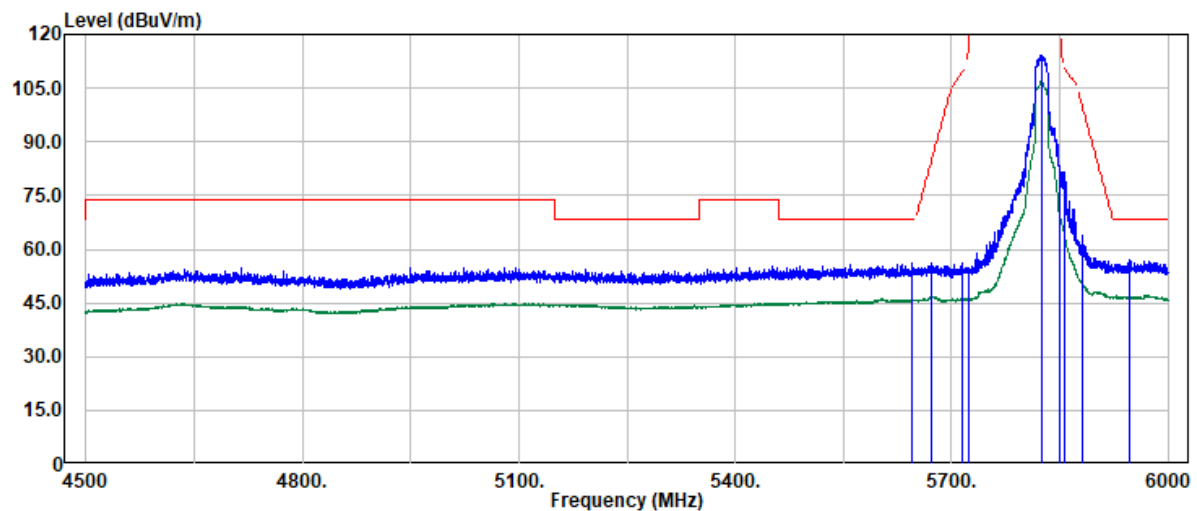

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5644.43	41.46	14.90	56.36	68.20	-11.84	Peak
5672.66	41.01	15.02	56.03	85.01	-28.98	Peak
5714.14	40.98	15.19	56.17	109.16	-52.99	Peak
5723.89	39.60	15.25	54.85	119.67	-64.82	Peak
5825.00	98.77	15.41	114.18	--	--	Peak
5825.00	91.34	15.41	106.75	--	--	Average
5850.58	67.18	15.36	82.54	120.89	-38.35	Peak
5856.07	66.25	15.35	81.60	110.50	-28.90	Peak
5881.81	48.48	15.30	63.78	100.14	-36.36	Peak
5947.03	41.74	15.30	57.04	68.20	-11.16	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 97 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

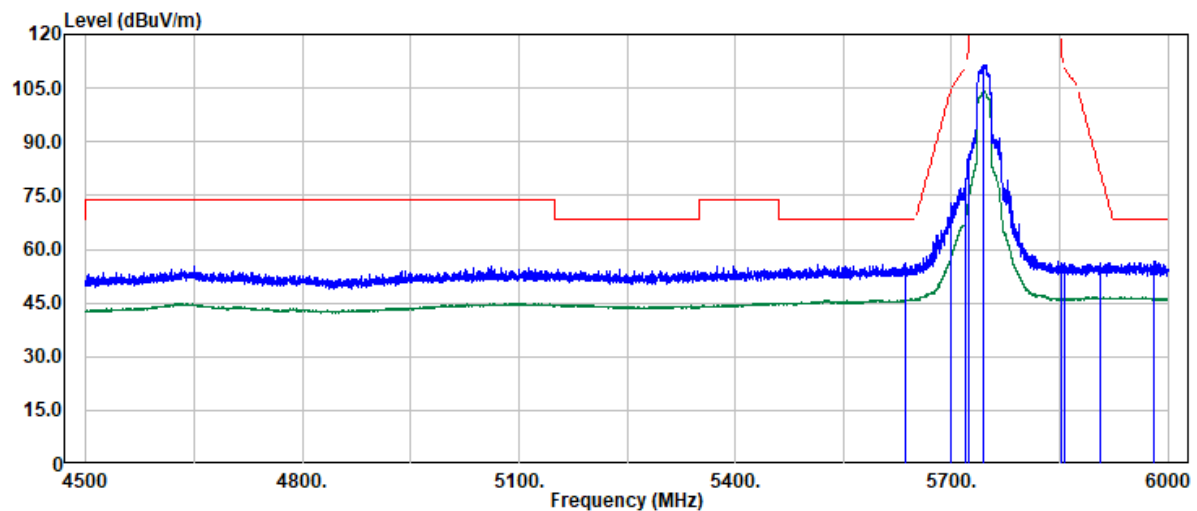

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5636.18	41.25	14.79	56.04	68.20	-12.16	Peak
5699.40	58.01	15.10	73.11	104.76	-31.65	Peak
5719.64	64.35	15.22	79.57	110.70	-31.13	Peak
5723.64	71.40	15.25	86.65	119.10	-32.45	Peak
5745.00	95.98	15.37	111.35	--	--	Peak
5745.00	88.84	15.37	104.21	--	--	Average
5851.07	40.65	15.36	56.01	119.75	-63.74	Peak
5856.57	40.73	15.35	56.08	110.36	-54.28	Peak
5906.05	41.10	15.27	56.37	82.19	-25.82	Peak
5981.51	41.28	15.27	56.55	68.20	-11.65	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 98 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

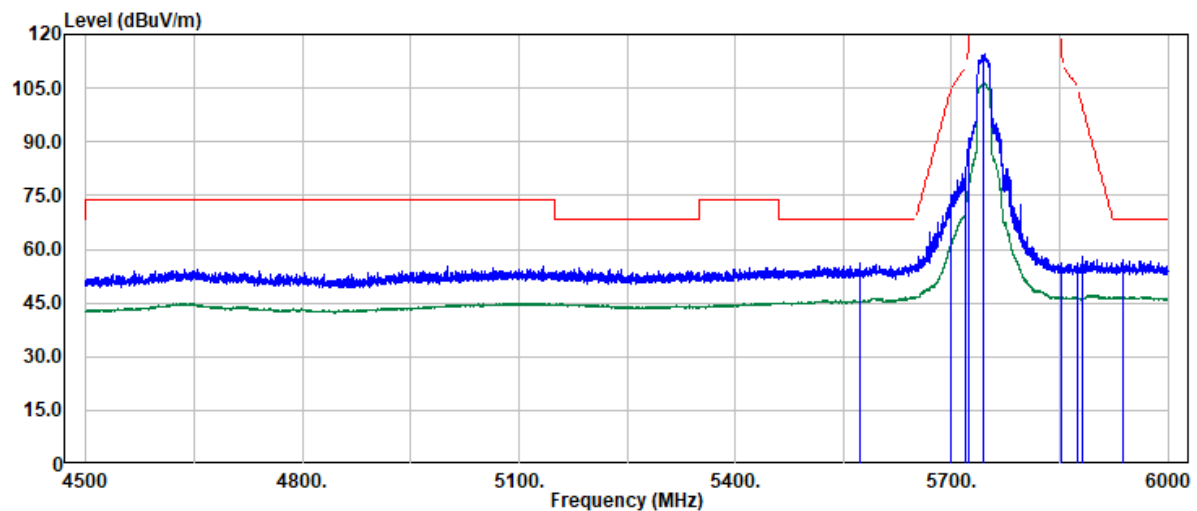

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5572.46	42.00	14.30	56.30	68.20	-11.90	Peak
5698.15	60.02	15.09	75.11	103.84	-28.73	Peak
5719.89	66.02	15.22	81.24	110.77	-29.53	Peak
5723.89	75.88	15.25	91.13	119.67	-28.54	Peak
5745.00	99.36	15.37	114.73	--	--	Peak
5745.00	91.20	15.37	106.57	--	--	Average
5851.32	40.60	15.36	55.96	119.18	-63.22	Peak
5874.81	40.84	15.32	56.16	105.25	-49.09	Peak
5880.31	42.57	15.30	57.87	101.26	-43.39	Peak
5938.28	41.72	15.29	57.01	68.20	-11.19	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 99 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

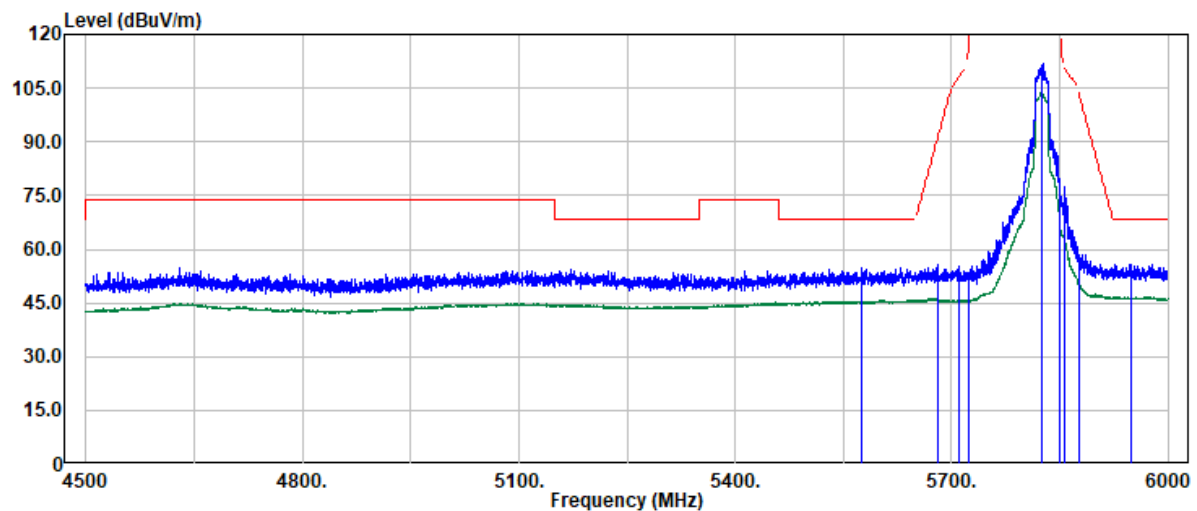

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5575.21	40.43	14.30	54.73	68.20	-13.47	Peak
5680.91	40.62	15.04	55.66	91.11	-35.45	Peak
5710.90	40.03	15.17	55.20	108.25	-53.05	Peak
5724.14	38.34	15.25	53.59	120.24	-66.65	Peak
5825.00	96.66	15.41	112.07	--	--	Peak
5825.00	88.16	15.41	103.57	--	--	Average
5850.58	61.18	15.36	76.54	120.89	-44.35	Peak
5857.57	62.08	15.34	77.42	110.08	-32.66	Peak
5876.06	43.29	15.31	58.60	104.41	-45.81	Peak
5949.78	40.56	15.30	55.86	68.20	-12.34	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 100 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

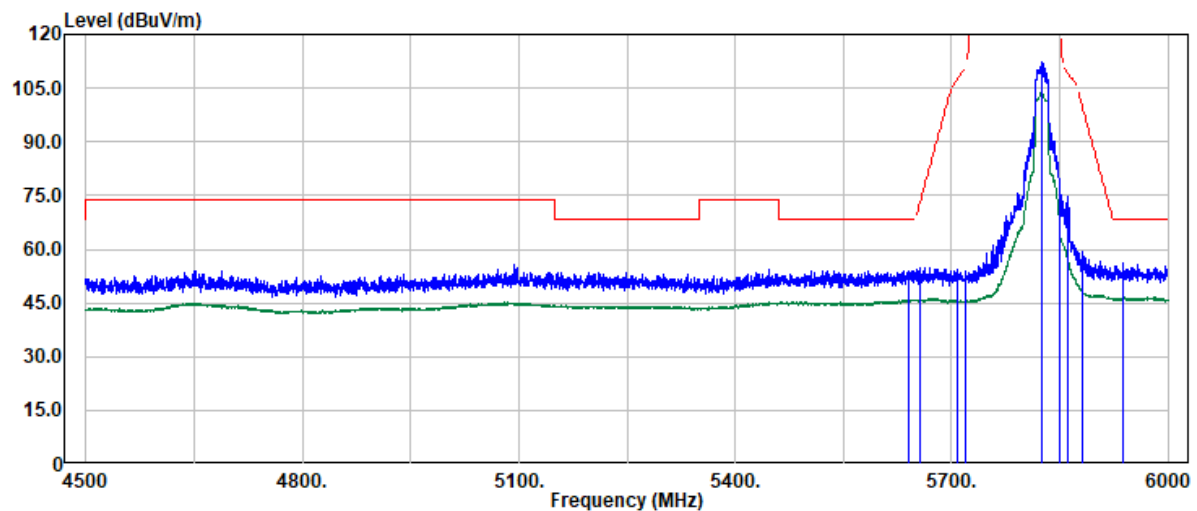

Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5640.90	39.25	14.85	54.10	68.20	-14.10	Peak
5655.30	40.03	14.96	54.99	72.14	-17.15	Peak
5707.80	39.18	15.14	54.32	107.39	-53.07	Peak
5720.40	38.48	15.22	53.70	111.71	-58.01	Peak
5825.00	97.00	15.41	112.41	--	--	Peak
5825.00	88.17	15.41	103.58	--	--	Average
5850.30	63.42	15.36	78.78	121.52	-42.74	Peak
5860.50	59.34	15.34	74.68	109.26	-34.58	Peak
5882.10	44.15	15.30	59.45	99.93	-40.48	Peak
5937.30	40.90	15.29	56.19	68.20	-12.01	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 101 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 70

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

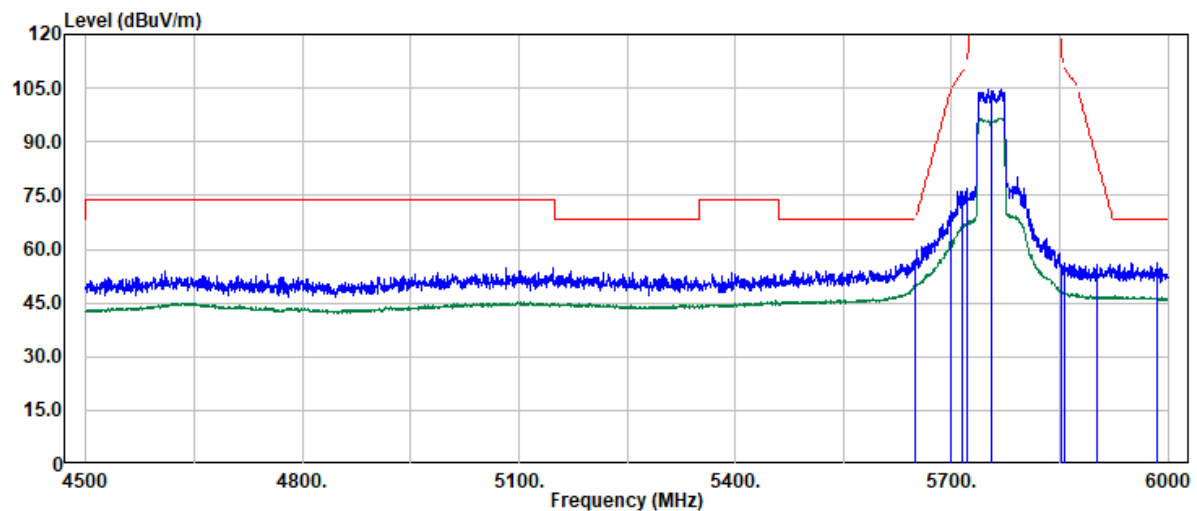

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5648.62	42.29	14.94	57.23	68.20	-10.97	Peak
5698.10	55.53	15.09	70.62	103.80	-33.18	Peak
5714.10	60.91	15.19	76.10	109.15	-33.05	Peak
5721.59	61.79	15.23	77.02	114.43	-37.41	Peak
5755.00	89.41	15.42	104.83	--	--	Peak
5755.00	81.16	15.42	96.58	--	--	Average
5851.05	40.46	15.36	55.82	119.81	-63.99	Peak
5856.55	40.94	15.35	56.29	110.37	-54.08	Peak
5901.03	40.39	15.27	55.66	85.90	-30.24	Peak
5984.01	41.06	15.26	56.32	68.20	-11.88	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 102 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 70

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

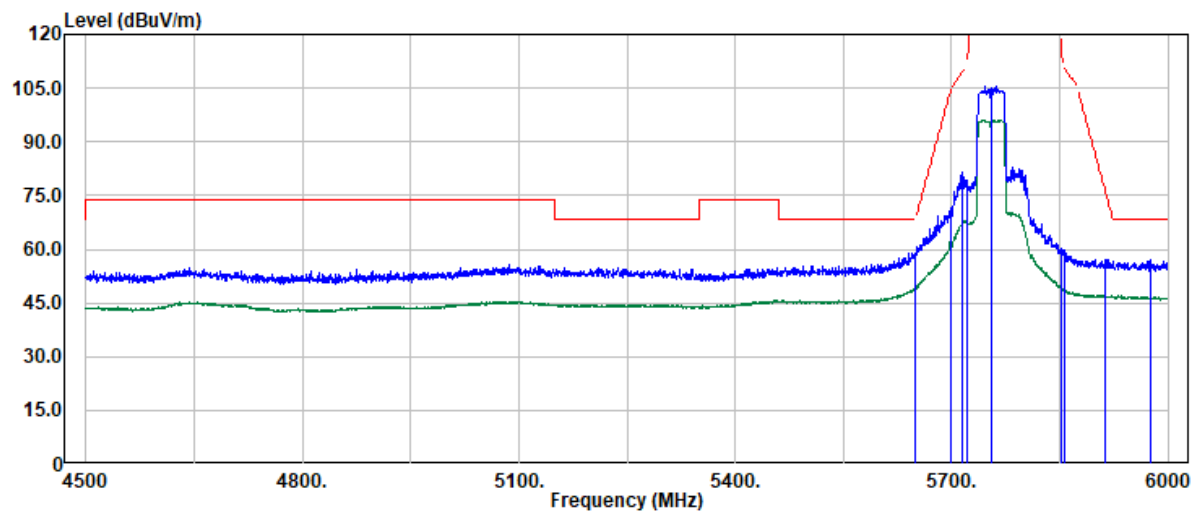

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5649.12	44.08	14.94	59.02	68.20	-9.18	Peak
5699.60	56.57	15.10	71.67	104.91	-33.24	Peak
5714.10	66.28	15.19	81.47	109.15	-27.68	Peak
5721.59	63.94	15.23	79.17	114.43	-35.26	Peak
5755.00	90.26	15.42	105.68	--	--	Peak
5755.00	80.60	15.42	96.02	--	--	Average
5852.55	44.72	15.35	60.07	116.39	-56.32	Peak
5855.55	44.49	15.35	59.84	110.65	-50.81	Peak
5913.53	41.86	15.28	57.14	76.66	-19.52	Peak
5975.01	41.84	15.27	57.11	68.20	-11.09	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 103 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 70

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

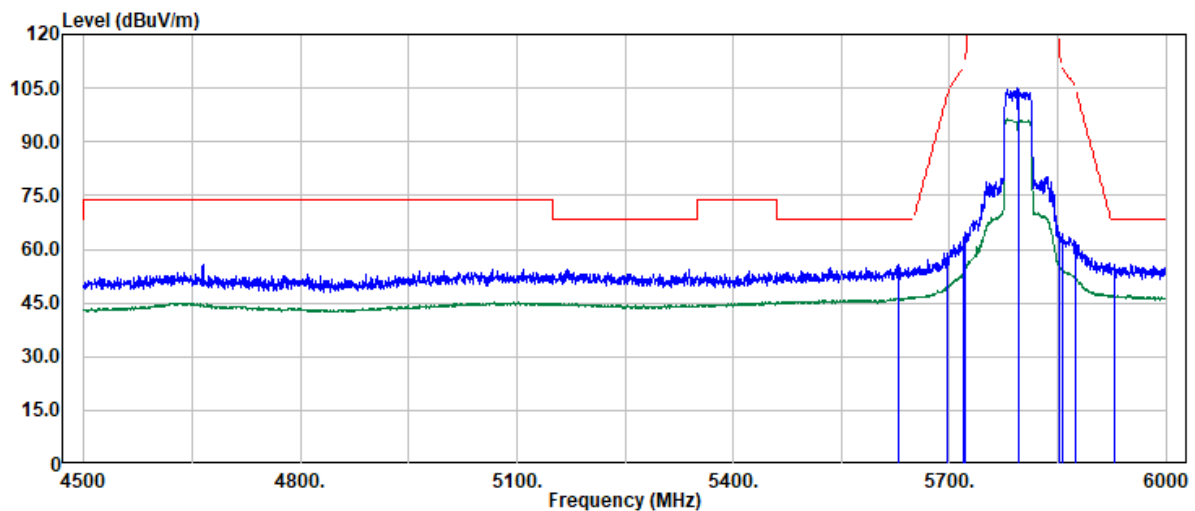

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5629.12	40.80	14.71	55.51	68.20	-12.69	Peak
5697.10	43.78	15.10	58.88	103.06	-44.18	Peak
5720.09	47.99	15.22	63.21	111.01	-47.80	Peak
5721.09	49.44	15.23	64.67	113.29	-48.62	Peak
5795.00	89.76	15.45	105.21	--	--	Peak
5795.00	80.78	15.45	96.23	--	--	Average
5852.05	49.22	15.36	64.58	117.53	-52.95	Peak
5855.55	49.15	15.35	64.50	110.65	-46.15	Peak
5875.04	46.48	15.31	61.79	105.17	-43.38	Peak
5929.02	40.38	15.29	55.67	68.20	-12.53	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 104 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 70

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

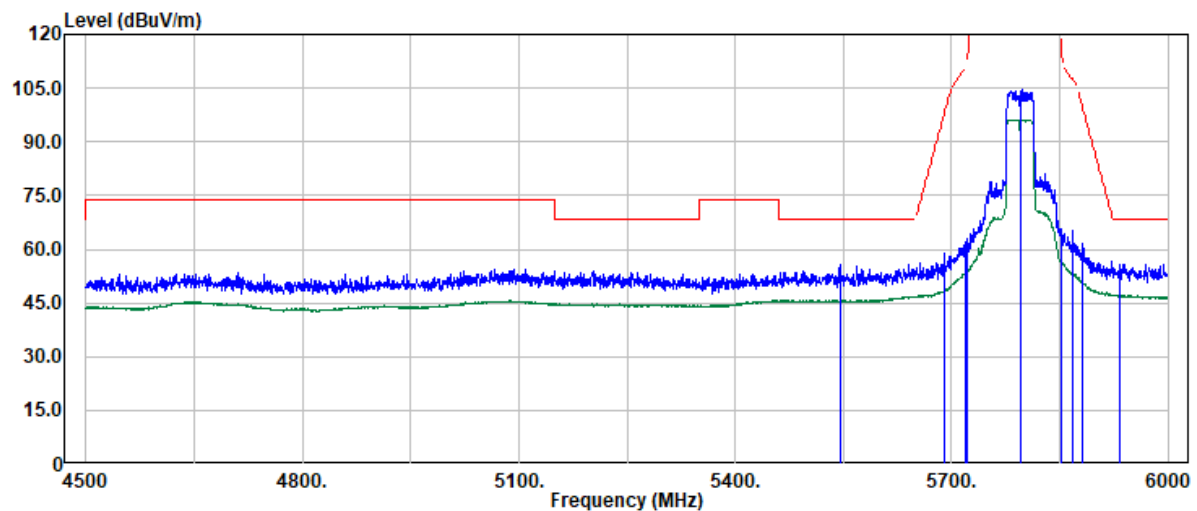


Trace: 1						
Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5545.15	41.53	14.24	55.77	68.20	-12.43	Peak
5690.60	43.65	15.07	58.72	98.27	-39.55	Peak
5719.09	46.75	15.21	61.96	110.55	-48.59	Peak
5720.59	47.85	15.22	63.07	112.15	-49.08	Peak
5795.00	89.07	15.45	104.52	--	--	Peak
5795.00	80.74	15.45	96.19	--	--	Average
5851.05	50.48	15.36	65.84	119.81	-53.97	Peak
5868.54	49.84	15.32	65.16	107.01	-41.85	Peak
5882.04	46.22	15.30	61.52	99.97	-38.45	Peak
5934.02	40.57	15.29	55.86	68.20	-12.34	Peak

Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 105 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 74

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

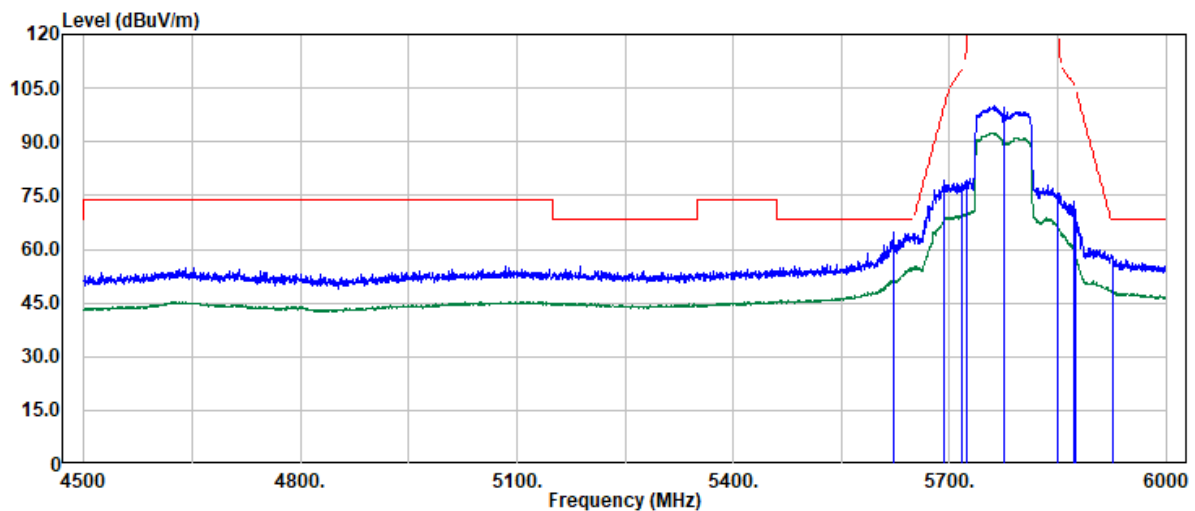

Trace: 1

Freq	Read	Factor	Actual	Limit	Margin	Detector
MHz	Level		FS	@3m		Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5621.63	50.02	14.61	64.63	68.20	-3.57	Peak
5692.10	64.23	15.08	79.31	99.38	-20.07	Peak
5716.10	63.34	15.21	78.55	109.71	-31.16	Peak
5723.09	64.19	15.24	79.43	117.85	-38.42	Peak
5775.00	84.48	15.43	99.91	--	--	Peak
5775.00	76.97	15.43	92.40	--	--	Average
5850.55	60.40	15.36	75.76	120.95	-45.19	Peak
5871.54	58.09	15.32	73.41	106.17	-32.76	Peak
5875.04	55.82	15.31	71.13	105.17	-34.04	Peak
5927.02	42.76	15.29	58.05	68.20	-10.15	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 106 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : Bandedge
EUT Pol : E1
Setting : 74

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

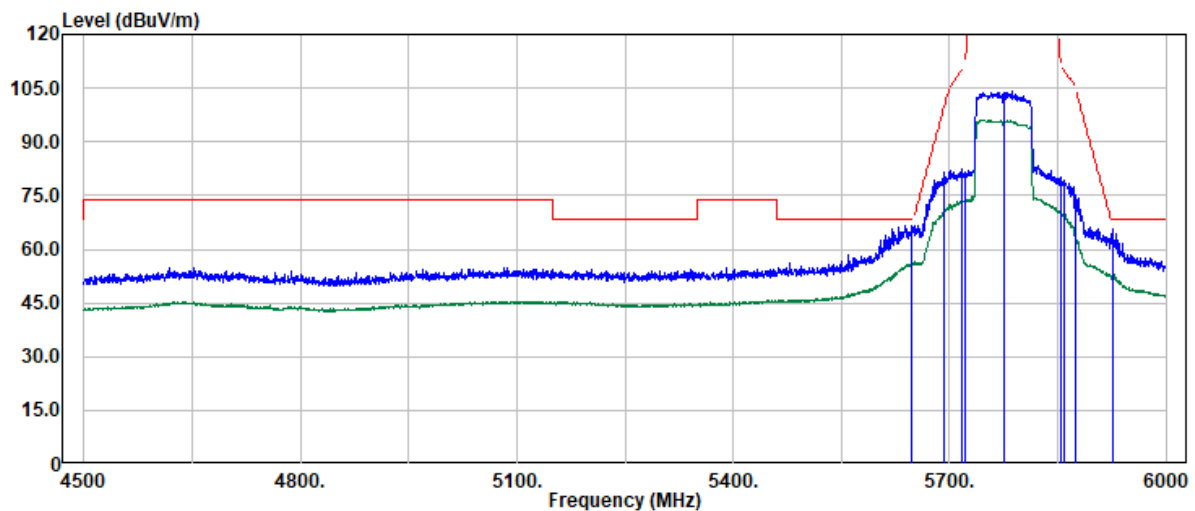

Trace: 1						
Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
5648.12	51.58	14.93	66.51	68.20	-1.69	Peak
5692.60	66.28	15.08	81.36	99.75	-18.39	Peak
5718.09	67.11	15.22	82.33	110.27	-27.94	Peak
5722.09	66.49	15.24	81.73	115.57	-33.84	Peak
5775.00	88.93	15.43	104.36	--	--	Peak
5775.00	80.76	15.43	96.19	--	--	Average
5854.05	64.71	15.35	80.06	112.97	-32.91	Peak
5858.05	63.97	15.34	79.31	109.95	-30.64	Peak
5875.04	59.96	15.31	75.27	105.17	-29.90	Peak
5925.53	50.54	15.29	65.83	68.20	-2.37	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 107 / 190
Rev.: 01

TX Test Data

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

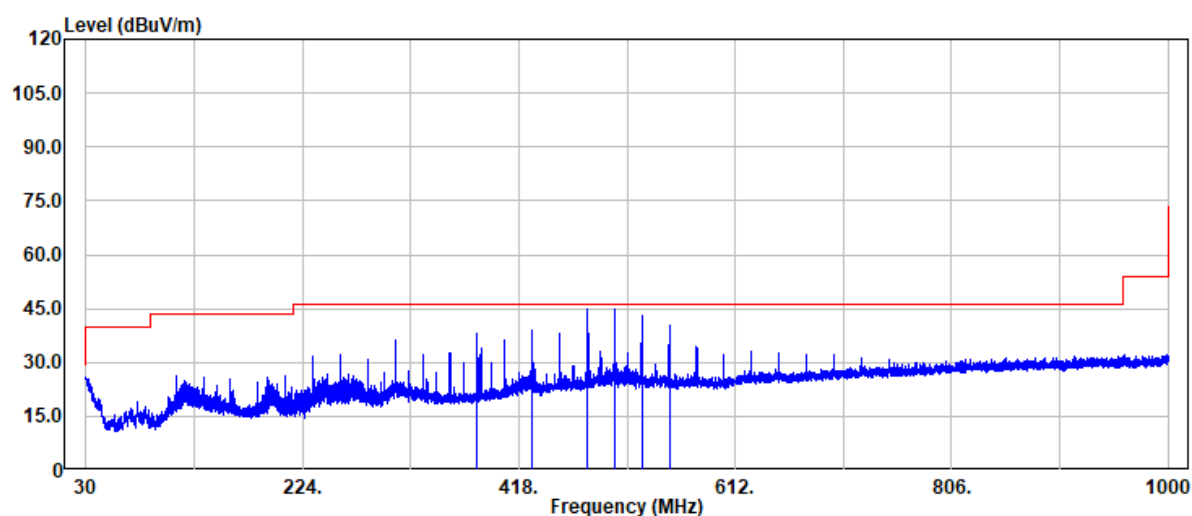

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
380.90	45.34	-7.48	37.86	46.00	-8.14	Peak
430.10	44.89	-5.94	38.95	46.00	-7.05	Peak
479.20	49.19	-4.57	44.62	46.00	-1.38	Peak
503.90	49.36	-4.43	44.93	46.00	-1.07	Peak
528.40	46.99	-3.97	43.02	46.00	-2.98	Peak
553.00	43.92	-3.65	40.27	46.00	-5.73	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 108 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

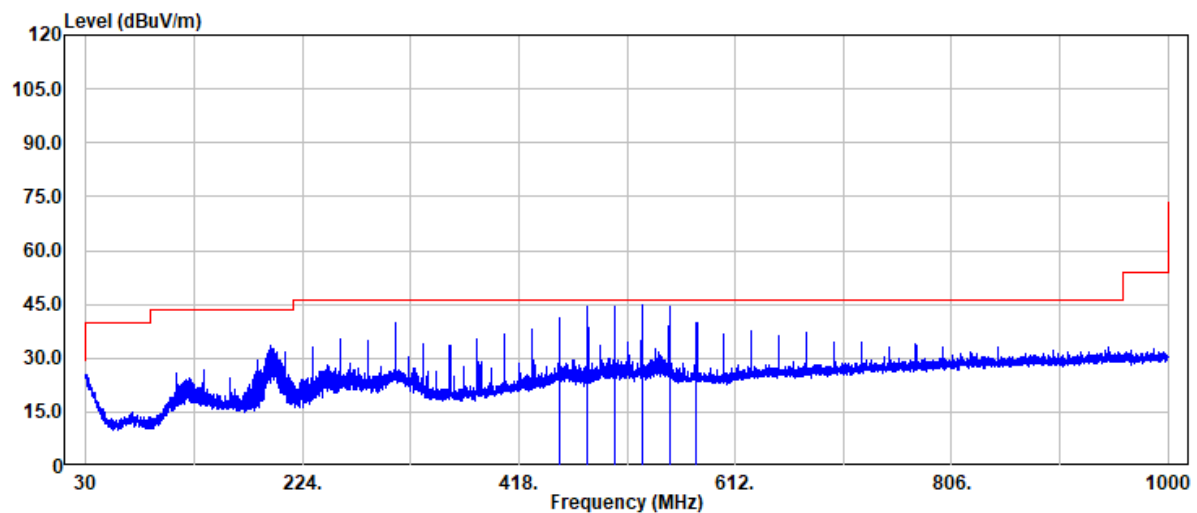

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
454.70	46.42	-5.30	41.12	46.00	-4.88	Peak
479.20	49.10	-4.57	44.53	46.00	-1.47	Peak
503.70	48.87	-4.43	44.44	46.00	-1.56	Peak
528.40	48.81	-3.97	44.84	46.00	-1.16	Peak
553.00	48.15	-3.65	44.50	46.00	-1.50	Peak
577.50	42.99	-3.22	39.77	46.00	-6.23	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 109 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 63

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : Vertical
Engineer : Ray.Li
Test Chamber : 966A

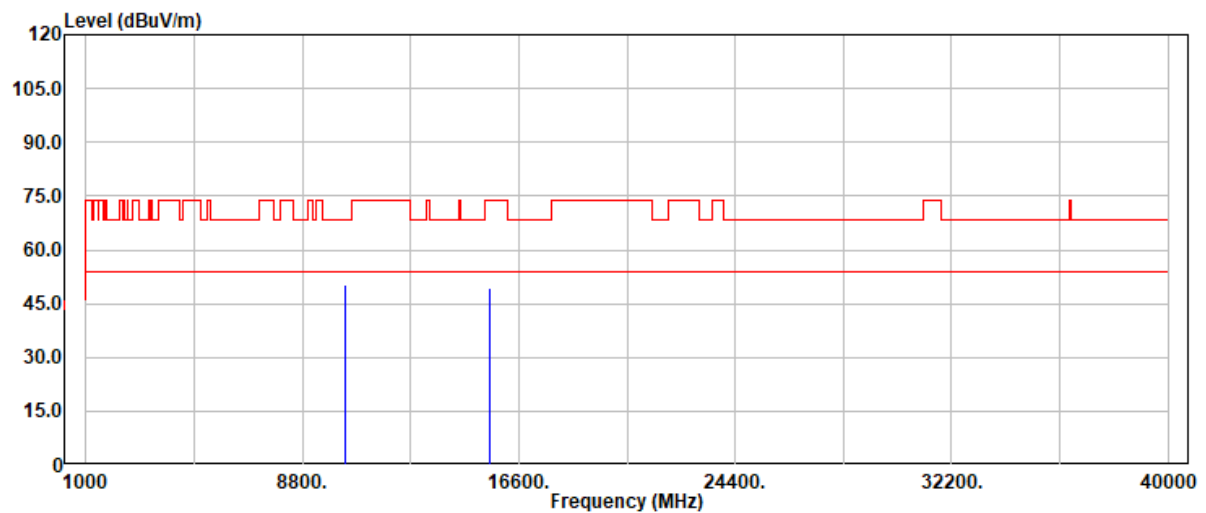

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	37.57	12.53	50.10	68.20	-18.10	Peak
15540.00	34.75	14.41	49.16	74.00	-24.84	Peak
15540.00	28.15	14.41	42.56	54.00	-11.44	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 110 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 63

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

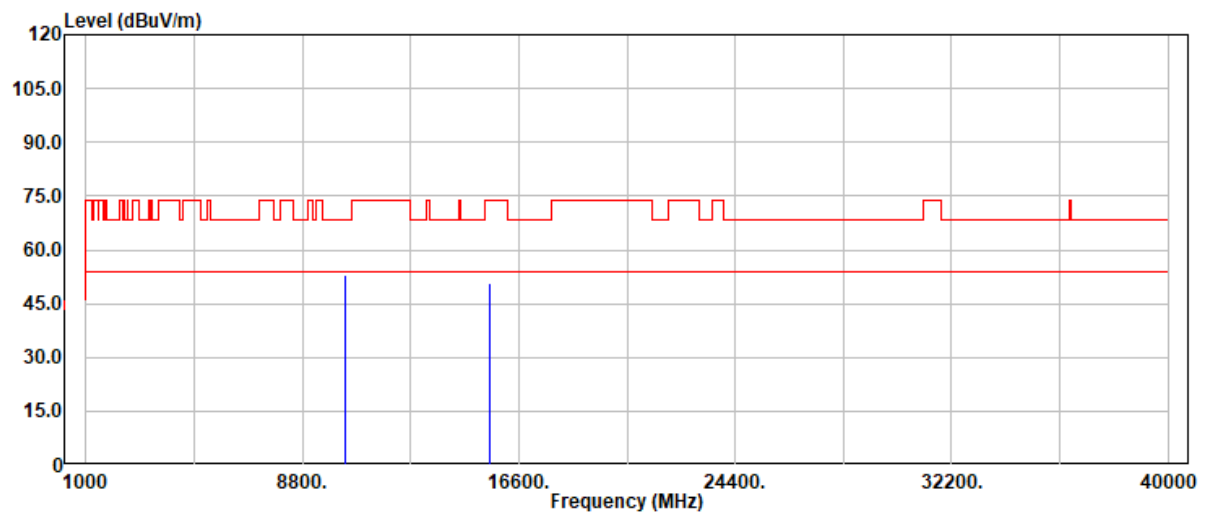


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	40.56	12.53	53.09	68.20	-15.11	Peak
15540.00	36.29	14.41	50.70	74.00	-23.30	Peak
15540.00	30.56	14.41	44.97	54.00	-9.03	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 111 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11a_Band1	Temp./Humi.	: 24.5/57
Frequency	: 5220 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

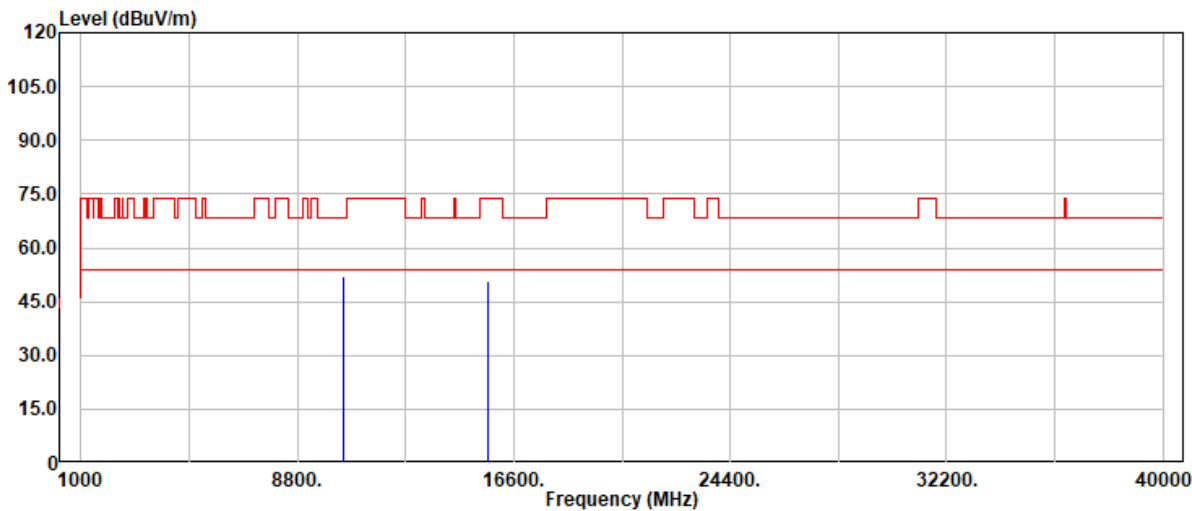


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	39.66	12.46	52.12	68.20	-16.08	Peak
15660.00	35.76	14.93	50.69	74.00	-23.31	Peak
15660.00	29.16	14.93	44.09	54.00	-9.91	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 112 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11a_Band1	Temp./Humi.	: 24.5/57
Frequency	: 5220 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

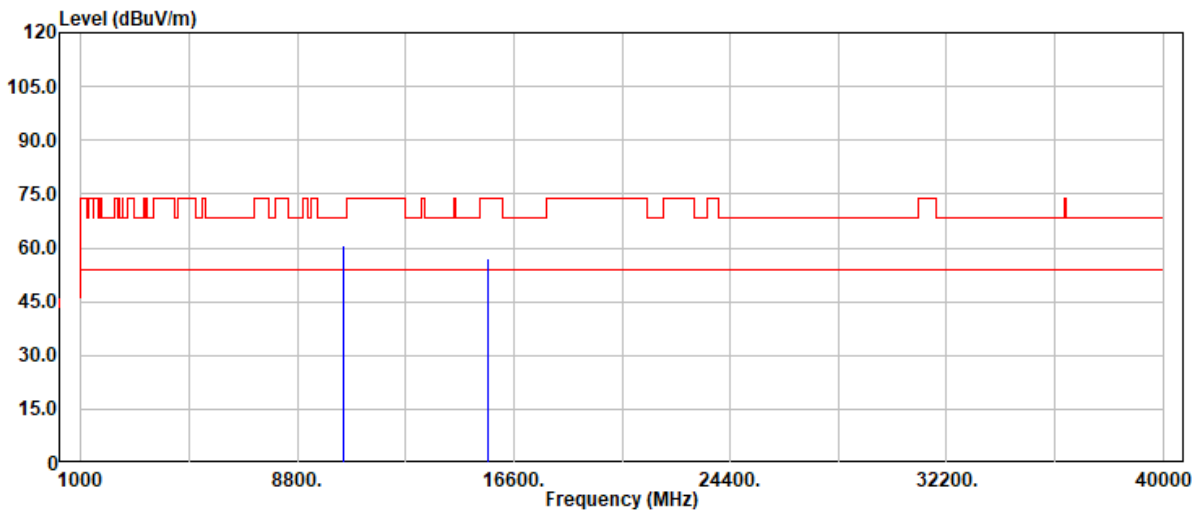

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	48.07	12.46	60.53	68.20	-7.67	Peak
15660.00	42.24	14.93	57.17	74.00	-16.83	Peak
15660.00	35.54	14.93	50.47	54.00	-3.53	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 113 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band1
Frequency : 5240 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : Vertical
Engineer : Ray.Li
Test Chamber : 966A

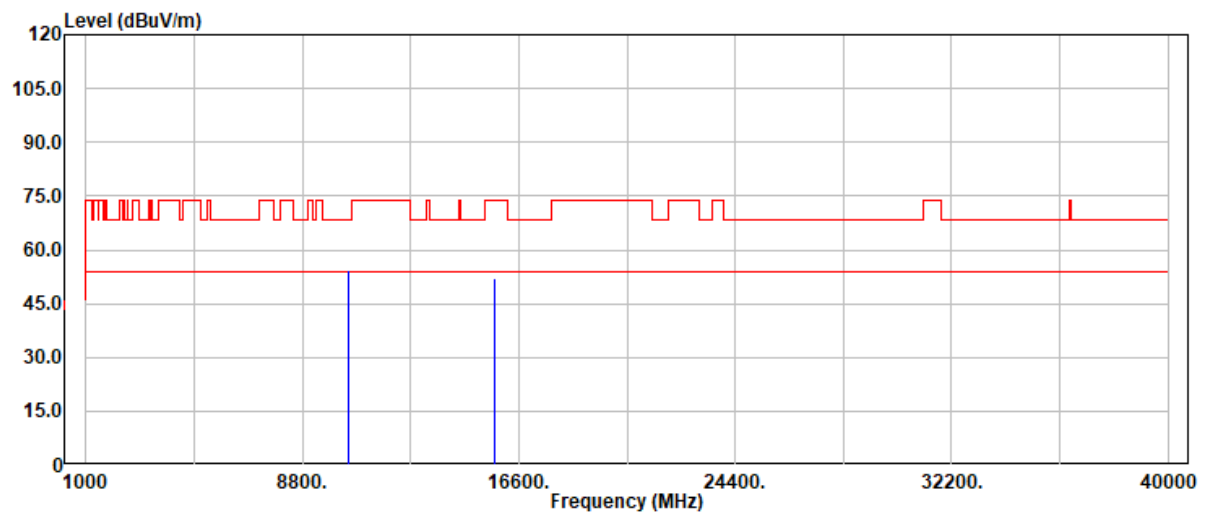


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	41.80	12.46	54.26	68.20	-13.94	Peak
15720.00	36.46	15.52	51.98	74.00	-22.02	Peak
15720.00	30.06	15.52	45.58	54.00	-8.42	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 114 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11a_Band1	Temp./Humi.	: 24.5/57
Frequency	: 5240 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

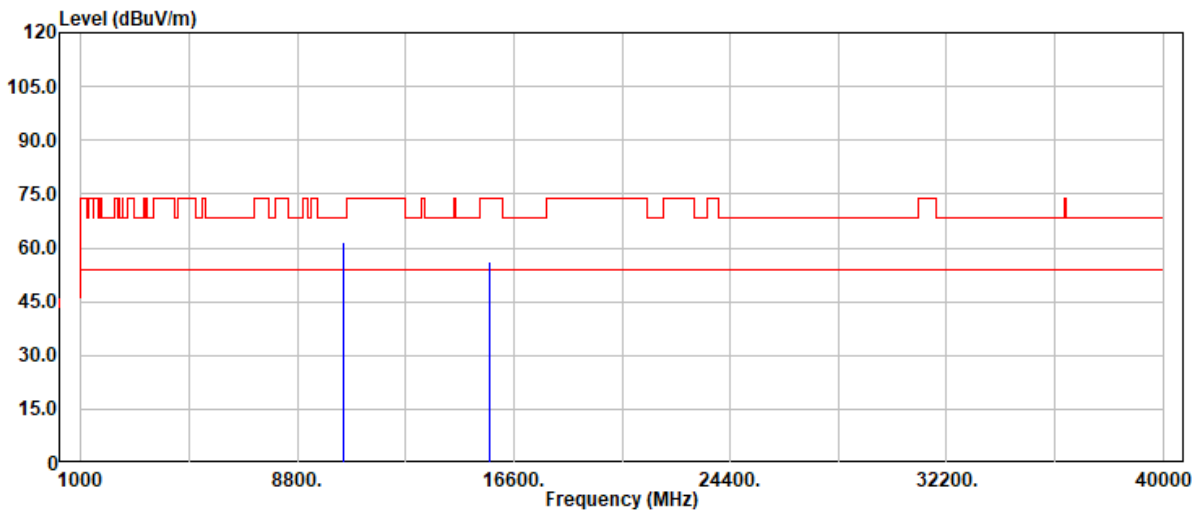


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	49.25	12.46	61.71	68.20	-6.49	Peak
15720.00	40.68	15.52	56.20	74.00	-17.80	Peak
15720.00	36.79	15.52	52.31	54.00	-1.69	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 115 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.3/58
Frequency	: 5180 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 64		

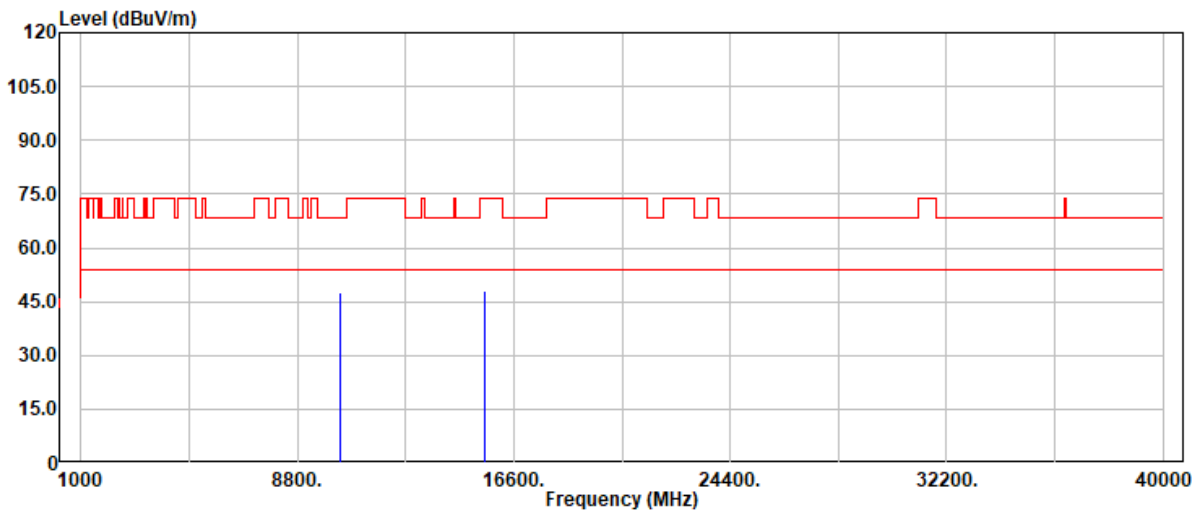

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	35.04	12.53	47.57	68.20	-20.63	Peak
15540.00	33.44	14.41	47.85	74.00	-26.15	Peak
15540.00	24.01	14.41	38.42	54.00	-15.58	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 116 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band1
Frequency : 5180 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 64

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

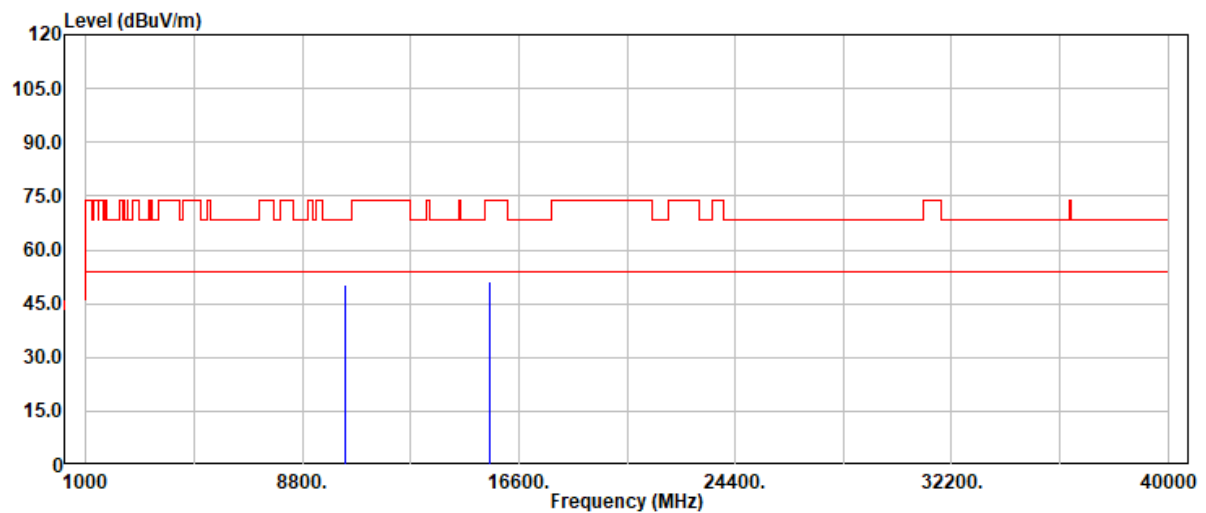

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10360.00	37.56	12.53	50.09	68.20	-18.11	Peak
15540.00	36.62	14.41	51.03	74.00	-22.97	Peak
15540.00	26.59	14.41	41.00	54.00	-13.00	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 117 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band1
Frequency : 5220 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

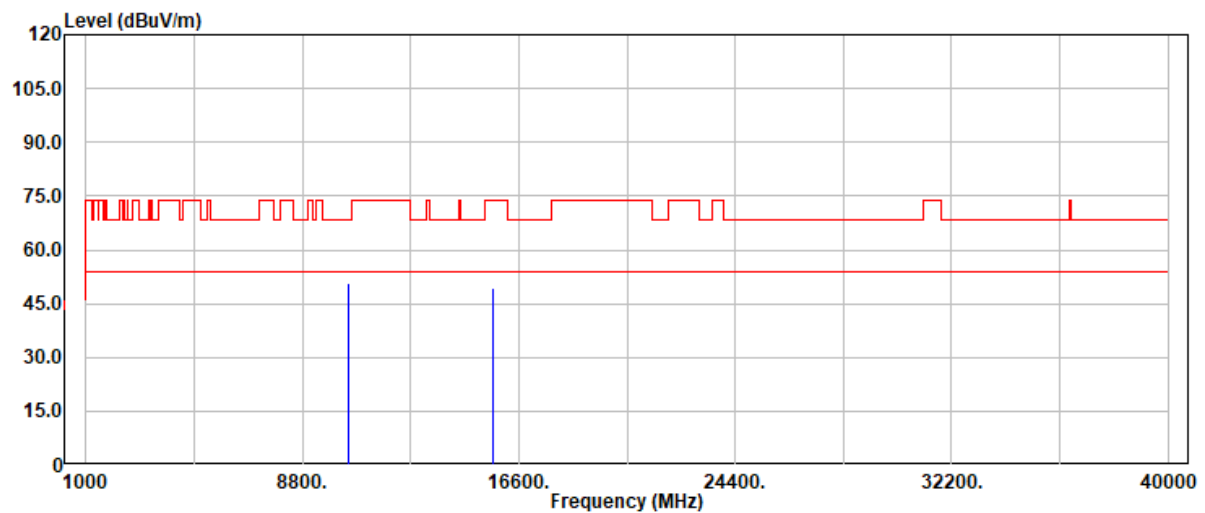


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	38.30	12.46	50.76	68.20	-17.44	Peak
15660.00	34.39	14.93	49.32	74.00	-24.68	Peak
15660.00	25.40	14.93	40.33	54.00	-13.67	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 118 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.3/58
Frequency	: 5220 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

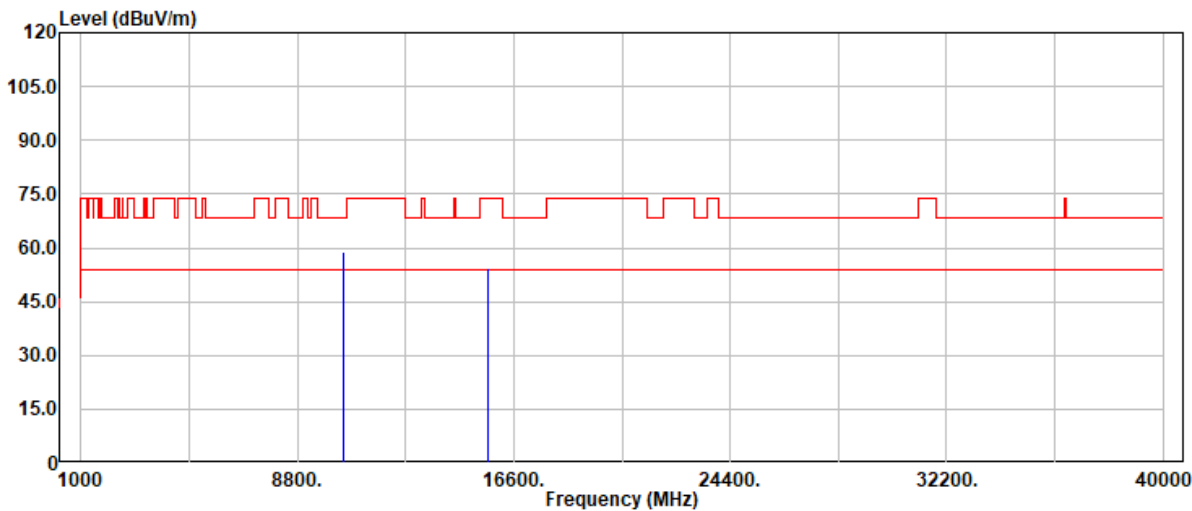


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10440.00	46.50	12.46	58.96	68.20	-9.24	Peak
15660.00	39.31	14.93	54.24	74.00	-19.76	Peak
15660.00	31.09	14.93	46.02	54.00	-7.98	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 119 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.3/58
Frequency	: 5240 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

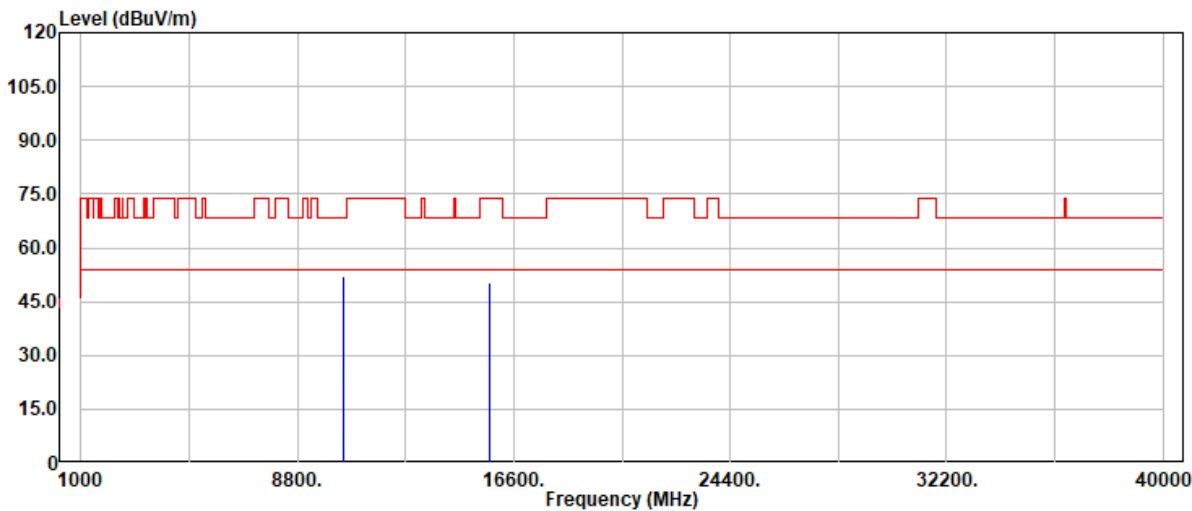


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	39.58	12.46	52.04	68.20	-16.16	Peak
15720.00	34.90	15.52	50.42	74.00	-23.58	Peak
15720.00	25.31	15.52	40.83	54.00	-13.17	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 120 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band1	Temp./Humi.	: 24.3/58
Frequency	: 5240 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

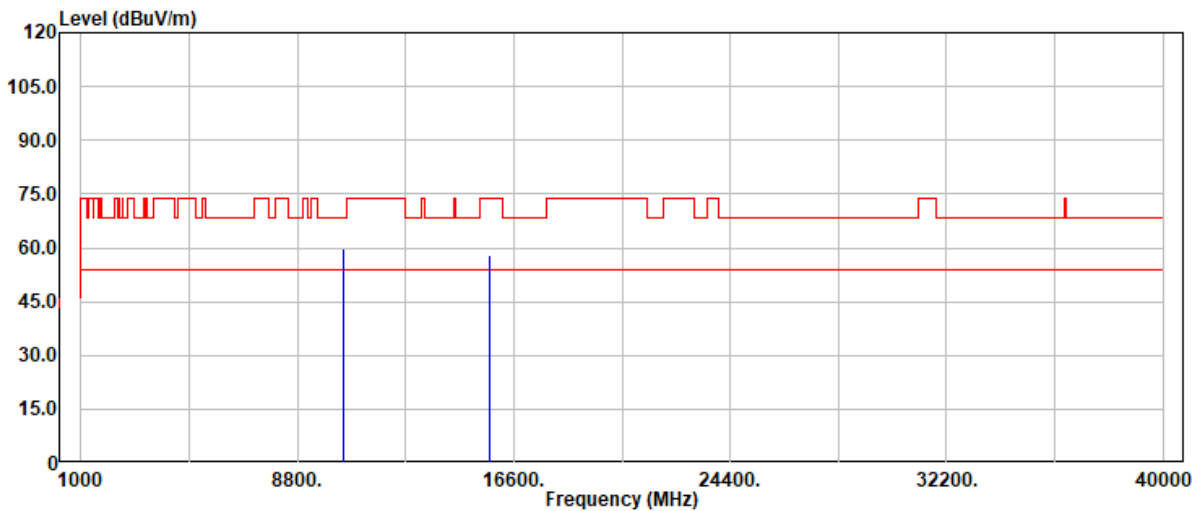

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10480.00	47.21	12.46	59.67	68.20	-8.53	Peak
15720.00	42.55	15.52	58.07	74.00	-15.93	Peak
15720.00	33.55	15.52	49.07	54.00	-4.93	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 121 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 45

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

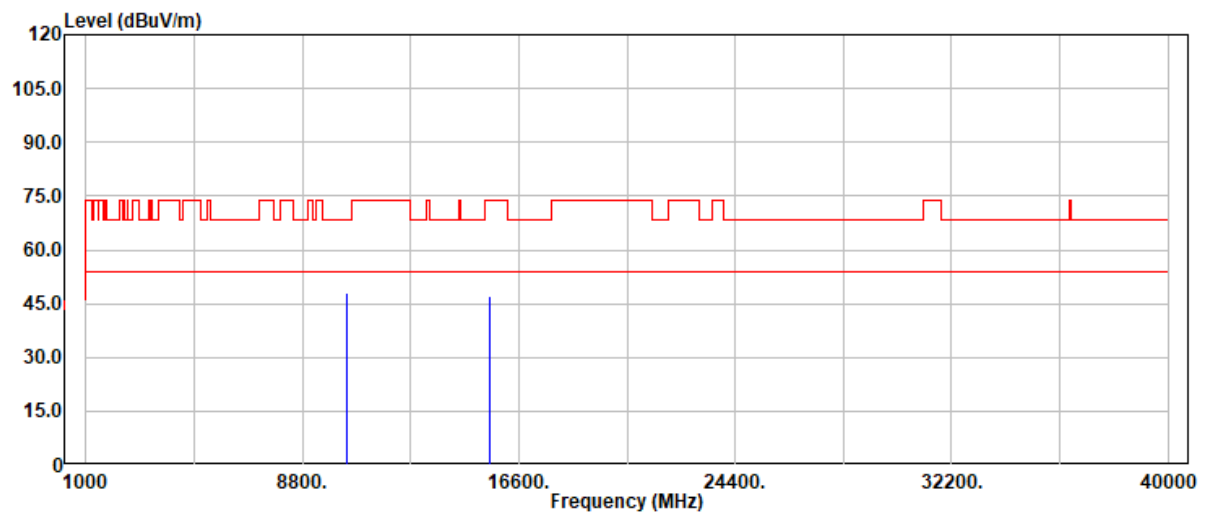

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	35.43	12.46	47.89	68.20	-20.31	Peak
15570.00	32.88	14.43	47.31	74.00	-26.69	Peak
15570.00	24.11	14.43	38.54	54.00	-15.46	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 122 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band1
Frequency : 5190 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 45

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

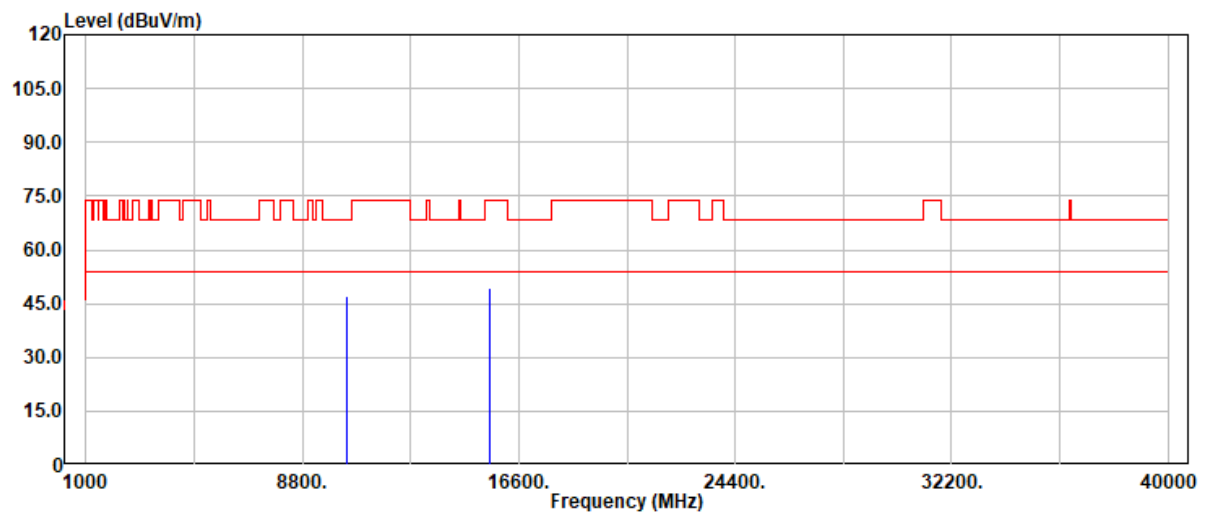

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10380.00	34.76	12.46	47.22	68.20	-20.98	Peak
15570.00	34.82	14.43	49.25	74.00	-24.75	Peak
15570.00	23.70	14.43	38.13	54.00	-15.87	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 123 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

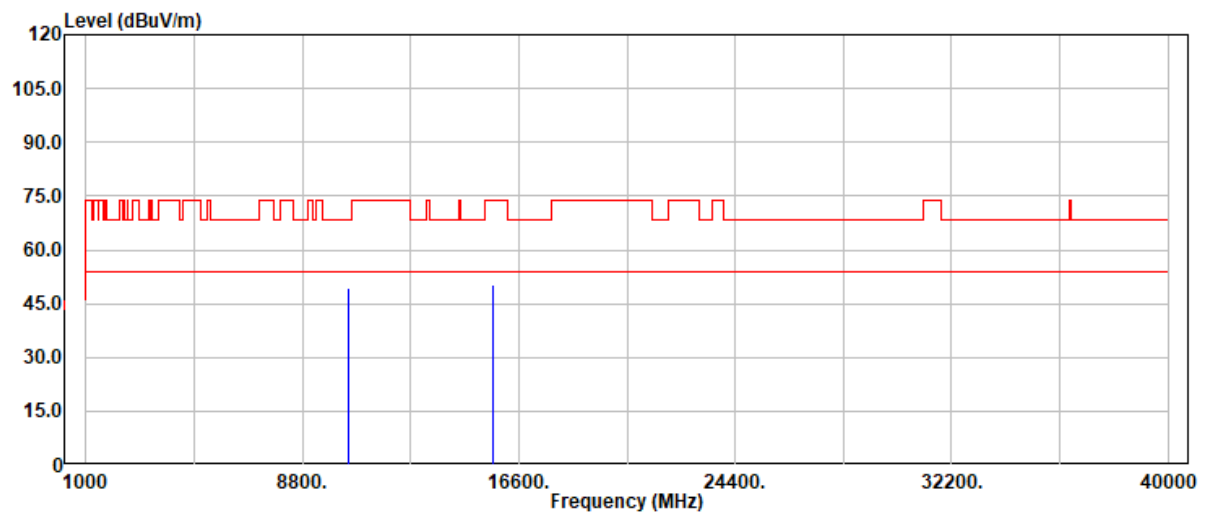

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	36.92	12.48	49.40	68.20	-18.80	Peak
15690.00	34.84	15.27	50.11	74.00	-23.89	Peak
15690.00	25.17	15.27	40.44	54.00	-13.56	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 124 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band1
Frequency : 5230 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

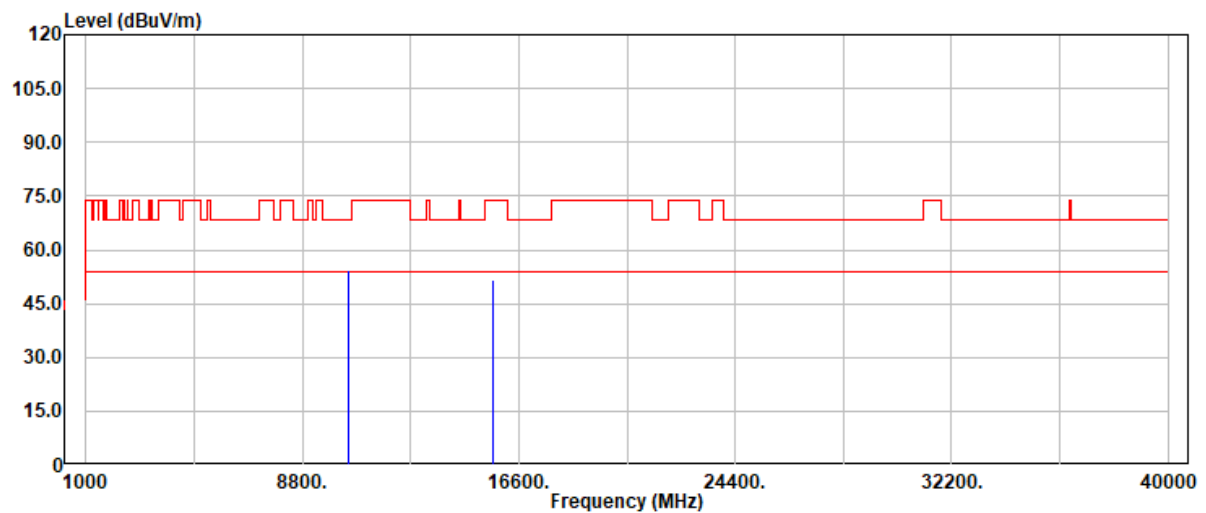

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10460.00	41.68	12.48	54.16	68.20	-14.04	Peak
15690.00	36.29	15.27	51.56	74.00	-22.44	Peak
15690.00	26.18	15.27	41.45	54.00	-12.55	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 125 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band1
Frequency : 5210 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 56

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

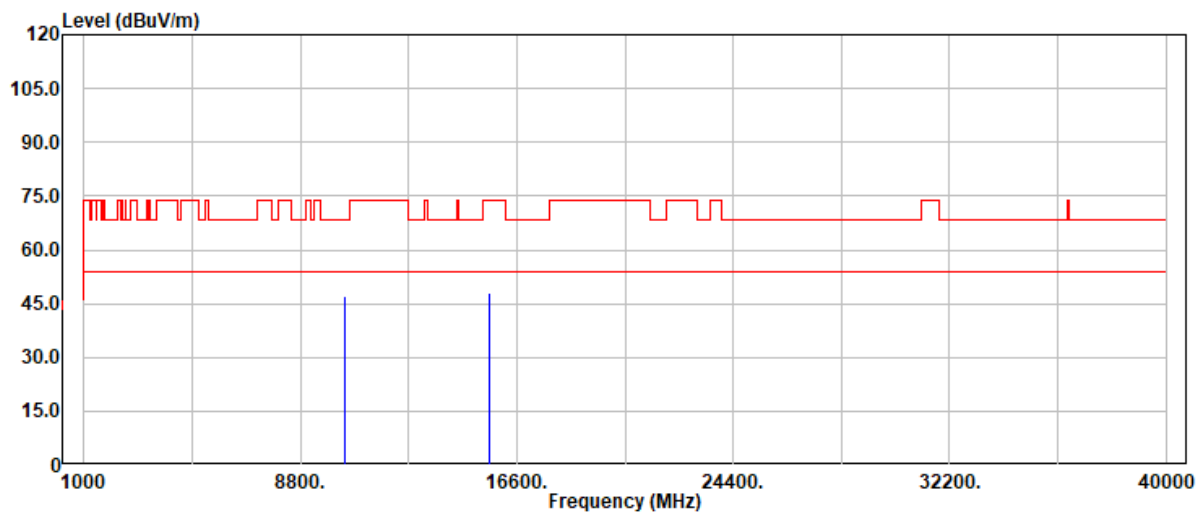


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	34.50	12.42	46.92	68.20	-21.28	Peak
15630.00	33.19	14.70	47.89	74.00	-26.11	Peak
15630.00	24.35	14.70	39.05	54.00	-14.95	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 126 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11ac80_Band1	Temp./Humi.	: 24.3/58
Frequency	: 5210 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 56		

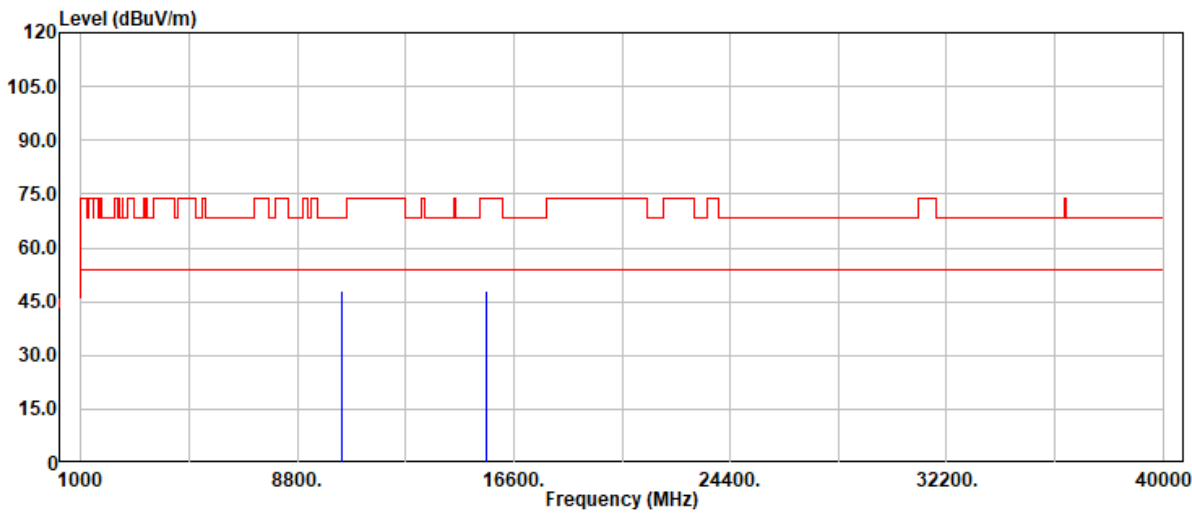

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10420.00	35.48	12.42	47.90	68.20	-20.30	Peak
15630.00	33.32	14.70	48.02	74.00	-25.98	Peak
15630.00	25.88	14.70	40.58	54.00	-13.42	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 127 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

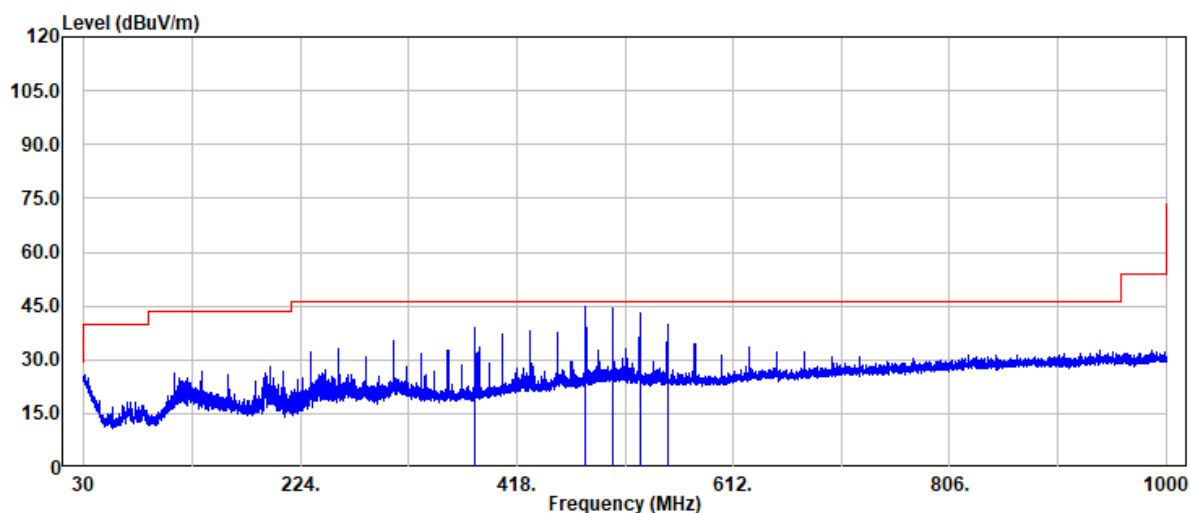

Freq	Read		Actual	Limit		Detector
MHz	Level	Factor	FS	@3m	Margin	Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
380.90	46.24	-7.48	38.76	46.00	-7.24	Peak
479.20	48.22	-4.57	43.65	46.00	-2.35	Peak
479.20	49.22	-4.57	44.65	46.00	-1.35	Peak
503.80	48.81	-4.43	44.38	46.00	-1.62	Peak
528.40	47.17	-3.97	43.20	46.00	-2.80	Peak
553.00	43.67	-3.65	40.02	46.00	-5.98	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 128 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

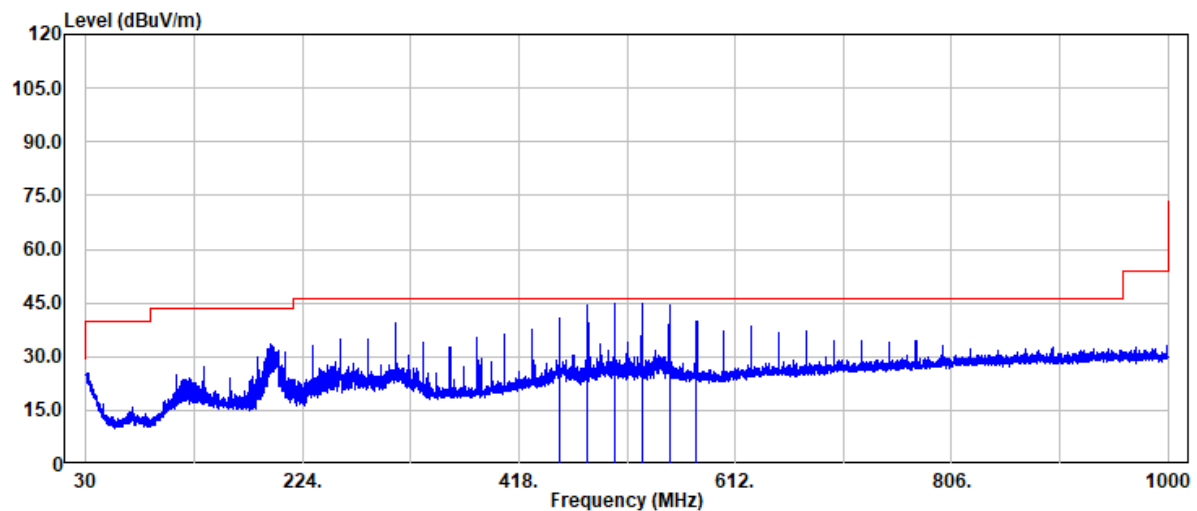

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
454.70	46.00	-5.30	40.70	46.00	-5.30	Peak
479.20	48.84	-4.57	44.27	46.00	-1.73	Peak
503.80	49.38	-4.43	44.95	46.00	-1.05	Peak
528.40	48.79	-3.97	44.82	46.00	-1.18	Peak
553.00	48.22	-3.65	44.57	46.00	-1.43	Peak
577.50	43.00	-3.22	39.78	46.00	-6.22	Peak

Note:


A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 129 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-16
Operation Band	: 802.11a_Band2	Temp./Humi.	: 24.5/57
Frequency	: 5260 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

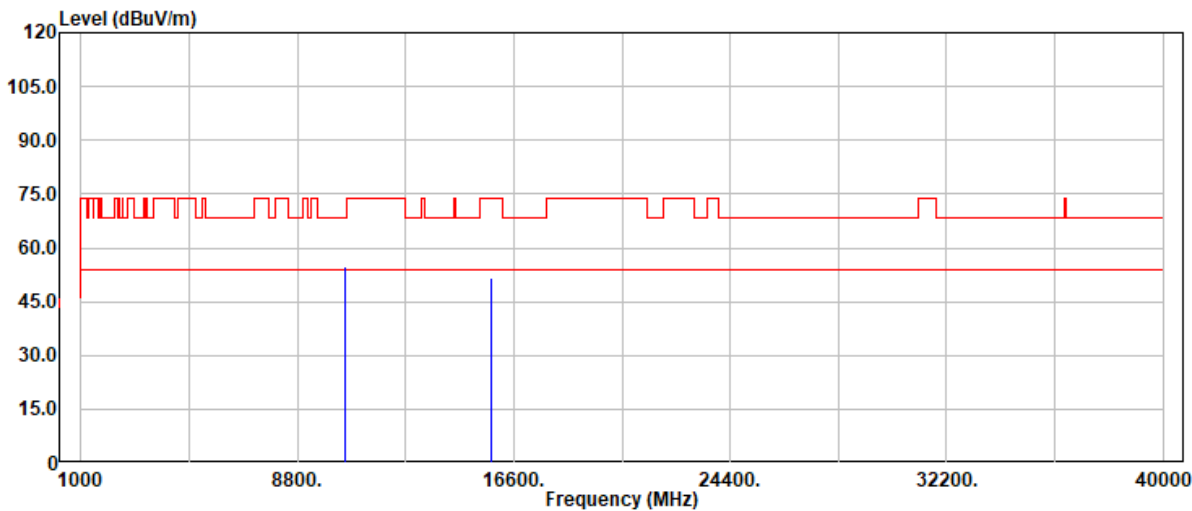

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	42.25	12.47	54.72	68.20	-13.48	Peak
15780.00	35.91	15.64	51.55	74.00	-22.45	Peak
15780.00	30.72	15.64	46.36	54.00	-7.64	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 130 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band2
Frequency : 5260 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-16
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

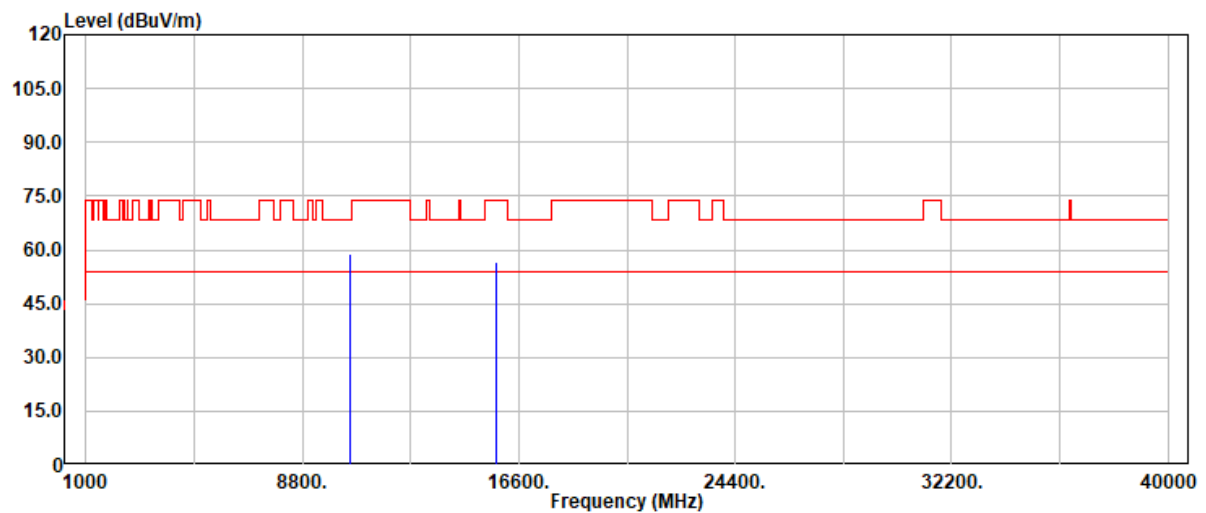


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	46.20	12.47	58.67	68.20	-9.53	Peak
15780.00	41.19	15.64	56.83	74.00	-17.17	Peak
15780.00	37.14	15.64	52.78	54.00	-1.22	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 131 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band2	Temp./Humi.	: 24.5/57
Frequency	: 5300 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

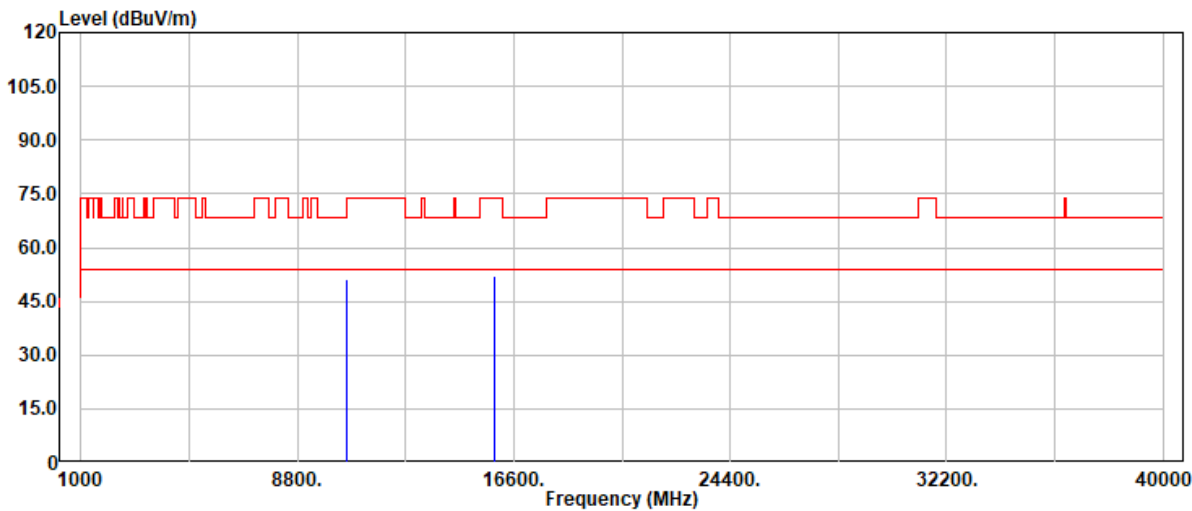

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	38.14	12.84	50.98	74.00	-23.02	Peak
10600.00	31.37	12.84	44.21	54.00	-9.79	Average
15900.00	36.55	15.62	52.17	74.00	-21.83	Peak
15900.00	30.43	15.62	46.05	54.00	-7.95	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 132 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band2
Frequency : 5300 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

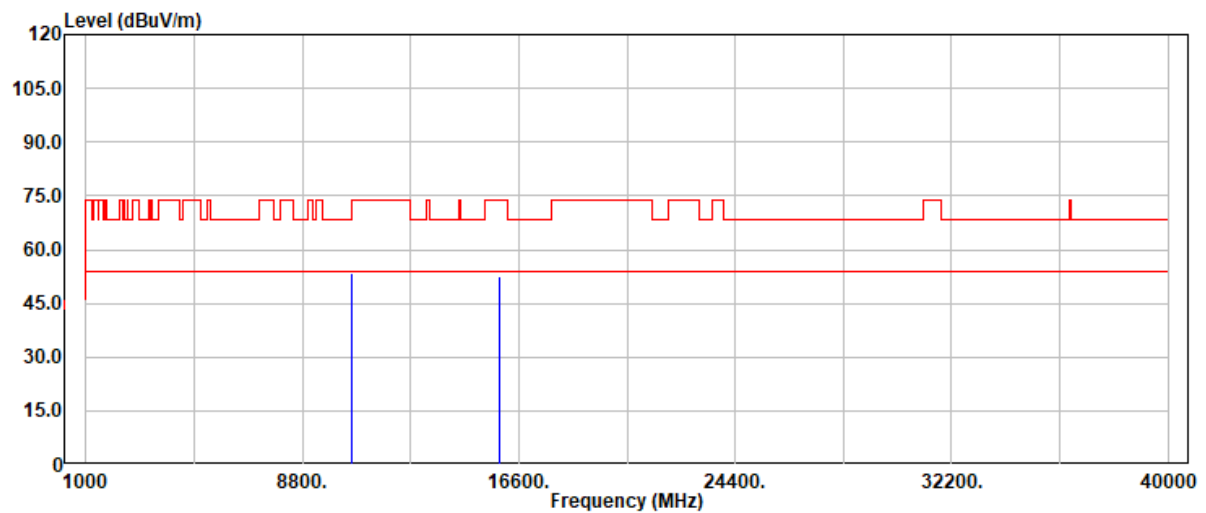

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	40.38	12.84	53.22	74.00	-20.78	Peak
10600.00	33.05	12.84	45.89	54.00	-8.11	Average
15900.00	36.80	15.62	52.42	74.00	-21.58	Peak
15900.00	36.64	15.62	52.26	54.00	-1.74	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 133 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band2
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 67

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Vertical
Engineer : Ray.Li
Test Chamber : 966A

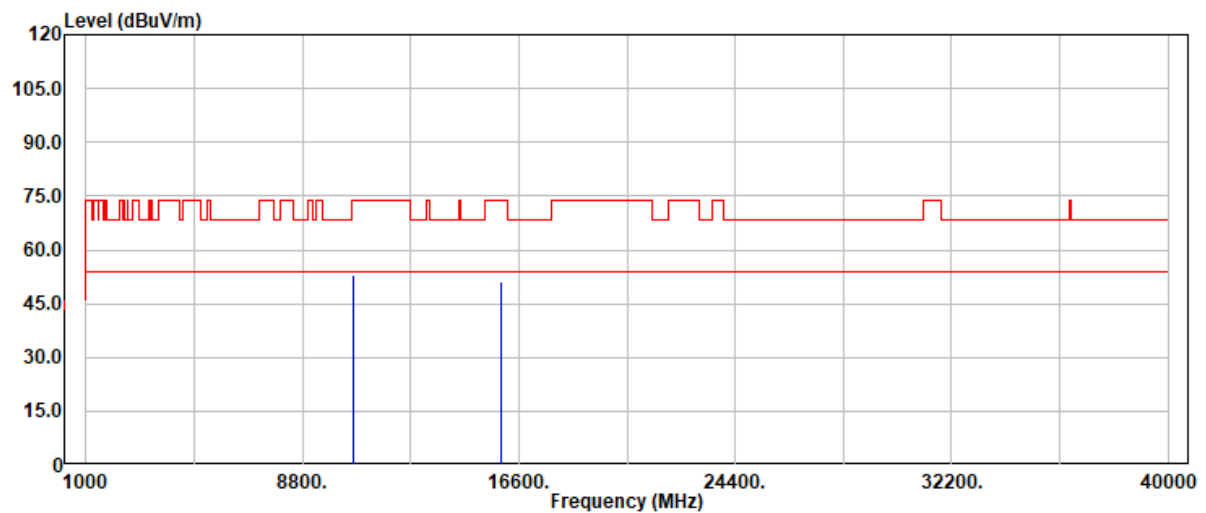

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	40.32	12.65	52.97	74.00	-21.03	Peak
10640.00	34.41	12.65	47.06	54.00	-6.94	Average
15960.00	35.34	15.84	51.18	74.00	-22.82	Peak
15960.00	29.42	15.84	45.26	54.00	-8.74	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 134 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band2
Frequency : 5320 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 67

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

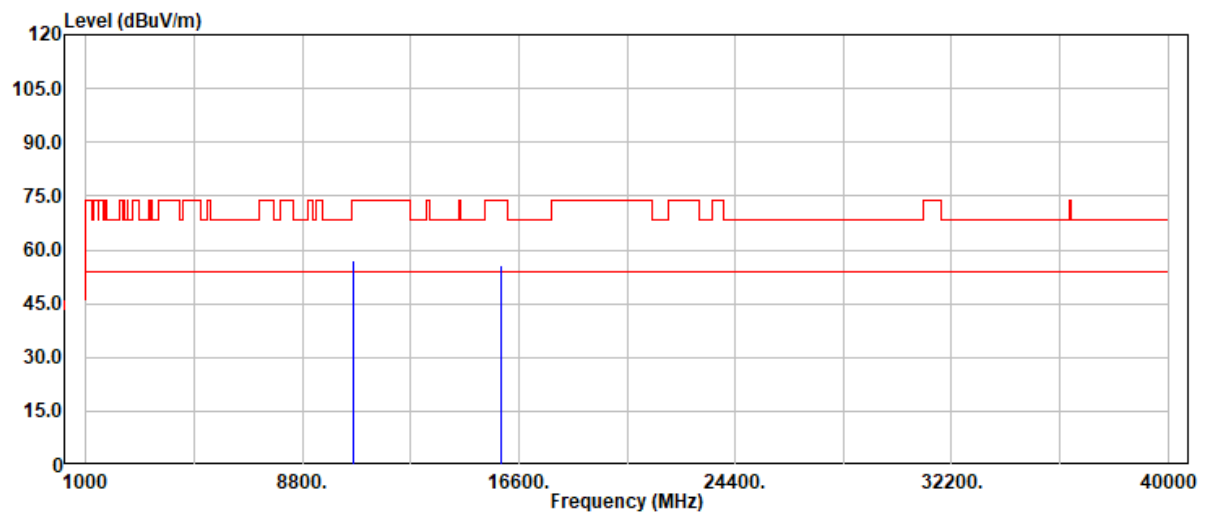


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	44.42	12.65	57.07	74.00	-16.93	Peak
10640.00	40.14	12.65	52.79	54.00	-1.21	Average
15960.00	39.97	15.84	55.81	74.00	-18.19	Peak
15960.00	34.92	15.84	50.76	54.00	-3.24	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 135 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5260 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

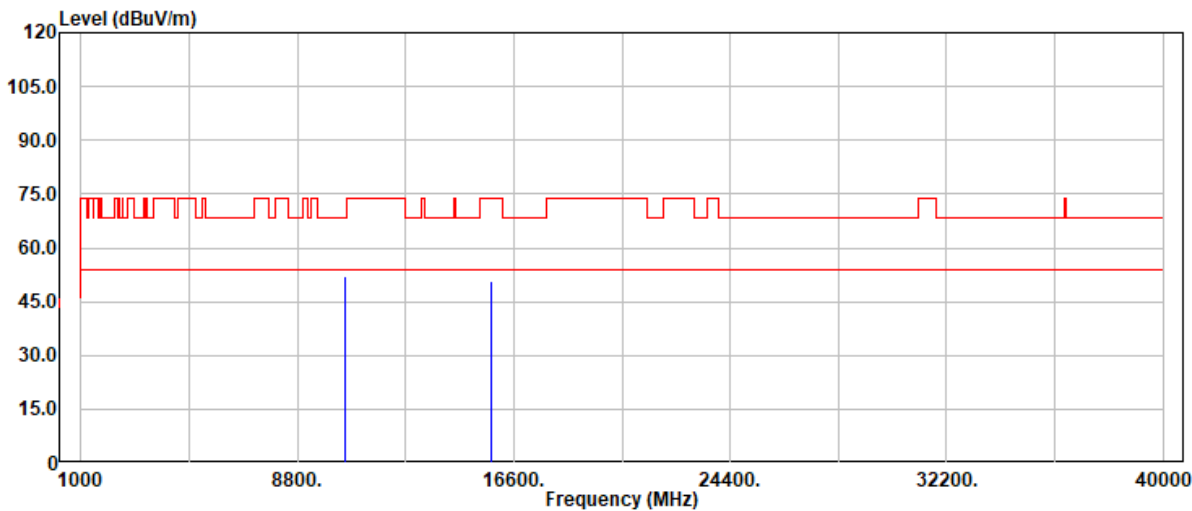

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	39.77	12.47	52.24	68.20	-15.96	Peak
15780.00	35.00	15.64	50.64	74.00	-23.36	Peak
15780.00	26.93	15.64	42.57	54.00	-11.43	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 136 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5260 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

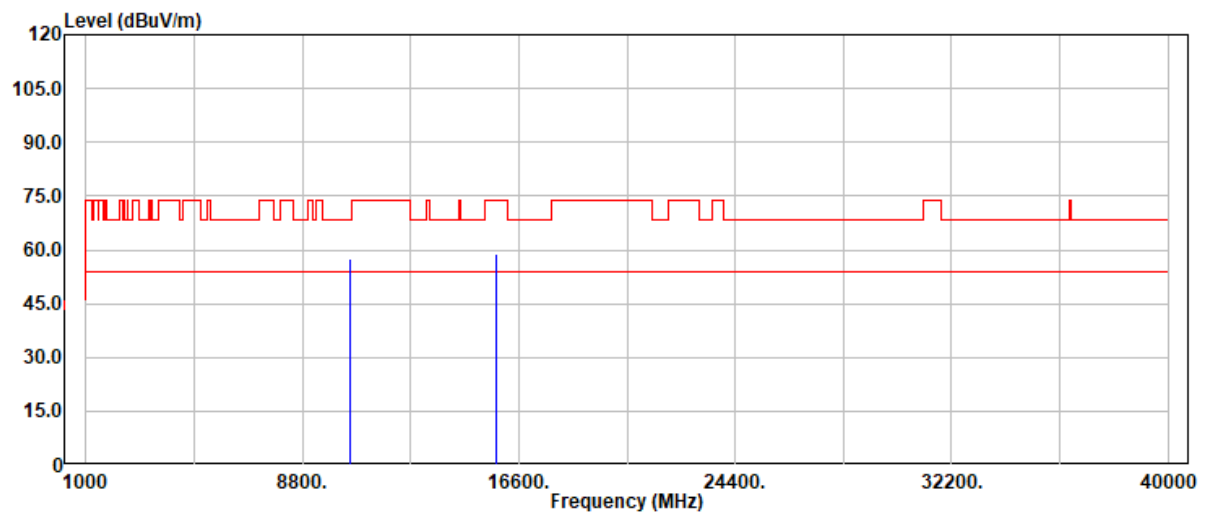

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10520.00	44.87	12.47	57.34	68.20	-10.86	Peak
15780.00	43.03	15.64	58.67	74.00	-15.33	Peak
15780.00	34.80	15.64	50.44	54.00	-3.56	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 137 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5300 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

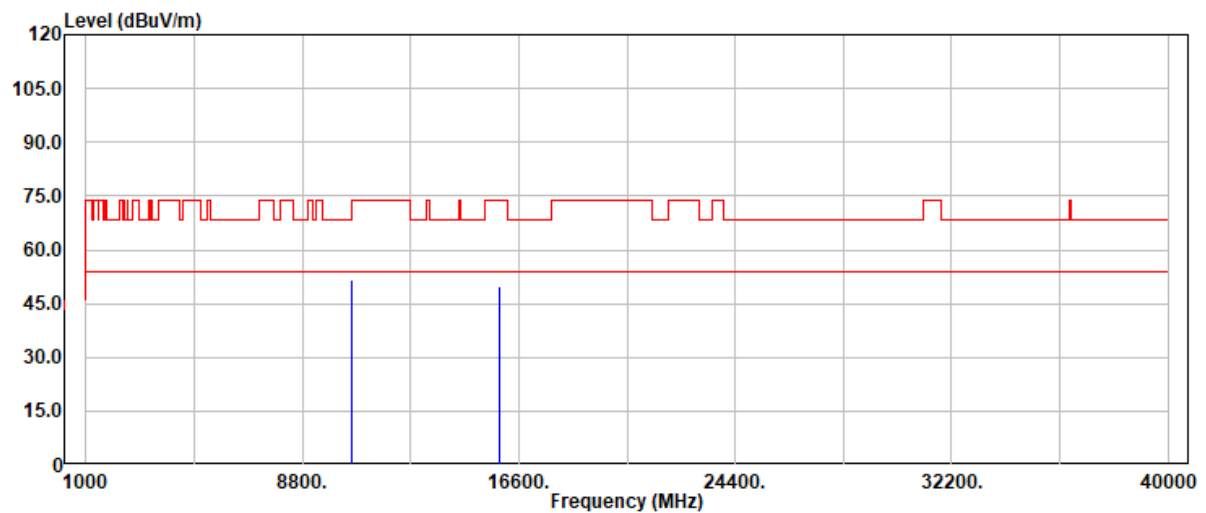

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	38.71	12.84	51.55	74.00	-22.45	Peak
10600.00	31.28	12.84	44.12	54.00	-9.88	Average
15900.00	34.20	15.62	49.82	74.00	-24.18	Peak
15900.00	26.38	15.62	42.00	54.00	-12.00	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 138 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band2
Frequency : 5300 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

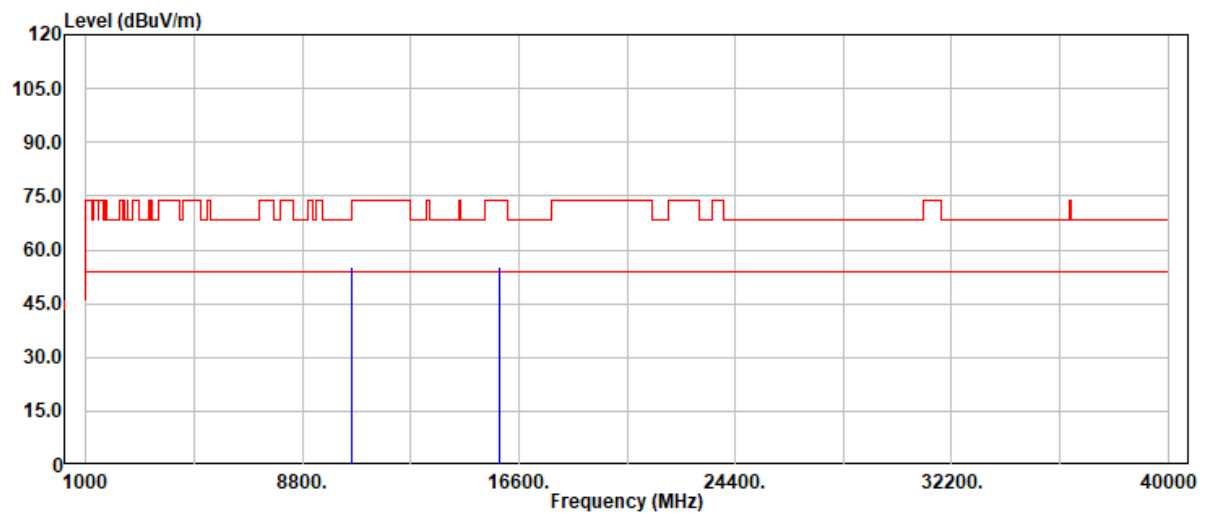


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10600.00	42.31	12.84	55.15	74.00	-18.85	Peak
10600.00	34.44	12.84	47.28	54.00	-6.72	Average
15900.00	39.42	15.62	55.04	74.00	-18.96	Peak
15900.00	32.11	15.62	47.73	54.00	-6.27	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 139 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5320 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 63		

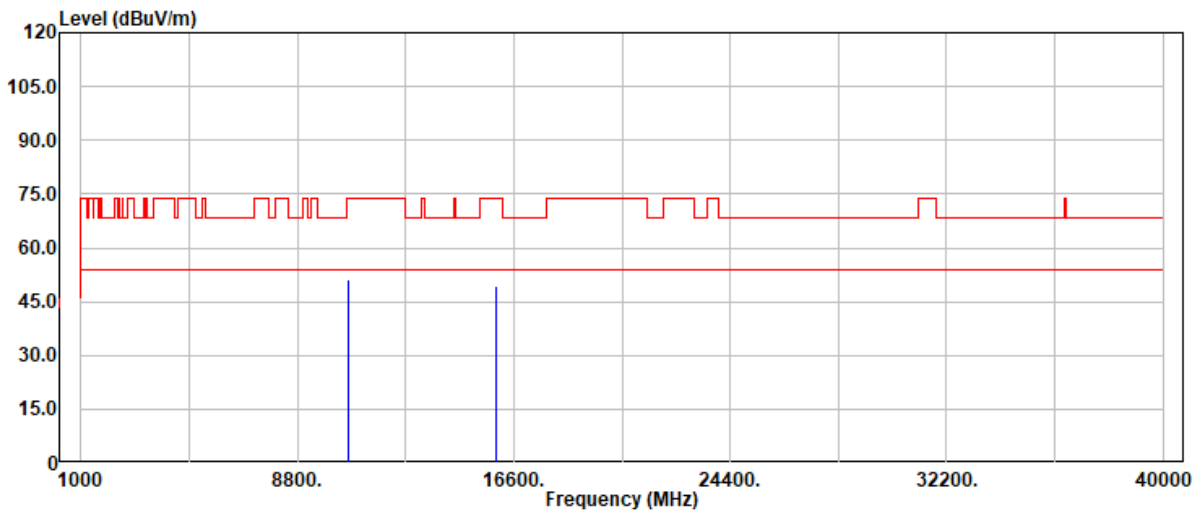


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	38.69	12.65	51.34	74.00	-22.66	Peak
10640.00	30.24	12.65	42.89	54.00	-11.11	Average
15960.00	33.30	15.84	49.14	74.00	-24.86	Peak
15960.00	24.22	15.84	40.06	54.00	-13.94	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 140 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5320 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 63		

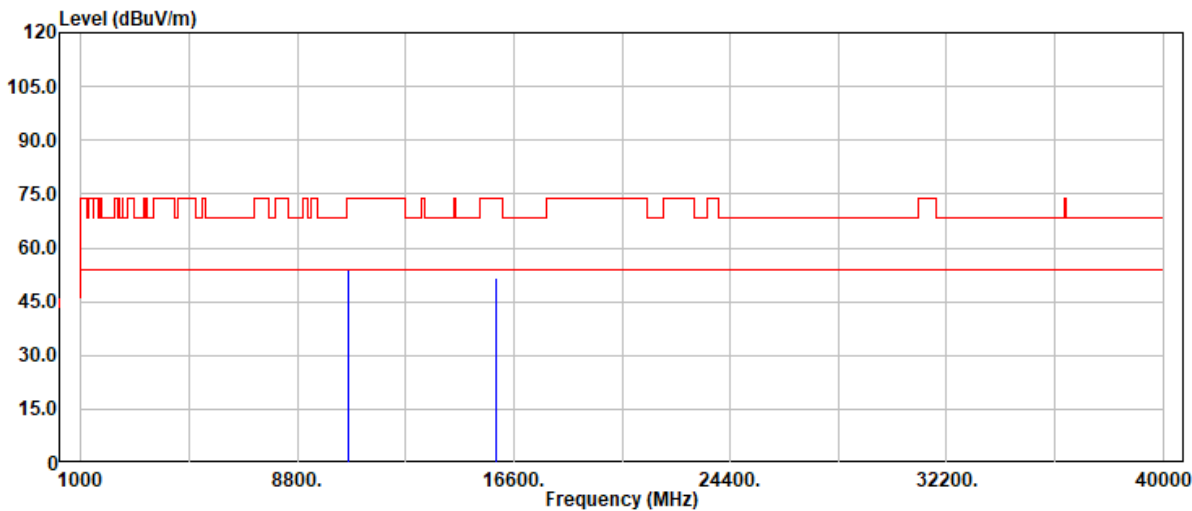


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10640.00	41.06	12.65	53.71	74.00	-20.29	Peak
10640.00	34.58	12.65	47.23	54.00	-6.77	Average
15960.00	35.88	15.84	51.72	74.00	-22.28	Peak
15960.00	27.96	15.84	43.80	54.00	-10.20	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 141 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5270 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 70		

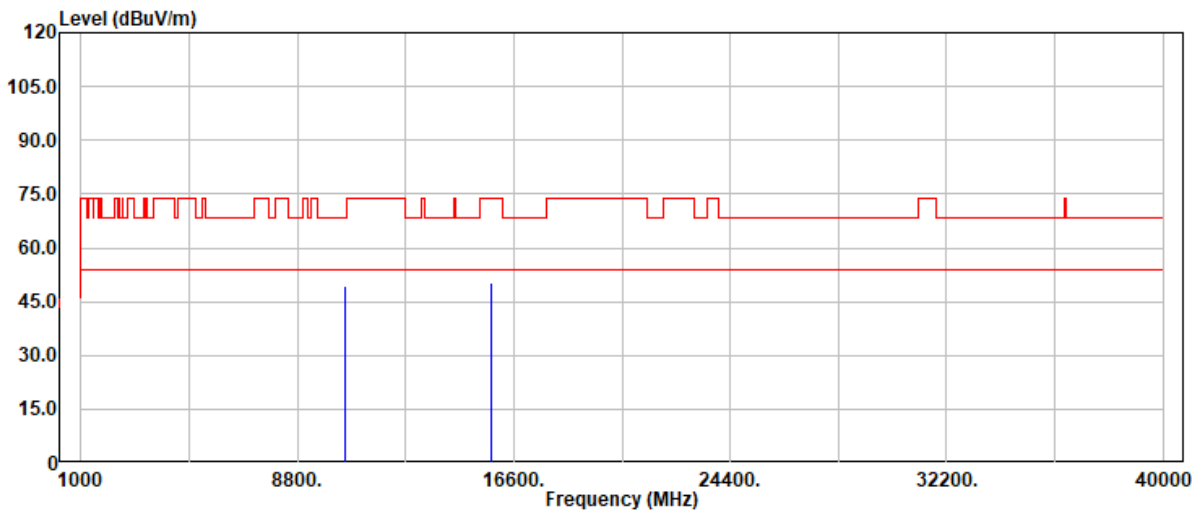

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10540.00	36.90	12.49	49.39	68.20	-18.81	Peak
15810.00	34.58	15.56	50.14	74.00	-23.86	Peak
15810.00	25.60	15.56	41.16	54.00	-12.84	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 142 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band2
Frequency : 5270 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

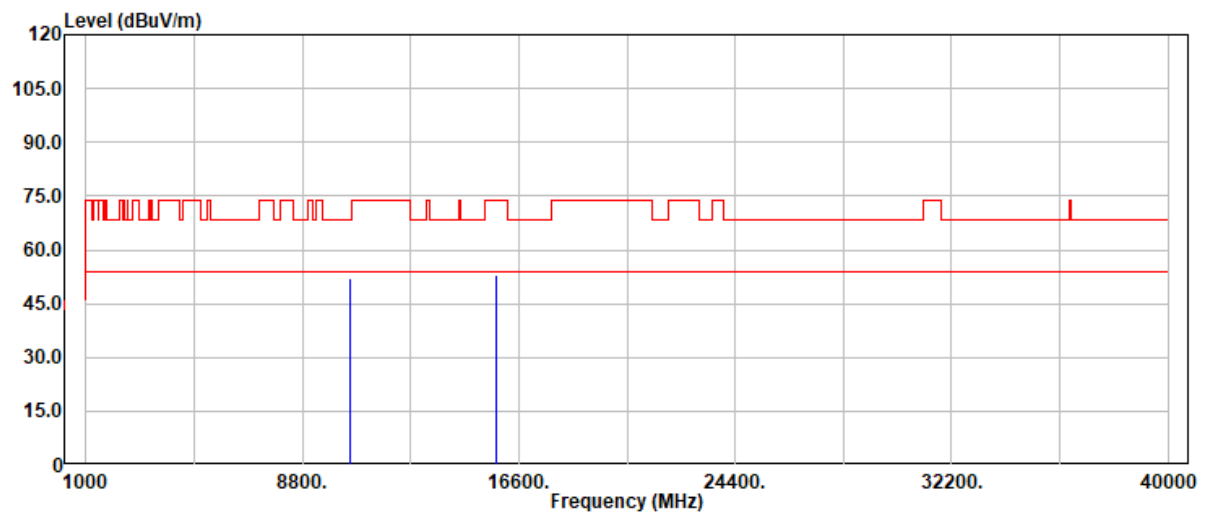

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10540.00	39.81	12.49	52.30	68.20	-15.90	Peak
15810.00	37.64	15.56	53.20	74.00	-20.80	Peak
15810.00	29.27	15.56	44.83	54.00	-9.17	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 143 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band2
Frequency : 5310 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 55

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

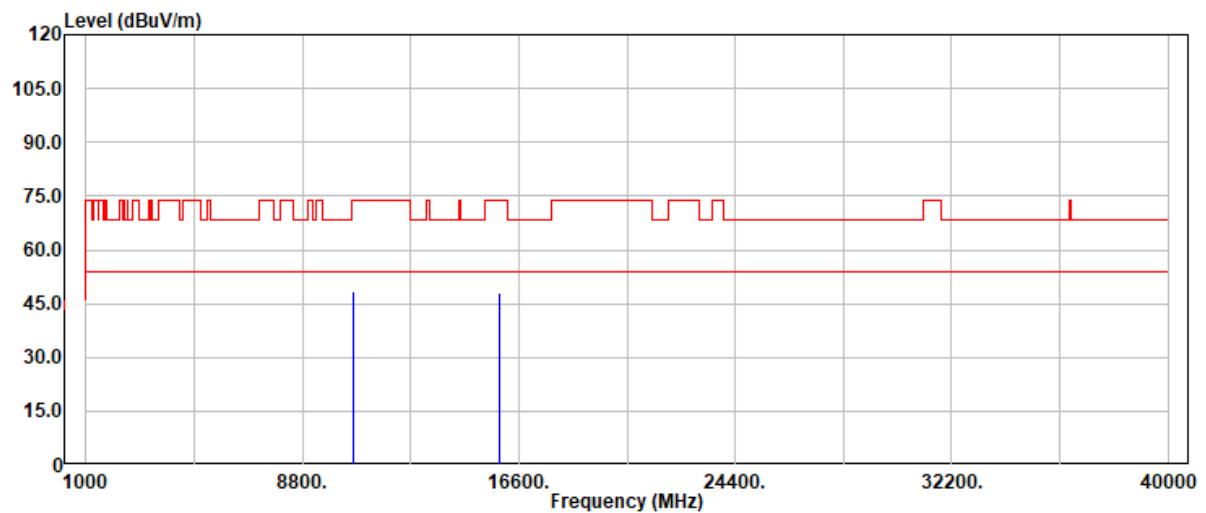


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10620.00	35.70	12.74	48.44	74.00	-25.56	Peak
10620.00	27.22	12.74	39.96	54.00	-14.04	Average
15930.00	32.13	15.72	47.85	74.00	-26.15	Peak
15930.00	25.29	15.72	41.01	54.00	-12.99	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 144 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n40_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5310 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 55		

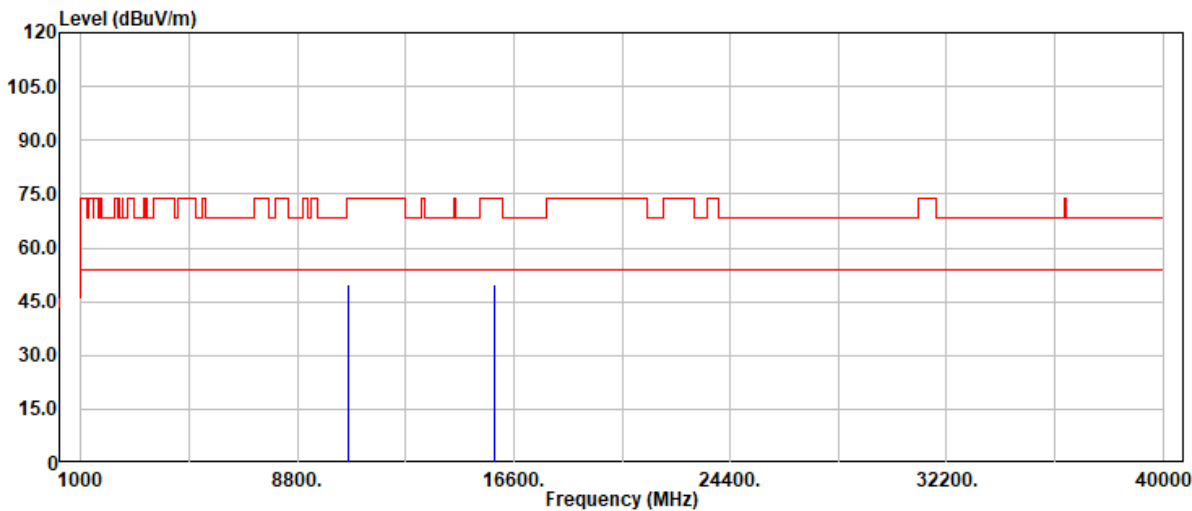


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10620.00	37.04	12.74	49.78	74.00	-24.22	Peak
10620.00	29.32	12.74	42.06	54.00	-11.94	Average
15930.00	34.20	15.72	49.92	74.00	-24.08	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 145 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11ac80_Band2	Temp./Humi.	: 24.3/58
Frequency	: 5290 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 57		

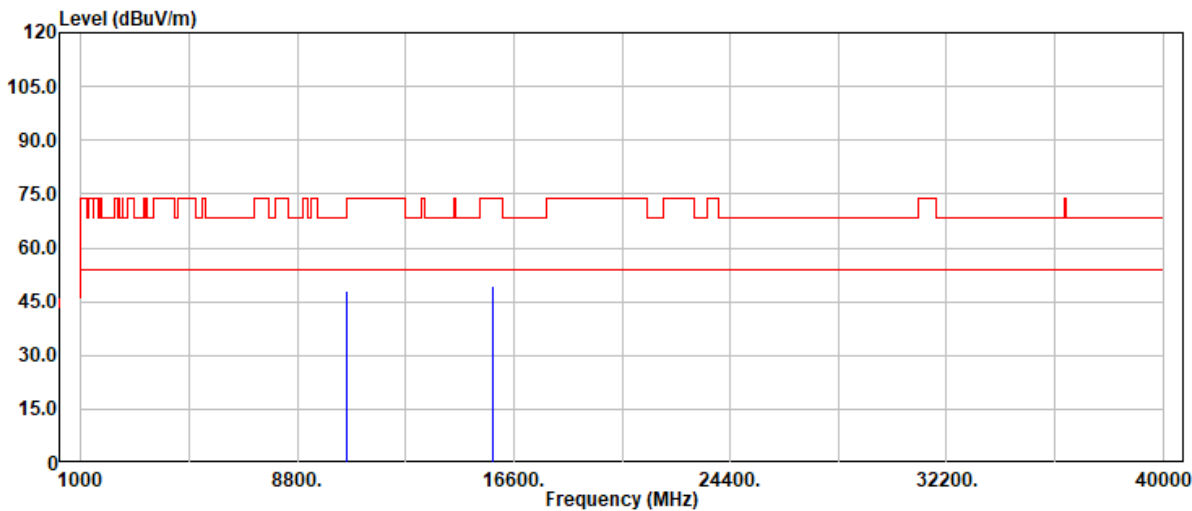

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10580.00	35.51	12.70	48.21	68.20	-19.99	Peak
15870.00	33.59	15.55	49.14	74.00	-24.86	Peak
15870.00	25.45	15.55	41.00	54.00	-13.00	Average




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 146 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band2
Frequency : 5290 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 57

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

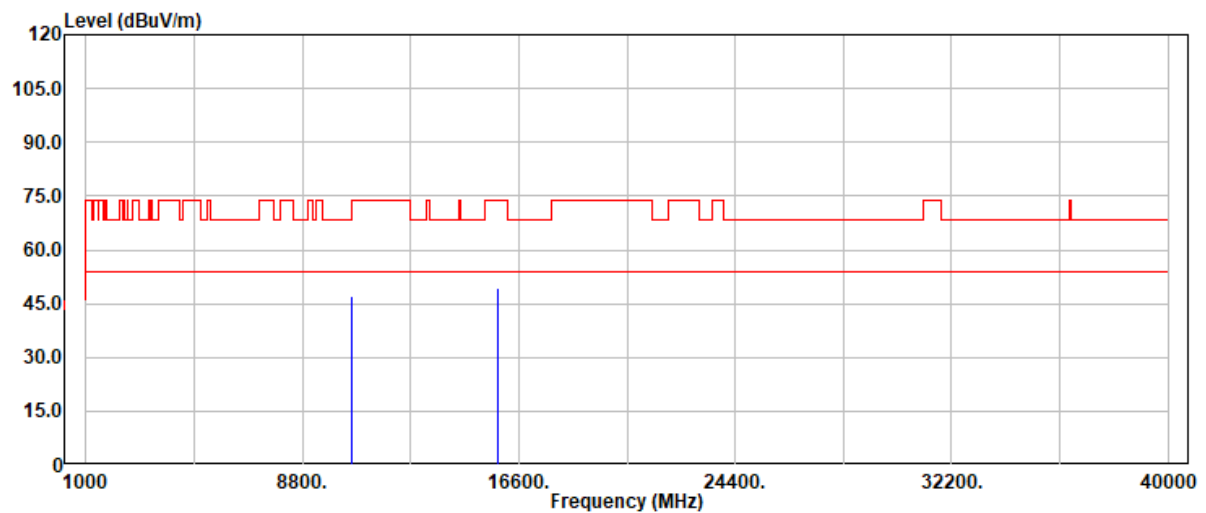


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
10580.00	34.55	12.70	47.25	68.20	-20.95	Peak
15870.00	34.03	15.55	49.58	74.00	-24.42	Peak
15870.00	26.32	15.55	41.87	54.00	-12.13	Average



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 147 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5580 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	:		

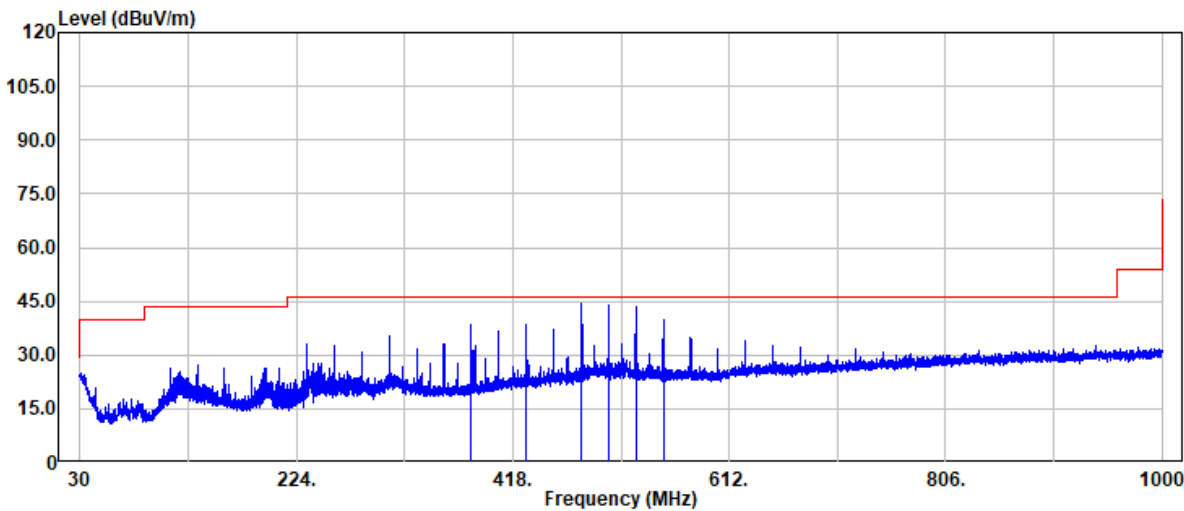

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
380.90	45.85	-7.48	38.37	46.00	-7.63	Peak
430.10	44.27	-5.94	38.33	46.00	-7.67	Peak
479.20	49.13	-4.57	44.56	46.00	-1.44	Peak
503.80	48.54	-4.43	44.11	46.00	-1.89	Peak
528.40	47.55	-3.97	43.58	46.00	-2.42	Peak
553.00	43.67	-3.65	40.02	46.00	-5.98	Peak

Note:
A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 148 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5580 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

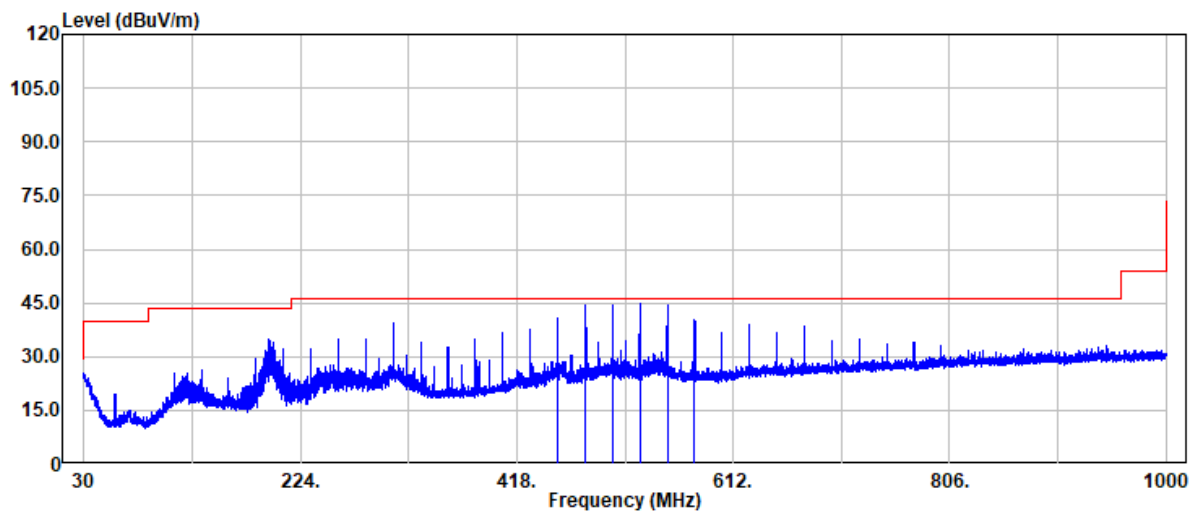

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
454.70	45.90	-5.30	40.60	46.00	-5.40	Peak
479.20	49.17	-4.57	44.60	46.00	-1.40	Peak
503.90	48.82	-4.43	44.39	46.00	-1.61	Peak
528.40	48.76	-3.97	44.79	46.00	-1.21	Peak
553.00	48.06	-3.65	44.41	46.00	-1.59	Peak
577.50	43.50	-3.22	40.28	46.00	-5.72	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 149 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band3
Frequency : 5500 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 60

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Vertical
Engineer : Ray.Li
Test Chamber : 966A

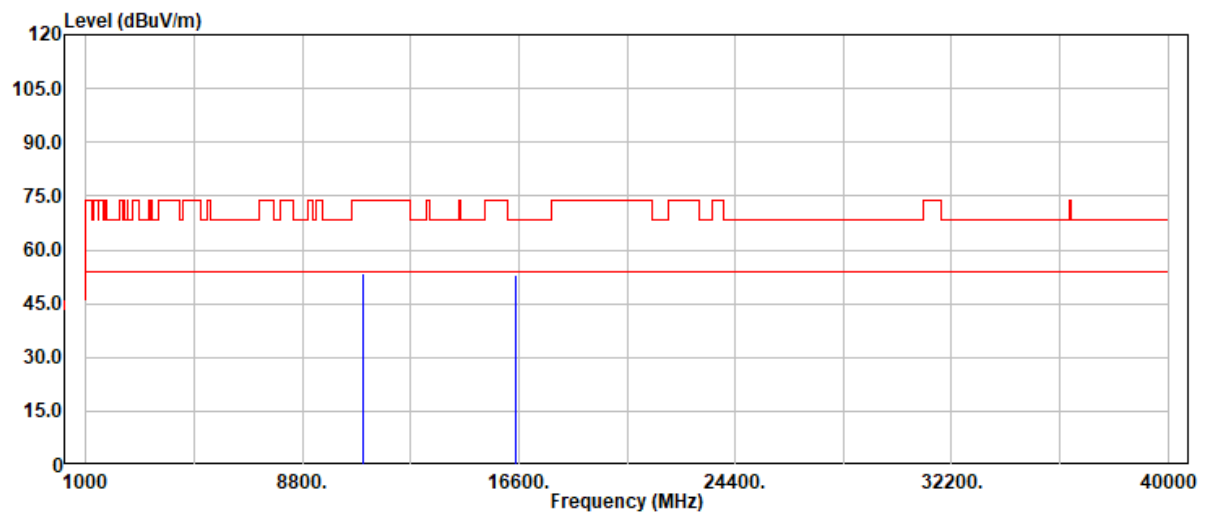


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	39.83	13.58	53.41	74.00	-20.59	Peak
11000.00	33.82	13.58	47.40	54.00	-6.60	Average
16500.00	34.17	19.03	53.20	68.20	-15.00	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 150 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5500 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 60		

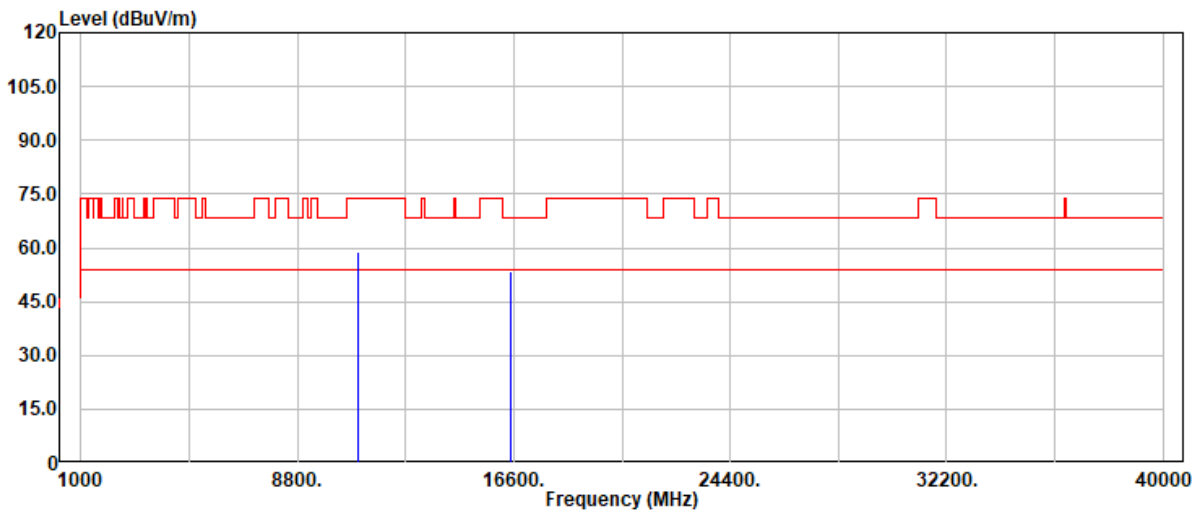


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	45.37	13.58	58.95	74.00	-15.05	Peak
11000.00	39.20	13.58	52.78	54.00	-1.22	Average
16500.00	34.33	19.03	53.36	68.20	-14.84	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 151 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5580 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 68		

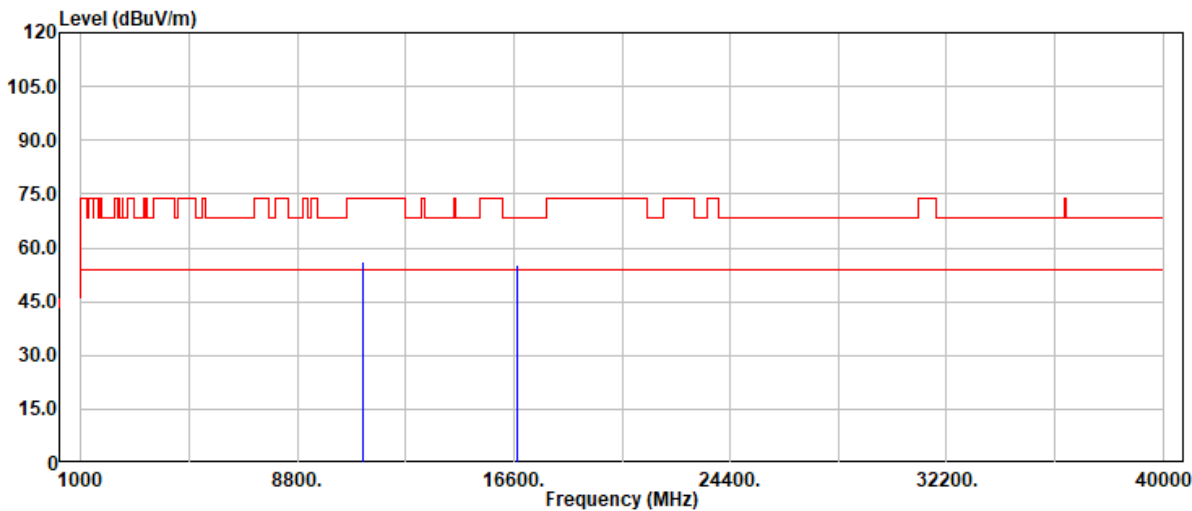


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11160.00	42.54	13.48	56.02	74.00	-17.98	Peak
11160.00	34.27	13.48	47.75	54.00	-6.25	Average
16740.00	34.25	20.87	55.12	68.20	-13.08	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 152 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5580 MHz	Antenna Pol.	: Horizontal
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 68		

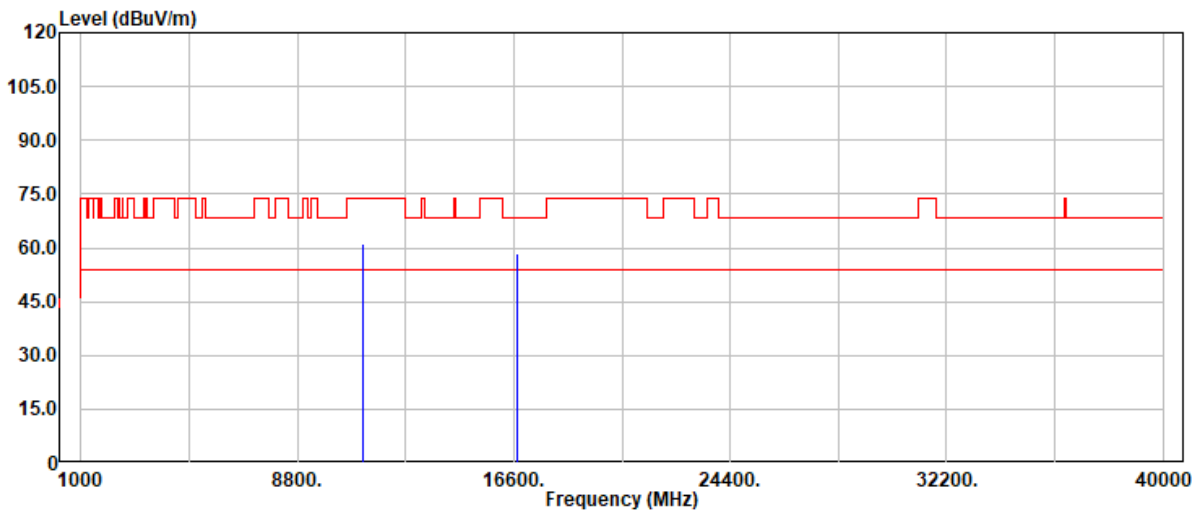


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11160.00	47.68	13.48	61.16	74.00	-12.84	Peak
11160.00	39.74	13.48	53.22	54.00	-0.78	Average
16740.00	37.57	20.87	58.44	68.20	-9.76	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 153 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band3	Temp./Humi.	: 24.5/57
Frequency	: 5700 MHz	Antenna Pol.	: Vertical
Operation Mode	: TX	Engineer	: Ray.Li
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 67		

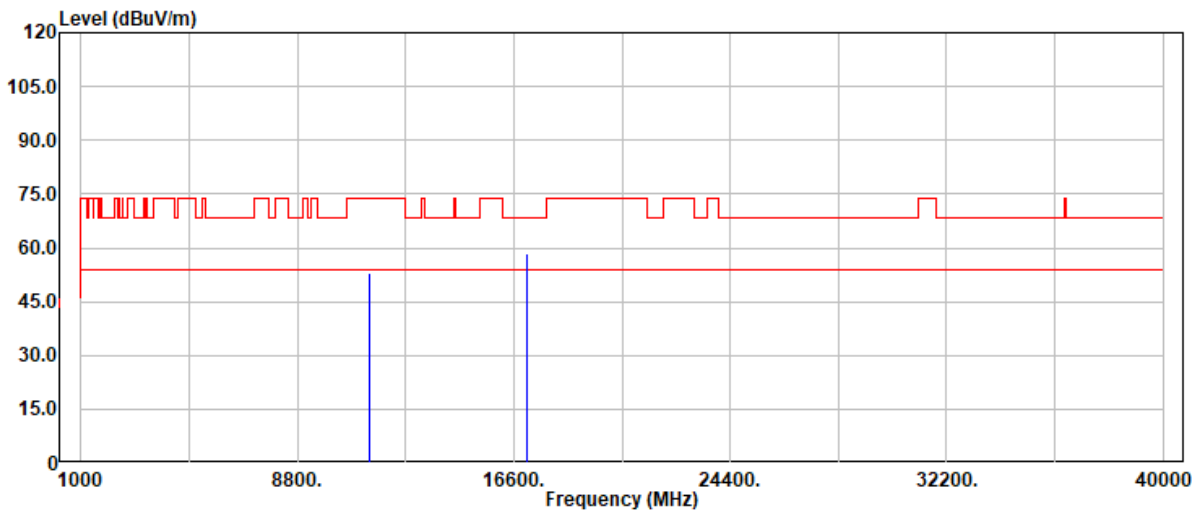

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11400.00	39.73	13.23	52.96	74.00	-21.04	Peak
11400.00	33.36	13.23	46.59	54.00	-7.41	Average
17100.00	32.81	25.49	58.30	68.20	-9.90	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 154 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band3
Frequency : 5700 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 67

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

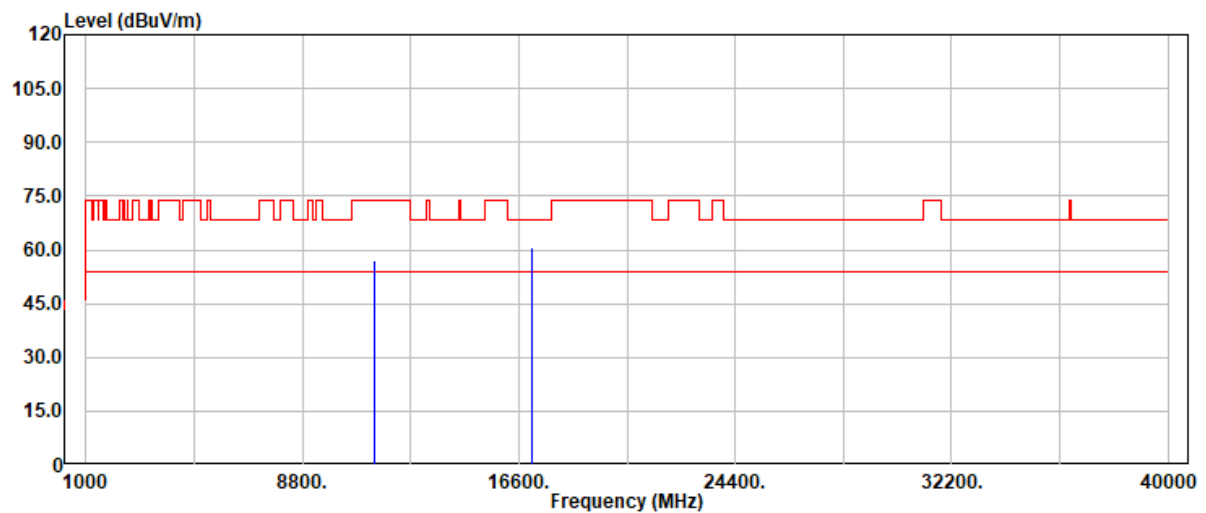


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11400.00	43.81	13.23	57.04	74.00	-16.96	Peak
11400.00	38.87	13.23	52.10	54.00	-1.90	Average
17100.00	35.40	25.49	60.89	68.20	-7.31	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 155 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5500 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 60		

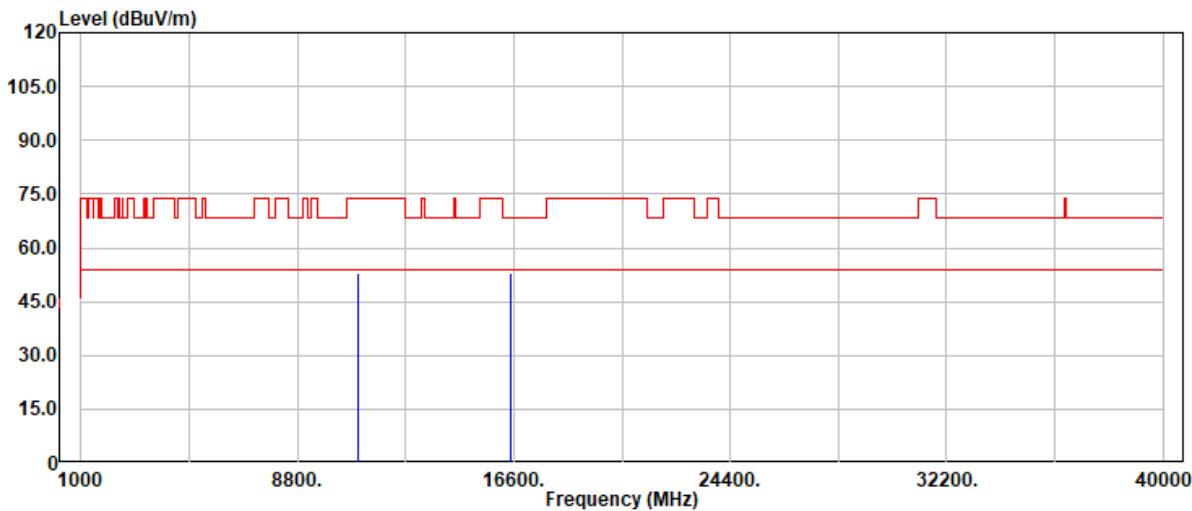

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	39.21	13.58	52.79	74.00	-21.21	Peak
11000.00	31.06	13.58	44.64	54.00	-9.36	Average
16500.00	34.16	19.03	53.19	68.20	-15.01	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 156 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band3
Frequency : 5500 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 60

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

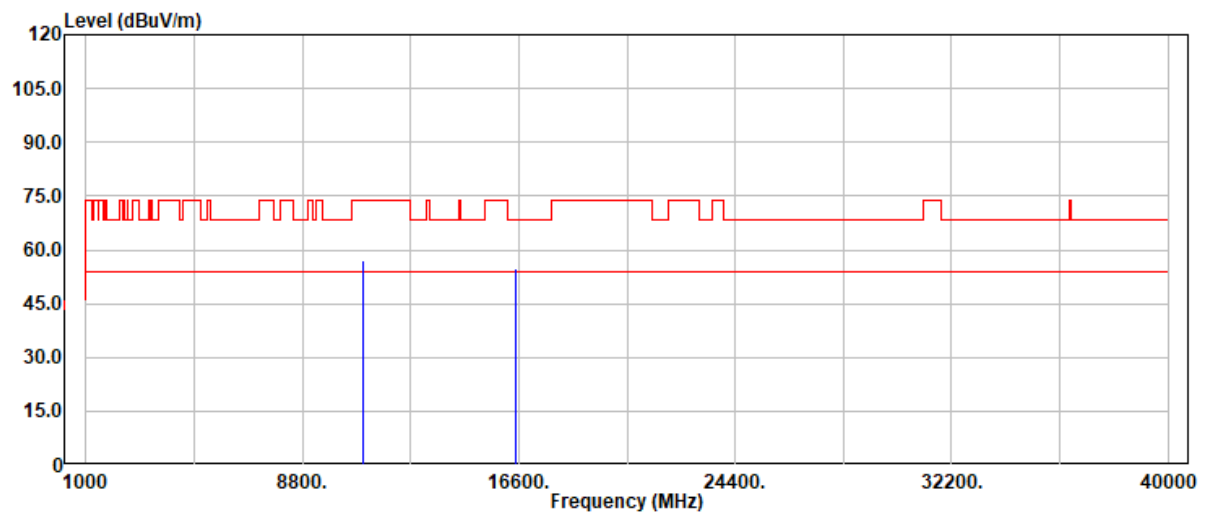


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11000.00	43.60	13.58	57.18	74.00	-16.82	Peak
11000.00	36.05	13.58	49.63	54.00	-4.37	Average
16500.00	35.76	19.03	54.79	68.20	-13.41	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 157 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5580 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 72		

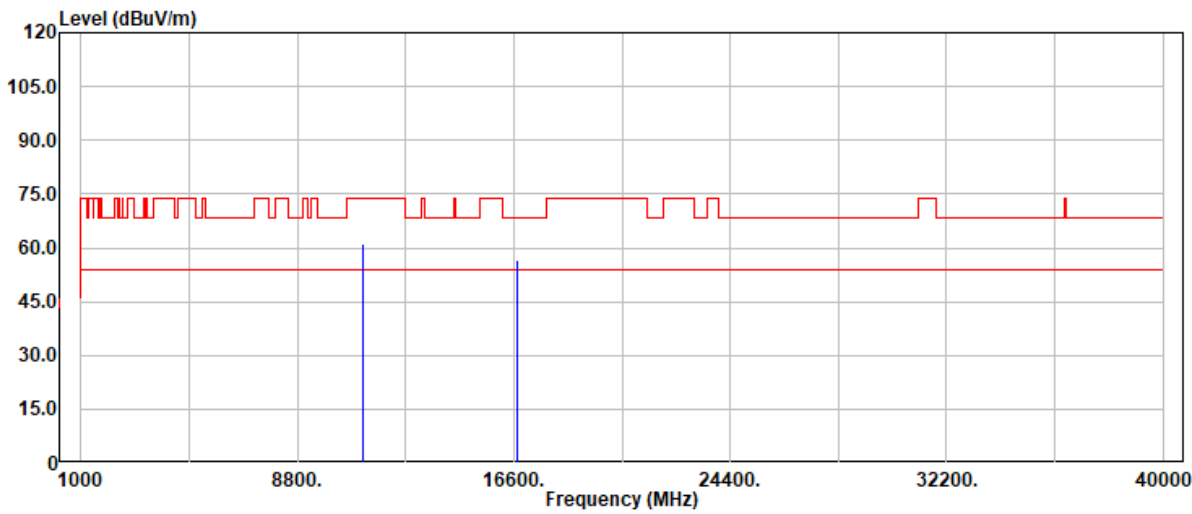


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11160.00	47.73	13.48	61.21	74.00	-12.79	Peak
11160.00	34.99	13.48	48.47	54.00	-5.53	Average
16740.00	35.70	20.87	56.57	68.20	-11.63	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 158 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5580 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 72		

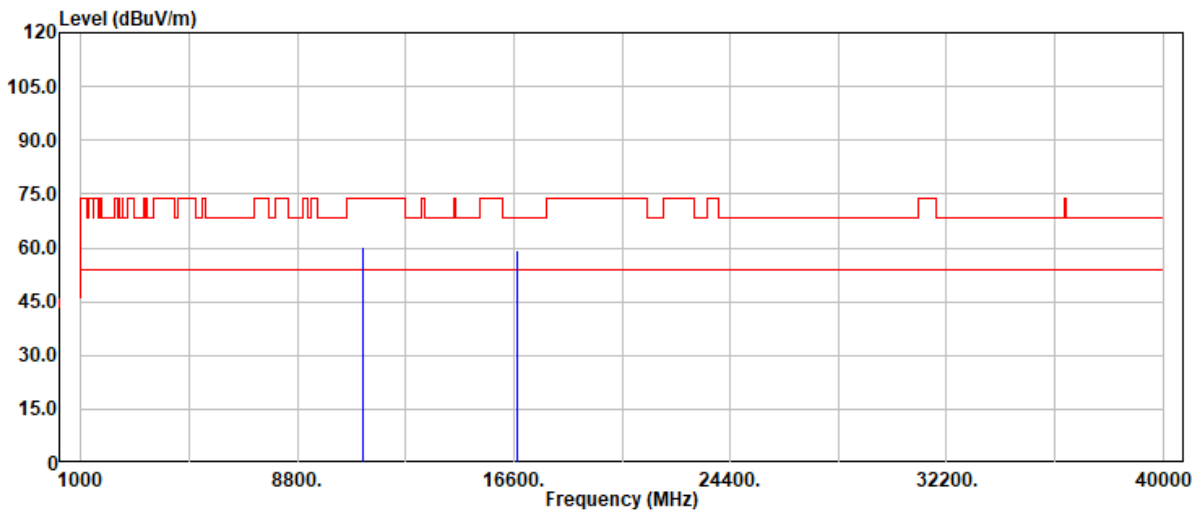


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11160.00	46.62	13.48	60.10	74.00	-13.90	Peak
11160.00	40.11	13.48	53.59	54.00	-0.41	Average
16740.00	38.57	20.87	59.44	68.20	-8.76	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 159 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5700 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 51		

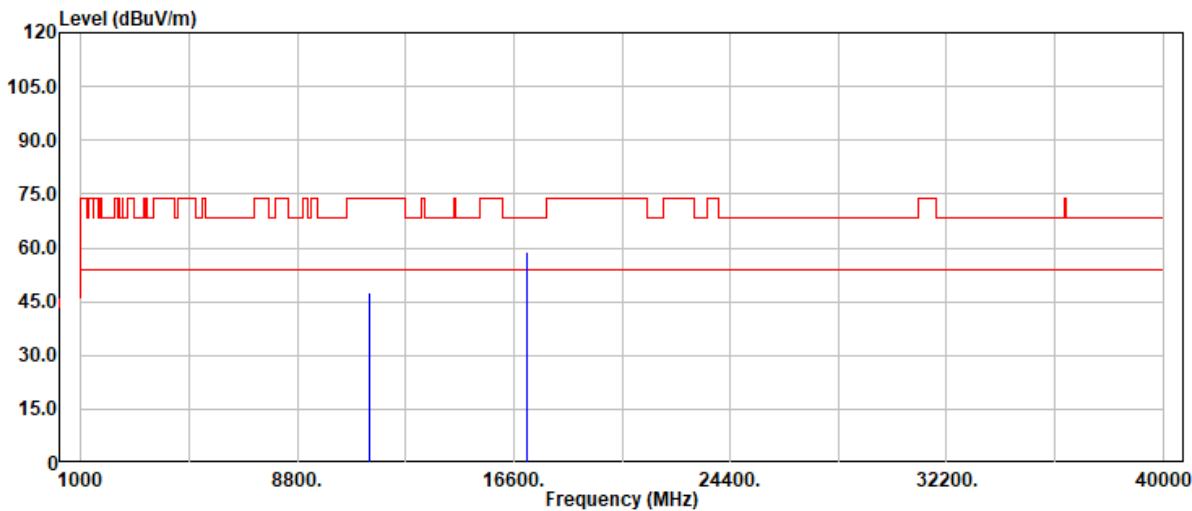


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11400.00	34.53	13.23	47.76	74.00	-26.24	Peak
11400.00	26.48	13.23	39.71	54.00	-14.29	Average
17100.00	33.37	25.49	58.86	68.20	-9.34	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 160 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5700 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 51		

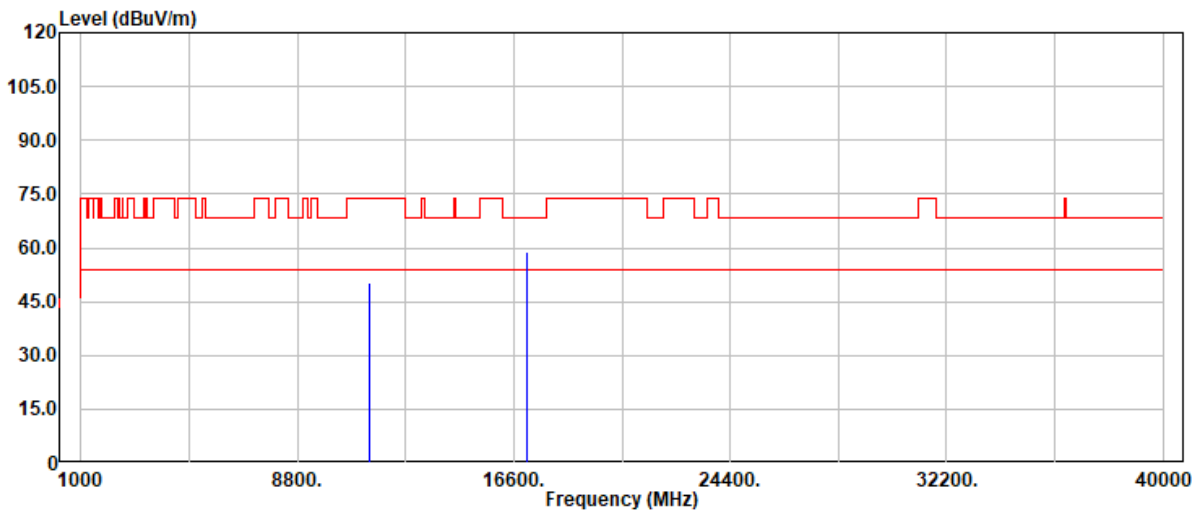


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11400.00	36.98	13.23	50.21	74.00	-23.79	Peak
11400.00	29.72	13.23	42.95	54.00	-11.05	Average
17100.00	33.43	25.49	58.92	68.20	-9.28	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 161 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n40_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5510 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 57		

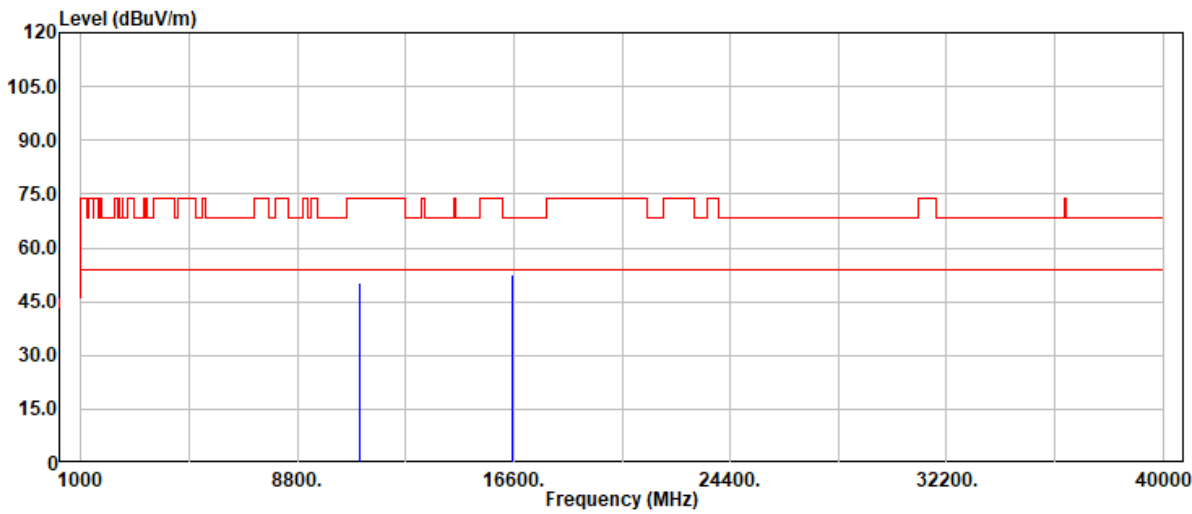

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11020.00	36.90	13.58	50.48	74.00	-23.52	Peak
11020.00	28.46	13.58	42.04	54.00	-11.96	Average
16530.00	33.41	18.96	52.37	68.20	-15.83	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 162 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5510 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 57

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

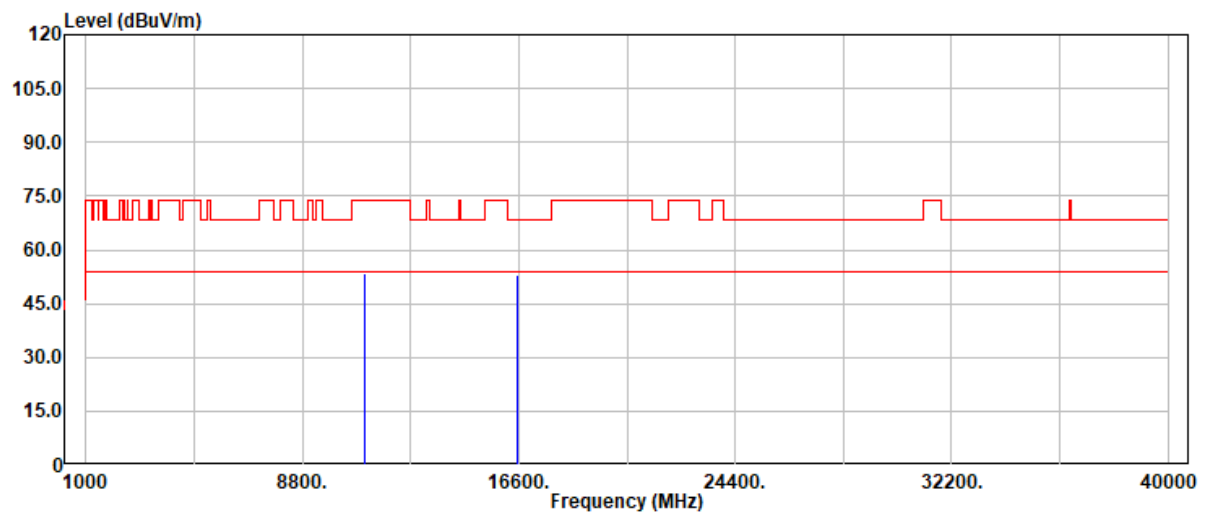

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11020.00	39.94	13.58	53.52	74.00	-20.48	Peak
11020.00	31.85	13.58	45.43	54.00	-8.57	Average
16530.00	34.14	18.96	53.10	68.20	-15.10	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 163 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5550 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

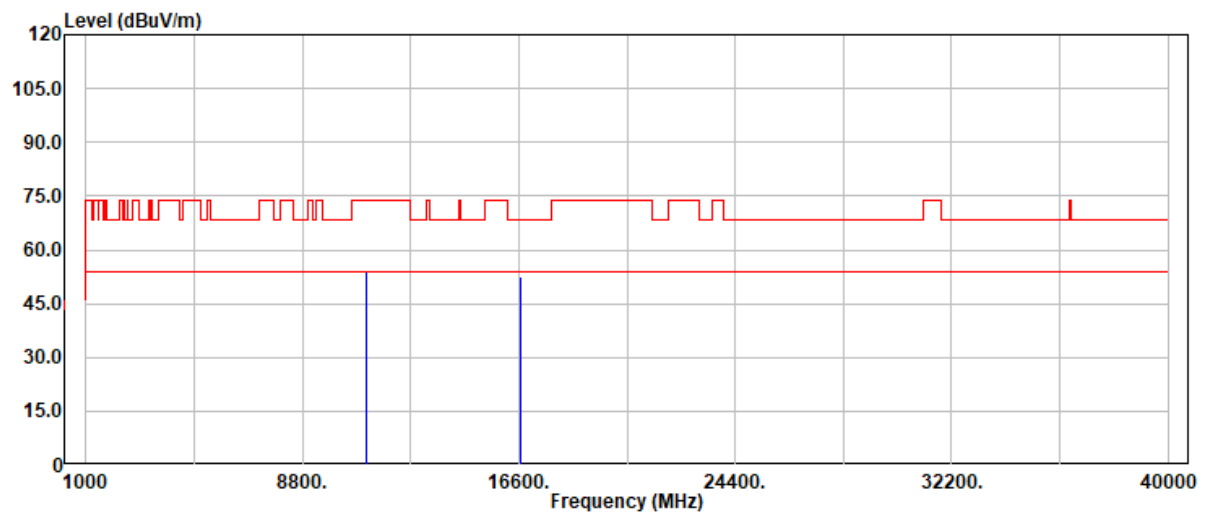

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11100.00	40.62	13.33	53.95	74.00	-20.05	Peak
11100.00	31.95	13.33	45.28	54.00	-8.72	Average
16650.00	33.07	19.66	52.73	68.20	-15.47	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 164 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5550 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

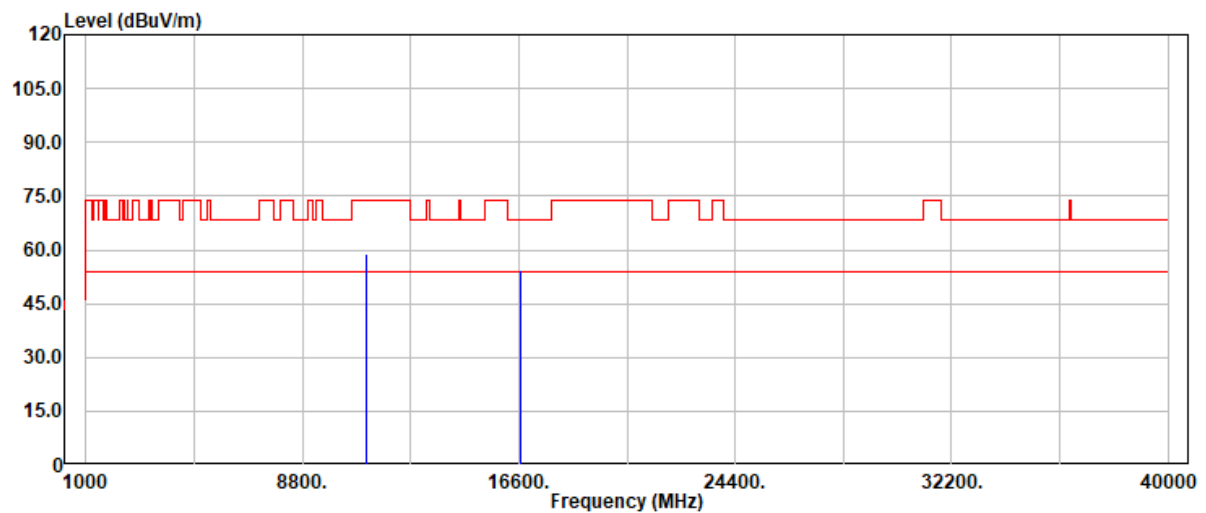


Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11100.00	45.45	13.33	58.78	74.00	-15.22	Peak
11100.00	36.21	13.33	49.54	54.00	-4.46	Average
16650.00	34.74	19.66	54.40	68.20	-13.80	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 165 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n40_Band3	Temp./Humi.	: 24.3/58
Frequency	: 5670 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 60		

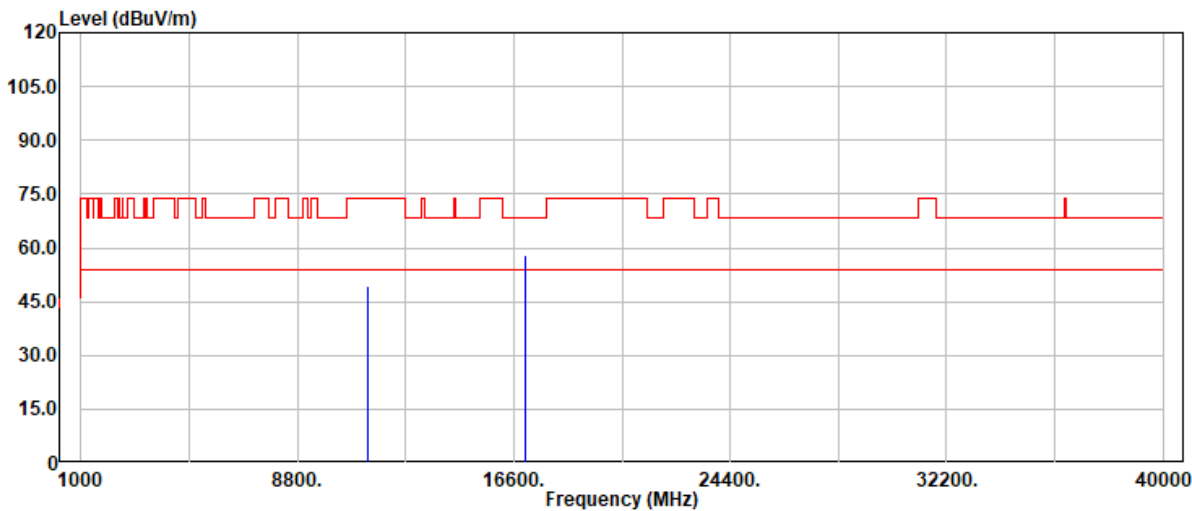

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11340.00	36.10	13.25	49.35	74.00	-24.65	Peak
11340.00	26.82	13.25	40.07	54.00	-13.93	Average
17010.00	33.74	24.27	58.01	68.20	-10.19	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 166 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band3
Frequency : 5670 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 60

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

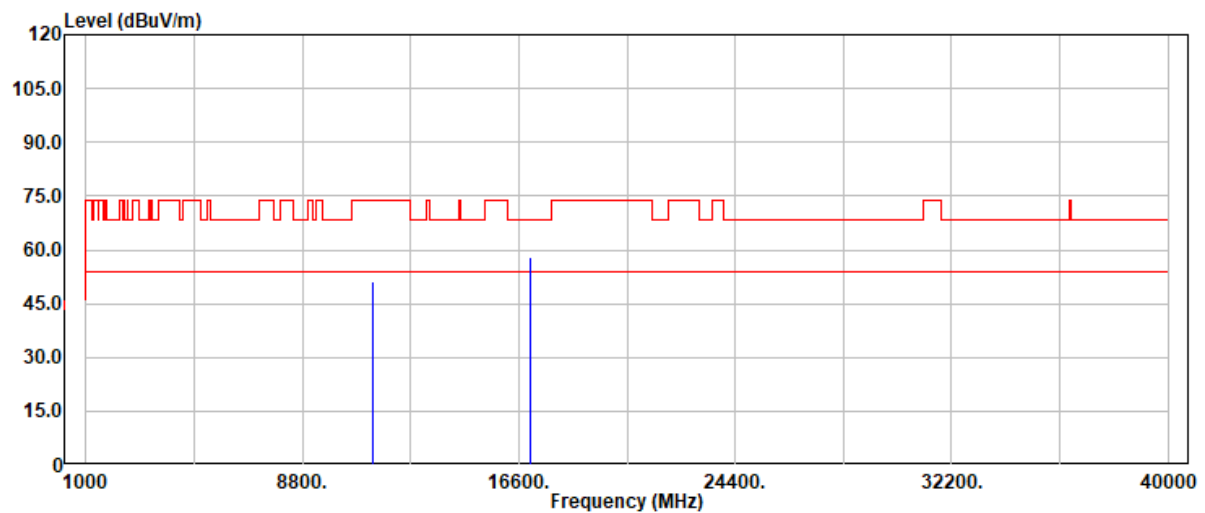

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11340.00	37.69	13.25	50.94	74.00	-23.06	Peak
11340.00	29.76	13.25	43.01	54.00	-10.99	Average
17010.00	33.71	24.27	57.98	68.20	-10.22	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 167 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 54

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

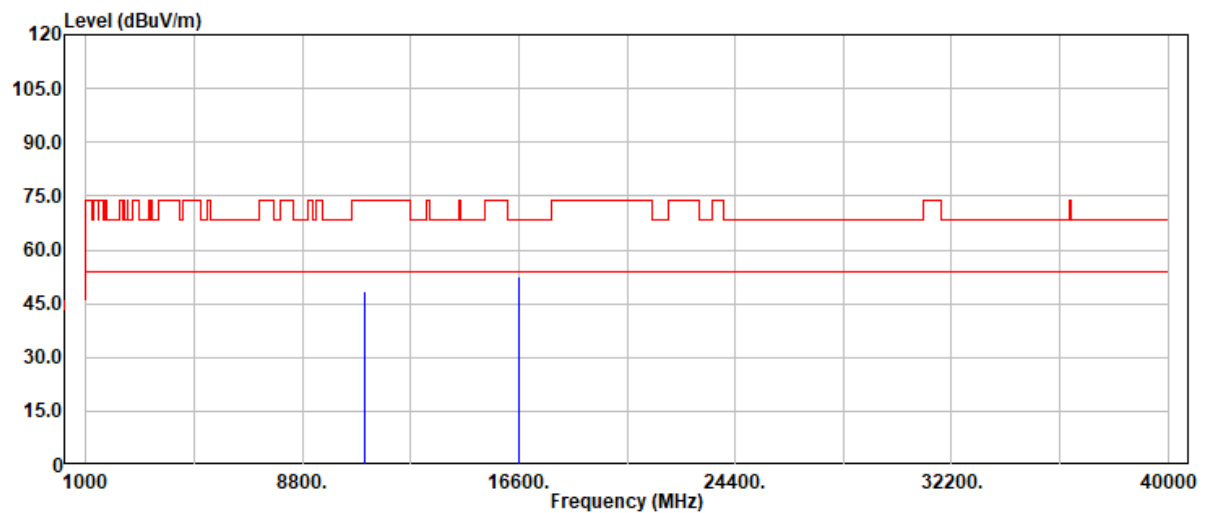

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	34.78	13.53	48.31	74.00	-25.69	Peak
11060.00	27.55	13.53	41.08	54.00	-12.92	Average
16590.00	33.39	19.02	52.41	68.20	-15.79	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 168 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5530 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 54

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

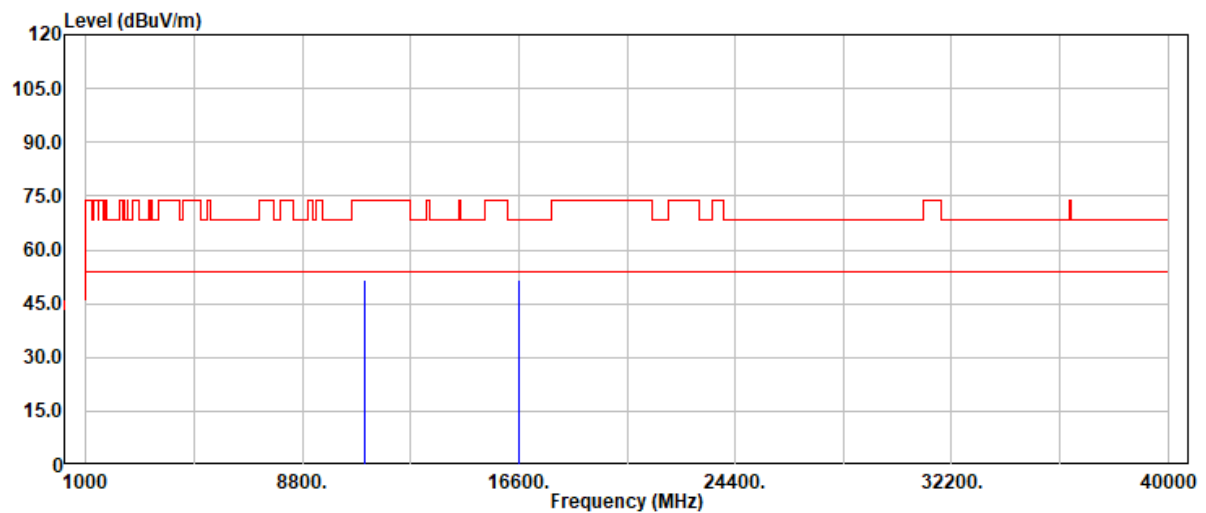

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11060.00	37.93	13.53	51.46	74.00	-22.54	Peak
11060.00	29.22	13.53	42.75	54.00	-11.25	Average
16590.00	32.48	19.02	51.50	68.20	-16.70	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 169 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 72

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

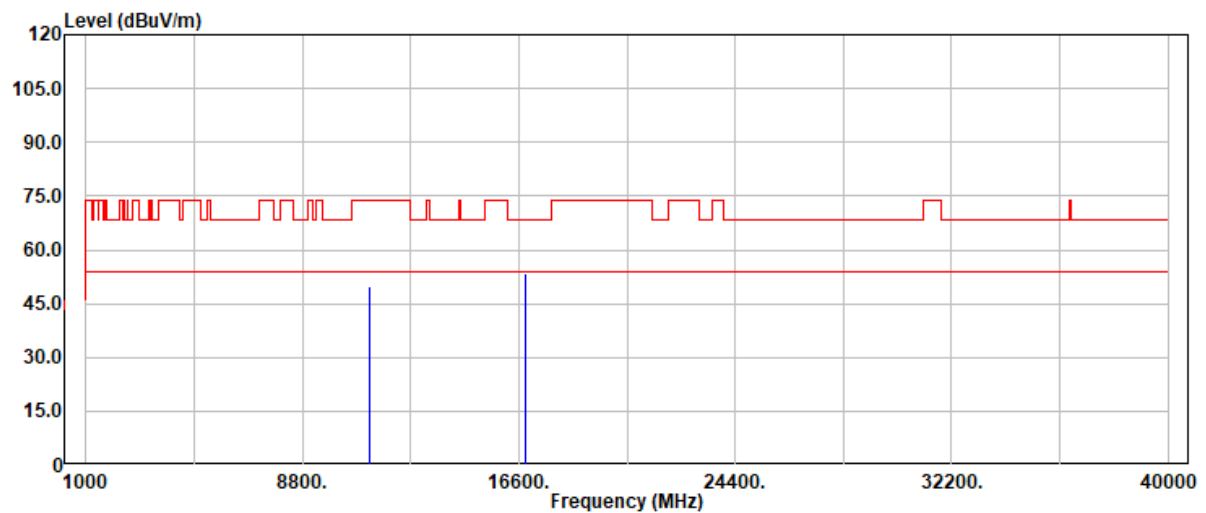

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	36.40	13.58	49.98	74.00	-24.02	Peak
11220.00	29.36	13.58	42.94	54.00	-11.06	Average
16830.00	31.82	21.65	53.47	68.20	-14.73	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 170 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band3
Frequency : 5610 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 72

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

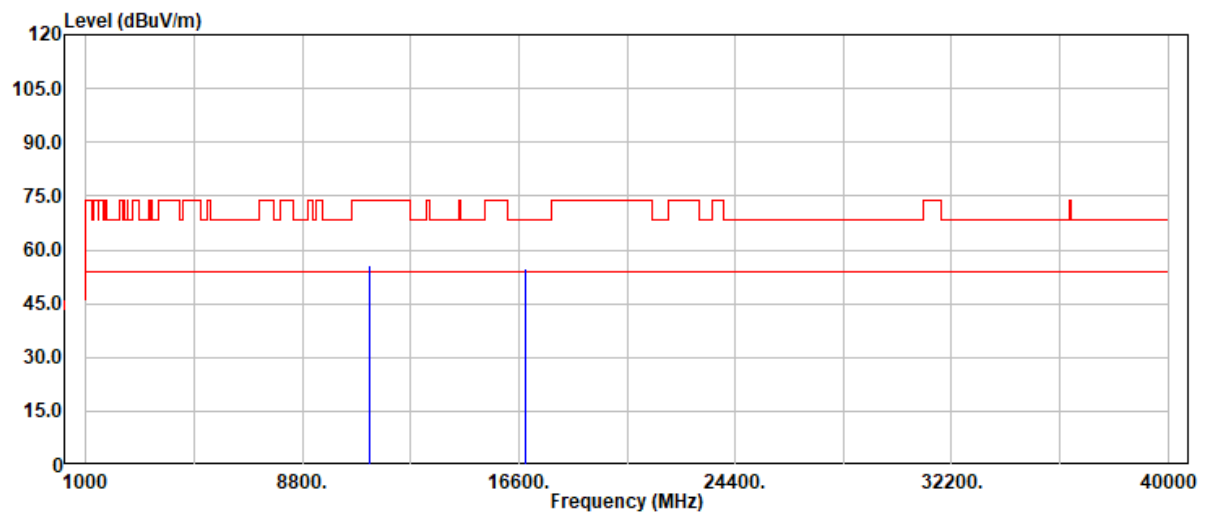

Freq	Read	Factor	Actual	Limit	Margin	Detector
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11220.00	41.95	13.58	55.53	74.00	-18.47	Peak
11220.00	34.82	13.58	48.40	54.00	-5.60	Average
16830.00	32.97	21.65	54.62	68.20	-13.58	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 171 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : VERTICAL
Engineer : Ray.Li
Test Chamber : 966A

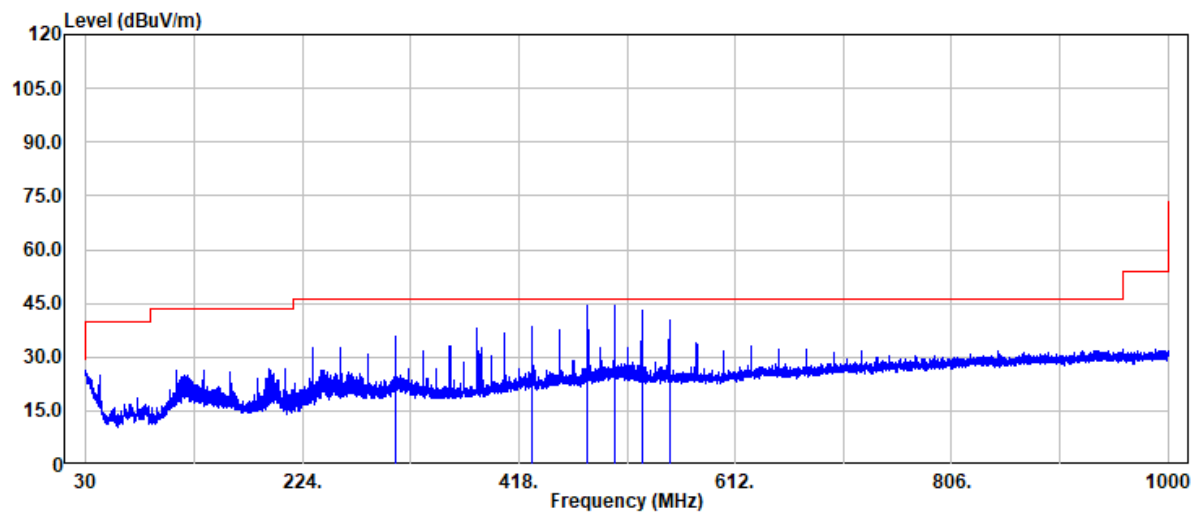

Freq	Read		Actual	Limit		Detector
MHz	Level	Factor	FS	@3m	Margin	Mode
	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
307.20	45.07	-9.20	35.87	46.00	-10.13	Peak
430.10	44.29	-5.94	38.35	46.00	-7.65	Peak
479.20	49.05	-4.57	44.48	46.00	-1.52	Peak
503.90	48.61	-4.43	44.18	46.00	-1.82	Peak
528.40	47.13	-3.97	43.16	46.00	-2.84	Peak
553.00	43.94	-3.65	40.29	46.00	-5.71	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 172 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting :

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : HORIZONTAL
Engineer : Ray.Li
Test Chamber : 966A

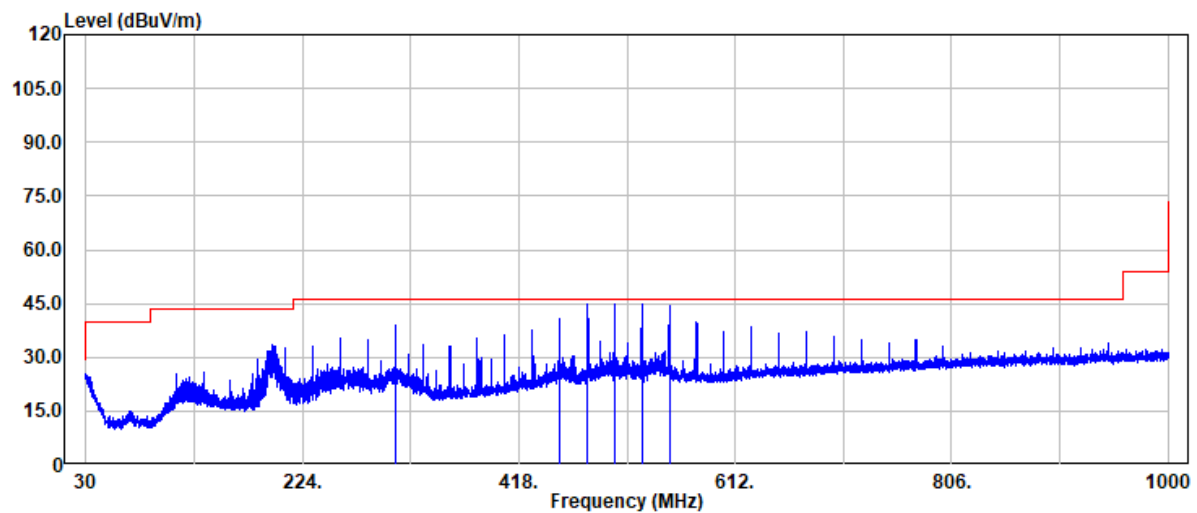

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
307.20	48.22	-9.20	39.02	46.00	-6.98	Peak
454.70	45.96	-5.30	40.66	46.00	-5.34	Peak
479.20	49.41	-4.57	44.84	46.00	-1.16	Peak
503.70	49.07	-4.43	44.64	46.00	-1.36	Peak
528.30	48.65	-3.98	44.67	46.00	-1.33	Peak
553.00	48.05	-3.65	44.40	46.00	-1.60	Peak

Note:

A suppression core was applied between the EUT and test fixture cable to suppress fixture-related noise below 1 GHz; it is not part of the EUT or product package.



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 173 / 190
Rev.: 01

Project No : TM-2412000436P

Operation Band : 802.11a_Band4

Frequency : 5745 MHz

Operation Mode : TX

EUT Pol : E1

Setting : 72


Test Date : 2025-01-17

Temp./Humi. : 24.5/57

Antenna Pol. : Vertical

Engineer : Ray.Li

Test Chamber : 966A

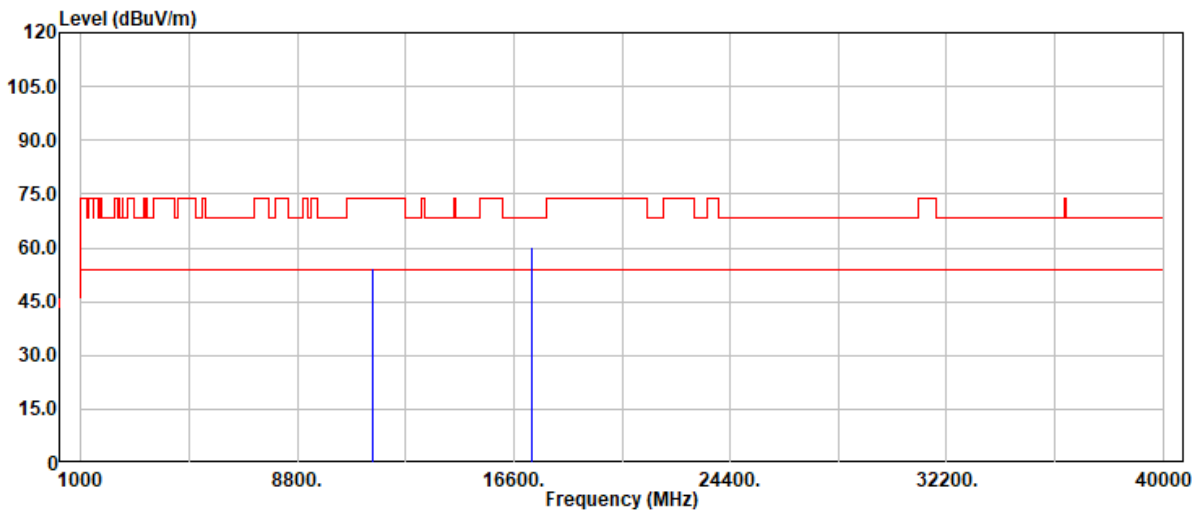

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	41.16	13.09	54.25	74.00	-19.75	Peak
11490.00	33.31	13.09	46.40	54.00	-7.60	Average
17235.00	34.68	25.63	60.31	68.20	-7.89	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 174 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 72

Test Date : 2025-01-17
Temp./Humi. : 24.5/57
Antenna Pol. : Horizontal
Engineer : Ray.Li
Test Chamber : 966A

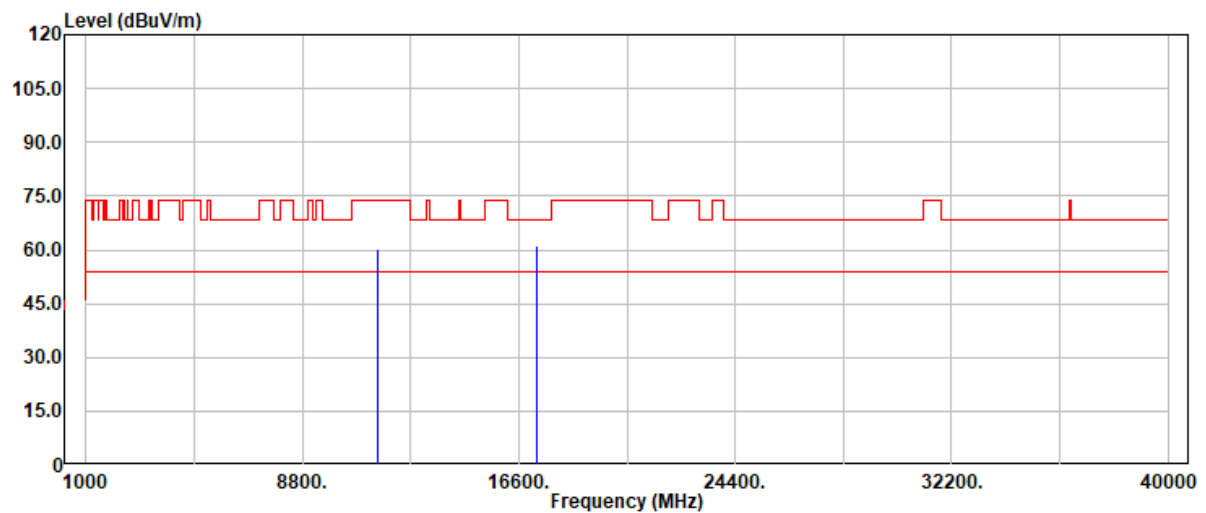

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	47.01	13.09	60.10	74.00	-13.90	Peak
11490.00	39.91	13.09	53.00	54.00	-1.00	Average
17235.00	35.53	25.63	61.16	68.20	-7.04	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 175 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5785 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

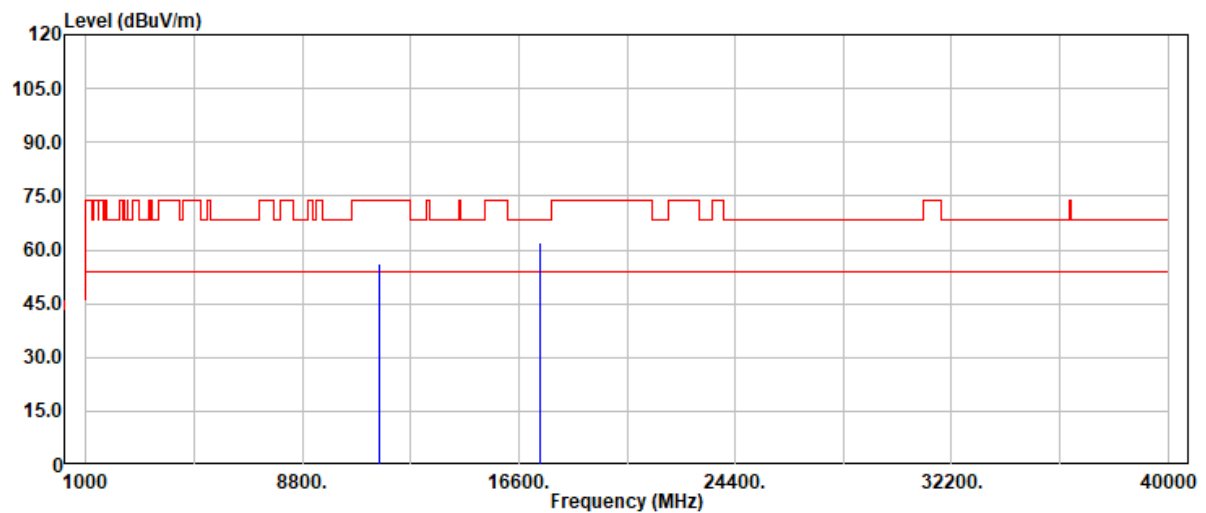


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	42.84	13.25	56.09	74.00	-17.91	Peak
11570.00	35.68	13.25	48.93	54.00	-5.07	Average
17355.00	36.13	25.69	61.82	68.20	-6.38	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 176 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5785 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

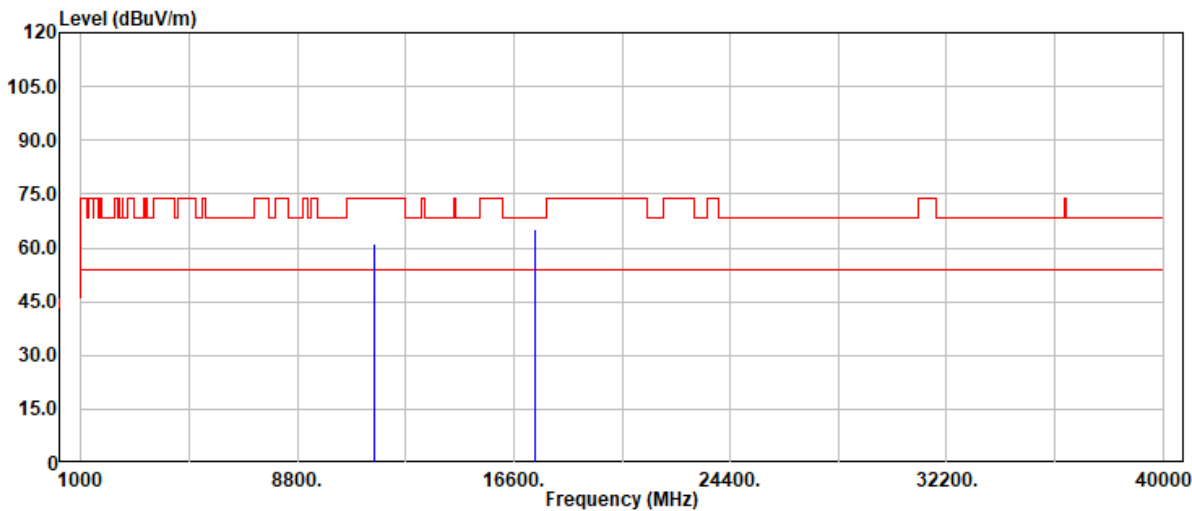

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	47.81	13.25	61.06	74.00	-12.94	Peak
11570.00	38.95	13.25	52.20	54.00	-1.80	Average
17355.00	39.34	25.69	65.03	68.20	-3.17	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 177 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11a_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

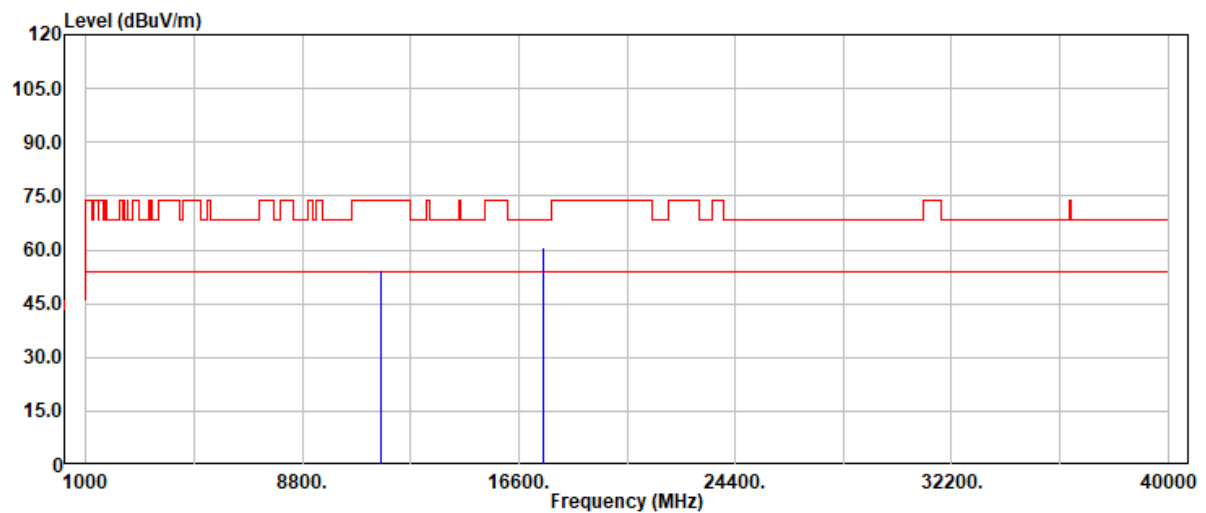


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	41.18	13.03	54.21	74.00	-19.79	Peak
11650.00	34.09	13.03	47.12	54.00	-6.88	Average
17475.00	35.53	25.32	60.85	68.20	-7.35	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 178 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11a_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5825 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

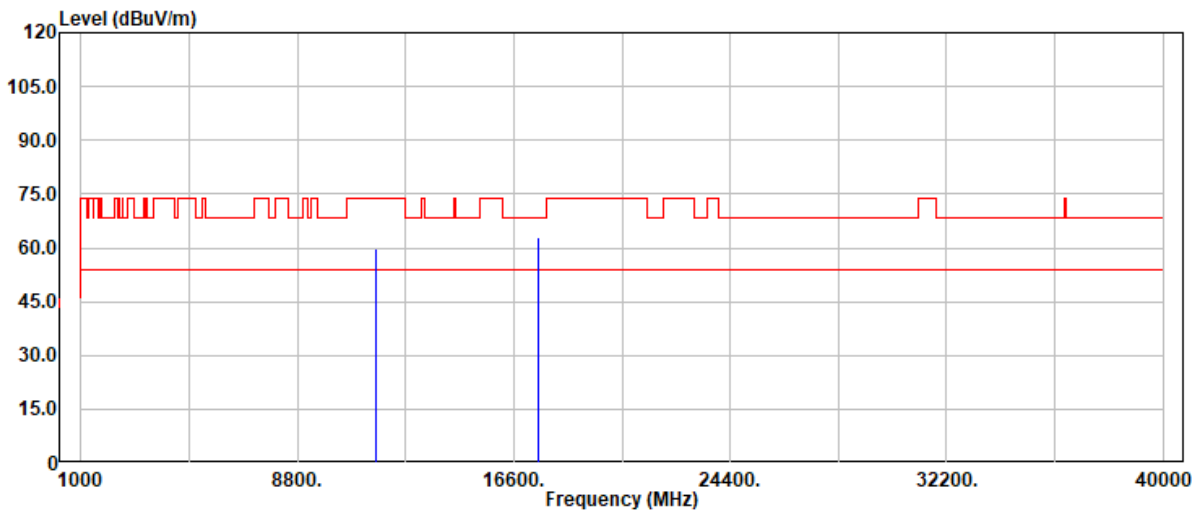

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	46.69	13.03	59.72	74.00	-14.28	Peak
11650.00	39.93	13.03	52.96	54.00	-1.04	Average
17475.00	37.65	25.32	62.97	68.20	-5.23	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 179 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5745 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

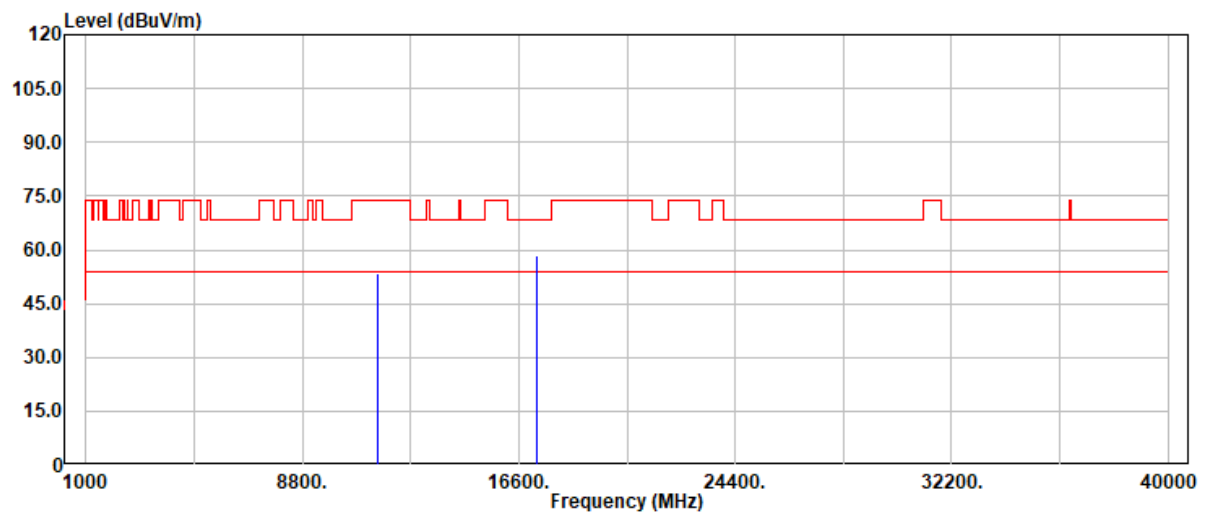


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	40.33	13.09	53.42	74.00	-20.58	Peak
11490.00	33.65	13.09	46.74	54.00	-7.26	Average
17235.00	32.57	25.63	58.20	68.20	-10.00	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 180 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5745 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

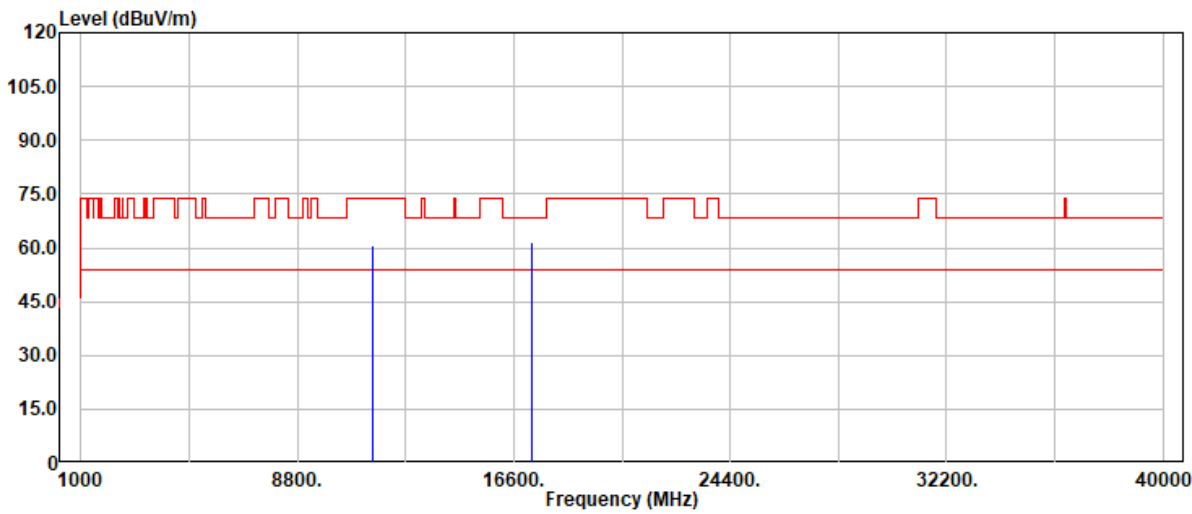

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11490.00	47.59	13.09	60.68	74.00	-13.32	Peak
11490.00	39.81	13.09	52.90	54.00	-1.10	Average
17235.00	36.14	25.63	61.77	68.20	-6.43	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 181 / 190
Rev.: 01

Project No : TM-2412000436P

Operation Band : 802.11n20_Band4

Frequency : 5785 MHz

Operation Mode : TX

EUT Pol : E1

Setting : 80


Test Date : 2025-01-17

Temp./Humi. : 24.3/58

Antenna Pol. : VERTICAL

Engineer : Tony.Chao

Test Chamber : 966A

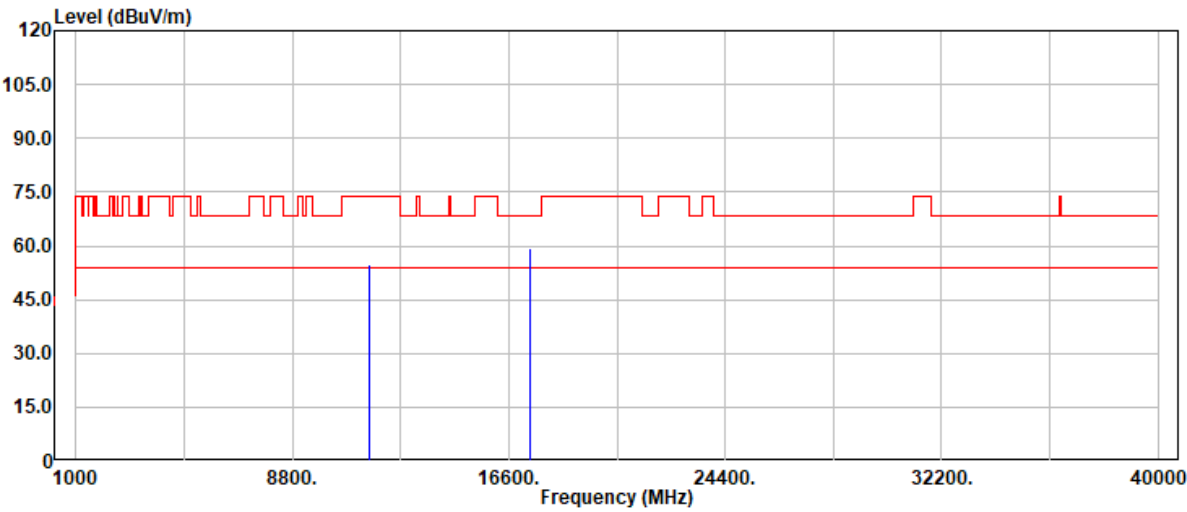


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	41.38	13.25	54.63	74.00	-19.37	Peak
17355.00	33.76	25.69	59.45	68.20	-8.75	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 182 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5785 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

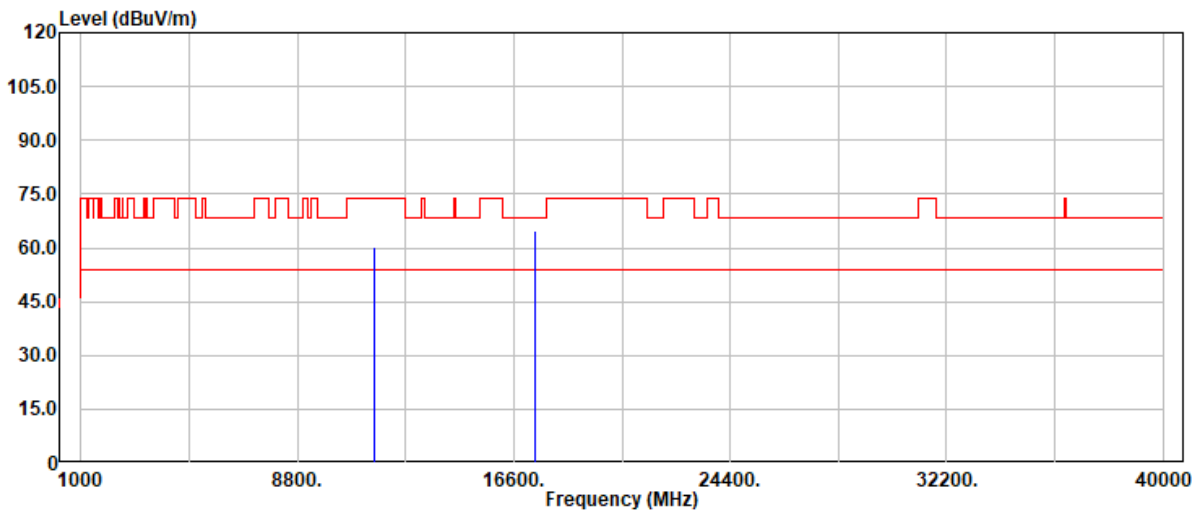

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11570.00	46.80	13.25	60.05	74.00	-13.95	Peak
11570.00	38.71	13.25	51.96	54.00	-2.04	Average
17355.00	39.19	25.69	64.88	68.20	-3.32	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 183 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n20_Band4
Frequency : 5825 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 80

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

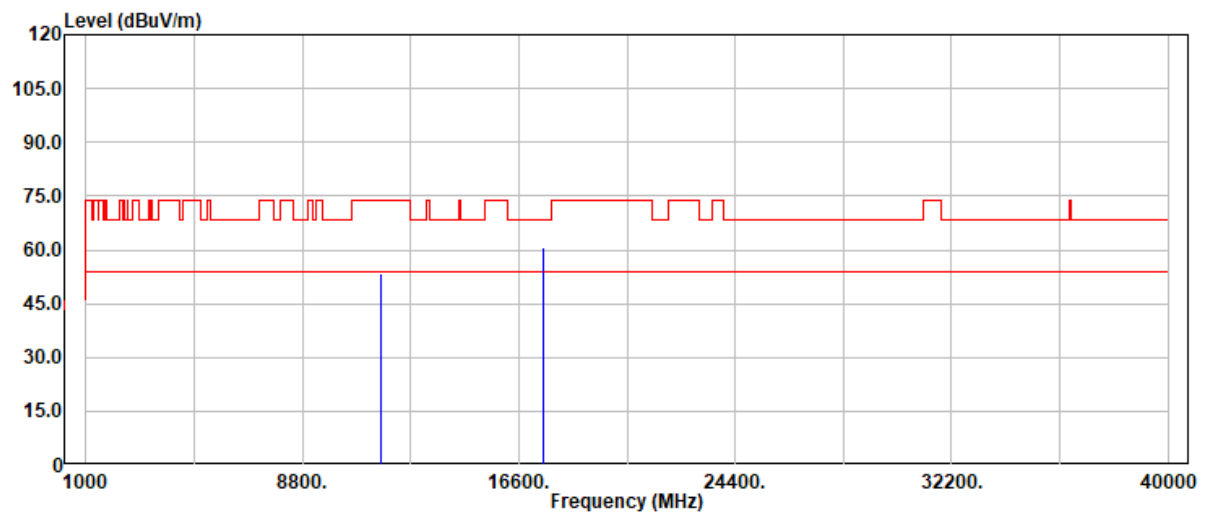


Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	40.36	13.03	53.39	74.00	-20.61	Peak
11650.00	33.99	13.03	47.02	54.00	-6.98	Average
17475.00	35.39	25.32	60.71	68.20	-7.49	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 184 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n20_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5825 MHz	Antenna Pol.	: HORIZONTAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 80		

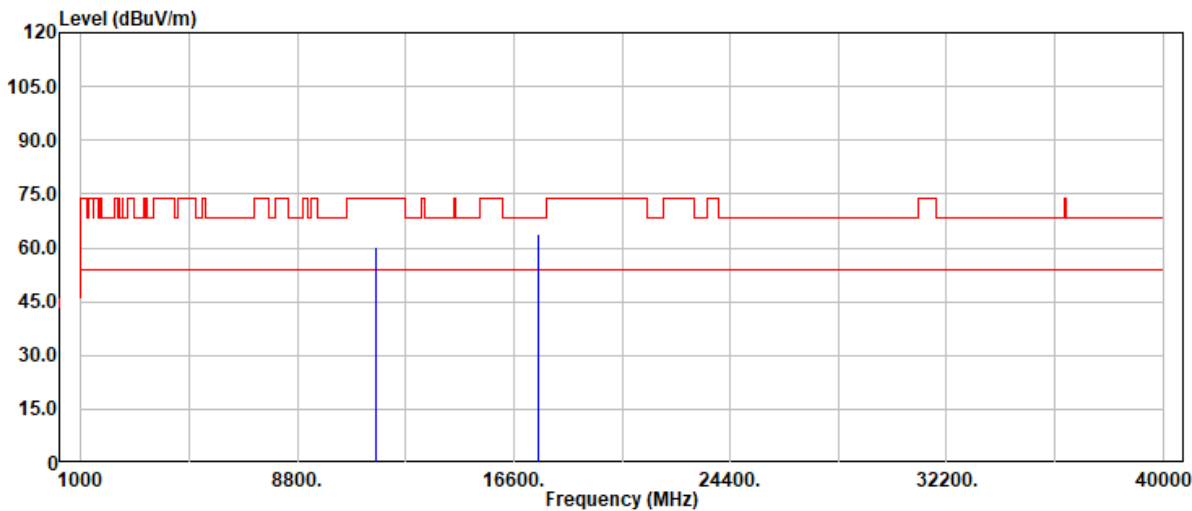


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11650.00	47.07	13.03	60.10	74.00	-13.90	Peak
11650.00	38.74	13.03	51.77	54.00	-2.23	Average
17475.00	38.73	25.32	64.05	68.20	-4.15	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 185 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11n40_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5755 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 70		

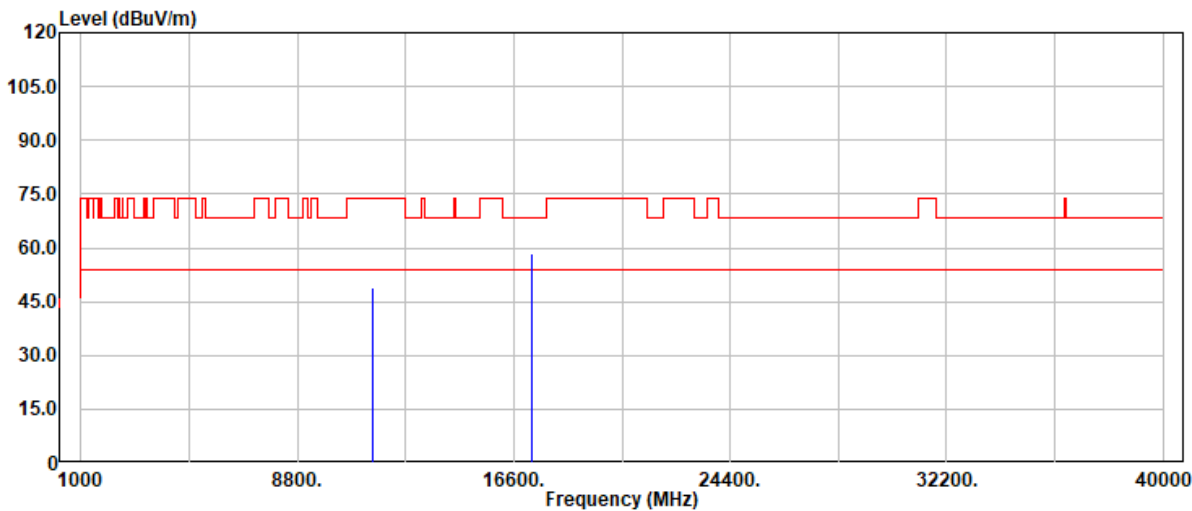

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	35.81	13.06	48.87	74.00	-25.13	Peak
11510.00	27.76	13.06	40.82	54.00	-13.18	Average
17265.00	32.72	25.83	58.55	68.20	-9.65	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 186 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5755 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

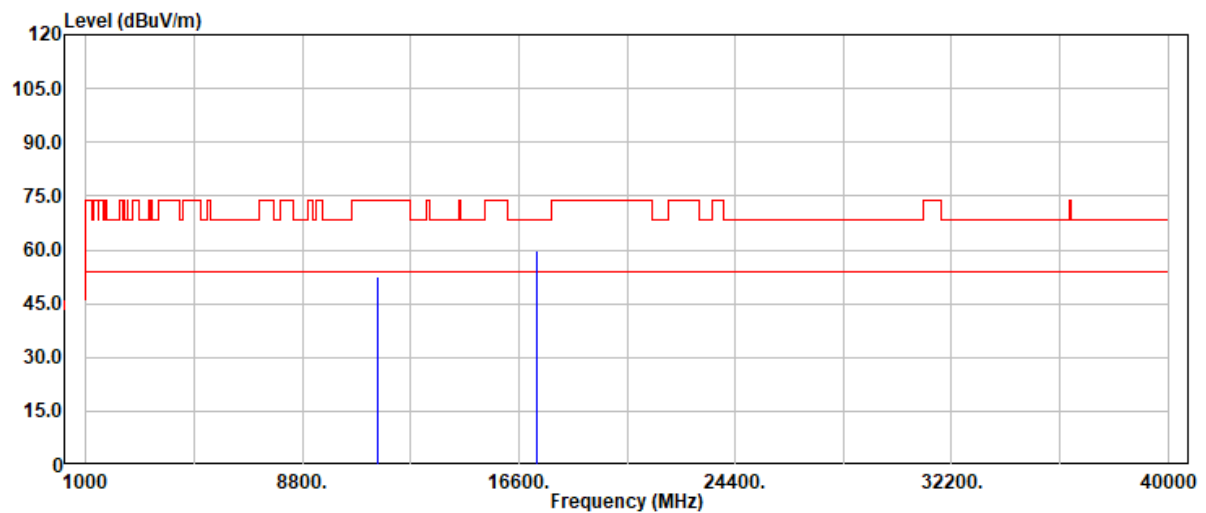

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11510.00	39.38	13.06	52.44	74.00	-21.56	Peak
11510.00	32.31	13.06	45.37	54.00	-8.63	Average
17265.00	33.95	25.83	59.78	68.20	-8.42	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 187 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : VERTICAL
Engineer : Tony.Chao
Test Chamber : 966A

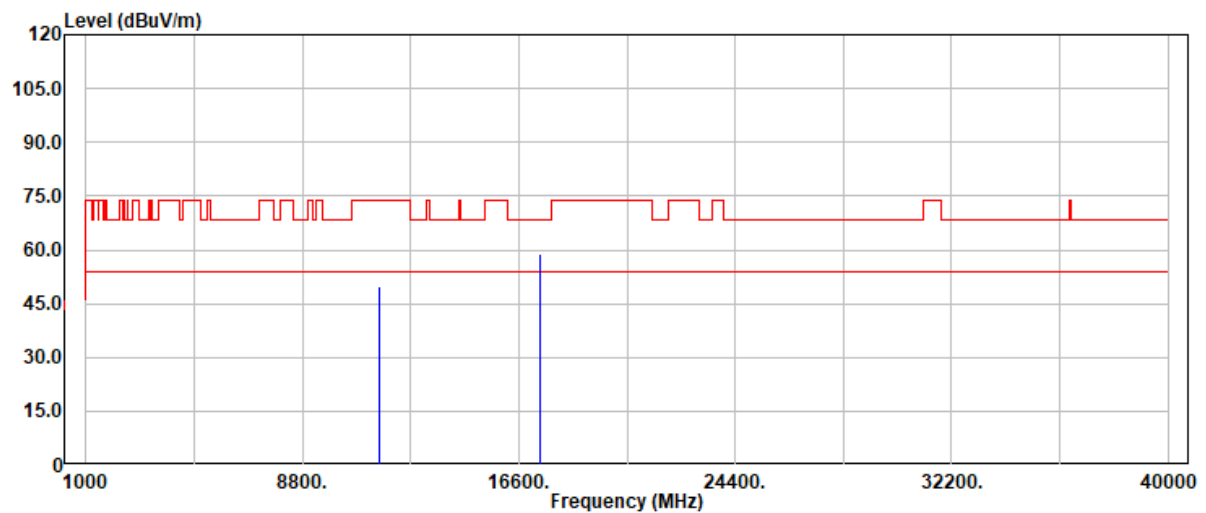

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	36.68	13.29	49.97	74.00	-24.03	Peak
11590.00	28.18	13.29	41.47	54.00	-12.53	Average
17385.00	33.27	25.61	58.88	68.20	-9.32	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 188 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11n40_Band4
Frequency : 5795 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 70

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

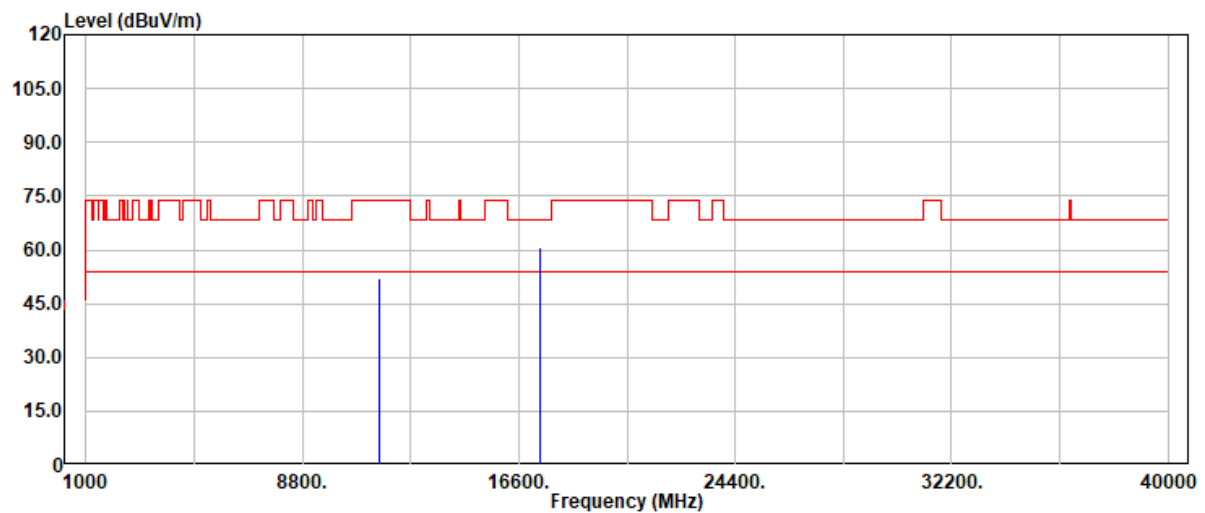


Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11590.00	38.88	13.29	52.17	74.00	-21.83	Peak
11590.00	32.16	13.29	45.45	54.00	-8.55	Average
17385.00	34.99	25.61	60.60	68.20	-7.60	Peak



Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 189 / 190
Rev.: 01

Project No	: TM-2412000436P	Test Date	: 2025-01-17
Operation Band	: 802.11ac80_Band4	Temp./Humi.	: 24.3/58
Frequency	: 5775 MHz	Antenna Pol.	: VERTICAL
Operation Mode	: TX	Engineer	: Tony.Chao
EUT Pol	: E1	Test Chamber	: 966A
Setting	: 74		

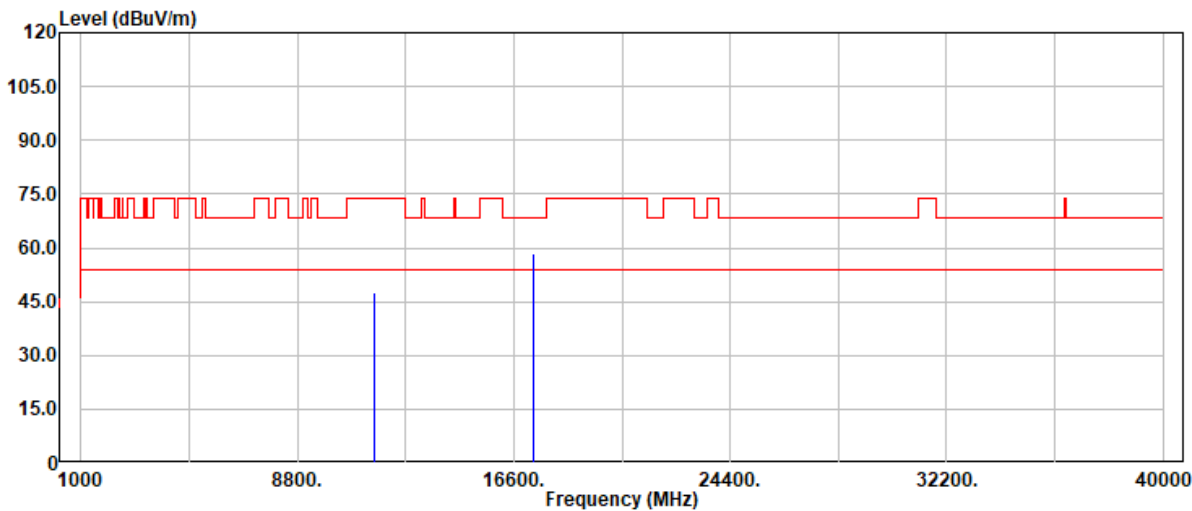

Freq	Read Level	Factor	Actual FS	Limit @3m	Margin	Detector Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	34.50	13.21	47.71	74.00	-26.29	Peak
11550.00	28.21	13.21	41.42	54.00	-12.58	Average
17325.00	32.37	25.90	58.27	68.20	-9.93	Peak




Project No: TM-2412000436P
Report No.: TMWK2412004781KR

Page: 190 / 190
Rev.: 01

Project No : TM-2412000436P
Operation Band : 802.11ac80_Band4
Frequency : 5775 MHz
Operation Mode : TX
EUT Pol : E1
Setting : 74

Test Date : 2025-01-17
Temp./Humi. : 24.3/58
Antenna Pol. : HORIZONTAL
Engineer : Tony.Chao
Test Chamber : 966A

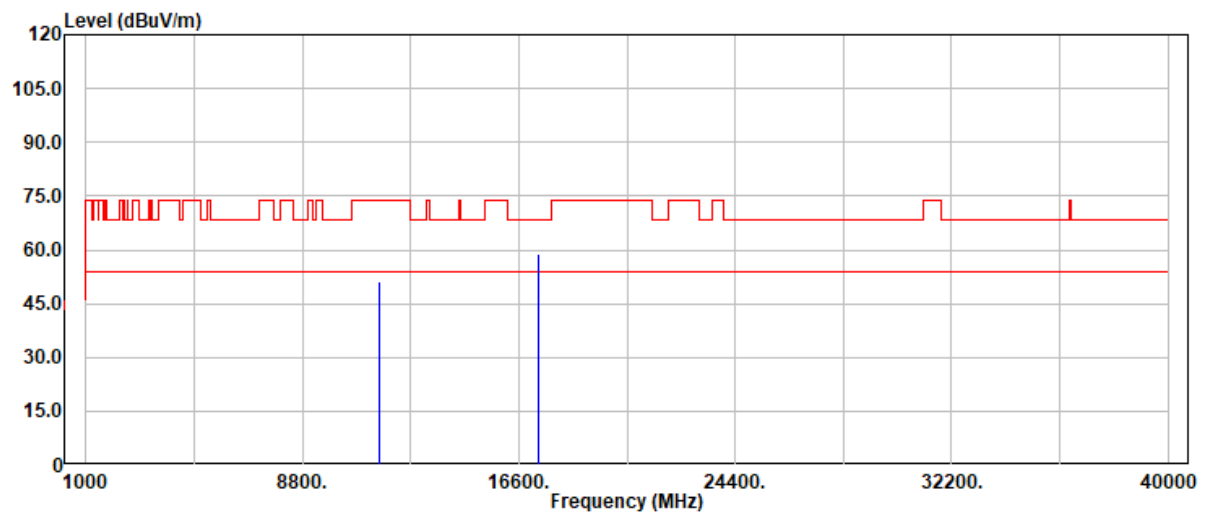

Freq	Read		Actual	Limit		Detector
-----	Level	Factor	FS	@3m	Margin	Mode
-----	-----	-----	-----	-----	-----	-----
MHz	dBuV	dB	dBuV/m	dBuV/m	dB	PK/QP/AV
11550.00	37.81	13.21	51.02	74.00	-22.98	Peak
11550.00	31.71	13.21	44.92	54.00	-9.08	Average
17325.00	33.09	25.90	58.99	68.20	-9.21	Peak

--End of Test Report--