



**FCC 47 CFR PART 15 SUBPART C  
ISED RSS-247 ISSUE 3**

**TEST REPORT**

*For*

**LED Device**

**MODEL NUMBER: 929003858301, 929003858401, 929003858501**

**ALTERNATIVE MODEL NUMBER: 9290038583, 9290038584, 9290038585**

**PROJECT NUMBER: 4791649191**

**REPORT NUMBER: 4791649191-1**

**FCC ID: 2AGBW9290038583X**

**IC: 20812-38583X**

**ISSUE DATE: Apr. 06, 2025**

*Prepared for*

**Signify (China) Investment Co., Ltd.**

*Prepared by*

**UL-CCIC COMPANY LIMITED**

**No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China**

**Tel: +86 512-6808 6400**

**Fax: +86 512-6808 4099**

**Website: [www.ul.com](http://www.ul.com)**

Revision History

Rev.	Issue Date	Revisions	Revised By
V0	04/06/2025	Initial Issue	

## TABLE OF CONTENTS

<b>1. ATTESTATION OF TEST RESULTS.....</b>	<b>4</b>
<b>2. TEST METHODOLOGY .....</b>	<b>6</b>
<b>3. FACILITIES AND ACCREDITATION.....</b>	<b>6</b>
<b>4. CALIBRATION AND UNCERTAINTY .....</b>	<b>7</b>
4.1. <i>MEASURING INSTRUMENT CALIBRATION .....</i>	7
4.2. <i>MEASUREMENT UNCERTAINTY .....</i>	7
<b>5. EQUIPMENT UNDER TEST .....</b>	<b>8</b>
5.1. <i>DESCRIPTION OF EUT.....</i>	8
5.2. <i>MAXIMUM OUTPUT POWER.....</i>	9
5.3. <i>CHANNEL LIST.....</i>	9
5.4. <i>TEST CHANNEL CONFIGURATION.....</i>	9
5.5. <i>THE WORSE CASE POWER SETTING PARAMETER.....</i>	10
5.6. <i>DESCRIPTION OF AVAILABLE ANTENNAS .....</i>	10
5.7. <i>TEST ENVIRONMENT.....</i>	11
5.8. <i>DESCRIPTION OF TEST SETUP .....</i>	12
5.9. <i>MEASURING INSTRUMENT AND SOFTWARE USED .....</i>	13
<b>6. MEASUREMENT METHODS.....</b>	<b>14</b>
<b>7. ANTENNA PORT TEST RESULTS .....</b>	<b>15</b>
7.1. <i>ON TIME AND DUTY CYCLE .....</i>	15
7.2. <i>6 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....</i>	17
7.3. <i>CONDUCTED OUTPUT POWER .....</i>	31
7.4. <i>POWER SPECTRAL DENSITY .....</i>	33
7.5. <i>CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS .....</i>	38
<b>8. RADIATED TEST RESULTS .....</b>	<b>53</b>
8.1. <i>LIMITS AND PROCEDURE .....</i>	53
8.2. <i>TEST ENVIRONMENT.....</i>	60
8.3. <i>RESTRICTED BANDEDGE .....</i>	60
8.4. <i>SPURIOUS EMISSIONS.....</i>	69
<b>9. AC POWER LINE CONDUCTED EMISSIONS .....</b>	<b>101</b>
<b>10. ANTENNA REQUIREMENTS .....</b>	<b>104</b>

## 1. ATTESTATION OF TEST RESULTS

### Applicant Information

Company Name: Signify (China) Investment Co., Ltd.  
Address: Building 9, Lane 888, Tianlin Road, Minhang District, Shanghai 200233 China

### Manufacturer Information-1

Company Name: Dongguan ZOYO Electronics Technology Co., Ltd.  
Address: 1st Building, NO.11, Nange west Road, Nanya Village, Daojiao Town, Dongguan, Guangdong

### Manufacturer Information-2

Company Name: Silver Age Vietnam Technology Company Limited  
Address: Lot A2, Gia Le industrial zone, Xuan Quang Dong commune, Dong Hung district, Thai Binh province, VN

### EUT Description

Product Name: LED Device  
Model Number: 929003858301, 929003858401, 929003858501  
Alternative Model Number: 9290038583, 9290038584, 9290038585  
Model Difference:  
1. 9290038583, 9290038584, 9290038585 are alternative models of the main models 929003858301, 929003858401, 929003858501. The alternative models and the main models are identical, the only difference is model number.  
2. Their electrical circuit design, layout, components used and internal wiring are identical, only the size of LED device is different.  
Sample Number: 8056478  
Data of Receipt Sample: Jan. 22, 2025  
Test Date: Jan. 22, 2025~ Feb. 30, 2024

### APPLICABLE STANDARDS

STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	PASS
ISED RSS-247 Issue 3	PASS
ISED RSS-GEN Issue 5	PASS

Summary of Test Results			
Clause	Test Items	FCC and ISED Rules	Test Results
1	6 dB Bandwidth and 99% Occupied Bandwidth	FCC 15.247 (a) (2) RSS-247 Clause 5.2 (a) RSS-Gen Clause 6.7	PASS
2	Conducted Power	FCC 15.247 (b) (3) RSS-247 Clause 5.4 (d) RSS-Gen Clause 6.12	PASS
3	Power Spectral Density	FCC 15.247 (e) RSS-247 Clause 5.2 (b)	PASS
4	Conducted Band edge And Spurious emission	FCC 15.247 (d) RSS-247 Clause 5.5 RSS-GEN Clause 6.13	PASS
5	Radiated Band edges and Spurious emission	FCC 15.247 (d) FCC 15.209 FCC 15.205 RSS-247 Clause 5.5 RSS-GEN Clause 8.9 RSS-GEN Clause 6.13	PASS
6	Conducted Emission Test for AC Power Port	FCC 15.207 RSS-GEN Clause 8.8	PASS
7	Antenna Requirement	FCC 15.203 RSS-GEN Clause 6.8	PASS

**Note:**  
The measurement result for the sample received is < Pass > according to < ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15C, ISED RSS-GEN, ISED RSS-247 > when < Simple Acceptance > decision rule is applied.

Prepared By:

*Tom Tang*

Tom Tang

Reviewed By:

*Emily Wang*

Emily Wang

Authorized By:

*Kevin Shen*

Kevin Shen

## 2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with KDB 558074 D01 15.247 Meas Guidance v05r02, 414788 D01 Radiated Test Site v01r01, CFR 47 FCC Part 2, CFR 47 FCC Part 15, ANSI C63.10-2013, ISED RSS-247 Issue 3 and ISED RSS-GEN Issue 5.

## 3. FACILITIES AND ACCREDITATION

Accreditation Certificate	<p><b>A2LA (Certificate No.: 4829.01)</b> <b>UL-CCIC COMPANY LIMITED has been assessed and proved to be in compliance with A2LA.</b></p> <p><b>FCC (FCC Designation No.: CN1247)</b> <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b></p> <p><b>IC (IC Designation No.: 25056; CAB No.: CN0073)</b> <b>UL-CCIC COMPANY LIMITED has been recognized to perform compliance testing on equipment subject to the Commission's Declaration of Conformity (DoC) and Certification rules.</b></p>
---------------------------	--

Note 1: All tests measurement facilities use to collect the measurement data are located at No. 2, Chengwan Road, Suzhou Industrial Park, Suzhou 215122, China

Note 2: For below 30MHz, lab had performed measurements at test anechoic chamber and comparing to measurements obtained on an open field site. These measurements below 30MHz had been correlated to measurements performed on an OFS.

Note 3: The test anechoic chamber in UL-CCIC COMPANY LIMITED had been calibrated and compared to the open field sites and the test anechoic chamber is shown to be equivalent to or worst case from the open field site.

## 4. CALIBRATION AND UNCERTAINTY

### 4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations and is traceable to recognized national standards.

### 4.2. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Test Item	Uncertainty
Conduction emission	3.1 dB
DTS Bandwidth	1.9 %
Maximum Conducted Output Power	1.3 dB
Maximum Power Spectral Density Level	1.5 dB
Band-edge Compliance	1.9%
Unwanted Emissions in Non-restricted Freq Bands	9kHz-30MHz: $\pm 0.90$ dB 30MHz-1GHz: $\pm 1.5$ dB 1GHz-12.75GHz: $\pm 1.9$ dB 12.75GHz-26.5GHz: $\pm 2.1$ dB
Radiation Emission test (include Fundamental emission) (9kHz-30MHz)	3.4dB
Radiation Emission test (include Fundamental emission) (30MHz-1GHz)	3.4dB
Radiation Emission test (1GHz to 26GHz) (include Fundamental emission)	3.5dB (1GHz-18GHz) 3.9dB (18GHz-26.5GHz)
Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	

## 5. EQUIPMENT UNDER TEST

### 5.1. DESCRIPTION OF EUT

Equipment:	LED Device	
Model Name:	929003858301	
Technology:	Bluetooth - Low Energy	
Transmit Frequency Range:	2402 MHz ~ 2480 MHz	
Modulation:	GFSK	
Data Rate:	LE 1M	1 Mb/s
	LE 1M	2 Mb/s
	LE Coded (S=2)	125 kb/s
	LE Coded (S=8)	500 kb/s
Test software of EUT:	HueApprobationTool (manufacturer declare)	
Antenna Type:	PCB PIFA Antenna	
Antenna Gain:	-6.08 dBi	
	<p><b>Note:</b>  This data is provided by customer and our lab isn't responsible for this data.</p>	

## 5.2. MAXIMUM OUTPUT POWER

Bluetooth Mode	Frequency (MHz)	Channel Number	Max. PK Output Power(dBm)
BLE 1M	2402-2480	0-39[40]	7.19
BLE 2M	2402-2480	0-39[40]	7.18
LE Coded (S=2)	2402-2480	0-39[40]	6.62
LE Coded (S=8)	2402-2480	0-39[40]	6.92

## 5.3. CHANNEL LIST

Channel	Frequency (MHz)						
0	2402	11	2424	22	2446	33	2468
1	2404	12	2426	23	2448	34	2470
2	2406	13	2428	24	2450	35	2472
3	2408	14	2430	25	2452	36	2474
4	2410	15	2432	26	2454	37	2476
5	2412	16	2434	27	2456	38	2478
6	2414	17	2436	28	2458	39	2480
7	2416	18	2438	29	2460	/	/
8	2418	19	2440	30	2462	/	/
9	2420	20	2442	31	2464	/	/
10	2422	21	2444	32	2468	/	/

## 5.4. TEST CHANNEL CONFIGURATION

Test Mode	Test Channel		Frequency
BLE 1M	Low Channel	CH 0	2402MHz
	Middle Channel	CH 19	2440MHz
	High Channel	CH 39	2480MHz
BLE 2M	Low Channel	CH 0	2402MHz
	Middle Channel	CH 19	2440MHz
	High Channel	CH 39	2480MHz
LE Coded (S=2)	Low Channel	CH 0	2402MHz
	Middle Channel	CH 19	2440MHz
	High Channel	CH 39	2480MHz
LE Coded (S=8)	Low Channel	CH 0	2402MHz
	Middle Channel	CH 19	2440MHz
	High Channel	CH 39	2480MHz

## 5.5. THE WORSE CASE POWER SETTING PARAMETER

The Worse Case Power Setting Parameter under 2400 ~ 2483.5MHz Band				
Test Software		HueApprobationTool		
Modulation Type	Transmit Antenna Number	Test Channel		
		LCH	MCH	HCH
BLE 1M	1	8	8	8
BLE 2M	1	8	8	8
LE Coded (S=2)	1	8	8	8
LE Coded (S=8)	1	8	8	8

## 5.6. DESCRIPTION OF AVAILABLE ANTENNAS

Ant.	Frequency (MHz)	Antenna Type	Antenna Gain (dBi)
1	2400-2483.5	PCB PIFA Antenna	-6.08

Note: This data is provided by customer and our lab isn't responsible for this data.

Test Mode	Transmit and Receive Mode	Description
BLE 1M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
BLE 2M	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
LE Coded (S=2)	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.
LE Coded (S=8)	<input checked="" type="checkbox"/> 1TX, 1RX	Antenna1 can be used as transmitting/receiving antenna independently.

## 5.7. THE WORSE CASE CONFIGURATIONS

Model	Alternative Models	Size of LED Device
929003858301	9290038583	7-meter light string
929003858401	9290038584	14-meter light string
929003858501	9290038585	28-meter light string

The six models have the same RF module, only the size of LED device is different, all the models had been test, only the worst case was recorded in this report.

For BLE module, the product supports 1 Mbps and 2 Mbps and LE Coded, both 1 Mbps and 2 Mbps and LE Coded were tested, 1 Mbps is the worse case between 1 Mbps and LE Coded, so the test result of 1 Mbps and 2 Mbps was recorded in this report.

## 5.8. TEST ENVIRONMENT

Environment Parameter	Selected Values During Tests	
Relative Humidity	55 ~ 65%	
Atmospheric Pressure:	101kPa	
Temperature	TN	23 ~ 28°C
Voltage:	VL	N/A
	VN	AC 120V
	VH	N/A

Note: VL= Lower Extreme Test Voltage

VN= Nominal Voltage

VH= Upper Extreme Test Voltage

TN= Normal Temperature

## 5.9. DESCRIPTION OF TEST SETUP

### SUPPORT EQUIPMENT

Item	Equipment	Brand Name	Model Name	Description
1	Laptop	ThinkPad	E580	/
2	Fixed Frequency Board	/	/	Supplied by customer

### I/O PORT

Cable No	Port	Connector Type	Cable Type	Cable Length(m)	Remarks
1	USB	USB	USB	100cm Length	/

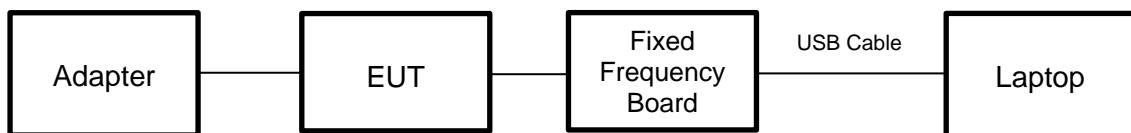
### ACCESSORY

Item	Accessory	Brand Name	Model Name	Description
1	/	/	/	/

### TEST SETUP

The EUT can work in an engineer mode with a software through a laptop.

### SETUP DIAGRAM FOR TESTS



## 5.10. MEASURING INSTRUMENT AND SOFTWARE USED

Conducted Emissions Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI Test Receiver	R&S	ESR3	126700	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Two-Line V-Network	R&S	ENV216	126701	2023-11-25	2024-11-02	2025-11-01
Conducted Emissions Test (Software)							
Used	Description		Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Software for Conducted Emissions Test		R&S	EMC32		9.25.00	
Radiated Emissions Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR7	222993	2024-03-23	2025-03-22	2026-03-14
<input checked="" type="checkbox"/>	EMI test receiver	R&S	ESR26	126703	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV3044	222992	2024-03-23	2025-03-22	2026-03-14
<input checked="" type="checkbox"/>	Receiver Antenna (9kHz-30MHz)	Schwarzbeck	FMZB 1513	155456	2021-06-03	2024-05-27	2027-05-26
<input checked="" type="checkbox"/>	Receiver Antenna (30MHz-1GHz)	Schwarzbeck	VULB 9168	171952	2021-07-05	2024-07-04	2027-07-03
<input checked="" type="checkbox"/>	Receiver Antenna (1GHz-18GHz)	R&S	HF907	126705	2022-02-28	2025-02-17	2028-02-16
<input checked="" type="checkbox"/>	Receiver Antenna (18GHz-26.5GHz)	Schwarzbeck	BBHA9170	126706	2022-02-28	2025-02-17	2028-02-16
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	Tonscned	TAP01018050	224539	2023-10-10	2024-10-10	2025-10-09
<input checked="" type="checkbox"/>	Pre-amplification (To 18GHz)	R&S	SCU-18D	134667	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Pre-amplification (To 26.5GHz)	R&S	SCU-26D	135391	2023-11-25	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	Band Reject Filter	Wainwright	WRCGV12-2375-2400-2485-2510-40SS	1	2023-12-18	2024-11-02	2025-11-01
<input checked="" type="checkbox"/>	High Pass Filter	COM-MW	ZBF13-3-18G-01	2	2023-12-18	2024-11-02	2025-11-01
Radiated Emissions Test (Software)							
Used	Description		Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Software for Radiated Emissions Test		Tonscend	JS32-RE		5.0.0.2	
Antenna Port Test (Instrument)							
Used	Equipment	Manufacturer	Model No.	Serial No.	Upper Last Cal.	Last Cal.	Next Cal.
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9010B	155368	2024-03-23	2025-03-22	2026-03-14
<input checked="" type="checkbox"/>	Power Meter	MWT	MW100-RFCB	221694	2024-03-23	2025-03-22	2026-03-14
<input checked="" type="checkbox"/>	Power Meter	Anritsu	MA24406A	12896	2024-03-23	2025-03-22	2026-03-14
<input checked="" type="checkbox"/>	Attenuator	PASTERNACK	PE7087-6	1624	/	2024-11-04	2025-11-03
Antenna Port Test (Software)							
Used	Description		Manufacturer	Name		Version	
<input checked="" type="checkbox"/>	Software for Antenna Port Test		Tonscend	JS1120-3 Test System		V3.2.22	

## 6. MEASUREMENT METHODS

No.	Test Item	KDB Name	Section
1	6 dB Bandwidth and 99% Occupied Bandwidth	KDB 558074 D01 15.247 Meas Guidance v05r02	8.2
2	Output Power	KDB 558074 D01 15.247 Meas Guidance v05r02	8.3.1.3 (11.9.1.3 PKPM1 Peak power meter method of ANSI C63.10)
3	Power Spectral Density	KDB 558074 D01 15.247 Meas Guidance v05r02	8.4 (11.10.2 Method PKPSD of ANSI C63.10)
4	Out-of-band emissions in non-restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.5
5	Out-of-band emissions in restricted bands	KDB 558074 D01 15.247 Meas Guidance v05r02	8.6
6	Band-edge	KDB 558074 D01 15.247 Meas Guidance v05r02	8.7
7	Conducted Emission Test for AC Power Port	ANSI C63.10-2013	6.2

## 7. ANTENNA PORT TEST RESULTS

### 7.1. ON TIME AND DUTY CYCLE

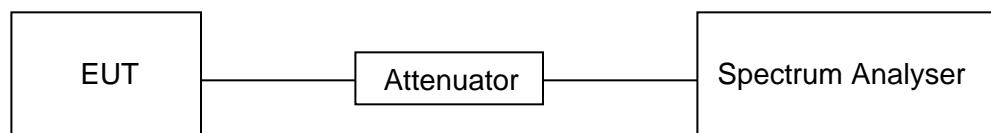
#### LIMITS

None; for reporting purposes only

#### PROCEDURE

FCC KDB 558074 Zero-Span Spectrum Analyzer Method

#### TEST SETUP



#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

#### TEST RESULTS TABLE

Mode	On Time (msec)	Period (msec)	Duty Cycle x (Linear)	Duty Cycle (%)	Duty Cycle Correction Factor (db)	1/T Minimum VBW (kHz)	Final VBW (kHz)
BLE 1M	100	100	1	100%	0	0.01	0.01
BLE 2M	100	100	1	100%	0	0.01	0.01

Note: 1) Duty Cycle Correction Factor= $10\log(1/x)$ .

2) Where: x is Duty Cycle (Linear)

3) Where: T is On Time (transmit duration)

## TEST GRAPHS

### BLE 1M ON TIME AND DUTY CYCLE MID CH (WORSE CASE)



### BLE 2M ON TIME AND DUTY CYCLE MID CH (WORSE CASE)



## 7.2. 6 dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
CFR 47 FCC 15.247(a)(2) ISED RSS-247 5.2 (a)	6dB Bandwidth	>= 500kHz	2400-2483.5
ISED RSS-Gen Clause 6.7	99 % Occupied Bandwidth	For reporting purposes only	2400-2483.5

### TEST PROCEDURE

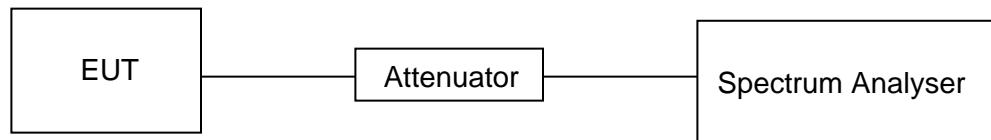
Refer to ANSI C63.10-2013 clause 11.8 for DTS bandwidth and clause 6.9 for Occupied Bandwidth.

Connect the EUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Frequency Span	For 6 dB Bandwidth: enough to capture all products of the modulation carrier emission For 99 % Occupied Bandwidth: Between 1.5 times and 5 times the OBW
Detector	Peak
RBW	For 6 dB Bandwidth: 100 kHz For 99 % Occupied Bandwidth: 1 % to 5 % of the occupied bandwidth
VBW	For 6 dB Bandwidth: $\geq 3 \times$ RBW For 99 % Occupied Bandwidth: $\geq 3 \times$ RBW
Trace	Max hold
Sweep	Auto couple

- Use the 99 % power bandwidth function of the instrument, allow the trace to stabilize and report the measured bandwidth.
- Allow the trace to stabilize and measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### TEST SETUP



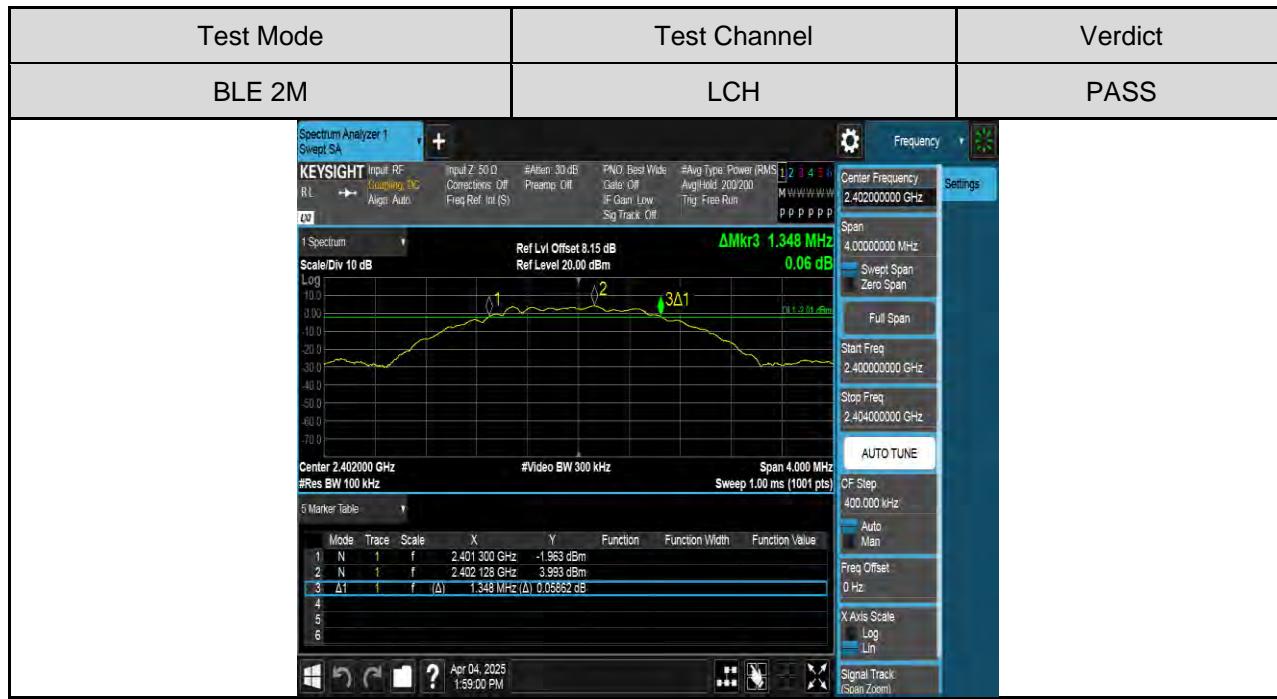
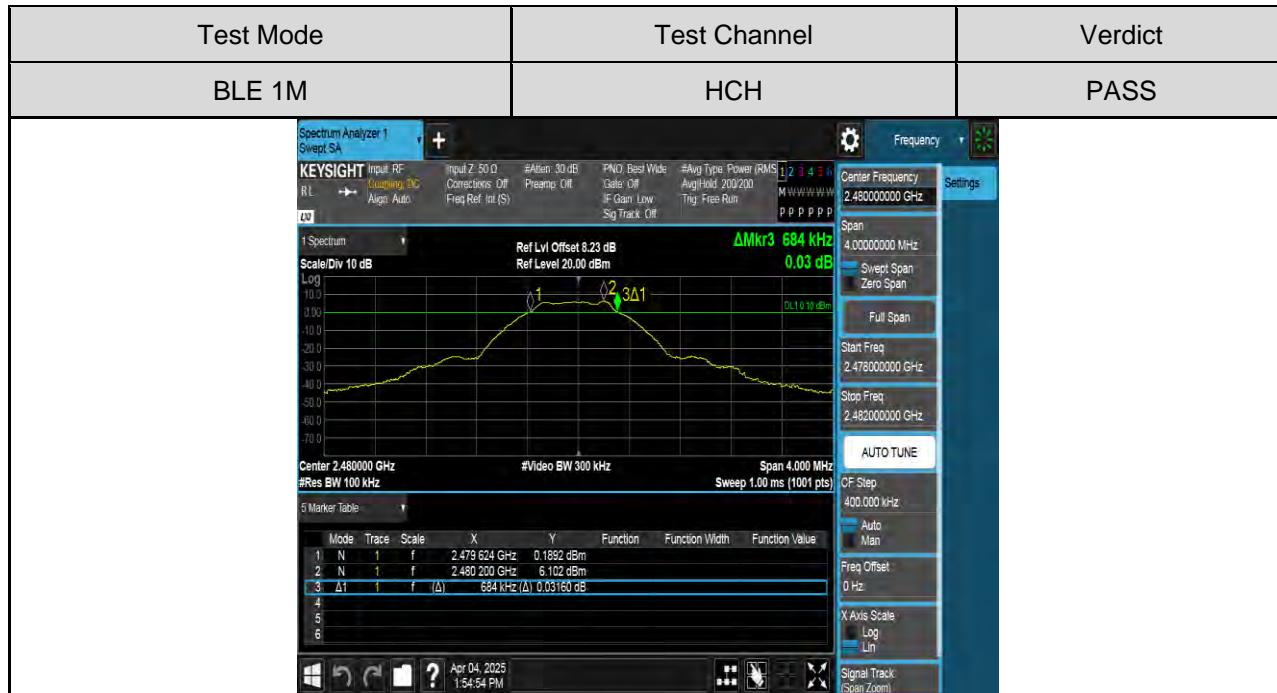
### TEST ENVIRONMENT

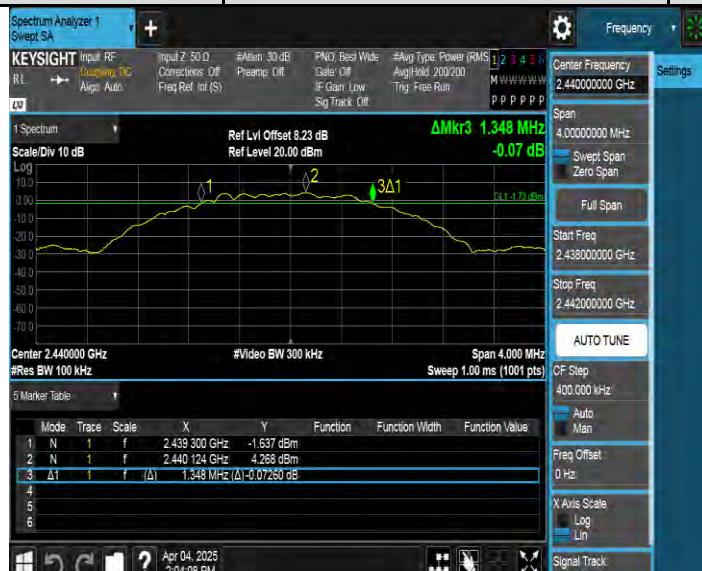
Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

### TEST RESULTS TABLE

Test Mode	Test Channel	6dB bandwidth (MHz)	99% bandwidth (MHz)	Result
BLE 1M	LCH	0.688	1.0324	Pass
	MCH	0.688	1.0326	Pass
	HCH	0.684	1.0326	Pass
BLE 2M	LCH	1.348	2.1141	Pass
	MCH	1.348	2.1182	Pass
	HCH	1.344	2.1233	Pass
LE Coded (S=2)	LCH	0.672	1.0615	Pass
	MCH	0.664	1.0616	Pass
	HCH	0.664	1.0609	Pass
LE Coded (S=8)	LCH	0.680	1.0291	Pass
	MCH	0.704	1.0307	Pass
	HCH	0.680	1.0298	Pass

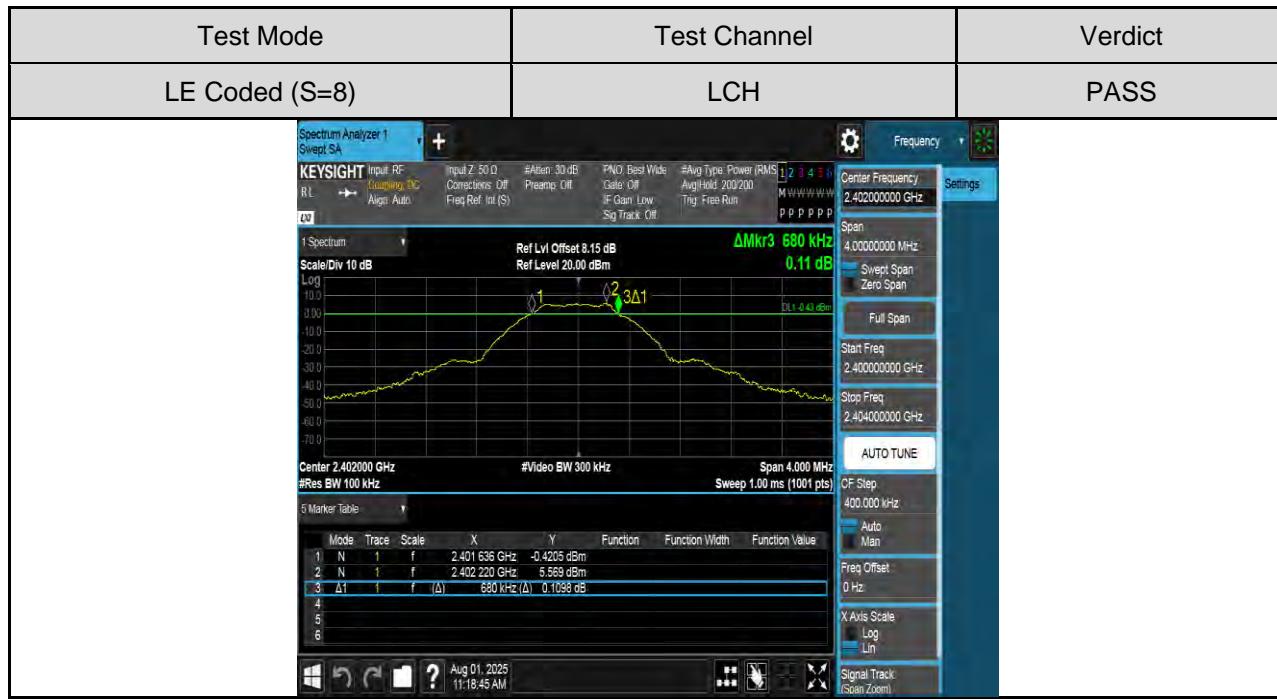
**TEST GRAPHS**
**6dB Bandwidth**

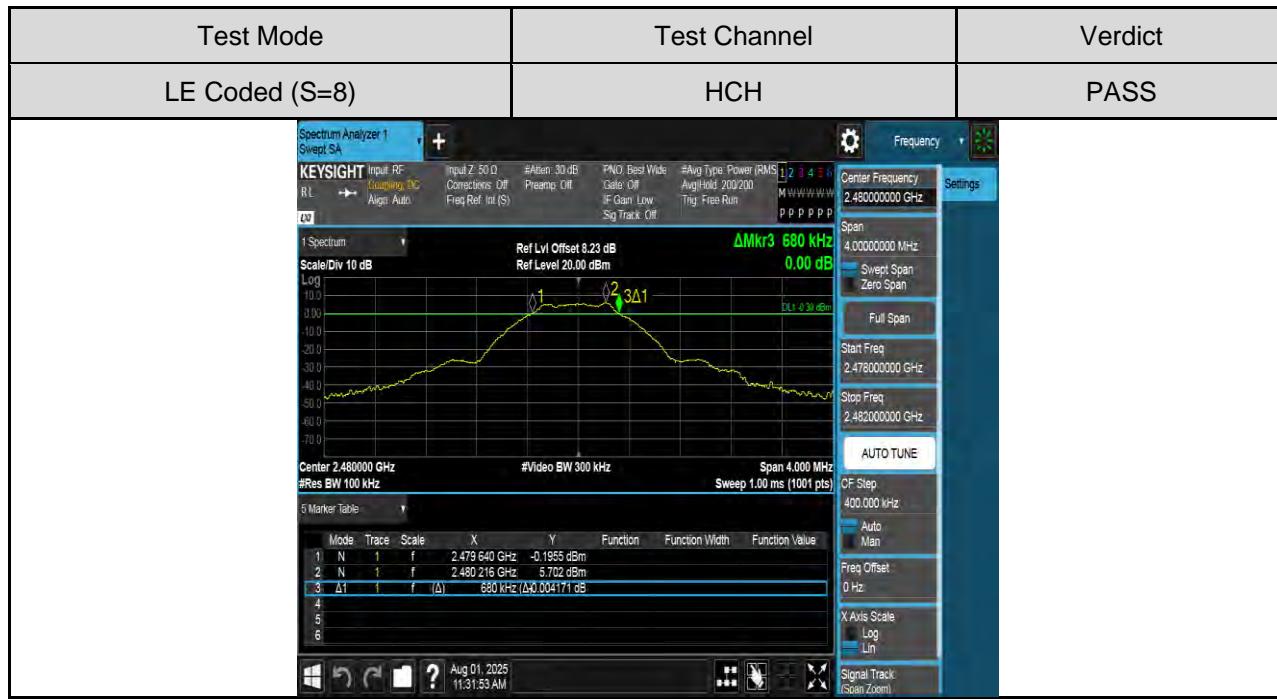



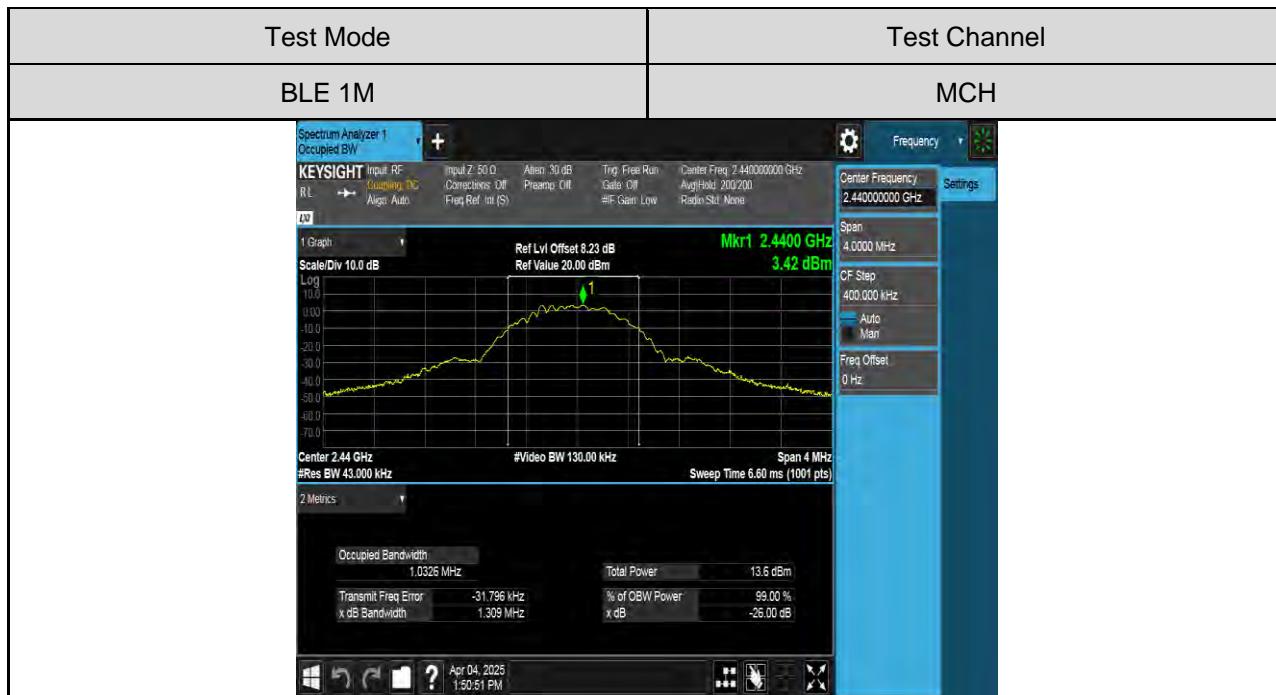
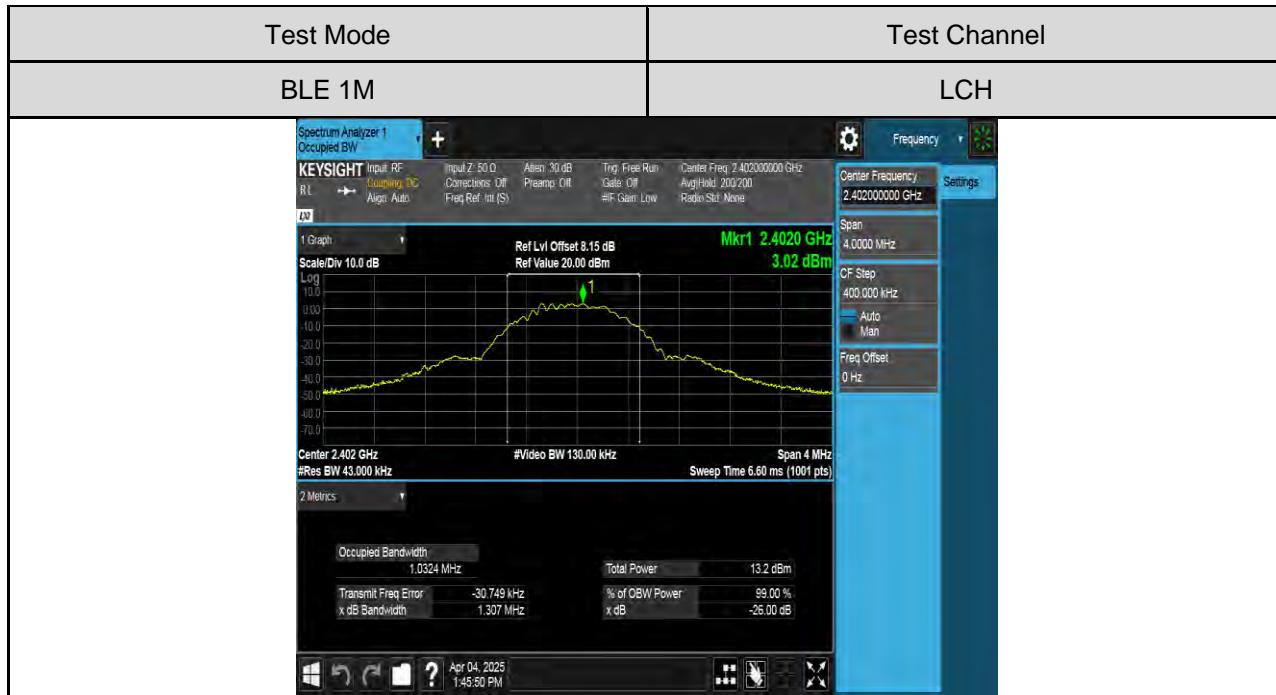
Test Mode	Test Channel	Verdict
BLE 2M	MCH	PASS
		

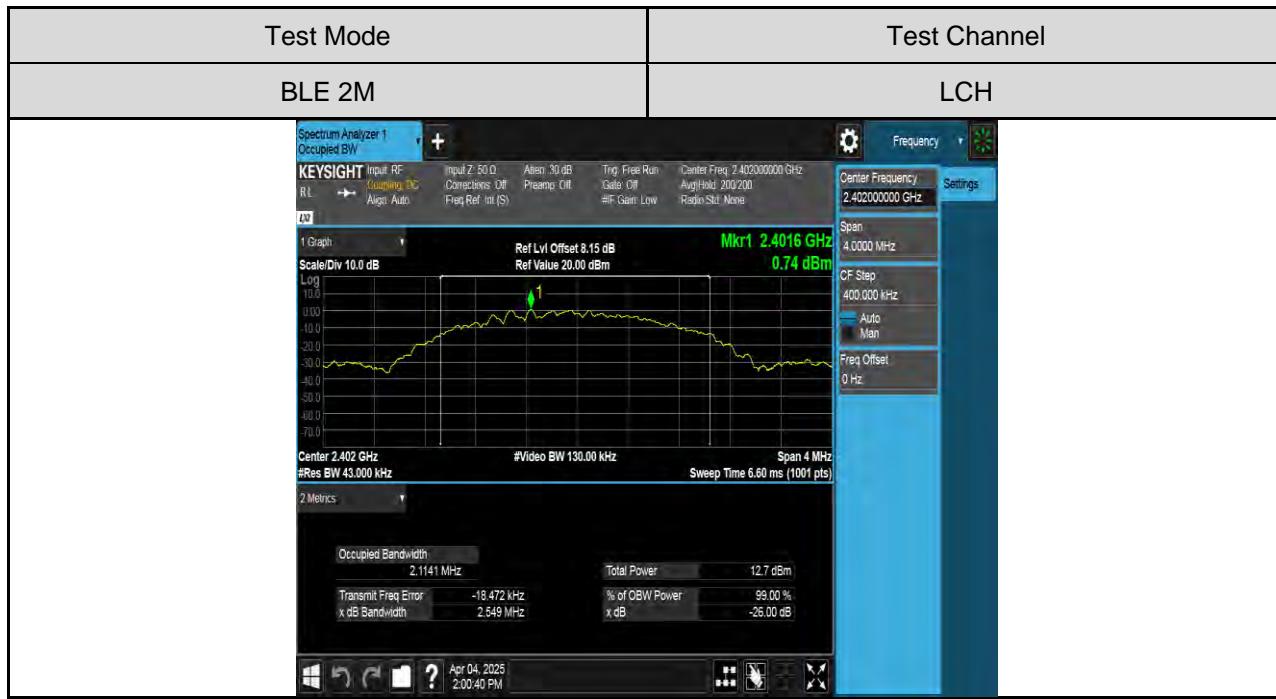
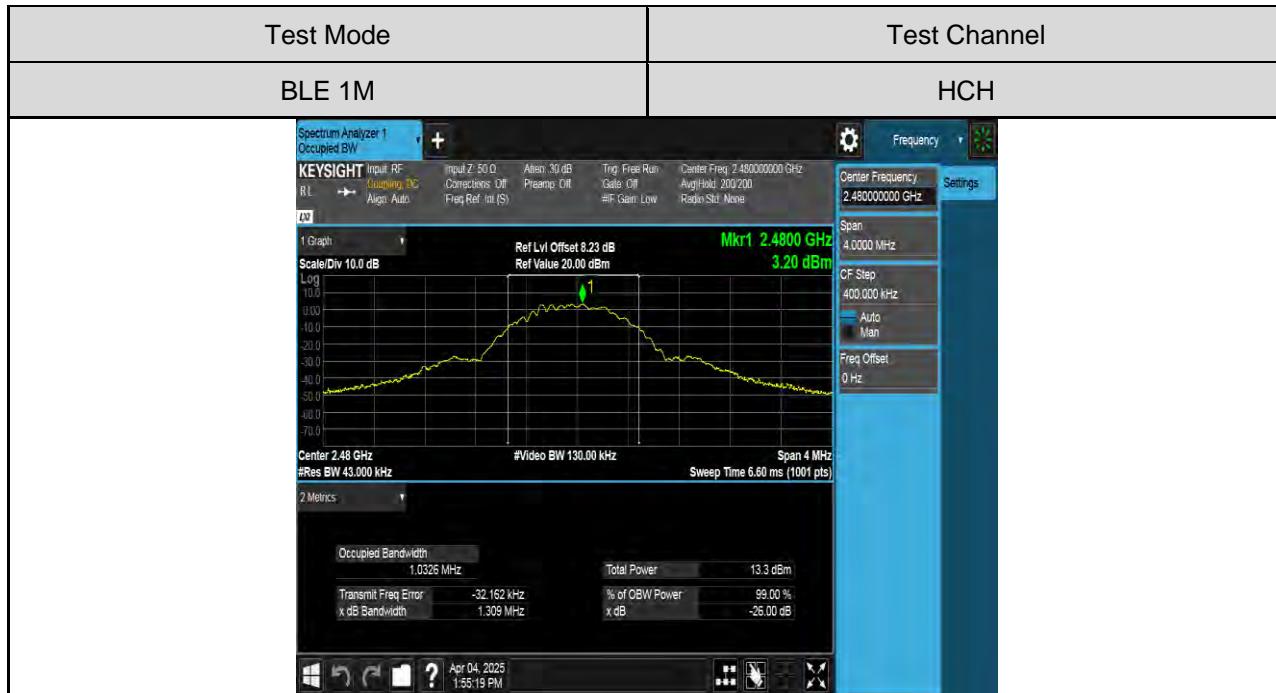
Test Mode	Test Channel	Verdict
BLE 2M	HCH	PASS
		

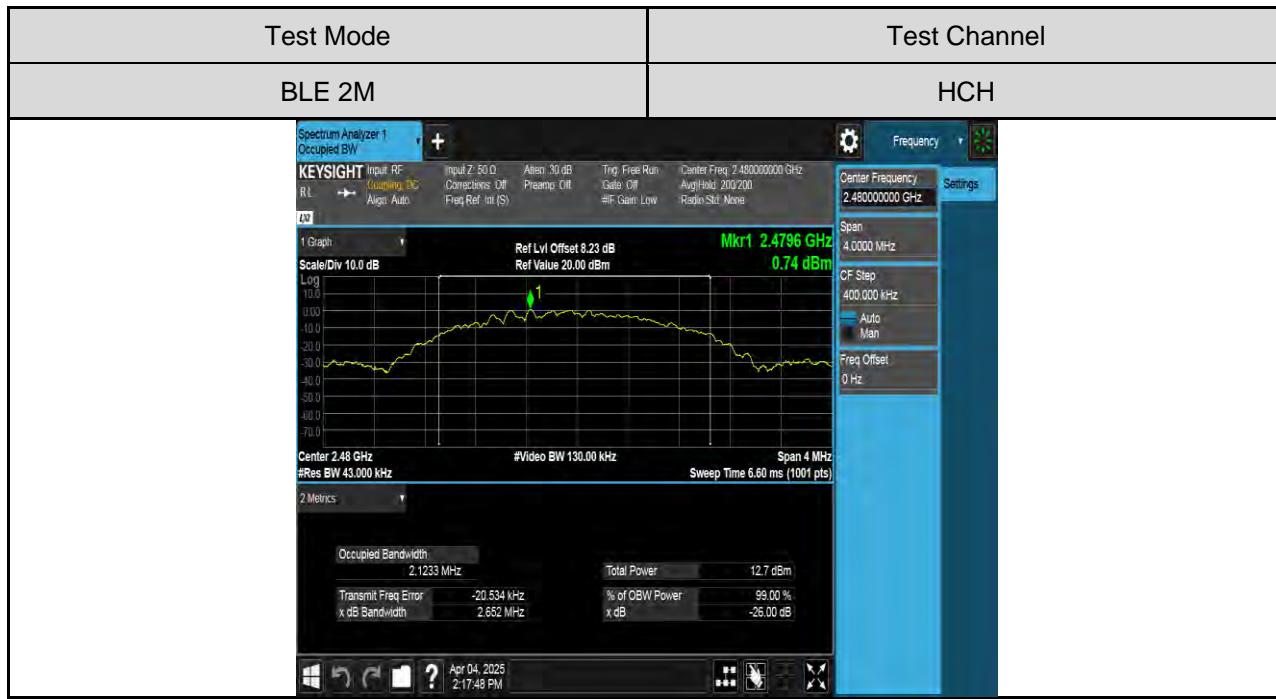
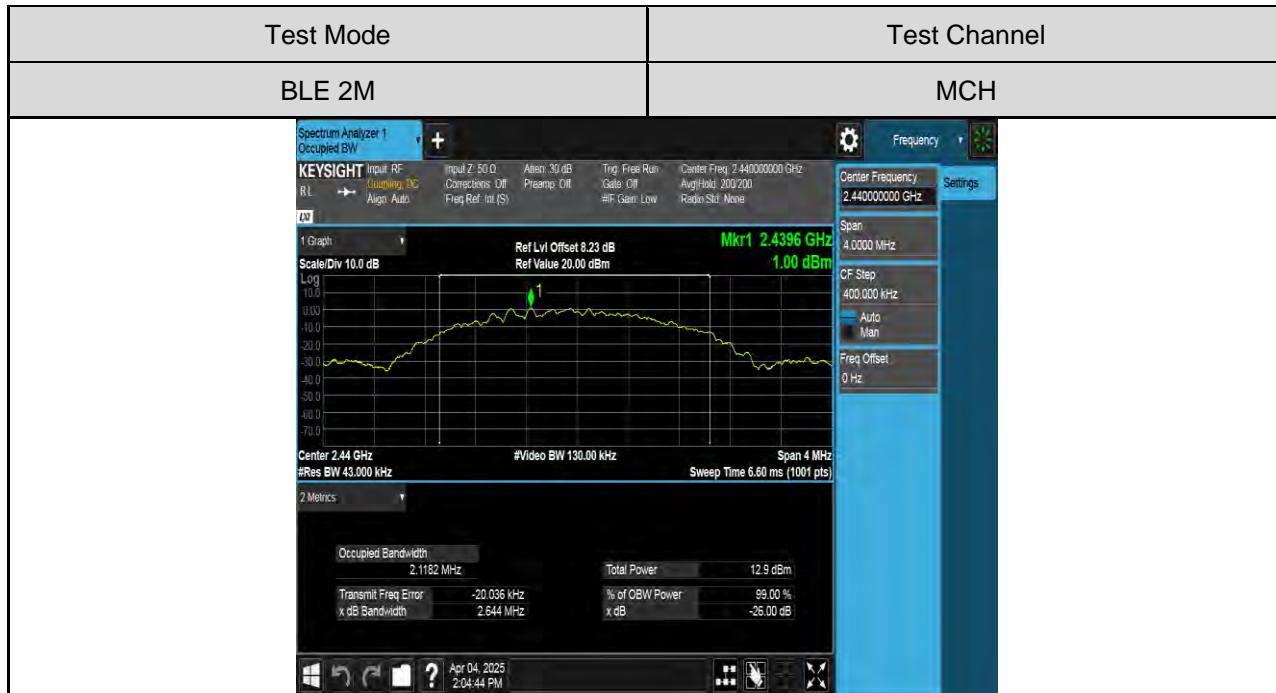


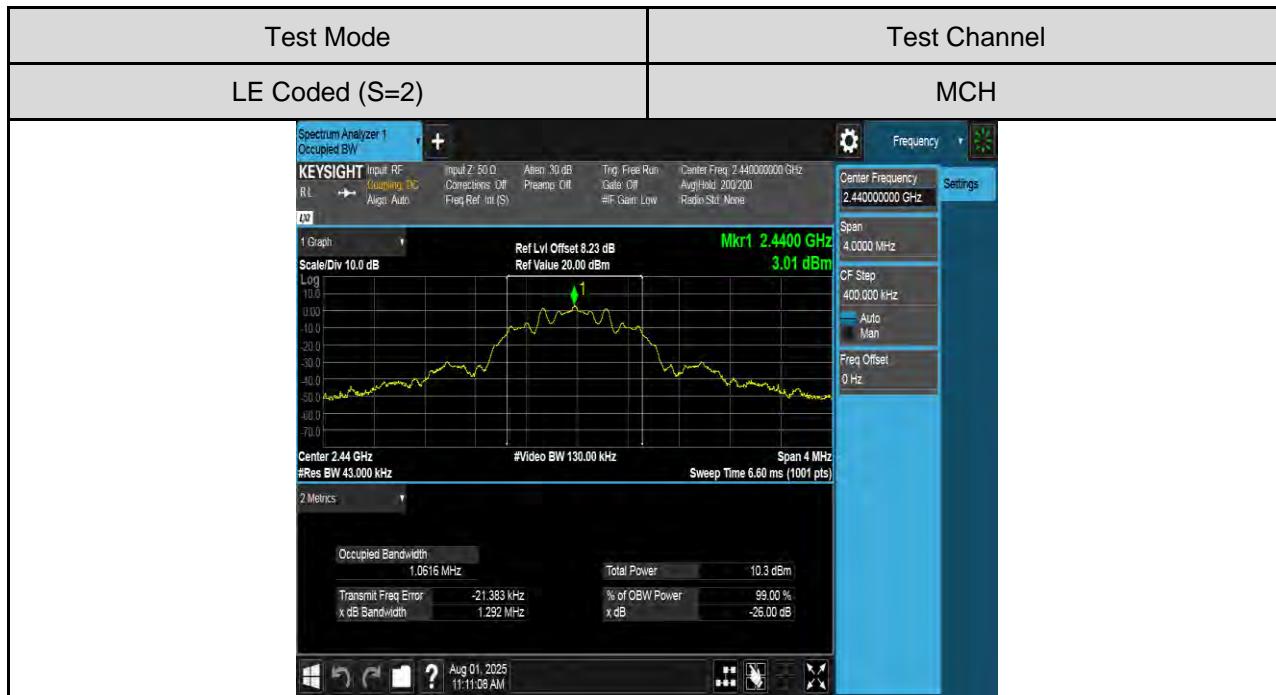
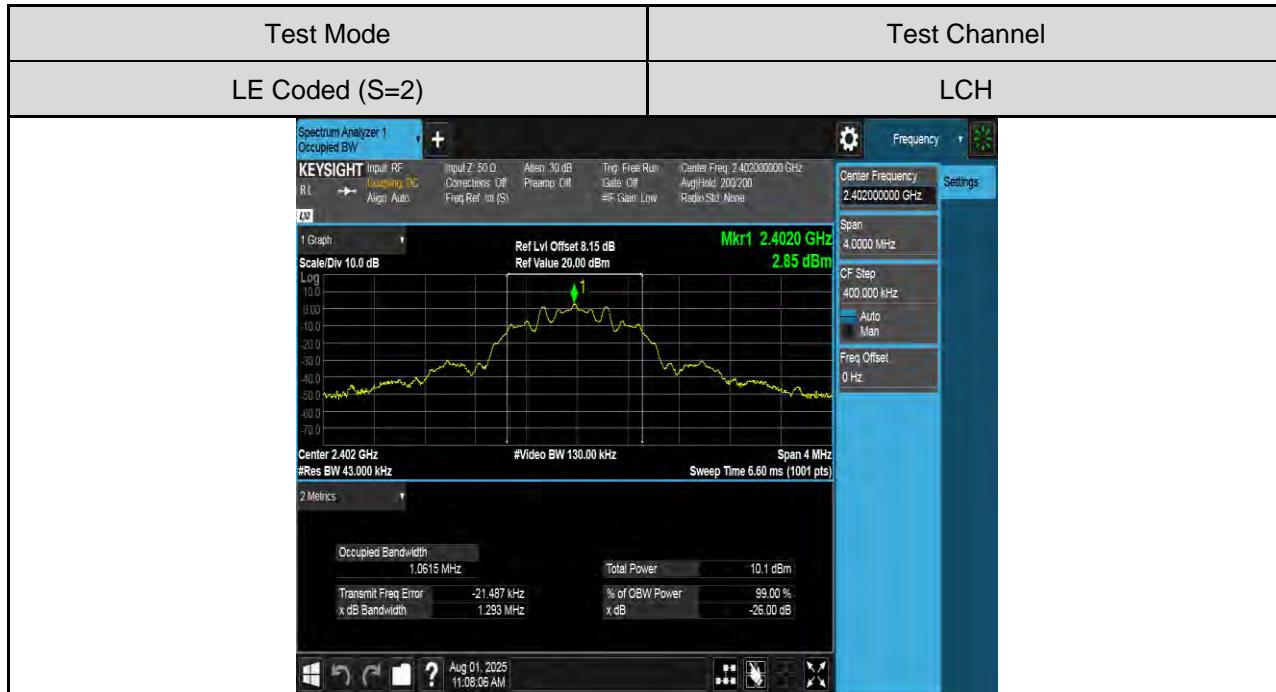


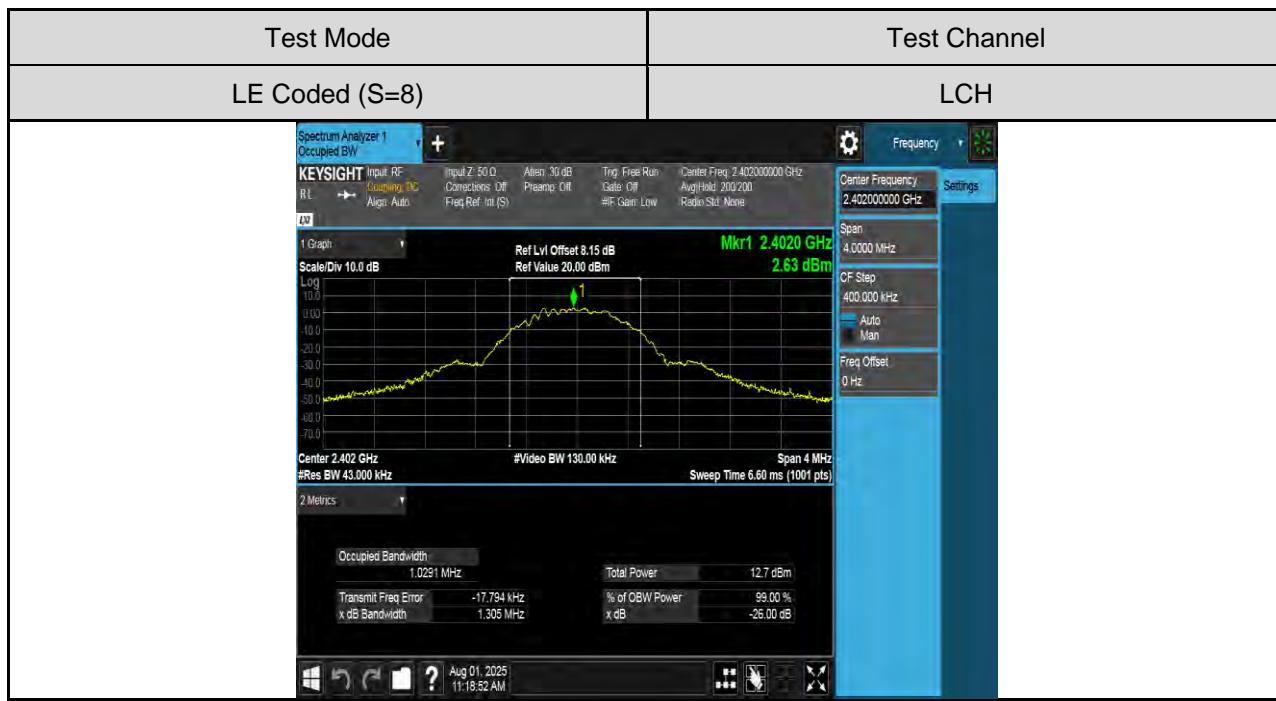
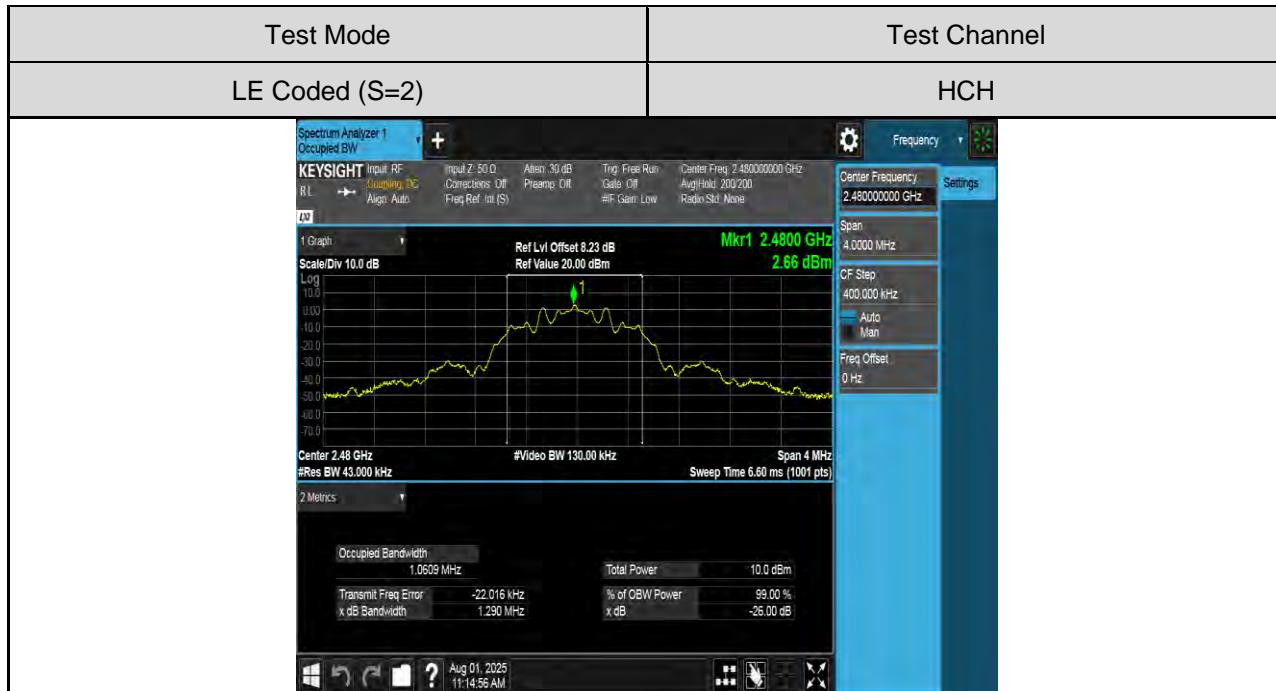


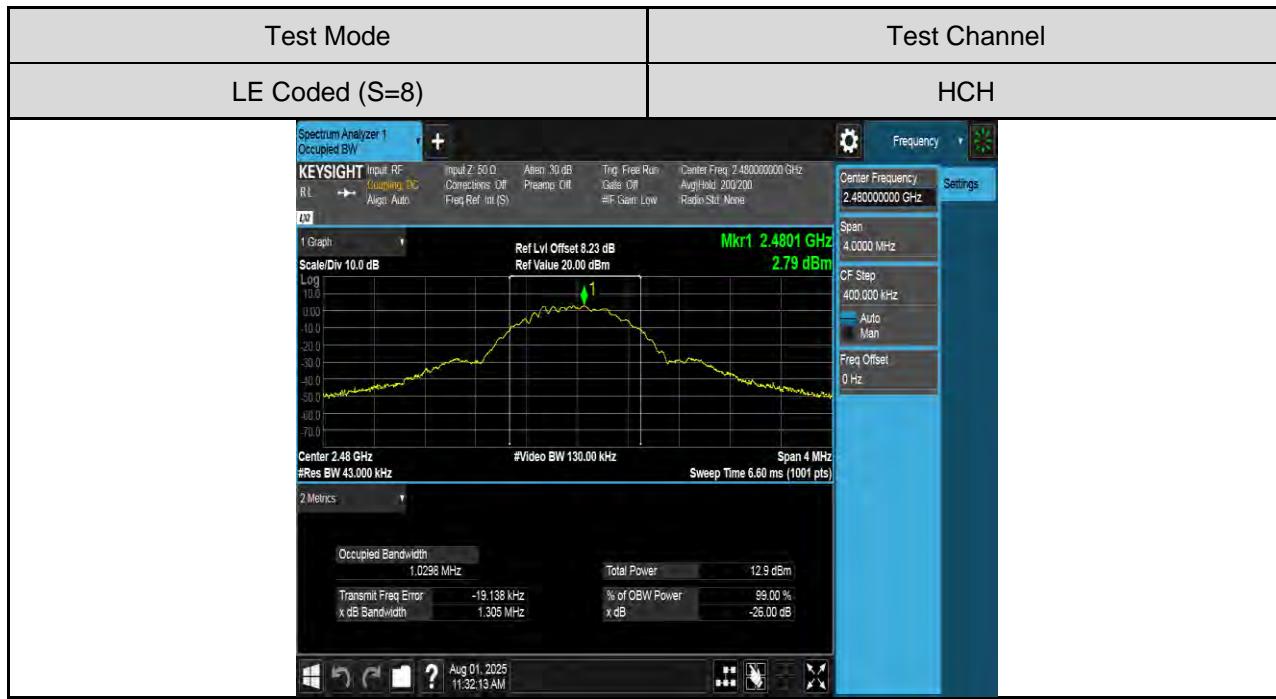
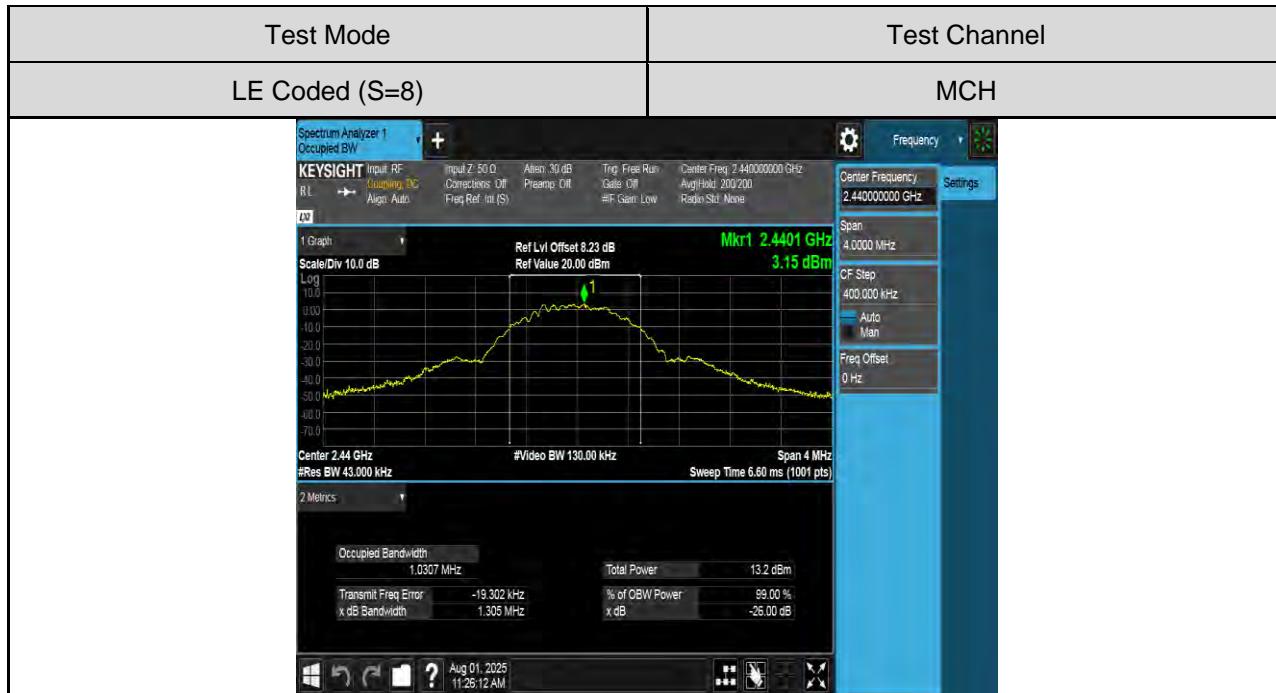
**99% Bandwidth**












### 7.3. CONDUCTED OUTPUT POWER

#### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.247(b)(3)	Output Power	1 watt or 30dBm	2400-2483.5

#### TEST PROCEDURE

Place the EUT on the table and set it in the transmitting mode.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the Power sensor.

Measure the power of each channel.

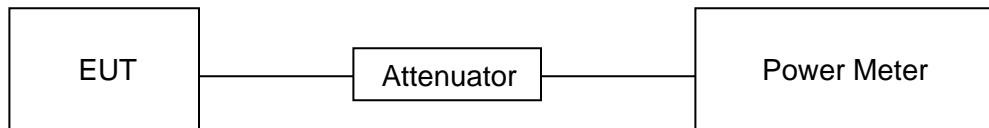
PK Detector used for PK result.

Peak Detector used for Peak result.

#### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

#### TEST SETUP



TEST RESULTS TABLE

Test Mode	Test Channel	Maximum Conducted Output Power (PK)		LIMIT
		dBm	dBm	
BLE 1M	LCH	6.78		30
	MCH	7.19		30
	HCH	6.93		30
BLE 2M	LCH	6.88		30
	MCH	7.18		30
	HCH	6.92		30
LE Coded (S=2)	LCH	6.44		30
	MCH	6.62		30
	HCH	6.39		30
LE Coded (S=8)	LCH	6.44		30
	MCH	6.92		30
	HCH	6.53		30

## 7.4. POWER SPECTRAL DENSITY

### LIMITS

FCC Part15 (15.247), Subpart C			
Section	Test Item	Limit	Frequency Range (MHz)
FCC §15.247 (e)	Power Spectral Density	8 dBm/3 kHz	2400-2483.5

### TEST PROCEDURE

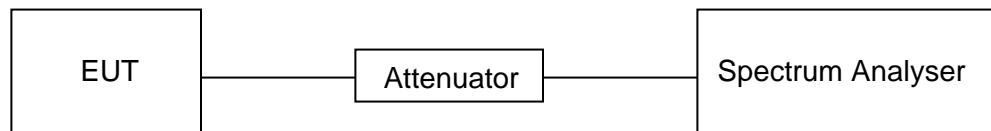
Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:

Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	$3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
VBW	$\geq 3 \times \text{RBW}$
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Allow trace to fully stabilize and use the peak marker function to determine the maximum amplitude level within the RBW.

If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST SETUP



### TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

### TEST RESULTS TABLE

Test Mode	Test Channel	Maximum Peak power spectral density (dBm/30kHz)	Result
BLE 1M	LCH	1.88	30
	MCH	2.22	30.00
	HCH	2.01	30.00
BLE 2M	LCH	-0.52	30.00
	MCH	-0.29	30.00
	HCH	-0.47	30.00

TEST GRAPHS


Test Mode	Test Channel	Verdict
BLE 1M	HCH	PASS
 <p>Detailed description: This screenshot shows a Keysight Spectrum Analyzer interface. The main display is a log-scale spectrum plot with a central peak at 2.479 GHz. The y-axis ranges from -11.8 to 0.23 dBm. The x-axis shows a span of 1.026 MHz. The 'Settings' panel on the right is open, showing parameters: Center Frequency 2.4800000 GHz, Span 1.0260000 MHz, Start Freq 2.479487000 GHz, Stop Freq 2.480513000 GHz, and Auto Tune selected. The measurement marker Mkr1 shows a power of 2.01 dBm at 2.4797209 GHz. The measurement parameters are: Input RF: 50Ω, Corrections: Off, Preamplifier: Off, PND: Best Wide, Gate: Off, IF Gain: Low, and Sig Track: Off. The measurement type is Power (RMS), with averaging held for 200/200. The measurement time is 1.13 ms (1001 pts) with a video bandwidth of 100 kHz and a resolution bandwidth of 30 kHz.</p>		

Test Mode	Test Channel	Verdict
BLE 2M	LCH	PASS
 <p>Detailed description: This screenshot shows a Keysight Spectrum Analyzer interface. The main display is a log-scale spectrum plot with a central peak at 2.402 GHz. The y-axis ranges from -11.9 to 0.15 dBm. The x-axis shows a span of 2.022 MHz. The 'Settings' panel on the right is open, showing parameters: Center Frequency 2.4020000 GHz, Span 2.0220000 MHz, Start Freq 2.400989000 GHz, Stop Freq 2.403011000 GHz, and Auto Tune selected. The measurement marker Mkr1 shows a power of -0.52 dBm at 2.4020930 GHz. The measurement parameters are: Input RF: 50Ω, Corrections: Off, Preamplifier: Off, PND: Best Wide, Gate: Off, IF Gain: Low, and Sig Track: Off. The measurement type is Power (RMS), with averaging held for 200/200. The measurement time is 2.13 ms (1001 pts) with a video bandwidth of 100 kHz and a resolution bandwidth of 30 kHz.</p>		

Test Mode	Test Channel	Verdict
BLE 2M	MCH	PASS
 <p>The screenshot shows a Keysight Spectrum Analyzer interface. The center frequency is set to 2.4400000 GHz, and the span is 2.022 MHz. The signal of interest is marked with a yellow arrow and labeled 'Mkr1 2.440 093 0 GHz -0.28 dBm'. The x-axis represents frequency from 2.438989000 GHz to 2.441011000 GHz, and the y-axis represents power from -71.8 dBm to 0.23 dBm. The signal is centered at 2.4400930 GHz with a power of -0.28 dBm.</p>		

Test Mode	Test Channel	Verdict
BLE 2M	HCH	PASS
 <p>The screenshot shows a Keysight Spectrum Analyzer interface. The center frequency is set to 2.4800000 GHz, and the span is 2.016 MHz. The signal of interest is marked with a yellow arrow and labeled 'Mkr1 2.480 090 7 GHz -0.47 dBm'. The x-axis represents frequency from 2.478992000 GHz to 2.481008000 GHz, and the y-axis represents power from -71.8 dBm to 0.23 dBm. The signal is centered at 2.4800907 GHz with a power of -0.47 dBm.</p>		

## 7.5. CONDUCTED BANDEDGE AND SPURIOUS EMISSIONS

### LIMITS

FCC Part15 (15.247), Subpart C		
Section	Test Item	Limit
FCC §15.247 (d)	Conducted Bandedge and Spurious Emissions	20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power

### TEST PROCEDURE

Refer to FCC KDB 558074, connect the UUT to the spectrum analyser and use the following settings:

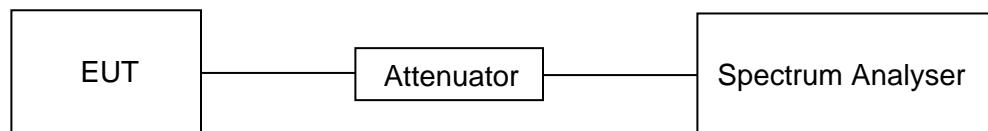
Center Frequency	The centre frequency of the channel under test
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
Span	1.5 x DTS bandwidth
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum PSD level.

Span	Set the center frequency and span to encompass frequency range to be measured
Detector	Peak
RBW	100 kHz
VBW	$\geq 3 \times$ RBW
measurement points	$\geq$ span/RBW
Trace	Max hold
Sweep time	Auto couple.

Use the peak marker function to determine the maximum amplitude level.

### TEST SETUP



## TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

## PART 1: REFERENCE LEVEL MEASUREMENT

### TEST RESULTS TABLE

Test Mode	Test Channel	Result[dBm]
BLE 1M	LCH	5.92
	MCH	6.32
	HCH	6.06
BLE 2M	LCH	3.84
	MCH	4.14
	HCH	3.86

### TEST GRAPHS









**PART 2: CONDUCTED BANDEDGE****TEST RESULTS TABLE**

Test Mode	Test Channel	Result	Verdict
BLE 1M	LCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
BLE 2M	LCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS

TEST GRAPHS

Test Mode	Test Channel	Verdict																																																																																				
BLE 1M	LCH	PASS																																																																																				
 <p><b>LCH Test Results:</b></p> <p><b>Marker Data:</b></p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Scale</th> <th>X (GHz)</th> <th>Y (dBm)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>2.400 000 GHz</td> <td>-45.96 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>2.390 000 GHz</td> <td>-53.14 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>2.310 000 GHz</td> <td>-54.05 dBm</td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>2.399 960 GHz</td> <td>-45.96 dBm</td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>2.405 000 GHz</td> <td>-45.96 dBm</td> </tr> </tbody> </table> <p><b>Marker Table:</b></p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.400 000 GHz</td> <td>-45.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.390 000 GHz</td> <td>-53.14 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.310 000 GHz</td> <td>-54.05 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.399 960 GHz</td> <td>-45.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>2.405 000 GHz</td> <td>-45.96 dBm</td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Trace	Scale	X (GHz)	Y (dBm)	1	N	1	2.400 000 GHz	-45.96 dBm	2	N	1	2.390 000 GHz	-53.14 dBm	3	N	1	2.310 000 GHz	-54.05 dBm	4	N	1	2.399 960 GHz	-45.96 dBm	5	N	1	2.405 000 GHz	-45.96 dBm	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2.400 000 GHz	-45.96 dBm			2	N	1	f	2.390 000 GHz	-53.14 dBm			3	N	1	f	2.310 000 GHz	-54.05 dBm			4	N	1	f	2.399 960 GHz	-45.96 dBm			5	N	1	f	2.405 000 GHz	-45.96 dBm			6							
Marker	Trace	Scale	X (GHz)	Y (dBm)																																																																																		
1	N	1	2.400 000 GHz	-45.96 dBm																																																																																		
2	N	1	2.390 000 GHz	-53.14 dBm																																																																																		
3	N	1	2.310 000 GHz	-54.05 dBm																																																																																		
4	N	1	2.399 960 GHz	-45.96 dBm																																																																																		
5	N	1	2.405 000 GHz	-45.96 dBm																																																																																		
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																																																															
1	N	1	f	2.400 000 GHz	-45.96 dBm																																																																																	
2	N	1	f	2.390 000 GHz	-53.14 dBm																																																																																	
3	N	1	f	2.310 000 GHz	-54.05 dBm																																																																																	
4	N	1	f	2.399 960 GHz	-45.96 dBm																																																																																	
5	N	1	f	2.405 000 GHz	-45.96 dBm																																																																																	
6																																																																																						

Test Mode	Test Channel	Verdict																																																																										
BLE 1M	HCH	PASS																																																																										
 <p><b>HCH Test Results:</b></p> <p><b>Marker Data:</b></p> <table border="1"> <thead> <tr> <th>Marker</th> <th>Trace</th> <th>Scale</th> <th>X (GHz)</th> <th>Y (dBm)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>2.483 50 GHz</td> <td>-51.18 dBm</td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>2.500 00 GHz</td> <td>-54.03 dBm</td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>2.484 16 GHz</td> <td>-50.13 dBm</td> </tr> </tbody> </table> <p><b>Marker Table:</b></p> <table border="1"> <thead> <tr> <th>Mode</th> <th>Trace</th> <th>Scale</th> <th>X</th> <th>Y</th> <th>Function</th> <th>Function Width</th> <th>Function Value</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.483 50 GHz</td> <td>-51.18 dBm</td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>2.500 00 GHz</td> <td>-54.03 dBm</td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 16 GHz</td> <td>-50.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>2.484 16 GHz</td> <td>-50.13 dBm</td> <td></td> <td></td> </tr> <tr> <td>5</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> <tr> <td>6</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Marker	Trace	Scale	X (GHz)	Y (dBm)	1	N	1	2.483 50 GHz	-51.18 dBm	2	N	1	2.500 00 GHz	-54.03 dBm	3	N	1	2.484 16 GHz	-50.13 dBm	Mode	Trace	Scale	X	Y	Function	Function Width	Function Value	1	N	1	f	2.483 50 GHz	-51.18 dBm			2	N	1	f	2.500 00 GHz	-54.03 dBm			3	N	1	f	2.484 16 GHz	-50.13 dBm			4	N	1	f	2.484 16 GHz	-50.13 dBm			5								6							
Marker	Trace	Scale	X (GHz)	Y (dBm)																																																																								
1	N	1	2.483 50 GHz	-51.18 dBm																																																																								
2	N	1	2.500 00 GHz	-54.03 dBm																																																																								
3	N	1	2.484 16 GHz	-50.13 dBm																																																																								
Mode	Trace	Scale	X	Y	Function	Function Width	Function Value																																																																					
1	N	1	f	2.483 50 GHz	-51.18 dBm																																																																							
2	N	1	f	2.500 00 GHz	-54.03 dBm																																																																							
3	N	1	f	2.484 16 GHz	-50.13 dBm																																																																							
4	N	1	f	2.484 16 GHz	-50.13 dBm																																																																							
5																																																																												
6																																																																												

Test Mode	Test Channel	Verdict
BLE 2M	LCH	PASS
		

Test Mode	Test Channel	Verdict
BLE 2M	HCH	PASS
		

**PART 3: CONDUCTED SPURIOUS EMISSION****TEST RESULTS TABLE**

Test Mode	Test Channel	Result	Verdict
BLE 1M	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS
BLE 2M	LCH	Refer to the Test Graph	PASS
	MCH	Refer to the Test Graph	PASS
	HCH	Refer to the Test Graph	PASS

## TEST GRAPHS

Test Mode	Channel	Verdict
BLE 1M	LCH	PASS



Test Mode	Channel	Verdict
BLE 1M	MCH	PASS

**MCH SPURIOUS EMISSION\_30MHz~1GHz**

**MCH SPURIOUS EMISSION\_1GHz~26.5GHz**


Test Mode	Channel	Verdict
BLE 1M	HCH	PASS

**HCH SPURIOUS EMISSION\_30MHz~1GHz**

**HCH SPURIOUS EMISSION\_1GHz~26.5GHz**


Test Mode	Channel	Verdict
BLE 2M	LCH	PASS



Test Mode	Channel	Verdict
BLE 2M	MCH	PASS

**MCH SPURIOUS EMISSION\_30MHz~1GHz**

**MCH SPURIOUS EMISSION\_1GHz~26.5GHz**


Test Mode	Channel	Verdict
BLE 2M	HCH	PASS

**HCH SPURIOUS EMISSION\_30MHz~1GHz**

**HCH SPURIOUS EMISSION\_1GHz~26.5GHz**


## 8. RADIATED TEST RESULTS

### 8.1. LIMITS AND PROCEDURE

#### LIMITS

Please refer to FCC §15.205 and §15.209, ISED RSS-247 Clause 5.5, ISED RSS-GEN Clause 8.9&6.13 (Transmitter)

#### Radiation Disturbance Test Limit for ISED (9kHz-1GHz)

Except where otherwise indicated in the applicable RSS, radiated emissions shall comply with the field strength limits shown in table 5 and table 6. Additionally, the level of any transmitter unwanted emission shall not exceed the level of the transmitter's fundamental emission.

**Table 5 – General field strength limits at frequencies above 30 MHz**

Frequency (MHz)	Field strength ( $\mu$ V/m at 3 m)
30 – 88	100
88 – 216	150
216 – 960	200
Above 960	500

**Table 6 – General field strength limits at frequencies below 30 MHz**

Frequency	Magnetic field strength (H-Field) ( $\mu$ A/m)	Measurement distance (m)
9 - 490 kHz <sup>Note 1</sup>	6.37/F (F in kHz)	300
490 - 1705 kHz	63.7/F (F in kHz)	30
1.705 - 30 MHz	0.08	30

**Note 1:** The emission limits for the ranges 9-90 kHz and 110-490 kHz are based on measurements employing a linear average detector.

Please refer to FCC KDB 558074

Radiation Disturbance Test Limit for FCC (Class B) (9kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Note: 1) At frequencies at or above 30 MHz, measurements may be performed at a distance other than what is specified provided: measurements are not made in the near field except where it can be shown that near field measurements are appropriate due to the characteristics of the device; and it can be demonstrated that the signal levels needed to be measured at the distance employed can be detected by the measurement equipment. Measurements shall not be performed at a distance greater than 30 meters unless it can be further demonstrated that measurements at a distance of 30 meters or less are impractical. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse linear-distance for field strength measurements; inverse-linear-distance-squared for power density measurements).

(2) At frequencies below 30 MHz, measurements may be performed at a distance closer than that specified in the regulations; however, an attempt should be made to avoid making measurements in the near field. Pending the development of an appropriate measurement procedure for measurements performed below 30 MHz, when performing measurements at a closer distance than specified, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). This paragraph (f) shall not apply to Access BPL devices operating below 30 MHz.

## Radiation Disturbance Test Limit for FCC (Above 1G)

Frequency (MHz)	dB(uV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

## Restricted bands of operation

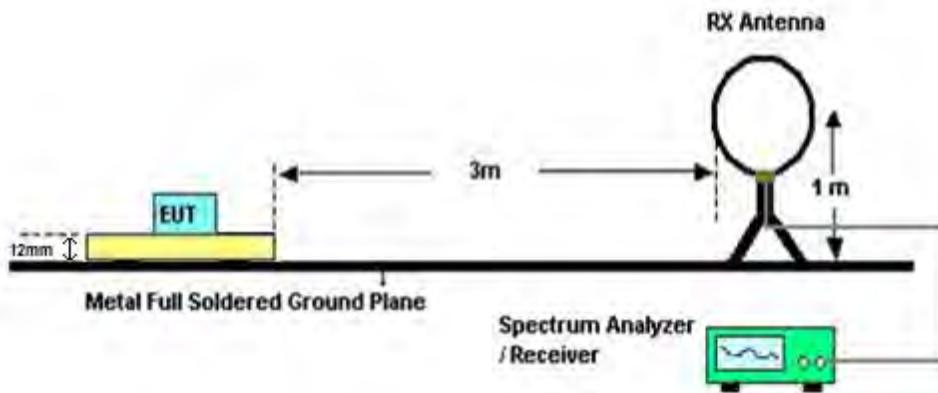
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
<sup>1</sup> 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	( <sup>2</sup> )
13.36-13.41			

Note: <sup>1</sup>Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup>Above 38.6c

## TEST SETUP AND PROCEDURE

Below 30MHz

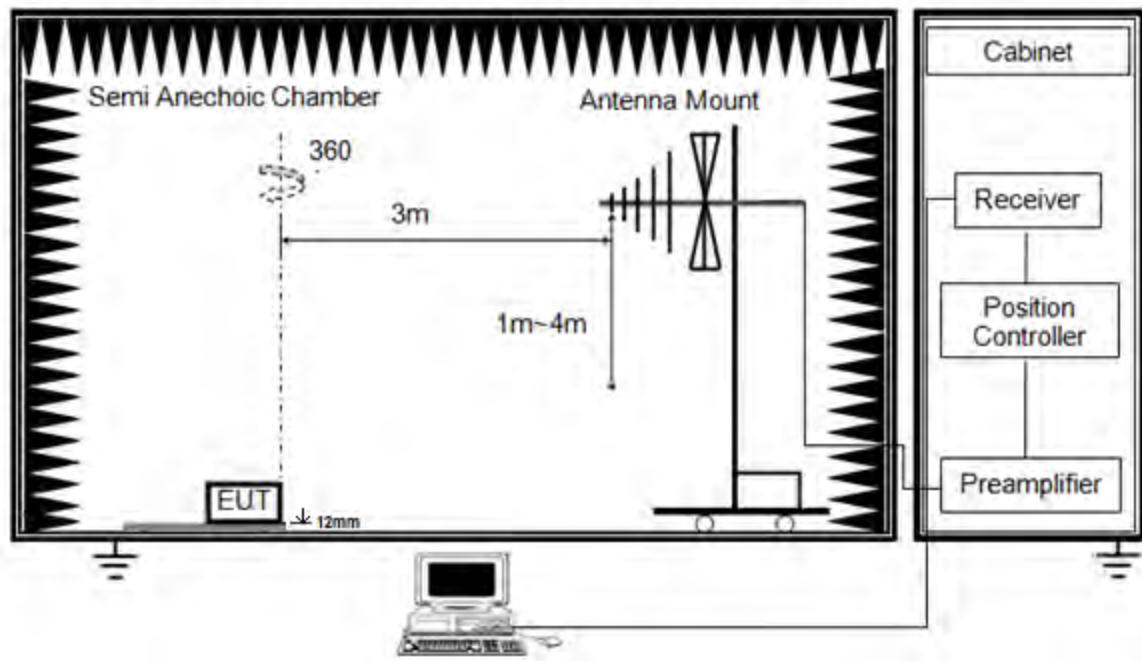


The setting of the spectrum analyser

RBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
VBW	200 Hz (From 9kHz to 0.15MHz) / 9kHz (From 0.15MHz to 30MHz)
Sweep	Auto
Detector	Peak/QP/Average
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013
2. The EUT was arranged to its worst case and then turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both Horizontal, Face-on and Face-off polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12 mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a 1m height antenna tower.
5. The radiated emission limits are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector
6. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. For the actual test configuration, please refer to the related item in this test report  
(Photographs of the Test Configuration)
8. The limits in CFR 47, Part 15, Subpart C, paragraph 15.209 (a), are identical to those in RSS-GEN Section 8.9, Table 6, since the measurements are performed in terms of magnetic field strength and converted to electric field strength levels (as reported in the table) using the free space impedance of  $377 \Omega$ . For example, the measurement frequency  $X$  kHz resulted in a level of  $Y$  dB $V/m$ , which is equivalent to  $Y - 51.5 = Z$  dB $A/m$ , which has the same margin,  $W$  dB, to the corresponding RSS-GEN Table 6 limit as it has to be 15.209(a) limit.

Below 1G

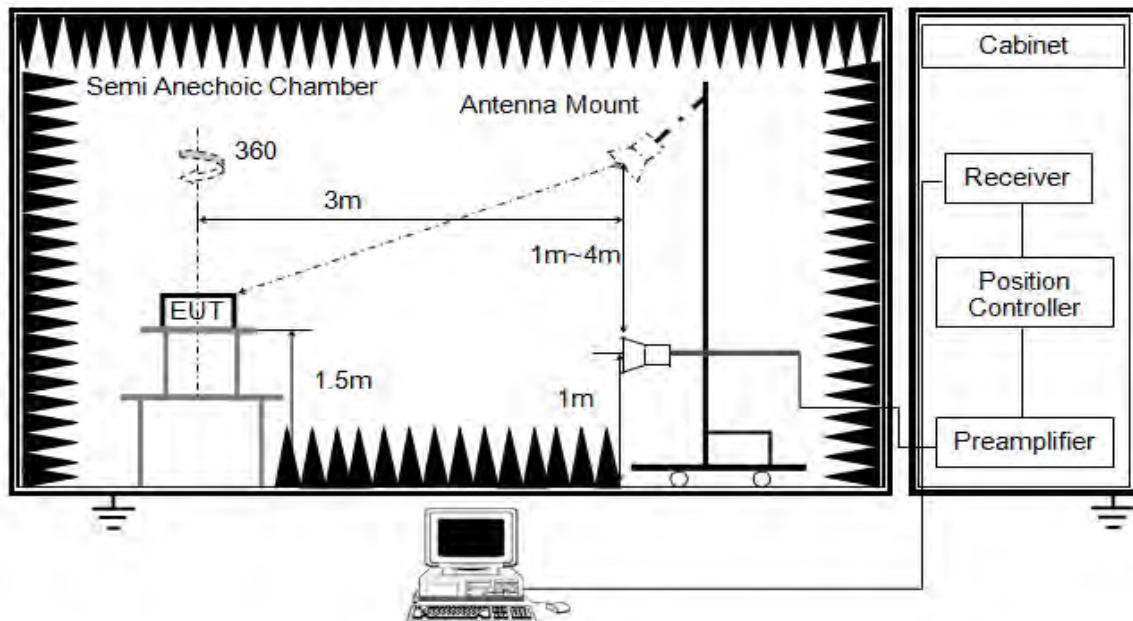


The setting of the spectrum analyser

RBW	120 kHz
VBW	300 kHz
Sweep	Auto
Detector	Peak/QP
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 12 mm above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement below 1GHz, the initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured. If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
6. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

Above 1G

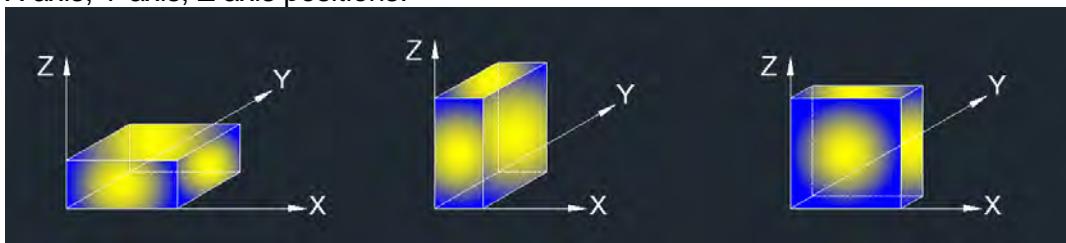


The setting of the spectrum analyser

RBW	1 MHz
VBW	PEAK:3 MHz AVG: See note6
Sweep	Auto
Detector	Peak
Trace	Max hold

1. The testing follows the guidelines in ANSI C63.10-2013.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
3. The EUT was placed on a turntable with 1.5m above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. For measurement above 1GHz, the emission measurement will be measured by the peak detector. This peak level, once corrected, must comply with the limit specified in Section 15.209.
6. For measurements above 1 GHz, the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak measurements; and 1 MHz resolution bandwidth with video bandwidth  $\geq 1/T$  but not less than the setting list in section 7.1 when use peak detector, max hold to be run for at least  $[50 * (1/\text{Duty Cycle})]$  traces for average measurements. For the Duty Cycle need to refer the results in section 7.1.
7. For the actual test configuration, please refer to the related item in this test report (Photographs of the Test Configuration)

X axis, Y axis, Z axis positions:



Note: For all radiated test, EUT in each of three orthogonal axis emissions had been tested, but only the worse case (X axis) data recorded in the report.

## 8.2. TEST ENVIRONMENT

Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

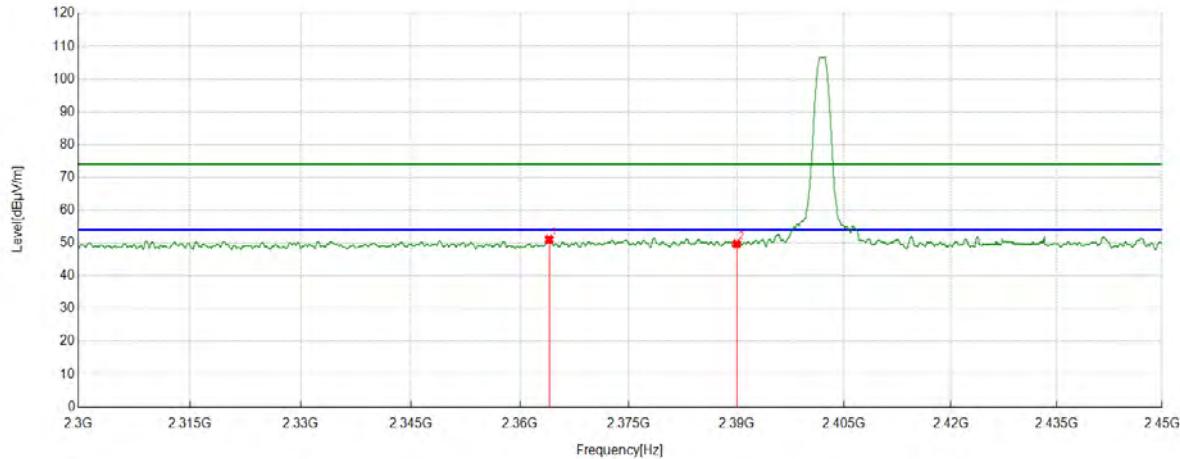
## 8.3. RESTRICTED BANDEDGE

### TEST RESULT TABLE

Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	LCH	<Limit	PASS
	HCH	<Limit	PASS
BLE 2M	LCH	<Limit	PASS
	HCH	<Limit	PASS

### TEST GRAPHS

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS



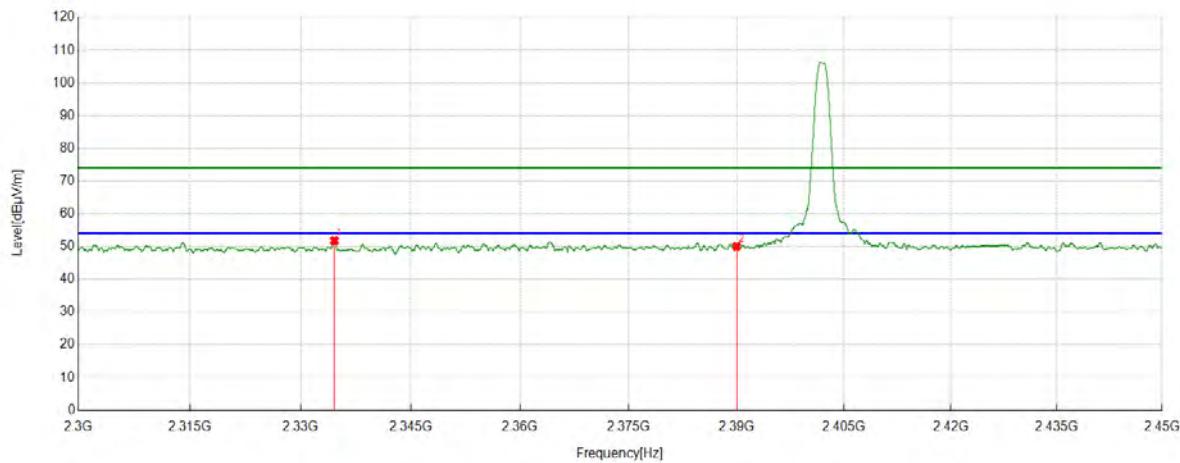
#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2364.0205	37.50	13.58	51.08	74.00	-22.92	Horizontal
2	2390.0000	35.98	13.72	49.70	74.00	-24.30	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

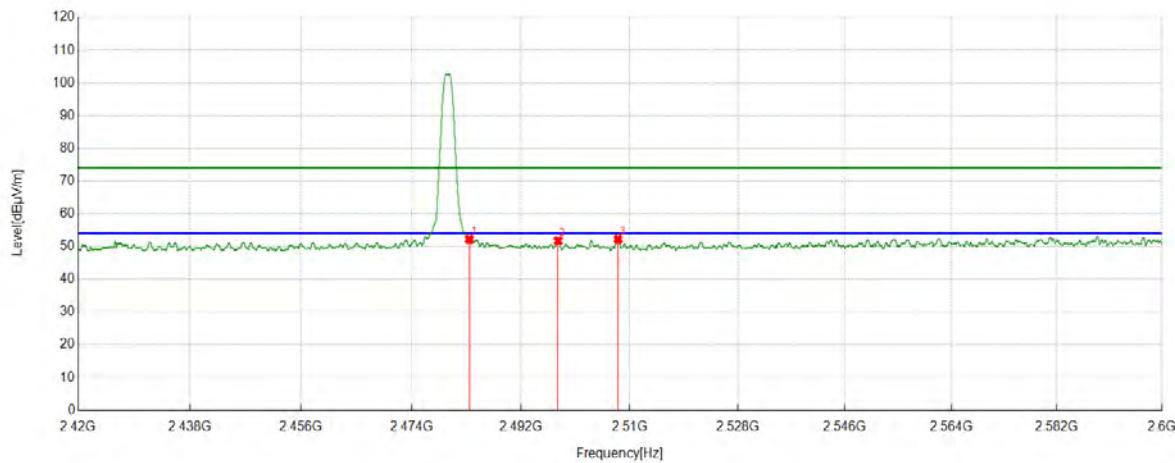
Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2334.6168	38.43	13.39	51.82	74.00	-22.18	Vertical
2	2390.0000	36.31	13.72	50.03	74.00	-23.97	Vertical

Note: 1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS

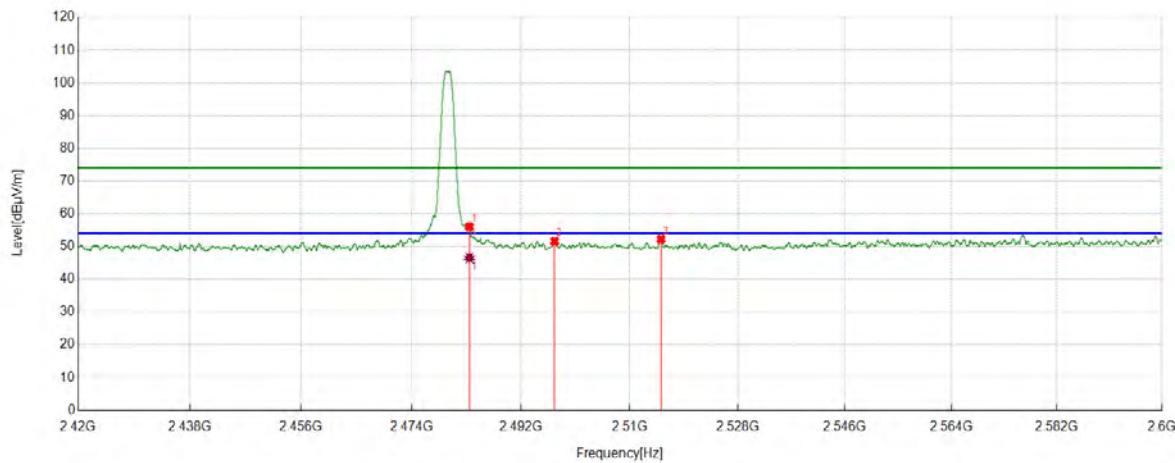

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	38.05	14.12	52.17	74.00	-21.83	Horizontal
2	2498.1073	37.56	14.19	51.75	74.00	-22.25	Horizontal
3	2508.0535	37.83	14.37	52.20	74.00	-21.80	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.89	14.12	56.01	74.00	-17.99	Vertical
2	2497.5447	37.40	14.20	51.60	74.00	-22.40	Vertical
3	2515.1869	37.73	14.47	52.20	74.00	-21.80	Vertical

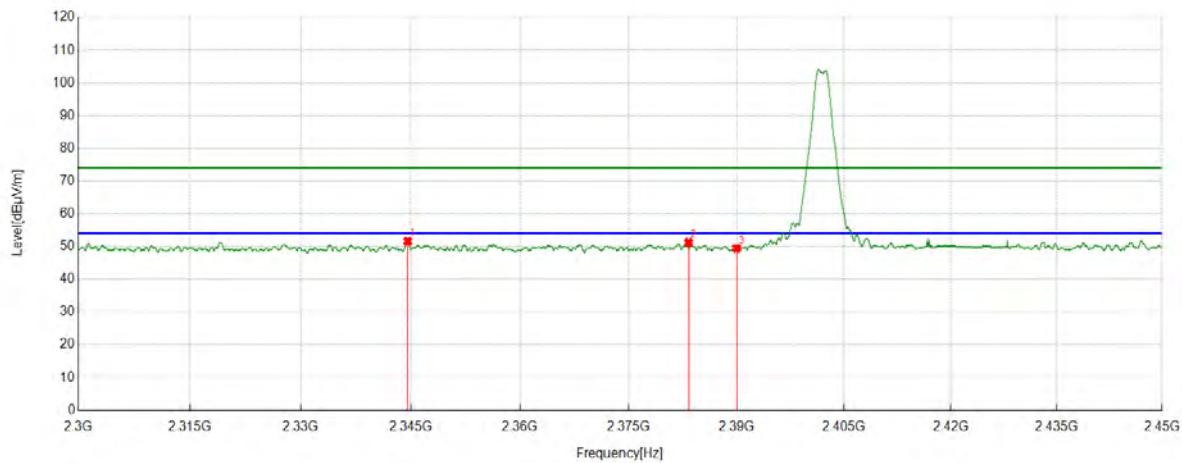
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	32.37	14.12	46.49	54.00	-7.51	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS

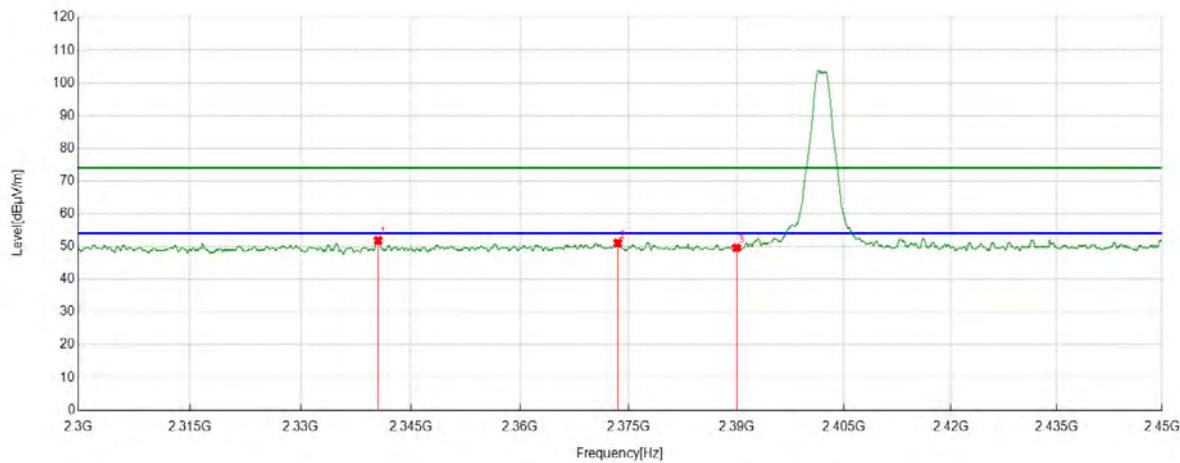

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB <sub>BuV/m</sub> ]	[dB]	[dB <sub>BuV/m</sub> ]	[dB <sub>BuV/m</sub> ]	[dB]	
1	2344.6118	38.13	13.47	51.60	74.00	-22.40	Horizontal
2	2383.3167	37.52	13.76	51.28	74.00	-22.72	Horizontal
3	2390.0000	35.71	13.72	49.43	74.00	-24.57	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS

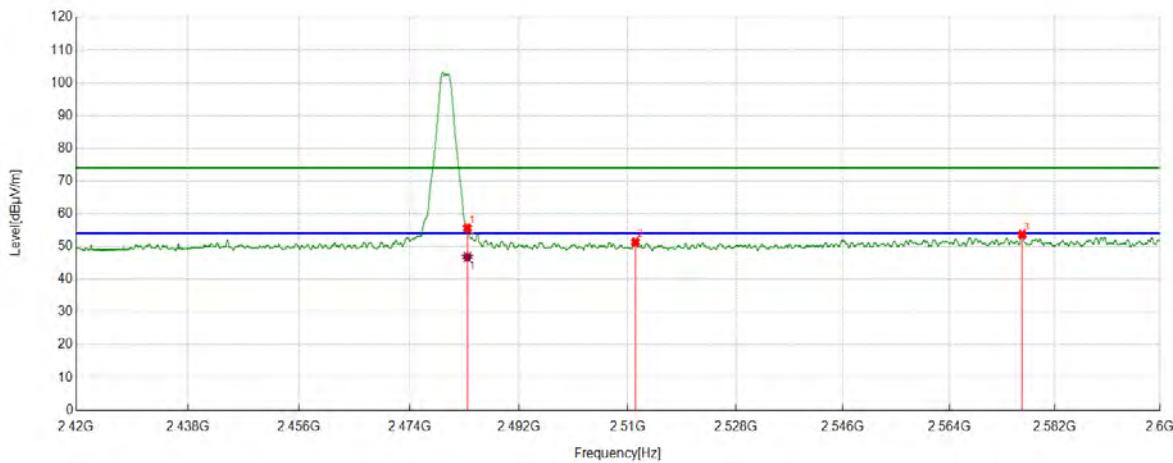

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB <sub>BuV/m</sub> ]	[dB]	[dB <sub>BuV/m</sub> ]	[dB <sub>BuV/m</sub> ]	[dB]	
1	2340.5801	38.47	13.40	51.87	74.00	-22.13	Vertical
2	2373.5092	37.38	13.70	51.08	74.00	-22.92	Vertical
3	2390.0000	35.86	13.72	49.58	74.00	-24.42	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	41.49	14.12	55.61	74.00	-18.39	Horizontal
2	2511.2714	36.93	14.43	51.36	74.00	-22.64	Horizontal
3	2576.3945	38.62	14.99	53.61	74.00	-20.39	Horizontal

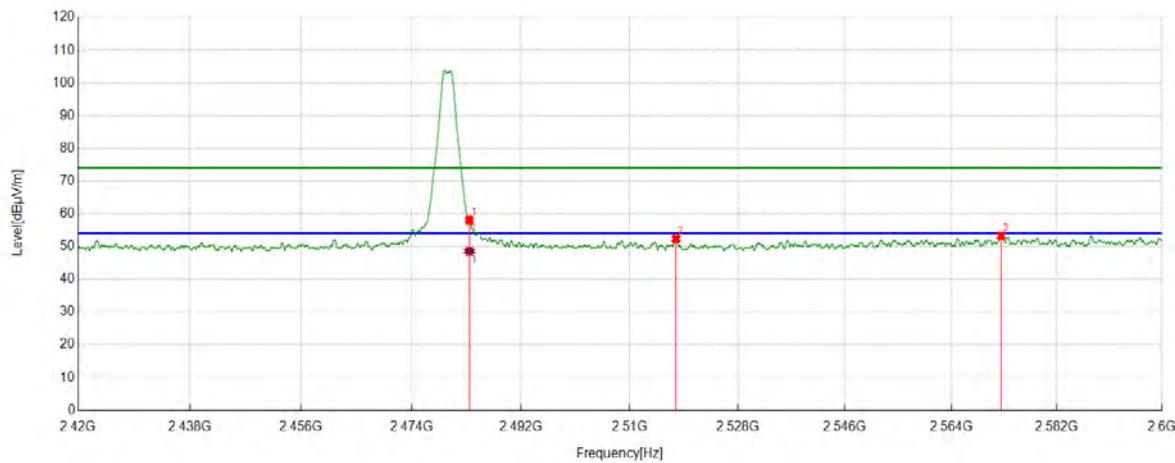
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	32.64	14.12	46.76	54.00	-7.24	Horizontal

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	43.92	14.12	58.04	74.00	-15.96	Vertical
2	2517.6847	37.81	14.50	52.31	74.00	-21.69	Vertical
3	2572.4791	38.32	14.93	53.25	74.00	-20.75	Vertical

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	2483.5000	34.43	14.12	48.55	54.00	-5.45	Vertical

Note:

1. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
2. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
3. Measurement = Reading Level + Correct Factor.
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## 8.4. SPURIOUS EMISSIONS

### TEST RESULTS TABLE

#### 1) For 1GHz~18GHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS
BLE 2M	LCH	<Limit	PASS
	MCH	<Limit	PASS
	HCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 2) For 9kHz~30MHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	MCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 3) For 30MHz~1GHz

Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	MCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

#### 4) For 18GHz~26.5GHz

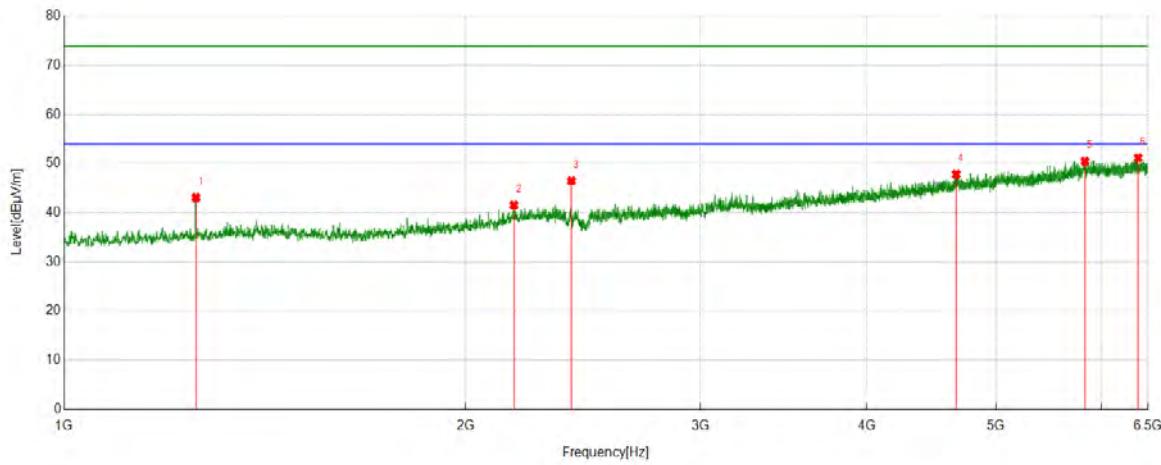
Test Mode	Channel	Puw(dBm)	Verdict
BLE 1M	MCH	<Limit	PASS

Note:

Through pre-testing all the test modes and test channels, but only the data of the worst case is included in this test report.

Part 1: 1GHz~6.5GHz
**HARMONICS AND SPURIOUS EMISSIONS**

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS

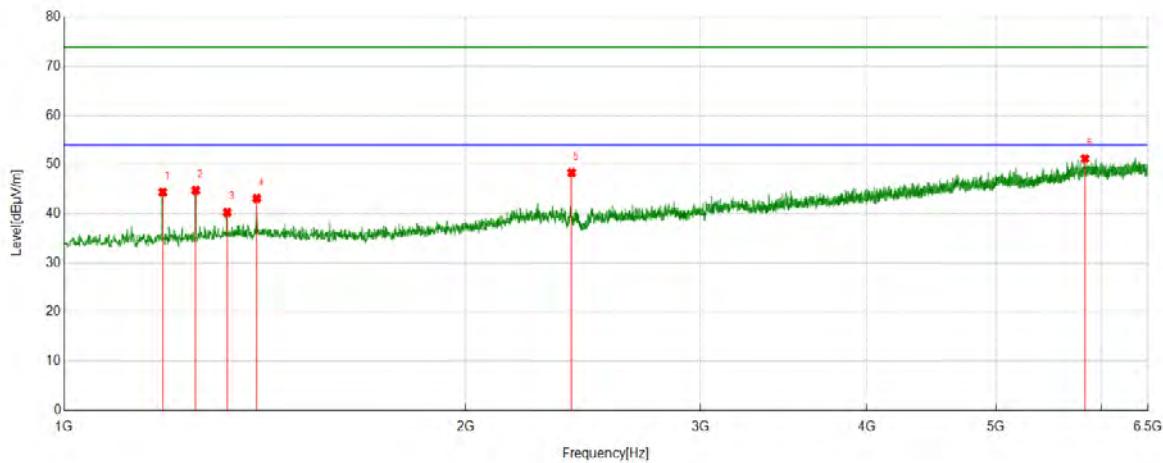

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.7820	43.95	-0.86	43.09	74.00	-30.91	Horizontal
2	2174.3968	37.99	3.57	41.56	74.00	-32.44	Horizontal
3	2401.3002	42.83	3.66	46.49	74.00	-27.51	Horizontal
4	4667.5834	35.53	12.32	47.85	74.00	-26.15	Horizontal
5	5828.9161	33.93	16.57	50.50	74.00	-23.50	Horizontal
6	6389.9862	33.70	17.48	51.18	74.00	-22.82	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

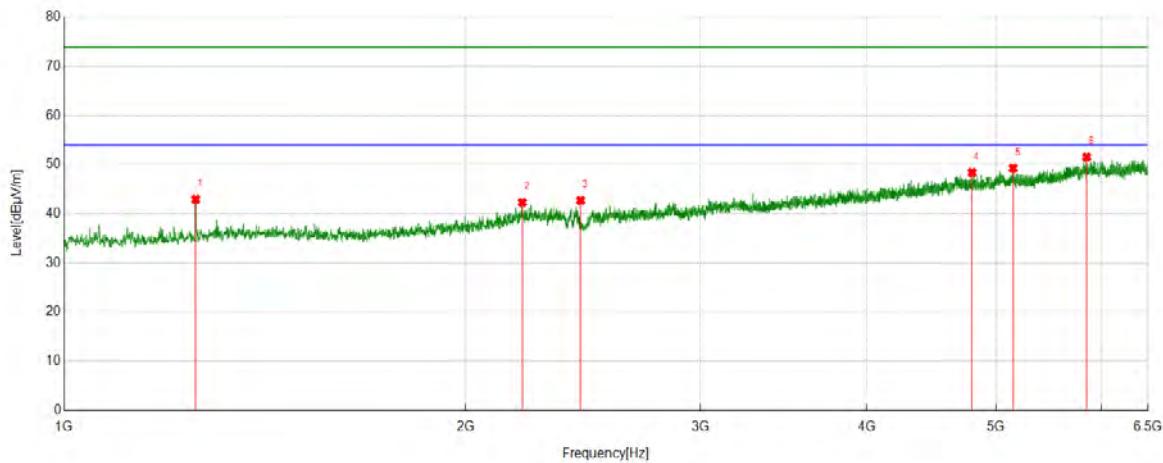
Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]				
1	1185.6482	45.60	-1.21	44.39	74.00	-29.61	Vertical
2	1255.0944	45.59	-0.86	44.73	74.00	-29.27	Vertical
3	1325.2282	40.46	-0.21	40.25	74.00	-33.75	Vertical
4	1394.6743	43.56	-0.43	43.13	74.00	-30.87	Vertical
5	2401.9877	44.72	3.66	48.38	74.00	-25.62	Vertical
6	5829.6037	34.66	16.57	51.23	74.00	-22.77	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

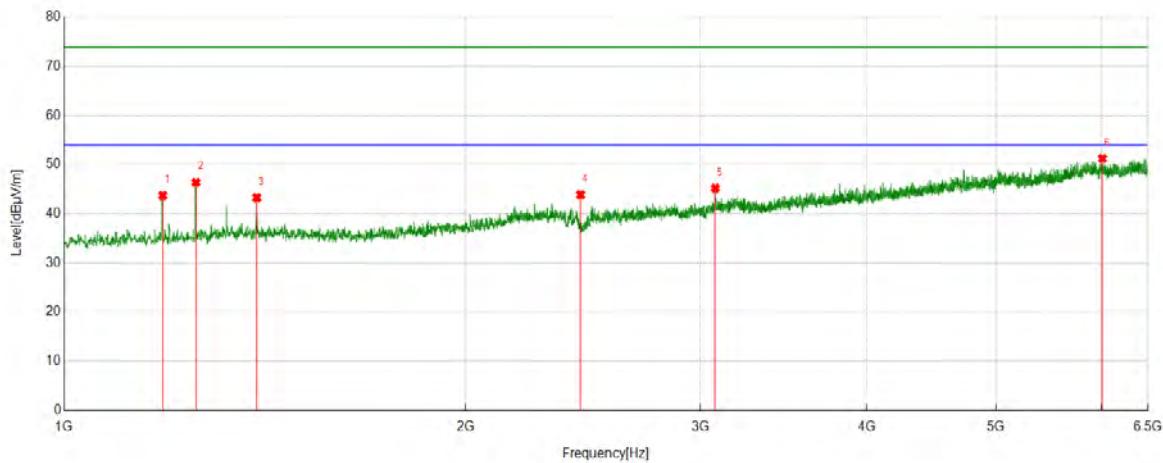
Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB <sub>uV</sub> /m]	[dB]	[dB <sub>uV</sub> /m]	[dB <sub>uV</sub> /m]	[dB]	
1	1255.0944	43.81	-0.86	42.95	74.00	-31.05	Horizontal
2	2206.0258	38.51	3.78	42.29	74.00	-31.71	Horizontal
3	2439.8050	38.95	3.75	42.70	74.00	-31.30	Horizontal
4	4796.8496	36.18	12.22	48.40	74.00	-25.60	Horizontal
5	5148.8936	36.33	12.92	49.25	74.00	-24.75	Horizontal
6	5846.7933	35.68	15.86	51.54	74.00	-22.46	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

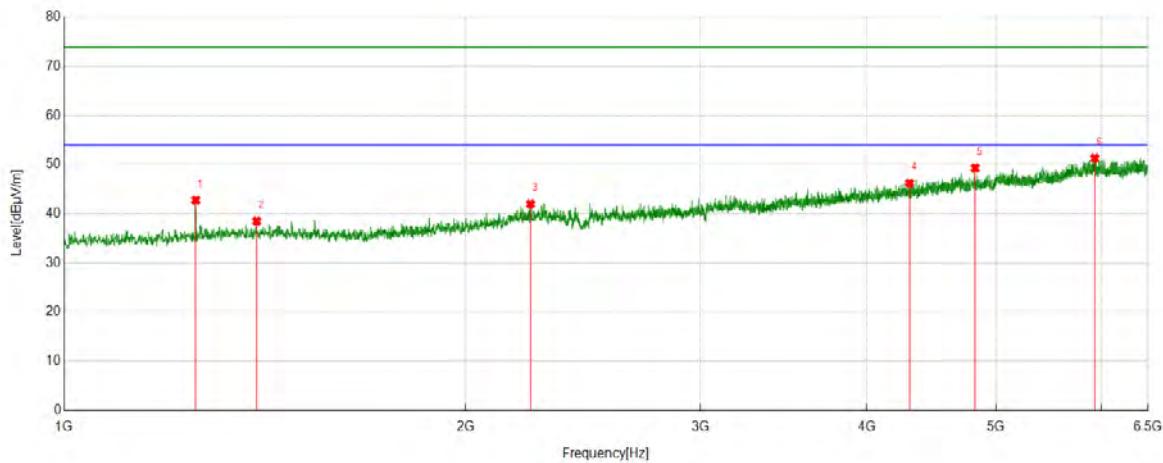
Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	44.92	-1.21	43.71	74.00	-30.29	Vertical
2	1255.7820	47.25	-0.86	46.39	74.00	-27.61	Vertical
3	1394.6743	43.70	-0.43	43.27	74.00	-30.73	Vertical
4	2439.8050	40.13	3.75	43.88	74.00	-30.12	Vertical
5	3078.5723	38.03	7.14	45.17	74.00	-28.83	Vertical
6	6007.6885	35.33	15.92	51.25	74.00	-22.75	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS

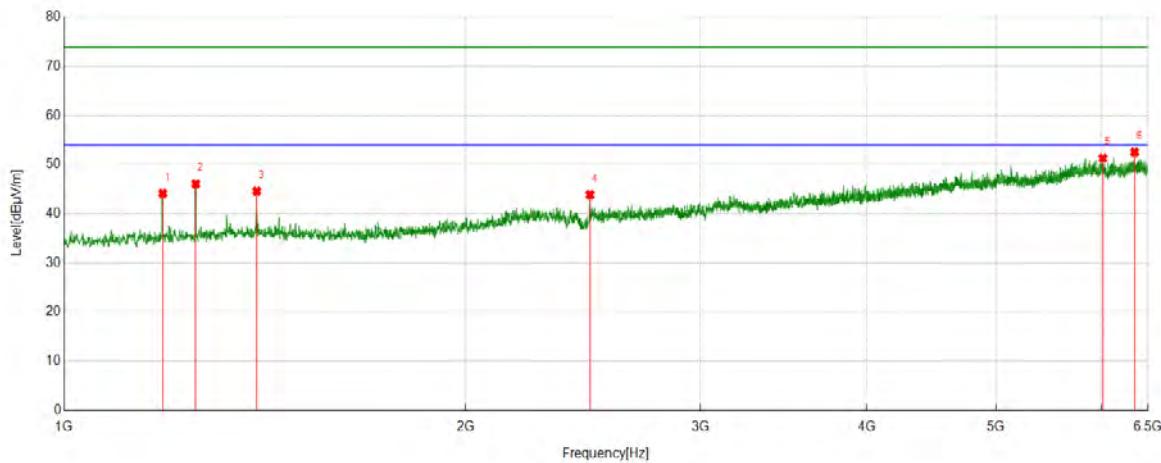

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.64	-0.86	42.78	74.00	-31.22	Horizontal
2	1394.6743	38.95	-0.43	38.52	74.00	-35.48	Horizontal
3	2237.6547	38.16	3.82	41.98	74.00	-32.02	Horizontal
4	4305.9132	36.45	9.77	46.22	74.00	-27.78	Horizontal
5	4822.9779	36.79	12.51	49.30	74.00	-24.70	Horizontal
6	5928.6161	34.83	16.49	51.32	74.00	-22.68	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS

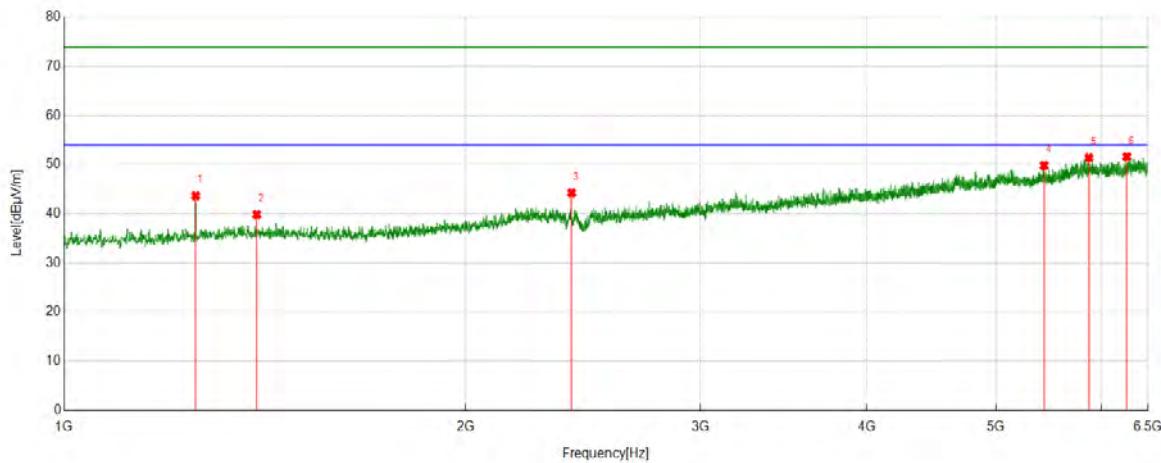

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	45.34	-1.21	44.13	74.00	-29.87	Vertical
2	1255.0944	46.94	-0.86	46.08	74.00	-27.92	Vertical
3	1394.6743	45.02	-0.43	44.59	74.00	-29.41	Vertical
4	2479.6850	39.96	3.91	43.87	74.00	-30.13	Vertical
5	6012.5016	35.51	15.81	51.32	74.00	-22.68	Vertical
6	6350.7938	34.93	17.61	52.54	74.00	-21.46	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

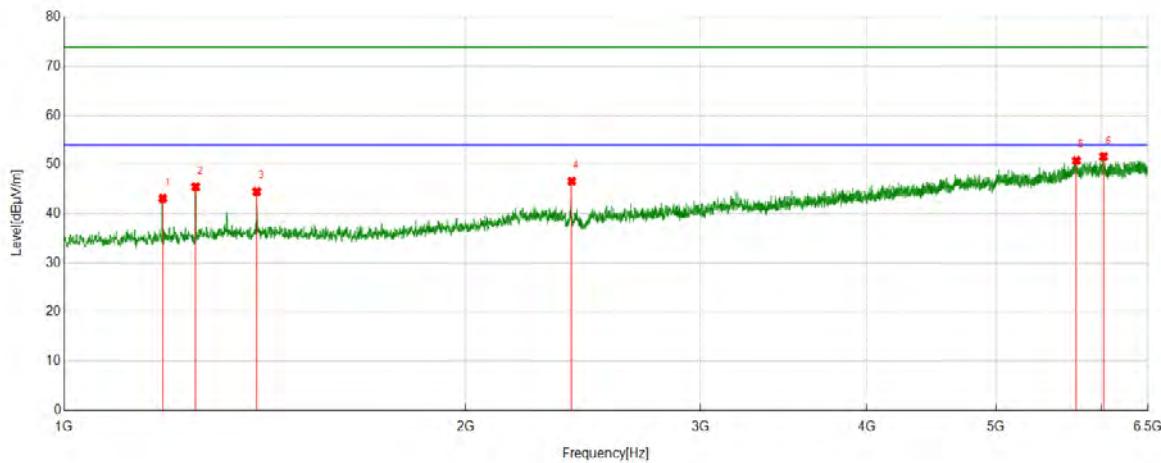
Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB <sub>uV</sub> /m]	[dB]	[dB <sub>uV</sub> /m]	[dB <sub>uV</sub> /m]	[dB]	
1	1255.0944	44.51	-0.86	43.65	74.00	-30.35	Horizontal
2	1394.6743	40.25	-0.43	39.82	74.00	-34.18	Horizontal
3	2401.9877	40.58	3.66	44.24	74.00	-29.76	Horizontal
4	5432.1790	35.18	14.62	49.80	74.00	-24.20	Horizontal
5	5868.7961	35.80	15.63	51.43	74.00	-22.57	Horizontal
6	6266.9084	34.99	16.63	51.62	74.00	-22.38	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

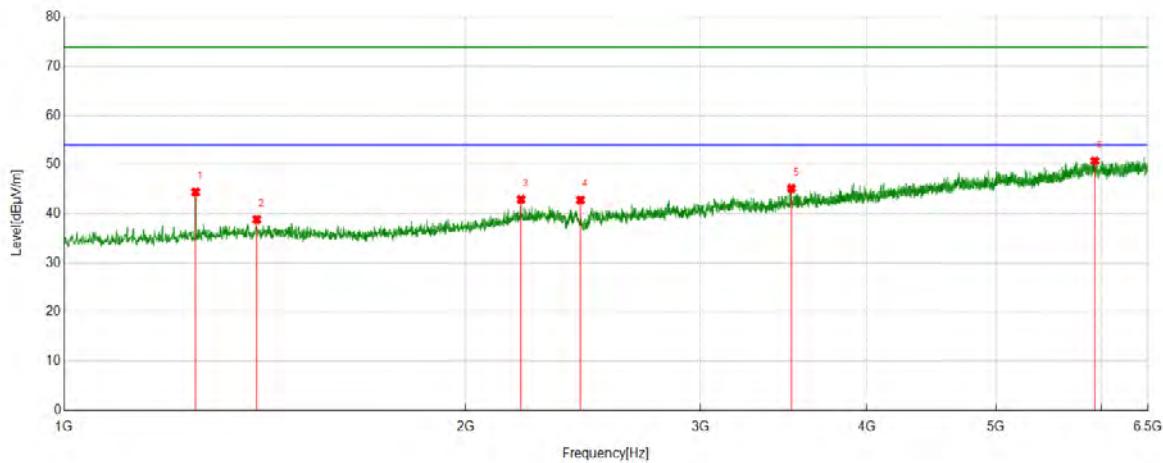
Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	44.33	-1.21	43.12	74.00	-30.88	Vertical
2	1255.0944	46.32	-0.86	45.46	74.00	-28.54	Vertical
3	1394.6743	44.93	-0.43	44.50	74.00	-29.50	Vertical
4	2402.6753	42.94	3.66	46.60	74.00	-27.40	Vertical
5	5744.3430	35.28	15.54	50.82	74.00	-23.18	Vertical
6	6018.6898	35.98	15.67	51.65	74.00	-22.35	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

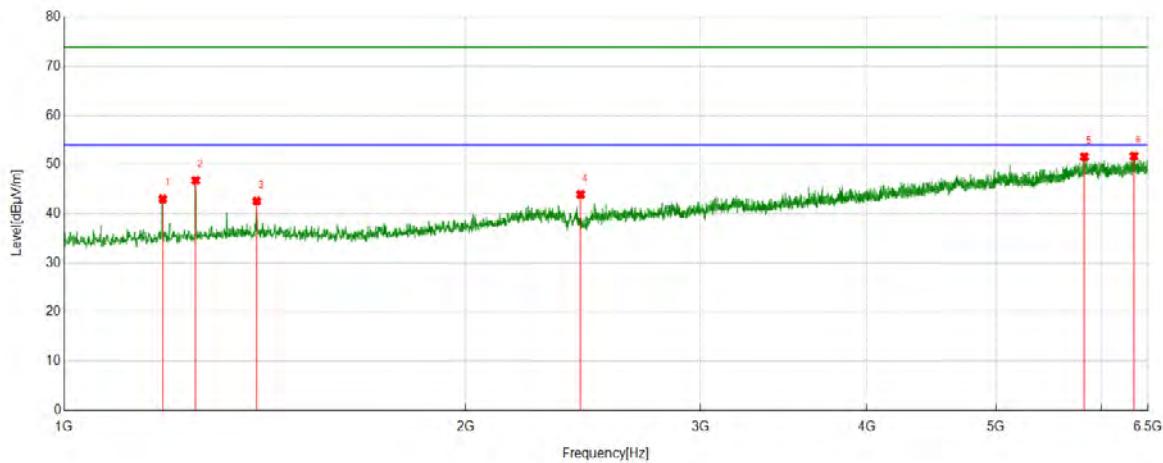
Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	45.29	-0.86	44.43	74.00	-29.57	Horizontal
2	1394.6743	39.26	-0.43	38.83	74.00	-35.17	Horizontal
3	2201.2127	39.04	3.91	42.95	74.00	-31.05	Horizontal
4	2439.1174	39.05	3.75	42.80	74.00	-31.20	Horizontal
5	3511.7515	37.78	7.36	45.14	74.00	-28.86	Horizontal
6	5929.9912	34.25	16.52	50.77	74.00	-23.23	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Vertical	PASS

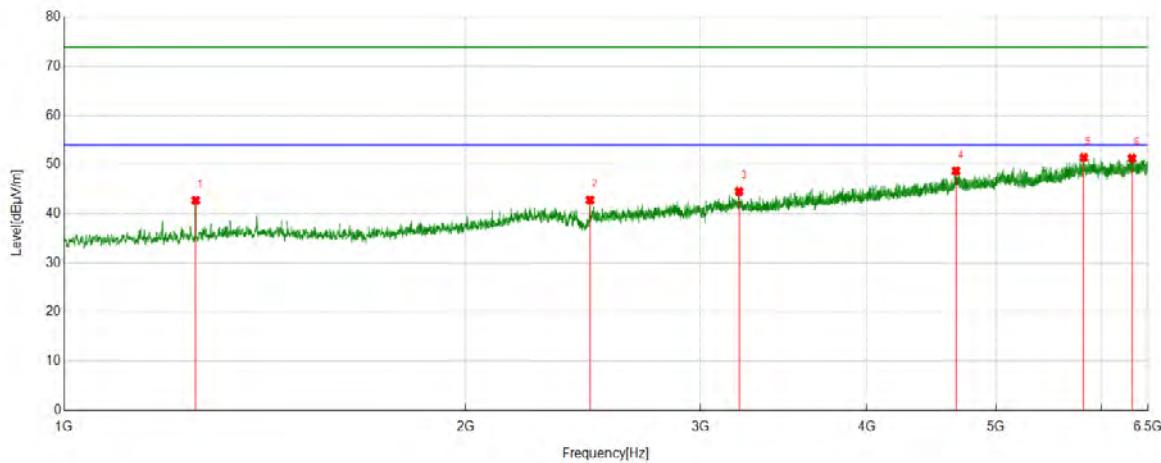

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	44.24	-1.21	43.03	74.00	-30.97	Vertical
2	1255.0944	47.65	-0.86	46.79	74.00	-27.21	Vertical
3	1394.6743	43.00	-0.43	42.57	74.00	-31.43	Vertical
4	2439.8050	40.18	3.75	43.93	74.00	-30.07	Vertical
5	5822.7278	35.02	16.58	51.60	74.00	-22.40	Vertical
6	6343.9180	34.40	17.36	51.76	74.00	-22.24	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

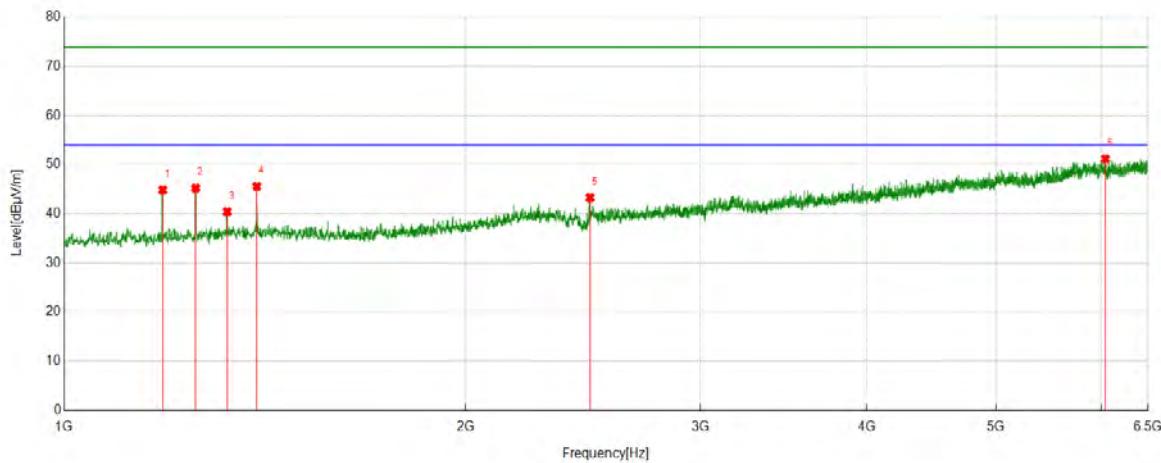
Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1255.0944	43.59	-0.86	42.73	74.00	-31.27	Horizontal
2	2479.6850	38.90	3.91	42.81	74.00	-31.19	Horizontal
3	3207.8385	38.03	6.52	44.55	74.00	-29.45	Horizontal
4	4665.5207	36.47	12.22	48.69	74.00	-25.31	Horizontal
5	5817.9147	34.97	16.47	51.44	74.00	-22.56	Horizontal
6	6322.6028	34.17	17.15	51.32	74.00	-22.68	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
4. Peak: Peak detector.  
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	1185.6482	46.03	-1.21	44.82	74.00	-29.18	Vertical
2	1255.0944	46.04	-0.86	45.18	74.00	-28.82	Vertical
3	1325.2282	40.61	-0.21	40.40	74.00	-33.60	Vertical
4	1394.6743	45.99	-0.43	45.56	74.00	-28.44	Vertical
5	2479.6850	39.38	3.91	43.29	74.00	-30.71	Vertical
6	6038.6298	35.72	15.47	51.19	74.00	-22.81	Vertical

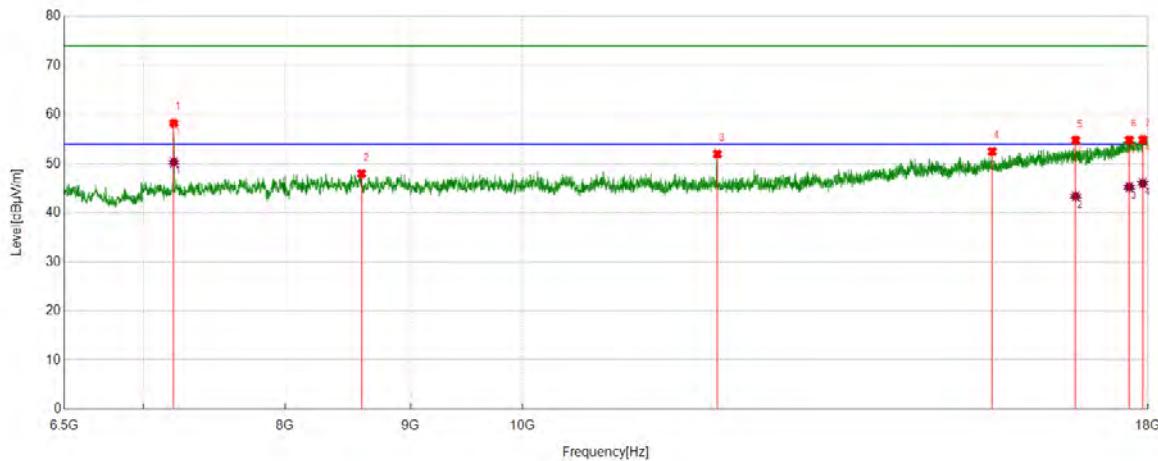
Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.
4. Peak: Peak detector.
5. For below 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for Band Reject Filter losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

## Part 2: 6.5GHz~18GHz

### HARMONICS AND SPURIOUS EMISSIONS

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Horizontal	PASS



#### PK Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7205.9007	54.15	4.11	58.26	74.00	-15.74	Horizontal
2	8596.1370	41.54	6.39	47.93	74.00	-26.07	Horizontal
3	12009.1886	44.01	7.95	51.96	74.00	-22.04	Horizontal
4	15547.3184	38.75	13.71	52.46	74.00	-21.54	Horizontal
5	16816.7896	38.02	16.79	54.81	74.00	-19.19	Horizontal
6	17685.1481	35.76	19.07	54.83	74.00	-19.17	Horizontal
7	17912.3015	34.95	19.96	54.91	74.00	-19.09	Horizontal

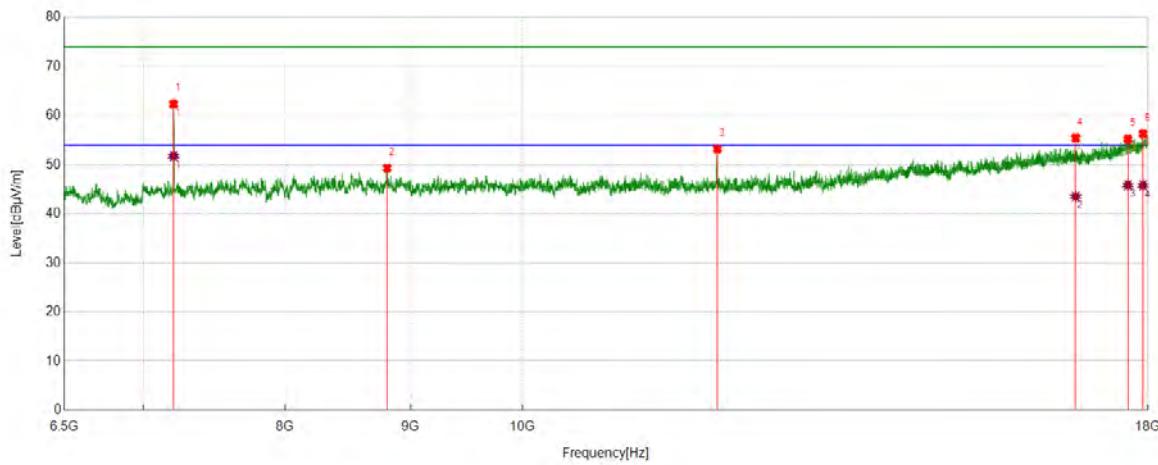
#### AV Result:

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7205.9007	46.19	4.11	50.30	54.00	-3.70	Horizontal
2	16816.7896	26.57	16.79	43.36	54.00	-10.64	Horizontal
3	17685.1481	26.16	19.07	45.23	54.00	-8.77	Horizontal
4	17912.3015	26.03	19.96	45.99	54.00	-8.01	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7204.4631	58.21	4.13	62.34	74.00	-11.66	Vertical
2	8806.0383	42.93	6.36	49.29	74.00	-24.71	Vertical
3	12009.1886	45.23	7.95	53.18	74.00	-20.82	Vertical
4	16816.7896	38.65	16.79	55.44	74.00	-18.56	Vertical
5	17663.5829	36.31	18.89	55.20	74.00	-18.80	Vertical
6	17916.6146	36.25	20.04	56.29	74.00	-17.71	Vertical

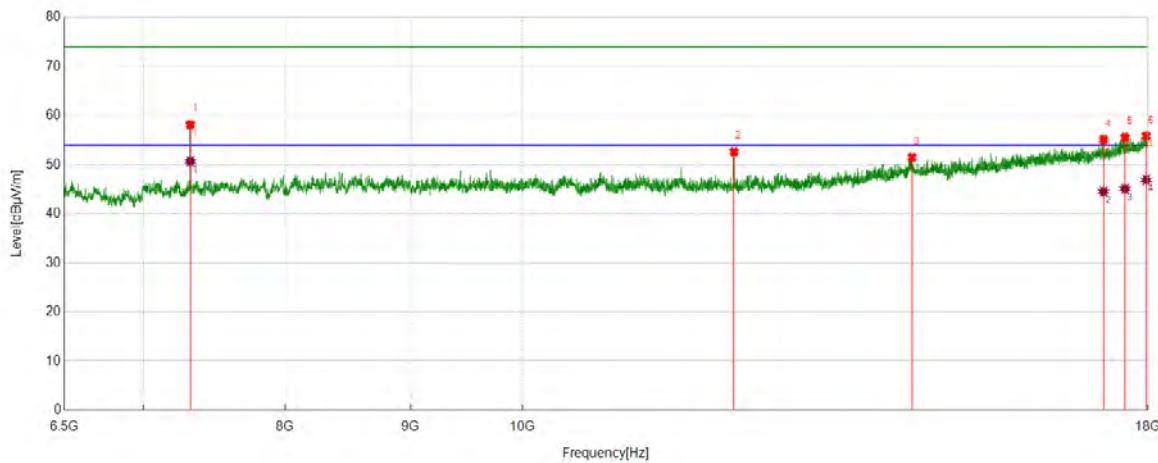
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7204.4631	47.61	4.13	51.74	54.00	-2.26	Vertical
2	16816.7896	26.72	16.79	43.51	54.00	-10.49	Vertical
3	17663.5829	26.94	18.89	45.83	54.00	-8.17	Vertical
4	17916.6146	25.73	20.04	45.77	54.00	-8.23	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS


**PK Result:**

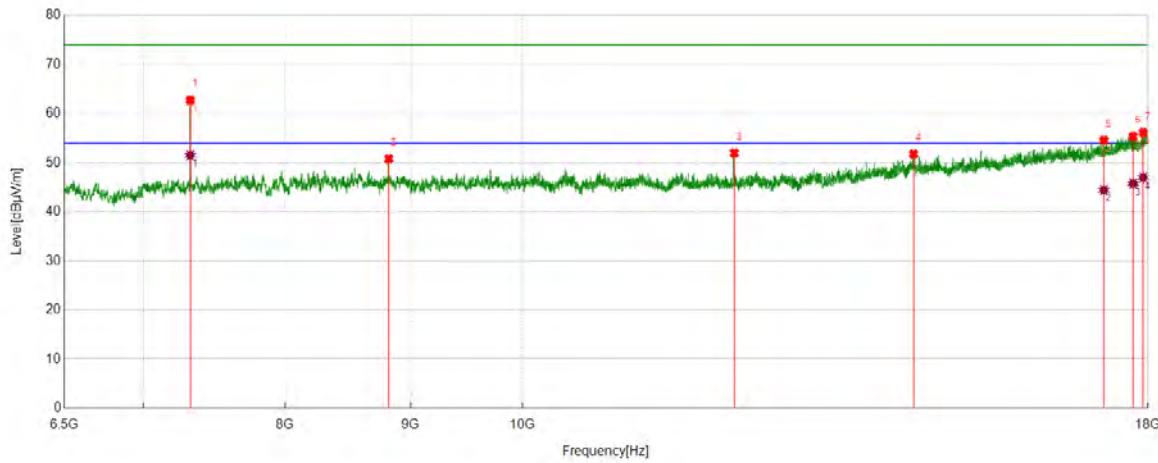
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7318.0398	54.16	3.98	58.14	74.00	-15.86	Horizontal
2	12198.9624	44.07	8.53	52.60	74.00	-21.40	Horizontal
3	14420.1775	38.46	13.04	51.50	74.00	-22.50	Horizontal
4	17262.4703	37.60	17.51	55.11	74.00	-18.89	Horizontal
5	17614.7018	36.71	18.85	55.56	74.00	-18.44	Horizontal
6	17969.8087	35.31	20.52	55.83	74.00	-18.17	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7318.0398	46.71	3.98	50.69	54.00	-3.31	Horizontal
2	17262.4703	27.03	17.51	44.54	54.00	-9.46	Horizontal
3	17614.7018	26.23	18.85	45.08	54.00	-8.92	Horizontal
4	17969.8087	26.37	20.52	46.89	54.00	-7.11	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7318.0398	58.70	3.98	62.68	74.00	-11.32	Vertical
2	8818.9774	44.47	6.31	50.78	74.00	-23.22	Vertical
3	12201.8377	43.41	8.54	51.95	74.00	-22.05	Vertical
4	14440.3050	38.73	13.01	51.74	74.00	-22.26	Vertical
5	17268.2210	37.02	17.55	54.57	74.00	-19.43	Vertical
6	17749.8437	35.73	19.61	55.34	74.00	-18.66	Vertical
7	17919.4899	36.05	20.09	56.14	74.00	-17.86	Vertical

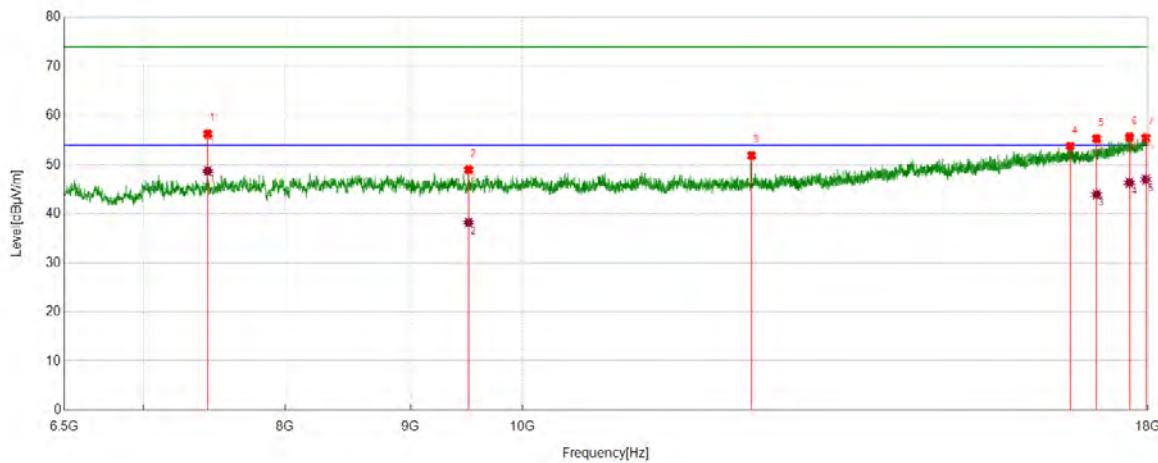
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7318.0398	47.51	3.98	51.49	54.00	-2.51	Vertical
2	17268.2210	26.88	17.55	44.43	54.00	-9.57	Vertical
3	17749.8437	26.12	19.61	45.73	54.00	-8.27	Vertical
4	17919.4899	26.86	20.09	46.95	54.00	-7.05	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7438.8049	52.04	4.21	56.25	74.00	-17.75	Horizontal
2	9506.1883	42.51	6.46	48.97	74.00	-25.03	Horizontal
3	12401.6752	43.64	8.20	51.84	74.00	-22.16	Horizontal
4	16729.0911	37.04	16.73	53.77	74.00	-20.23	Horizontal
5	17151.7690	38.13	17.17	55.30	74.00	-18.70	Horizontal
6	17689.4612	36.49	19.13	55.62	74.00	-18.38	Horizontal
7	17964.0580	34.93	20.54	55.47	74.00	-18.53	Horizontal

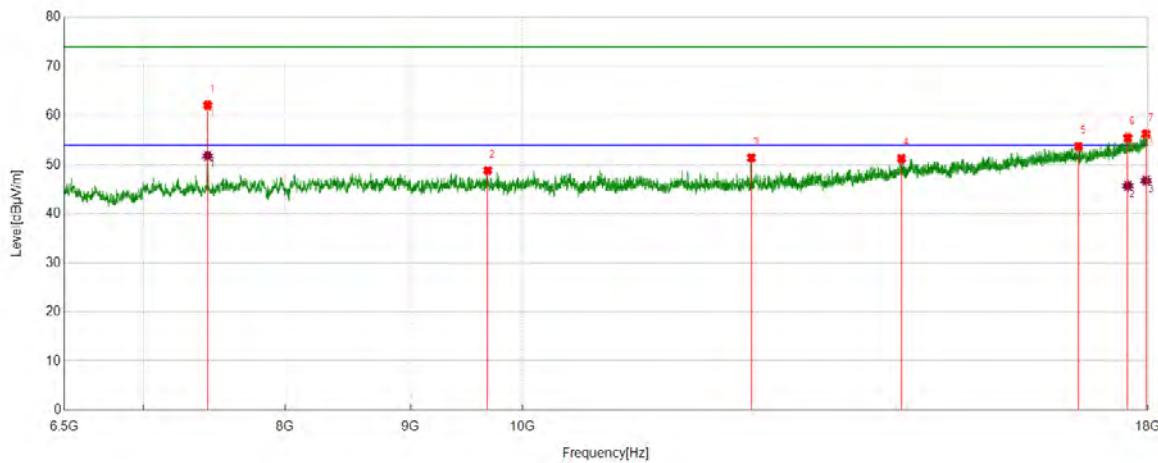
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7438.8049	44.50	4.21	48.71	54.00	-5.29	Horizontal
2	9506.1883	31.74	6.46	38.20	54.00	-15.80	Horizontal
3	17151.7690	26.75	17.17	43.92	54.00	-10.08	Horizontal
4	17689.4612	27.19	19.13	46.32	54.00	-7.68	Horizontal
5	17964.0580	26.42	20.54	46.96	54.00	-7.04	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz (refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7438.8049	57.91	4.21	62.12	74.00	-11.88	Vertical
2	9678.7098	42.36	6.44	48.80	74.00	-25.20	Vertical
3	12398.7998	43.17	8.21	51.38	74.00	-22.62	Vertical
4	14277.8472	39.04	12.18	51.22	74.00	-22.78	Vertical
5	16862.7953	36.76	16.97	53.73	74.00	-20.27	Vertical
6	17662.1453	36.62	18.88	55.50	74.00	-18.50	Vertical
7	17966.9334	35.73	20.53	56.26	74.00	-17.74	Vertical

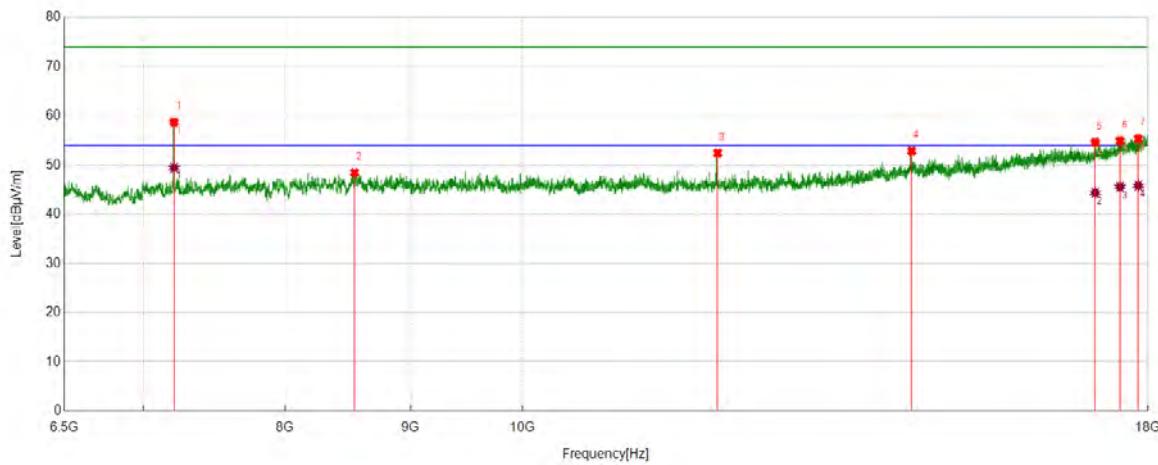
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7438.8049	47.57	4.21	51.78	54.00	-2.22	Vertical
2	17662.1453	26.81	18.88	45.69	54.00	-8.31	Vertical
3	17966.9334	26.21	20.53	46.74	54.00	-7.26	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7207.3384	54.61	4.10	58.71	74.00	-15.29	Horizontal
2	8540.0675	42.11	6.31	48.42	74.00	-25.58	Horizontal
3	12012.0640	44.44	7.95	52.39	74.00	-21.61	Horizontal
4	14415.8645	39.79	13.02	52.81	74.00	-21.19	Horizontal
5	17128.7661	37.33	17.27	54.60	74.00	-19.40	Horizontal
6	17532.7541	36.50	18.44	54.94	74.00	-19.06	Horizontal
7	17836.1045	35.55	19.79	55.34	74.00	-18.66	Horizontal

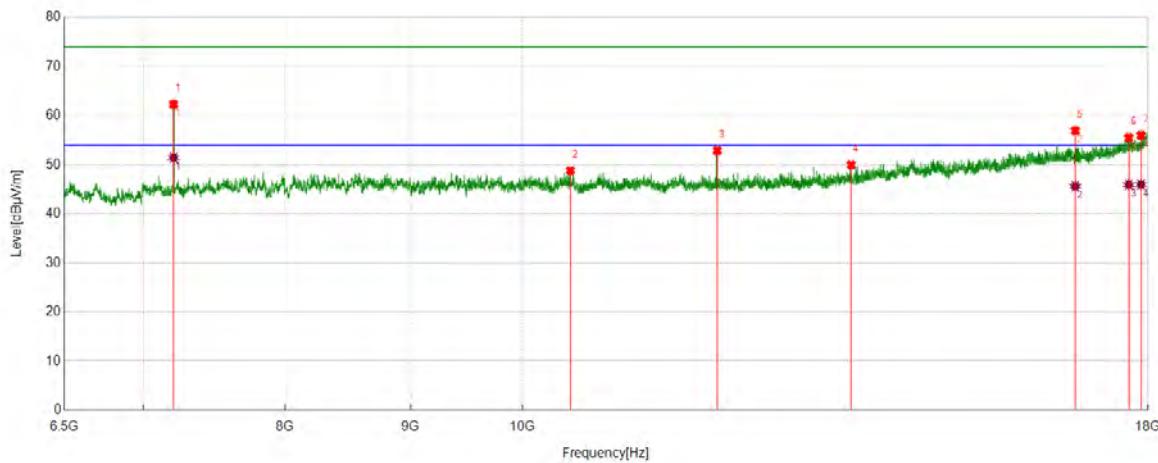
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7207.3384	45.32	4.10	49.42	54.00	-4.58	Horizontal
2	17128.7661	27.09	17.27	44.36	54.00	-9.64	Horizontal
3	17532.7541	27.13	18.44	45.57	54.00	-8.43	Horizontal
4	17836.1045	26.02	19.79	45.81	54.00	-8.19	Horizontal

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	LCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7204.4631	58.15	4.13	62.28	74.00	-11.72	Vertical
2	10459.3699	41.90	6.87	48.77	74.00	-25.23	Vertical
3	12007.7510	44.85	7.98	52.83	74.00	-21.17	Vertical
4	13617.9522	39.44	10.55	49.99	74.00	-24.01	Vertical
5	16811.0389	39.95	16.95	56.90	74.00	-17.10	Vertical
6	17677.9597	36.52	18.99	55.51	74.00	-18.49	Vertical
7	17882.1103	36.15	19.82	55.97	74.00	-18.03	Vertical

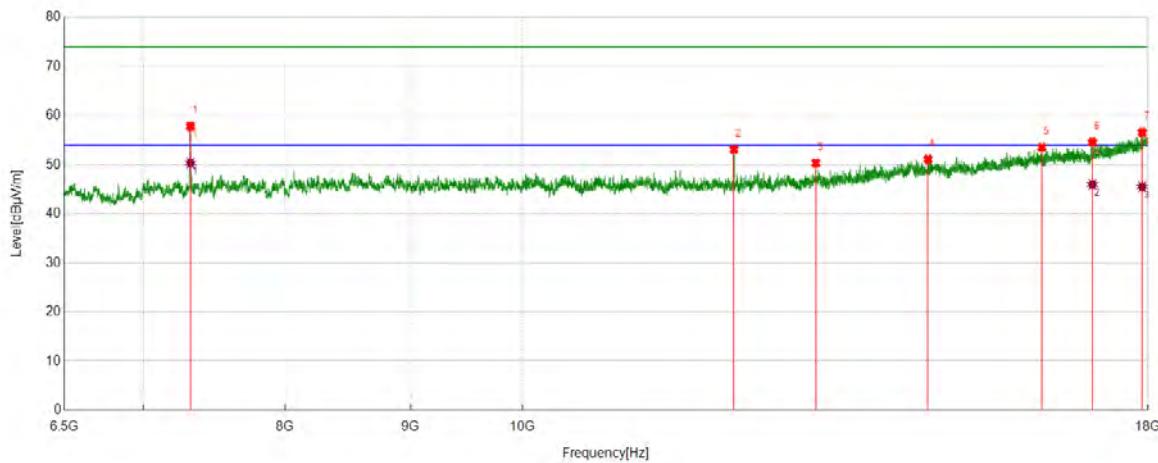
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7204.4631	47.28	4.13	51.41	54.00	-2.59	Vertical
2	16811.0389	28.66	16.95	45.61	54.00	-8.39	Vertical
3	17677.9597	26.92	18.99	45.91	54.00	-8.09	Vertical
4	17882.1103	26.12	19.82	45.94	54.00	-8.06	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Horizontal	PASS


**PK Result:**

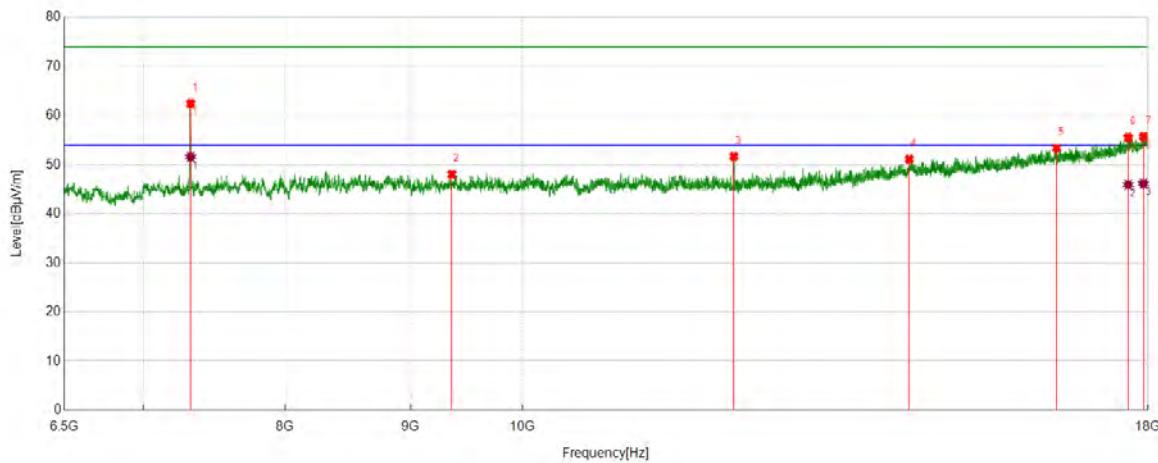
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7319.4774	53.82	3.97	57.79	74.00	-16.21	Horizontal
2	12197.5247	44.57	8.52	53.09	74.00	-20.91	Horizontal
3	13173.7092	40.72	9.61	50.33	74.00	-23.67	Horizontal
4	14638.7048	38.52	12.59	51.11	74.00	-22.89	Horizontal
5	16292.0365	38.25	15.28	53.53	74.00	-20.47	Horizontal
6	17084.1980	37.61	16.98	54.59	74.00	-19.41	Horizontal
7	17902.2378	36.75	19.81	56.56	74.00	-17.44	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7319.4774	46.37	3.97	50.34	54.00	-3.66	Horizontal
2	17084.1980	28.98	16.98	45.96	54.00	-8.04	Horizontal
3	17902.2378	25.69	19.81	45.50	54.00	-8.50	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	MCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7320.9151	58.48	3.96	62.44	74.00	-11.56	Vertical
2	9358.1073	41.59	6.41	48.00	74.00	-26.00	Vertical
3	12197.5247	43.15	8.52	51.67	74.00	-22.33	Vertical
4	14382.7978	38.36	12.76	51.12	74.00	-22.88	Vertical
5	16519.1899	36.69	16.66	53.35	74.00	-20.65	Vertical
6	17667.8960	36.62	18.91	55.53	74.00	-18.47	Vertical
7	17922.3653	35.57	20.12	55.69	74.00	-18.31	Vertical

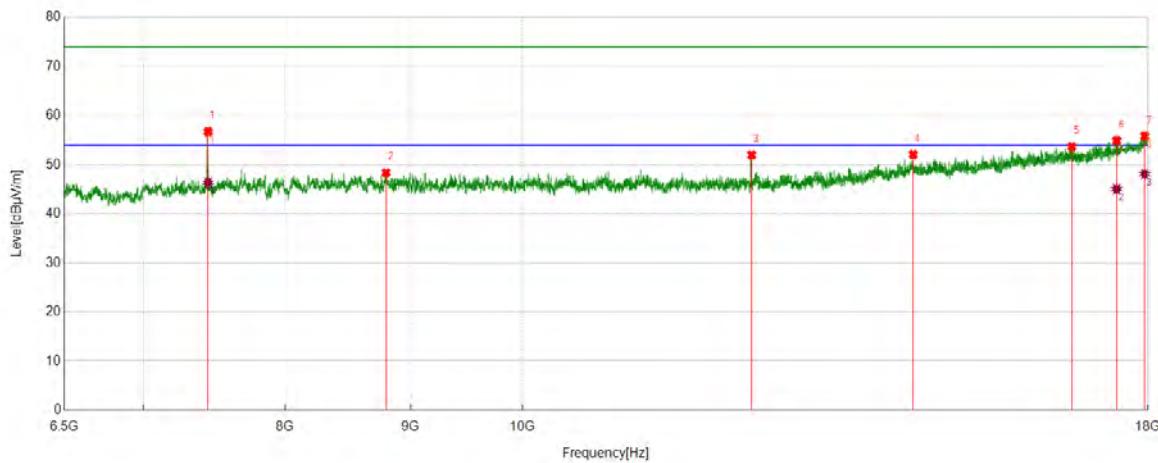
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7320.9151	47.62	3.96	51.58	54.00	-2.42	Vertical
2	17667.8960	27.01	18.91	45.92	54.00	-8.08	Vertical
3	17922.3653	26.02	20.12	46.14	54.00	-7.86	Vertical

Note:

1. Measurement = Reading Level + Correct Factor.
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Horizontal	PASS


**PK Result:**

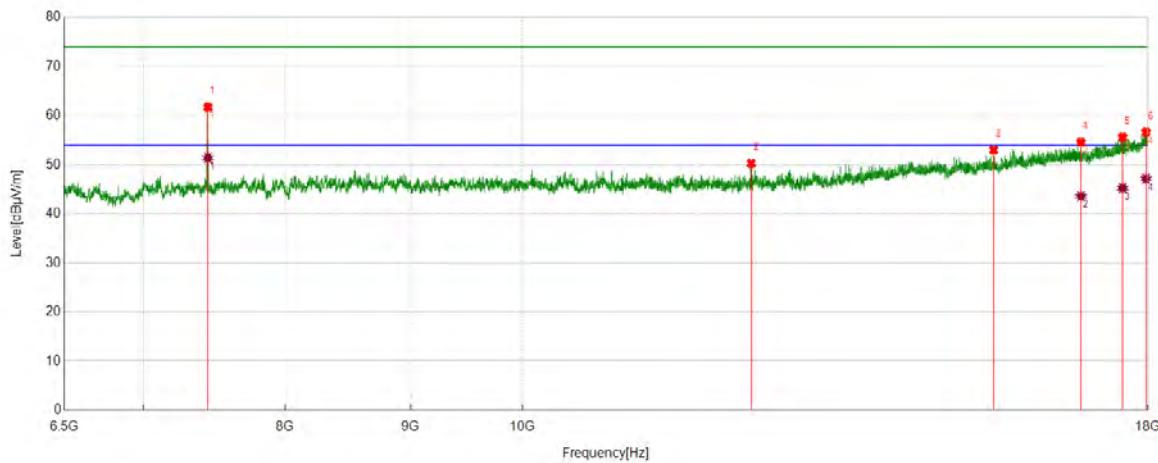
No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7441.6802	52.52	4.18	56.70	74.00	-17.30	Horizontal
2	8795.9745	42.05	6.30	48.35	74.00	-25.65	Horizontal
3	12403.1129	43.76	8.22	51.98	74.00	-22.02	Horizontal
4	14435.9920	39.07	13.00	52.07	74.00	-21.93	Horizontal
5	16756.4071	36.88	16.78	53.66	74.00	-20.34	Horizontal
6	17476.6846	36.50	18.42	54.92	74.00	-19.08	Horizontal
7	17946.8059	35.42	20.41	55.83	74.00	-18.17	Horizontal

**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7441.6802	42.19	4.18	46.37	54.00	-9.86	Horizontal
2	17476.6846	26.61	18.42	45.03	54.00	-8.58	Horizontal
3	17946.8059	27.66	20.41	48.07	54.00	-7.83	Horizontal

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 2M	HCH	Vertical	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7440.2425	57.50	4.20	61.70	74.00	-12.30	Vertical
2	12397.3622	42.03	8.23	50.26	74.00	-23.74	Vertical
3	15568.8836	39.42	13.53	52.95	74.00	-21.05	Vertical
4	16901.6127	37.98	16.60	54.58	74.00	-19.42	Vertical
5	17575.8845	36.84	18.75	55.59	74.00	-18.41	Vertical
6	17966.9334	36.10	20.53	56.63	74.00	-17.37	Vertical

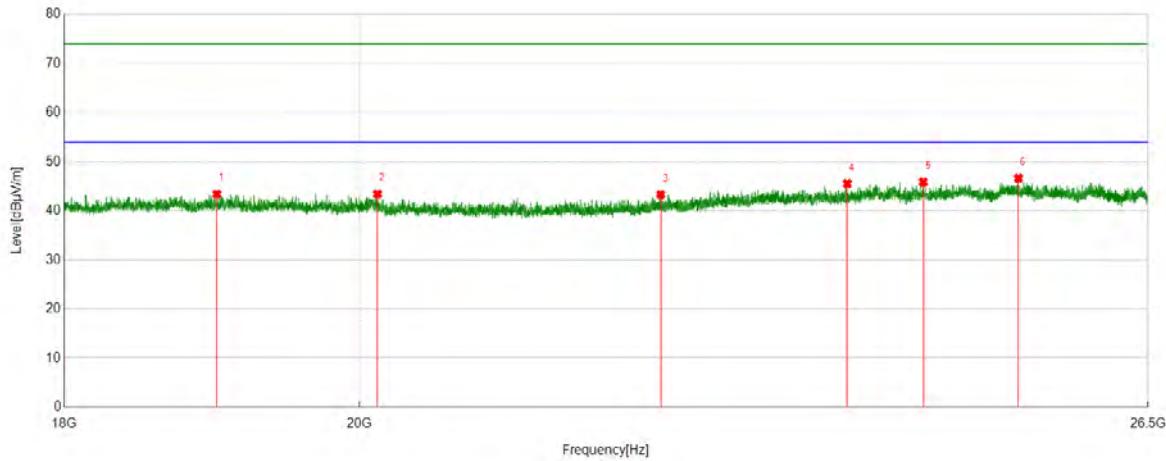
**AV Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	7440.2425	47.18	4.20	51.38	54.00	-2.62	Vertical
2	16901.6127	26.97	16.60	43.57	54.00	-10.43	Vertical
3	17575.8845	26.49	18.75	45.24	54.00	-8.76	Vertical
4	17966.9334	26.58	20.53	47.11	54.00	-6.89	Vertical

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If peak result complies with AV limit, AV Result is deemed to comply with AV limit.  
3. Peak result: Peak detector, RBW: 1 MHz, VBW: 3 MHz.  
4. Average result: Peak detector, RBW: 1 MHz, VBW: 1/T MHz(refer to clause 7.1.).  
5. For above 3GHz part, filter losses were only considered in the spurious frequency bands and the authorized band was not corrected for HPF losses.  
6. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 3: 18GHz~26.5GHz
**SPURIOUS EMISSIONS 18GHz ~ 26.5GHz (WORST-CASE CONFIGURATION)**

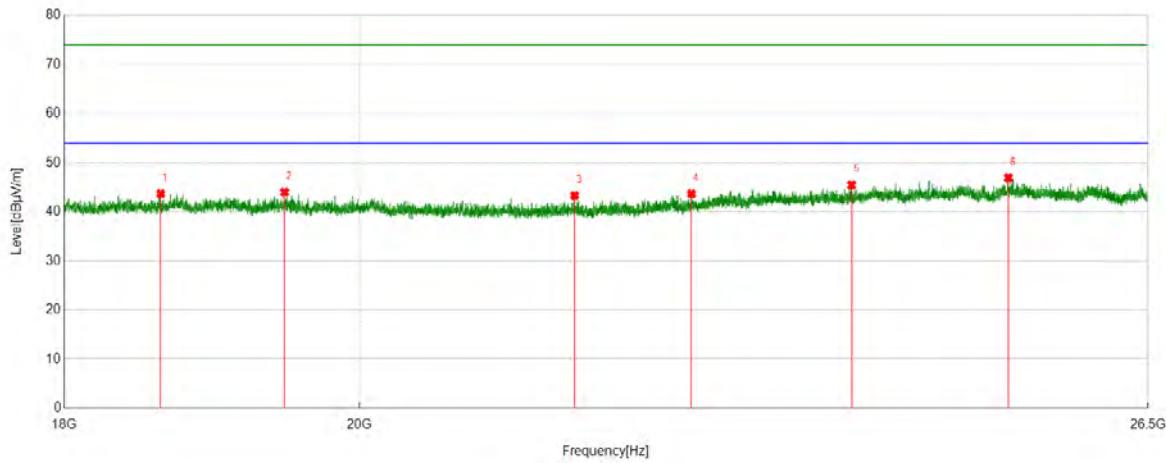
Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS


**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	19008.2008	49.45	-6.07	43.38	74.00	-30.62	Horizontal
2	20129.4629	48.59	-5.20	43.39	74.00	-30.61	Horizontal
3	22270.8271	48.53	-5.24	43.29	74.00	-30.71	Horizontal
4	23803.5304	48.45	-2.91	45.54	74.00	-28.46	Horizontal
5	24458.0958	48.80	-2.96	45.84	74.00	-28.16	Horizontal
6	25302.2302	49.93	-3.32	46.61	74.00	-27.39	Horizontal

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

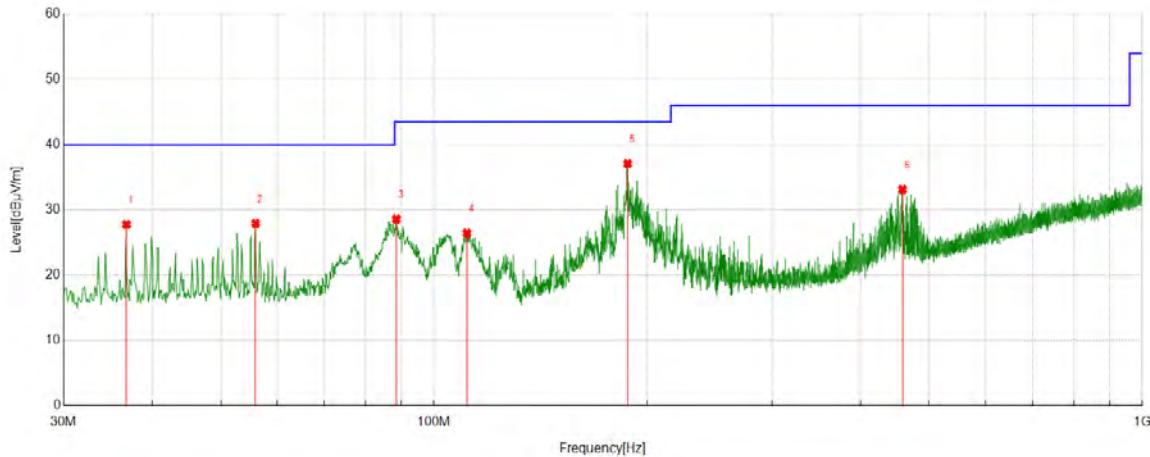

**PK Result:**

No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	18631.6132	50.06	-6.38	43.68	74.00	-30.32	Vertical
2	19473.1973	49.47	-5.48	43.99	74.00	-30.01	Vertical
3	21596.7097	49.09	-5.80	43.29	74.00	-30.71	Vertical
4	22516.5016	48.31	-4.65	43.66	74.00	-30.34	Vertical
5	23840.9341	48.32	-2.86	45.46	74.00	-28.54	Vertical
6	25212.1212	50.26	-3.39	46.87	74.00	-27.13	Vertical

Note: 1. If Peak Result complies with AV limit, AV Result is deemed to comply with AV limit.  
2. Test setup: RBW: 1 MHz, VBW: 3 MHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.  
4. Only the worst case emission was recorded, if it complies with the limit, the other emissions deemed to comply with the limit.

Part 4: 30MHz~1GHz
**SPURIOUS EMISSIONS 30MHz ~ 1GHz (WORST-CASE CONFIGURATION)**

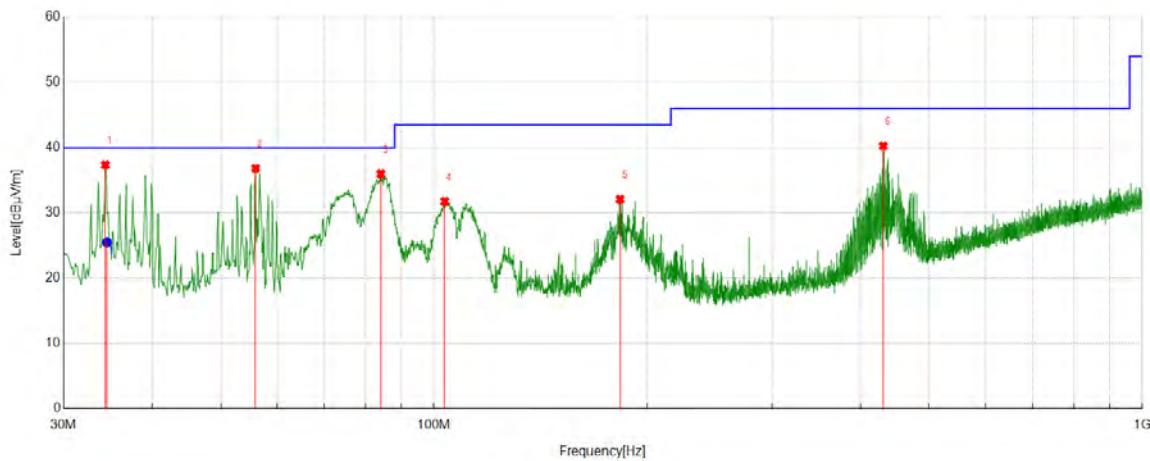
Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Horizontal	PASS



No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	
1	36.7907	8.55	19.21	27.76	40.00	-12.24	Peak
2	55.9986	7.56	20.36	27.92	40.00	-12.08	Peak
3	88.4968	14.30	14.30	28.60	43.50	-14.90	Peak
4	111.2941	9.23	17.20	26.43	43.50	-17.07	Peak
5	187.6408	19.18	17.91	37.09	43.50	-6.41	Peak
6	458.5889	7.95	25.16	33.11	46.00	-12.89	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Test Mode	Channel	Polarization	Verdict
BLE 1M	MCH	Vertical	PASS

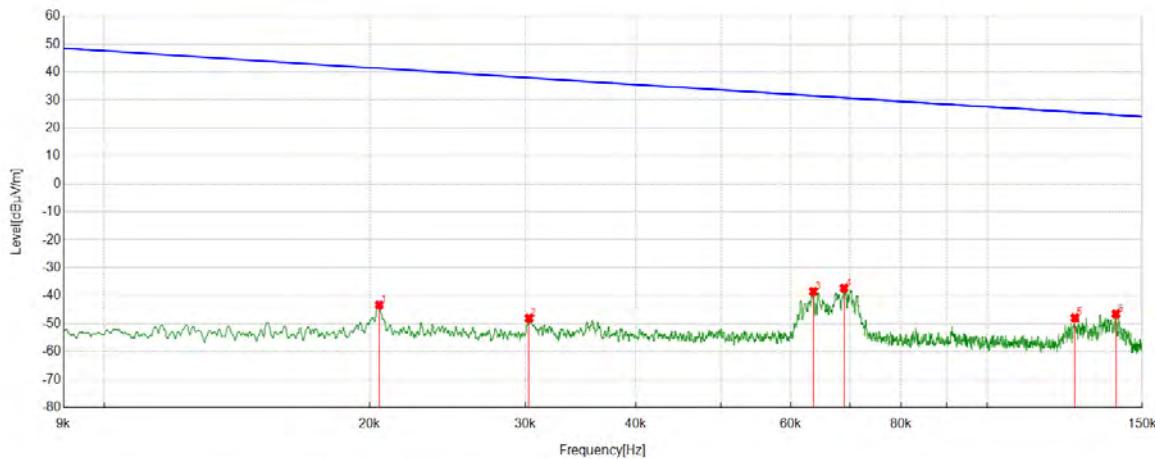


No.	Frequency	Reading Level	Correct Factor	Result	Limit	Margin	Remark
	[MHz]	[dB <sub>UV</sub> /m]	[dB]	[dB <sub>UV</sub> /m]	[dB <sub>UV</sub> /m]	[dB]	
1	34.5347	6.59	18.89	25.48	40.00	-14.52	QP
2	55.9986	16.46	20.36	36.82	40.00	-3.18	Peak
3	84.1314	21.40	14.58	35.98	40.00	-4.02	Peak
4	103.5334	15.58	16.18	31.76	43.50	-11.74	Peak
5	183.0813	13.62	18.46	32.08	43.50	-11.42	Peak
6	430.7471	15.64	24.62	40.26	46.00	-5.74	Peak

Note: 1. If Peak Result complies with QP limit, QP Result is deemed to comply with QP limit.  
2. Test setup: RBW: 120 kHz, VBW: 300 kHz, Sweep time: auto.  
3. Measurement = Reading Level + Correct Factor.

Part 5: 9kHz~30MHz
**SPURIOUS EMISSIONS 9kHz ~ 30MHz (WORST CASE CONFIGURATION-FACE ON)**

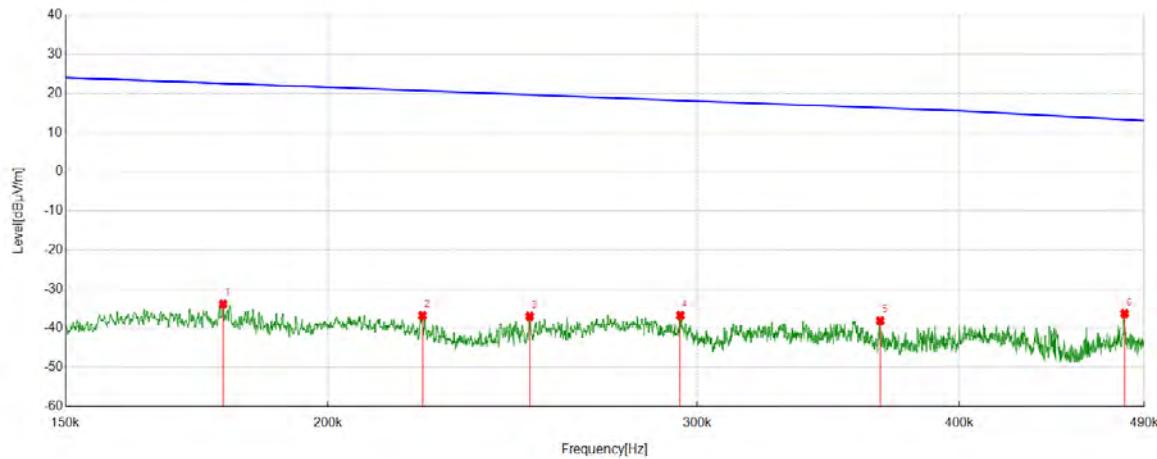
Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	9kHz~150kHz	PASS



No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dBuA/m]	[dBuA/m]	[dB]	
1	0.0205	18.44	-61.74	-43.30	41.38	-94.80	-10.12	-84.68	Peak
2	0.0303	13.59	-61.60	-48.01	37.98	-99.51	-13.52	-85.99	Peak
3	0.0636	23.11	-61.61	-38.50	31.53	-90.00	-19.97	-70.03	Peak
4	0.0689	24.31	-61.61	-37.30	30.84	-88.80	-20.66	-68.14	Peak
5	0.1258	13.83	-61.72	-47.89	25.61	-99.39	-25.89	-73.50	Peak
6	0.1400	15.16	-61.73	-46.57	24.68	-98.07	-26.82	-71.25	Peak

Note: 1. Measurement = Reading Level + Correct Factor.  
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.  
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	150kHz~490kHz	PASS

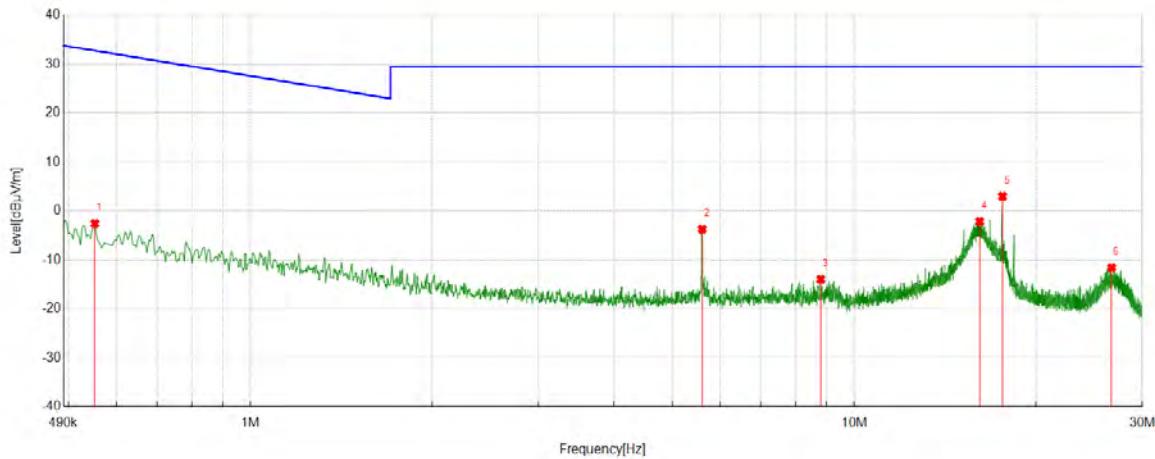


No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dBuA/m]	[dBuA/m]	[dB]	
1	0.1783	27.96	-61.76	-33.80	22.58	-85.30	-28.92	-56.38	Peak
2	0.2219	25.01	-61.78	-36.77	20.68	-88.27	-30.82	-57.45	Peak
3	0.2496	24.87	-61.79	-36.92	19.66	-88.42	-31.84	-56.58	Peak
4	0.2945	25.10	-61.82	-36.72	18.22	-88.22	-33.28	-54.94	Peak
5	0.3667	23.72	-61.83	-38.11	16.32	-89.61	-35.18	-54.43	Peak
6	0.4795	25.62	-61.88	-36.26	13.35	-87.76	-38.15	-49.61	Peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

Test Mode	Channel	Frequency Range	Verdict
BLE 1M	MCH	490kHz~30MHz	PASS



No.	Frequency	Reading Level	Correct Factor	FCC Result	FCC Limit	ISED Result	ISED Limit	Margin	Remark
	[MHz]	[dBuV/m]	[dB]	[dBuV/m]	[dBuV/m]	[dBuA/m]	[dBuA/m]	[dB]	
1	0.5520	19.32	-21.89	-2.57	32.76	-54.07	-18.74	-35.33	Peak
2	5.5987	18.09	-21.83	-3.74	29.54	-55.24	-21.96	-33.28	Peak
3	8.7979	7.68	-21.67	-13.99	29.54	-65.49	-21.96	-43.53	Peak
4	16.1289	19.36	-21.54	-2.18	29.54	-53.68	-21.96	-31.72	Peak
5	17.5987	24.48	-21.51	2.97	29.54	-48.53	-21.96	-26.57	Peak
6	26.6886	10.02	-21.64	-11.62	29.54	-63.12	-21.96	-41.16	Peak

Note:

1. Measurement = Reading Level + Correct Factor.
2. If Peak Result complies with AV and QP limit, AV and QP Result are deemed to comply with AV limit.
3. All 3 polarizations(Horizontal, Face-on and Face-off) of the loop antenna had been tested, but only the worst data recorded in the report.

## 9. AC POWER LINE CONDUCTED EMISSIONS

### LIMITS

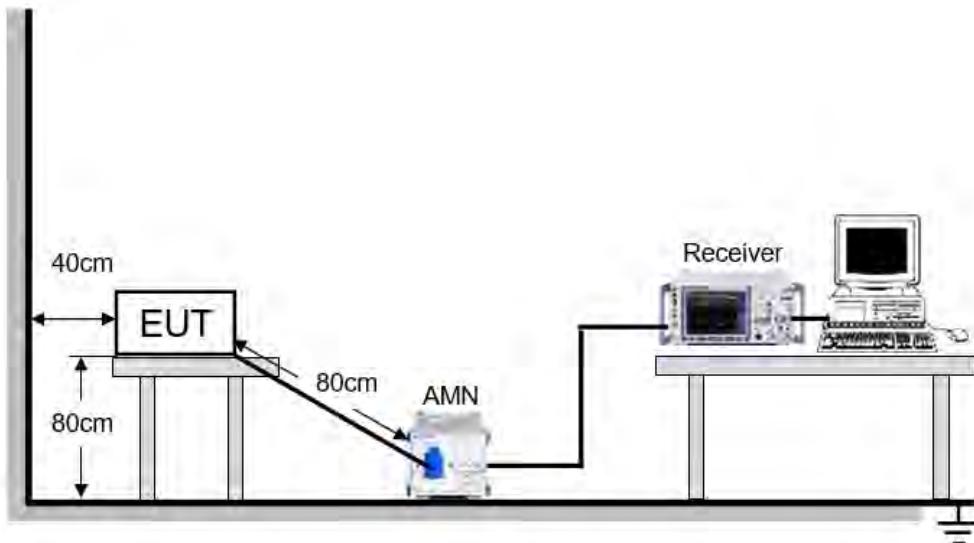
Please refer to FCC §15.207 (a)

FREQUENCY (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15 -0.5	66 - 56 *	56 - 46 *
0.50 -5.0	56.00	46.00
5.0 -30.0	60.00	50.00

### TEST ENVIRONMENT

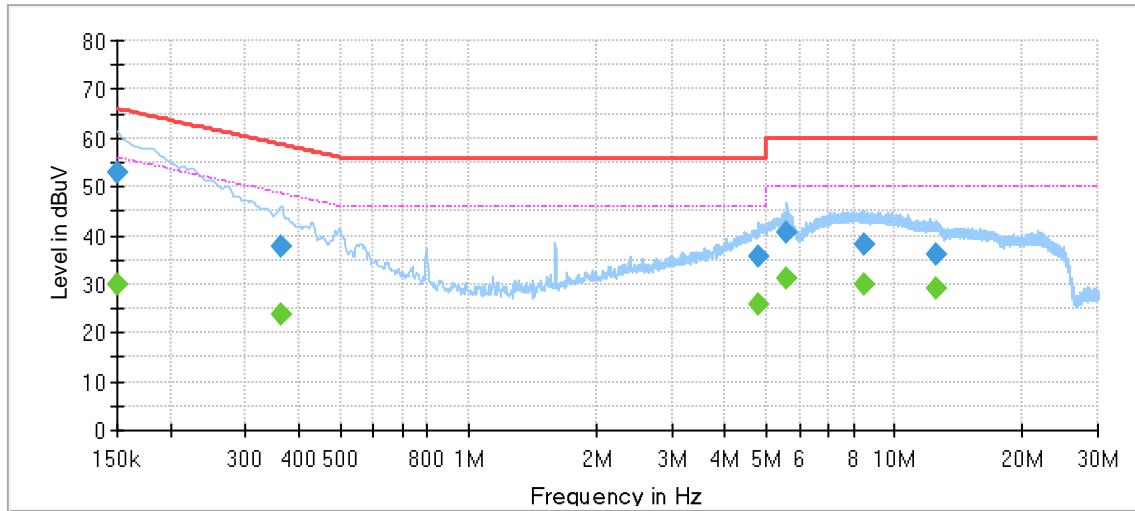
Temperature	22°C	Relative Humidity	56%
Atmosphere Pressure	101kPa	Test Voltage	AC 120V

### TEST SETUP AND PROCEDURE



The EUT is put on a table of non-conducting material that is 12 mm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through an Artificial Mains Network (A.M.N.). A EMI Measurement Receiver (R&S Test Receiver ESR3) is used to test the emissions from both sides of AC line. According to the requirements in Section 6.2 of ANSI C63.10-2013. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode. The bandwidth of EMI test receiver is set at 9kHz.

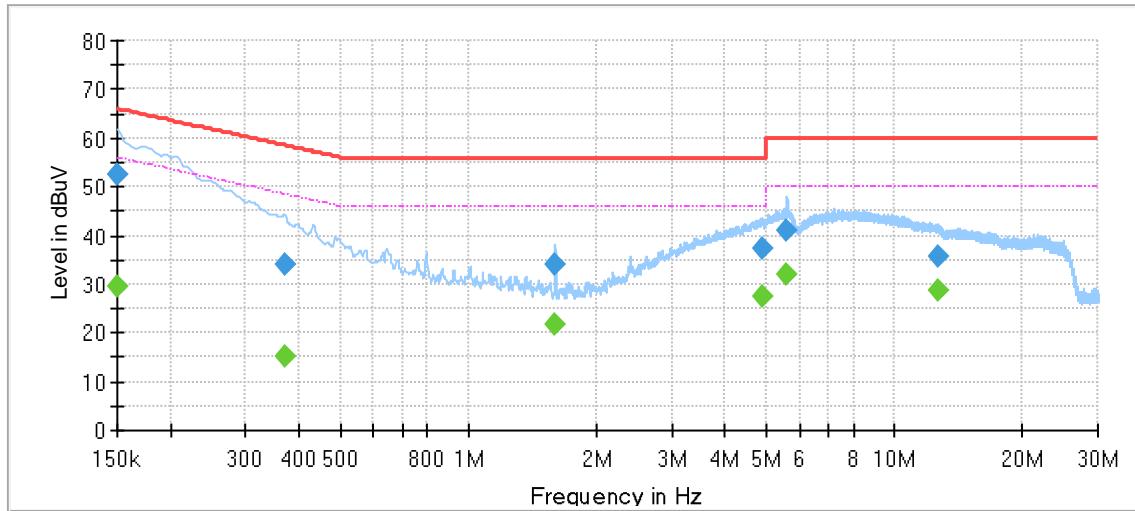
The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application.

LINE L RESULTS (WORST-CASE CONFIGURATION)

**Final Result**

Frequency [MHz]	QuasiPeak [dBµV]	Average [dBµV]	Limit [dBµV]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.150000	---	30.08	56.00	25.92	1500.0	9.000	L1	OFF	9.6
0.150000	53.03	---	66.00	12.97	1500.0	9.000	L1	OFF	9.6
0.363925	---	23.87	48.64	24.77	1500.0	9.000	L1	OFF	9.6
0.363925	37.65	---	58.64	20.99	1500.0	9.000	L1	OFF	9.6
4.799138	---	25.67	46.00	20.33	1500.0	9.000	L1	OFF	9.7
4.799138	35.70	---	56.00	20.30	1500.0	9.000	L1	OFF	9.7
5.597625	---	31.32	50.00	18.68	1500.0	9.000	L1	OFF	9.7
5.597625	40.57	---	60.00	19.43	1500.0	9.000	L1	OFF	9.7
8.517950	---	30.03	50.00	19.97	1500.0	9.000	L1	OFF	9.8
8.517950	38.03	---	60.00	21.97	1500.0	9.000	L1	OFF	9.8
12.458150	---	29.01	50.00	20.99	1500.0	9.000	L1	OFF	9.8
12.458150	36.06	---	60.00	23.94	1500.0	9.000	L1	OFF	9.8

Note:

1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels and find the MCH of BLE 1M which is the worst case, so only the worst case is included in this test report.

LINE N RESULTS (WORST-CASE CONFIGURATION)

**Final Result**

Frequency [MHz]	QuasiPeak [dB $\mu$ V]	Average [dB $\mu$ V]	Limit [dB $\mu$ V]	Margin [dB]	Meas. Time [ms]	Bandwidth [kHz]	Line	Filter	Corr. [dB]
0.150000	---	29.67	56.00	26.33	1500.0	9.000	N	OFF	9.5
0.150000	52.61	---	66.00	13.39	1500.0	9.000	N	OFF	9.5
0.371388	---	15.33	48.47	33.14	1500.0	9.000	N	OFF	9.6
0.371388	33.96	---	58.47	24.51	1500.0	9.000	N	OFF	9.6
1.597725	---	21.75	46.00	24.25	1500.0	9.000	N	OFF	9.6
1.597725	34.22	---	56.00	21.78	1500.0	9.000	N	OFF	9.6
4.893663	---	27.56	46.00	18.44	1500.0	9.000	N	OFF	9.6
4.893663	37.39	---	56.00	18.61	1500.0	9.000	N	OFF	9.6
5.600113	---	32.03	50.00	17.97	1500.0	9.000	N	OFF	9.7
5.600113	40.93	---	60.00	19.07	1500.0	9.000	N	OFF	9.7
12.716850	---	28.67	50.00	21.33	1500.0	9.000	N	OFF	9.8
12.716850	35.83	---	60.00	24.18	1500.0	9.000	N	OFF	9.8

Note:

1. If QP Result complies with AV limit, AV Result is deemed to comply with AV limit.
2. Test setup: RBW: 200 Hz (9 kHz—150 kHz), 9 kHz (150 kHz—30 MHz).
3. Step size: 80Hz (0.009MHz-0.15MHz), 4 kHz (0.15MHz-30MHz), Scan time: auto.
4. The extension cord/outlet strip was calibrated with the LISN as required by ANSI C63.10:2013 Clause 6.2.2.
5. Pre-testing all test modes and channels and find the HCH of BLE 1M which is the worst case, so only the worst case is included in this test report.

## 10. ANTENNA REQUIREMENTS

### APPLICABLE REQUIREMENTS

Please refer to FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Please refer to FCC §15.247(b)(4)

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### ANTENNA GAIN

The antenna gain of EUT is less than 6 dBi

**END OF REPORT**