

**FCC TEST REPORT**

**FCC 47 CFR Part 15C**  
**Industry Canada RSS-210**

**Operation within the 13.110 – 14.010 MHz band**

**Report Reference No.** ..... : G0M-1510-5134-TFC225RI-V01

**Testing Laboratory** ..... : Eurofins Product Service GmbH

Address ..... : Storkower Str. 38c  
15526 Reichenwalde  
Germany

Accreditation ..... :



A2LA Accredited Testing Laboratory, Certificate No.: 1983.01  
FCC Filed Test Laboratory, Reg.-No.: 96970  
IC OATS Filing assigned code: 3470A

**Applicant's name** ..... : EMKA Beschlagteile GmbH & Co. KG

Address ..... : Langenberger Straße 32  
42551 Velbert  
GERMANY

**Test specification:**

Standard ..... : 47 CFR Part 15C  
RSS-210, Issue 8, 2010-12  
RSS-Gen, Issue 4, 2014-11  
ANSI C63.4:2014

Test scope ..... : complete Radio compliance test

**Equipment under test (EUT):**

Product description	AgentE USA/SGP	
Model No.	3000-U902-4X	
Additional Model(s)	None	
Brand Name(s)	EMKA	
Hardware version	901.343B001	
Firmware / Software version	350000091	
	FCC-ID: 2AGCT-U9024X	IC: N/A
<b>Test result</b>	<b>Passed</b>	

**Possible test case verdicts:**

- neither assessed nor tested ..... : N/N
- required by standard but not appl. to test object ..... : N/A
- required by standard but not tested ..... : N/T
- not required by standard for the test object ..... : N/R
- test object does meet the requirement ..... : P (Pass)
- test object does not meet the requirement ..... : F (Fail)

**Testing:**

Test Lab Temperature ..... : 20 – 23 °C

Test Lab Humidity ..... : 32 – 38 %

Date of receipt of test item ..... : 2015-10-27

Date (s) of performance of tests ..... : 2015-10-28

Compiled by ..... : Burkhard Pudell

Tested by (+ signature) ..... : Burkhard Pudell  
(Responsible for Test)



Approved by (+ signature) ..... : Christian Weber  
(Head of Lab)

Date of issue ..... : 2015-11-18

Total number of pages ..... : 29

**General remarks:**

**The test results presented in this report relate only to the object tested.**

**The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

**Additional comments:**

---

## Version History

Version	Issue Date	Remarks	Revised by
01	2015-11-18	Initial Release	

## REPORT INDEX

<b>1 EQUIPMENT (TEST ITEM) DESCRIPTION</b>	<b>5</b>
1.1 Photos – Equipment External	6
1.2 Photos – Equipment internal	8
1.3 Photos – Test setup	12
1.4 Supporting Equipment Used During Testing	13
1.5 Test Modes	14
1.6 Test Equipment Used During Testing	15
1.7 Sample emission level calculation	16
<b>2 RESULT SUMMARY</b>	<b>17</b>
<b>3 TEST CONDITIONS AND RESULTS</b>	<b>18</b>
3.1 Test Conditions and Results – Occupied Bandwidth	18
3.2 Test Conditions and Results – Fundamental in-band field strength emissions	19
3.3 Test Conditions and Results – Emissions radiated outside the specified frequency band	21
3.4 Test Conditions and Results – Frequency stability	23
ANNEX A Transmitter in-band emissions	25
ANNEX B Transmitter radiated spurious emissions	26

## 1 Equipment (Test item) Description

<b>Description</b>	AgentE USA/SGP	
<b>Model</b>	3000-U902-4X	
<b>Additional Model(s)</b>	None	
<b>Brand Name(s)</b>	EMKA	
<b>Serial number</b>	None	
<b>Hardware version</b>	901.343B001	
<b>Software / Firmware version</b>	350000091	
<b>FCC-ID</b>	2AGCT-U9024X	
<b>IC</b>	N/A	
<b>Equipment type</b>	End product	
<b>Radio type</b>	Transceiver	
<b>Radio technology</b>	13.56 MHz RFID	
<b>Operating frequency range</b>	13.56 MHz	
<b>Assigned frequency band</b>	13.110 - 14.010 MHz	
<b>Frequency range</b>	$F_{MID}$	13.56 MHz
<b>Spreading</b>	None	
<b>Modulations</b>	ASK	
<b>Number of channels</b>	1	
<b>Channel spacing</b>	None	
<b>Number of antennas</b>	1	
<b>Antenna</b>	Type	integrated
	Model	printed loop antenna
	Manufacturer	In-circuit
<b>Manufacturer</b>	EMKA Beschlagteile GmbH & Co. KG Langenberger Straße 32 42551 Velbert GERMANY	
<b>Power supply</b>	$V_{NOM}$	3.0 V DC
	$V_{MIN}$	2.4 V DC
	$V_{MAX}$	3.2 V DC
<b>Temperatures</b>	$T_{NOM}$	20 °C
	$T_{MIN}$	5 °C
	$T_{MAX}$	50 °C
<b>AC/DC-Adaptor</b>	Model	N/A
	Vendor	N/A
	Input	N/A
	Output	N/A

#### 1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
		None		

**\*Note:** Use the following abbreviations:

AE : Auxiliary/Associated Equipment, or

SIM : Simulator (Not Subjected to Test)

CABL : Connecting cables

### 1.5 Test Modes

Mode #	Description	
Single - CW	General conditions:	EUT powered by battery
	Radio conditions:	Mode = standalone transmit Modulation = none Power level = Maximum
Single	General conditions:	EUT powered by battery
	Radio conditions:	Mode = standalone transmit Modulation = ASK Power level = Maximum

### 1.6 Test Equipment Used During Testing

Measurement Software			
Description	Manufacturer	Name	Version
EMC Test Software	Dare Instruments	Radimation	2014.1.15

Occupied Bandwidth					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Spectrum Analyzer	R&S	FSP 30	EF00312	2015-02	2016-02

Field strength emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Semi-anechoic chamber	Frankonia	AC 1	EF00062	-	-
Spectrum Analyzer	R&S	FSIQ26	EF00242	2015-04	2016-04
Loop Antenna	R&S	HFH2-Z2	EF00184	2014-11	2016-11
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD Antenna	R&S	HL 223	EF00187	2014-03	2017-03
LPD Antenna	R&S	HL 025	EF00327	2015-10	2018-10

## 1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB $\mu$ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB $\mu$ V/m). The FCC limits are given in units of  $\mu$ V/m. The following formula is used to convert the units of  $\mu$ V/m to dB $\mu$ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 \cdot \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{llll} \text{Reading} & + & \text{AF} & = \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = \end{array} \begin{array}{llll} \text{Net Reading} & : & \text{Net reading - FCC limit} & = \text{Margin} \\ 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = -9.5 \text{ dB} \end{array}$$

## 2 Result Summary


FCC 47 CFR Part 15C, IC RSS-210				
Product Specific Standard Section	Requirement – Test	Reference Method	Result	Remarks
RSS-Gen 6.6	Occupied Bandwidth	RSS-Gen 6.6	N/R	Informational only
FCC 15.225(a-c) IC RSS-210 A2.6(a-c)	Fundamental in-band field strength emissions	ANSI C63.4	PASS	
FCC 15.225(d) FCC 15.209 IC RSS-210 A2.6(d)	Emission radiated outside the specified frequency band	ANSI C63.4	PASS	
FCC 15.225(e) IC RSS-210 A2.6	Frequency stability	ANSI C63.4	PASS	
IC RSS-Gen 4.10 IC RSS-Gen 7.1	Receiver radiated spurious emissions	ANSI C 63.4	N/R	
47 CFR 15.207 RSS-Gen 8.8	AC power line conducted emissions	ANSI C63.4	N/R	EUT exclusively battery powered
<b>Remarks:</b>				

### 3 Test Conditions and Results

#### 3.1 Test Conditions and Results – Occupied Bandwidth


Occupied Bandwidth acc. to IC RSS-Gen		Verdict: PASS
Test according to measurement reference	Reference Method	
	RSS-Gen 6.6	
Test frequency range	Tested frequencies	
	$F_{MID}$	
EUT test mode	Single	
Limits		
None (Informational only)		
Test setup		
		
Test procedure		
<ol style="list-style-type: none"> <li>1. EUT set to test mode (Communication tester is used if needed)</li> <li>2. Span set to at least twice the emission spectrum</li> <li>3. Resolution bandwidth set to 1 % of span</li> <li>4. Occupied Bandwidth (99 %) measurement with spectrum analyzer built in measurement function</li> </ol>		
Test results		
Channel	Frequency [MHz]	Occupied Bandwidth [kHz]
$F_{MID}$	13.56	627
Comments: Measurement is applicable to all variants		

### 3.2 Test Conditions and Results – Fundamental in-band field strength emissions

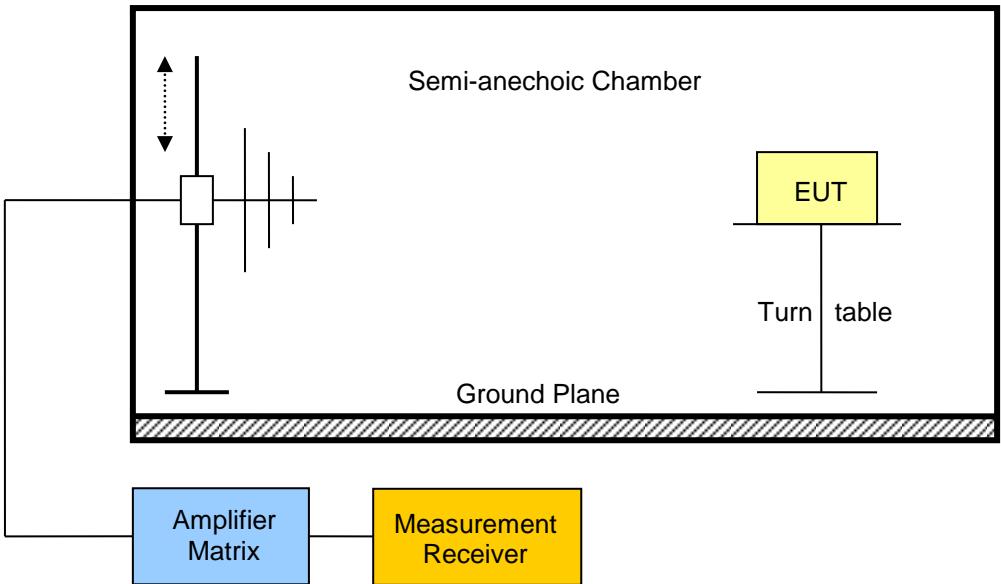Field strength emissions acc. to FCC 47 CFR 15.225 / IC RSS-210		Verdict: PASS	
Test according referenced standards	Reference Method		
	FCC 15.225(a-c) / IC RSS-210 A2.6(a-c)		
Test according to measurement reference	Reference Method		
	ANSI C63.4		
Test frequency range	Tested frequencies		
	$F_{MID}$		
EUT test mode	Single		
Limits			
Frequency range [MHz]	Limit [ $\mu\text{V/m}$ ]	Limit [ $\text{dB}\mu\text{V/m}$ ]	Limit Distance [m]
13.553 – 13.567	15848	84	30
13.410 – 13.553 13.567 – 13.710	334	50.5	30
13.110 – 13.410 13.710 – 14.010	106	40.5	30
Test setup			
			


Test procedure							
1. EUT set to test mode 2. Span it set according to measurement range 3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector 4. Below 30MHz and extrapolation factor of 40dB/decade is used and at 30MHz and above an extrapolation factor of 20dB/decade is used (47 CRF 15.31(f)).							
Test results							
Channel	Frequency [MHz]	Emission [MHz]	Level @ 30m [db $\mu$ V/m]	Det.	Limit @ 30m [db $\mu$ V/m]	Measurement distance [m] <sup>*</sup>	Margin [dB]
F <sub>MID</sub>	13.56	13.558	13.5	pk	84	3	-70.5
Comments: * Physical distance between EUT and measurement antenna. See Annex							

### 3.3 Test Conditions and Results – Emissions radiated outside the specified frequency band

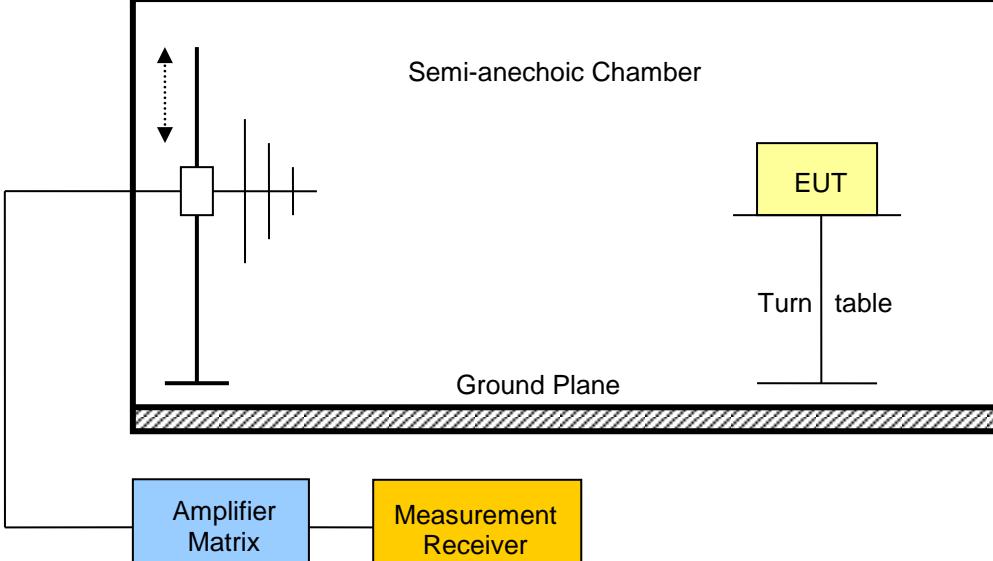Radiated out-of-band band emissions acc. to FCC 47 CFR 15.225 / IC RSS-210		Verdict: PASS		
Test according referenced standards		Reference Method		
		FCC 15.225(d) / IC RSS-210 A2.6(d)		
Test according to measurement reference		Reference Method		
		ANSI C63.4		
Test frequency range		Tested frequencies		
		9 kHz – 216 MHz		
EUT test mode		Single		
Limits				
Frequency range [MHz]	Detector	Limit [ $\mu$ V/m]	Limit [dB $\mu$ V/m]	Limit Distance [m]
0.009 – 0.490	Quasi-Peak	2400/F[kHz]	48.5 – 13.8	300
0.490 – 1.705	Quasi-Peak	2400/F[kHz]	13.8 – 2.97	30
1.705 – 30	Quasi-Peak	30	29.5	30
30 – 88	Quasi-Peak	100	40	3
88 – 216	Quasi-Peak	150	43.5	3
The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.				
Test setup				
				

Test procedure								
1. EUT set to test mode								
2. Span it set according to measurement range								
3. Resolution bandwidth below 1 GHz is set according to CISPR 16 with peak/quasi-peak detector and RBW of 1 MHz with peak/average detector is used above 1 GHz								
4. Markers are set to maximum emission levels								
Test results								
Channel	Frequency [MHz]	Emission [MHz]	Level [db $\mu$ V/m]	Detector	Pol.	Limit [db $\mu$ V/m]	Limit distance [m] <sup>*</sup>	Margin [dB]
F <sub>MID</sub>	13.56	4.308	14.4	pk	ver	29.5	3	-15.1
F <sub>MID</sub>	13.56	71.820	28.9	pk	ver	40.0	3	-11.1
F <sub>MID</sub>	13.56	167.838	33.6	pk	ver	43.5	3	- 9.9
Comments: * Physical distance between EUT and measurement antenna.								

### 3.4 Test Conditions and Results – Frequency stability
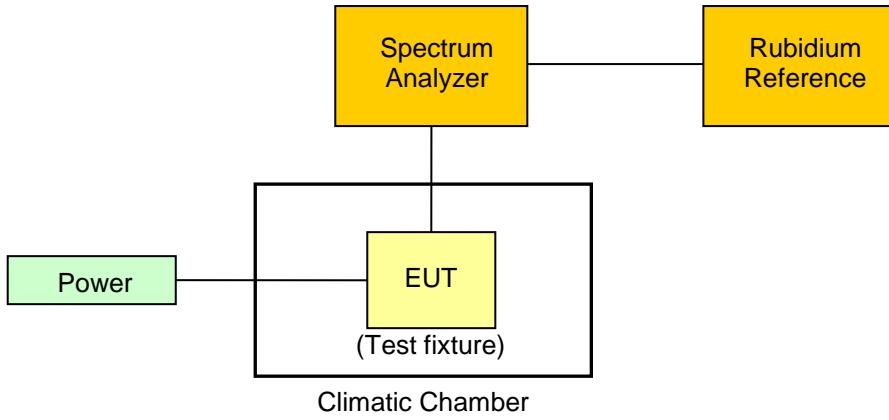
<b>Frequency stability acc. to FCC 15.225 / IC RSS-210</b>		<b>Verdict: PASS</b>
Test according referenced standards	Reference Method	
	FCC 15.225(e) / IC RSS-210 A2.6	
Test according to measurement reference	Reference Method	
	ANSI C63.4	
Test frequency range	Tested frequencies	
	$F_{\text{MID}}$	
EUT test mode	Single CW	
<b>Limits</b>		
Frequency error limit		
$\pm 0.01\% (\pm 100\text{ppm})$		
<b>Test setup</b>		
 <pre> graph TD     SA[Spectrum Analyzer] --- RR[Rubidium Reference]     SA --- EUT[EUT (Test fixture)]     RR --- EUT     Power[Power] --- EUT     EUT --- ClimaticChamber[Climatic Chamber]   </pre>		
<b>Test procedure</b>		
<ol style="list-style-type: none"> <li>1. EUT set to test mode</li> <li>2. The ambient temperature and supply voltage is set according to measurement conditions</li> <li>3. Span is set to capture fundamental emission</li> <li>4. Frequency error is measured with frequency counter measurement function</li> </ol>		

Test results					
Channel	Frequency [MHz]	Temp.	Voltage	Measured Frequency [MHz]	Error [ppm]
F <sub>MID</sub>	13.56	T <sub>min</sub> = 5 °C	V <sub>nom</sub> = 3.0 V DC	13.5598	-14.75
F <sub>MID</sub>	13.56	T <sub>min+5</sub> = 10 °C	V <sub>nom</sub> = 3.0 V DC	13.5598	-14.75
F <sub>MID</sub>	13.56	T <sub>nom</sub> = 20 °C	V <sub>nom</sub> = 3.0 V DC	13.5597	-22.12
F <sub>MID</sub>	13.56	T <sub>nom</sub> = 20 °C	V <sub>min</sub> = 2.4 V DC	13.5597	-22.12
F <sub>MID</sub>	13.56	T <sub>max-20</sub> = 30 °C	V <sub>nom</sub> = 3.0 V DC	13.5597	-22.12
F <sub>MID</sub>	13.56	T <sub>max-10</sub> = 40 °C	V <sub>nom</sub> = 3.0 V DC	13.5597	-22.12
F <sub>MID</sub>	13.56	T <sub>max</sub> = 50 °C	V <sub>nom</sub> = 3.0 V DC	13.5597	-22.12
Comments:					


## ANNEX A Transmitter in-band emissions

### Spurious emissions according to FCC 15.225

Project number: G0M-1510-5134

Applicant: In-Circuit GmbH  
 EUT Name: AgentE USA/SGP  
 Model: 3000-U902-4X  
 Test Site: Eurofins Product Service GmbH  
 Operator: Pudell  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $V_{nom}: 3.0 \text{ V DC}$   
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 30 m  
 Mode: TX; RFID; 13.56 MHz  
 Test Date: 2015-10-28  
 Note: EUT vertical, measured without Tag continuously reading

Index 26

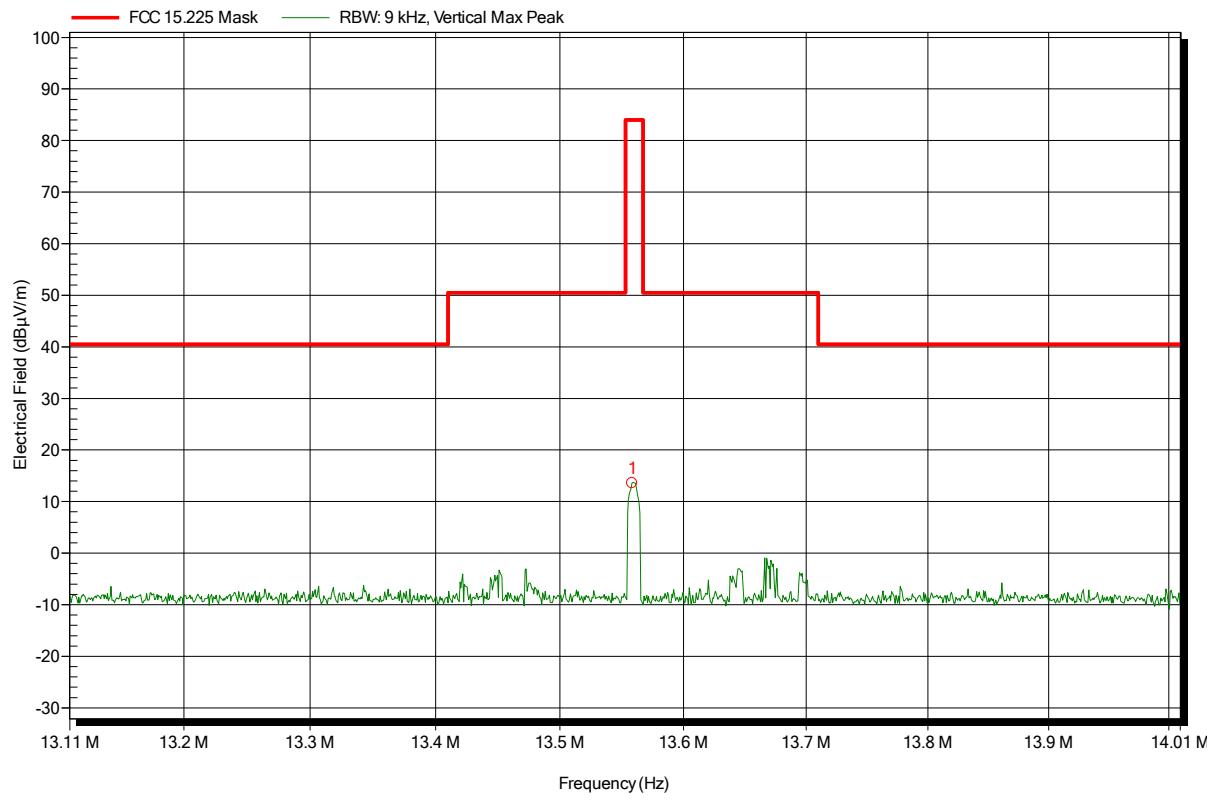


## ANNEX B Transmitter radiated spurious emissions

### Spurious emissions according to FCC 15.225

Project number: G0M-1510-5134

Applicant: In-Circuit GmbH  
 EUT Name: AgentE USA/SGP  
 Model: 3000-U902-4X  
 Test Site: Eurofins Product Service GmbH  
 Operator: Pudell  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $V_{nom}: 3.0 \text{ V DC}$   
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 300 m  
 Mode: TX; RFID; 13.56 MHz  
 Test Date: 2015-10-28  
 Note: EUT vertical, measured without Tag continuously reading

Index 24

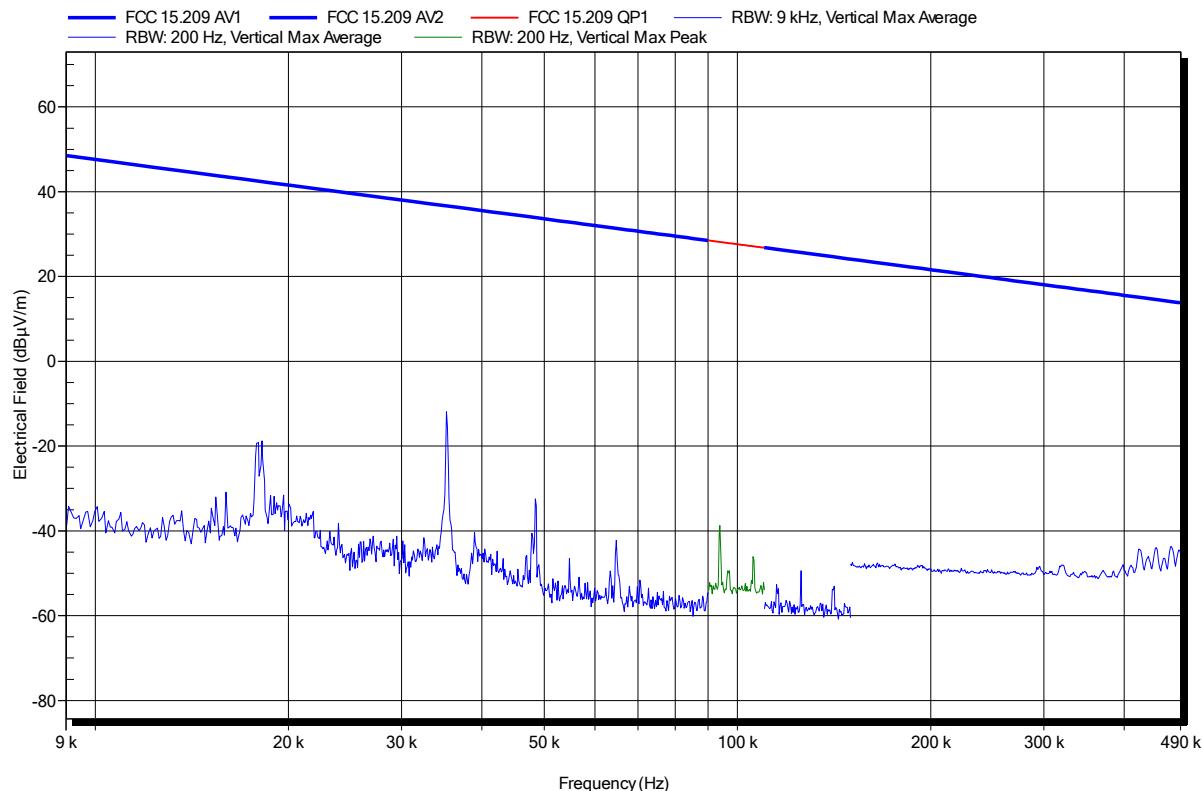


**Spurious emissions according to FCC 15.225**

Project number: G0M-1510-5134

Applicant: In-Circuit GmbH  
 EUT Name: AgentE USA/SGP  
 Model: 3000-U902-4X  
 Test Site: Eurofins Product Service GmbH  
 Operator: Pudell  
 Test Conditions:  $T_{nom} = 24^\circ\text{C}$ ,  $V_{nom} = 3.0 \text{ V DC}$   
 Antenna: Rohde & Schwarz HFH 2-Z2  
 Measurement distance: 3 m converted to 30 m  
 Mode: TX; RFID; 13.56 MHz  
 Test Date: 2015-10-28  
 Note: EUT vertical, measured without Tag continuously reading

Index 25

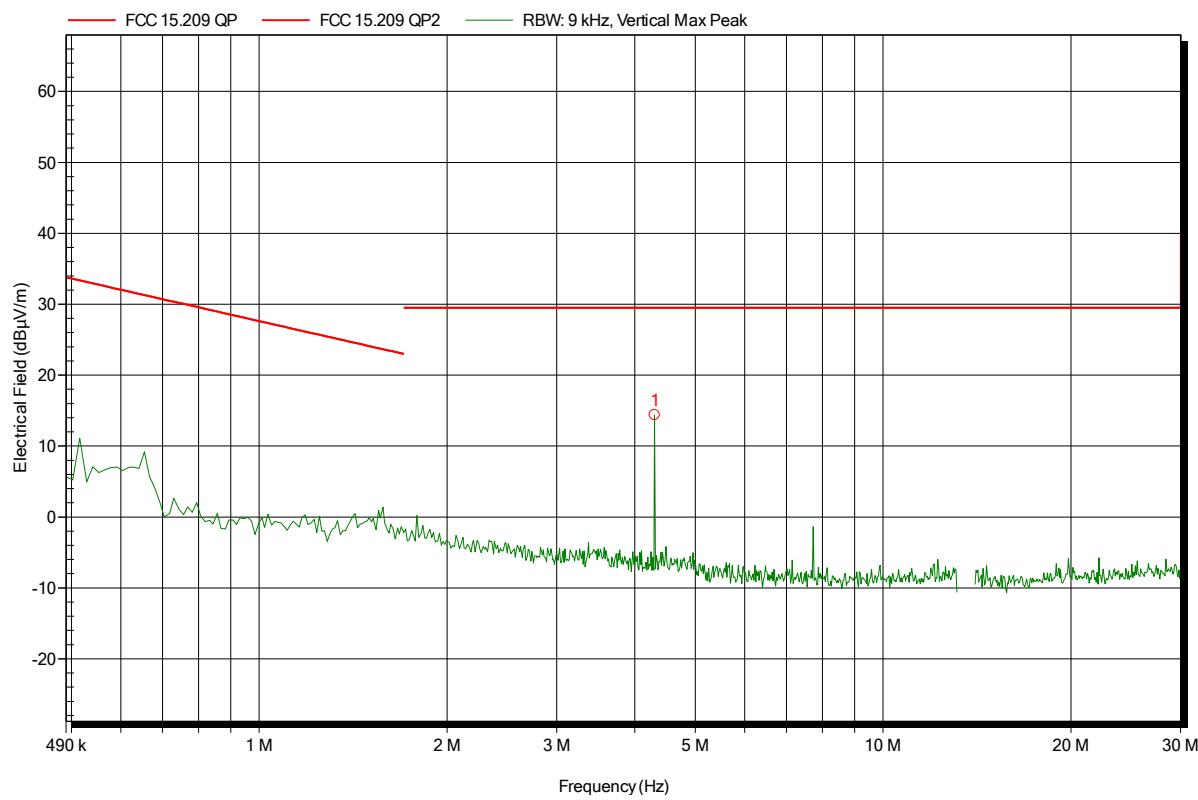

Test Report No.: G0M-1510-5134-TFC225RI-V01


 Eurofins Product Service GmbH  
 Storkower Str. 38c, D-15526 Reichenwalde, Germany

**Spurious emissions according to FCC 15.225**

Project number: G0M-1510-5134

Applicant: In-Circuit GmbH  
EUT Name: AgentE USA/SGP  
Model: 3000-U902-4X  
Test Site: Eurofins Product Service GmbH  
Operator: Mr. Pudell  
Test Conditions:  $T_{nom}$ : 24°C,  $V_{nom}$ : 3.0 V DC  
Antenna: Rohde & Schwarz HK 116, Vertical  
Measurement distance: 3 m  
Mode: TX; RFID; 13.56 MHz  
Test Date: 2015-10-28  
Note: EUT vertical, measured without Tag continuously reading

Index 27

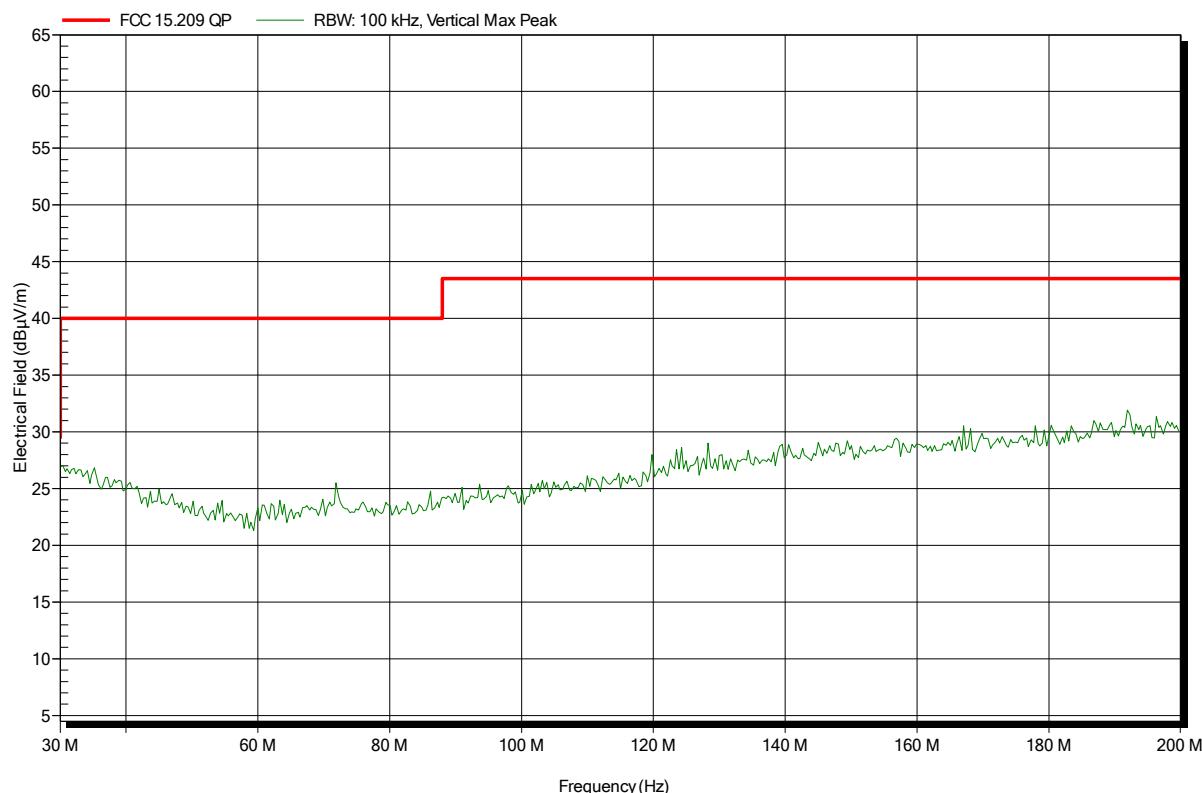


**Spurious emissions according to FCC 15.225**

Project number: G0M-1510-5134

Applicant: In-Circuit GmbH  
 EUT Name: AgentE USA/SGP  
 Model: 3000-U902-4X  
 Test Site: Eurofins Product Service GmbH  
 Operator: Mr. Pudell  
 Test Conditions:  $T_{nom}: 24^{\circ}\text{C}$ ,  $V_{nom}: 3.0 \text{ V DC}$   
 Antenna: Rohde & Schwarz HK 116, Horizontal  
 Measurement distance: 3 m  
 Mode: TX; RFID; 13.56 MHz  
 Test Date: 2015-10-28  
 Note: EUT vertical, measured without Tag continuously reading

Index 28

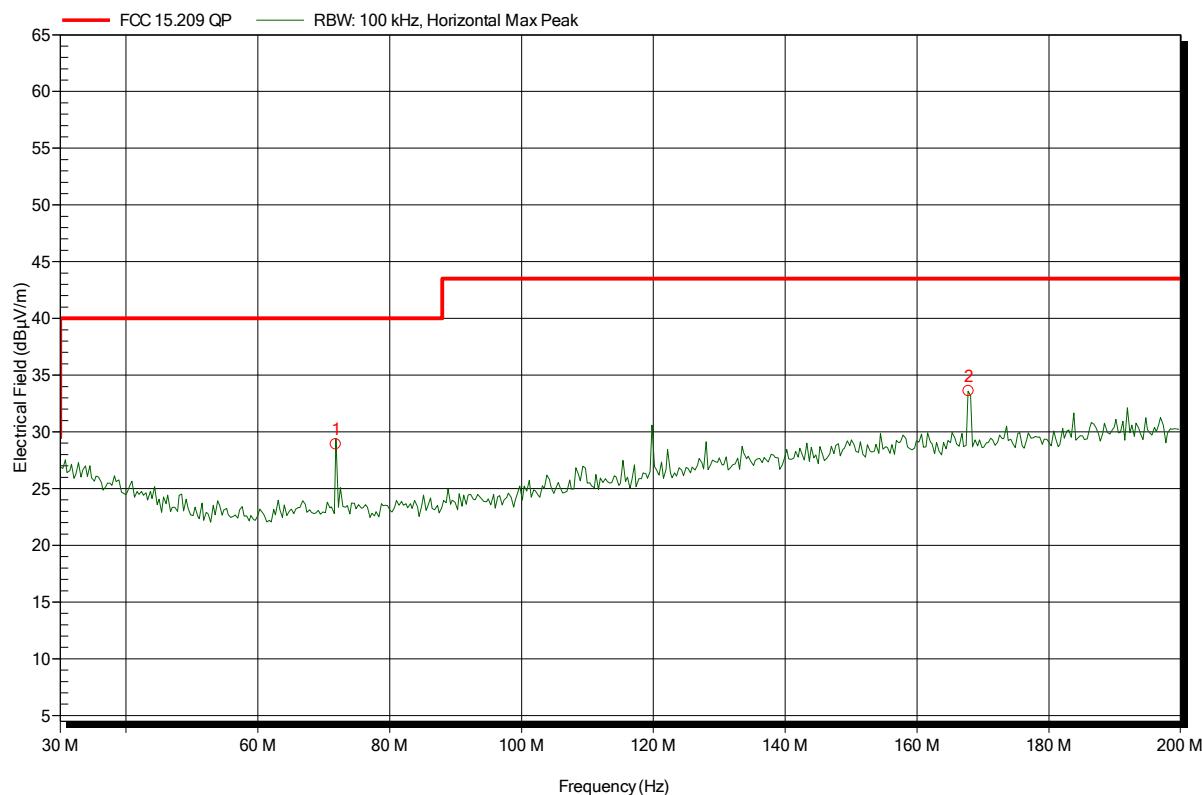

Frequency	Peak	Peak Limit	Peak Difference	Status
71.82 MHz	28.89 dB $\mu$ V/m	40 dB $\mu$ V/m	-11.11 dB	Pass
167.838 MHz	33.61 dB $\mu$ V/m	43.5 dB $\mu$ V/m	-9.89 dB	Pass