



## FCC RADIO TEST REPORT

Applicant's company	IWC Schaffhausen, Branch of Richemont International SA
Applicant Address	Baumgartenstrasse 15 , 8201 Schaffhausen, Switzerland
FCC ID	2AGDR-IWCC1
Manufacturer's company	IWC Schaffhausen, Branch of Richemont International SA
Manufacturer Address	Baumgartenstrasse 15 , 8201 Schaffhausen, Switzerland

Product Name	IWC Connect
Brand Name	IWC Schaffhausen
Model Name	IWC-C1
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.249
Test Freq. Range	2402 ~ 2480MHz
Received Date	Nov. 16, 2015
Final Test Date	Nov. 21, 2015
Submission Type	Original Equipment

### Statement

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2013** and **47 CFR FCC Part 15 Subpart C**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. VERIFICATION OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	3
3.3. Table for Filed Antenna.....	3
3.4. Table for Carrier Frequencies .....	3
3.5. Table for Test Modes.....	4
3.6. Table for Testing Locations.....	4
3.7. Table for Supporting Units .....	4
3.8. Duty Cycle.....	5
3.9. Test Configurations .....	6
<b>4. TEST RESULT .....</b>	<b>8</b>
4.1. Field Strength of Fundamental Emissions Measurement.....	8
4.2. 20dB Spectrum Bandwidth Measurement .....	11
4.3. Radiated Emissions Measurement.....	14
4.4. Band Edge Emissions Measurement.....	23
4.5. Antenna Requirements .....	25
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>26</b>
<b>6. MEASUREMENT UNCERTAINTY.....</b>	<b>27</b>
<b>APPENDIX A. TEST PHOTOS .....</b>	<b>A1 ~ A6</b>



## History of This Test Report



## 1. VERIFICATION OF COMPLIANCE

Product Name : IWC Connect  
Brand Name : IWC Schaffhausen  
Model Name : IWC-C1  
Applicant : IWC Schaffhausen, Branch of Richemont International SA  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.249

Sportun International as requested by the applicant to evaluate the EMC performance of the product sample received on Nov. 16, 2015 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in blue ink, appearing to read "Sam Chen".

Reviewed By:

Sam Chen

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
-	15.207	AC Power Line Conducted Emissions	-	Note
4.1	15.249(a)	Field Strength of Fundamental Emissions	Complies	2.51 dB
4.2	15.215(c)	20dB Spectrum Bandwidth	Complies	-
4.3	15.249(a)/(d)	Radiated Emissions	Complies	5.08 dB
4.4	15.249(d)	Band Edge Emissions	Complies	8.24 dB
4.5	15.203	Antenna Requirements	Complies	-

Note: It was supplied power by battery for EUT, It's not necessary to apply to AC Power Port Conducted emission test.

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Items	Description
Power Type	From battery (3Vdc)
Modulation	DSSS
Data Rate (Mbps)	GFSK: 1
Frequency Range	2402 ~ 2480MHz
Channel Number	40 (37 hopping + 3 advertising channel)
Channel Space	2 MHz Bandwidth
Channel Band Width (99%)	1.15 MHz
Max. Field Strength	91.49 dBuV/m at 3m (Average)
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

#### 3.2. Accessories

N/A

#### 3.3. Table for Filed Antenna

Ant.	Brand	Model No.	Antenna Type	Connector	Gain (dBi)
1	-	-	Loop Antenna	N/A	-3.09

#### 3.4. Table for Carrier Frequencies

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2402 ~ 2480MHz	0	2402 MHz	20	2442 MHz
	1	2404 MHz	:	:
	2	2406 MHz	37	2476 MHz
	:	:	38	2478 MHz
	18	2438 MHz	39	2480 MHz
	19	2440 MHz	-	-

### 3.5. Table for Test Modes

Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode	Channel	Antenna
Field Strength of Fundamental Emissions 20dB Spectrum Bandwidth	CTX	0/20/39	1
Radiated Emissions 30MHz ~ 1GHz	Normal Link	-	-
Radiated Emissions 1GHz~10 <sup>th</sup> Harmonic	CTX	0/20/39	1
Band Edge Emissions	CTX	0/20/39	1

Note: CTX=continuously transmitting

The following test modes were performed for all tests:

**For Radiated emission below 1GHz test:**

Mode 1. Place EUT in Y axis

Mode 2. Place EUT in Z axis

Mode 2 is the worst case, so it was selected to record in this test report

**For Radiated emission above 1GHz test:**

The EUT was performed at Y axis and Z axis position for Radiated emission above 1GHz test, and the worst case was found at Y axis. So the measurement will follow this same test configuration.

Mode 1. Place EUT in Y axis

### 3.6. Table for Testing Locations

Test Site Location					
Address:	No.8, Lane 724, Bo-ai St., Jhubei City, Hsinchu County 302, Taiwan, R.O.C.				
TEL:	886-3-656-9065				
FAX:	886-3-656-9085				
Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D	-
TH01-CB	OVEN Room	Hsin Chu	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

### 3.7. Table for Supporting Units

**For Test Site No: 03CH01-CB (Below 1GHz)**

Support Unit	Brand	Model	FCC ID
iPod	Apple	Shuffle	DoC

**For Test Site No.: TH01-CB and 03CH01-CB (above 1GHz)**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	E4300	DoC


### 3.8. Duty Cycle

On Time (ms)	On+Off Time (ms)	Duty Cycle (%)	Duty Factor (dB)	1/T Minimum VBW (kHz)
0.392	0.628	62.42	1.60	2.55


### 3.9. Test Configurations

#### 3.9.1. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

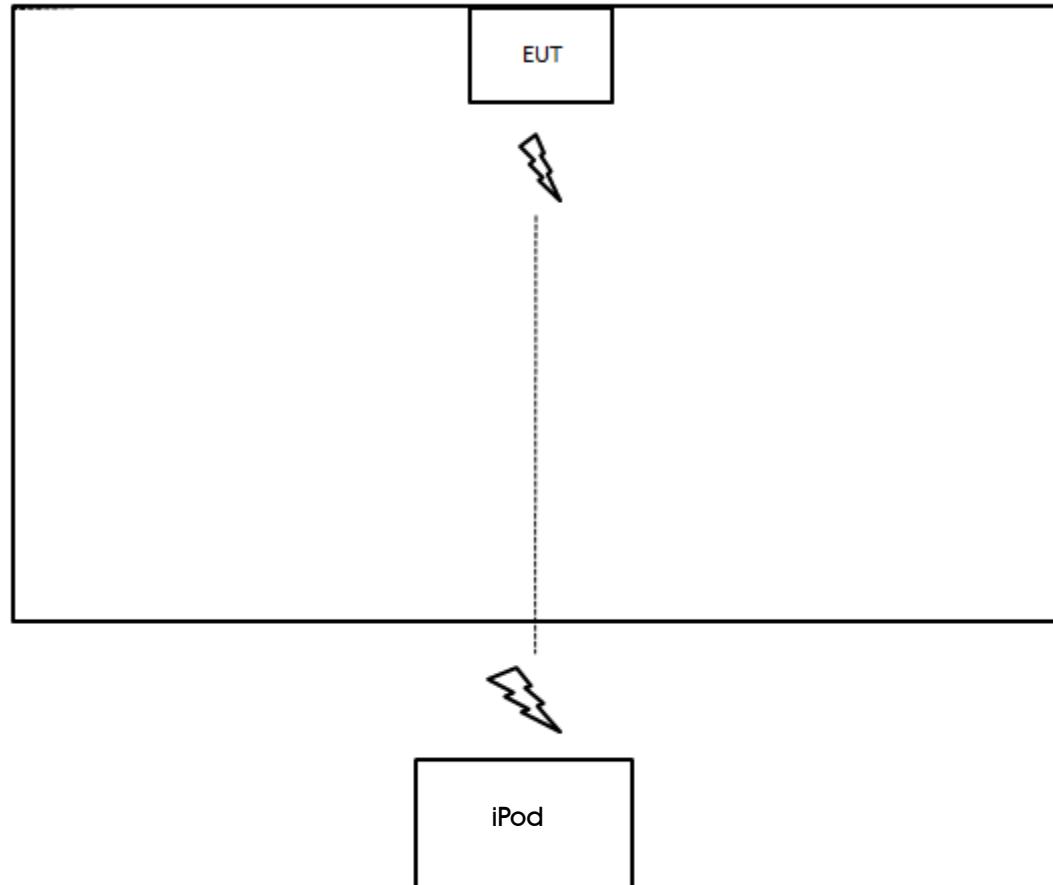

Test Configuration: Above 1GHz

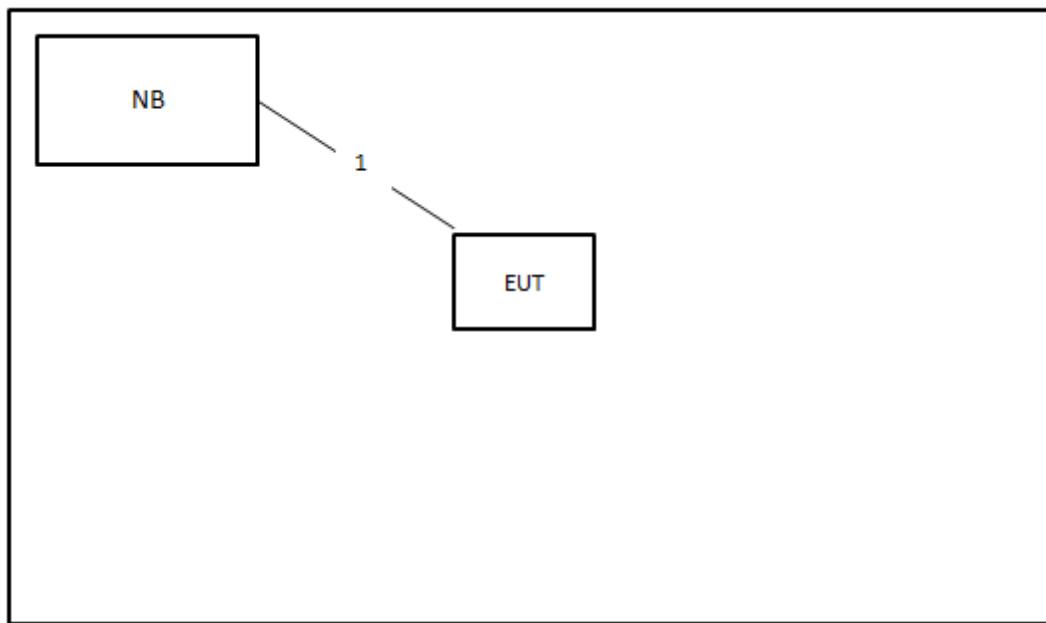

Item	Connection	Shielded	Length
1	RS-232 cable to USB cable	Yes	2m

## 4. TEST RESULT

### 4.1. Field Strength of Fundamental Emissions Measurement

#### 4.1.1. Limit

The field strength of fundamental emissions within these bands specified at a distance of 3 meters (measurement instrumentation employing an average detector) shall comply with the following table.

Frequency Band (MHz)	Fundamental Emissions Limit (dBuV/m) at 3m
2400-2483.5	94 (Average)
	114 (Peak)

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Power Meter Parameter	Setting
RBW	1 MHz Peak / 3MHz Peak
VBW	1 MHz Peak / 1/T Average
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. For Fundamental emissions, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
6. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.

#### 4.1.4. Test Setup Layout

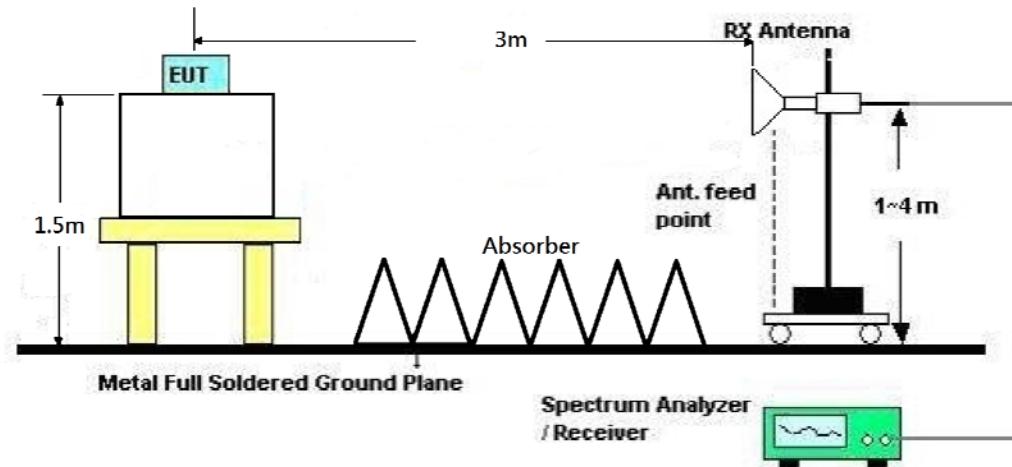

#### 4.1.5. Test Deviation

There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.1.7. Test Result of Field Strength of Fundamental Emissions

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Channel 0, 20, 39
Test Date	Nov. 19, 2015		

## Channel 0

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	2402.00	87.74	94.00	-6.26	55.99	3.74	28.01	0.00	212	144	Average	HORIZONTAL	
2	2402.40	89.22	114.00	-24.78	57.47	3.74	28.01	0.00	212	144	Peak	HORIZONTAL	

## Channel 20

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	2441.60	88.45	114.00	-25.55	56.71	3.78	27.96	0.00	302	140	Peak	HORIZONTAL	
2	2442.00	87.02	94.00	-6.98	55.28	3.78	27.96	0.00	302	140	Average	HORIZONTAL	

## Channel 39

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV			deg	cm		
1	2480.00	92.88	114.00	-21.12	61.15	3.81	27.92	0.00	335	100	Peak	HORIZONTAL	
2	2480.00	91.49	94.00	-2.51	59.76	3.81	27.92	0.00	335	100	Average	HORIZONTAL	

## Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

## 4.2. 20dB Spectrum Bandwidth Measurement

### 4.2.1. Limit

Intentional radiators must be designed to ensure that the 20 dB bandwidth of the emissions in the specific band (2402 ~ 2480MHz).

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 20dB Bandwidth
RBW	100 kHz
VBW	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.

### 4.2.4. Test Setup Layout

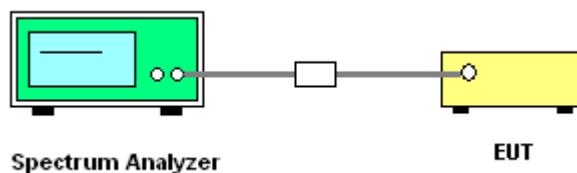

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test


The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of 20dB Spectrum Bandwidth

Temperature	25°C	Humidity	53%
Test Engineer	Nick Peng	Configurations	Channel 0/20/39


Frequency	20dB BW (MHz)	99% OBW (MHz)	Frequency range (MHz) $f_L > 2400\text{MHz}$	Frequency range (MHz) $f_H < 2483.5\text{MHz}$	Test Result
2402 MHz	1.26	1.12	2401.3460	-	Complies
2442 MHz	1.26	1.12	-	-	Complies
2480 MHz	1.28	1.15	-	2480.6120	Complies

#### 20 dB/99% Bandwidth Plot on 2402 MHz

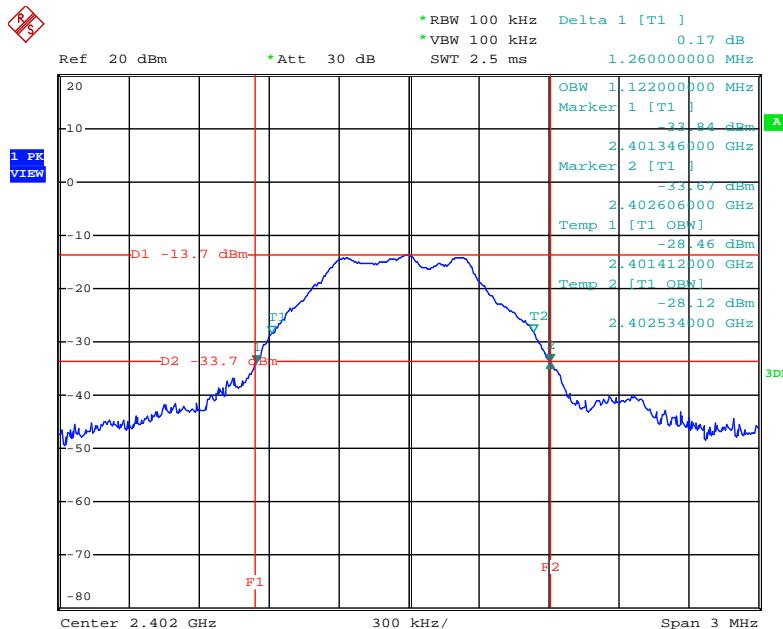


Date: 18.NOV.2015 16:07:33

### 20 dB/99% Bandwidth Plot on 2442 MHz

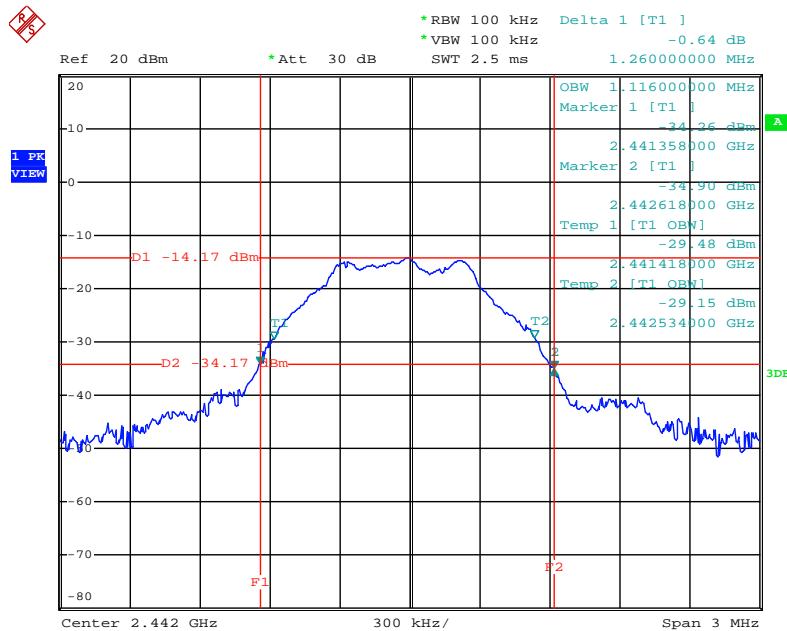

Date: 18.NOV.2015 16:21:57

### 20 dB/99% Bandwidth Plot on 2480 MHz

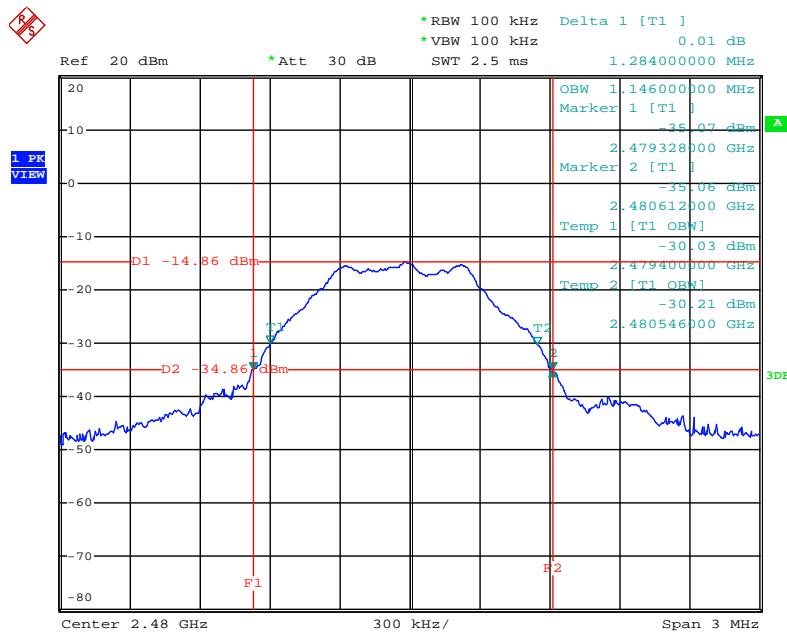

Date: 18.NOV.2015 16:26:36

### 4.3. Radiated Emissions Measurement

#### 4.3.1. Limit

Harmonic emissions limits comply with below 54 dBuV/m at 3m. Other emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

#### 4.3.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.3.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and 3MHz RBW for peak reading. Then 1MHz RBW and 1/T VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.3.4. Test Setup Layout


For Radiated Emissions: 9kHz ~30MHz

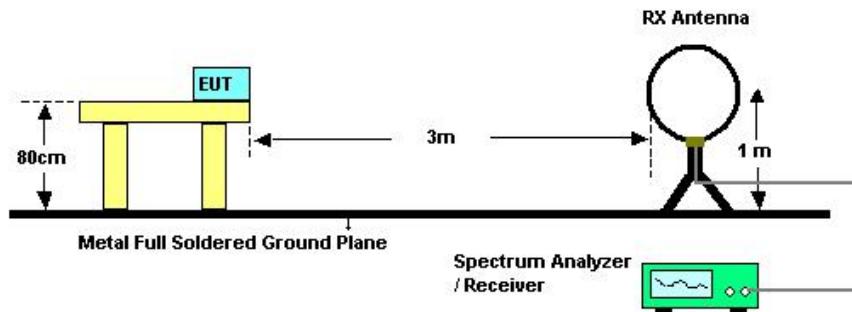

For Radiated Emissions: 30MHz~1GHz

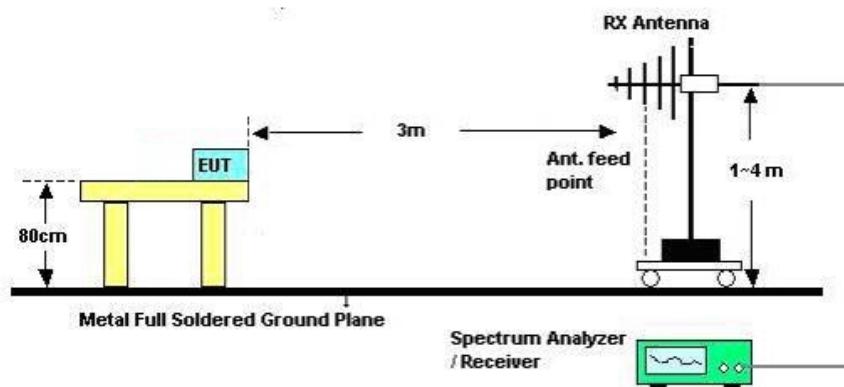

For Radiated Emissions: Above 1GHz

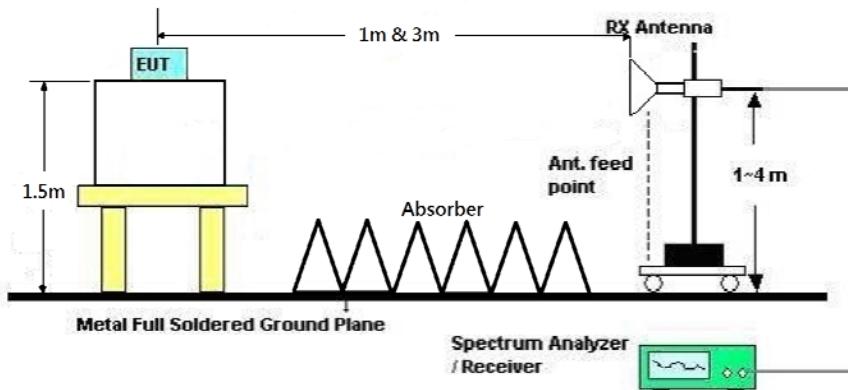

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	25°C	<b>Humidity</b>	61%
<b>Test Engineer</b>	Seven Liang	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Nov. 21, 2015	<b>Test Mode</b>	Mode 2

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.


#### 4.3.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	25°C	Humidity	61%
Test Engineer	Seven Liang	Configurations	Normal Link
Test Mode	Mode 2		

*Horizontal*

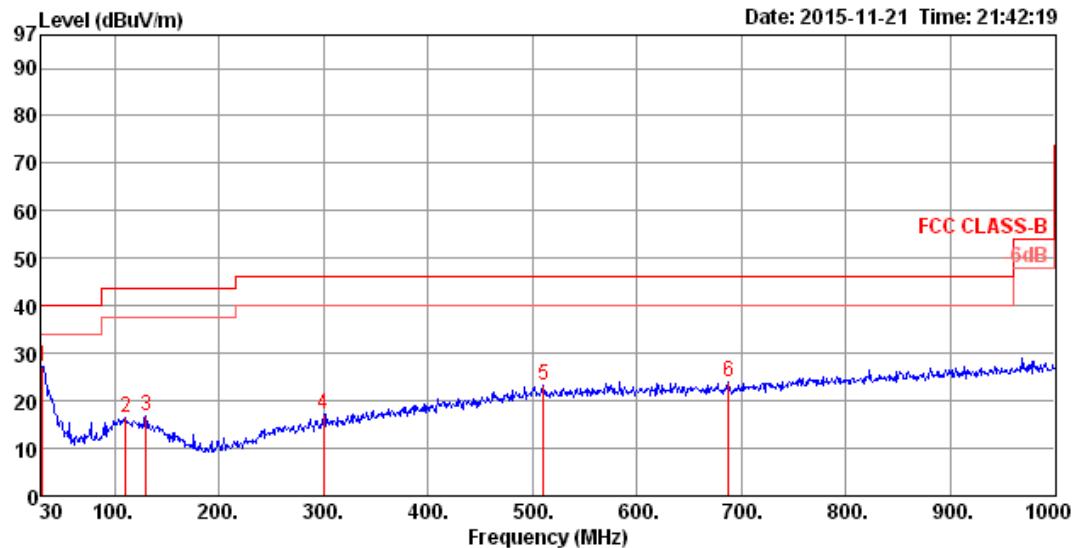

Freq	Level	Limit		Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
		MHz	dBuV/m	Line	dB	dBuV	dB	dB/m	dB	cm	deg	
1	30.97	27.18	40.00	-12.82	32.20	0.53	19.29	24.84	100	86	HORIZONTAL	Peak
2	110.51	16.59	43.50	-26.91	30.00	0.87	12.41	26.69	100	86	HORIZONTAL	Peak
3	129.91	16.75	43.50	-26.75	30.99	0.90	12.60	27.74	100	86	HORIZONTAL	Peak
4	299.66	17.27	46.00	-28.73	31.68	1.37	13.78	29.56	100	86	HORIZONTAL	Peak
5	510.15	23.10	46.00	-22.90	30.33	1.78	18.07	27.08	100	86	HORIZONTAL	Peak
6	687.66	23.93	46.00	-22.07	30.20	2.07	19.58	27.92	100	86	HORIZONTAL	Peak

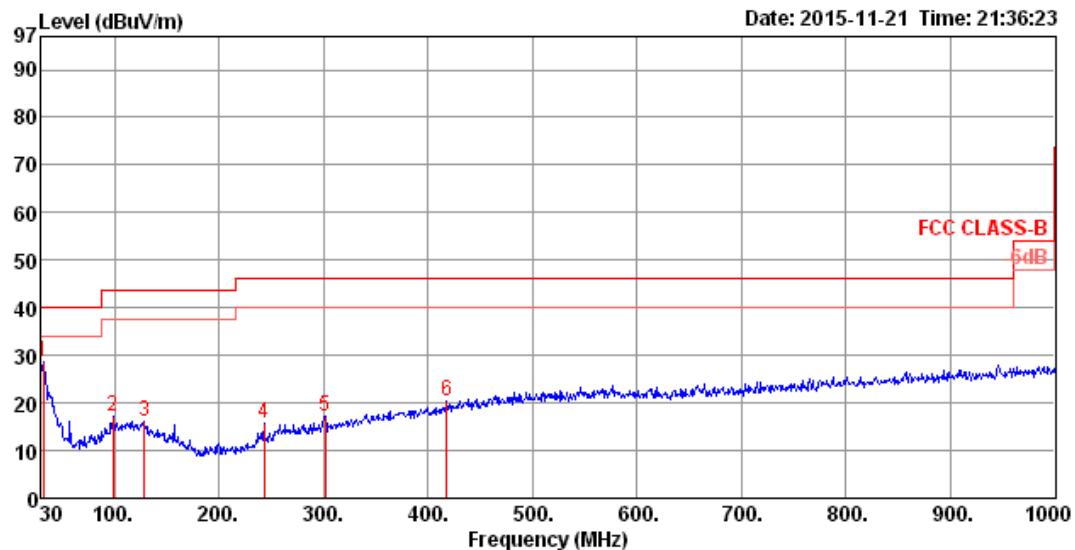**Vertical**


Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
		Line	Limit	Level	Loss	Factor	Factor	cm	deg		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	31.94	28.46	40.00	-11.54	34.08	0.53	18.67	24.82	100	178	VERTICAL Peak
2	98.87	17.26	43.50	-26.24	31.43	0.87	11.00	26.04	100	178	VERTICAL Peak
3	128.94	16.18	43.50	-27.32	30.35	0.90	12.61	27.68	100	178	VERTICAL Peak
4	243.40	15.68	46.00	-30.32	32.11	1.24	12.37	30.04	100	178	VERTICAL Peak
5	301.60	17.19	46.00	-28.81	31.53	1.37	13.83	29.54	100	178	VERTICAL Peak
6	418.00	20.51	46.00	-25.49	30.28	1.58	16.72	28.07	100	178	VERTICAL Peak

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.3.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Channel 0
Test Date	Nov. 19, 2015		

## Horizontal

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor				
1	4803.94	46.34	54.00	-7.66	41.86	6.21	32.80	34.53	340	124	Average	HORIZONTAL
2	4804.52	54.49	74.00	-19.51	50.01	6.21	32.80	34.53	340	124	Peak	HORIZONTAL

## Vertical

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			Loss	Factor	Factor				
1	4803.42	55.17	74.00	-18.83	50.69	6.21	32.80	34.53	42	114	Peak	VERTICAL
2	4803.92	47.91	54.00	-6.09	43.43	6.21	32.80	34.53	42	114	Average	VERTICAL



Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Channel 20
Test Date	Nov. 19, 2015		

**Horizontal**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	dB	deg	cm	
1	4883.37	55.22	74.00	-18.78	51.20	5.59	32.93	34.50	312	119	Peak	HORIZONTAL	
2	4883.98	48.92	54.00	-5.08	44.90	5.59	32.93	34.50	312	119	Average	HORIZONTAL	

**Vertical**

Freq	Level	Limit		Over Limit	Read Level	Cable		Antenna Factor	Preamp Factor	T/Pos	A/Pos	Remark	Pol/Phase
		Line	dBuV/m			dB	dBuV	dB	dB/m	dB	deg	cm	
1	4883.52	53.27	74.00	-20.73	49.25	5.59	32.93	34.50	30	110	Peak	VERTICAL	
2	4883.96	46.91	54.00	-7.09	42.89	5.59	32.93	34.50	30	110	Average	VERTICAL	

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Channel 39
Test Date	Nov. 19, 2015		

**Horizontal**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4959.34	55.05	74.00	-18.95	50.92	5.57	33.04	34.48	312	100 Peak	HORIZONTAL
2	4959.96	48.59	54.00	-5.41	44.46	5.57	33.04	34.48	312	100 Average	HORIZONTAL

**Vertical**

Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	T/Pos	A/Pos	Remark	Pol/Phase
		Line	Limit	Level	Loss	Factor	Factor	deg	cm		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	deg	cm		
1	4959.92	47.25	54.00	-6.75	43.12	5.57	33.04	34.48	314	100 Average	VERTICAL
2	4960.43	54.96	74.00	-19.04	50.83	5.57	33.04	34.48	314	100 Peak	VERTICAL

**Note:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.4. Band Edge Emissions Measurement

### 4.4.1. Limit

Band edge emissions radiated outside of the specified frequency bands shall be attenuated by at least 50 dB below the level of the fundamental or comply with the radiated emissions limits specified in section 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.4.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 1/T for Average
RBW / VBW (Emission in non-restricted band)	100kHz/300kHz for Peak

### 4.4.3. Test Procedures

The test procedure is the same as section 4.3.3.

### 4.4.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.3.4.

### 4.4.5. Test Deviation

There is no deviation with the original standard.

### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.4.7. Test Result of Band Edge and Fundamental Emissions

Temperature	25°C	Humidity	61%
Test Engineer	Steven Liang	Configurations	Channel 0, 20, 39
Test Date	Nov. 19, 2015		

##### Channel 0

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m				dB	dB/m	dB	deg	cm		
1	2387.60	55.37	74.00	-18.63	23.62	3.73	28.02	0.00	212	144	Peak	HORIZONTAL
2	2389.20	44.99	54.00	-9.01	13.24	3.73	28.02	0.00	212	144	Average	HORIZONTAL
3	2402.00	87.74			55.99	3.74	28.01	0.00	212	144	Average	HORIZONTAL
4	2402.40	89.22			57.47	3.74	28.01	0.00	212	144	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2402 MHz.

##### Channel 20

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m				dB	dB/m	dB	deg	cm		
1	2386.40	55.42	74.00	-18.58	23.67	3.73	28.02	0.00	302	140	Peak	HORIZONTAL
2	2390.00	44.77	54.00	-9.23	13.02	3.73	28.02	0.00	302	140	Average	HORIZONTAL
3	2441.60	88.45			56.71	3.78	27.96	0.00	302	140	Peak	HORIZONTAL
4	2442.00	87.02			55.28	3.78	27.96	0.00	302	140	Average	HORIZONTAL
5	2483.50	44.92	54.00	-9.08	13.19	3.81	27.92	0.00	302	140	Average	HORIZONTAL
6	2484.70	54.74	74.00	-19.26	23.01	3.81	27.92	0.00	302	140	Peak	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2442 MHz.

##### Channel 39

Freq	Level	Limit		Over Limit	Read Level	CableAntenna Preamp			T/Pos	A/Pos	Remark	Pol/Phase
		Line	dB			Cable Loss	Antenna Factor	Preamp Factor				
MHz	dBuV/m	dBuV/m				dB	dB/m	dB	deg	cm		
1	2480.00	92.88			61.15	3.81	27.92	0.00	335	100	Peak	HORIZONTAL
2	2480.00	91.49			59.76	3.81	27.92	0.00	335	100	Average	HORIZONTAL
3	2483.50	65.54	74.00	-8.46	33.81	3.81	27.92	0.00	335	100	Peak	HORIZONTAL
4	2483.50	45.76	54.00	-8.24	14.03	3.81	27.92	0.00	335	100	Average	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2480 MHz.

##### Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.5. Antenna Requirements

### 4.5.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.5.2. Antenna Connector Construction

Please refer to section 3.1 in this test report, antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
BILOG ANTENNA	Schaffner	CBL6112D	37880	20MHz ~ 2GHz	Sep 03, 2015	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9kHz - 30 MHz	Mar. 12, 2015*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz ~ 18GHz	Oct. 22, 2015	Radiation (03CH01-CB)
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Jul. 21, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Feb. 24, 2015	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Jan. 12, 2015	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26GHz ~ 40GHz	Feb.10, 2015	Radiation (03CH01-CB)
Spectrum Analyzer	R&S	FSP40	100056	9kHz ~ 40GHz	Oct. 27, 2015	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz ~ 1 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-1	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-40G-2	N/A	18GHz ~ 40 GHz	Nov. 02, 2015	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100080	9kHz~40GHz	Sep. 21, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-7	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-8	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-9	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-10	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
RF Cable-high	Woken	RG402	High Cable-6	1 GHz – 26.5 GHz	Nov. 02, 2015	Conducted (TH01-CB)
Power Sensor	Agilent	U2021XA	MY53410001	50MHz~18GHz	Nov. 02, 2015	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*” Calibration Interval of instruments listed above is two years.

## 6. MEASUREMENT UNCERTAINTY

Test Items	Uncertainty	Remark
Radiated Emission (30MHz ~ 1,000MHz)	3.6 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 18GHz)	3.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	3.5 dB	Confidence levels of 95%
Conducted Emission	1.7 dB	Confidence levels of 95%