

TEST REPORT

Application No.: HKEM2011001257AT
Applicant: WISE ALLY HOLDINGS LIMITED
Address of Applicant: Unit 3203-3207 , Tower 1 , Enterprise Square Five , Kowloon Bay , Hong Kong
Equipment Under Test (EUT):
EUT Name: Sigfox RRB (with Sigfox, BT4.2 and Wifi b/g/n)
Model No.: AP83
FCC ID: 2AGEG-AP83
Standard(s) : 47 CFR Part 15 Subpart C 15.247
Date of Receipt: 2021-01-27
Date of Test: 2021-01-27 to 2021-02-10
Date of Issue: 2021-02-11

Test Result:	Pass*
---------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.



Law Man Kit
 EMC Manager

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request and accessible at <http://www.sgs.com/en/Terms-and-conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-conditions.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. The document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2021-02-11		Original

Authorized for issue by:			
			
		<u>Leo Xu /Project Engineer</u>	Date: 2021-02-11
			
		<u>Law Man Kit /Reviewer</u>	Date: 2021-02-11

2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Emissions at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.4,6.5,6.6	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass

Declaration of EUT Family Grouping:

N/A

Abbreviation:

- Tx: In this whole report Tx (or tx) means Transmitter.
- Rx: In this whole report Rx (or rx) means Receiver.
- RF: In this whole report RF means Radiated Frequency.
- CH: In this whole report CH means channel.
- Volt: In this whole report Volt means Voltage.
- Temp: In this whole report Temp means Temperature.
- Humid: In this whole report Humid means humidity.
- Press: In this whole report Press means Pressure.
- N/A: In this whole report not application.

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS	7
4.3 MODULATION CONFIGURATIONS	7
4.4 MEASUREMENT UNCERTAINTY	8
4.5 TEST LOCATION	9
4.6 TEST FACILITY	9
4.7 DEVIATION FROM STANDARDS	9
4.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
5 EQUIPMENT LIST	10
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	13
6.1 ANTENNA REQUIREMENT	13
6.1.1 <i>Test Requirement:</i>	13
6.1.2 <i>Conclusion:</i>	13
7 RADIO SPECTRUM MATTER TEST RESULTS	14
7.1 CONDUCTED EMISSIONS AT AC POWER LINE (150kHz-30MHz)	14
7.1.1 <i>E.U.T. Operation</i>	15
7.1.2 <i>Test Setup Diagram</i>	15
7.1.3 <i>Measurement Procedure and Data</i>	15
7.2 MINIMUM 6dB BANDWIDTH	18
7.2.1 <i>E.U.T. Operation</i>	18
7.2.2 <i>Test Setup Diagram</i>	18
7.2.3 <i>Measurement Procedure and Data</i>	18
7.3 CONDUCTED PEAK OUTPUT POWER	19
7.3.1 <i>E.U.T. Operation</i>	20
7.3.2 <i>Test Setup Diagram</i>	20
7.3.3 <i>Measurement Procedure and Data</i>	20
7.4 POWER SPECTRUM DENSITY	21
7.4.1 <i>E.U.T. Operation</i>	21
7.4.2 <i>Test Setup Diagram</i>	21
7.4.3 <i>Measurement Procedure and Data</i>	21
7.5 CONDUCTED BAND EDGES MEASUREMENT	22
7.5.1 <i>E.U.T. Operation</i>	23
7.5.2 <i>Test Setup Diagram</i>	23
7.5.3 <i>Measurement Procedure and Data</i>	23
7.6 CONDUCTED SPURIOUS EMISSIONS	24
7.6.1 <i>E.U.T. Operation</i>	25
7.6.2 <i>Test Setup Diagram</i>	25
7.6.3 <i>Measurement Procedure and Data</i>	25
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	26
7.7.1 <i>E.U.T. Operation</i>	27
7.7.2 <i>Test Setup Diagram</i>	27



7.7.3	Measurement Procedure and Data.....	28
7.8	RADIATED SPURIOUS EMISSIONS	30
7.8.1	E.U.T. Operation.....	31
7.8.2	Test Setup Diagram.....	31
7.8.3	Measurement Procedure and Data.....	32
8	PHOTOGRAPHS	45
8.1	EUT CONSTRUCTIONAL DETAILS (EUT PHOTOS)	45
9	APPENDIX 15.247	46
9.1	PEAK CONDUCTED OUTPUT POWER	46
9.2	POWER SPECTRUM DENSITY	52
9.3	MINIMUM 6dB BANDWIDTH	60
9.4	CONDUCTED BAND EDGE MEASUREMENT	68
9.5	CONDUCTED SPURIOUS EMISSION	77

4 General Information

4.1 Details of E.U.T.

Power supply:	Adaptor Model: IEC 005 Input: AC 100 V - 240 V, 50/60 Hz, 0.75 A Output: DC 5 V, 1 A or Battery Model: SD364040 Output: DC 3.7 V, 1.85 Wh
Test voltage:	AC 120 V
Cable:	Power Cable: 18.8 cm unshielded 4-wire USB cable Data Cable: 18.8 cm unshielded 4-wire USB cable
Antenna Gain:	2 dBi
Antenna Type:	PIFA Antenna
Channel Spacing:	5MHz
Modulation Type:	802.11b: DSSS (CCK, DQPSK, DBPSK) 802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)
Number of Channels:	802.11b/g/n(HT20):11 802.11n(HT40):7
Operation Frequency:	802.11b/g/n(HT20): 2412MHz to 2462MHz 802.11n(HT40): 2422MHz to 2452MHz
Series No.:	A1
Firmware Version:	1.0.8
Hardware Version:	4.2



Frequency List:

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462
12	2467
13	2472

4.2 Description of Support Units

Description	Manufacturer	Model No.	Serial No.
Laptop	DELL	P75F	H55LXQ2
Linear Adaptor	SGS HK Ltd	IEC 005	N/A
ESP_RF_test_tool_v2.5.exe	PricewaterhouseCoopers Advisory Services LLC	N/A	N/A

4.3 Modulation Configurations

RF software:	ESP_RF_test_tool_v2.5.exe			
Modulation	Packet	Packet Type	Packet Size	Power
802.11b: DSSS (CCK, DQPSK, DBPSK)	Default	Default	Default	Default
	Default	Default	Default	Default
	Default	Default	Default	Default
802.11g/n: OFDM (64QAM, 16QAM, QPSK, BPSK)	Default	Default	Default	Default
	Default	Default	Default	Default
	Default	Default	Default	Default
Remark:				
1. Only two samples was used for RF test.				

4.4 Measurement Uncertainty

RF

No.	Item	Measurement Uncertainty
1	Radio Frequency	$\pm 7.25 \times 10^{-8}$
2	Duty cycle	$\pm 0.37\%$
3	Occupied Bandwidth	$\pm 3\%$
4	RF conducted power (30MHz-40GHz)	1.5dB
5	RF power density	1.5dB
6	Conducted Spurious emissions	1.5dB
7	RF Radiated power & Radiated Spurious emission test	4.9dB (30MHz-1GHz)
		4.6dB (1GHz-6GHz)
		4.7dB (6GHz-18GHz)
		5.6dB (18GHz-40GHz)
8	Temperature test	$\pm 1^{\circ}\text{C}$
9	Humidity test	$\pm 3\%$
10	Supply voltages	$\pm 1.5\%$
11	Time	$\pm 3\%$

Remark:

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors in calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM);Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the test lab quality system according to ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

4.5 Test Location

All tests were performed at:

SGS Hong Kong Limited
Unit 2 and 3, G/F, Block A, Po Lung Centre,
11 Wang Chiu Road, Kowloon Bay, Kowloon, Hong Kong
Tel: +852 2305 2570 Fax: +852 2756 4480

No tests were sub-contracted.

4.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• **HOKLAS (Lab Code: 009)**

SGS Hong Kong Limited has been accepted by HKAS Executive, on the recommendation of the Accreditation Advisory Board, as a HOKLAS Accredited Laboratory, this laboratory meets the requirements of ISO/IEC 17025:2017 and it has been accredited for performing specific test as listed in the scope of accreditation within the test category of Electrical and Electronic Products.

• **IAS Accreditation (Lab Code: TL-187)**

SGS Hong Kong Limited has met the requirements of AC89, IAS Accreditation Criteria for Testing Laboratories, and has demonstrated compliance with ISO/IEC Standard 17025:2017, General requirements for the competence of testing and calibration laboratories. This organization is accredited to provide the services specified in the scope of accreditation maintained on the IAS website (www.iasonline.org).

The report must not be used by the client to claim product certification, approval, or endorsement by IAS, NIST, or any agency of the Federal Government.

• **FCC Recognized Accredited Test Firm (CAB Registration No.: 514599)**

SGS Hong Kong Limited has been accredited and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Designation Number: HK0015, Test Firm Registration Number: 514599.

• **Industry Canada (Site Registration No.: 26103; CAB Identifier No.: HK0015)**

SGS Hong Kong Limited has been recognized by Department of Innovation, Science and Economic Development (ISED) Canada as a wireless testing laboratory. The acceptance letter from the ISED is maintained in our files. CAB Identifier No: HK0015, Site Registration Number: 26103.

4.7 Deviation from Standards

None

4.8 Abnormalities from Standard Conditions

None

5 Equipment List

Conducted Emissions at AC Power Line (150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
EMI Test Receiver 9kHz to 3.6GHz	Rohde & Schwarz	ESR3 / 102326	E231	2020/08/31	2021/08/30
Artificial Mains Network (LISN)	Schwarzbeck	NSLK 8127 / 8127312	E005	2020/05/12	2021/05/11
Impulse Limiter	Rohde & Schwarz	ESH-3-Z2 / 357881052	E028	2020/09/12	2021/09/11
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A

Minimum 6dB Bandwidth					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Peak Output Power					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A



Power Spectrum Density					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Band Edges Measurement					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Conducted Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
SMBV100A VECTOR SIGNAL GENERATOR	Rohde & Schwarz	SMBV100A	E234	2020/08/31	2021/08/30
FSV40 SIGNAL ANALYZER 40GHz	Rohde & Schwarz	FSV40	E235	2020/08/31	2021/08/30
Wireless Conn. Tester (CMW)	Rohde & Schwarz	CMW270	E240	CAL IN USE	CAL IN USE
OSP	Rohde & Schwarz	OSP-B157W8	E242	2020/08/31	2021/08/30
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
Cable	Rohde & Schwarz	J12J103539-00-2	E239	2020/09/21	2021/09/20
WMS32 Test software	Rohde & Schwarz	N/A	Version 11	N/A	N/A

Radiated Spurious Emissions					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
3m Semi-Anechoic Chamber	ChamPro	N/A	E229	2020/08/09	2021/08/08
Coaxial Cable	SGS	N/A	E167	2020/07/20	2021/07/19
EMI Test Receiver 9kHz to 7GHz	Rohde & Schwarz	ESR7 / 102298	E314	2020/05/18	2021/05/18
TRILOG Super Broadb. Test Antenna, (25) 30-1000 MHz	Schwarzbeck	9168-1110	E311	2020/02/13	2022/02/12
EMC32 Test software	Rohde & Schwarz	Version 10	N/A	N/A	N/A
Spectrum Analyzer 9kHz - 30GHz	Rohde & Schwarz	FSP30	E204	2020/05/11	2021/05/10
Horn Antenna 1 - 18GHz	Schwarzbeck	BBHA9120D	E211	2020/03/11	2022/03/10
Preamplifier 33dB, 1 - 18GHz	Schwarzbeck	BBV9718	E214	2020/04/09	2021/04/08
Band Reject Filter 2.4-2.5GHz	Wainwright	WRCJV 2400/2500- 2100	E206	2019/04/24	2021/04/23
RF cable SMA to SMA 10000mm	HUBER+SUHNER	SF104- 26.5/2*11SMA 45	E207	2020/09/21	2021/09/20
Boresight Mast Controller	ChamPro	AM-BS-4500-E	E237	N/A	N/A
Turntable with Controller	ChamPro	EM1000	E238	N/A	N/A

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Digital temperature & humidity data logger	SATO	SK-L200TH II	E232	2020/09/12	2021/09/11
Electronic Digital Thermometer with Hygrometer	nil	2074/2075	E159	2020/09/12	2021/09/11
Barometer with digital thermometer	SATO	7612-00	E218	2020/4/23	2021/04/22
Conditional Chamber	Zhong Zhi Testing Instruments	CZ-E-608D	E216	2020/8/31	2021/08/30

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.203 & 15.247(b)(4)


6.1.2 Conclusion

Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

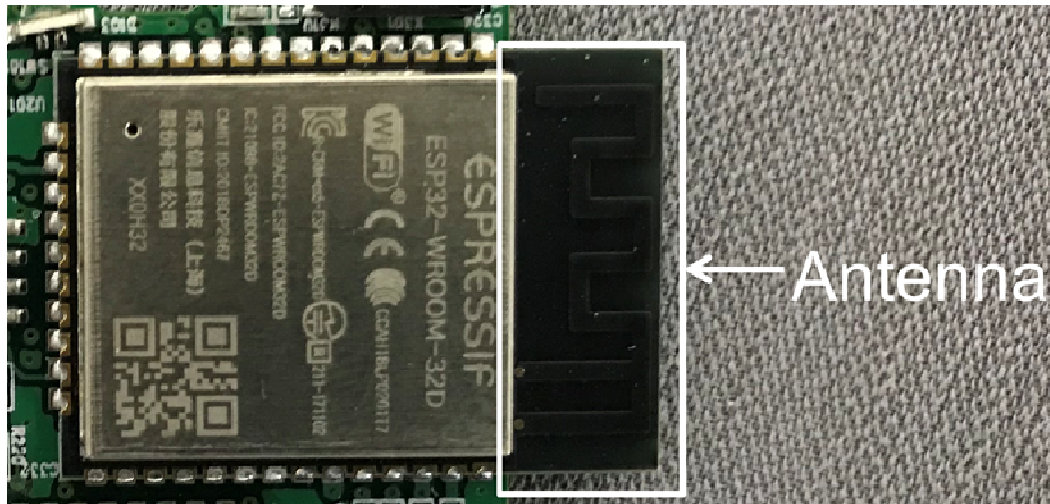

EUT Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 2 dBi.

Antenna location: Refer to internal photo.



7 Radio Spectrum Matter Test Results

7.1 Conducted Emissions at AC Power Line (150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207
Test Method: ANSI C63.10 (2013) Section 6.2
Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		


7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.1.2 Test Setup Diagram

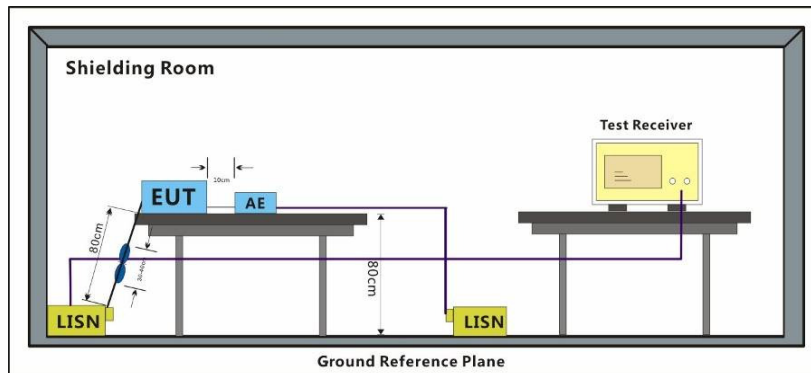


7.1.3 Measurement Procedure and Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

Remark: LISN=Read Level+ Cable Loss+ LISN Factor

Mode:a; Line:Live Line


Full Spectrum

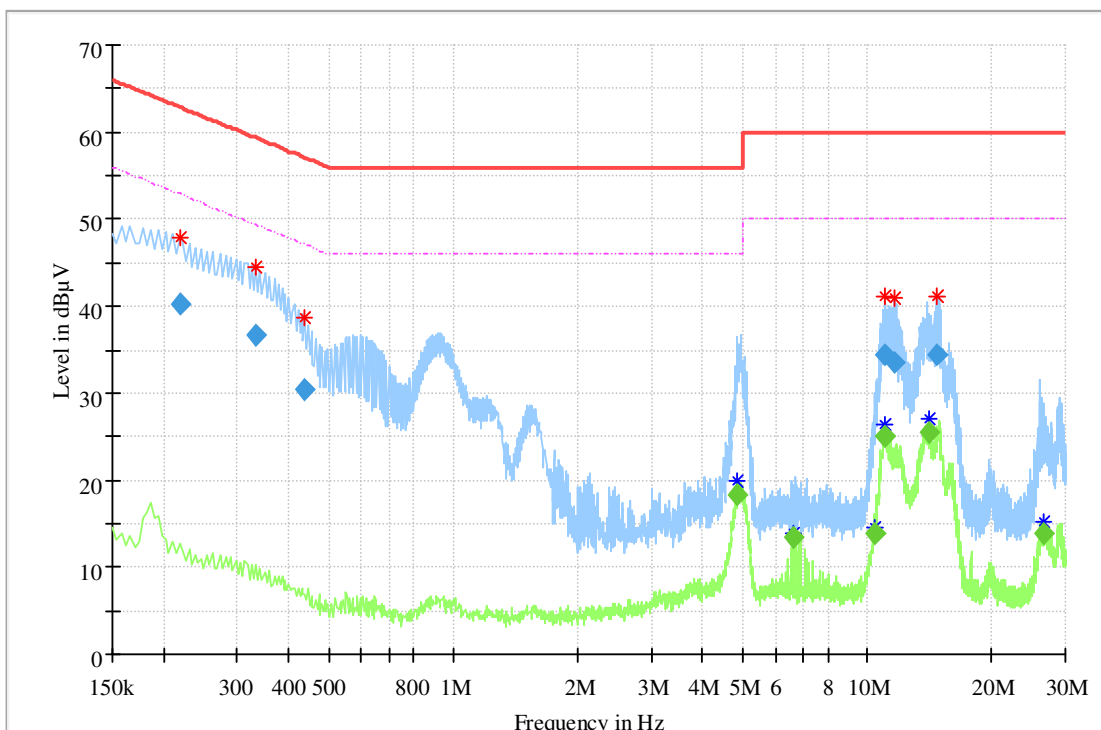

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
0.218000	40.3	---	62.9	22.6	10.1	Pass
0.334000	36.6	---	59.4	22.7	10.0	Pass
0.438000	30.5	---	57.1	26.6	10.1	Pass
4.854000	---	18.3	46.0	27.8	10.1	Pass
6.626000	---	13.4	50.0	36.6	10.1	Pass
10.378000	---	13.8	50.0	36.2	10.1	Pass
10.950000	---	25.0	50.0	25.1	10.2	Pass
10.958000	34.5	---	60.0	25.5	10.6	Pass
11.654000	33.5	---	60.0	26.5	11.0	Pass
14.082000	---	25.5	50.0	24.6	11.3	Pass
14.778000	34.5	---	60.0	25.6	11.2	Pass
26.502000	---	13.8	50.0	36.2	11.1	Pass

Mode:a; Line:Neutral Line

Full Spectrum

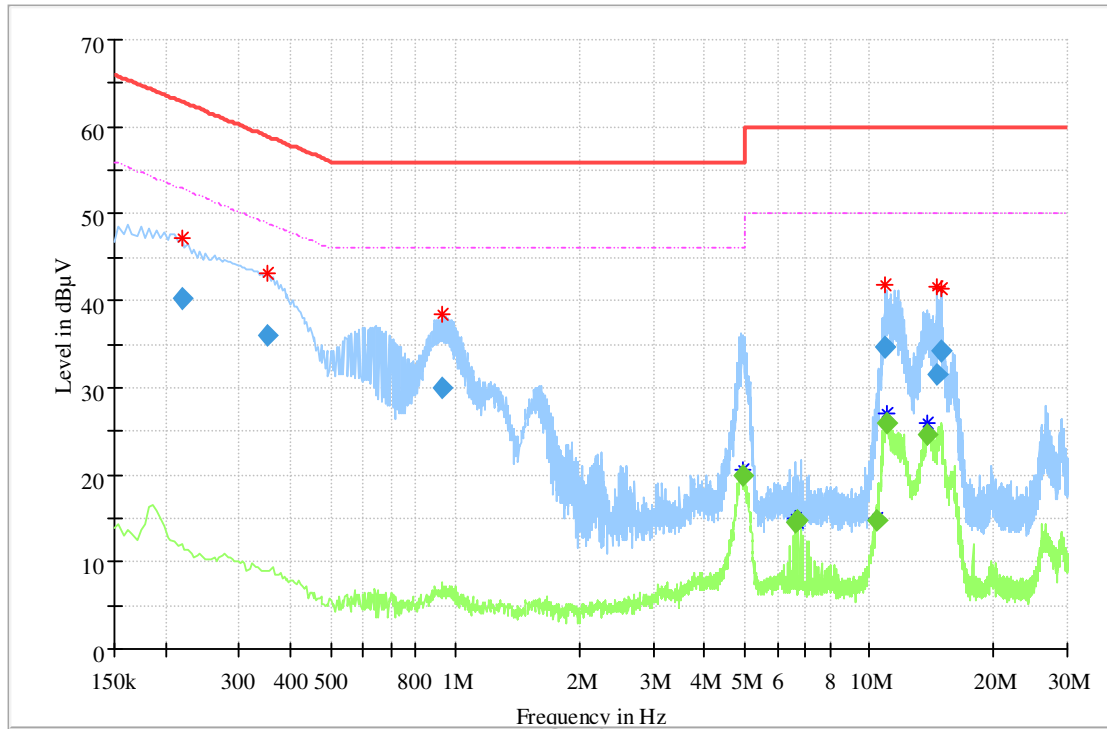

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Corr. (dB)	Result
0.218000	40.2	---	62.9	22.7	10.1	Pass
0.350000	36.1	---	59.0	22.9	10.0	Pass
0.930000	30.0	---	56.0	26.0	10.1	Pass
4.930000	---	19.9	46.0	26.1	10.1	Pass
6.626000	---	14.5	50.0	35.5	10.1	Pass
6.730000	---	14.7	50.0	35.3	10.1	Pass
10.378000	---	14.8	50.0	35.2	10.2	Pass
10.890000	34.7	---	60.0	25.3	10.6	Pass
11.014000	---	25.9	50.0	24.1	11.0	Pass
13.842000	---	24.7	50.0	25.3	11.3	Pass
14.546000	31.4	---	60.0	28.6	11.2	Pass
14.814000	34.1	---	60.0	25.9	11.1	Pass

7.2 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
 Test Method: ANSI C63.10 (2013) Section 11.8.1
 Limit: ≥ 500 kHz


7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode. Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.2.2 Test Setup Diagram

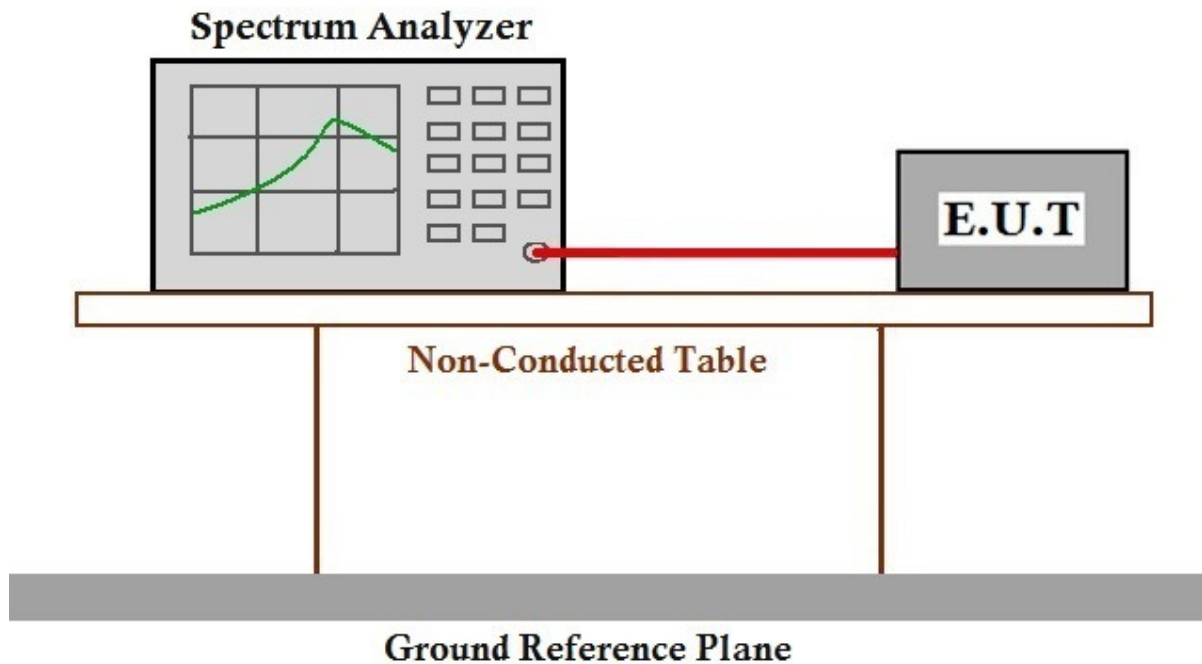

7.2.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.8.1

The detailed test data see: Appendix 15.247

7.3 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)

Test Method: ANSI C63.10 (2013) Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.3.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.3.2 Test Setup Diagram

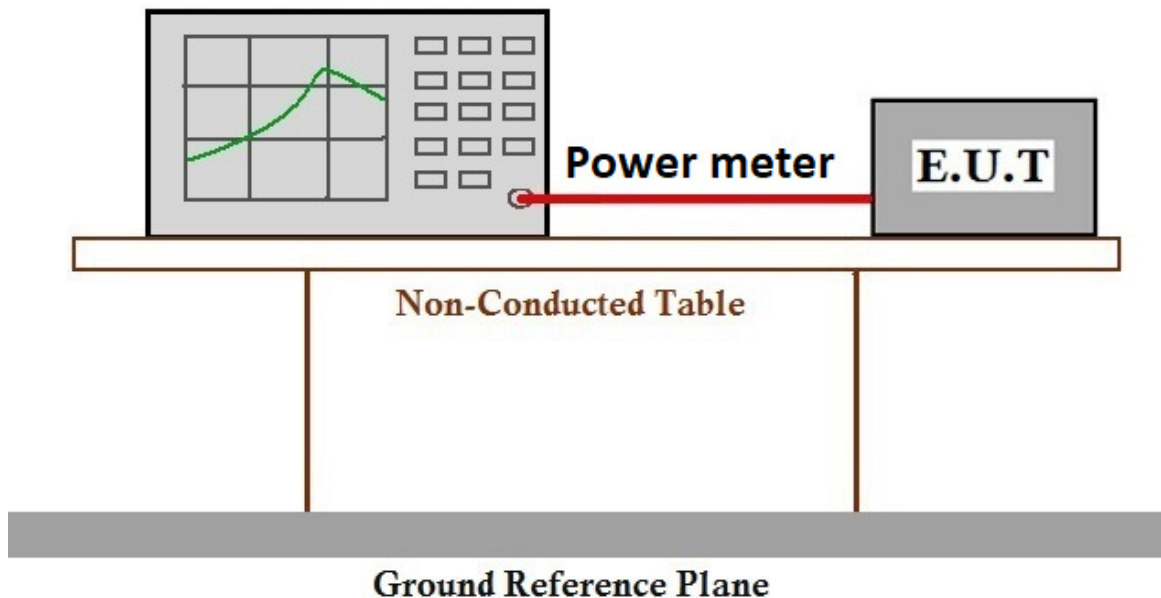

7.3.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.9.1

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement	47 CFR Part 15, Subpart C 15.247(e)
Test Method:	ANSI C63.10 (2013) Section 11.10.2
Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission


7.4.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode. Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.4.2 Test Setup Diagram

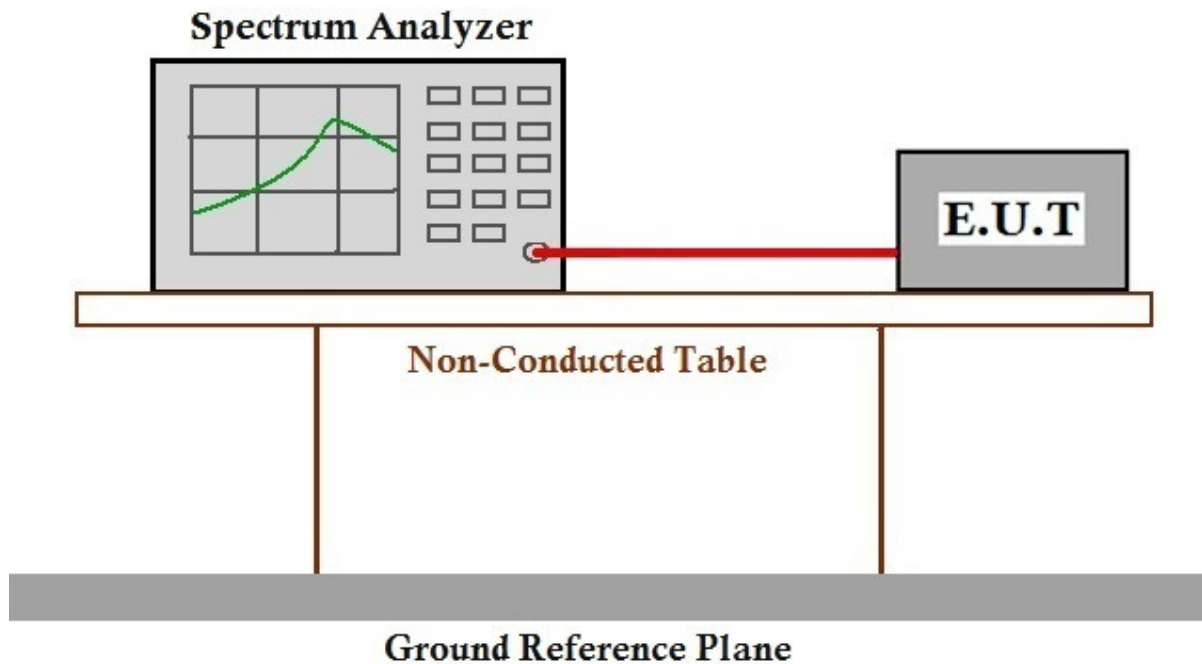

7.4.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.10.2

The detailed test data see: Appendix 15.247

7.5 Conducted Band Edges Measurement

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.13.3.2

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.5.2 Test Setup Diagram

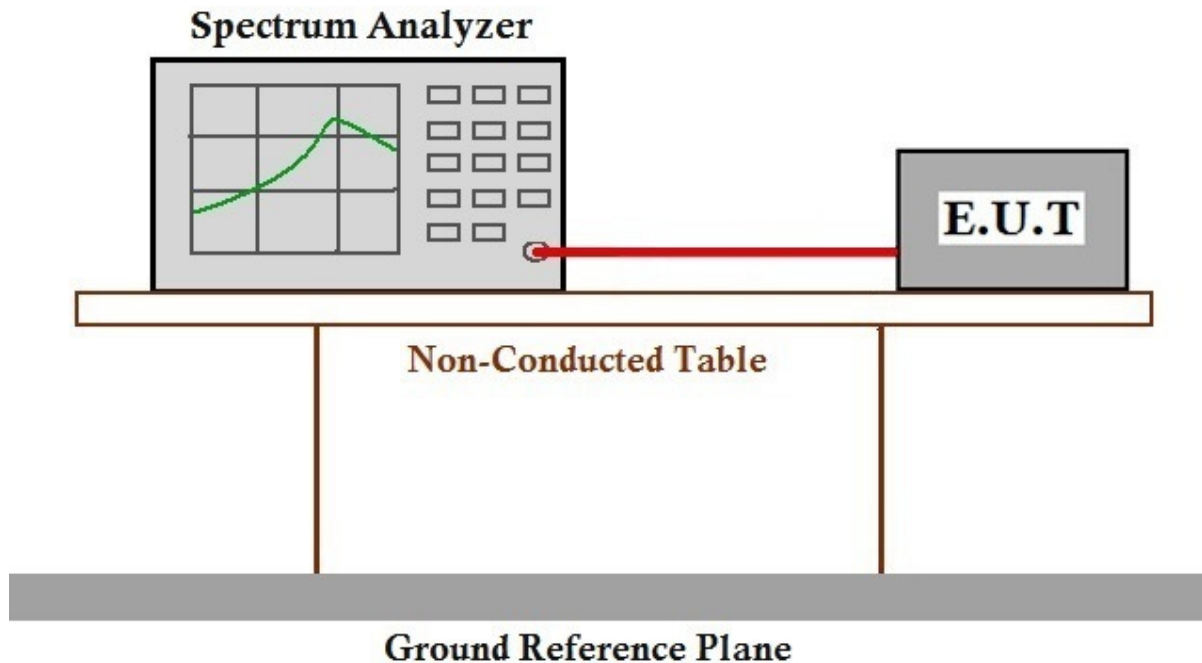

7.5.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.13.3.2

The detailed test data see: Appendix 15.247

7.6 Conducted Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.247(d)

Test Method: ANSI C63.10 (2013) Section 11.11

Limit: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c))


7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.6.2 Test Setup Diagram

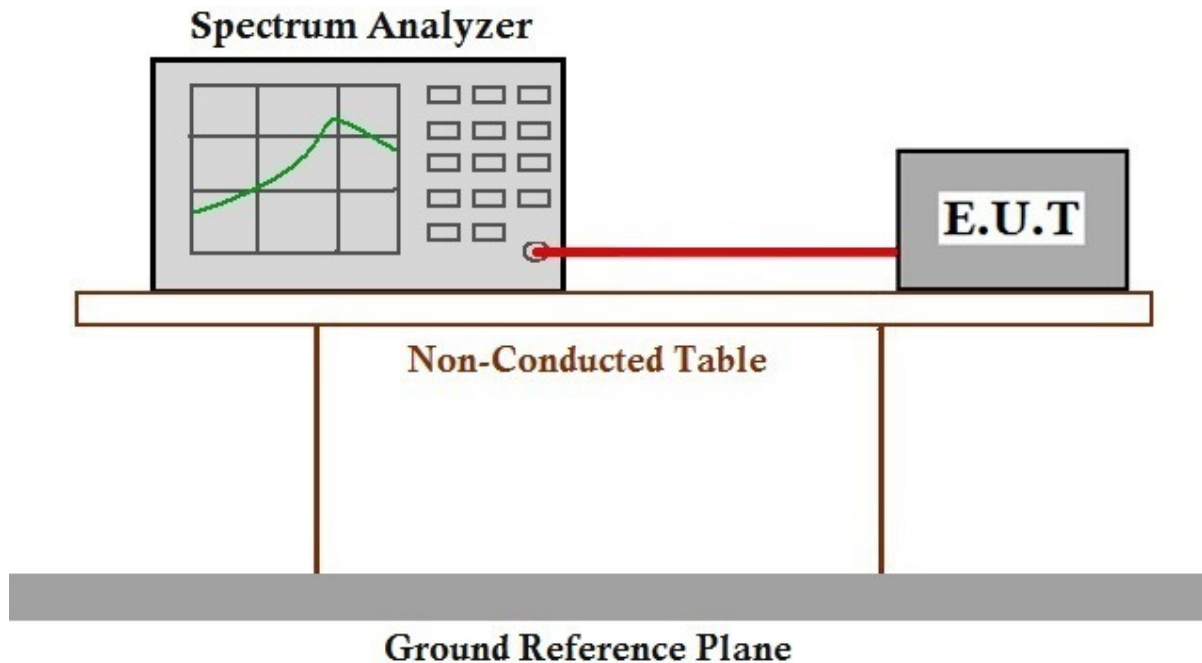

7.6.3 Measurement Procedure and Data

The test method: ANSI C63.10 (2013) Section 11.11

The detailed test data see: Appendix 15.247



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)
Test Method: ANSI C63.10 (2013) Section 6.10.5
Measurement Distance: 3m
Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.7.2 Test Setup Diagram

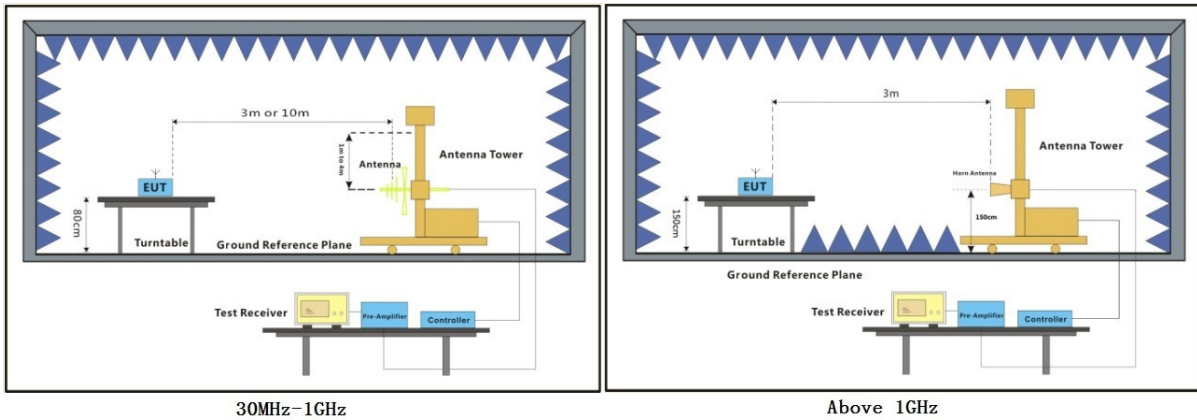

7.7.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark 1: $\text{Level} = \text{Read Level} + \text{Cable Loss} + \text{Antenna Factor} - \text{Preamp Factor}$

Remark 2: For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

802.11b

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
2390.000	H	54.7	42.0	74.0	54.0	Pass
2483.500	H	47.7	31.8	74.0	54.0	Pass
2390.000	V	52.5	33.1	74.0	54.0	Pass
2483.500	V	50.1	37.2	74.0	54.0	Pass

802.11g

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
2390.000	H	51.6	35.1	74.0	54.0	Pass
2483.500	H	64.2	50.2	74.0	54.0	Pass
2390.000	V	51.7	33.2	74.0	54.0	Pass
2483.500	V	58.5	44.1	74.0	54.0	Pass

802.11n (HT20)

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
2390.000	H	51.2	35.2	74.0	54.0	Pass
2483.500	H	68.2	51.9	74.0	54.0	Pass
2390.000	V	52.1	31.6	74.0	54.0	Pass
2483.500	V	58.0	42.2	74.0	54.0	Pass

802.11n (HT40)

Frequency (MHz)	Antenna Polarization	Emission Level (dBμV/m)		Limit (dBμV/m)		Remark
		Peak	Average	Peak	Average	
2390.000	H	52.4	36.9	74.0	54.0	Pass
2483.500	H	64.0	51.7	74.0	54.0	Pass
2390.000	V	52.3	32.8	74.0	54.0	Pass
2483.500	V	58.3	45.7	74.0	54.0	Pass



7.8 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.4,6.5,6.6

Measurement Distance: 3m

Limit:

Frequency(MHz)	Field strength(microvolts/meter)	Measurement distance(meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remark: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90kHz, 110-490kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation.


7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25 °C Humidity: 50 % RH :

Test mode a: Charge + TX mode Keep the EUT in charging and continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 1Mbps is the worst case of IEEE 802.11b; data rate @ 6Mbps is the worst case of IEEE 802.11g; data rate @ 6.5Mbps is the worst case of IEEE 802.11n(HT20); data rate @ 13.5Mbps is the worst case of IEEE 802.11n(HT40). Only the data of worst case is recorded in the report.

7.8.2 Test Setup Diagram

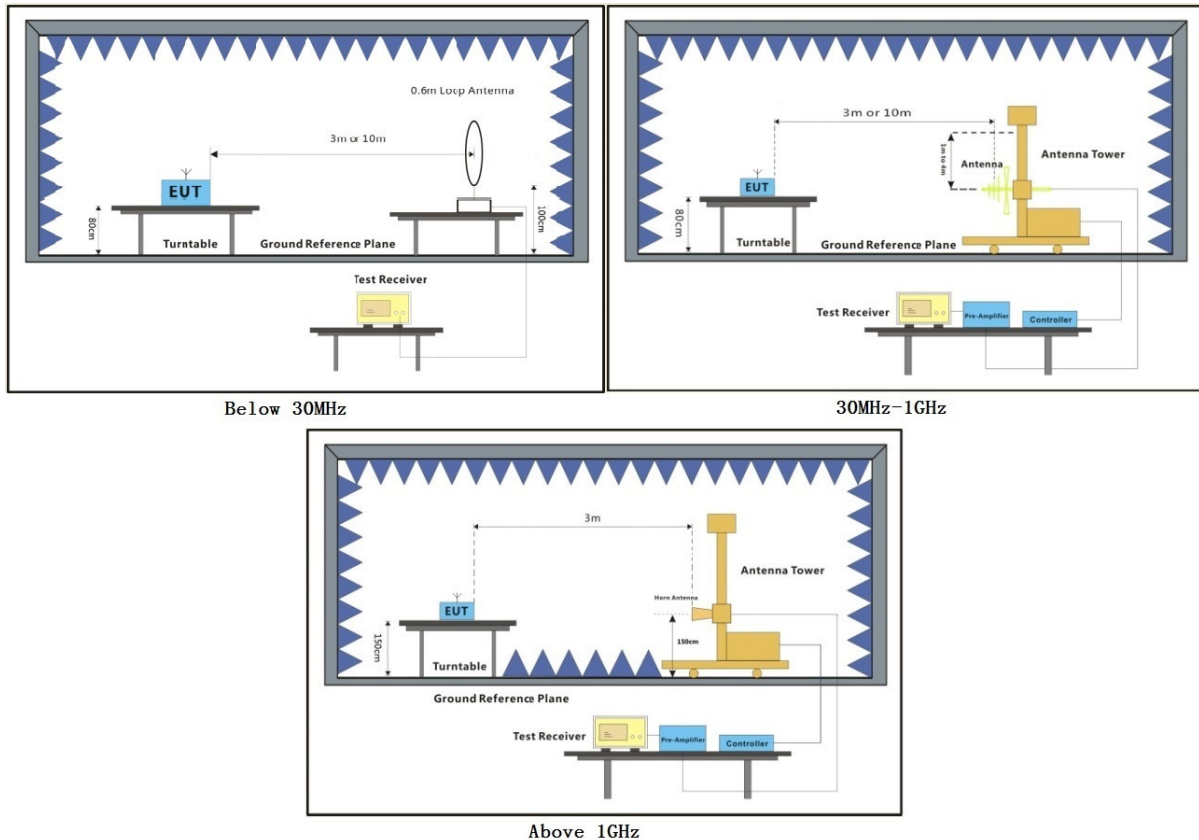

7.8.3 Measurement Procedure and Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.

Remark:


- 1) For emission below 1GHz, through pre-scan found the worst case is the lowest channel. Only the worst case is recorded in the report.
- 2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
Final Test Level = Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor
- 3) Scan from 9kHz to 25GHz, the disturbance above 18GHz and below 30MHz was very low. The points marked on above plots are the highest emissions could be found when testing, so only above points had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 4) For frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For the emissions whose peak level is lower than the average limit, only the peak measurement is shown in the report.

802.11b

Radiated emission below 1GHz


Mode:a;

Polarization: Horizontal;

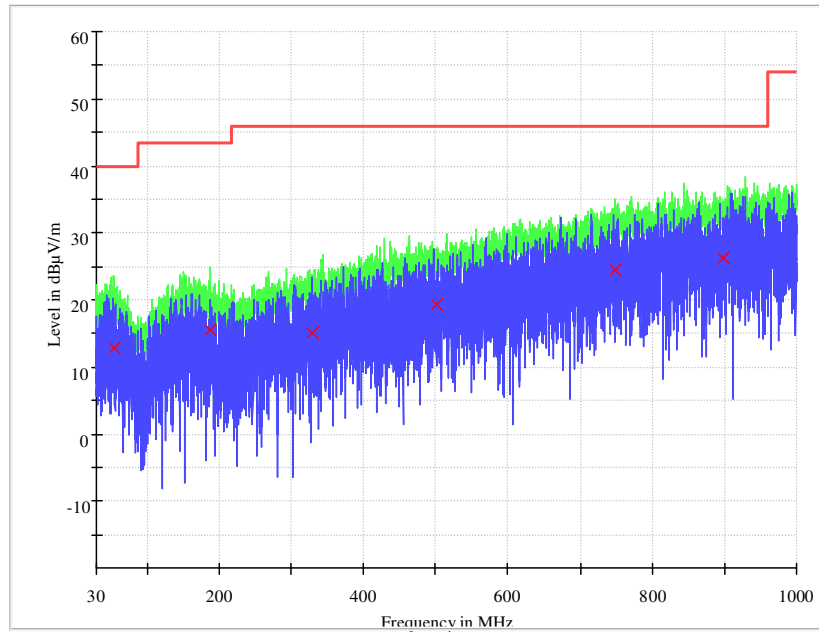

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
53.903571	12.8	H	14.1	27.2	40.0	Pass
188.456429	15.6	H	11.5	27.9	43.5	Pass
328.413571	15.2	H	15.8	30.9	46.0	Pass
502.112857	19.2	H	19.6	26.8	46.0	Pass
749.670714	24.5	H	24.6	21.5	46.0	Pass
898.704286	26.3	H	25.9	19.8	46.0	Pass

Mode:a;
Polarization: Vertical;

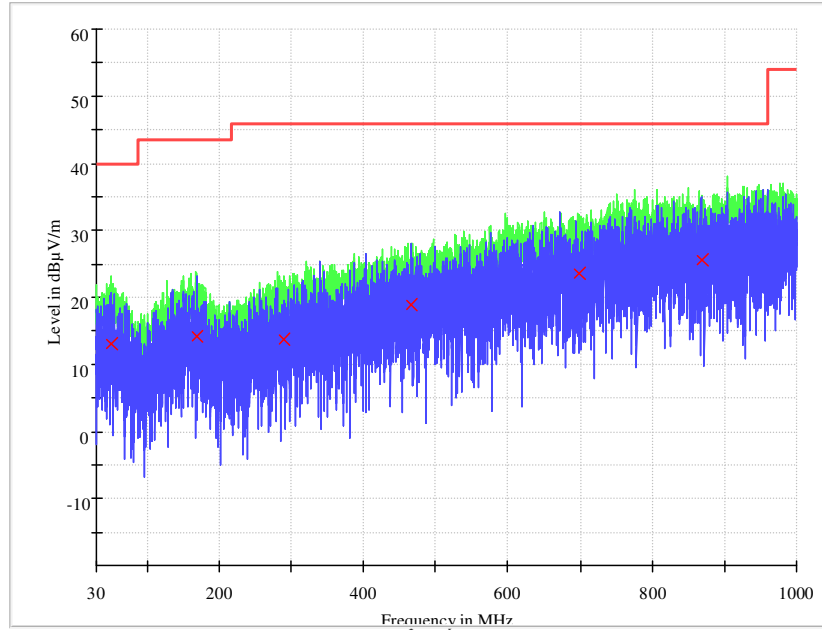

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
50.231429	13.0	V	14.2	27.0	40.0	Pass
168.155714	14.3	V	14.2	29.2	43.5	Pass
288.782143	13.7	V	14.5	32.3	46.0	Pass
466.985000	19.0	V	19.3	27.1	46.0	Pass
699.022857	23.5	V	23.3	22.5	46.0	Pass
868.149286	25.6	V	25.3	20.4	46.0	Pass

Remark: Only the worst case is shown.

Above 1GHz

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1997.500	H	47.5	27.6	74.0	54.0	PASS
4824.000	H	59.8	49.9	74.0	54.0	PASS
8435.000	H	49.2	35.9	74.0	54.0	PASS
3995.000	V	46.2	29.1	74.0	54.0	PASS
4824.500	V	53.2	44.4	74.0	54.0	PASS
6640.000	V	53.1	34.1	74.0	54.0	PASS

Channel:Middle


Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1991.000	H	46.0	26.2	74.0	54.0	PASS
4874.500	H	58.2	50.2	74.0	54.0	PASS
7695.430	H	48.8	36.0	74.0	54.0	PASS
1994.000	V	44.2	26.3	74.0	54.0	PASS
4885.000	V	48.8	38.8	74.0	54.0	PASS
8435.354	V	49.0	35.9	74.0	54.0	PASS

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1664.500	H	40.1	24.8	74.0	54.0	PASS
4924.500	H	57.9	49.9	74.0	54.0	PASS
8686.000	H	48.6	36.2	74.0	54.0	PASS
1996.500	V	45.0	26.1	74.0	54.0	PASS
4924.500	V	53.6	44.8	74.0	54.0	PASS
8435.350	V	49.0	35.8	74.0	54.0	PASS


802.11g
Radiated emission below 1GHz

Mode:a;
Polarization: Horizontal;

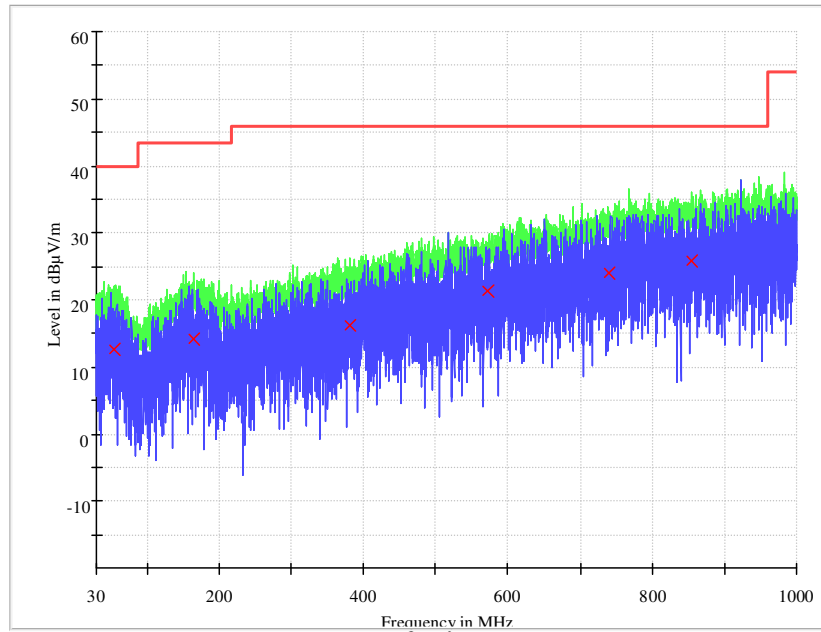

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
54.250000	12.7	H	14.1	27.3	40.0	Pass
165.869286	14.2	H	14.3	29.3	43.5	Pass
380.862857	16.1	H	16.9	29.9	46.0	Pass
572.922857	21.3	H	21.0	24.7	46.0	Pass
739.693571	24.1	H	24.3	21.9	46.0	Pass
854.915714	25.8	H	25.4	20.2	46.0	Pass

Mode:a;
Polarization: Vertical;

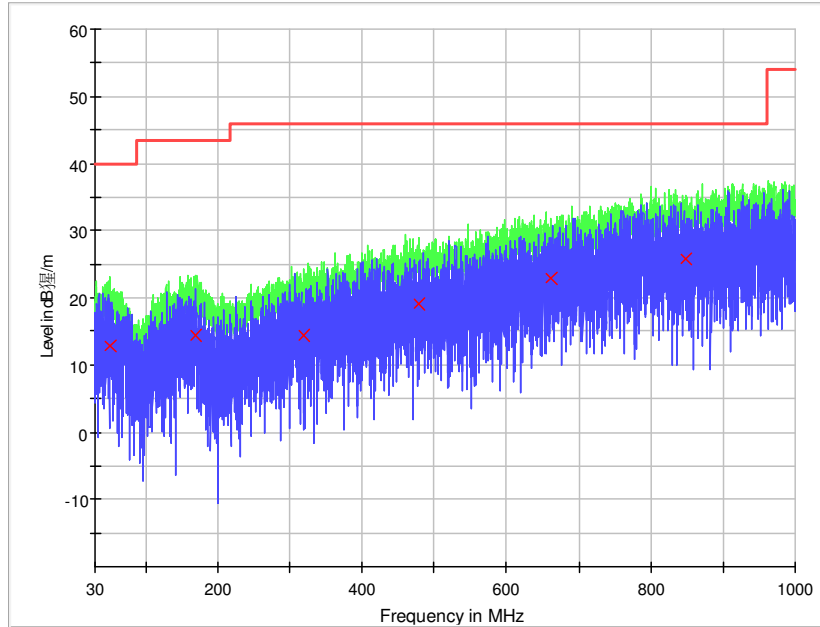

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
51.340000	12.8	V	14.2	27.2	40.0	Pass
168.987143	14.4	V	14.1	29.1	43.5	Pass
319.060000	14.5	V	15.4	31.5	46.0	Pass
477.932143	19.2	V	19.2	26.8	46.0	Pass
661.192857	22.9	V	22.7	23.1	46.0	Pass
848.195000	25.8	V	25.3	20.2	46.0	Pass

Remark: Only the worst case is shown.

Above 1GHz

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1652.000	H	36.4	23.2	74.0	54.0	PASS
4826.500	H	55.2	44.8	74.0	54.0	PASS
7984.500	H	50.4	36.9	74.0	54.0	PASS
1534.000	V	37.7	25.1	74.0	54.0	PASS
4825.500	V	50.9	39.2	74.0	54.0	PASS
8534.000	V	49.4	36.5	74.0	54.0	PASS

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1546.000	H	36.4	23.1	74.0	54.0	PASS
4872.500	H	56.0	44.7	74.0	54.0	PASS
7206.000	H	48.8	35.0	74.0	54.0	PASS
1536.000	V	34.9	22.6	74.0	54.0	PASS
4869.500	V	51.3	39.2	74.0	54.0	PASS
7845.000	V	50.1	37.3	74.0	54.0	PASS

Channel: High


Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1354.000	H	35.2	22.2	74.0	54.0	PASS
4927.000	H	55.5	44.7	74.0	54.0	PASS
8533.700	H	50.1	36.6	74.0	54.0	PASS
1659.840	V	36.0	22.5	74.0	54.0	PASS
4924.500	V	52.2	39.8	74.0	54.0	PASS
5312.500	V	50.6	30.6	74.0	54.0	PASS

802.11n (HT20)

Radiated emission below 1GHz


Mode:a;

Polarization: Horizontal;

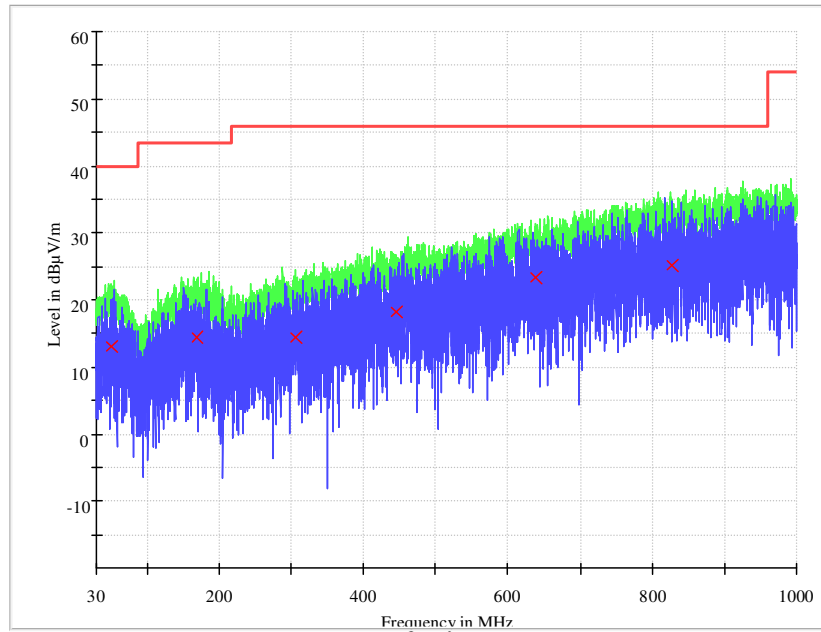

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
49.746429	13.0	H	14.2	27.0	40.0	Pass
169.472143	14.5	H	14.1	29.0	43.5	Pass
306.103571	14.5	H	15.0	31.6	46.0	Pass
446.060714	18.2	H	18.6	27.8	46.0	Pass
637.912857	23.3	H	22.4	22.7	46.0	Pass
826.577857	25.3	H	25.2	20.8	46.0	Pass

Mode:a;
Polarization: Vertical;

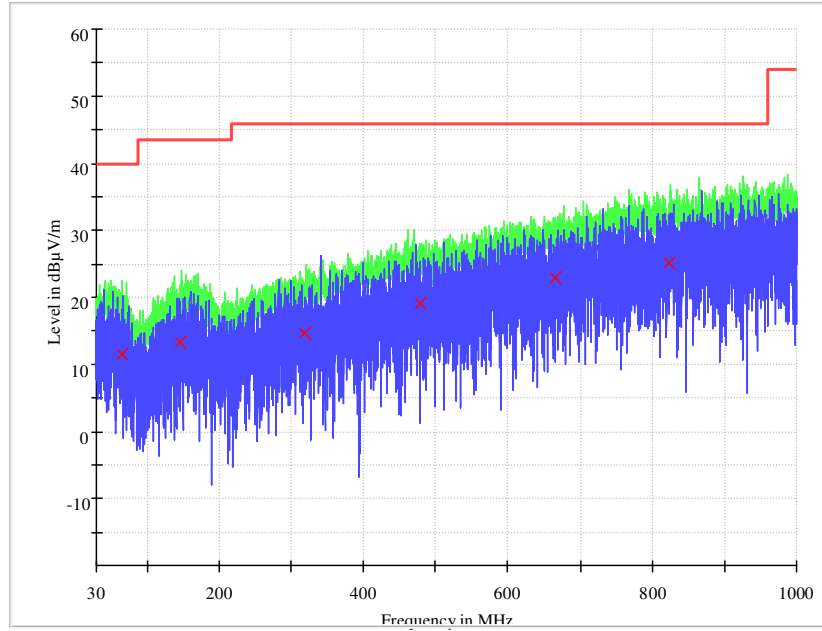

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
65.612857	11.6	V	13.0	28.4	40.0	Pass
146.122857	13.3	V	13.9	30.2	43.5	Pass
319.198571	14.6	V	15.4	31.4	46.0	Pass
477.793571	19.1	V	19.2	26.9	46.0	Pass
666.597143	22.9	V	22.7	23.1	46.0	Pass
823.044286	25.1	V	25.1	20.9	46.0	Pass

Remark: Only the worst case is shown.

Above 1GHz

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1980.000	H	36.5	23.3	74.0	54.0	PASS
4825.500	H	54.7	43.8	74.0	54.0	PASS
8986.344	H	49.0	36.2	74.0	54.0	PASS
1365.800	V	36.1	22.8	74.0	54.0	PASS
4827.000	V	51.7	38.7	74.0	54.0	PASS
8867.000	V	49.1	36.5	74.0	54.0	PASS

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1354.000	H	35.6	22.5	74.0	54.0	PASS
4872.000	H	57.9	44.4	74.0	54.0	PASS
8454.350	H	48.7	35.8	74.0	54.0	PASS
1964.500	V	39.2	24.2	74.0	54.0	PASS
4878.500	V	52.3	38.7	74.0	54.0	PASS
7896.540	V	50.3	37.5	74.0	54.0	PASS

Channel: High


Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1584.850	H	36.4	23.5	74.0	54.0	PASS
4927.500	H	56.7	44.2	74.0	54.0	PASS
8534.300	H	49.7	36.6	74.0	54.0	PASS
2032.144	V	39.6	24.9	74.0	54.0	PASS
4923.000	V	51.9	39.1	74.0	54.0	PASS
8943.500	V	49.7	36.4	74.0	54.0	PASS

802.11n (HT40)

Radiated emission below 1GHz


Mode:a;

Polarization: Horizontal;

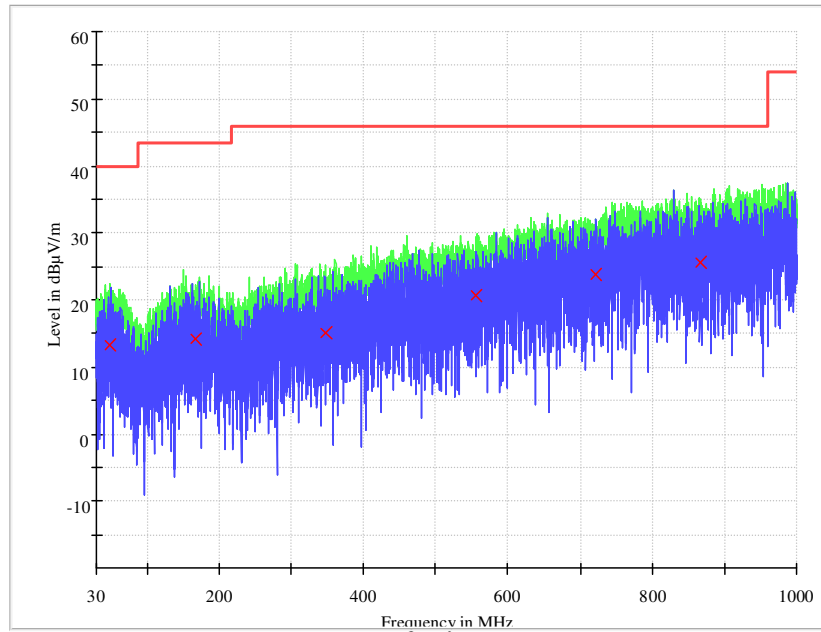

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
48.083571	13.3	H	14.2	26.7	40.0	Pass
166.215714	14.1	H	14.2	29.4	43.5	Pass
347.120714	15.1	H	16.0	30.9	46.0	Pass
554.631429	20.6	H	20.5	25.4	46.0	Pass
722.580000	23.8	H	23.3	22.2	46.0	Pass
867.595000	25.6	H	25.3	20.4	46.0	Pass

Mode:a;
Polarization: Vertical;

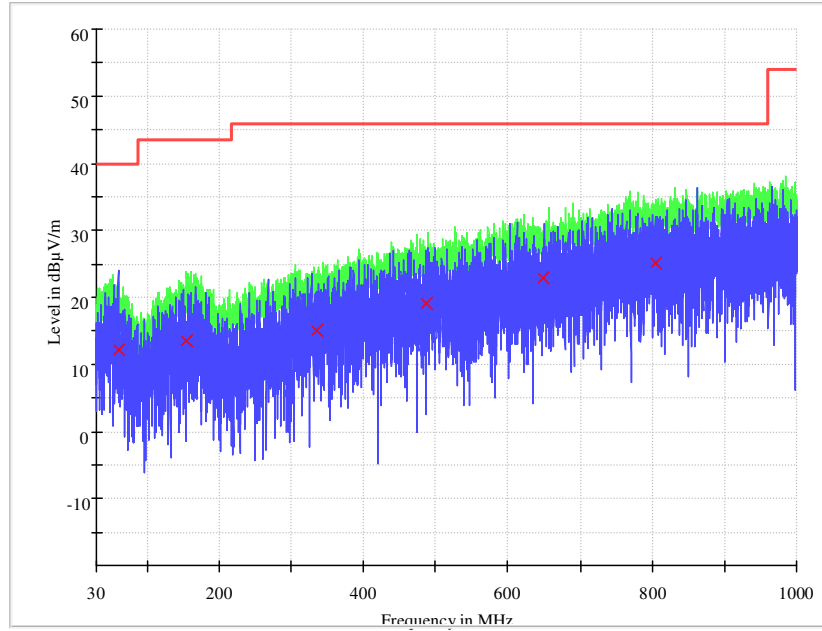

Frequency (MHz)	QuasiPeak (dBμV/m)	Pol.	Corr. (dB/m)	Margin (dB)	Limit (dBμV/m)	Result
60.139286	12.2	V	13.6	27.9	40.0	Pass
155.545714	13.5	V	14.3	30.0	43.5	Pass
335.619286	15.0	V	15.9	31.0	46.0	Pass
486.038571	19.1	V	19.2	26.9	46.0	Pass
648.167143	23.0	V	22.6	23.0	46.0	Pass
803.852143	25.0	V	24.9	21.0	46.0	Pass

Remark: Only the worst case is shown.

Above 1GHz

Channel:Low

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1896.400	H	36.9	23.7	74.0	54.0	PASS
4849.000	H	53.9	42.1	74.0	54.0	PASS
8956.000	H	49.1	36.0	74.0	54.0	PASS
1384.000	V	35.8	22.6	74.0	54.0	PASS
4859.500	V	48.3	35.9	74.0	54.0	PASS
8786.460	V	49.5	36.6	74.0	54.0	PASS

Channel:Middle

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1654.467	H	37.9	25.3	74.0	54.0	PASS
4874.500	H	54.2	42.6	74.0	54.0	PASS
7894.350	H	50.7	37.5	74.0	54.0	PASS
1435.450	V	36.9	23.8	74.0	54.0	PASS
4874.500	V	49.2	36.9	74.0	54.0	PASS
8942.450	V	49.2	36.4	74.0	54.0	PASS

Channel: High

Frequency (MHz)	Antenna Polarization	Emission Level (dB μ V/m)		Limit (dB μ V/m)		Remark
		Peak	Average	Peak	Average	
1354.867	H	35.2	22.8	74.0	54.0	PASS
4921.000	H	51.7	40.1	74.0	54.0	PASS
9454.200	H	50.5	37.5	74.0	54.0	PASS
1354.780	V	35.3	22.5	74.0	54.0	PASS
4915.500	V	48.6	36.7	74.0	54.0	PASS
8434.354	V	49.3	35.9	74.0	54.0	PASS



8 Photographs

8.1 EUT Constructional Details (EUT Photos)

Refer to the appendices setup, external and internal photos.

9 Appendix 15.247


9.1 Peak conducted output power

802.11b


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	18.8	30.0	PASS
2437.000000	19.0	30.0	PASS
2462.000000	19.0	30.0	PASS


Remark: Antenna gain is 2 dBi

Gated Trace

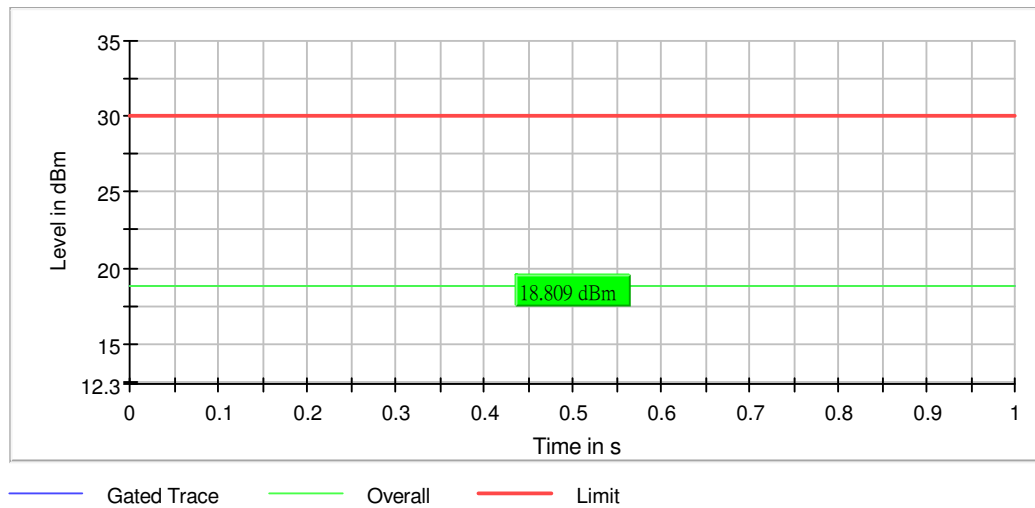

Gated Trace

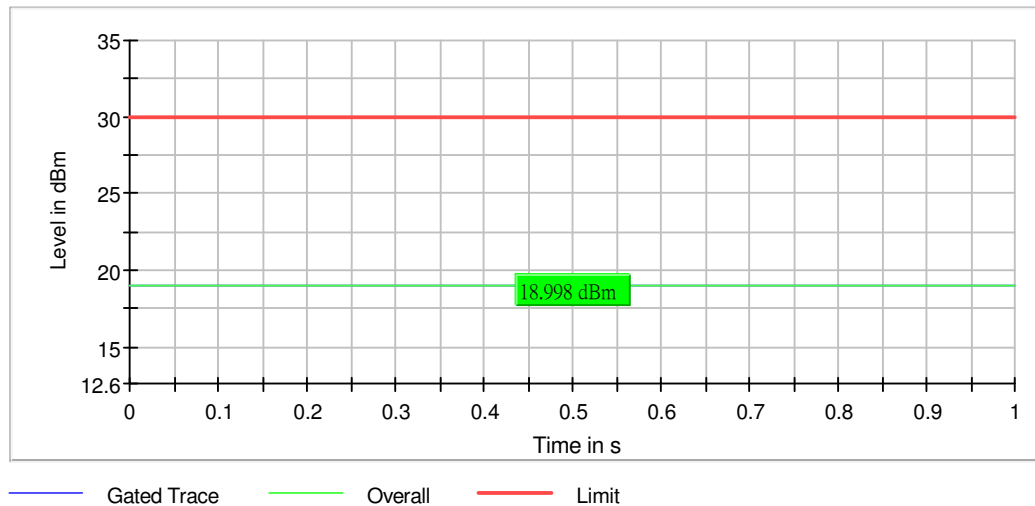

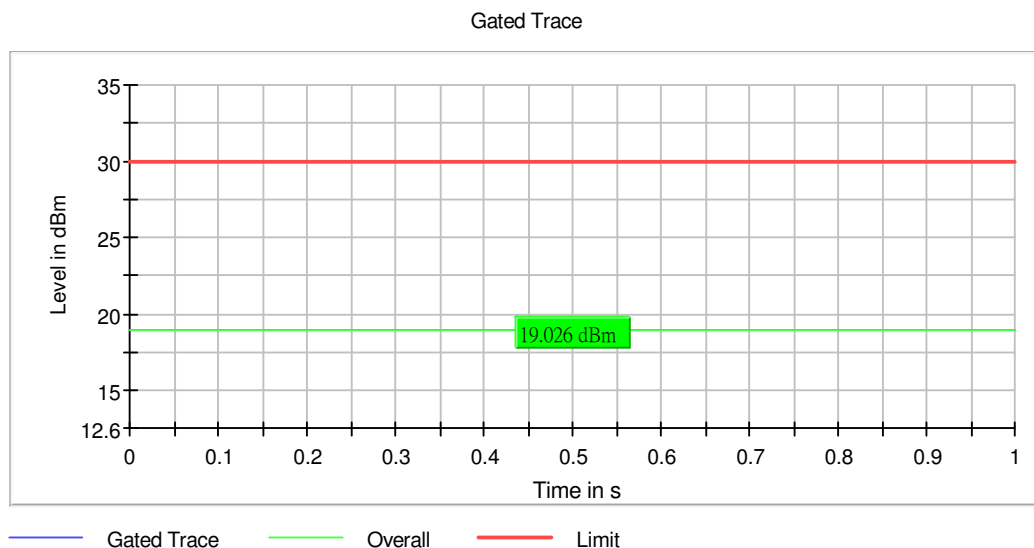


Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11g

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	17.8	30.0	PASS
2437.000000	18.4	30.0	PASS
2462.000000	18.6	30.0	PASS

Remark: Antenna gain is 2 dBi

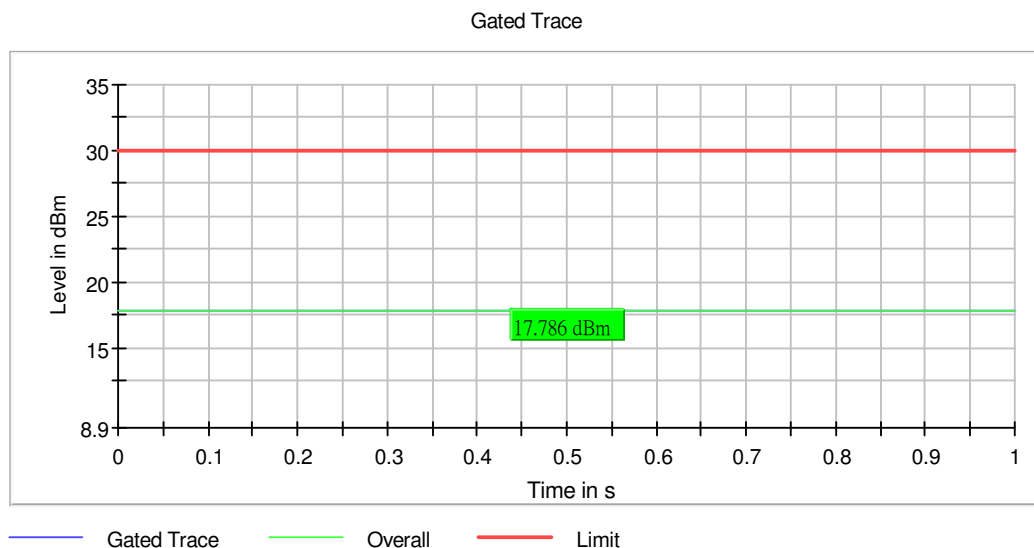


Gated Trace

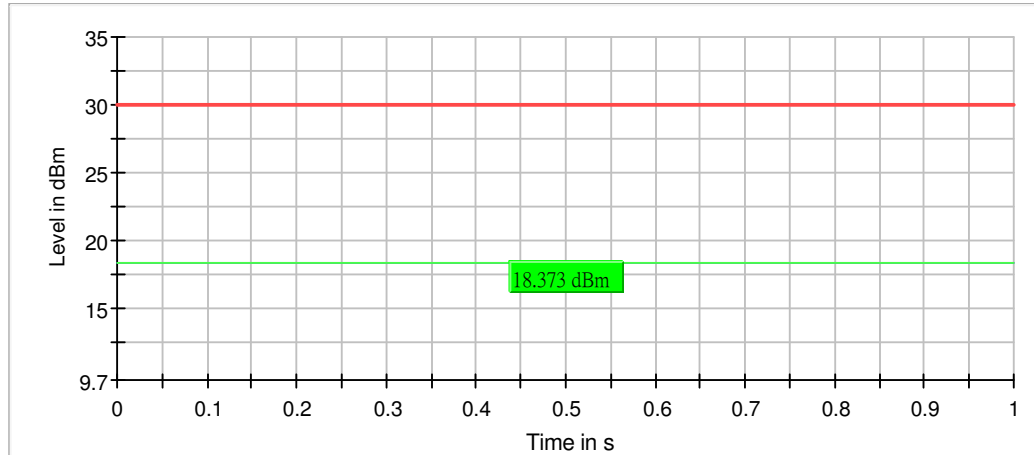

— Gated Trace — Overall — Limit

Gated Trace

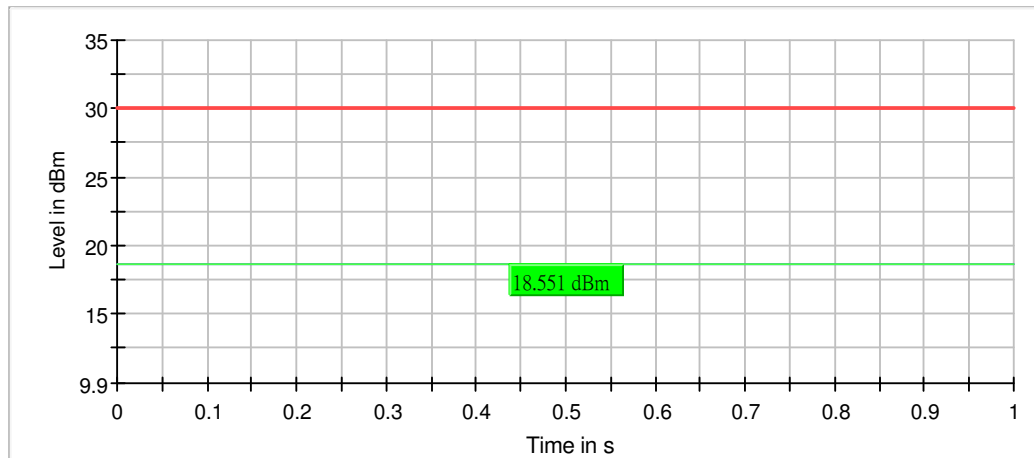

— Gated Trace — Overall — Limit


Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11n (HT20)


DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2412.000000	17.6	30.0	PASS
2437.000000	17.9	30.0	PASS
2462.000000	18.2	30.0	PASS


Remark: Antenna gain is 2 dBi

Gated Trace

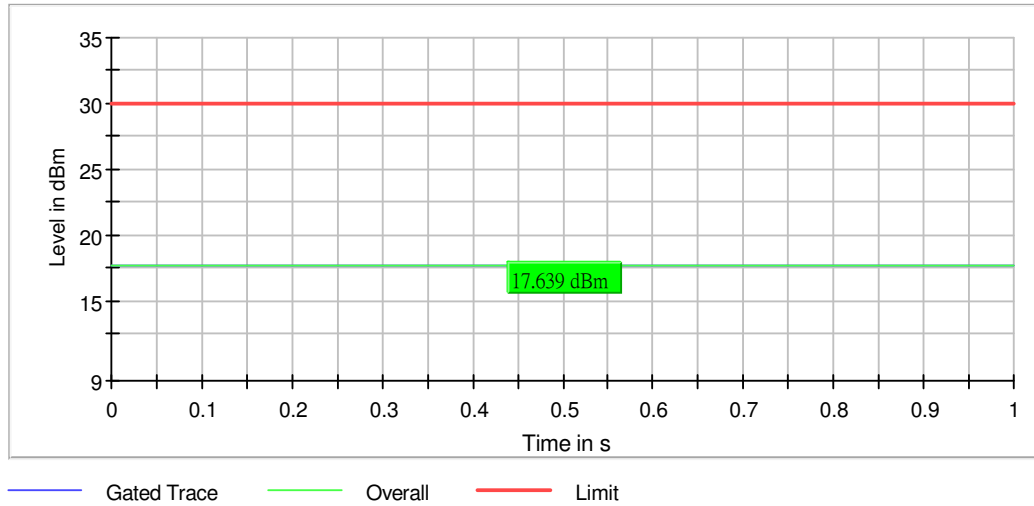

Gated Trace

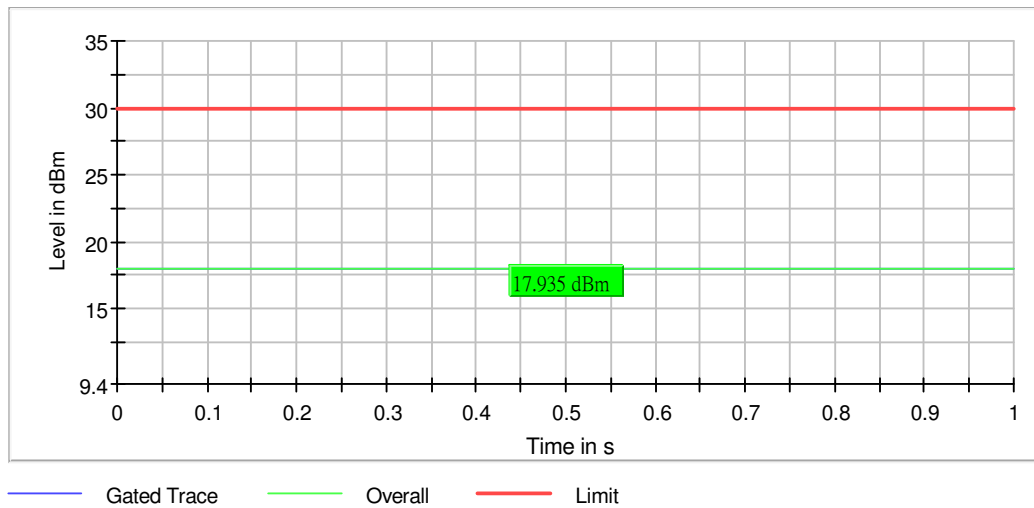

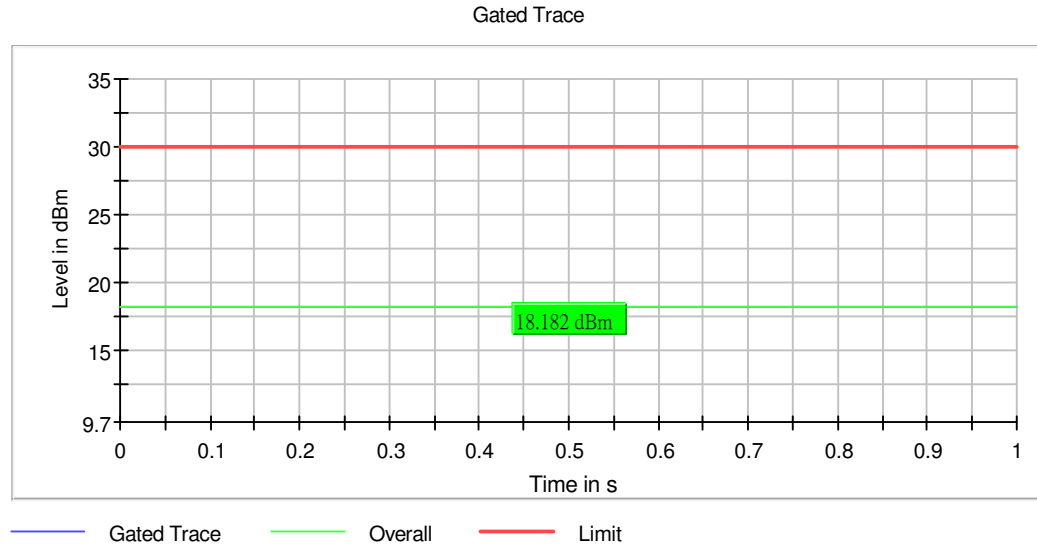


Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11n (HT40)

DUT Frequency (MHz)	Peak Power (dBm)	Limit Max (dBm)	Result
2422.000000	17.8	30.0	PASS
2437.000000	18.0	30.0	PASS
2452.000000	18.1	30.0	PASS

Remark: Antenna gain is 2 dBi

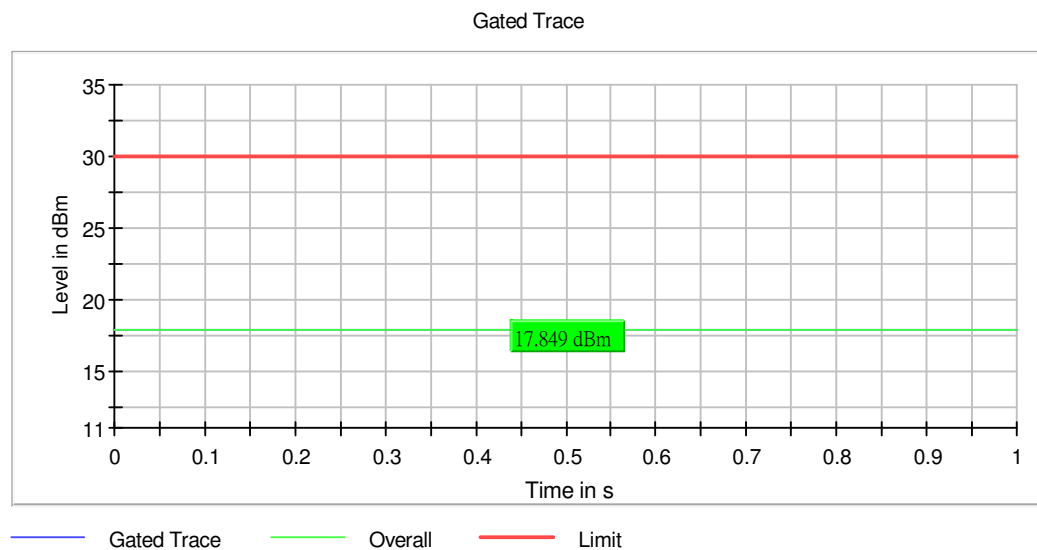


Gated Trace

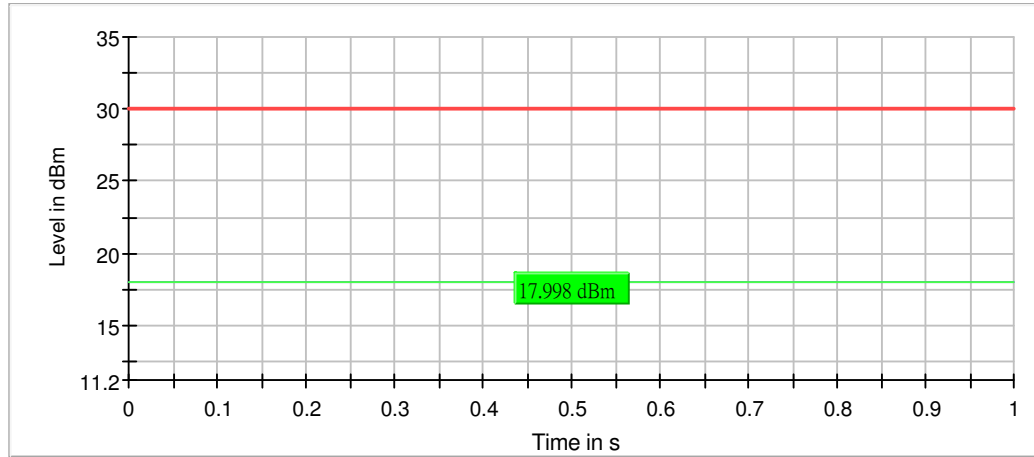

— Gated Trace — Overall — Limit

Gated Trace

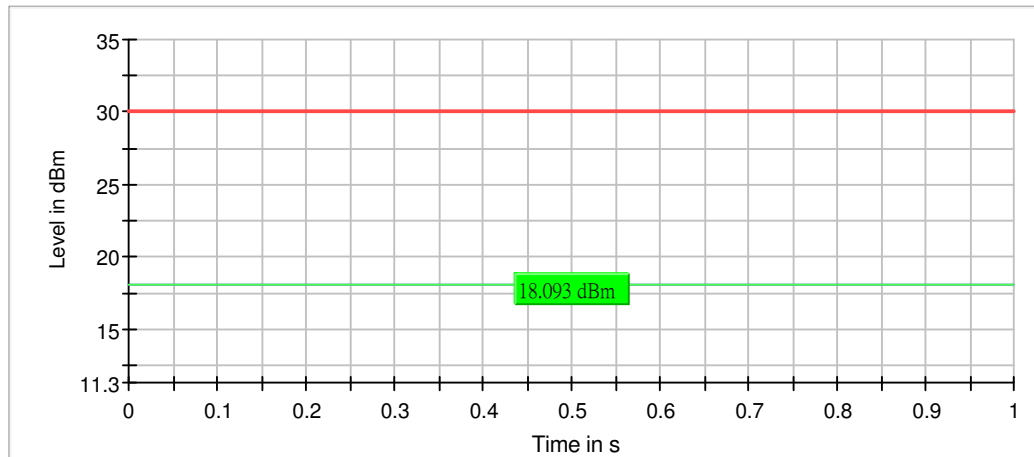

— Gated Trace — Overall — Limit


Remark: Cable loss 0.8dB was considered and set in system configuration.

9.2 Power Spectrum Density

802.11b


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2414.575000	6.499	8.0	PASS

Power Spectral Density

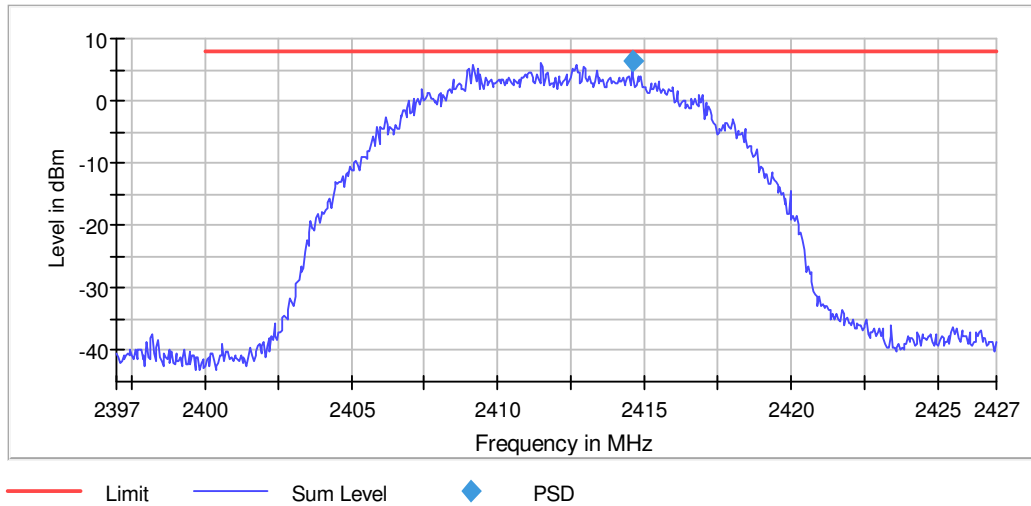


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2439.575000	6.437	8.0	PASS

Power Spectral Density

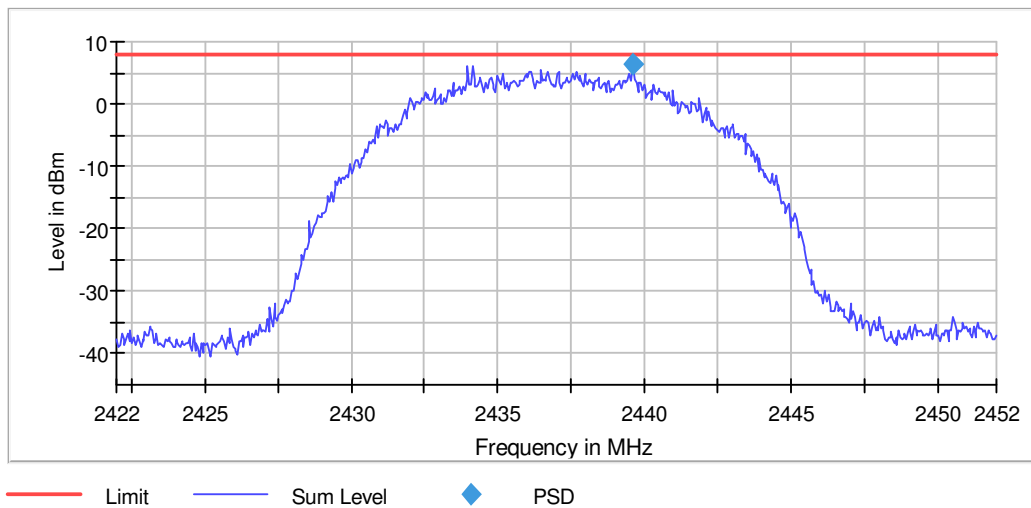

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2462.675000	6.307	8.0	PASS

Power Spectral Density

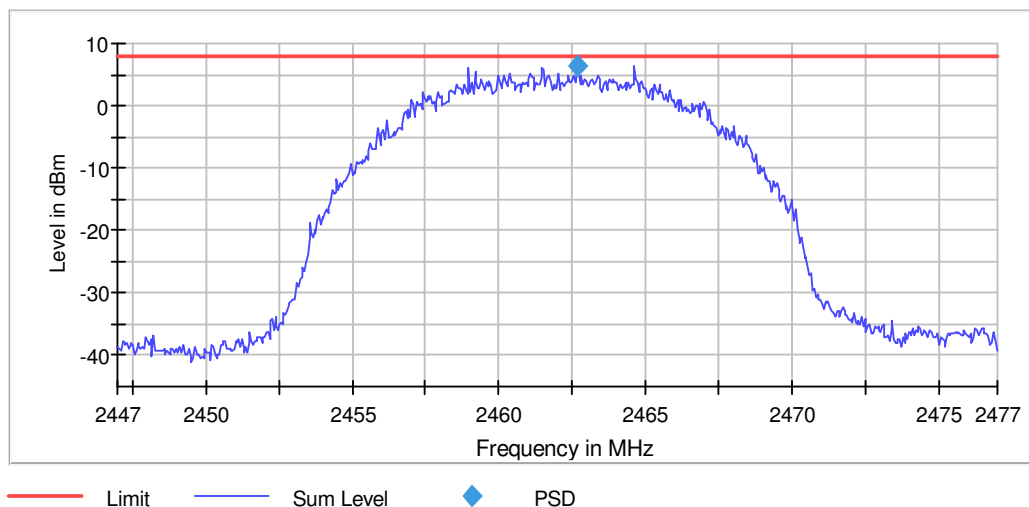

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44700 GHz	2.44700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	60 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11g


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2414.475000	1.626	8.0	PASS

Power Spectral Density

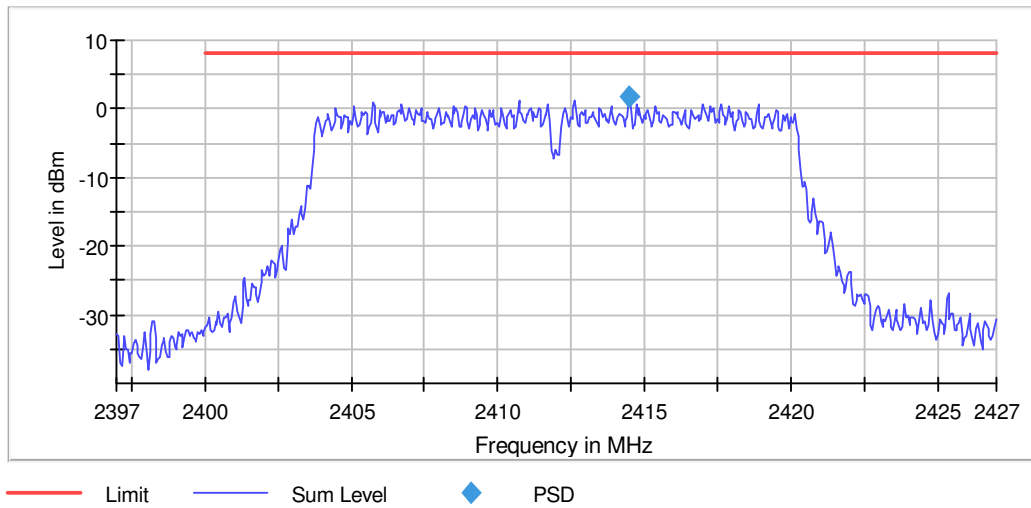


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2435.725000	2.736	8.0	PASS

Power Spectral Density

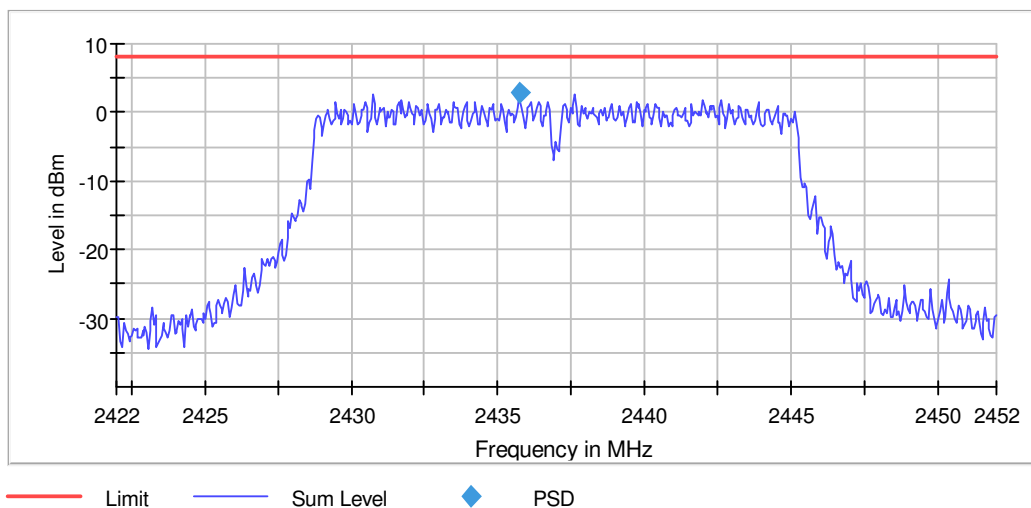

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2464.475000	2.413	8.0	PASS

Power Spectral Density

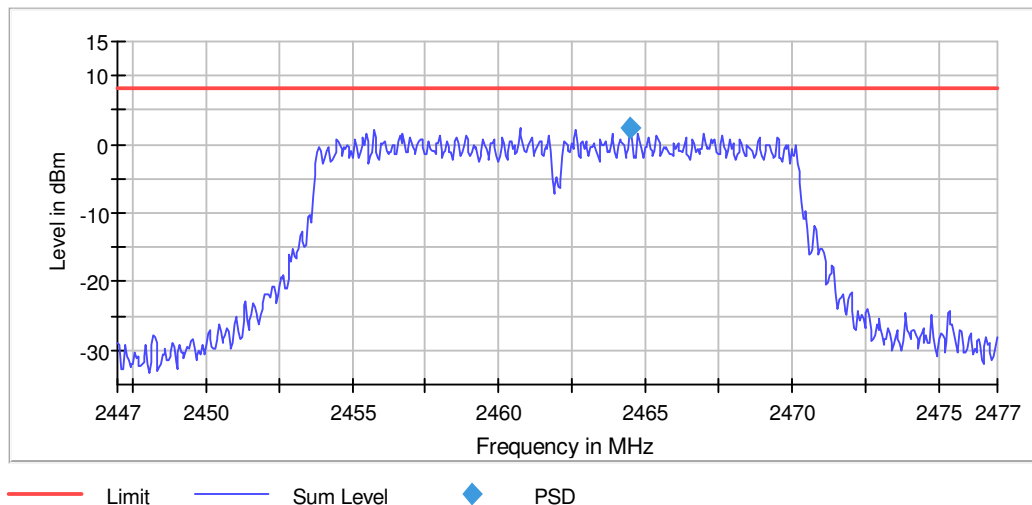

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44700 GHz	2.44700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	80 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.06 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11n (HT20)


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2412.000000	2409.125000	1.237	8.0	PASS

Power Spectral Density

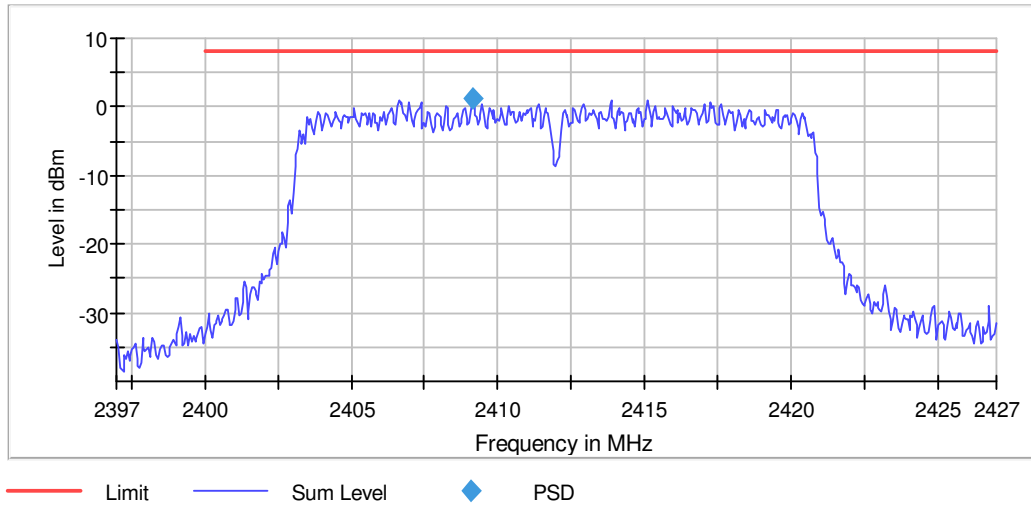


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2434.125000	1.540	8.0	PASS

Power Spectral Density

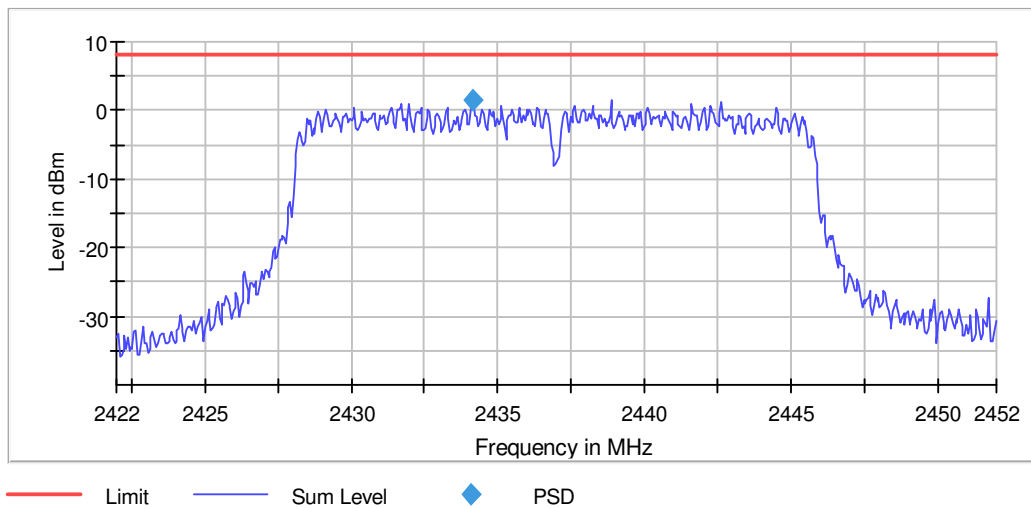

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2462.000000	2459.125000	1.805	8.0	PASS

Power Spectral Density

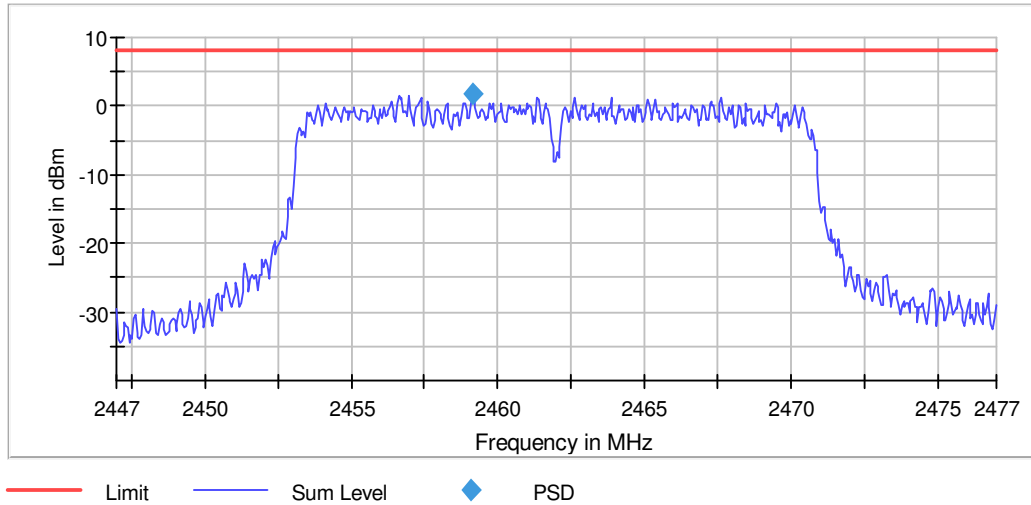

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44700 GHz	2.44700 GHz
Stop Frequency	2.47700 GHz	2.47700 GHz
Span	30.000 MHz	30.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	600	~ 600
SweepTime	12.000 ms	12.000 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	90 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.33 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11n (HT40)


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2422.000000	2432.625000	-1.495	8.0	PASS

Power Spectral Density

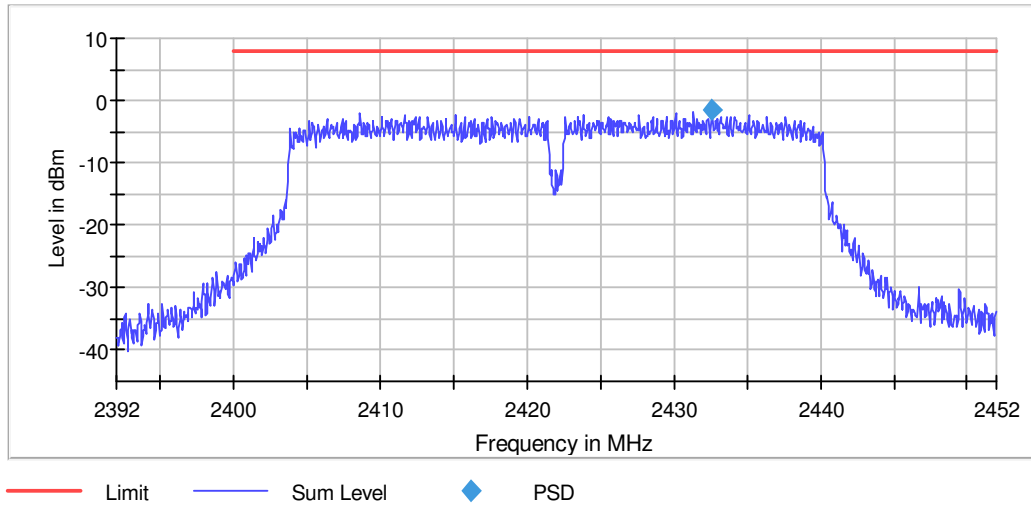


DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2437.000000	2445.125000	-1.438	8.0	PASS

Power Spectral Density

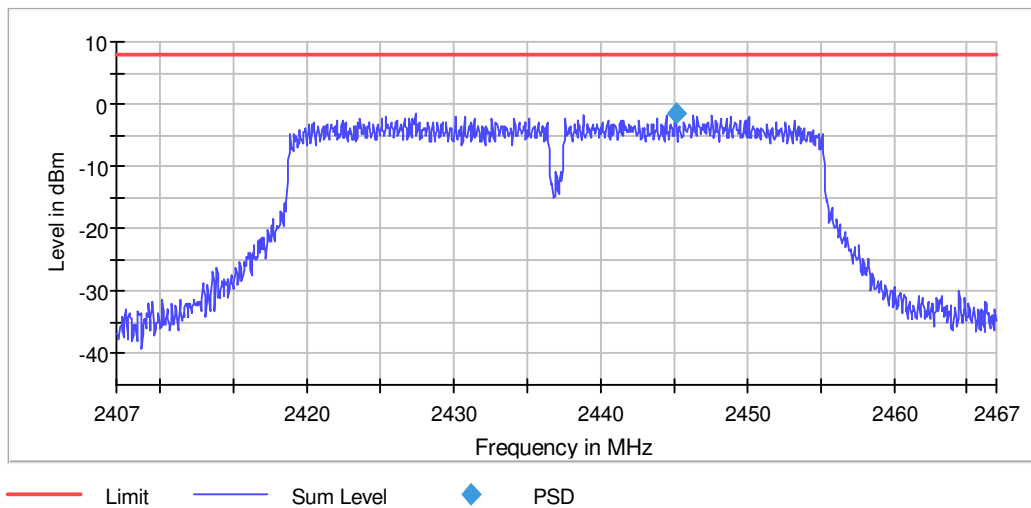

DUT Frequency (MHz)	Frequency (MHz)	PSD (dBm)	Limit Max (dBm)	Result
2452.000000	2442.375000	-1.513	8.0	PASS

Power Spectral Density

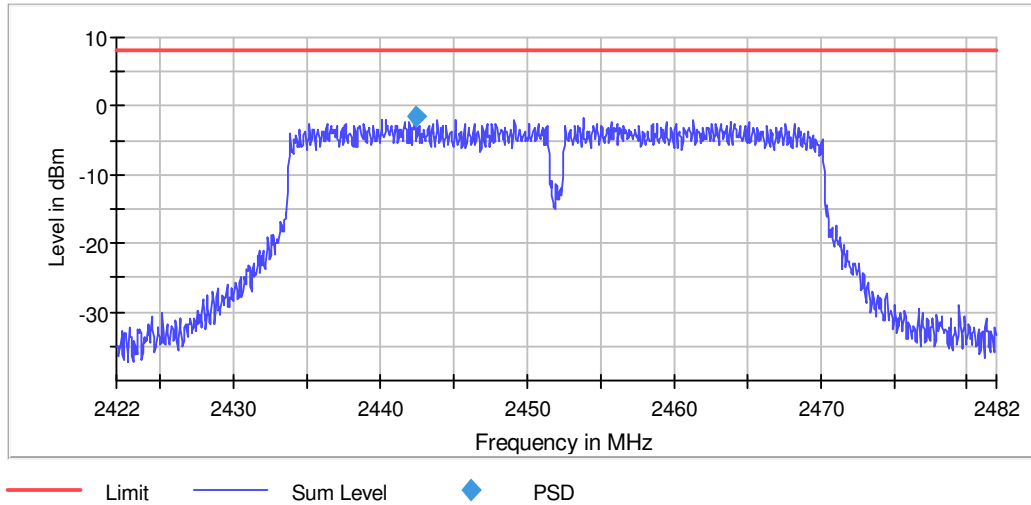

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.42200 GHz	2.42200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	60.000 MHz	60.000 MHz
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	1200	~ 1200
SweepTime	24.000 ms	24.000 ms
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	RMS	RMS
SweepCount	1	1
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	Sweep
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	108 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB


Remark: Cable loss 0.8dB was considered and set in system configuration.

9.3 Minimum 6dB Bandwidth


802.11b


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	10.150000	0.500000	---	2406.925000	2417.075000
2437.000000	10.150000	0.500000	---	2431.925000	2442.075000
2462.000000	10.150000	0.500000	---	2456.925000	2467.075000

6 dB Bandwidth

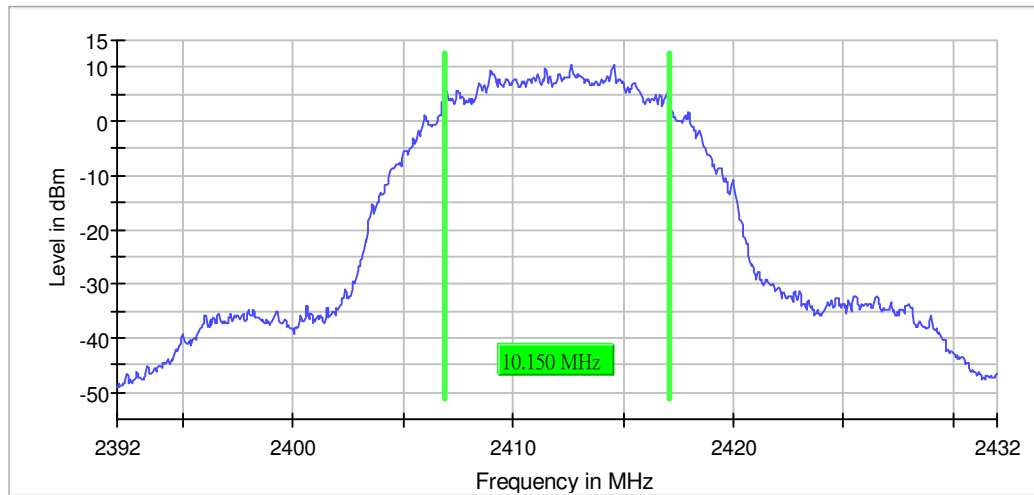

6 dB Bandwidth

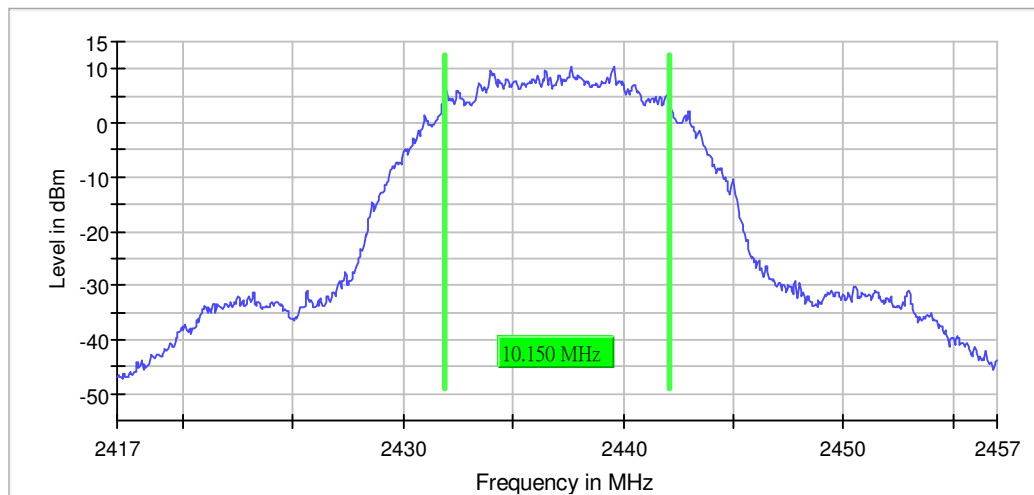

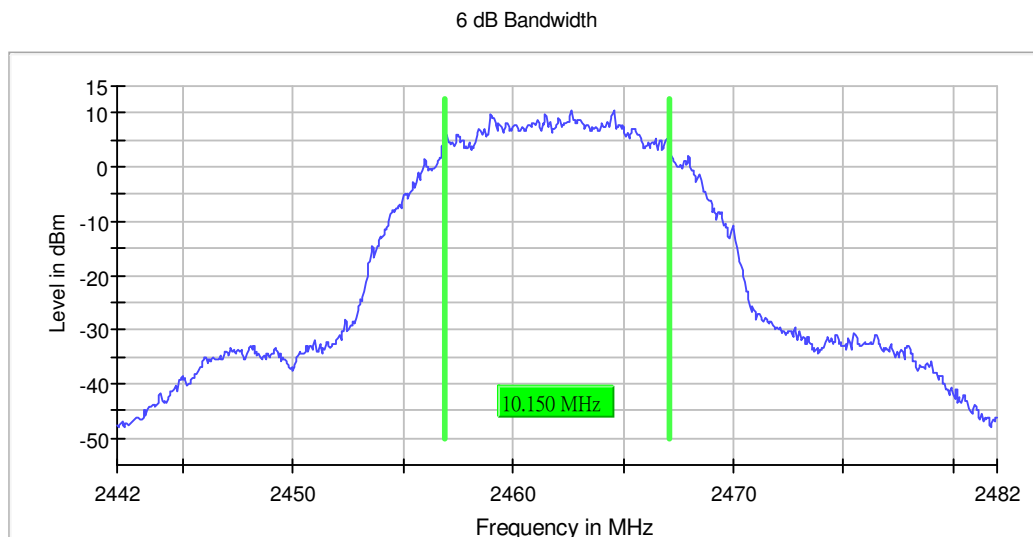

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	94.922 us	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	20 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11g


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	16.500000	0.500000	---	2403.725000	2420.225000
2437.000000	16.500000	0.500000	---	2428.725000	2445.225000
2462.000000	16.500000	0.500000	---	2453.725000	2470.225000

6 dB Bandwidth

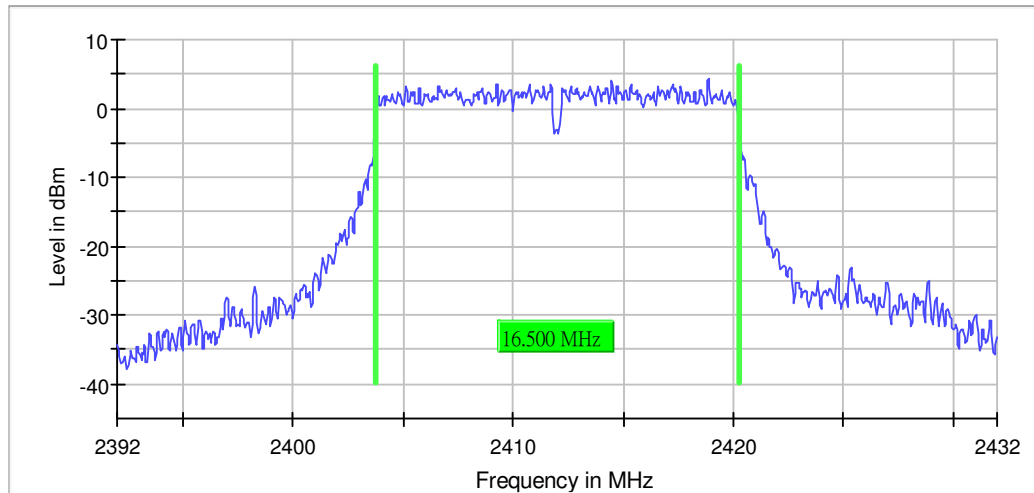

6 dB Bandwidth

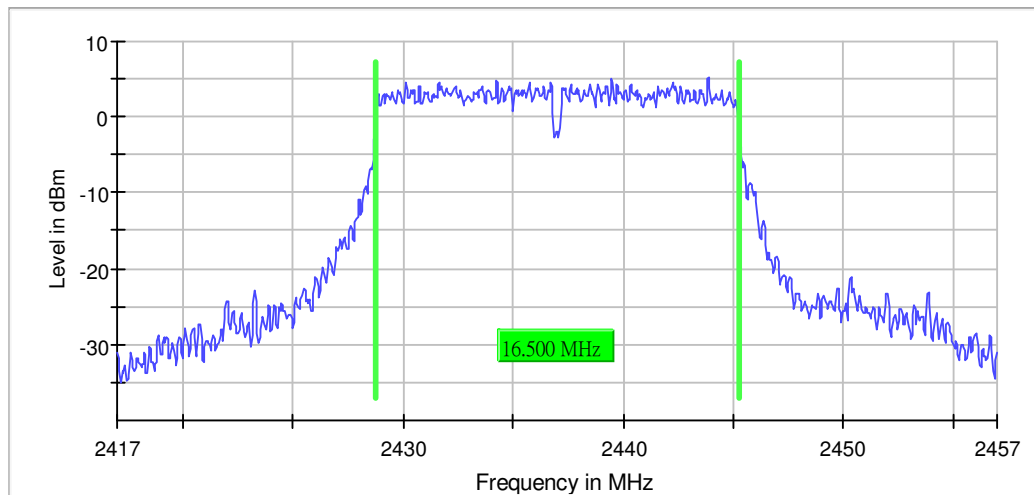

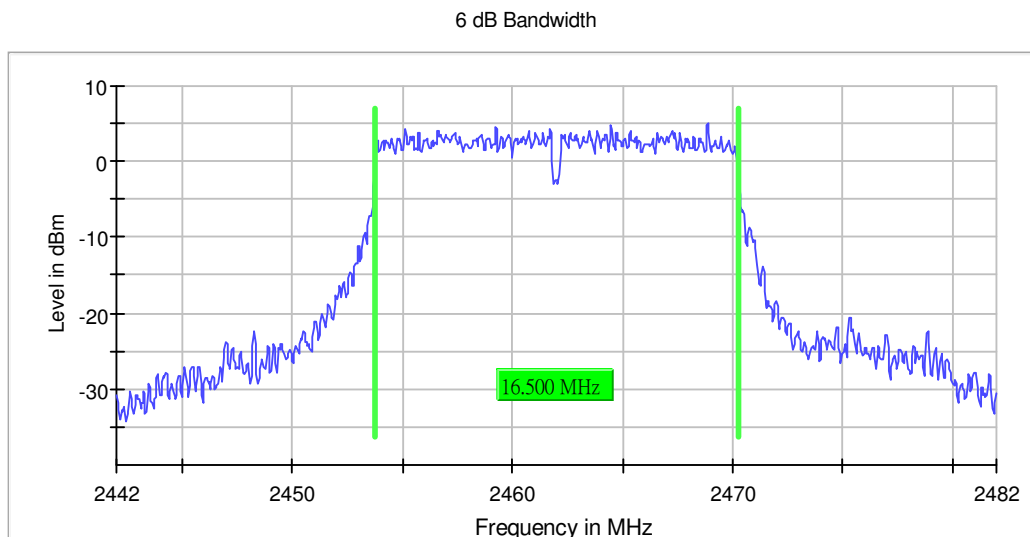

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	94.922 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.42 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11n (HT20)


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2412.000000	17.650000	0.500000	---	2403.175000	2420.825000
2437.000000	17.650000	0.500000	---	2428.175000	2445.825000
2462.000000	17.650000	0.500000	---	2453.175000	2470.825000

6 dB Bandwidth

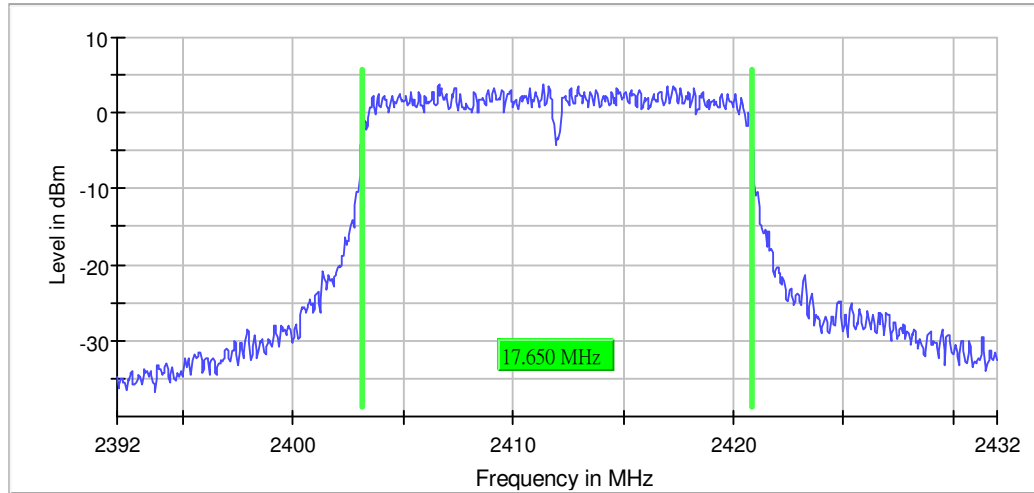

6 dB Bandwidth

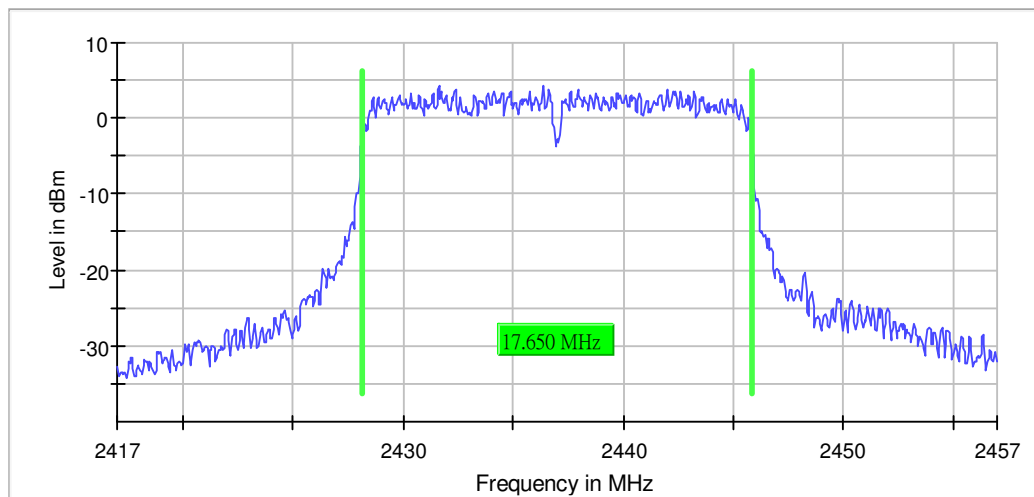

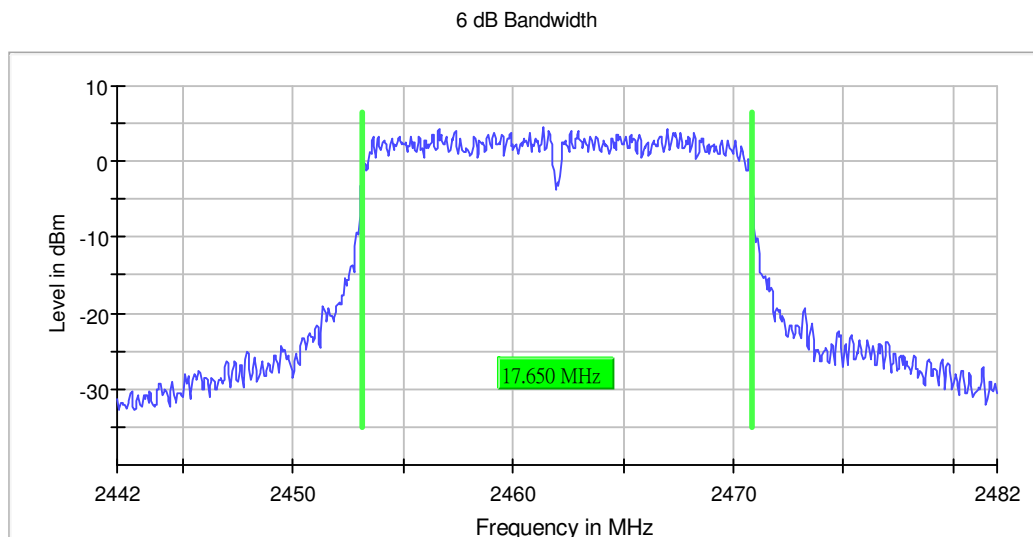

Measurement


Setting	Instrument Value	Target Value
Start Frequency	2.44200 GHz	2.44200 GHz
Stop Frequency	2.48200 GHz	2.48200 GHz
Span	40.000 MHz	40.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	800	~ 800
SweepTime	94.922 us	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	22 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.19 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11n (HT40)


DUT Frequency (MHz)	Bandwidth (MHz)	Limit Min (MHz)	Limit Max (MHz)	Band Edge Left (MHz)	Band Edge Right (MHz)
2422.000000	36.450000	0.500000	---	2403.775000	2440.225000
2437.000000	36.450000	0.500000	---	2418.775000	2455.225000
2452.000000	36.500000	0.500000	---	2433.775000	2470.275000

6 dB Bandwidth

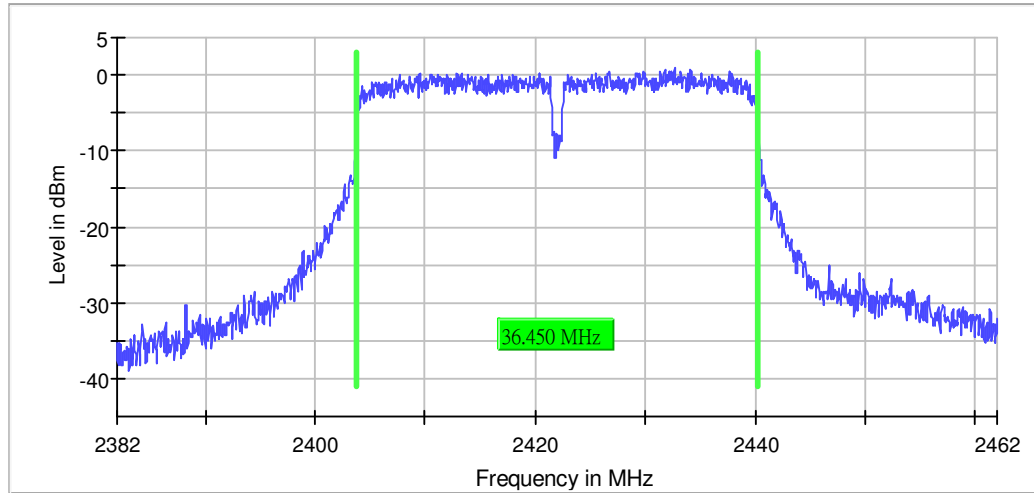

6 dB Bandwidth

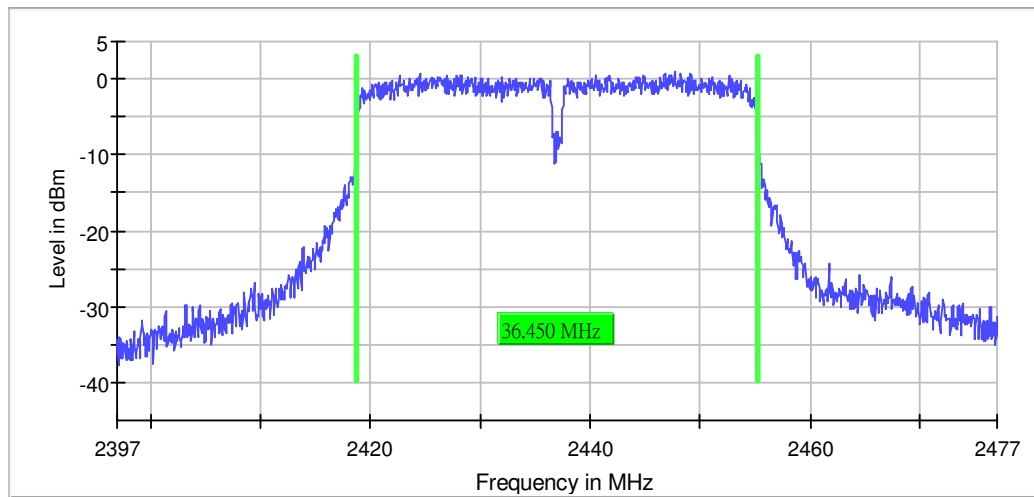

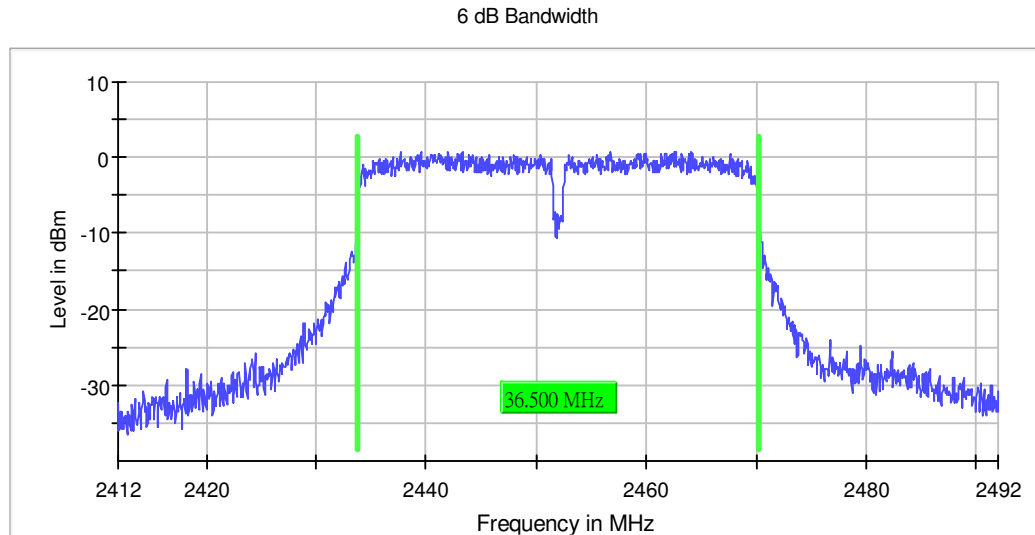

Measurement

Setting	Instrument Value	Target Value
Start Frequency	2.41200 GHz	2.41200 GHz
Stop Frequency	2.49200 GHz	2.49200 GHz
Span	80.000 MHz	80.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	1600	~ 1600
SweepTime	1.600 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	24 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.23 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

9.4 Conducted Band Edge Measurement


802.11b


Inband Peak

Frequency (MHz)	Level (dBm)
2414.575000	12.7
2464.625000	12.7

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.025000	-32.3	14.9	-17.3	PASS
2488.075000	-44.6	27.3	-17.3	PASS

Remark: Limit = Inband peak – 30dB

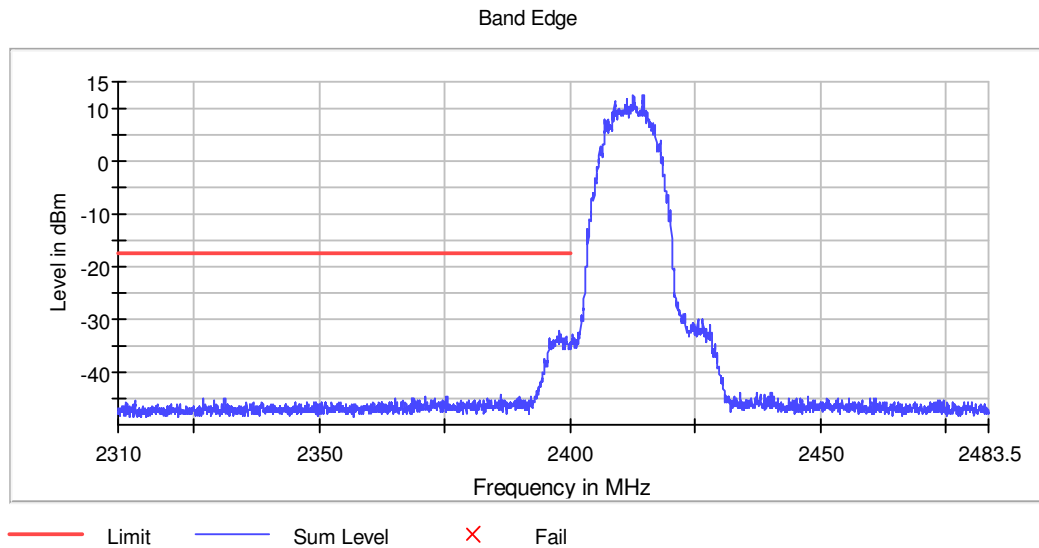

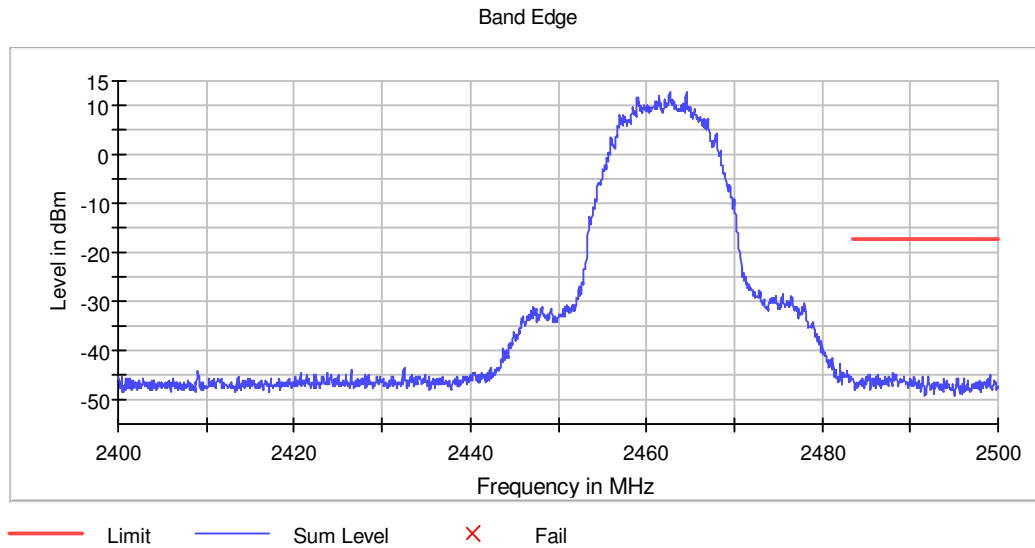

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	17 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.25 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	330	~ 330
SweepTime	37.969 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11g


Inband Peak

Frequency (MHz)	Level (dBm)
2418.875000	6.4
2468.875000	7.0

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2398.275000	-23.8	0.2	-23.6	PASS
2483.575000	-32.0	8.9	-23.0	PASS


Remark: Limit = Inband peak – 30dB

Band Edge

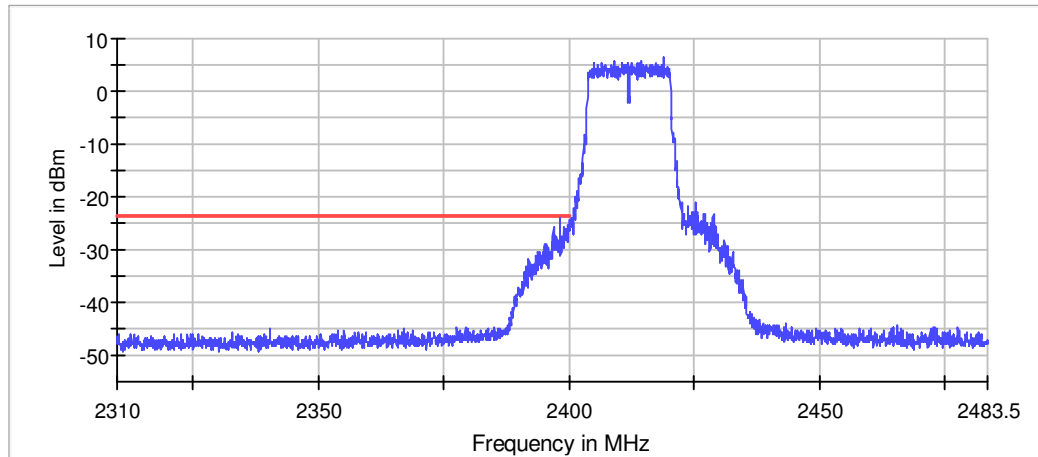

— Limit — Sum Level × Fail

Band Edge

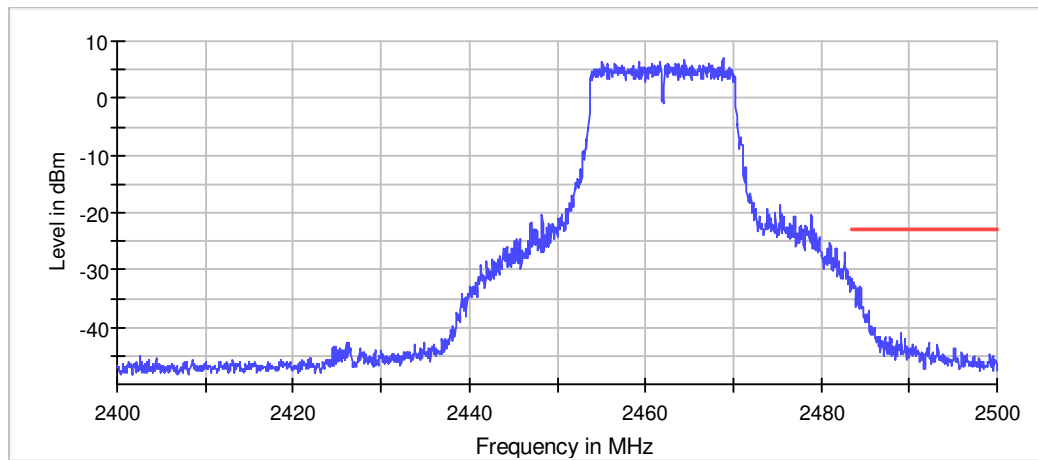

— Limit — Sum Level × Fail

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	14 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	37.969 us	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.19 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

802.11n (HT20)


Inband Peak

Frequency (MHz)	Level (dBm)
2411.375000	6.1
2461.375000	6.6


Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2399.825000	-25.2	1.4	-23.9	PASS
2483.875000	-28.9	5.5	-23.4	PASS

Remark: Limit = Inband peak – 30dB

Band Edge

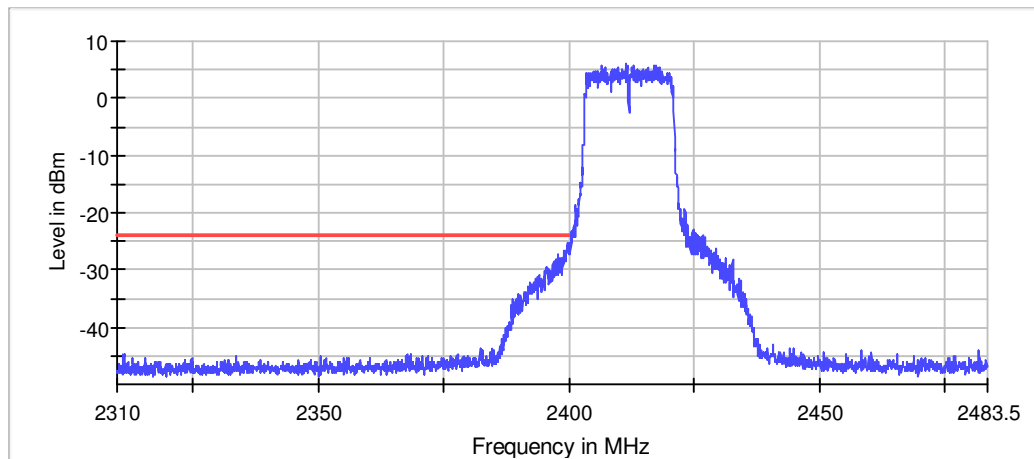

— Limit — Sum Level × Fail

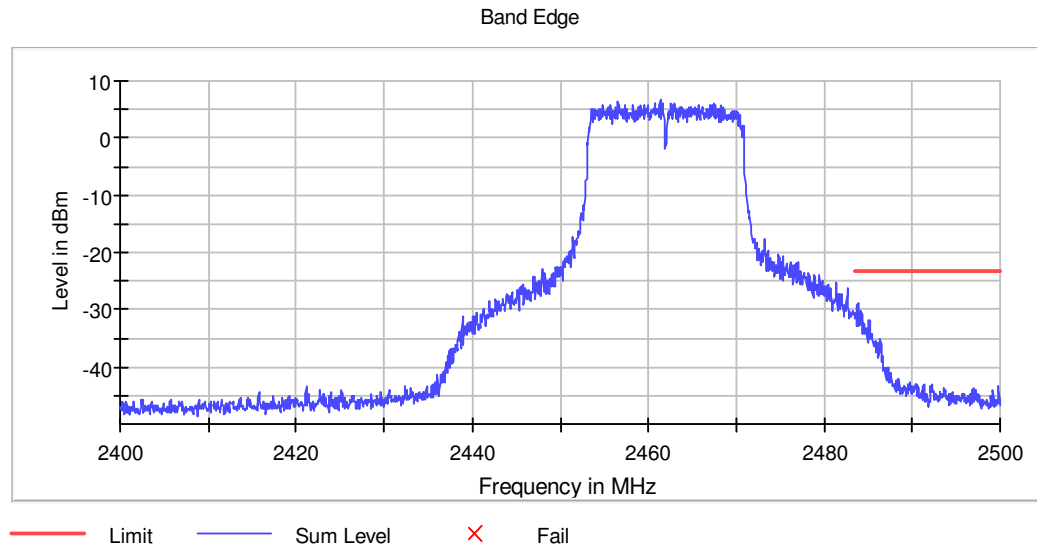

Measurement 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	1.670 ms	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.37 dB	0.50 dB

Measurement 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	37.969 μ s	AUTO
Reference Level	10.000 dBm	10.000 dBm
Attenuation	30.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.32 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.



802.11n (HT40)

Inband Peak

Frequency (MHz)	Level (dBm)
2432.580000	3.2
2463.240000	3.3

Frequency (MHz)	Level (dBm)	Margin (dB)	Limit (dBm)	Result
2400.000000	-21.4	4.6	-16.8	PASS
2483.500000	-26.8	10.1	-16.7	PASS


Remark: Limit = Inband peak – 20dB

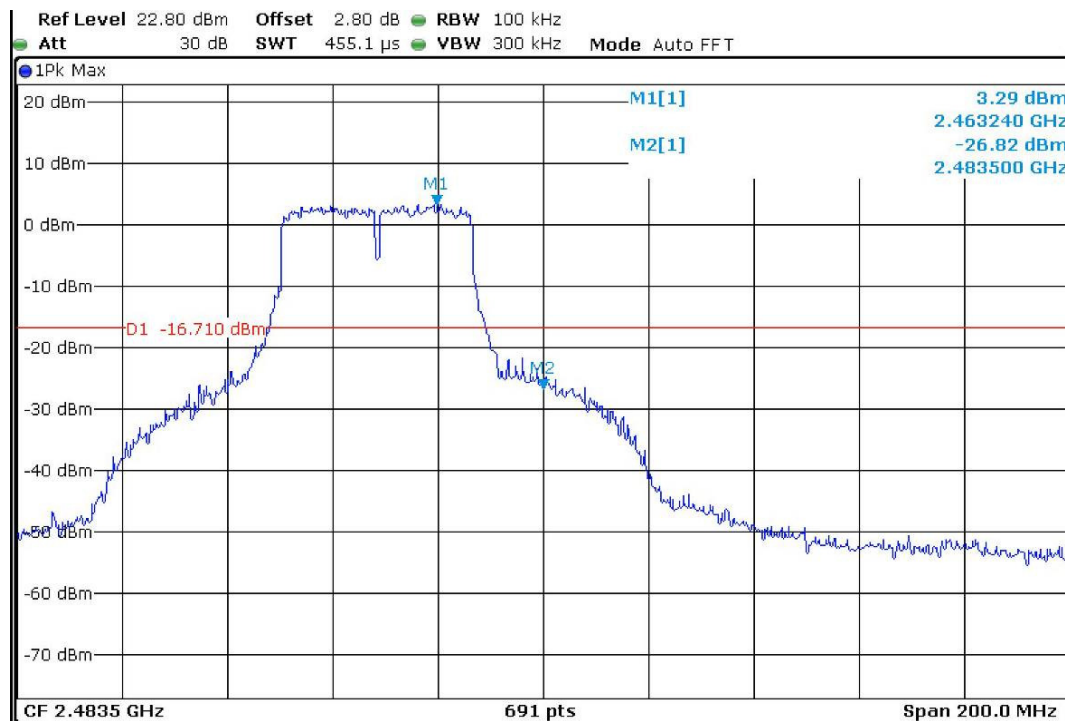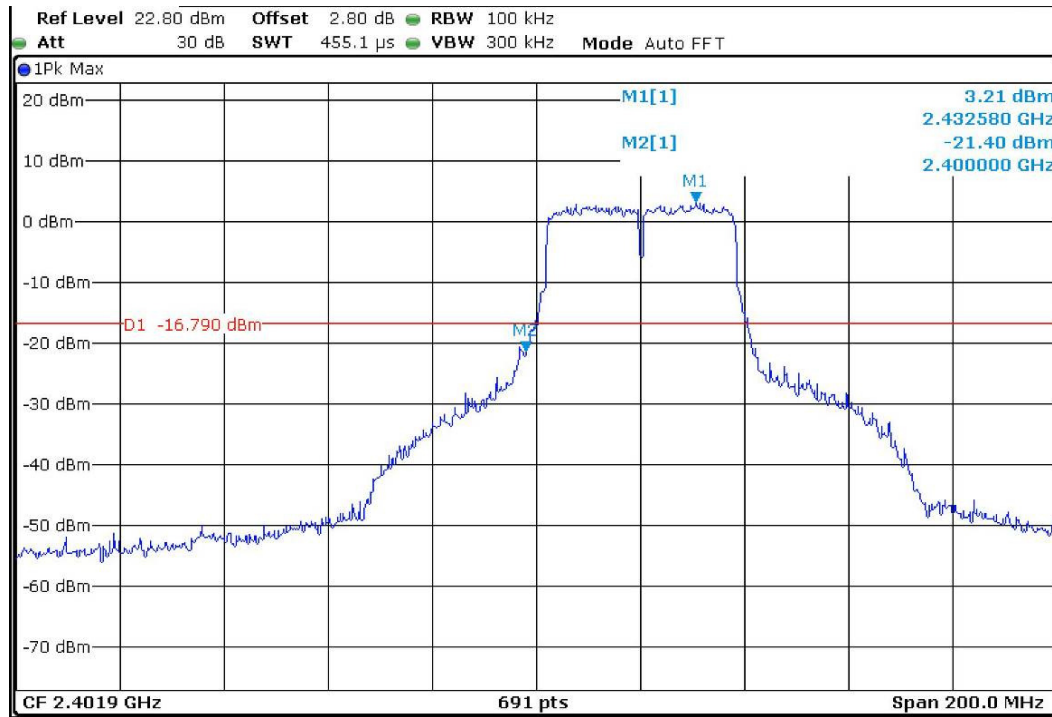


9.5 Conducted spurious emission

802.11b


Lowest Channel

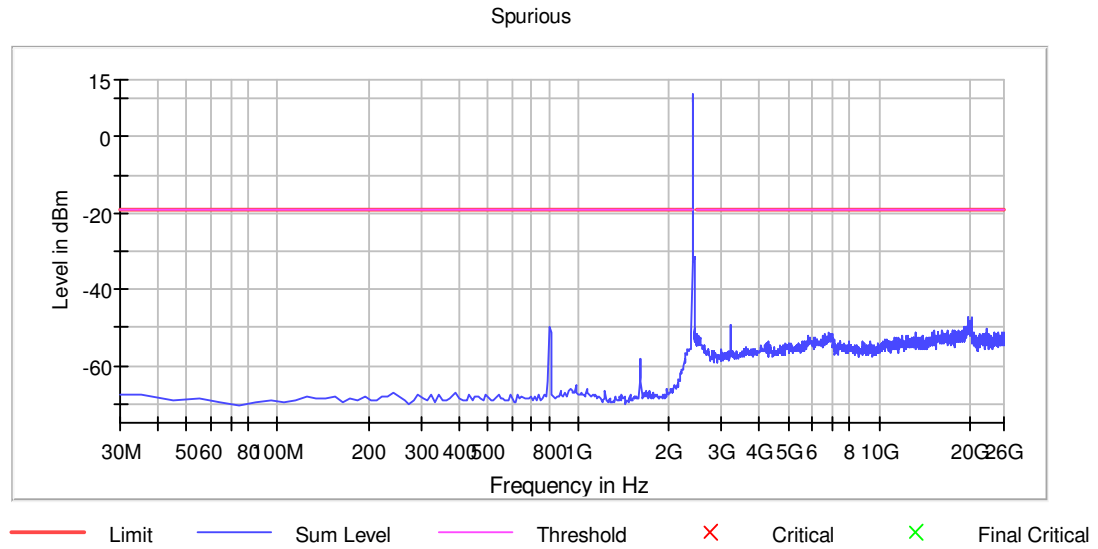

Middle Channel

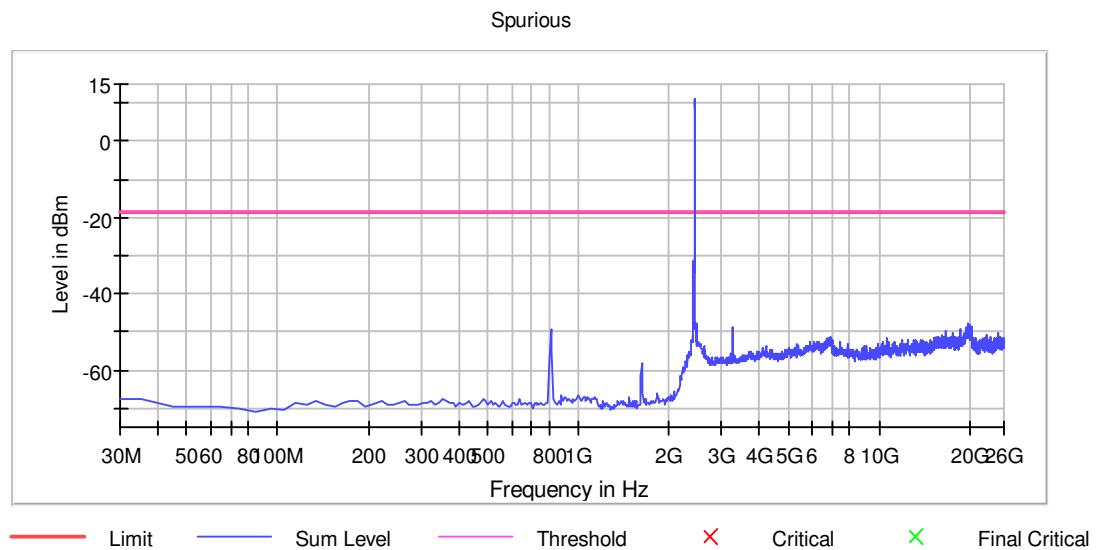

Highest Channel

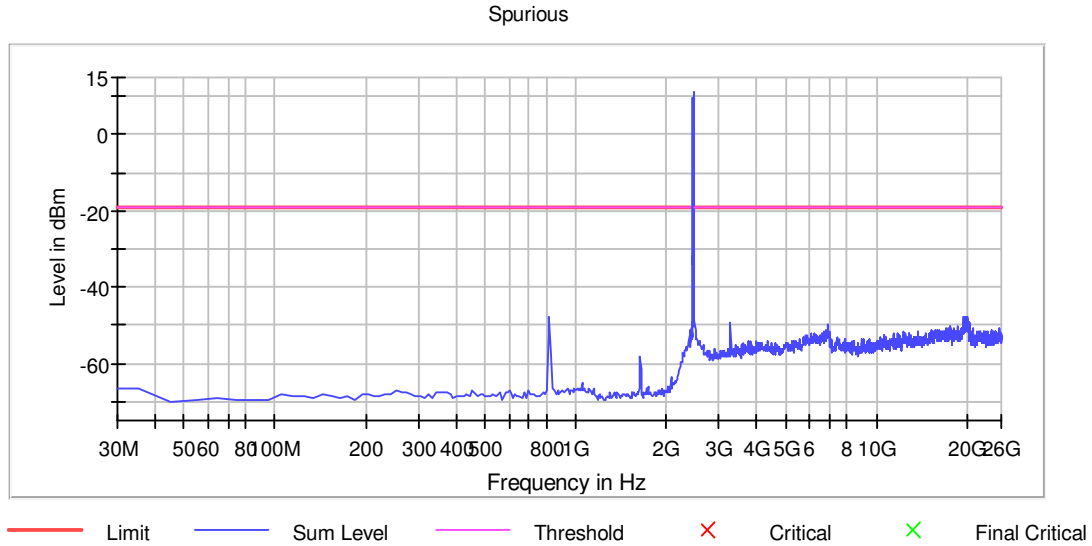


Pre Measurement 1


Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	16 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11g
Lowest Channel

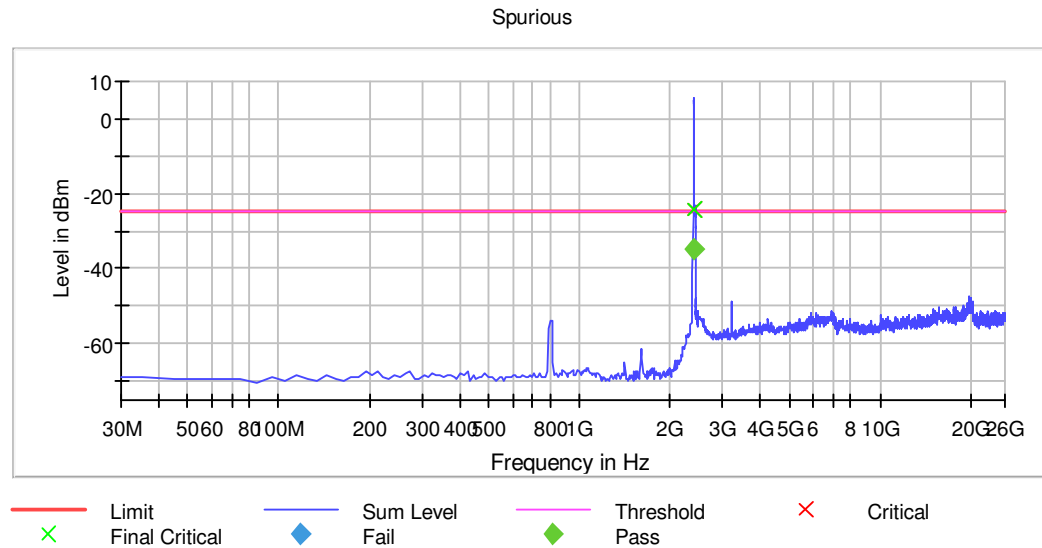

Middle Channel

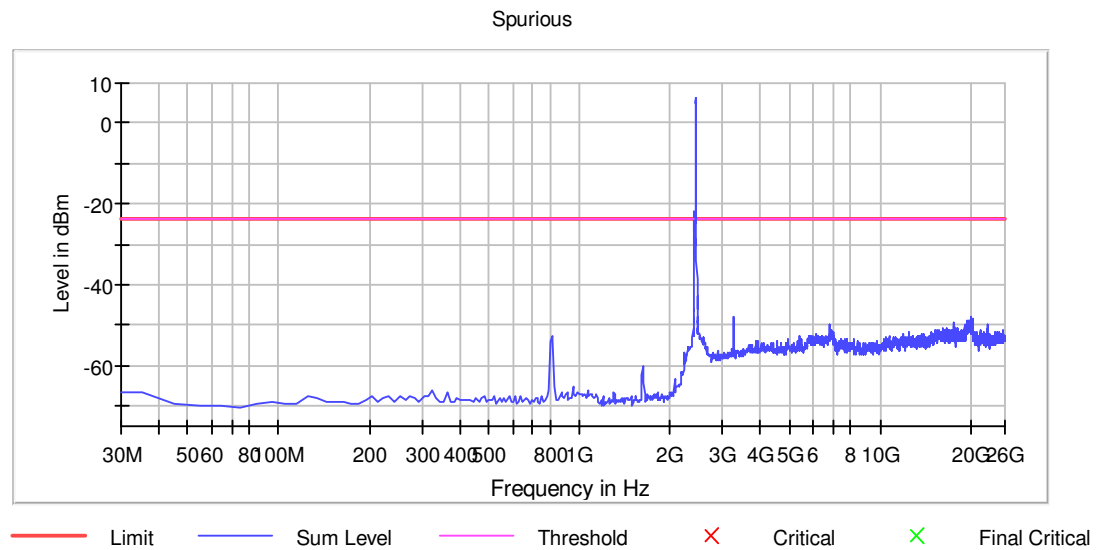

Highest Channel

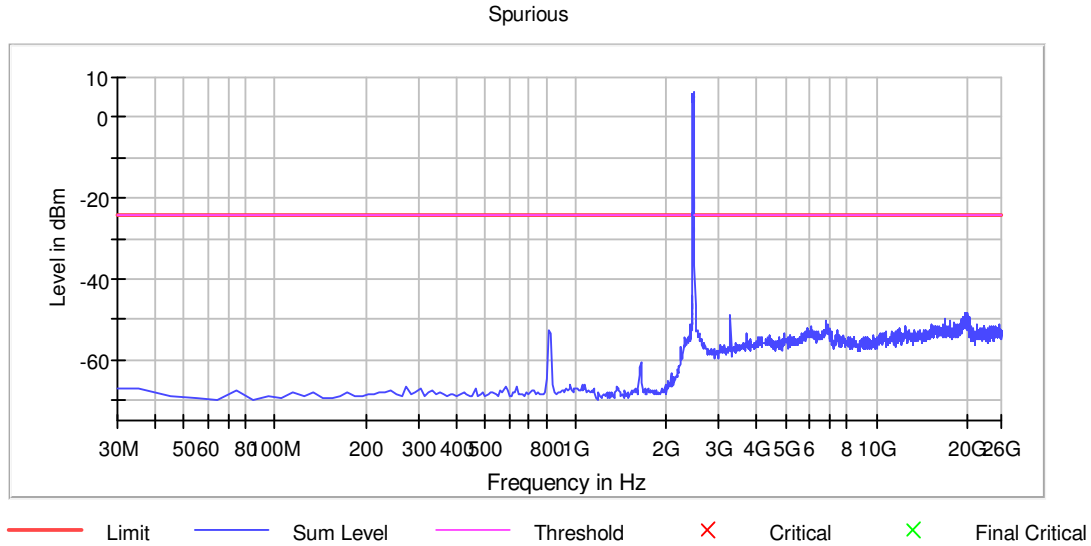


Pre Measurement 1


Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	15 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11n (HT20)
Lowest Channel

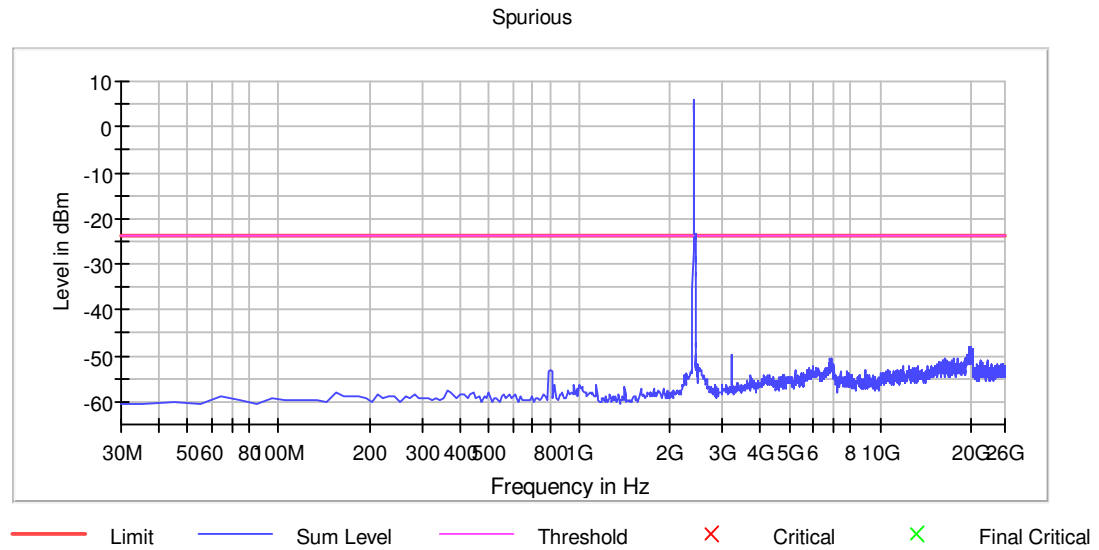

Middle Channel

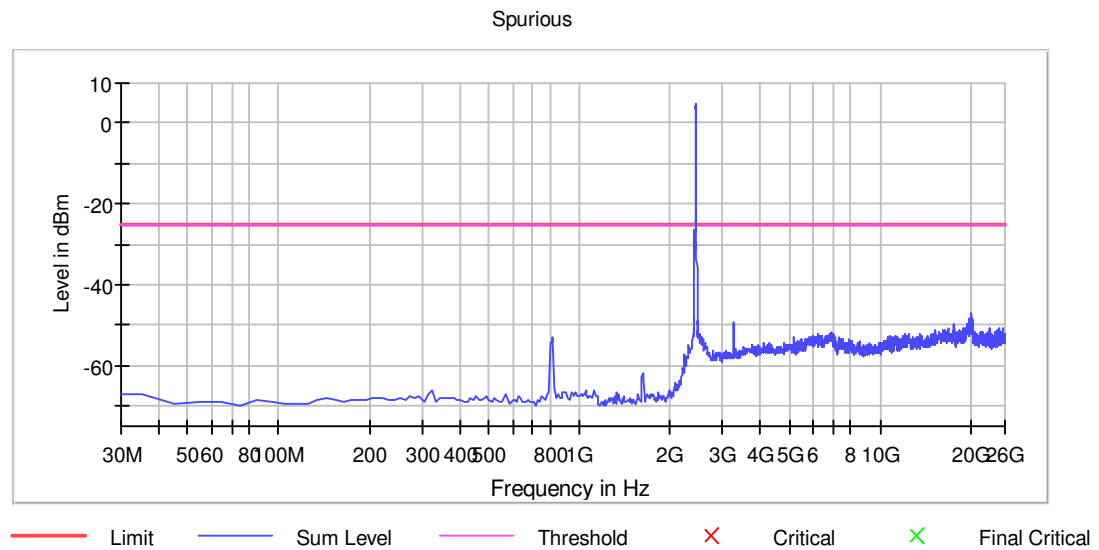

Highest Channel

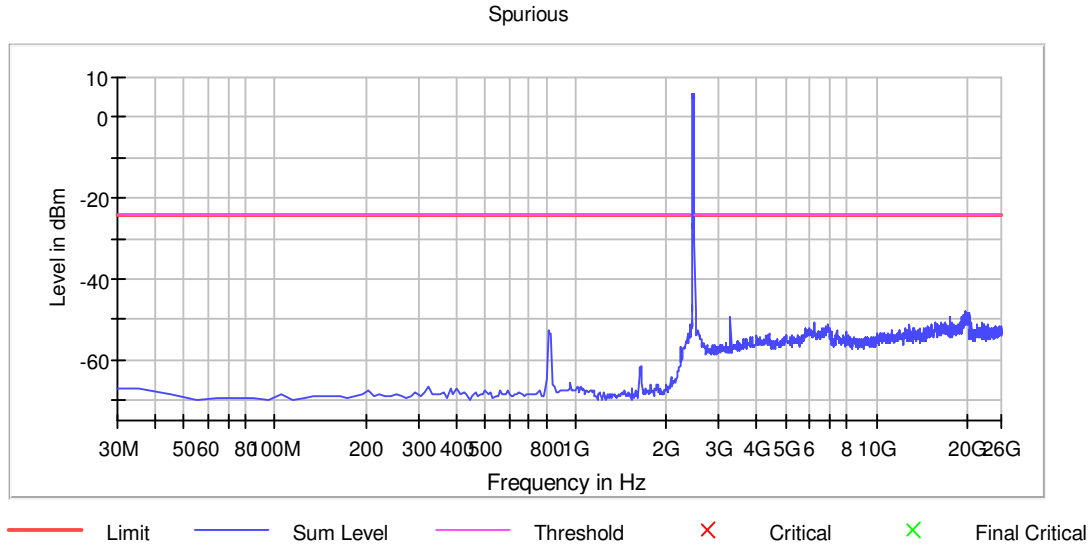


Pre Measurement 1


Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.


802.11n (HT40)
Lowest Channel

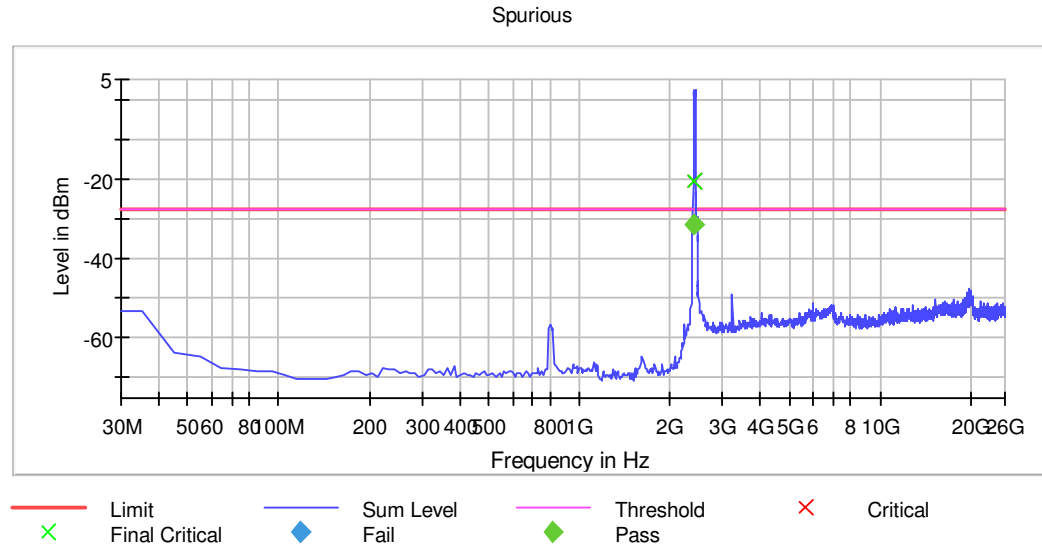

Middle Channel

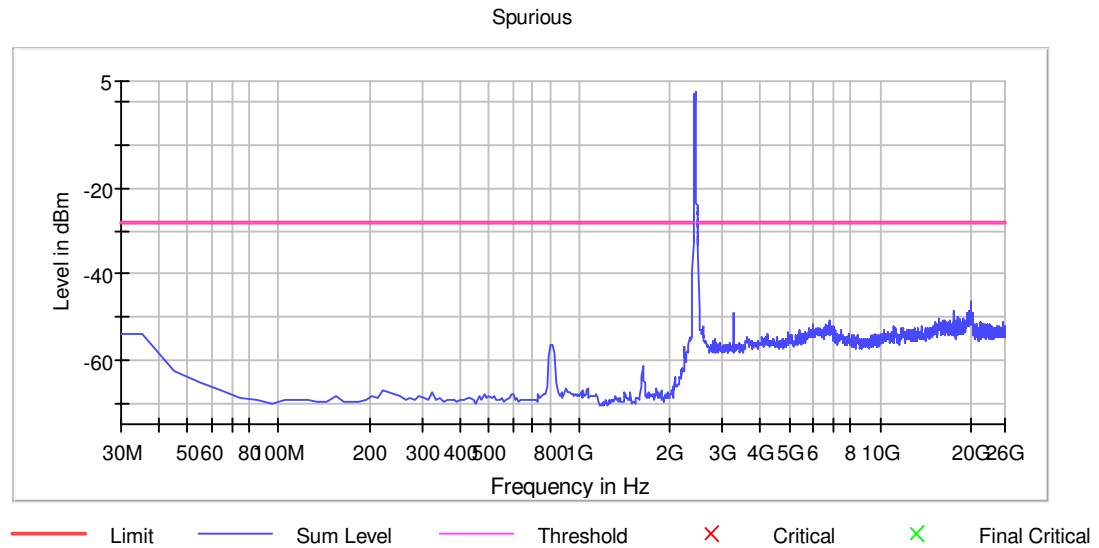

Highest Channel

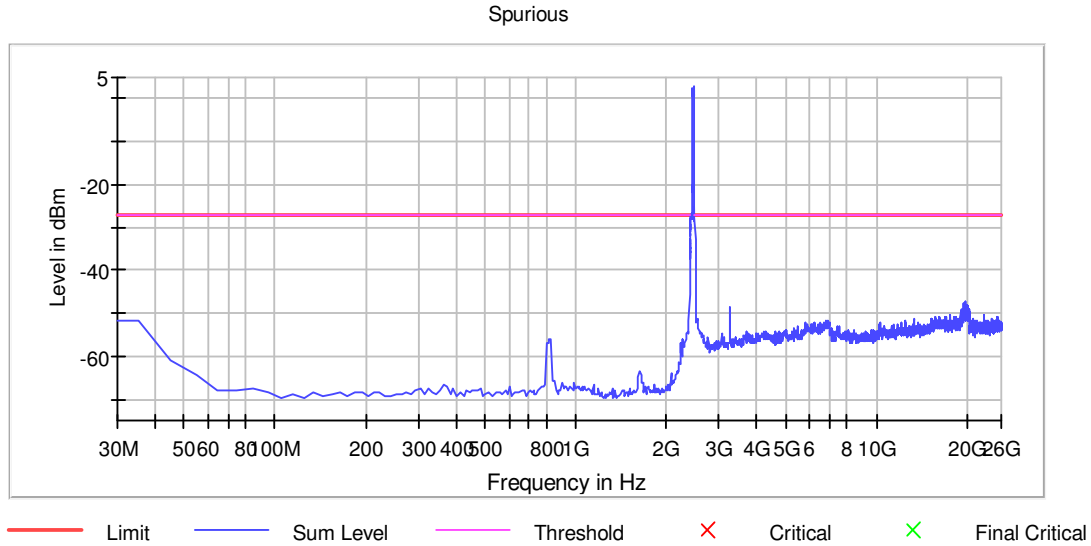

Pre Measurement 1

Setting	Instrument Value	Target Value
RBW	100.000 kHz	≤ 100.000 kHz
VBW	300.000 kHz	≥ 300.000 kHz
SweepPoints	238	~ 238
SweepTime	23.700 ms	AUTO
Reference Level	-10.000 dBm	-30.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	3	3
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	Sweep	AUTO
Preamplifier	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	12 / max. 40	max. 40
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Remark: Cable loss 0.8dB was considered and set in system configuration.

- End of the Report -