

TEST REPORT

Guangdong Huesent Testing & Inspection Technology Co., Ltd.



TEST REPORT

	T					
Sample Description	Wireless Microphone Transmitter	Trademark	1			
Model	X-011	Specification	9Vdc			
Assessment Category	Entrusted	Sample Quantity	3			
Applicant:	Betterway Electronic Co., Ltd	Sample Status	Normal			
Sample Received Date	Dec. 20, 2016	Test Date	Dec. 20, 2016 to Jan. 5, 2017			
Issue Date	Jan. 6, 2017					
Manufacturer	Betterway Electronic Co., L	td				
Address	V9-1, Dist.2, Enping Indus Zone, Enping, Guangdong,	_	n Industrial Transfer			
Factory	Betterway Electronic Co., L	td				
Address	V9-1, Dist.2, Enping Indus Zone, Enping, Guangdong,	•	n Industrial Transfer			
Test address	No. 860, South Guangzhou Avenue, Guangzhou, 510300 China					
Test Items	Listed on page 4	Listed on page 4				
Test standard	FCC Part 74.861e: 2016					
Test Conclusion	The results conform to the requirements of standards with respect the test items.					
Remarks FCCID: 2AGF2X-011						
Tested by : Lemon Fu Sign: Lemon Fu						
Tested by : Lemon Fu Sign: Lemon Fu Reviewed by: Sandy Yu Sign: Sandy Yu						
Approved by: Robin Peng Sign:						

TABLE OF CONTENT

1	Test Su	mmary	4
2	Genera	I Information	5
	2.1	Details of E.U.T.	5
	2.2	Description of Support Units	5
	2.3	Standards Applicable for Testing	
	2.4	Test Location	6
	2.5	Deviation from Standards	6
	2.6	Abnormalities from Standard Conditions	6
3	Test Re	esults	7
	3.1	E.U.T. Operation Condition	7
	3.2	Test Procedure & Measurement Data	8
	3.2	2.1 Carrier Radiated Power & Radiated Spurious Emissions	8
	3.2	2.2 Occupied Bandwidth	13
	3.2	2.3 Frequency Stability	16
	3.2	2.4 Modulation Characteristics	18
	3.3	Photographs	21
	3.3	8.1 Radiated Emission Test Setup	21
	3.3	3.2 EUT Constructional Details	22
	3.3	3.3 Antenna Photo	29
4	Equipm	ents Used during Test	30

1 Test Summary

Test	Test Requirement	Standard Paragraph	Result
Carrier Radiated Power	FCC Part 2.1046	74.861 e) 1) 54–72, 76–88 & 174–216 MHz bands, 50 mW 470–608 and 614–806 MHz bands, 250 mW	PASS
Modulation Deviation	FCC Part 2.1047	74.861 e) 3) Within 75kHz	PASS
Frequency Stability	FCC Part 2.1055	74.861 e) 4) <0.005% 50 ppm	PASS
Operating Bandwidth	FCC Part 2.1049 c)	74.861 e) 5) Within 200kHz	PASS
Unwanted Radiation	FCC Part 2.1049 c)	74.861 e) 6) within the mask	PASS
Radiated Spurious Emission	FCC Part 2.1053	74.861 d) 3) < 43+10lgP(W) dB	PASS

Remark:

♣The EUT has one channel, which is located in the range <u>174.2 MHz to 215.8 MHz</u>.

Only test result of sample of $\,$ in channels 174.2 MHz, 181.424 MHz and 215.8 MHz were recorded in this report.

TRF:HST-F-Q071 B/0 Page 4 of 31

2 General Information

2.1 Details of E.U.T.

Power Supply: 9.0Vdc by a 6F22 Battery

Main Function: Wireless microphone system with an associated receiver for

transmitting voice.

The final amplifier Collector Voltage and Collector Current are 0.3V & 3.5mA respectively.

Necessary Bandwidth: 2M+2DK= 2 x 59 kHz + 2 x 17 kHz x 1.0 = 152 kHz

1 channel for each microphone; Modulation: F3E; Antenna Type: Fixed; Gained: 0 dBi

2.2 Description of Support Units

Connect the EUT to mains power, and then test the EUT with signal generator.

2.3 Standards Applicable for Testing

The standard used was FCC Part 74.861e: 2016

The EUT belongs to licensed low power auxiliary devices.

TRF:HST-F-Q071 B/0 Page 5 of 31

2.4 Test Location

Guangdong Environment Radiation Monitoring Center

Address: No. 860, South Guangzhou Avenue, Guangzhou, 510300 China

Accredited by CNAS, Accredited Number: L5539

FCC- Registration No: 667318 Renewal on Sep. 12, 2012

The carrier radiated power and radiated spurious emission tests were carried out in Guangdong Environment Radiation Monitoring Center.

The modulation deviation, frequency stability, operating bandwidth, unwanted radiation tests were carried out in Guangdong Huesent Testing & Inspection Technology Co., Ltd.

2.5 Deviation from Standards

None.

2.6 Abnormalities from Standard Conditions

None.

TRF:HST-F-Q071 B/0 Page 6 of 31

3 Test Results

3.1 E.U.T. Operation Condition

Operating Environment:

Temperature: 20.0 °C~25 °C

Humidity: 50 ~70% RH

Atmospheric Pressure: 980~1012 mbar

EUT Operation: Test the EUT in transmitting mode.

Performed Carrier Radiated Power & Radiated Spurious

Emissions testing in highest/ middle / lowest frequency spots

within the range, and performed Occupied Bandwidth, Frequency Stability & Modulation Characteristics in middle

frequency spot.

TRF:HST-F-Q071 B/0 Page 7 of 31

3.2 Test Procedure & Measurement Data

3.2.1 Carrier Radiated Power & Radiated Spurious Emissions

Test Requirement: FCC CFR 47 Part 74.861 e) 1) & d) 3)

Test Method: EIA/TIA 603-D:2010 section 2.2,

FCC CFR 47 Part 2.1047 & 1053

Measurement Distance: 3m (Semi-Anechoic Chamber)

Test Requirement:

(d) For low power auxiliary stations operating in the bands other than those allocated for TV broadcasting, the following technical requirements are imposed.

- (3) The occupied bandwidth shall not be greater than that necessary for satisfactory transmission and, in any event, an emission appearing on any discrete frequency outside the authorized band shall be attenuated, at least, 43+10 log ¹⁰ (mean output power, in watts) dB below the mean output power of the transmitting unit.
- (e) For low power auxiliary stations operating in the bands allocated for TV broadcasting, the following technical requirements apply:
- (1) The power of the measured unmodulated carrier power at the output of the transmitter power amplifier (antenna input power) may not exceed the following:
 - (i) 54-72, 76-88, and 174-216 MHz bands-50mW
 - (ii) 470-608 and 614-806 MHz bands-250mW

Test Procedure:


The procedure used was EIA/TIA 603-D: 2010. The receiver was scanned from the lowest radio frequency generated in the equipment to the tenth harmonic of the carrier. When an emission was found, the table was rotated to produce the maximum signal strength. An initial pre-scan was performed for in peak detection mode using the receiver. The EUT was measured for both the Horizontal and Vertical polarities and performed a pre-test three orthogonal planes.

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading +Antenna Factor +Cable Factor -Preamplifier Factor

An initial pre-scan was performed in the 3m chamber using the spectrum analyzer in peak detection mode. Quasi-peak measurements were conducted based on the peak sweep graph. The EUT was measured by Bilog antenna with 2 orthogonal polarities


Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the Carrier Radiated Power and spurious emissions were measured by the substitution.

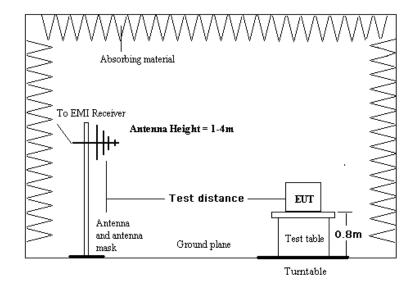

Conducted output power:

Remove the antenna from the EUT and then connect a low attenuation RF cable from the antenna port to the spectrum.

Set the spectrum analyzer: RBW = 300 kHz. VBW >= RBW. Span=2MHz, Sweep = auto; Detector Function = Peak (Max. hold).

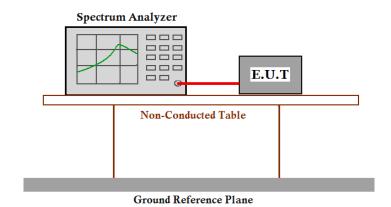

Carrier **Reading Value** Cable **True Value** Limit in loss 74.861 e) Frequency conducted output conducted output (MHz) power dBm (mW) (dB) power dBm (mW) 1) 174.200 10.4dBm(i.e.10.96mW) 0.4 10.8dBm(i.e.12.02mW) 17dBm (i.e. 181.424 10.4dBm(i.e.10.96mW) 0.4 10.8dBm(i.e.12.02mW) 50mW) 215.800 9.8dBm(i.e.9.55mW) 0.4 10.2dBm(i.e.10.47mW)

Note:

Conducted output power (dBm)= Reading Value (dBm)+ Cable loss(dB)

ERP power:

Carrier Frequency : 174.200 MHz									
Spurious	Read	Cable	Antenna	1-18GHz	Ture value	Limit/	Margin		
Emission	value	Loss	Factor	Pre-ampl	(dBm/mW)	dBm	(dB)		
Frequency		(dB)	(dB)	ifier					
(MHz)	(dBm)			(dB)					
Fundamental:					10.6dBm/				
174.2,	0.3	1.4	8.9	0	11.48mW	17	-6.4		
Horizontal					11.4011177				
Fundamental:	-14.3	1.4	8.9	0	-4.0dBm/	17	-21.0		
174.2, Vertical	-14.5	1.4	0.9	O	0.40mW	17	-21.0		
Camian Fasancas	404 40)							
Carrier Frequenc	y : 181.42 	4 MHZ							
Fundamental:					10.8dBm/				
181.4,	0.4	1.1	9.3	0	12.02mW	17	-6.2		
Horizontal					12.02111				
Fundamental:	-14.3	1.1	9.3	0	-3.9dBm/	17	-20.9		
181.4, Vertical	-14.5	1.1	9.0	U	0.41mW	17	-20.3		
	045.00								
Carrier Frequency : 215.800 MHz									
Fundamental:					9.9dBm/				
215.8,	-2.5	1.5	10.9	0	9.906III/ 9.77mW	17	-7.1		
Horizontal					9.7711100				
Fundamental:	-17.1	1.5	10.9	0	-4.7dBm/	17	-21.7		
215.8, Vertical	-17.1	1.5	10.8	U	0.34mW	17	-21.1		

TRF:HST-F-Q071 B/0 Page 10 of 31

Radiated spurious emissions:

174.200 MHz, Horizontal								
Spurious	Read	Cable	Antenna	1-18GHz	Ture	Limit/	Margin(dB)	
Emission	value	Loss	Factor	Pre-amplifier	value	dBm		
Frequency		(dB)	(dB)	(dB)	(dBm)			
(MHz)	(dBm)							
Fundamental: 174.2	0.3	1.4	8.9	0	10.6	17	-6.4	
1393.6	-31.8	3.1	26.6	30	-32.1	-13	-19.1	
174.200 MHz, Ve	ertical							
Fundamental: 174.2	-14.3	1.4	8.9	0	-4.0	17	-21.0	
348.4	-40.9	1.6	14.0	0	-25.3	-13	-12.3	
1045.2	-13.9	2.8	23.3	30	-17.8	-13	-4.8	
1219.4	-18.5	3.0	25.4	30	-20.1	-13	-7.1	
181.424, Horizon	tal							
Fundamental: 181.4	0.4	1.1	9.3	0	10.8	17	-6.2	
1451.4	-31.5	3.2	26.4	30	-31.9	-13	-18.9	
181.424, Vertical								
Fundamental: 181.4	-14.3	1.1	9.3	0	-3.9	17	-20.9	
362.8	-41.0	1.5	14.4	0	-25.1	-13	-12.1	
1088.5	-14.3	2.8	24.2	30	-17.3	-13	-4.3	
1270.0	-18.5	3.0	26.2	30	-19.3	-13	-6.3	
215.800 MHz, Ho	orizontal							
Fundamental: 215.8	-2.5	1.5	10.9	0	9.9	17	-7.1	
1726.4	-33.6	3.5	27.8	30	-32.3	-13	-19.3	
215.800 MHz, Ve	215.800 MHz, Vertical							
Fundamental: 215.8	-17.1	1.5	10.9	0	-4.7	17	-21.7	
431.6	-43.2	1.7	15.4	0	-26.1	-13	-13.1	
1294.8	-17.6	3.0	26.1	30	-18.5	-13	-5.5	
1510.6	-21.7	3.4	27.0	30	-21.3	-13	-8.3	

Note:

The Factual Level is ERP value.

Limit = -13dBm, and the Fundamental limit = 17dBm (i.e. 50mW)

30dB pre-amplifier factor is used for the radiated emissions test above 1GHz.

Attenuation Factor includes the cable loss and the antenna factor, 30dB pre-amplifier factor.

Below 1GHz: Attenuation Factor (dB) = cable loss (dB) + antenna factor (dB) Above 1GHz: Attenuation Factor (dB) = cable loss (dB) + antenna factor (dB) -30 (dB).

Ture Value (dBm) = Reading Value (dBm) + Attenuation Factor (dB)

The peak emission of other frequency in rang from 30MHz up to 10 times carrier were 25dB lower than the limit, hence no data was recorded in the report.

NA: Not applicable, since the level is over 30dB lower than the limit.

Below 1GHz, Detector=Peak, RBW=120 kHz, VBW=60 kHz, MT=1ms, Unit=dBm. Above 1GHz, Detector=Peak, RBW=1MHz, VBW=500kHz, MT=1ms, Unit=dBm.

TEST RESULTS: The unit does meet the FCC requirements.

3.2.2 Occupied Bandwidth


Test Requirement: FCC CFR 47 Part 74.e) 5) & 6)
Test Method: FCC CFR 47 Part 2.1049 f) 2)

Requirements:

- (e) For low power auxiliary stations operating in the bands allocated for TV broadcasting, the following technical requirements apply:
- (5) The operating bandwidth shall not exceed 200 kHz.
- (6) The mean power of emissions shall be attenuated below the mean output power of the transmitter in accordance with the following schedule:
- (i) On any frequency removed from the operating frequency by more than 50 percent up to and including 100 percent of the authorized bandwidth: at least 25dB;
- (ii) On any frequency removed from the operating frequency by more than 100 percent up to and including 250 percent of the authorized bandwidth: at least 35dB;
- (iii) On any frequency removed from the operating frequency by more than 250 percent of the authorized bandwidth: at least 43+10log₁₀ (mean output power in watts) dB.

Test Procedure


Setup

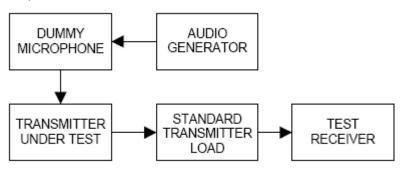


Input 2500Hz signal to the microphone, find the 50% rated deviation, add the level 16dB, test this status the 99% occupied bandwidth and record it.

Test Result: The graph as below, represents the emissions take for this device.


Occupied Bandwidth (99% of total power): 58 kHz.

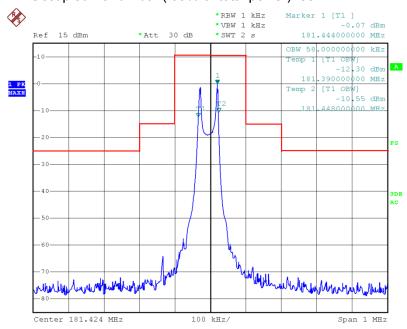


Emission Mask: input with 2500 Hz AF, 50% modulation + 16dB.

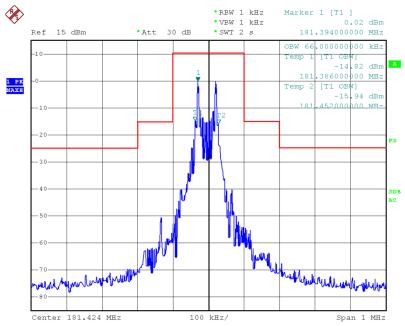



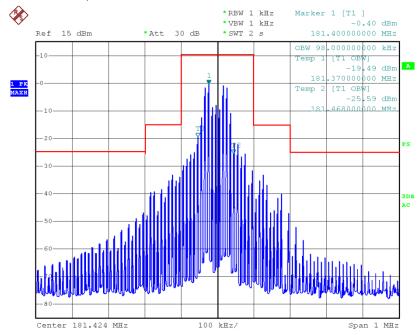

Emission Mask: input with 15 kHz AF, 50% modulation + 16dB.

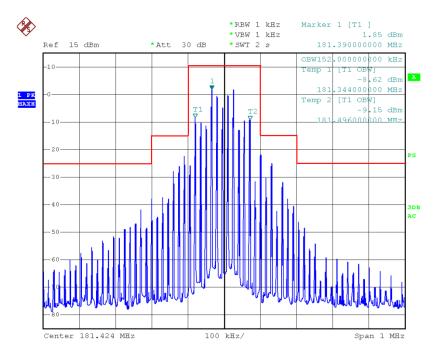

Test results: The unit does meet the FCC requirements.

3.2.3 Frequency Stability

Test Requirement: FCC CFR 47 Part 74.e) 4)

Test Method: FCC CFR 47 Part 2.1055

Requirements: +/-50 ppm

(e) For low power auxiliary stations operating in the bands allocated for TV broadcasting, the following technical requirements apply:

(4) The frequency tolerance of the transmitter shall be 0.005 percent.


Test Procedure:

Frequency stability versus Environmental Temperature

The equipment under test was connected to an external DC power supply and the RF output was connected to a frequency counter via feed through attenuators. The EUT was placed inside the temperature chamber. After the temperature stabilized for approximately 20 minutes, the frequency of the output signal was recorded from the counter.

Frequency Stability versus Input Voltage

At room temperature ($25 \pm 5^{\circ}$ C), an external variable DC power supply was connected to the EUT. The frequency of the transmitter was measured for 115%, 100% and 85% of the nominal operating input voltage. For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

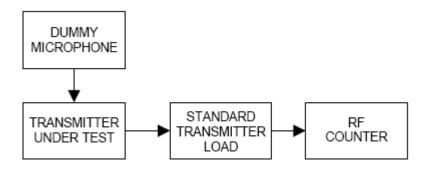

Test Result:

Assigned Frequency: 174.2 MHz/ 181.424 MHz/ 215.8 MHz							
Environment Temperature	Power Supplied	Frequency Measure with Time Elapsed					
(°C)	(Vdc)	Total emission within					
		+/-8.71kHz	+/-9.71kHz	+/-10.8kHz			
50	9.0	-3.5	-3.6	-2.6			
40	9.0	3.4	3.8	3.2			
30	9.0	4.3	3.5	4.5			
20	9.0	-2.9	-3.4	-3.2			
10	9.0	-3.7	-2.2	-3.3			
0	9.0	4.7	4.5	4.2			
-10	9.0	-3.3	-3.6	-5.2			
-20	9.0	-5.3	-5.4	-5.2			
-30	9.0	-6.1	-5.8	-5.5			
Environment Temperature	Power Supplied	Frequency N	leasure with T	îme Elapsed			
(°C)	(Vdc)	Tot	al emission wit	thin			
		+/-8.71kHz	+/-9.71kHz	+/-10.8kHz			
25	9.0	-3.4	-3.8	-4.2			
25	8.5	0.5	0.4	0.6			
25	8.0	1.2	1.4	3.3			
25	7.5	-4.2	-5.0	-4.9			

The EUT end point: 7.5Vdc

The results: The unit does meet the FCC requirements.

TRF:HST-F-Q071 B/0 Page 17 of 31

3.2.4 Modulation Characteristics

Test Requirement: FCC CFR 47 Part 74.e) 3)
Test Method: FCC CFR 47 Part 2.1047

Requirements:


- (e) For low power auxiliary stations operating in the bands allocated for TV broadcasting, the following technical requirements apply:
- (3) Any form of modulation may be used. A maximum deviation of ± 75 kHz is permitted when frequency modulation is employed.

Test Procedure:


Audio Frequency Response

The RF output of the transceiver was connected to the input of FSP 30 with FM deviation module through sufficient attenuation so as not to overload the meter or distort the reading. An audio signal generator was connected to the audio input of microphone.

The audio signal input level was adjusted to obtain **20% of the maximum rated system deviation at 1 kHz**, and recorded as DEV_{REF} . With the audio signal generator level unchanged, set the generator frequency between 100 to 5000 Hz. The transmitter deviations (DEV_{FREQ}) were measured and the audio frequency response was calculated as 20log10 [DEV_{FREQ} / DEV_{REF}]

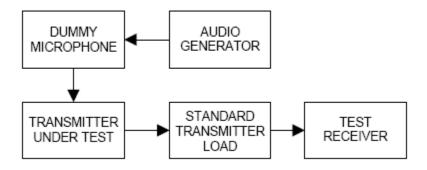


The plot(s) of Audio Frequency Response is presented hereinafter as reference.

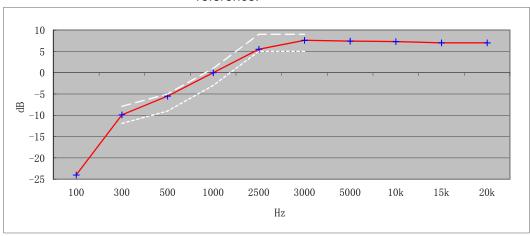

0dB=10mV at 1kHz (20% of the maximum rated system deviation).


Modulation Limiting

- a) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- b) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤0.25 Hz to ≥15,000 Hz. Turn the de-emphasis function off.
- c) Apply a **1000 Hz** modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain **60% of full rated system deviation**.
- d) Increase the level from the audio frequency generator by 20 dB in one step (rise time between the 10% and 90% points shall be 0.1 second maximum).
- e) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level.
- f) With the level from the audio frequency generator held constant at the level obtained in step e), slowly vary the audio frequency from 100 to 5000 Hz and observe the steady-state deviation. Record the maximum deviation.

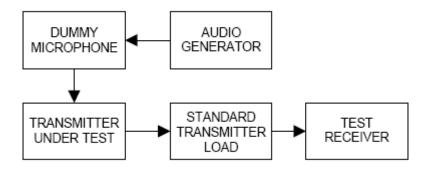

Test at five different modulating frequencies (100Hz ,300Hz, 500Hz, 1KHz, 2.5kHz, 5kHz), the output level of the audio generator was varied up to 1V and the FM deviation level was recorded.


Positive peak deviation

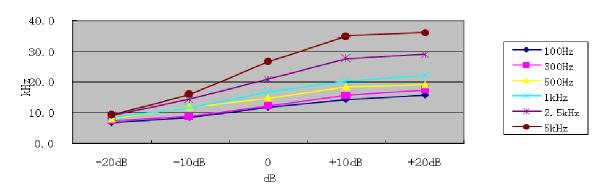


3.3 Photographs

3.3.1 Radiated Emission Test Setup

30MHz - 1GHz

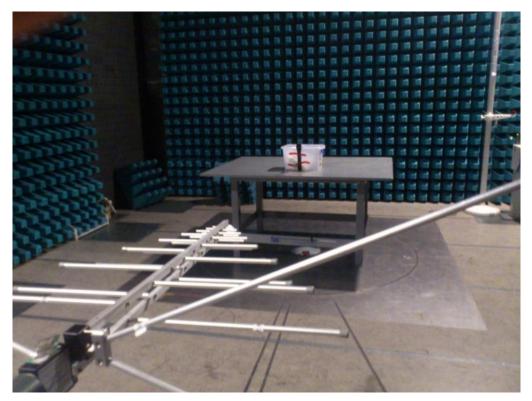


Above 1GHz

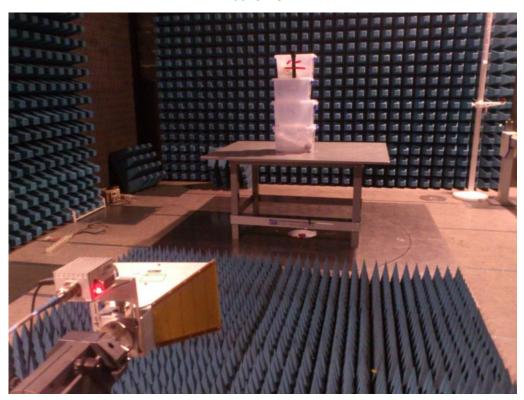

TRF:HST-F-Q071 B/0 Page 21 of 31

3.3.2 EUT Constructional Details

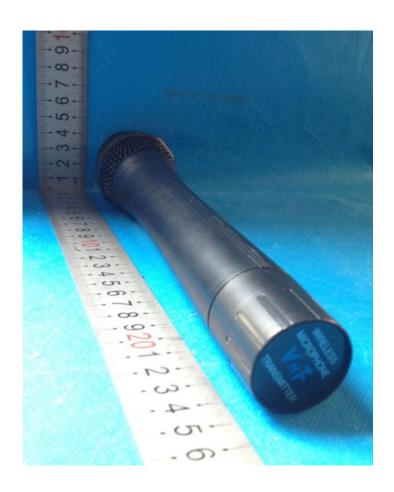



TRF:HST-F-Q071 B/0 Page 22 of 31














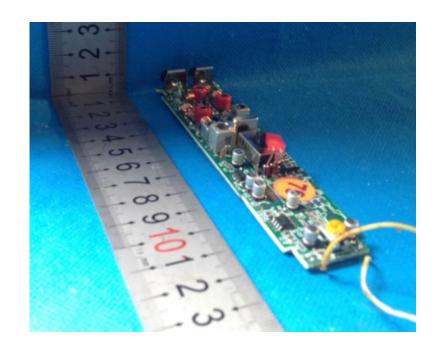


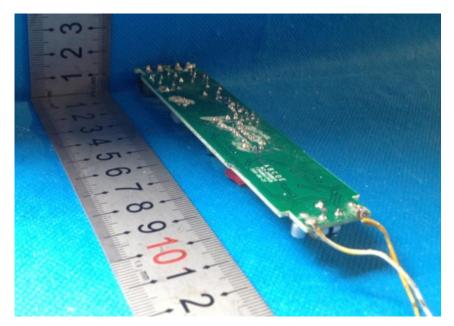


TRF:HST-F-Q071 B/0 Page 25 of 31



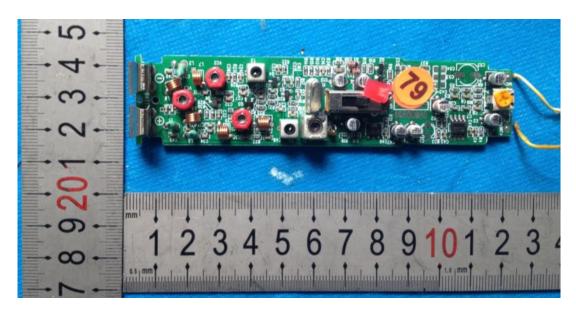

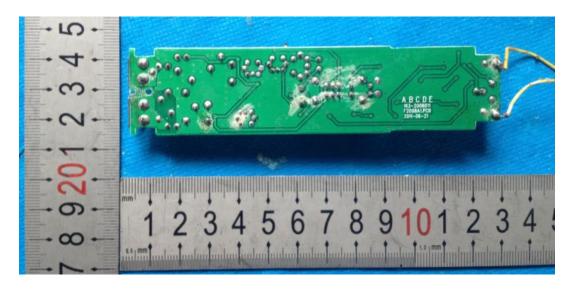

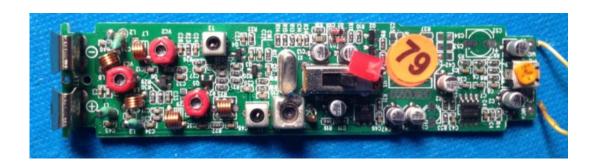




TRF:HST-F-Q071 B/0 Page 27 of 31



TRF:HST-F-Q071 B/0 Page 28 of 31

3.3.3 Antenna Photo

Min distance from the antenna to the shell : 4.0 mm;
Antenna Location: antenna: Negative electrode of the battery;
Antenna within the two AA batteries length: 56 mm

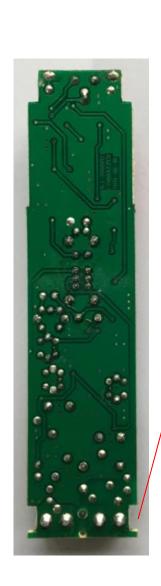



TRF:HST-F-Q071 B/0 Page 29 of 31

4 Equipments Used during Test

Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date	Cal. Due date
1	RF Generator	Rohde & Schwarz	SMB100A-B106	1.031	2016-5-10	2017-5-10
2	Spectrum Analyzer	Rohde & Schwarz	FSP30	EMC0001	2016-3-24	2017-3-24
3	EMI Test Receiver	Rohde & Schwarz	ESCI	EMC1002	2016-3-24	2017-3-24
4	2-Channel Power Meter	Rohde & Schwarz	NRP2	1.033	2016-5-10	2017-5-10
5	Audio Analyzer	Hewlett Packard	8903B	EMC0011	2016-11-5	2017-11-5
6	Power Sensor	Rohde & Schwarz	NRP-Z91	1.034	2016-5-10	2017-5-10
7	Power Sensor	Rohde & Schwarz	NRP-Z91	1.035	2016-5-10	2017-5-10
8	Temperature Chamber	Gongwen	GDS-250	SFT0009	2016-11-5	2017-11-5
9	D.C. Power Supply	KIKUSUI	PAN35-10A	SFT0319	2016-11-5	2017-11-5
10	Temperature Chamber	Gongwen	GDS-250	SFT0009	2016-11-5	2017-11-5
11	D.C. Power Supply	KIKUSUI	PAN35-10A	SFT0319	2016-11-5	2017-11-5
12	Humidity/ Temperature Meter	Anymetre	TH101B	SFT0063	2016-11-5	2017-11-5
13	Barometer	ChangChun	DYM3	SEL0088	2016-6-8	2017-6-8
14	Multimeter	UNI-T	UT70A	EMC0017	2016-11-5	2017-11-5
15	Monopole Antenna	HST	N/A	EMC0089	2016-11-5	2017-11-5
16	Low loss coaxial cable	HST	2 m	EMC1008	2016-11-5	2017-11-5
17	Monopole Antenna	HST	N/A	N/A	2016-11-5	2017-11-5
18	Noise Generator	Ningbo Zhongce	DF1681	EMC0009	2016-11-5	2017-11-5
19	Semi-Anechoic chamber	ETS•Lindgren	FACT3 2.0	ITL-100	2016-6-17	2019-6-17
20	EMI Test receiver	R&S	ESVS10	ITL-111	2017-1-19	2018-1-19
21	EXA Spectrum Analyzer	Agilent Technologies	N9010A	ITL-114	2017-1-19	2018-1-19
22	Biconilog Antenna	ETS•Lindgren	3142D	ITL-105	2015-1-24	2018-1-24

23	Pre Amplifier	HP	8447F	ITL-116	2017-1-19	2018-1-19
24	Wideband Amplifier Super Ultra	Mini-circuits	ZVA-183-S+	ITL-117	2017-1-19	2018-1-19
25	Horn Antenna	A-INFOMW	JXTXLB-10180 -N	ITL-110	2015-1-24	2018-1-24
26	Software	Audix	E3	ITL-109	1	/
27	Loop Antenna	BJ 2nd Factory	ZN30900A	EMC6001	2016-7-29	2019-7-29

^{***}End of report***

Report Statement

- 1. This test report is invalid if altered, additions and deletions.
- 2. This test report is responsible for tested samples only.
- 3. Objections to the test report must be submitted to Guangdong Huesent Testing & Inspection Technology Co., Ltd. within 15 days.
- 4. The test report is invalid without the signatures of tester, reviewer, approver, and official stamp of test unit.
- 5. Without permission of Guangdong Huesent Testing & Inspection Technology Co., Ltd., This report is not permitted to be duplicated in extracts.
- 6.P"= Pass=Test item conform to the requirement
- "F"= Fail=Test item not conform to the requirement
- "N" = Not Applicable = Test item Not Applicable to the test object

TRF:HST-F-Q071 B/0 Page 32 of 32