

Wireless System TX-Module
H3814-B
Model BR

Integration and Operation Manual

s

Ver 1.0 2020. Aug. 25th

Table of Contents

Safety Instructions	1
Introduction	2
Chapter 1 General Description	2
System Diagram	2
Chapter 2 Hardware Description	3
Dimensions	3
Product Image	3
Mechanical Drawing	3
Chapter 3 Electrical Characteristics	4
3.1 HOST Interface	4
3.2 Operating Conditions	5
Chapter 4 Radio Characteristics	5
Chapter 5 Internal mechanism	6
Boot-up	6
Idle-state	6
Sleep-state	6
TRIGGER-Operation	6
Command-Operation	6
Send a radio packet state	6
Chapter 6 Integration (Installation)	7
Mechanical Integration	7
Electrical Integration	7
Chapter 7 Radio Certification	9

Safety Instructions



RADIO TRANSMITTER PRODUCT !

This product emission Radio-Frequency energy. Be carefully to integrate your system.

Make sure to be taken to cautions and specifications in this manual, especially operation environment for best performance. Must not exceed supply voltage limit, or may be damaged permanently. This Product conforms to world-wide ISM-standard radio-regulations, so you may operate according to your local regulations. ISM-band device operate in shared frequency with others, so Interference can't be ruled out.



SAFETY PRECAUTIONS!

Do not attempt to operate the equipment before studying the instruction manual and the accompanying safety instructions. Failure to do so may result in serious injuries.

Make sure that Safety Instructions is always accompanied the equipment!

This products are intended for professional use!

Do not place or use the equipment where it can be exposed to moisture, extreme electromagnetic fields, or in areas with flammable gases or dust!

Do not expose the equipment to rapid temperature changes in humidity conditions as this could lead to water condensation in the unit.

Equipment must only be serviced by authorized and competent service personnel!

Any modification will break the modular certification and require the module to be re-certified.



FINAL DISPOSAL

This equipment contains electrical and electronic components that could be harmful to the environment.

Follow local requirements for separate disposal of waste, for instance WEEE directive for electrical and electronic equipment on the European market, when the product's life has ended.

Introduction

WS TX-Module is wireless transmit function module, using 2.4GHz ISM-band.

It is originally designed to integration with SEKONIC Exposure-meter/Color-meter products, can remote-control for professional photography lighting equipment.

Radio control range performance is up to over 50m, in open-space.


WS TX-Module 'Model BR' is compatible with "Broncolor RFS2 wireless system", under agreement of SEKONIC-Broncolor collaboration.

Chapter 1 General Description

WS TX-Module Model BR is using Nordic high performance RF-Transceiver chip with +10dBm power amp, and controller core (MCU) is a 16-bit renesas microprocessor, with integrated (on-board pattern) Antenna, and function-feature set is compatible with RFS2 radio system.

Host Interface is a 3V-UART communication and simple TRIGGER-SW input.

System Diagram

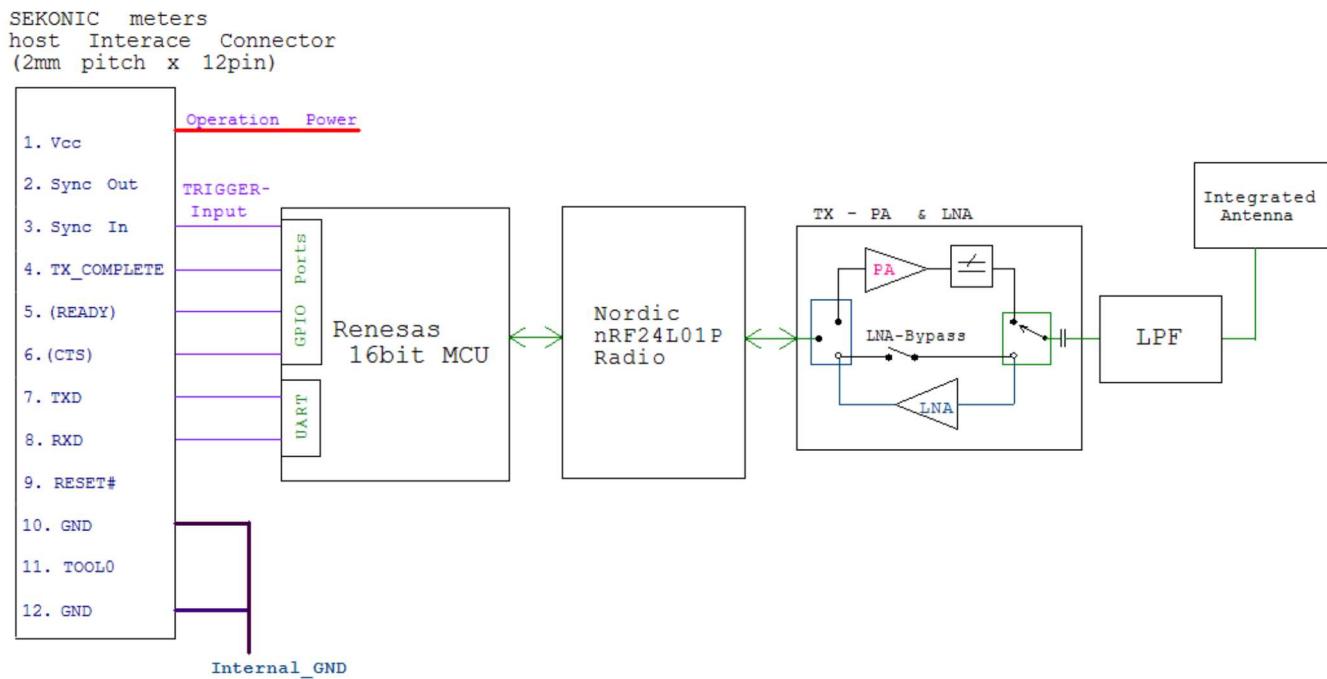


Chapter 2 Hardware Description

Dimensions


29 x 25 x 6 mm +/- 0.5mm [Width,Length,Height]

Weight : approx. 8g

Product Image

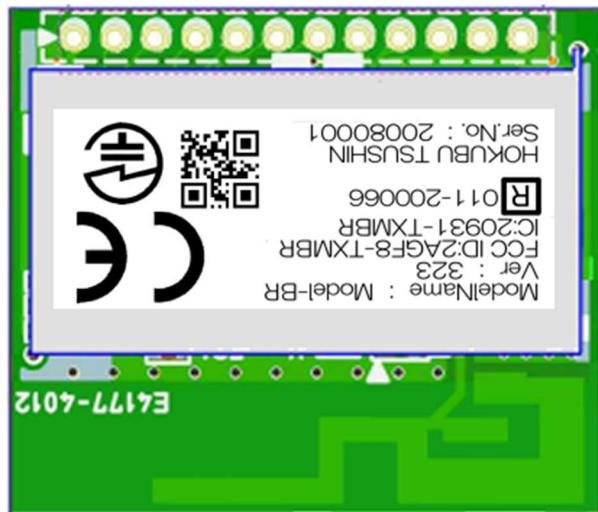

Mechanical Drawing

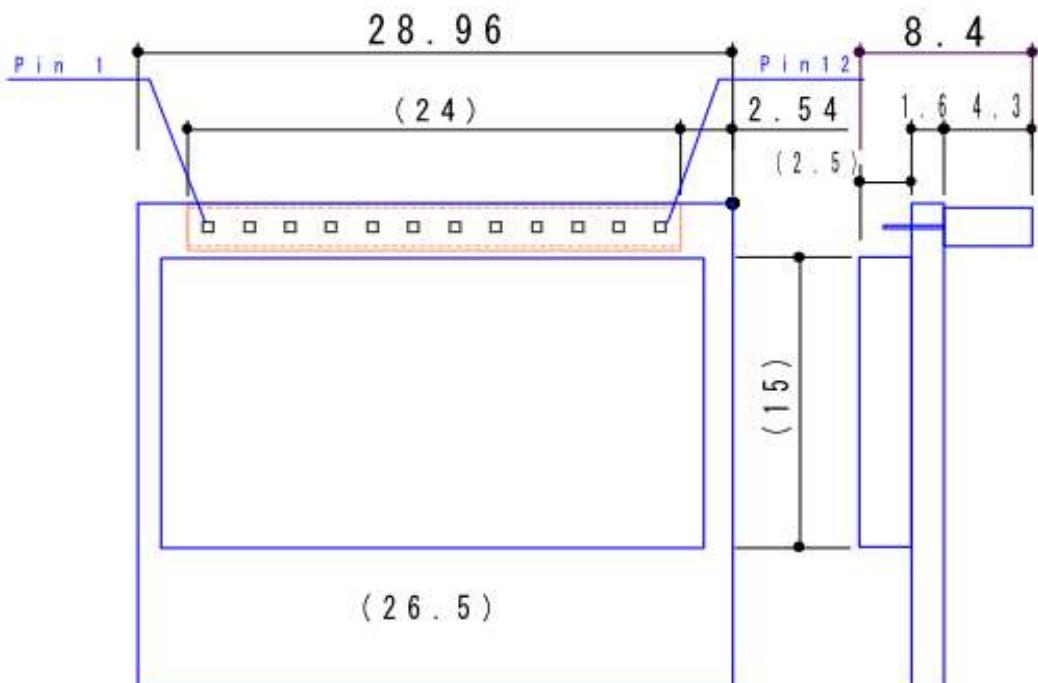

Chapter 3 Electrical Characteristics

3.1 HOST Interface

J1 2.0mm pitch/12pin		
Pin	Function	
1	Vcc	DC Power
2	(SYNC_OUT)	Connected to GND Internally
3	SYNC_IN	TRIGGER Input (Active L)
4	TX_Complete	Status Output (Active L)
5	READY	Status Output (Active L)
6	CTS	Status Output (Active L)
7	TXD	UART TxD (Output)
8	RXD	UART RxD (Input)
9	RESET	RESET INPUT (Active L)
10	GND	
11	(reserved)	Keep open (not to connect)
12	GND	

Interface Description

The interface to the host-system is implemented as a 12 pin male connector. Connector part is JC HSW2W-S12G, recommended matching pin-header is IK210W39-S12G-H1.5 (or compatible 2.00mm pitch, 3.9mm-height square-pin type header pin.)

UART Serial Interface

The UART is using pins 7,8. Signal level is 3V-CMOS level, these signals can directly connect to host MCU. If you wish to connect to RS232 line, must use a TTL(CMOS) level converter (like a FTDI converter dongle).

Serial characteristics : 38400, 8, N, 1 (no flow control) [firmware for L-858 Installation]



Connecting the module to an RS232 line without a level converter may cause permanent damage to the module.

For available command list and control session sequences, please refer to the Control Command Spec documentation.

RESET Interface

RESET Interface forces control MCU to hardware-reset (active low, minimum 10uS).

The following conditions also reset on the module (MCU).

- Power on reset
- Low voltage (Brown Out) detected from internal MCU supervisory function.
- Reset by Software (command)

3.2 Operating Conditions

Parameter	Min	Max	Unit
DC Supply	2.7	3.3	V
Current		0.1	A
Temperature		65	°C
Humidity		95	% RH

Chapter 4 Radio Characteristics

Parameter	Min	Typ.	Max	Unit
Frequency Range	2403		2481	MHz
Channel Step		2.0		MHz
Frequency Stability	-96		+96	kHz
Transmit Power	4.5	6.0	7.5	dBm
Antenna(Integrated) Gain		0		dBi

The module have operation feature compatible to “Broncolor RFS2 system”. The feature set is commonly based on, Nordic ShockBurst Protocol,

** in US/CE operation mode, RF Transmit Power is reduced by 6dB on channel 39/79 (2481 MHz),
By subject to comply with US/Canada Radio emission regulation.

Air-interface Detail definitions is as follows.

Parameter	Broncolor RFS2 Mode			
Modulation	GFSK			
RF Chip Mode	Nordic ShockBurst			
Frequency Channel (Channel-ID:Physical ch. mapping)	0 : 2403	10:2407	20 : 2411	30:2415
	1 : 2419	11:2423	21 : 2427	31:2431
	2 : 2435	12:2439	22 : 2443	32:2447
	3 : 2451	13:2455	23 : 2459	33:2463
	4 : 2467	14:2471	24 : 2475	34:2479
	5 : 2405	15:2409	25 : 2413	35:2417
	6 : 2421	16:2425	26 : 2429	36:2433
	7 : 2437	17:2441	27 : 2445	37:2449
	8 : 2453	18:2457	28 : 2461	38:2465
	9 : 2469	19:2473	29 : 2477	39:2481
Grouping	8bit Logical-sub Address in Frame type 2			
Data Rate	250 kbps			

More detail information of operation mode, please refer to command reference documentation.

Chapter 5 Internal mechanism

Boot-up

This module is originally intended to integration for SEKONIC L-858 exposure meter product. As of nature, if the module is cold-started (or hardware reset), the module firmware initialize internal resources. After complete initialize, send boot-up message to host on UART interface. Boot-Up message contains Module ID, hardware and firmware revision code and serial number.

Idle-state

After boot-up state, the module enter to idle-state.

In idle state, the module firmware wait a command from host or TRIGGER signal. If no host command/TRIGGER Input for 10mS-duration, the module firmware go into Sleep State (HALT State).

Sleep-state

In the Sleep state, the module control-MCU is in HALT State.

So the module firmware cannot run until an interruption is occur. (TRIGGER or UART)

TRIGGER-Operation

The module can get TRIGGER Input signal from host in any state, include HALT state.

TRIGGER Input (SYNC-IN) signal can acknowledged, minimum 10uS duration low-level.

After TRIGGER Input is acknowledged, module firmware send a radio packet, 'RF-Trigger-Command'. 'RF-Trigger Command' frame, defined by target feature set(air-interface), is to trigger Strobo-flash(s).

TRIGGER Input is must not allowed continuously low state. To be lesser to 1mS-Low.

If no other input-low after process-complete, the module firmware go into idle state.

Command-Operation

The module can get UART Command from host in any state, include HALT state.

The module firmware validate the received command, and process the command.

eg. Send a command on radio/ status report/ RF-mode control (change)

If no other command after process one command, the module firmware go into idle state.

Send a radio packet state

In send a radio packet state, the module send a packet-frame, frame content is defined by feature set.

After complete send-operation, the module enters idle state.

Chapter 6 Integration (Installation)

WS TX-Module is originally designed for installation to SEKONIC L-858 series exposure-meter. However, you can integrate (install) the module to any device, but appropriate care shall be need.

Mechanical Integration

You must consider host-side space and dimensions against to the module (mechanical) dimensions and Host interface connector height to be fit. Also, the module has integrated Antenna, so you need to keep instructions bellow, to perform the radio performance.

Space or Clearance :

Top-side - The module needs at least 5mm back-side clearance, above shield cover.


This clearance need to keep the antenna performance, or the antenna – gain will be degrade.

(ie. Radio communication distance will be shortened.)

Antenna area/or space

For best to Radio performance, keep in mind to Antenna Area will be needed, Metal-Plate (or structure) may shadow the module antenna, cause some shield like effect. And, Host board must be free space (or no part-mounted).

[Installation space requirement]

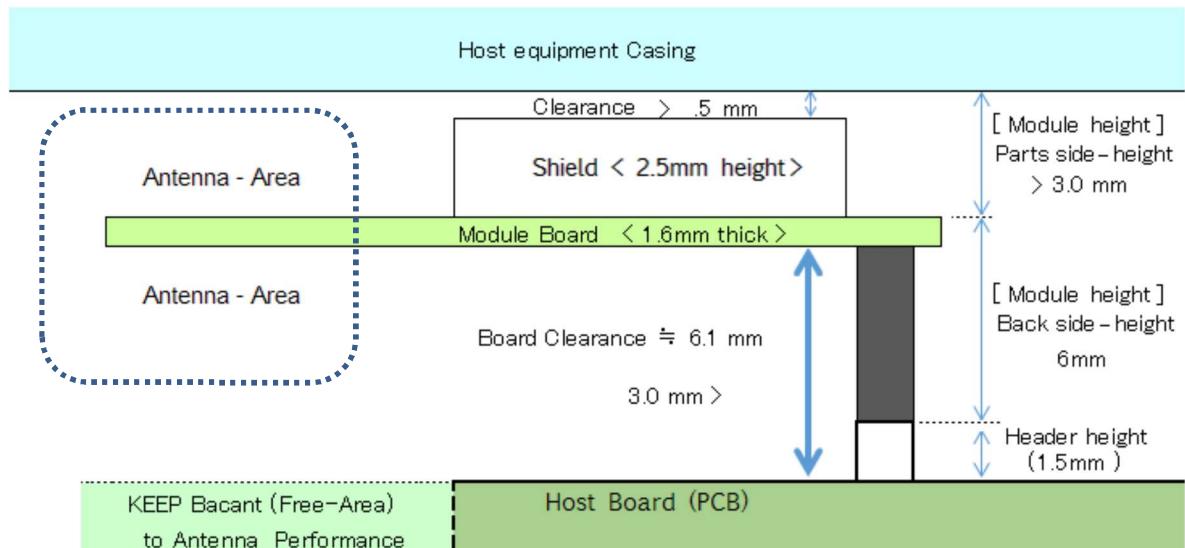

Electrical Integration

Host side Connector : suitable pin-header to the module connector, 2.0mm pitch/ 0.5mm-sq. pin.

The minimum connections needed for operation are:

PIN	Function	Comment
1	Vcc	Operation Power source
3	Trig	Active Low (In)
4	TX Complete	Active Low (Out)
10,12	GND	Ground

Full functional connections are:

PIN	Function	Comment
1	Vcc	Operation Power source
3	Trig	Active Low (In)
4	TX Complete	Active Low (Out)
7	TXD	Command Serial out
8	RXD	Command Serial in
9	RESET	Active Low
11	(Reserved)	(No connect.)
10,12	GND	Ground

Chapter 7 Radio Certification

World-wide Usage of Radio Spectrum Regulation

WS-TX-Module Model BR operates on the license-free 2.4GHz ISM Band (Short Range Devices).

This band may be used in most part of the world. Regional restrictions may apply in most countries/region.



NOTE!

Refer to national regulations for the region where the WS-TX-Module shall be operated and make sure that they are followed.

Europe

WS-TX-Module Model BR has been tested to EU Directive assessed radio module, that is CE marked and has been manufactured and tested with intention of being integrated into a final product.

The module has been tested to EU Directive 2014/53/EU Essential Requirements for Health and Safety(Article(3.1(a)),and Radio(Article3.2) .

Harmonized standards applied:

Air Interface of the radio systems pursuant to article 3(2)

EN 300 440 v2.1.1(2017 01)

Safety requirements concerning human exposure to electromagnetic compatibility according to article 3(1)a:

EN 62479

The manufacturer must maintain a copy of the module documentation and ensure the final product does not exceed the specified power ratings, antenna specifications, and/or installation requirements as specified in the user manual. All test reports are available, please contact our sales stuff.

The “CE” marking must be affixed to a visible location on the OEM product. The CE mark shall consist of the initials “CE” taking to following form:

- If the CE marking is reduced or enlarged, the proportions given the above graduated drawing must be respected.
- The CE marking must have a height of at least 5mm except where this is not possible on account of the nature of the apparatus.
- The CE marking must be affixed visibly, legibly, and indelibly.

More detailed information about CE marking requirements you can find at “DERECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND THE COUNCIL” on March 1999 at section 12.

Once approved and CE marked, the system may be sold and used EU/EEC countries without the need to have country-specific approval tests.

United States and Canada

FCC and Industry Canada

Compliance Statement (Part 15.19)

This device complies with Part 15 of FCC rules and RSS Gen/RSS-247 of industry Canada.

Operation is subject to the following two conditions:

- 1) This device may not cause harmful interference and,
- 2) This device must accept any interference received,
including interference that may cause undesired operation.



Warning (Part15.21)

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF exposure compliance

- 1) To comply with FCC/IC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.
- 2) This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Requirement to end product

This module must be integrated only by OEM integrators under the following conditions.

- (1) OEM integrator has to be aware not provide information to the users regarding how to install or remove this module in the Users Manual of the end product which integrate this module.
Installation by end users is strictly prohibited.
- (2) Antenna
OEM Integrator shall use this module without any modifications including antenna.
OEM Integrator must make sure that 20cm minimum separation is maintained between users and the antenna.
- (3) Co-location
This module must not be co-located in conjunction with any other antenna or transmitter. The module integrator shall obtain FCC approval for the end product, if the module is used for co-location operation.
- (4) Markings
To satisfy FCC/IC exterior labeling requirements, the following text must be placed on the exterior of the end product.

Contains Module FCC ID: 2AGF8-TXMBR, IC:20931-TXMBR

Any similar wording that expresses the same meaning may be used.

If Host device in which is integrated this module, has a built-in display screen, OEM integrator can use e-label on the host display (Electronic labeling) instead to physical labeling.

Since this module not have a secure electronic exchange interface to host with authentication, host manufacturer can display the FCC ID information on host by factory-encoding the FCC ID of the module. Factory encoding must be secure and locked by the manufacturer and not alterable by any third parties. The Programmed information must display the above statement-string or equivalent.

(Contains FCC ID.....)

For detailed information, please consult us or see FCC website.(<http://www.fcc.gov/oet/info/rules/>)

(5) Caution to user for modification

The following caution is expressed on the user's instruction manual.

The changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device.

(6) Compliance statement to FCC

The following statement is expressed on the user's instruction manual.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.**
- Increase the separation between the equipment and receiver.**
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.**
- Consult the dealer or an experienced radio/TV technician for help.**

Ce dispositif est conforme aux normes RSS-Gen/RSS-247 d'Industrie Canada.

L'utilisation de ce dispositif est autorisée seulement aux conditions suivantes;

- 1) il ne doit pas produire de brouillage at
- 2) l'utilisateur de dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.

The term 'IC' before the certification/registration number only signifies that the Industry Canada technical specifications were met.

Les lettres 'IC' n'ont aucune autre signification ni aucun autre but que d'identifier ce qui suit comme le numero de certification/d'enregistrement d'Industrie Canada.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

HOKUBU Communication & Industrial

Transmitter

MODEL : Model BR

PRODUCT NO:H3814-B

FCC ID : 2AGF8-TXMBR

IC: 20931-TXMBR

Made in JAPAN

Change History

Development Division.

HOKUBU Communication and Industrial Co.,Ltd.
Fushi-o-gami 27-1, Fukushima-shi, Fukushima-Pref.
960-8154, JAPAN

TEL 8124-545-2237
FAX 8124-545-2491

Company Web-site <http://www.hokubu.co.jp>