

Smart Watch User Manual



P98-V1.0



◆ Schematic Diagram of Charging


Operate in strict accordance with the following figures:

1. Please use the product-specific magnetic charging cable to charge by aligning it with the charging contacts on the back of the watch.
2. Do not use a power adapter with a voltage exceeding 5V and an output current exceeding 1A for charging, as this may cause charging failure and damage to the magnetic charging cable or the device.
3. Please activate the watch when it runs out of power before charging: the watch screen will only light up after about 5 minutes of normal charging.

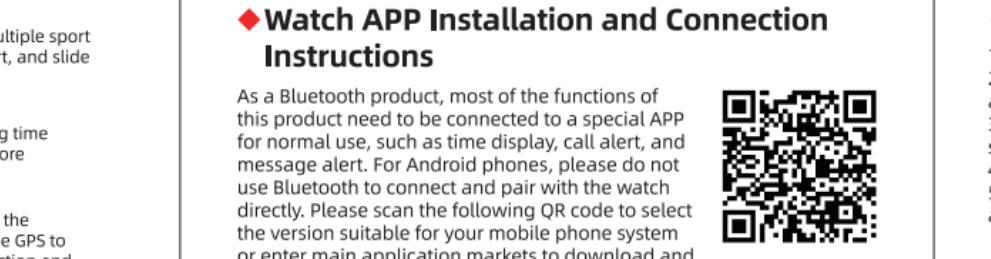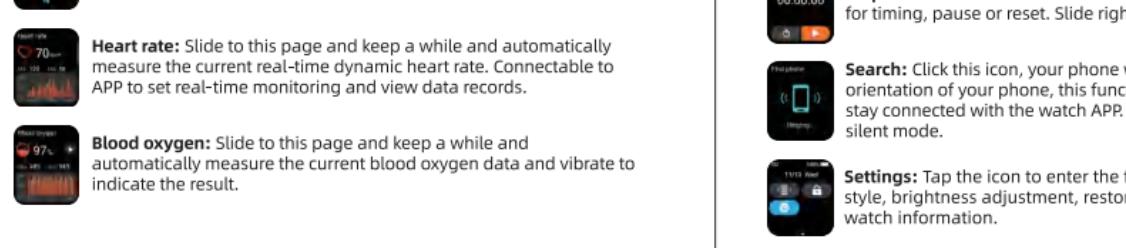

◆ Introduction to Watch Function

1. Talking Bluetooth on/off
2. Theme mode switching
3. Do not disturb on/off
4. Mute mode
5. Brightness setting
6. Wrist lift screen on/off
7. Find cell phone function
8. Screen lock
9. Settings



Main interface: There are 5 main interfaces, you can choose any one of them as the main interface. Display the current time, date, steps and other information of the watch; press the main interface for a long time to switch the main dial left and right, and click to confirm.


Watch audio switch: It can turn on/off the watch call function and multimedia sound playback function.

Steps: Display current steps, distance and calories of the watch.

Heart rate: Slide to this page and keep a while and automatically measure the current real-time dynamic heart rate. Connectable to APP to set real-time monitoring and view data records.

Blood oxygen: Slide to this page and keep a while and automatically measure the current blood oxygen data and vibrate to indicate the result.

Settings: Tap the icon to enter the function, you can set the menu style, brightness adjustment, restore factory, power off and view watch information.

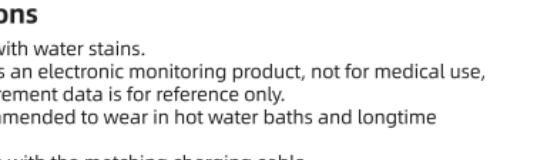

Exercise: Click on the icon on this page to access the multiple sport modes option. Select a sport mode, click the icon to start, and slide right to pause or stop the sport.

Answer:

If the phone turns on the message notification and the corresponding notification permission according to the above tips, the Bluetooth is kept on, and the APP and the watch are kept connected, maybe the system is not recommended to wear hot water baths and long time swimming.

4. Please charge with the matching charging cable.

5. Please keep the charging feed point on the back of the device clean to avoid the device being unable to charge.

4. Android's phone Bluetooth often disconnects when message alert after a period of connection.

Answer:

Android will turn the time to clean up the phone's backstage applications or applications that consume more power for smooth system operation. If the APP is not allowed to run in the backstage, it will be easily cleared by the system and the Bluetooth will drop out. Different Android phones have different methods for APP backstage running settings. As in the Huawei nova 8: Settings - Battery - Power Consumption Ranking - APP Application Launch Management - Manually manage to turn on the backstage running.

1. Problems such as the watch cannot be searched in the APP, or the watch cannot synchronize with the time of the phone.

Answer:

A. Make sure your phone's Bluetooth and phone GPS positioning are on before using for the first time.

B. Users need to open the APP to obtain positioning permission.

- Consult the dealer or an experienced radio/technician for help.

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/technician for help.

- More information on the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.