

FCC Radio Test Report

FCC ID: 2AGG6FJZB101

This report concerns (check one): Original Grant Class II Change

Project No. : 1511C167
Equipment : zigbee module
Model Name : FJZB101
Applicant : Wuhan Fenjin intelligent machine Co.,LTD
Address : No.25,Gaoxin 4th,East Lake Hi-Tech Development Zone,Fenjin Industrial

Date of Receipt : Nov. 10, 2015
Date of Test : Nov. 10, 2015 ~ Nov. 30, 2015
Issued Date : Dec. 01, 2015
Tested by : BTL Inc.

Testing Engineer : Shawn Xiao
(Shawn Xiao)

Technical Manager : David Mao
(David Mao)

Authorized Signatory : Steven Lu
(Steven Lu)

B T L I N C .

No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan,
Guangdong, China.

TEL: +86-769-8318-3000 FAX: +86-769-8319-6000

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with the standards traceable to National Measurement Laboratory (**NML**) of **R.O.C**, or National Institute of Standards and Technology (**NIST**) of **U.S.A**.

BTL's reports apply only to the specific samples tested under conditions. It is manufacturer's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

BTL's report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and **BTL-self**, extracts from the test report shall not be reproduced except in full with **BTL**'s authorized written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO Guide 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Table of Contents	Page
1 . CERTIFICATION	6
2 . SUMMARY OF TEST RESULTS	7
2.1 TEST FACILITY	8
2.2 MEASUREMENT UNCERTAINTY	8
3 . GENERAL INFORMATION	9
3.1 GENERAL DESCRIPTION OF EUT	9
3.2 DESCRIPTION OF TEST MODES	10
3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING	10
3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
3.5 DESCRIPTION OF SUPPORT UNITS	11
4 . EMC EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION LIMITS	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 EUT TEST CONDITIONS	13
4.1.7 TEST RESULTS	13
4.2 RADIATED EMISSION MEASUREMENT	14
4.2.1 RADIATED EMISSION LIMITS	14
4.2.2 TEST PROCEDURE	15
4.2.3 DEVIATION FROM TEST STANDARD	15
4.2.4 TEST SETUP	16
4.2.5 EUT OPERATING CONDITIONS	17
4.2.6 EUT TEST CONDITIONS	17
4.2.7 TEST RESULTS (9KHZ TO 30MHZ)	17
4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)	18
4.2.9 TEST RESULTS (ABOVE 1000 MHZ)	18
5 . BANDWIDTH TEST	19
5.1 APPLIED PROCEDURES / LIMIT	19
5.1.1 TEST PROCEDURE	19
5.1.2 DEVIATION FROM STANDARD	19
5.1.3 TEST SETUP	19
5.1.4 EUT OPERATION CONDITIONS	19
5.1.5 EUT TEST CONDITIONS	19
5.1.6 TEST RESULTS	19

Table of Contents	Page
6 . MAXIMUM OUTPUT POWER TEST	20
6.1 APPLIED PROCEDURES / LIMIT	20
6.1.1 TEST PROCEDURE	20
6.1.2 DEVIATION FROM STANDARD	20
6.1.3 TEST SETUP	20
6.1.4 EUT OPERATION CONDITIONS	20
6.1.5 EUT TEST CONDITIONS	20
6.1.6 TEST RESULTS	20
7 . ANTENNA CONDUCTED SPURIOUS EMISSION	21
7.1 APPLIED PROCEDURES / LIMIT	21
7.1.1 TEST PROCEDURE	21
7.1.2 DEVIATION FROM STANDARD	21
7.1.3 TEST SETUP	21
7.1.4 EUT OPERATION CONDITIONS	21
7.1.5 EUT OPERATION CONDITIONS	21
7.1.6 TEST RESULTS	21
8 . POWER SPECTRAL DENSITY TEST	22
8.1 APPLIED PROCEDURES / LIMIT	22
8.1.1 TEST PROCEDURE	22
8.1.2 DEVIATION FROM STANDARD	22
8.1.3 TEST SETUP	22
8.1.4 EUT OPERATION CONDITIONS	22
8.1.5 EUT TEST CONDITIONS	22
8.1.6 TEST RESULTS	22
9 . MEASUREMENT INSTRUMENTS LIST	23
10 . EUT TEST PHOTO	25
ATTACHMENT A - CONDUCTED EMISSION	29
ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)	32
ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)	34
ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)	41
ATTACHMENT E - BANDWIDTH	54
ATTACHMENT F - MAXIMUM OUTPUT POWER TEST	57
ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION	58
ATTACHMENT H - POWER SPECTRAL DENSITY TEST	62

REPORT ISSUED HISTORY

Issued No.	Description	Issued Date
BTL-FCCP-1-1511C167	Original Issue.	Dec. 01, 2015

1. CERTIFICATION

Equipment : zigbee module
Brand Name : N/A
Model Name : FJZB101
Applicant : Wuhan Fenjin intelligent machine Co.,LTD
Manufacturer : Wuhan Fenjin intelligent machine Co.,LTD
Address : No.25,Gaoxin 4th,East Lake Hi-Tech Development Zone,Fenjin Industrial
Factory : Wuhan Fenjin intelligent machine Co.,LTD
Address : No.25,Gaoxin 4th,East Lake Hi-Tech Development Zone,Fenjin Industrial
Date of Test : Nov. 10, 2015 ~ Nov. 30, 2015
Test Sample : Engineering Sample
Standard(s) : FCC Part15, Subpart C :2014 (15.247) / ANSI C63.10-2013

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.

The test data, data evaluation, and equipment configuration contained in our test report (Ref No. BTL-FCCP-1-1511C167) were obtained utilizing the test procedures, test instruments, test sites that has been accredited by the Authority of TAF according to the ISO-17025 quality assessment standard and technical standard(s).

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

Applied Standard(s): FCC Part15 (15.247) , Subpart C: 2014			
Standard(s) Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.247(d)	Antenna conducted Spurious Emission	PASS	
15.247(a)(2)	6dB Bandwidth	PASS	
15.247(b)(3)	Peak Output Power	PASS	
15.247(e)	Power Spectral Density	PASS	
15.203	Antenna Requirement	PASS	
15.209/15.205	Transmitter Radiated Emissions	PASS	

NOTE:

(1)"N/A" denotes test is not applicable to this device.

(2) All tests are according to ANSI C63.10-2013.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Shixia, Dalang Town, Dongguan, Guangdong, China.

BTL's test firm number for FCC: 319330

2.2 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. The BTL measurement uncertainty is less than the CISPR 16-4-2 U_{cisp} requirement.

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement :

Test Site	Method	Measurement Frequency Range	U ,(dB)
DG-C02	CISPR	150 kHz ~ 30MHz	2.32

B. Radiated Measurement :

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	9KHz ~ 30MHz	V	3.79
		9KHz ~ 30MHz	H	3.57
		30MHz ~ 200MHz	V	3.82
		30MHz ~ 200MHz	H	3.78
		200MHz ~ 1,000MHz	V	4.10
		200MHz ~ 1,000MHz	H	4.06

Test Site	Method	Measurement Frequency Range	Ant. H / V	U ,(dB)
DG-CB03 (3m)	CISPR	1GHz ~ 18GHz	V	3.12
		1GHz ~ 18GHz	H	3.68
		18GHz ~ 40GHz	V	4.15
		18GHz ~ 40GHz	H	4.14

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	zigbee module		
Brand Name	N/A		
Model Name	FJZB101		
Model Difference	N/A		
Product Description	Operation Frequency	2405 MHz~2480 MHz	
	Modulation Technology	MSK	
	Bit Rate of Transmitter	250 bps	
	Output Power (Max.)	12.83dBm	
Power Source	Supplied from system		
Power Rating	DC 3.3V 50mA		

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2405	09	2445
02	2410	10	2450
03	2415	11	2455
04	2420	12	2460
05	2425	13	2465
06	2430	14	2470
07	2435	15	2475
08	2440	16	2480

3. Table for Filed Antenna:

Ant.	Mfr/Brand	Model Name	Antenna Type	Connector	Gain (dBi)
1	JOHANSON Technology	2450AT18B100	Chip	N/A	0.5

3.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Pretest Mode	Description
Mode 1	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Radiated Test	
Final Test Mode	Description
Mode 1	TX Mode NOTE (1)

Note:


(1) The measurements are performed at the high, middle, low available channels.

3.3 TABLE OF PARAMETERS OF TEXT SOFTWARE SETTING

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.

Test Software Version	Insight Desktop		
Frequency (MHz)	2405	2440	2480
IEEE 802.15.4	N/A	N/A	N/A

3.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

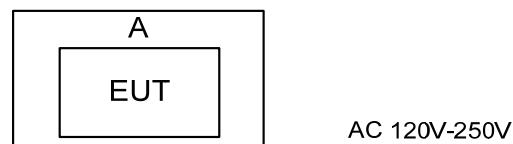

3.5 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.
A	General expansion module	N/A	FJGE101	N/A	N/A

Item	Shielded Type	Ferrite Core	Length	Note
-	-	-	-	-

Note:

(1) For detachable type I/O cable should be specified the length in m in 『Length』 column.

4. EMC EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 POWER LINE CONDUCTED EMISSION LIMITS (Frequency Range 150KHz-30MHz)

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-peak	Average
0.15 -0.5	66 to 56*	56 to 46*
0.50 -5.0	56	46
5.0 -30.0	60	50

Note:

(1) The limit of " * " decreases with the logarithm of the frequency

(2) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor(if use)

Margin Level = Measurement Value - Limit Value

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

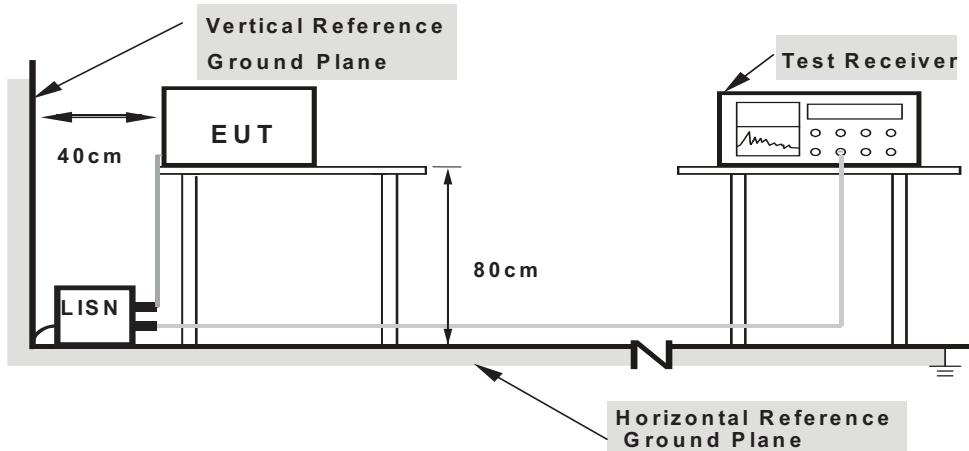

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.1.6 EUT TEST CONDITIONS

Temperature: 24°C

Relative Humidity: 60%

Test Voltage: AC 120V 60Hz

4.1.7 TEST RESULTS

Please refer to the Attachment A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of «Note». If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform. In this case, a “*” marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150KHz to 30MHz.
- (3) “N/A” denotes test is not applicable to this device.

4.2 RADIATED EMISSION MEASUREMENT

4.2.1 RADIATED EMISSION LIMITS

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9KHz-1000MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	Peak	Average
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)
 Margin Level = Measurement Value - Limit Value

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	RBW 1MHz VBW 3MHz peak detector for Pk value RMS detector for AV value

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.2.3 DEVIATION FROM TEST STANDARD


No deviation

4.2.4 TEST SETUP


(A) Radiated Emission Test Set-Up Frequency Below 1 GHz

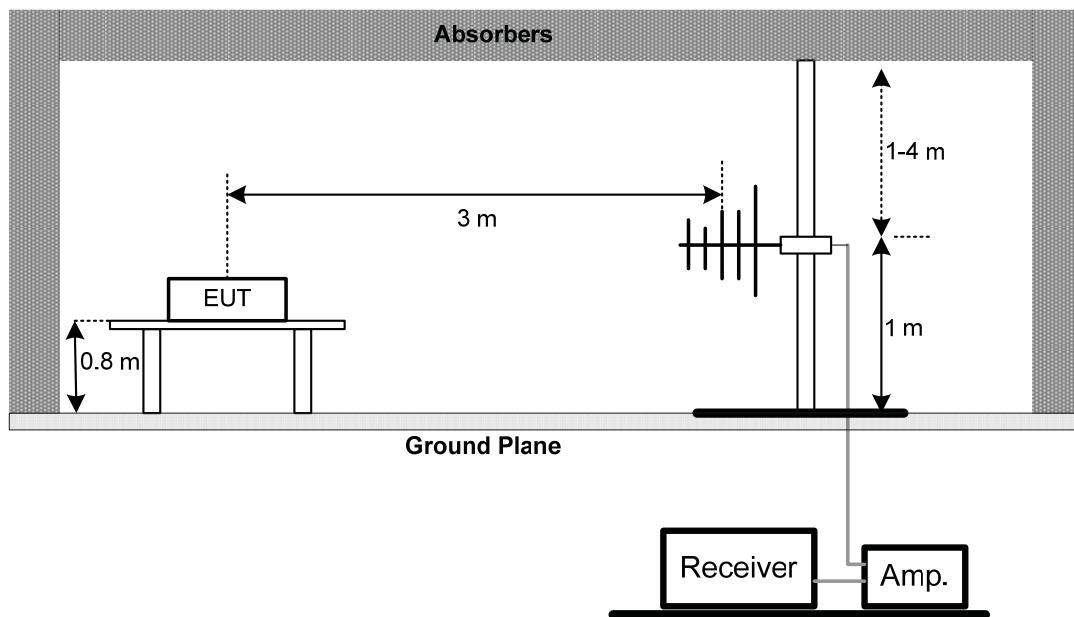

(B) Radiated Emission Test Set-Up Frequency Above 1 GHz

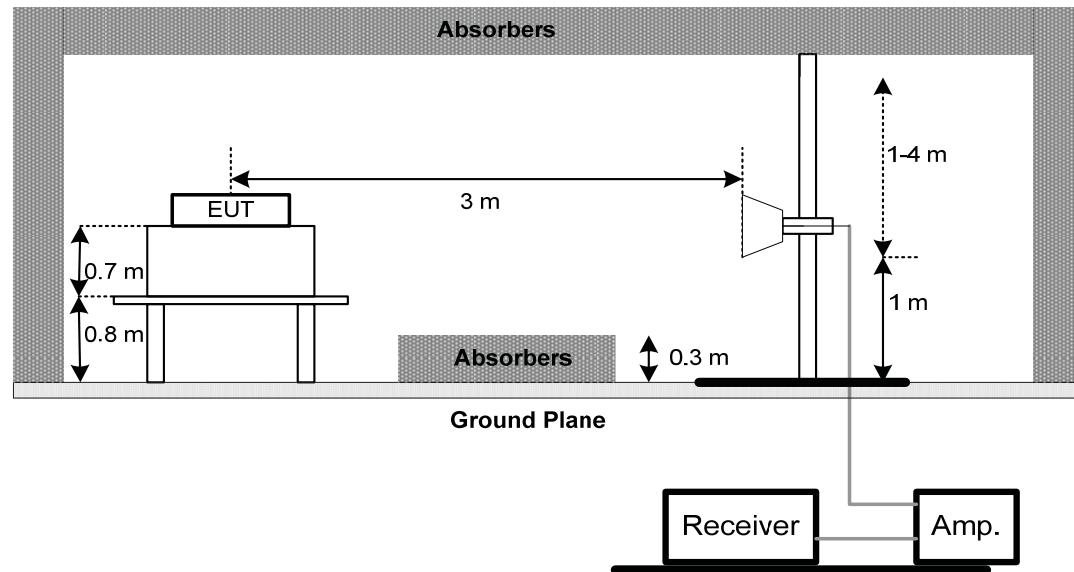

(C) For radiated emissions below 30MHz

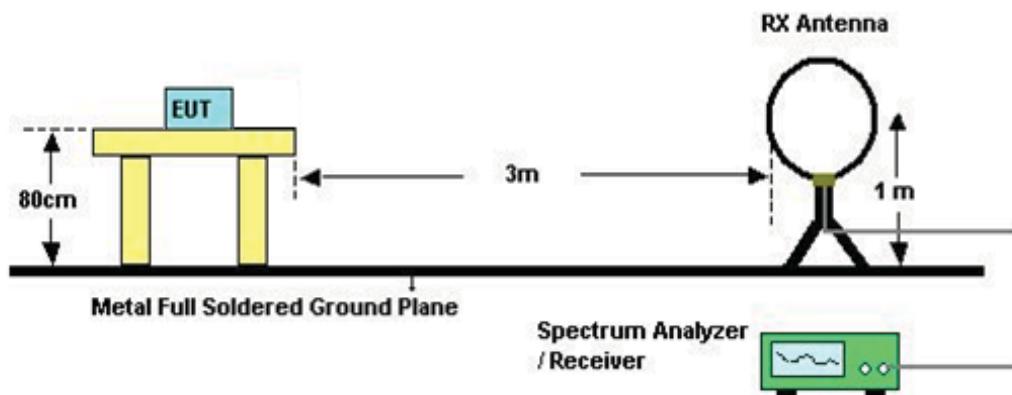

4.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.2.6 EUT TEST CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V 60Hz

4.2.7 TEST RESULTS (9KHZ TO 30MHZ)

Please refer to the Attachment B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.2.8 TEST RESULTS (30MHZ TO 1000 MHZ)

Please refer to the Attachment C.

4.2.9 TEST RESULTS (ABOVE 1000 MHZ)

Please refer to the Attachment D.

Remark:

- (1) Radiated emissions measured in frequency range above 1000MHz were made with an instrument using Peak detector mode and AV detector mode of the emission
- (2) A preamp and high pass filter were used for this test in order to provide sufficient measurement sensitivity.
- (3) EUT Orthogonal Axis:
"X" - denotes Laid on Table ; "Y" - denotes Vertical Stand ; "Z" - denotes Side Stand
- (4) During the measurements above 1 GHz it is taken care of that the EUT is always within the 3 dB cone of radiation BW of the used antenna
- (5) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

5.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 2.5 ms.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP



5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V 60Hz

5.1.6 TEST RESULTS

Please refer to the Attachment E.

6. MAXIMUM OUTPUT POWER TEST

6.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Output Power	1 watt or 30dBm	2400-2483.5	PASS

6.1.1 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- The maximum peak conducted output power was performed in accordance with method 9.1.2 of FCC KDB 558074 D01 DTS Meas Guidance v03r03.

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V 60Hz

6.1.6 TEST RESULTS

Please refer to the Attachment F.

7. ANTENNA CONDUCTED SPURIOUS EMISSION

7.1 Applied procedures / limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated device is operating, the RF power that is produced shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided that the transmitter demonstrates compliance with the peak conducted power limits.

7.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW=300KHz, Sweep time = 10 ms.
- c. Offset=antenna gain + cable loss

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP



7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 EUT OPERATION CONDITIONS

Temperature: 25°C

Relative Humidity: 55%

Test Voltage: AC 120V 60Hz

7.1.6 TEST RESULTS

Please refer to the Attachment G.

8. POWER SPECTRAL DENSITY TEST

8.1 Applied procedures / limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(e)	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

8.1.1 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- Spectrum Setting: RBW=3KHz, VBW=10 KHz, Sweep time = auto.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP



8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 4.1.5 unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 EUT TEST CONDITIONS

Temperature: 25°C
 Relative Humidity: 55%
 Test Voltage: AC 120V 60Hz

8.1.6 TEST RESULTS

Please refer to the Attachment H.

9. MEASUREMENT INSTRUMENTS LIST

Conducted Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	LISN	EMCO	699837	0052765	Mar. 28, 2016
2	LISN	R&S	ENV216	101447	Mar. 28, 2016
3	Test Cable	emci	RG223(9KHz-30 MHz)	C_17	Mar. 13, 2016
4	EMI Test Receiver	R&S	ESCS30	826547/022	Mar. 28, 2016
5	50Ω Terminator	SHX	TF2-3G-A	08122901	Mar. 28, 2016
6	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Antenna	Schwarbeck	VULB9160	9160-3232	Mar. 28, 2016
2	Amplifier	HP	8447D	2944A09673	Nov. 16, 2016
3	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
4	Test Cable	emci	LMR-400(30MHz –1GHz)	C-01	Jun. 28, 2016
5	Antenna	ETS	3115	00075789	Mar. 28, 2016
6	Amplifier	Agilent	8449B	3008A02274	Nov. 01, 2016
7	Receiver	AGILENT	N9038A	MY52130039	Oct. 11, 2016
8	Test Cable	emci	EMC104-SM-S M-10000(1GHz –26.5GHz)	C-68	Jun. 28, 2016
9	Controller	CT	SC100	N/A	N/A
10	Broad-Band Horn Antenna	Schwarbeck	BBHA 9170	9170319	Mar. 28, 2016
11	Microwave Preamplifier With Adaptor	EMC INSTRUMENT	EMC2654045	980039 & HA01	Mar. 28, 2016
12	Active Loop Antenna	R&S	HFH2-Z2	830749/020	Sep. 07, 2016
13	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

6dB Bandwidth Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-S M-9000(0.01GH z-26.5GHz)	C-100	N/A

Peak Output Power Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Power Meter	ANRITSU	ML2495A	1128009	Mar. 28, 2016
2	Pulse Power Sensor	ANRITSU	MA 2411B	1027500	Mar. 28, 2016

Antenna Conducted Spurious Emission Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-S M-9000(0.01GH z-26.5GHz)	C-100	N/A

Power Spectral Density Measurement					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP 40	100185	Oct. 11, 2016
2	Test Cable	emci	EMC104-SM-S M-9000(0.01GH z-26.5GHz)	C-100	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10. EUT TEST PHOTO**Conducted Measurement Photos**

Radiated Measurement Photos

9KHz to 30MHz



Radiated Measurement Photos

30M to 1000MHz



Radiated Measurement Photos


Above 1000MHz



ATTACHMENT A - CONDUCTED EMISSION


Test Mode: TX Mode

Line

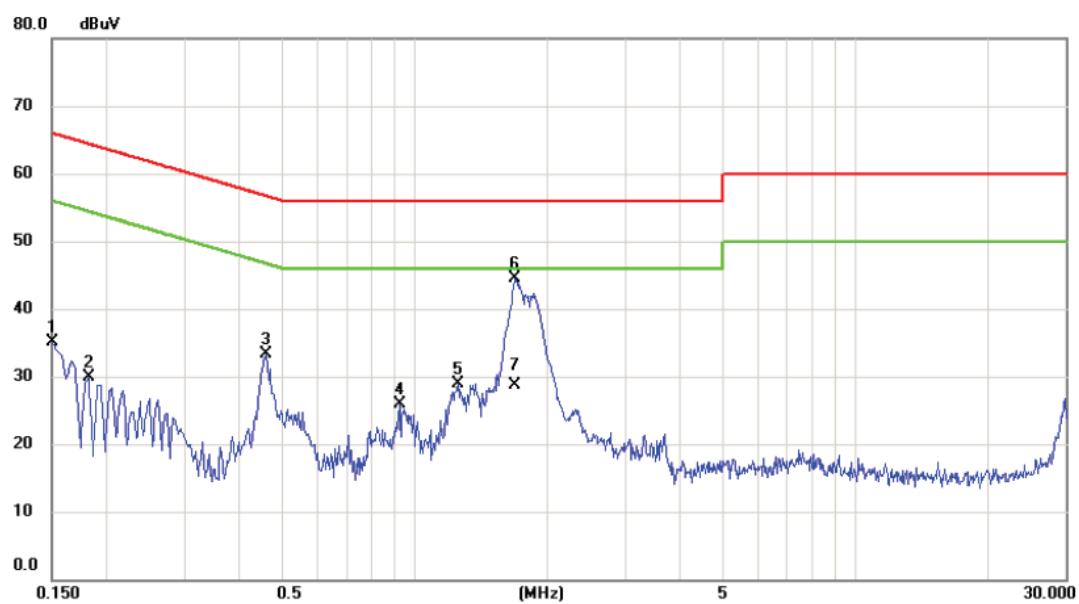

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV	dBuV	dB	
1		0.1500	25.58	9.54	35.12	66.00	-30.88	peak	
2		0.1820	20.25	9.56	29.81	64.39	-34.58	peak	
3		0.4580	23.63	9.68	33.31	56.73	-23.42	peak	
4		0.9220	16.04	9.78	25.82	56.00	-30.18	peak	
5		1.2540	19.14	9.82	28.96	56.00	-27.04	peak	
6	*	1.6900	34.63	9.87	44.50	56.00	-11.50	peak	
7		1.6900	18.90	9.87	28.77	46.00	-17.23	AVG	

Test Mode: TX Mode

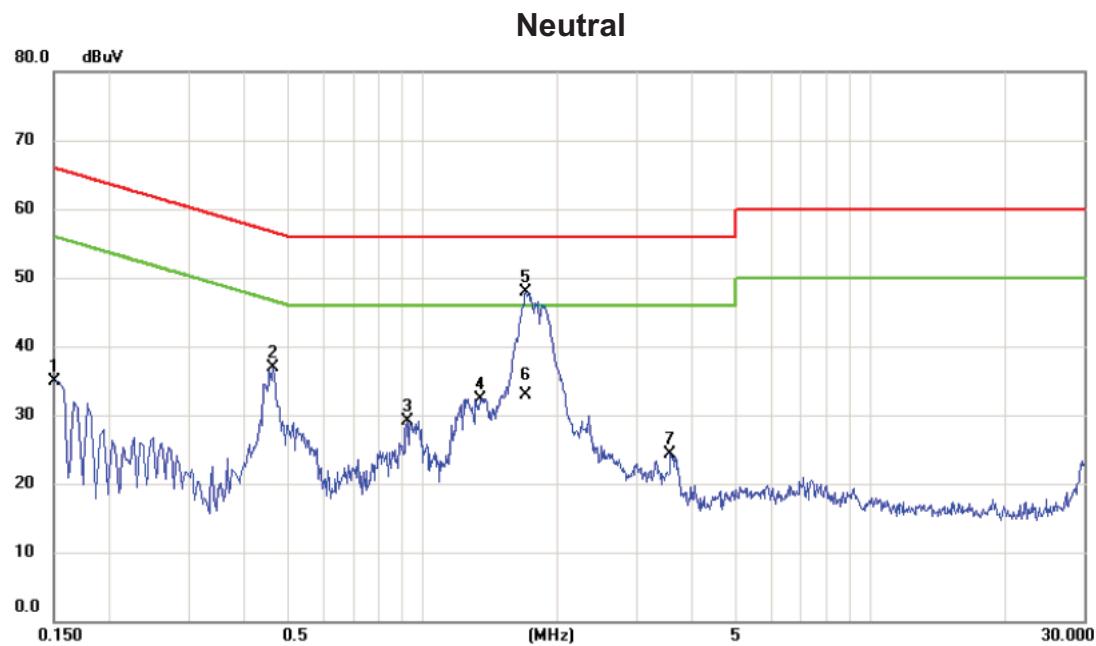

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	25.41	9.49	34.90	66.00	-31.10		peak
2		0.4620	27.45	9.55	37.00	56.66	-19.66		peak
3		0.9220	19.55	9.59	29.14	56.00	-26.86		peak
4		1.3460	22.74	9.64	32.38	56.00	-23.62		peak
5	*	1.7020	38.28	9.68	47.96	56.00	-8.04		peak
6		1.7020	23.30	9.68	32.98	46.00	-13.02		AVG
7		3.5700	14.52	9.87	24.39	56.00	-31.61		peak

ATTACHMENT B - RADIATED EMISSION (9KHZ TO 30MHZ)


Test Mode:	TX Mode
------------	---------

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0089	0°	12.36	25.00	37.36	128.62	-91.25	AVG
0.0089	0°	15.27	25.00	40.27	148.62	-108.34	PEAK
0.0158	0°	9.29	24.57	33.86	123.63	-89.78	AVG
0.0158	0°	10.32	24.57	34.89	143.63	-108.75	PEAK
0.0237	0°	6.17	24.07	30.24	120.11	-89.87	AVG
0.0237	0°	8.46	24.07	32.53	140.11	-107.58	PEAK
0.0413	0°	1.21	22.95	24.16	115.29	-91.12	AVG
0.0413	0°	2.57	22.95	25.52	135.29	-109.76	PEAK
0.5203	0°	18.13	19.86	37.99	73.28	-35.28	QP
1.9216	0°	22.45	19.51	41.96	69.54	-27.58	QP

Frequency (MHz)	Ant 0°/90°	Read level dBuV/m	Factor (dB)	Measured(FS) (dBuV/m)	Limit(QP) (dBuV/m)	Margin (dB)	Note
0.0126	90°	10.73	24.30	35.03	125.60	-90.57	AVG
0.0126	90°	12.18	24.30	36.48	145.60	-109.12	PEAK
0.0281	90°	6.21	23.79	30.00	118.63	-88.63	AVG
0.0281	90°	7.19	23.79	30.98	138.63	-107.65	PEAK
0.0353	90°	2.64	23.33	25.97	116.65	-90.68	AVG
0.0353	90°	3.34	23.33	26.67	136.65	-109.98	PEAK
0.0452	90°	1.06	22.70	23.76	114.50	-90.74	AVG
0.0452	90°	2.38	22.70	25.08	134.50	-109.42	PEAK
0.6152	90°	20.49	20.17	40.66	71.82	-31.17	QP
2.3057	90°	24.37	19.32	43.69	69.54	-25.85	QP

ATTACHMENT C - RADIATED EMISSION (30MHZ TO 1000MHZ)


Test Mode: TX 2405MHz

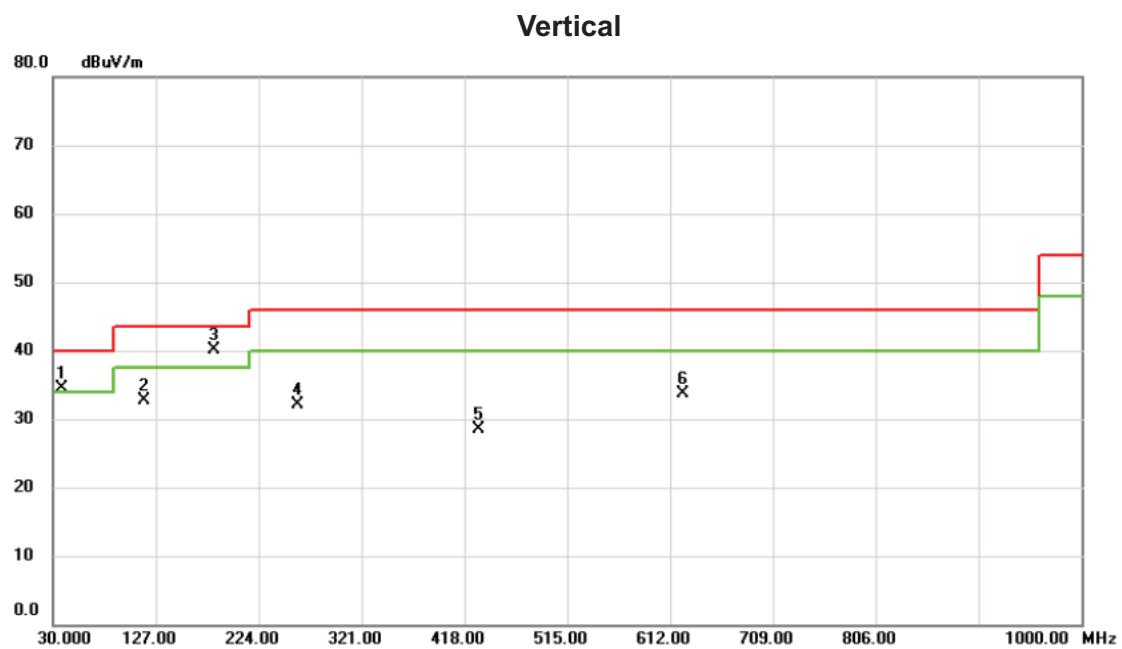

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	!	38.7300	56.75	-22.28	34.47	40.00	-5.53	peak	
2		115.3600	53.91	-21.23	32.68	43.50	-10.82	peak	
3	*	182.2900	57.71	-17.59	40.12	43.50	-3.38	peak	
4		260.8600	51.22	-19.19	32.03	46.00	-13.97	peak	
5		431.5800	42.97	-14.51	28.46	46.00	-17.54	peak	
6		623.6400	43.03	-9.37	33.66	46.00	-12.34	peak	


Test Mode: TX 2405MHz

Horizontal

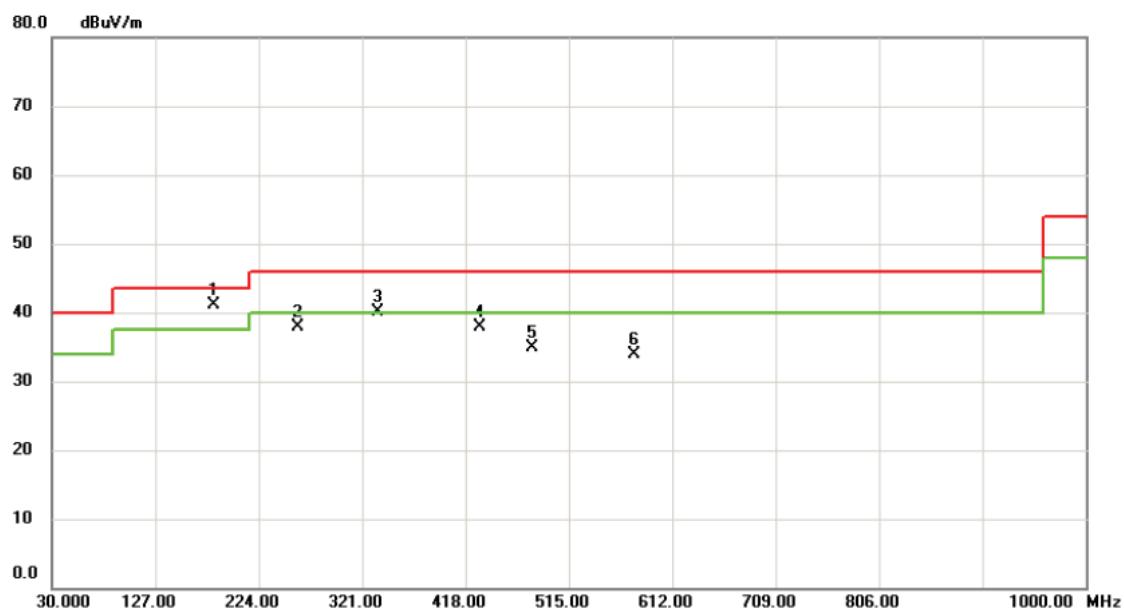


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment	
			Level	Factor	ment				
			MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	182.2900	61.33	-20.24	41.09	43.50	-2.41	peak	
2		260.8600	57.02	-19.03	37.99	46.00	-8.01	peak	
3	!	335.5500	56.75	-16.71	40.04	46.00	-5.96	peak	
4		431.5800	50.75	-12.76	37.99	46.00	-8.01	peak	
5		480.0800	47.69	-12.78	34.91	46.00	-11.09	peak	
6		576.1100	45.73	-11.88	33.85	46.00	-12.15	peak	

Test Mode: TX 2440MHz

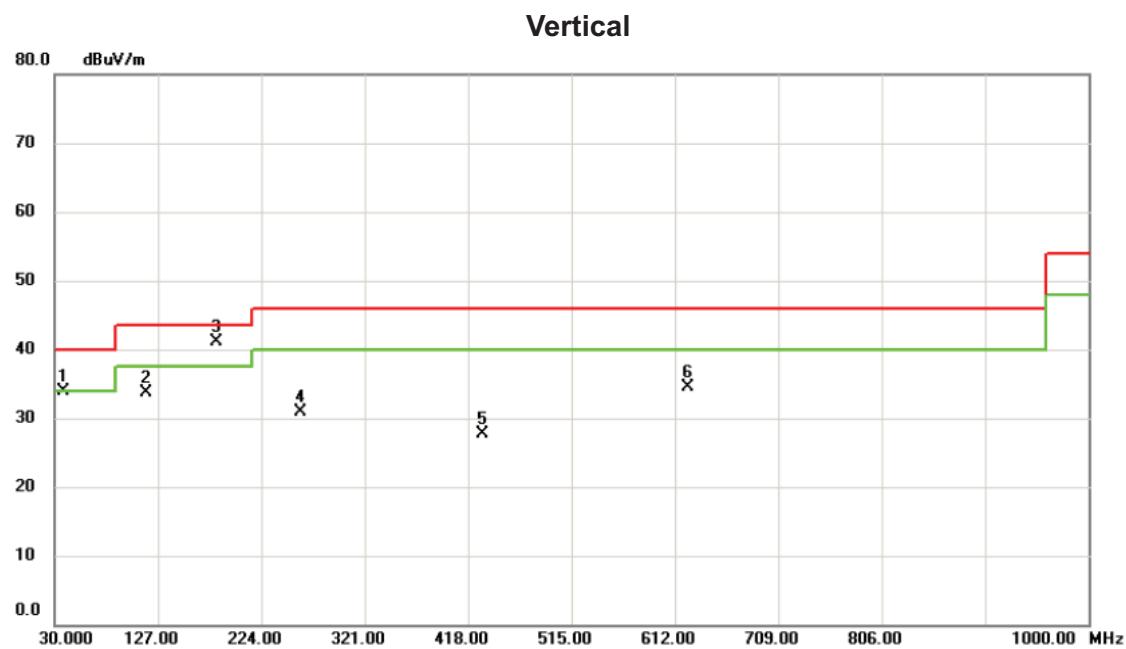


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1		38.7300	56.13	-22.28	33.85	40.00	-6.15	peak
2		115.3600	54.86	-21.23	33.63	43.50	-9.87	peak
3	*	182.2900	58.68	-17.59	41.09	43.50	-2.41	peak
4		260.8600	50.11	-19.19	30.92	46.00	-15.08	peak
5		431.5800	42.19	-14.51	27.68	46.00	-18.32	peak
6		623.6400	43.85	-9.37	34.48	46.00	-11.52	peak

Test Mode: TX 2440MHz

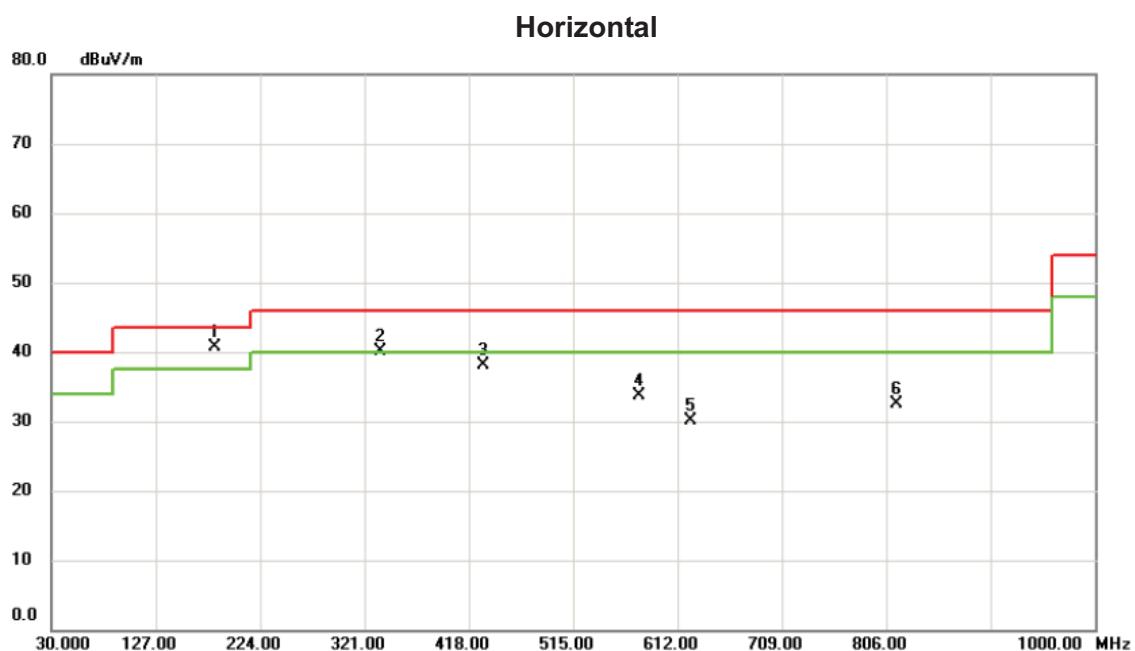

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	
1	*	182.2900	60.90	-20.24	40.66	43.50	-2.84	peak
2	!	335.5500	56.84	-16.71	40.13	46.00	-5.87	peak
3		431.5800	50.77	-12.76	38.01	46.00	-7.99	peak
4		576.1100	45.55	-11.88	33.67	46.00	-12.33	peak
5		623.6400	41.24	-11.05	30.19	46.00	-15.81	peak
6		815.7000	41.31	-8.83	32.48	46.00	-13.52	peak

Test Mode: TX 2480MHz

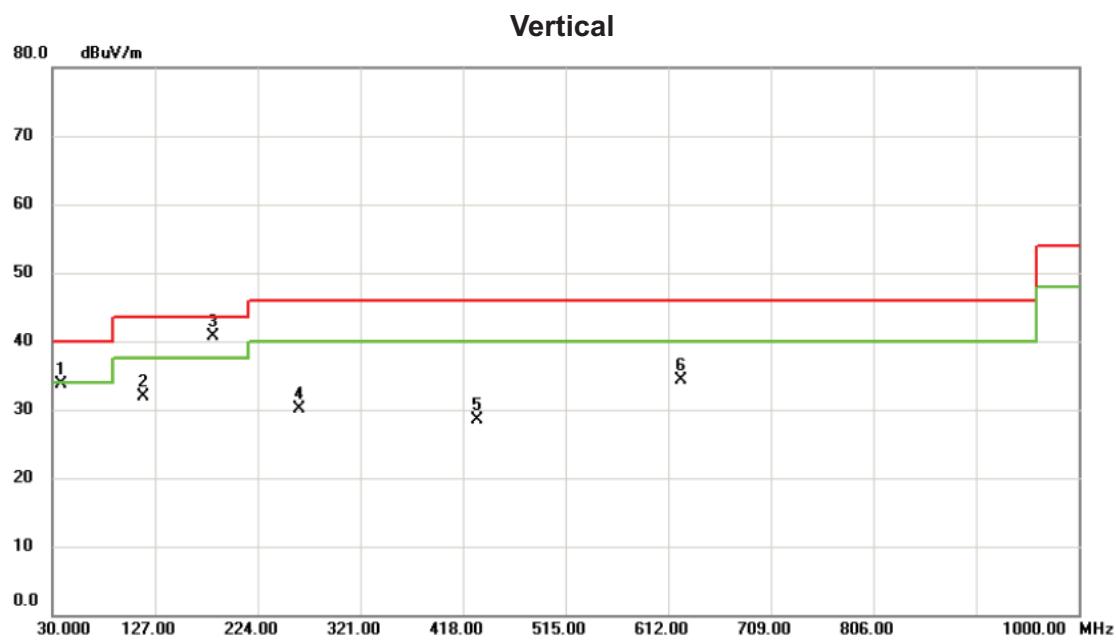

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Comment
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1		38.7300	55.97	-22.28	33.69	40.00	-6.31	peak
2		115.3600	53.16	-21.23	31.93	43.50	-11.57	peak
3	*	181.3200	58.12	-17.40	40.72	43.50	-2.78	peak
4		263.7700	49.32	-19.19	30.13	46.00	-15.87	peak
5		431.5800	43.04	-14.51	28.53	46.00	-17.47	peak
6		623.6400	43.63	-9.37	34.26	46.00	-11.74	peak

Test Mode: TX 2480MHz

Horizontal




No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dB			
1		115.3600	49.25	-22.71	26.54	43.50	-16.96	peak	
2	*	182.2900	60.90	-20.24	40.66	43.50	-2.84	peak	
3	!	335.5500	56.84	-16.71	40.13	46.00	-5.87	peak	
4		431.5800	50.77	-12.76	38.01	46.00	-7.99	peak	
5		576.1100	45.55	-11.88	33.67	46.00	-12.33	peak	
6		623.6400	41.24	-11.05	30.19	46.00	-15.81	peak	

ATTACHMENT D - RADIATED EMISSION (ABOVE 1000MHZ)

Orthogonal Axis : X


Test Mode : TX 2405MHz

Vertical

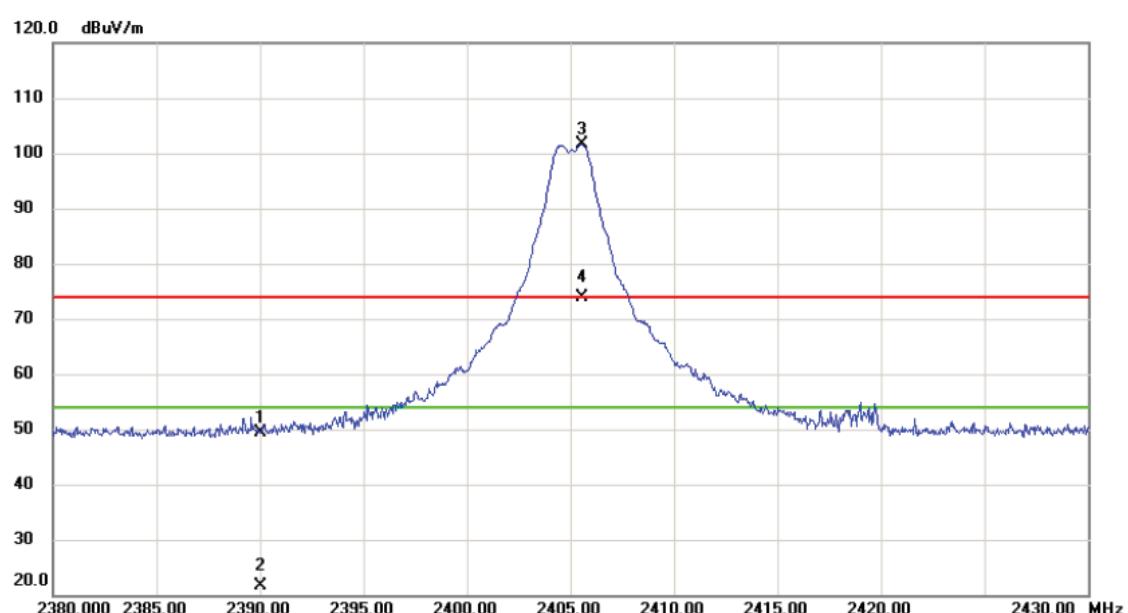

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	Detector	Comment
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dB			
1		2390.000	15.14	34.23	49.37	74.00	-24.63	peak	
2		2390.000	-12.56	34.23	21.67	54.00	-32.33	AVG	
3	*	2405.550	67.25	34.32	101.57	74.00	27.57	peak	No Limit
4	X	2405.550	39.56	34.32	73.88	54.00	19.88	AVG	No Limit


Orthogonal Axis :	X
Test Mode :	TX 2405MHz

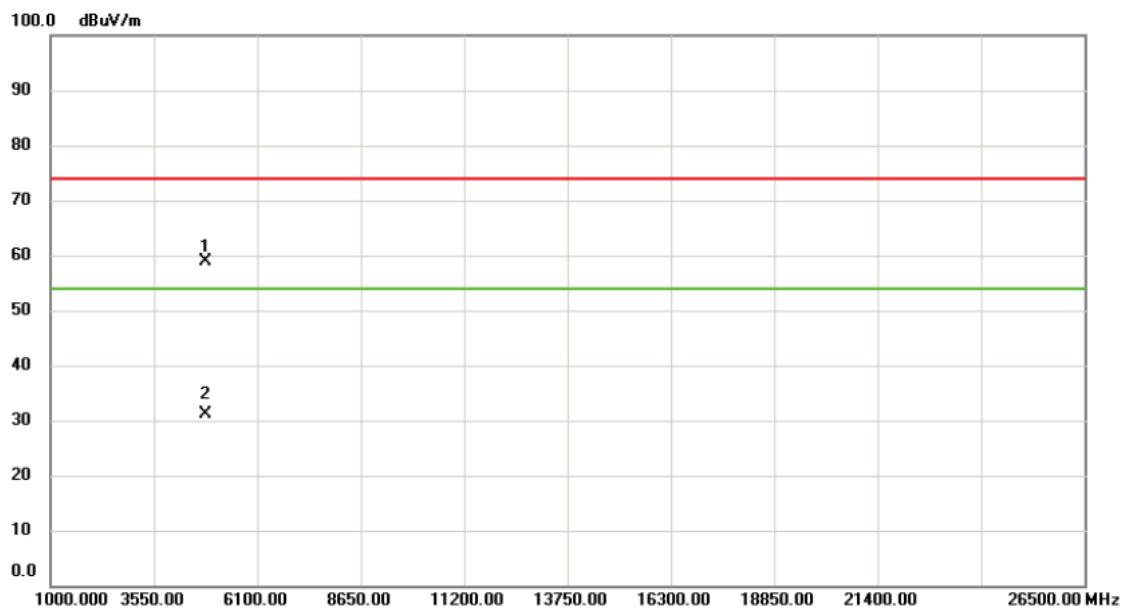Vertical

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	4811.050	55.93	3.00	58.93	74.00	-15.07	peak
2		4811.050	28.23	3.00	31.23	54.00	-22.77	AVG


Orthogonal Axis :	X
Test Mode :	TX 2405MHz

Horizontal

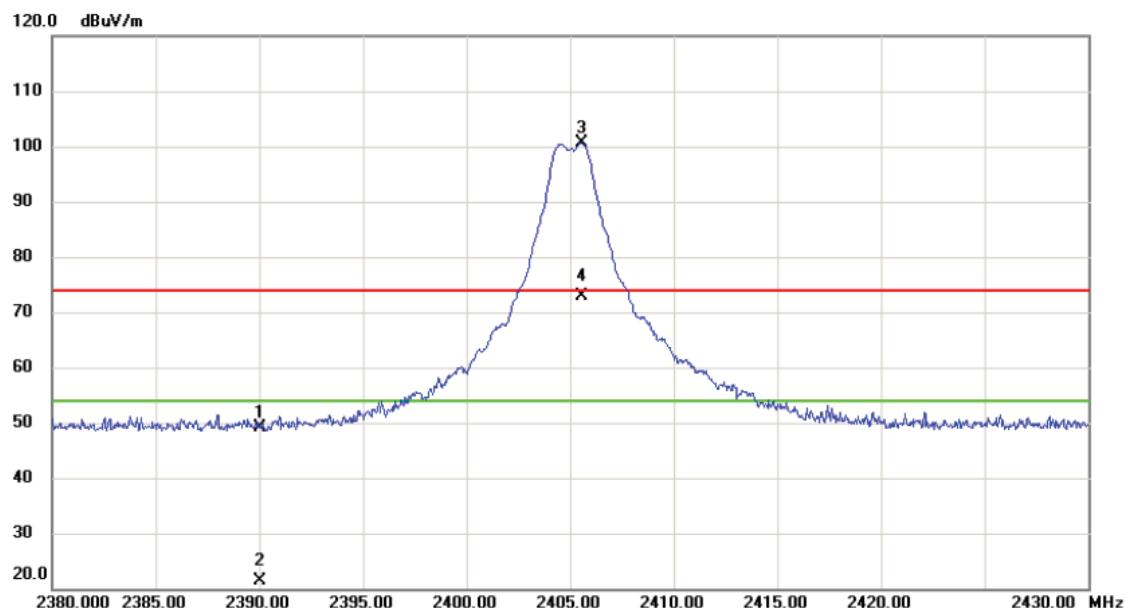

No.	Mk.	Reading		Correct Factor	Measure- ment	Limit	Margin	Detector	Comment
		MHz	dBuV						
1		2390.000	14.84	34.23	49.07	74.00	-24.93	peak	
2		2390.000	-12.86	34.23	21.37	54.00	-32.63	AVG	
3	*	2405.550	66.34	34.32	100.66	74.00	26.66	peak	No Limit
4	X	2405.550	38.64	34.32	72.96	54.00	18.96	AVG	No Limit

Orthogonal Axis :	X
Test Mode :	TX 2405MHz

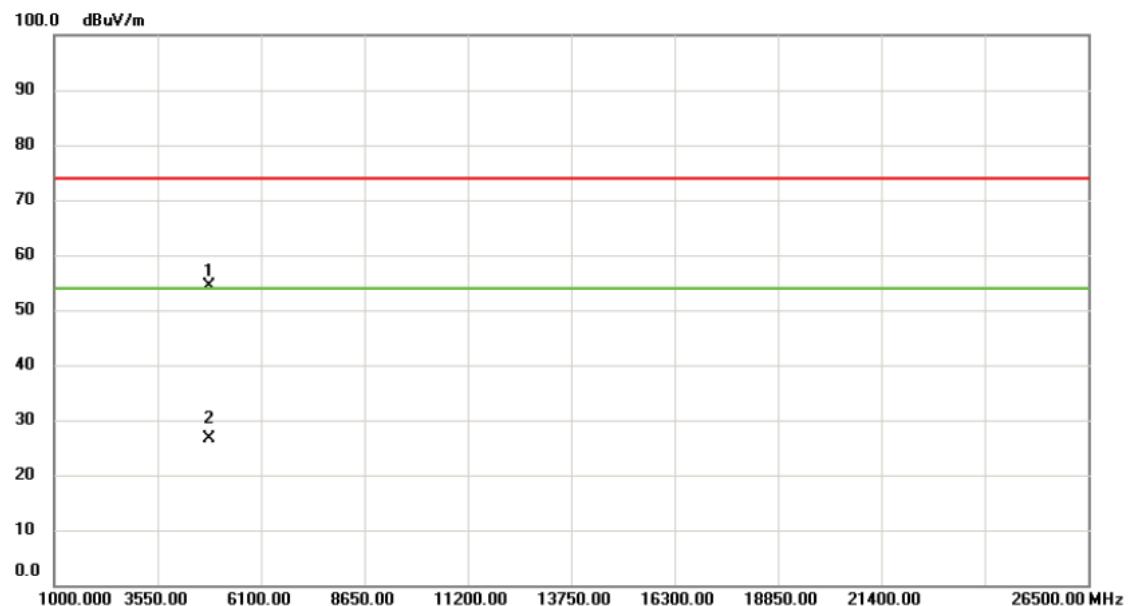
Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	4809.200	51.43	3.00	54.43	74.00	-19.57	peak
2		4809.200	23.73	3.00	26.73	54.00	-27.27	AVG

Orthogonal Axis : X


Test Mode : TX 2440MHz

Vertical

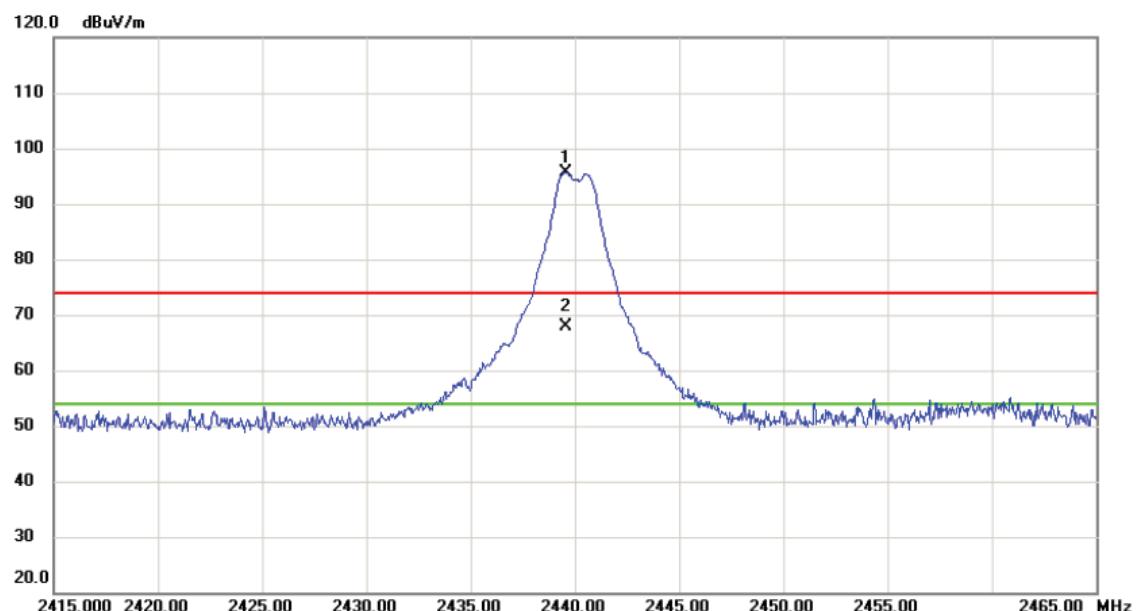


No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Margin		
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	2439.550	61.13	34.52	95.65	74.00	21.65	peak No Limit
2	X	2439.550	33.43	34.52	67.95	54.00	13.95	AVG No Limit

Orthogonal Axis :	X
Test Mode :	TX 2440MHz

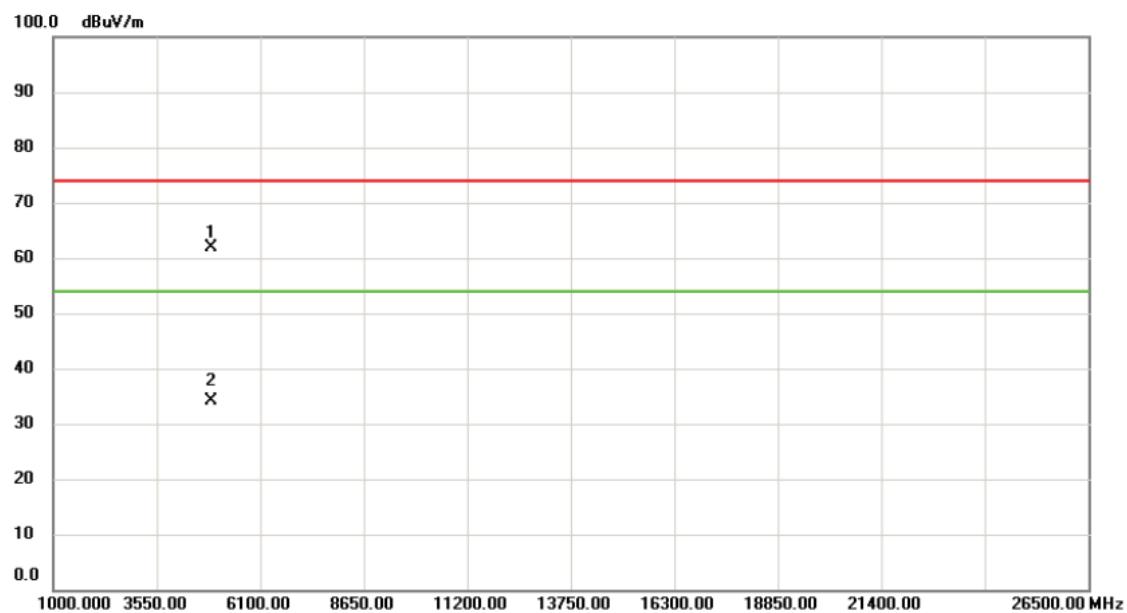Vertical


No.	Mk.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector
1	*	4879.000	58.87	3.02	61.89	74.00	-12.11
2		4879.000	31.17	3.02	34.19	54.00	-19.81
							peak
							AVG

Orthogonal Axis :	X
Test Mode :	TX 2440MHz

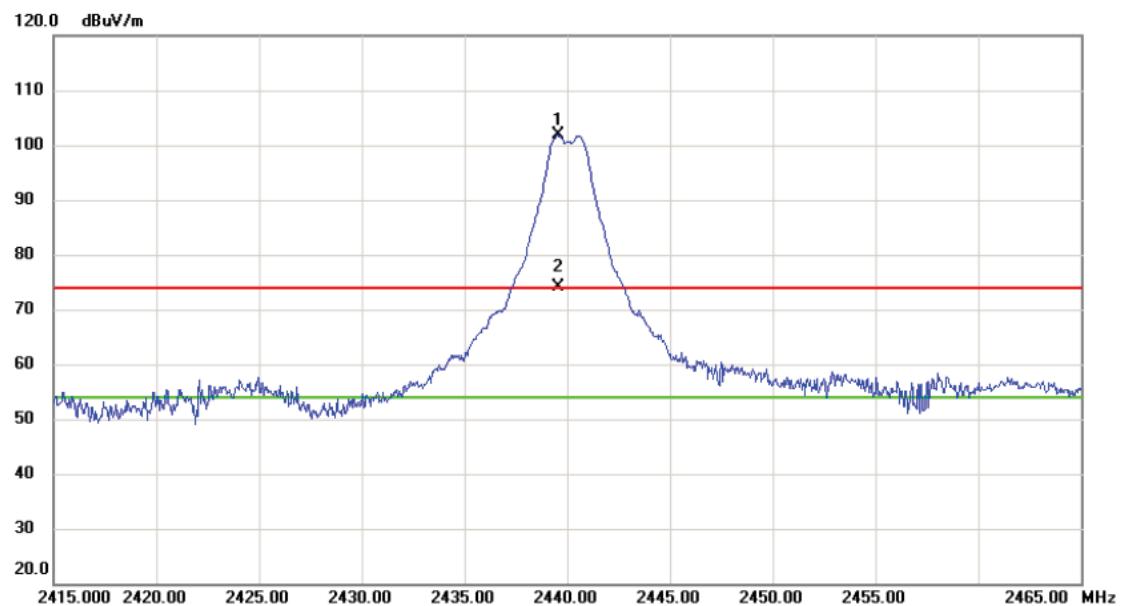Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dB _{uV}	dB	dB _{uV/m}	dB _{uV/m}	Detector	Comment
1	*	2439.550	67.26	34.52	101.78	74.00	27.78	peak No Limit
2	X	2439.550	39.56	34.52	74.08	54.00	20.08	AVG No Limit


Orthogonal Axis :	X
Test Mode :	TX 2440MHz

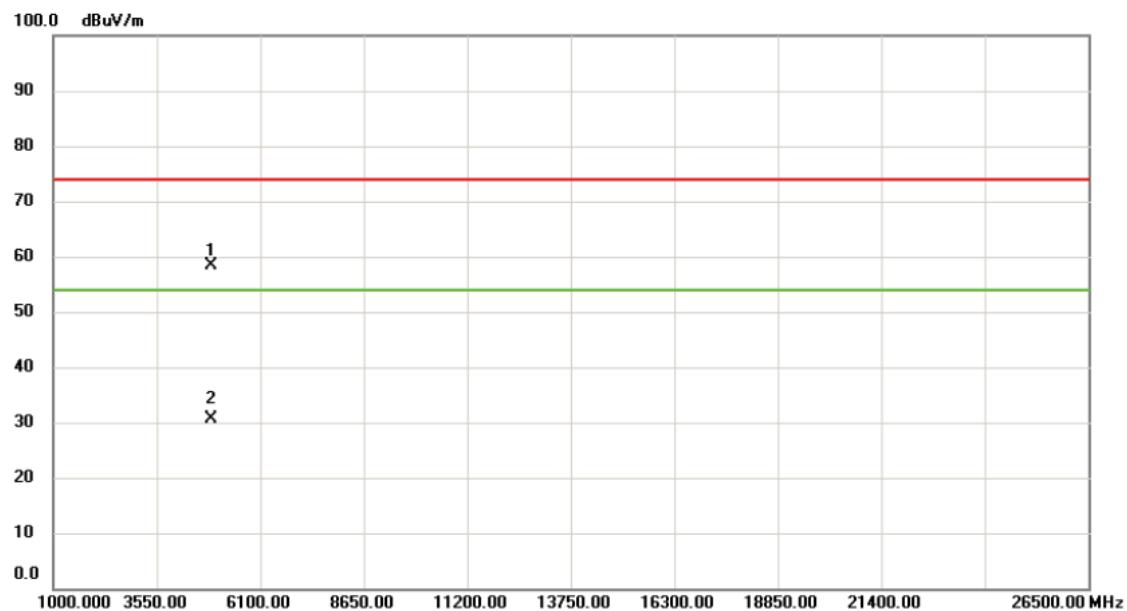Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	4879.000	55.43	3.02	58.45	74.00	-15.55	peak
2		4879.000	27.73	3.02	30.75	54.00	-23.25	AVG


Orthogonal Axis :	X
Test Mode :	TX 2480MHz

Vertical

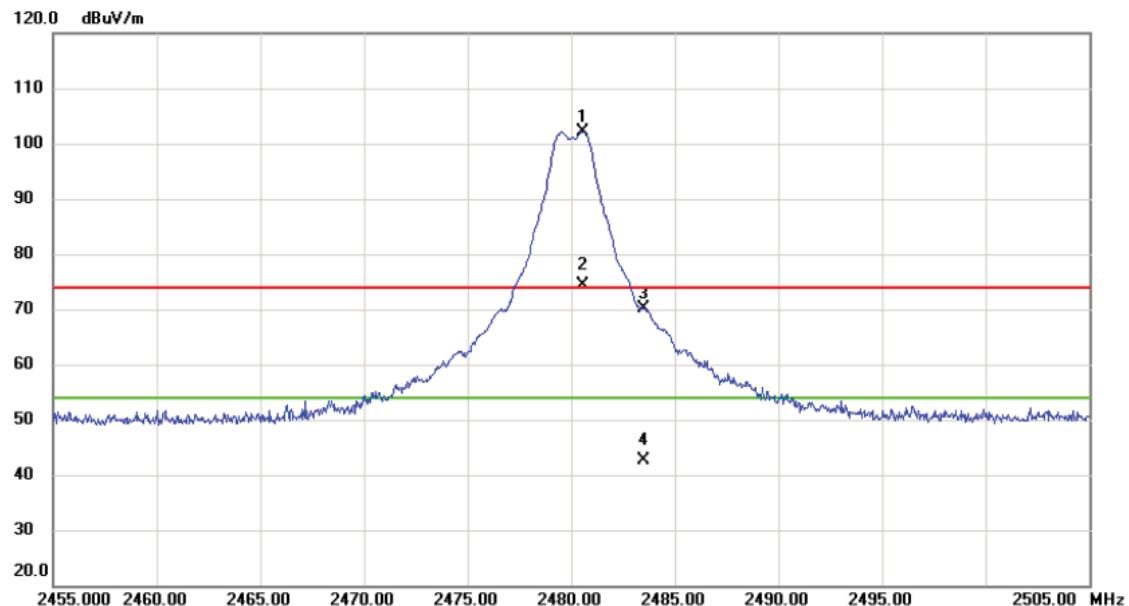

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB	Margin	Detector	Comment
1	*	2480.550	67.42	34.75	102.17	74.00	28.17	peak	No Limit
2	X	2480.550	39.72	34.75	74.47	54.00	20.47	AVG	No Limit
3		2483.500	35.43	34.78	70.21	74.00	-3.79	peak	
4		2483.500	7.73	34.78	42.51	54.00	-11.49	AVG	


Orthogonal Axis :	X
Test Mode :	TX 2480MHz

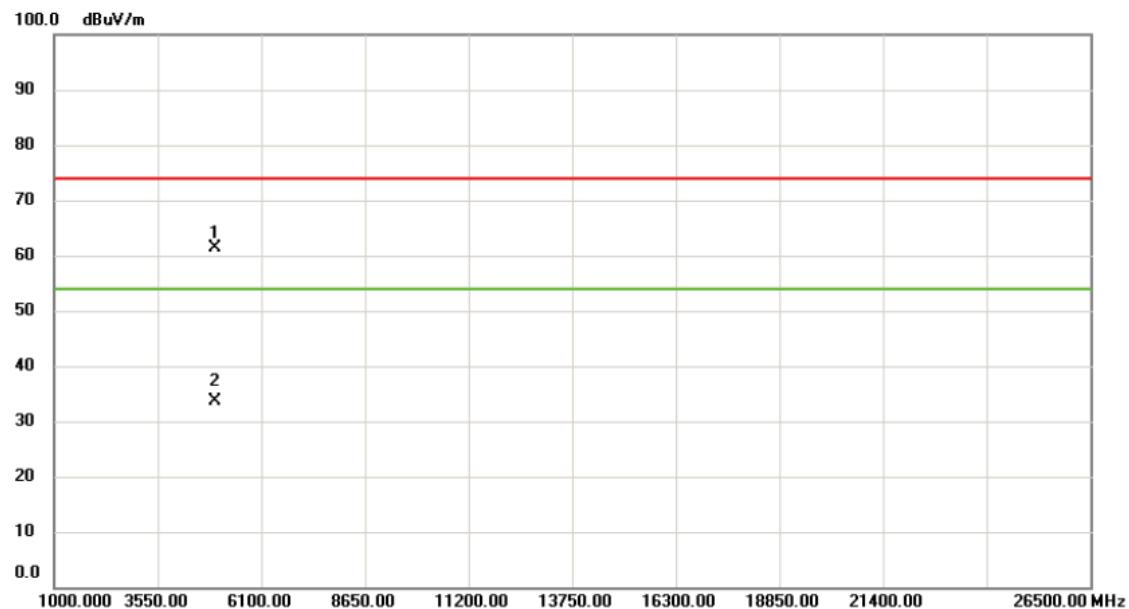Vertical

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin		
			Level	Factor	ment				
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4959.050	58.35	3.07	61.42	74.00	-12.58	peak	
2		4959.050	30.65	3.07	33.72	54.00	-20.28	AVG	

Orthogonal Axis : X

Test Mode : TX 2480MHz

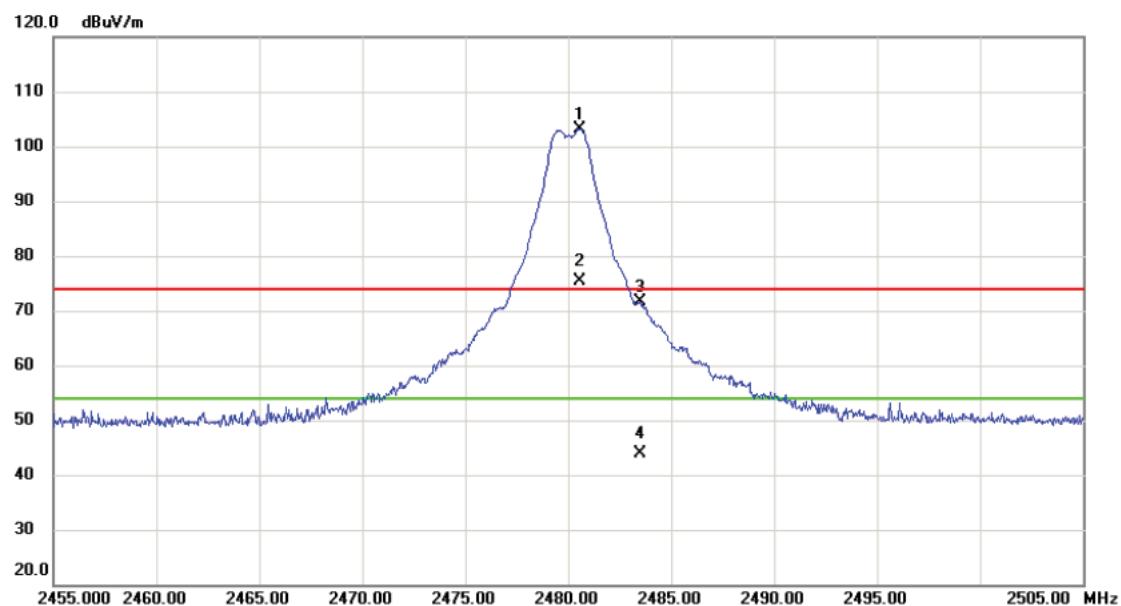Horizontal

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Margin	
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	2480.600	68.40	34.75	103.15	74.00	29.15	peak No Limit
2	X	2480.600	40.70	34.75	75.45	54.00	21.45	AVG No Limit
3		2483.500	36.78	34.78	71.56	74.00	-2.44	peak
4		2483.500	9.08	34.78	43.86	54.00	-10.14	AVG

Orthogonal Axis :	X
Test Mode :	TX 2480MHz

Horizontal


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
			Level	Factor	ment			
		MHz	dBuV	dB	dBuV/m	dB	Detector	Comment
1	*	4961.100	60.09	3.07	63.16	74.00	-10.84	peak
2		4961.100	32.39	3.07	35.46	54.00	-18.54	AVG

ATTACHMENT E - BANDWIDTH

Test Mode : CH01, CH08 , CH16


Frequency (MHz)	6dB Bandwidth (MHz)	99% Occupied BW (MHz)	Min. Limit (kHz)	Test Result
2405	1.49	2.44	500	Complies
2440	1.48	2.48	500	Complies
2480	1.36	2.40	500	Complies

TX CH01

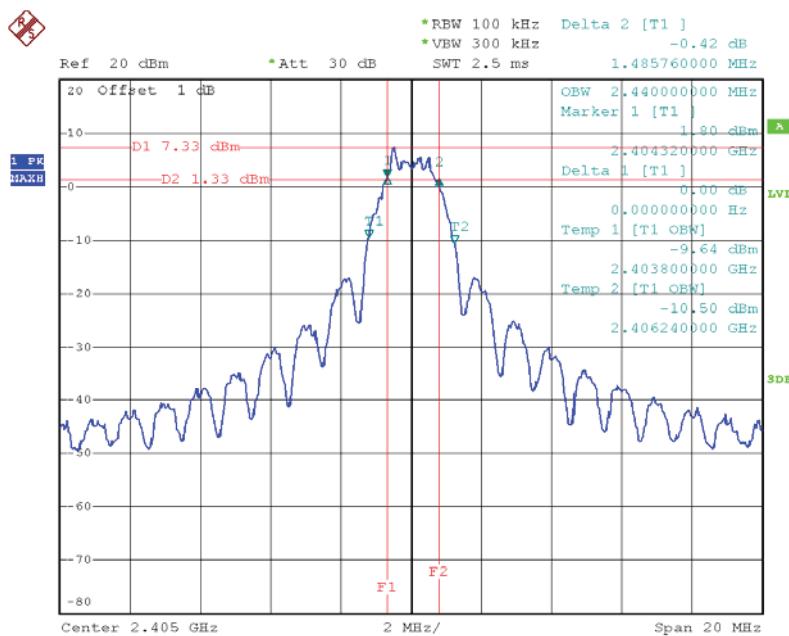


Date: 29.NOV.2015 12:08:58

TX CH08

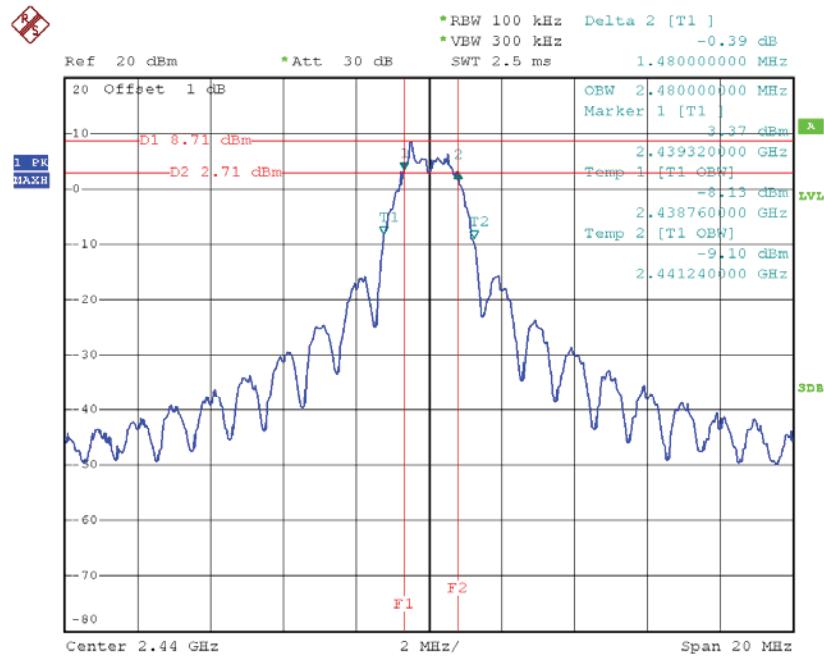

Date: 29.NOV.2015 12:43:41

TX CH16

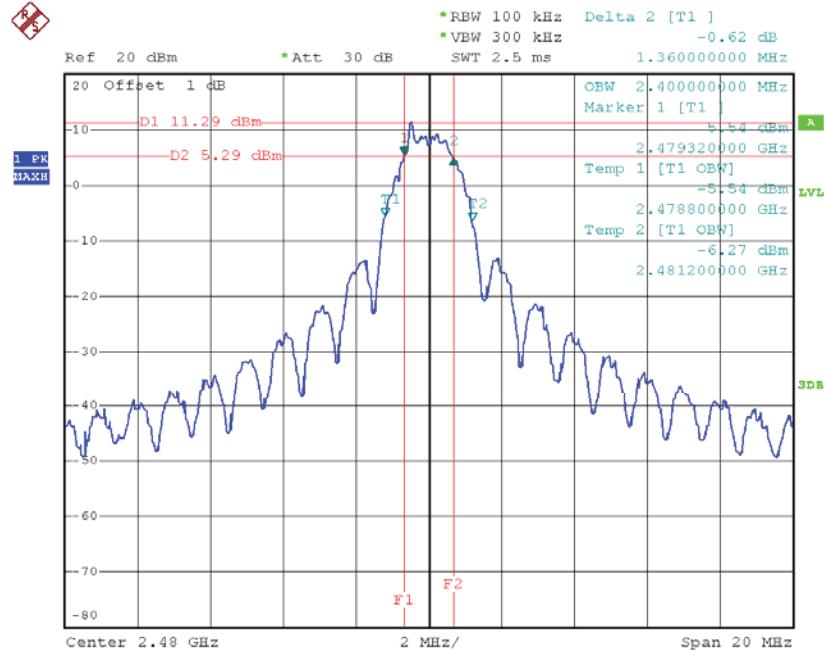

Date: 30.NOV.2015 15:25:39

ATTACHMENT F - MAXIMUM OUTPUT POWER TEST


Test Mode :	CH01, CH08 , CH16
-------------	-------------------

Frequency (MHz)	PK Conducted Power (dBm)	PK Conducted Power(Watt)	Max. Limit (dBm)	Max. Limit (Watt)	Test Result
2405	10.24	0.0106	30.00	1.00	Complies
2440	11.58	0.0144	30.00	1.00	Complies
2480	12.83	0.0192	30.00	1.00	Complies

ATTACHMENT G - ANTENNA CONDUCTED SPURIOUS EMISSION


Test Mode : CH01, CH08 , CH16

CH01 (Lower)

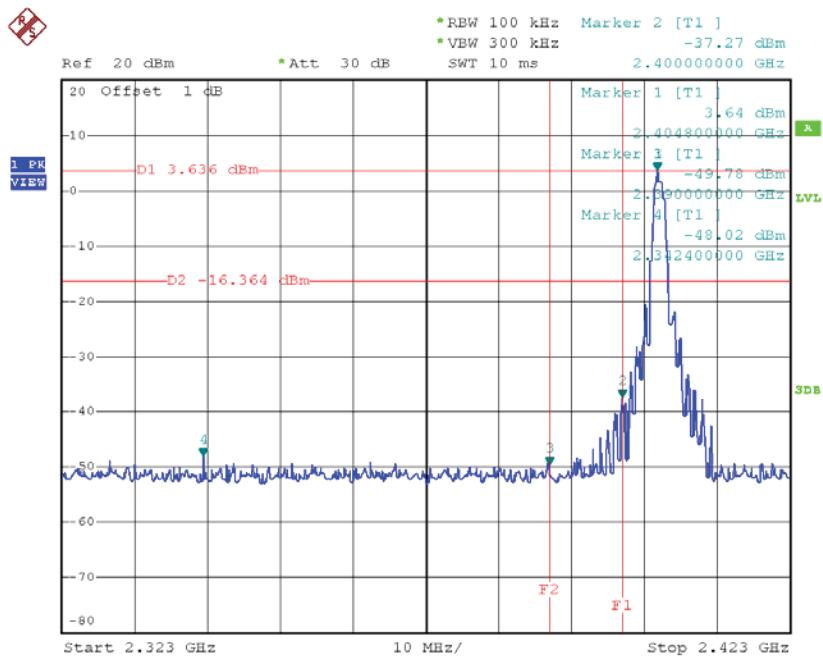


Date: 29.NOV.2015 12:23:13


CH16 (upper)

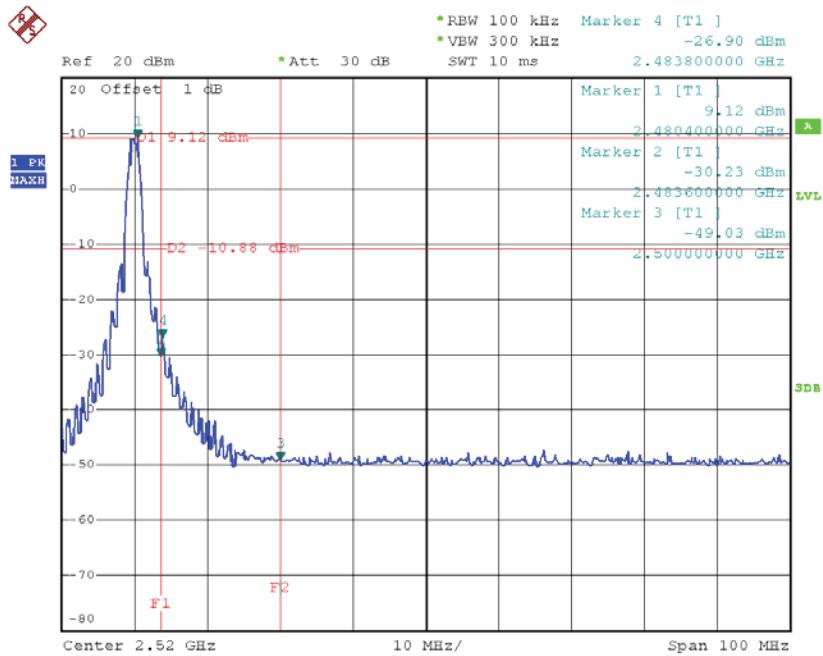

Date: 30.NOV.2015 15:33:03

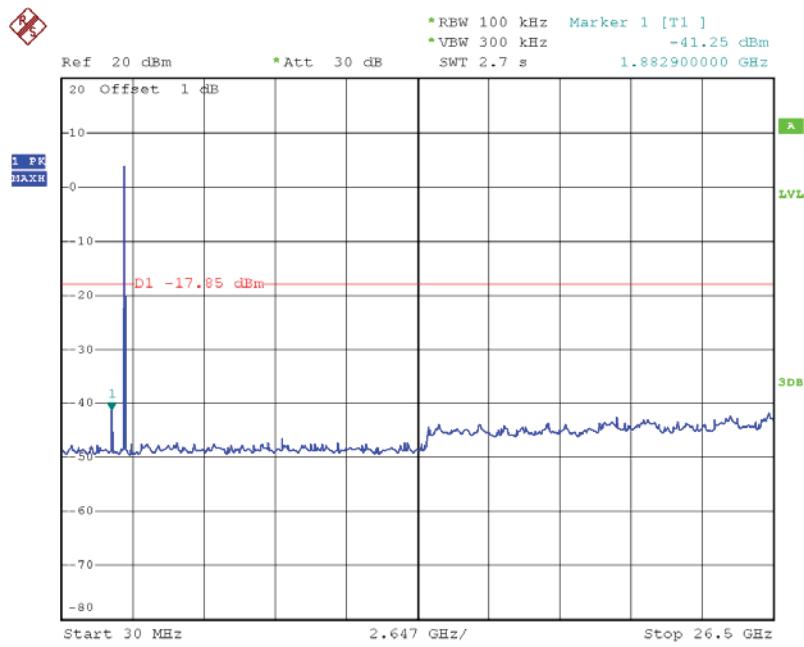
CH01 (10 Harmonic of the frequency)

Date: 29.NOV.2015 12:15:46

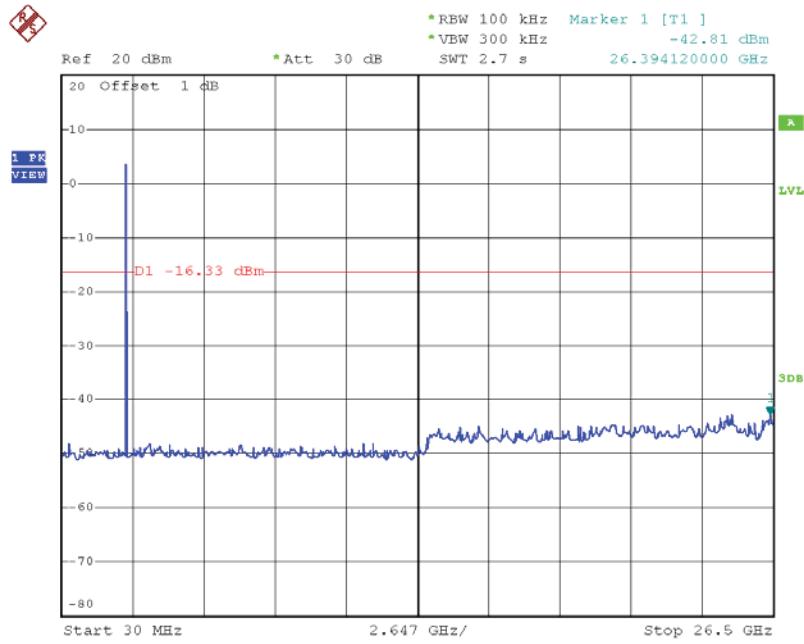CH08 (10 Harmonic of the frequency)

Date: 29.NOV.2015 12:50:41

CH16 (10 Harmonic of the frequency)

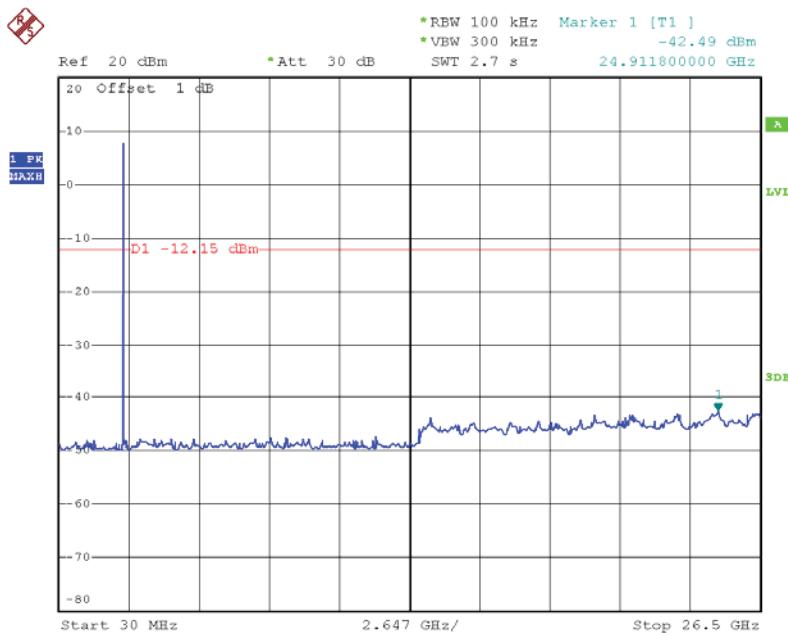


Date: 30.NOV.2015 15:29:27

ATTACHMENT H - POWER SPECTRAL DENSITY TEST

Test Mode : CH01, CH08 , CH16


Frequency (MHz)	Power Density (dBm)	Max. Limit (dBm)	Result
2405	-6.68	8	Complies
2440	-4.85	8	Complies
2480	-1.64	8	Complies

TX CH01

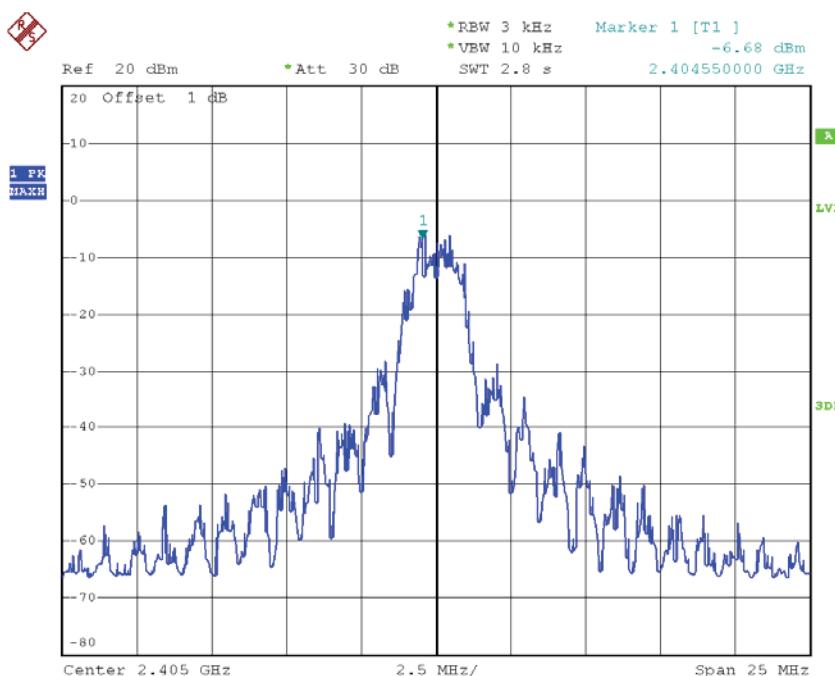


Date: 29.NOV.2015 12:31:24

TX CH08

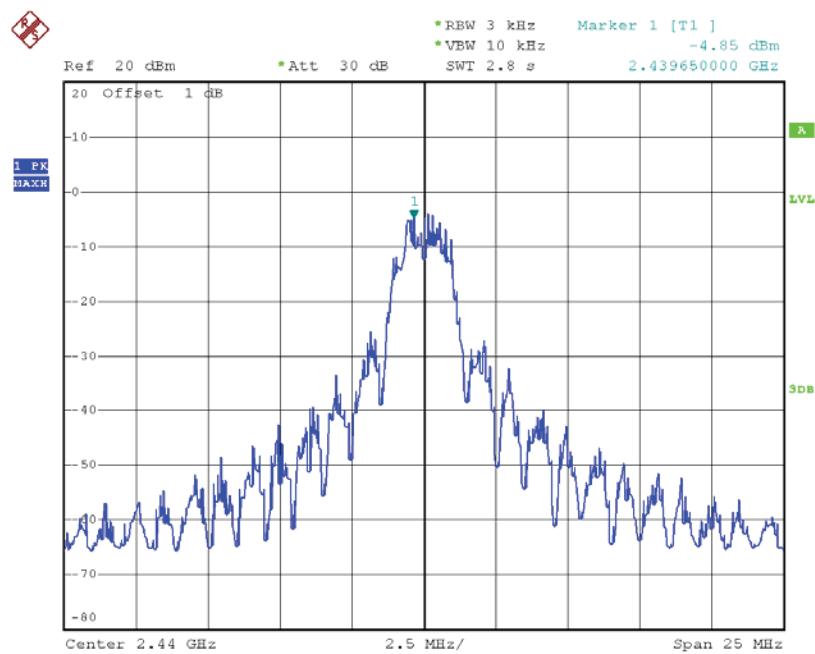

Date: 29.NOV.2015 11:26:49

TX CH16

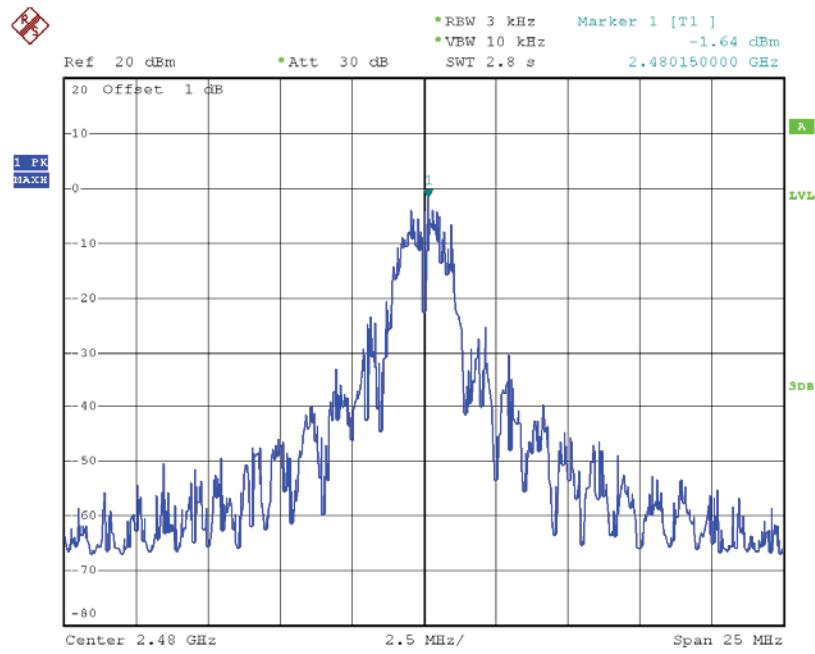

Date: 30.NOV.2015 15:35:04