

## Appendix C for KSCR221200236801

## Calibration Certificate

| Object | Apply                               | No | Model   | SN    | Calibration Date |
|--------|-------------------------------------|----|---------|-------|------------------|
| Dipole | <input type="checkbox"/>            | 1  | CLA150  | 4025  | 2021/04/26       |
|        | <input type="checkbox"/>            | 2  | D450V3  | 1103  | 2021/04/21       |
|        | <input type="checkbox"/>            | 3  | D750V3  | 1188  | 2022/03/29       |
|        | <input type="checkbox"/>            | 4  | D835V2  | 4d114 | 2022/03/31       |
|        | <input type="checkbox"/>            | 5  | D900V2  | 1d079 | 2022/06/07       |
|        | <input type="checkbox"/>            | 6  | D1800V2 | 2d170 | 2022/03/31       |
|        | <input type="checkbox"/>            | 7  | D1900V2 | 5d136 | 2022/06/07       |
|        | <input type="checkbox"/>            | 8  | D2000V2 | 1041  | 2022/06/06       |
|        | <input type="checkbox"/>            | 9  | D2300V2 | 1096  | 2022/03/31       |
|        | <input checked="" type="checkbox"/> | 10 | D2450V2 | 817   | 2022/04/01       |
|        | <input type="checkbox"/>            | 11 | D2600V2 | 1158  | 2022/03/31       |
|        | <input checked="" type="checkbox"/> | 12 | D5GHzV2 | 1095  | 2022/06/01       |
| DAE    | <input checked="" type="checkbox"/> | 13 | DAE4    | 1245  | 2022/05/30       |
| Probe  | <input checked="" type="checkbox"/> | 14 | EX3DV4  | 7767  | 2022/10/28       |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

## 1 Dipole

## 1.1 CLA150 - SN 4025

| Calibration Laboratory of<br>Schmid & Partner<br>Engineering AG<br>Zeughausstrasse 43, 8004 Zurich, Switzerland                                                                                                                                                               |                       | S Schweizerischer Kalibrierdienst<br>Service suisse d'étalonnage<br>C Servizio svizzero di taratura<br>S Swiss Calibration Service |                       |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Accredited by the Swiss Accreditation Service (SAS)<br>The Swiss Accreditation Service is one of the signatories to the EA<br>Multilateral Agreement for the recognition of calibration certificates                                                                          |                       | Accreditation No.: SCS 0108                                                                                                        |                       |
| Client: SGS-CN (Auden)                                                                                                                                                                                                                                                        |                       | Certificate No: CLA150-4025_Apr21                                                                                                  |                       |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                |                       |                                                                                                                                    |                       |
| Object: CLA150 - SN: 4025                                                                                                                                                                                                                                                     |                       |                                                                                                                                    |                       |
| Calibration procedure(s): QA CAL-15-v9<br>Calibration Procedure for SAR Validation Sources below 700 MHz                                                                                                                                                                      |                       |                                                                                                                                    |                       |
| Calibration date: April 26, 2021                                                                                                                                                                                                                                              |                       |                                                                                                                                    |                       |
| This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br>The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                       |                                                                                                                                    |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature $22 \pm 3^\circ\text{C}$ and humidity $< 70\%$ .                                                                                                                              |                       |                                                                                                                                    |                       |
| Calibration Equipment used (M&E critical for calibration)                                                                                                                                                                                                                     |                       |                                                                                                                                    |                       |
| Primary Standards                                                                                                                                                                                                                                                             | ID #                  | Cal Date (Certificate No.)                                                                                                         | Scheduled Calibration |
| Power meter NRP                                                                                                                                                                                                                                                               | SN: 10476             | 09-Apr-21 (No. 217-03201/03202)                                                                                                    | Apr-22                |
| Power sensor NRP Z91                                                                                                                                                                                                                                                          | SN: 100344            | 09-Apr-21 (No. 217-03201)                                                                                                          | Apr-22                |
| Power sensor NRP Z91                                                                                                                                                                                                                                                          | SN: 100345            | 09-Apr-21 (No. 217-03202)                                                                                                          | Apr-22                |
| Reference 20 dB Attenuator                                                                                                                                                                                                                                                    | SN: C22862 (20dB)     | 09-Apr-21 (No. 217-03343)                                                                                                          | Apr-22                |
| Type-N mismatch combination                                                                                                                                                                                                                                                   | SN: 310952 / 00357    | 09-Apr-21 (No. 217-03344)                                                                                                          | Apr-22                |
| Reference Probe EX300NA                                                                                                                                                                                                                                                       | SN: 3877              | 30-Dec-20 (No. C3X3077_Dec20)                                                                                                      | Dec-21                |
| EX44                                                                                                                                                                                                                                                                          | SN: 684               | 26-Jun-20 (No. D458-658_Jun20)                                                                                                     | Jun-21                |
| Secondary Standards                                                                                                                                                                                                                                                           | ID #                  | Check Date (in house)                                                                                                              | Scheduled Check       |
| Power meter S44135                                                                                                                                                                                                                                                            | SN: G841203074        | 06-Apr-15 (in house check Jun-20)                                                                                                  | In house check Jun-22 |
| Power sensor E4113A                                                                                                                                                                                                                                                           | SN: MY4149067         | 06-Apr-15 (in house check Jun-20)                                                                                                  | In house check Jun-22 |
| Power sensor E4113A                                                                                                                                                                                                                                                           | SN: 00010010          | 06-Apr-15 (in house check Jun-20)                                                                                                  | In house check Jun-22 |
| RF generator HP 8440D                                                                                                                                                                                                                                                         | SN: US4840107109      | 04-Aug-09 (in house check Jun-20)                                                                                                  | In house check Jun-21 |
| Network Analyser Agilent E8363A                                                                                                                                                                                                                                               | SN: US41000477        | 31-Mar-14 (in house check Oct-20)                                                                                                  | In house check Oct-21 |
| Calibrated by:                                                                                                                                                                                                                                                                | Name: Jeffrey Katsman | Function: Laboratory Technician                                                                                                    | Signature:            |
| Approved by:                                                                                                                                                                                                                                                                  | Name: Kaja Polovic    | Function: Technical Manager                                                                                                        | Signature:            |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                               |                       |                                                                                                                                    |                       |
| Issued: April 26, 2021                                                                                                                                                                                                                                                        |                       |                                                                                                                                    |                       |
| Certificate No: CLA150-4025_Apr21                                                                                                                                                                                                                                             |                       | Page 1 of 6                                                                                                                        |                       |

| Calibration Laboratory of<br>Schmid & Partner<br>Engineering AG<br>Zeughausstrasse 43, 8004 Zurich, Switzerland                                                                                                                       |                                 | S Schweizerischer Kalibrierdienst<br>Service suisse d'étalonnage<br>C Servizio svizzero di taratura<br>S Swiss Calibration Service |  |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------|--|
| Accredited by the Swiss Accreditation Service (SAS)<br>The Swiss Accreditation Service is one of the signatories to the EA<br>Multilateral Agreement for the recognition of calibration certificates                                  |                                 | Accreditation No.: SCS 0108                                                                                                        |  |
| <b>Glossary:</b>                                                                                                                                                                                                                      |                                 |                                                                                                                                    |  |
| TSL                                                                                                                                                                                                                                   | Issue simulating liquid         |                                                                                                                                    |  |
| ConvF                                                                                                                                                                                                                                 | sensitivity in TSL / NORM x,y,z |                                                                                                                                    |  |
| N/A                                                                                                                                                                                                                                   | not applicable or not measured  |                                                                                                                                    |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                 |                                 |                                                                                                                                    |  |
| a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Technique", June 2013                  |                                 |                                                                                                                                    |  |
| b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016                            |                                 |                                                                                                                                    |  |
| c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010                             |                                 |                                                                                                                                    |  |
| d) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                    |                                 |                                                                                                                                    |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                      |                                 |                                                                                                                                    |  |
| e) DASY4/5 System Handbook                                                                                                                                                                                                            |                                 |                                                                                                                                    |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                              |                                 |                                                                                                                                    |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                  |                                 |                                                                                                                                    |  |
| • <b>Antenna Parameters with TSL:</b> The source is mounted in a touch configuration below the center marking of the flat phantom.                                                                                                    |                                 |                                                                                                                                    |  |
| • <b>Return Loss:</b> This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required. |                                 |                                                                                                                                    |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                |                                 |                                                                                                                                    |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                               |                                 |                                                                                                                                    |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                    |                                 |                                                                                                                                    |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.       |                                 |                                                                                                                                    |  |
| Certificate No: CLA150-4025_Apr21                                                                                                                                                                                                     |                                 | Page 2 of 6                                                                                                                        |  |

| Measurement Conditions                                    |                              |                                  |
|-----------------------------------------------------------|------------------------------|----------------------------------|
| DASY system configuration, as far as not given on page 1. |                              |                                  |
| DASY Version                                              | DASY5                        | V52.10.4                         |
| Extrapolation                                             | Advanced Extrapolation       |                                  |
| Phantom                                                   | ELIA Flat Phantom            | Shell thickness: $2 \pm 0.2$ mm  |
| EUT Positioning                                           | Touch Position               |                                  |
| Zoom Scan Resolution                                      | dx, dy = 4.0 mm, dz = 1.4 mm | Graded Ratio = 1.4 (Z direction) |
| Frequency                                                 | 150 MHz $\pm$ 1 MHz          |                                  |


| Head TSL parameters                                     |                                |                |                        |
|---------------------------------------------------------|--------------------------------|----------------|------------------------|
| The following parameters and calculations were applied. |                                |                |                        |
|                                                         | Temperature                    | Permittivity   | Conductivity           |
| Nominal Head TSL parameters                             | $22.0^\circ\text{C}$           | 52.3           | 0.75 mho/m             |
| Measured Head TSL parameters                            | $(22.0 \pm 0.2)^\circ\text{C}$ | $51.1 \pm 6\%$ | $0.75$ mho/m $\pm 6\%$ |
| Head TSL temperature change during test                 | $< 0.5^\circ\text{C}$          | ---            | ---                    |

| SAR result with Head TSL                              |                  |                                     |
|-------------------------------------------------------|------------------|-------------------------------------|
| SAR averaged over $1\text{ cm}^3$ (1 g) of Head TSL   | Condition        |                                     |
| SAR measured                                          | 1 W input power  | 3.90 W/kg                           |
| SAR for nominal Head TSL parameters                   | normalized to 1W | $3.88\text{ W/kg} \pm 19.4\%$ (k=2) |
| SAR averaged over $10\text{ cm}^3$ (10 g) of Head TSL | condition        |                                     |
| SAR measured                                          | 1 W input power  | 2.60 W/kg                           |
| SAR for nominal Head TSL parameters                   | normalized to 1W | $2.59\text{ W/kg} \pm 18.0\%$ (k=2) |

| Appendix (Additional assessments outside the scope of SCS 0108) |                            |
|-----------------------------------------------------------------|----------------------------|
| <b>Antenna Parameters with Head TSL</b>                         |                            |
| Impedance, transformed to feed point                            | $47.9\Omega \pm 1.5\Omega$ |
| Return Loss                                                     | $-31.4\text{ dB}$          |
| <b>Additional EUT Data</b>                                      |                            |
| Manufactured by                                                 | SPLEAG                     |

Certificate No: CLA150-4025\_Apr21 Page 3 of 6

Certificate No: CLA150-4025\_Apr21 Page 4 of 6

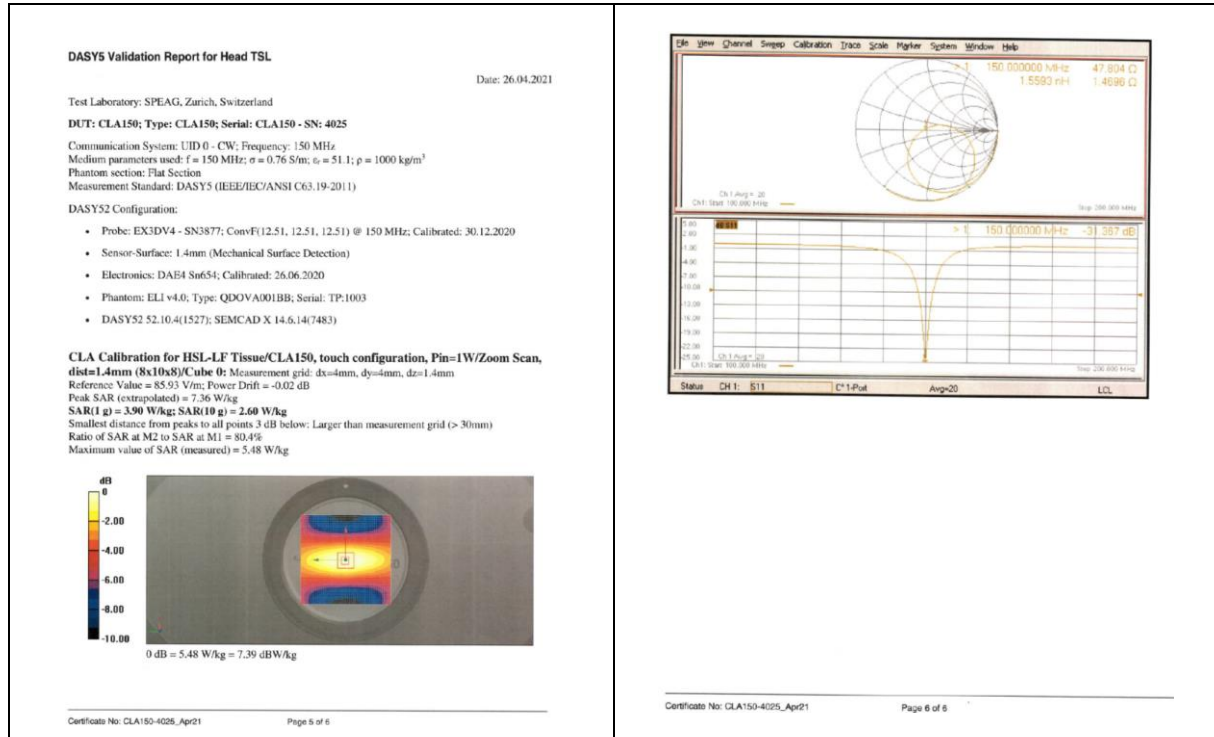

## 1.2 D450V3 - SN 1103

**Calibration Laboratory of Schmid & Partner Engineering AG**  
Zugstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **SGS-CN (Aude)** Certificate No: **D450V3-1103\_Apr21**

**CALIBRATION CERTIFICATE**

Object: **D450V3 - SN: 1103**

Calibration procedure(s): **QA CAL-15-v9**  
Calibration Procedure for SAR Validation Sources below 700 MHz

Calibration date: **April 21, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (20 ± 2) °C and humidity < 70%.

Calibration Equipment used (MPE critical for calibration)

| Primary Standards           | ID #               | Cal Date (Certificate No.)      | Scheduled Calibration |
|-----------------------------|--------------------|---------------------------------|-----------------------|
| Power meter NRP             | SN: 104778         | 09-Apr-21 (No. 217-03021/03020) | Apr-22                |
| Power sensor NRP-Z91        | SN: 102844         | 09-Apr-21 (No. 217-03021)       | Apr-22                |
| Power sensor NRP-Z91        | SN: 102845         | 09-Apr-21 (No. 217-03020)       | Apr-22                |
| Reference 20 dB Attenuator  | SN: CG2852 (200)   | 09-Apr-21 (No. 217-03345)       | Apr-22                |
| Type-N mismatch combination | SN: 310852 / 06327 | 09-Apr-21 (No. 217-03344)       | Apr-22                |
| Reference Probe EX3DV4      | SN: 3877           | 30-Dec-20 (No. EX3-2077 Dec20)  | Dec-21                |
| DA84                        | SN: 654            | 26-Jun-20 (No. DA84-654-Jun20)  | Jun-21                |

Secondary Standards

| ID #                            | Check Date (in house)             | Scheduled Check       |
|---------------------------------|-----------------------------------|-----------------------|
| Power meter E4418B              | 06-Apr-16 (in house check Jun-20) | In house check Jun-22 |
| Power sensor E4412A             | 06-Apr-16 (in house check Jun-20) | In house check Jun-22 |
| Power sensor E4412A             | 06-Apr-16 (in house check Jun-20) | In house check Jun-22 |
| RF generator HP 8448C           | 06-Aug-19 (in house check Jun-20) | In house check Jun-22 |
| Network Analyzer Agilent E8358A | 31-Mar-14 (in house check Oct-20) | In house check Oct-21 |

Calibrated by: **Christoph Leubner** Function: **Laboratory Technician**

Approved by: **Kelly Polovic** Technical Manager

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D450V3-1103\_Apr21 Page 1 of 6

**Calibration Laboratory of Schmid & Partner Engineering AG**  
Zugstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No: **SCS 0106**

**Glossary:**

TSL: Issue simulating liquid sensitivity in TSL / NORM x,y,z

ConvF: not applicable or not measured

N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEC 61010-1:2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

- DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D450V3-1103\_Apr21 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weyue Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

| Measurement Conditions                                    |                        |                             |
|-----------------------------------------------------------|------------------------|-----------------------------|
| DASY system configuration, as far as not given on page 1. |                        |                             |
| DASY Version                                              | DASY5                  | V62.10.4                    |
| Extrapolation                                             | Advanced Extrapolation |                             |
| Phantom                                                   | ELJ Flat Phantom       | Shell thickness: 2 ± 0.2 mm |
| Distance Dipole Center - TSL                              | 15 mm                  | with Spacer                 |
| Zoom Scan Resolution                                      | dx, dy, dz = 5 mm      |                             |
| Frequency                                                 | 450 MHz ± 1 MHz        |                             |

| Head TSL parameters                                     |                 |              |                  |
|---------------------------------------------------------|-----------------|--------------|------------------|
| The following parameters and calculations were applied: |                 |              |                  |
|                                                         | Temperature     | Permittivity | Conductivity     |
| Nominal Head TSL parameters                             | 22.0 °C         | 43.5         | 0.57 mho/m       |
| Measured Head TSL parameters                            | (22.0 ± 0.2) °C | 43.1 ± 6 %   | 0.07 mho/m ± 8 % |
| Head TSL temperature change during test                 | < 0.5 °C        | ---          | ---              |

| SAR result with Head TSL                              |                    |                          |
|-------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition          |                          |
| SAR measured                                          | 250 mW input power | 1.14 W/kg                |
| SAR for nominal Head TSL parameters                   | normalized to 1W   | 4.56 W/kg ± 18.1 % (k=2) |

| SAR result with Head TSL                                |                    |                          |
|---------------------------------------------------------|--------------------|--------------------------|
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition          |                          |
| SAR measured                                            | 250 mW input power | 0.757 W/kg               |
| SAR for nominal Head TSL parameters                     | normalized to 1W   | 3.06 W/kg ± 17.6 % (k=2) |

| Appendix (Additional assessments outside the scope of SCS 0106) |                 |  |
|-----------------------------------------------------------------|-----------------|--|
| Antenna Parameters with Head TSL                                |                 |  |
| Impedance, transformed to feed point                            | 57.1 Ω - 2.8 jΩ |  |
| Return Loss                                                     | -23.0 dB        |  |

| General Antenna Parameters and Design |          |
|---------------------------------------|----------|
| Electrical Delay (one direction)      | 1.346 ns |

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when twisted according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

| Additional EUT Data |       |
|---------------------|-------|
| Manufactured by     | SPEAG |

Certificate No: D450V3-1103\_Apr21 Page 3 of 6

Certificate No: D450V3-1103\_Apr21 Page 4 of 6

Certificate No: D450V3-1103\_Apr21 Page 3 of 6

Date: 21.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1103

Communication System: UID 0 - CW; Frequency: 450 MHz

Medium parameters used:  $f = 450$  MHz,  $\alpha = 0.87$  S/m;  $\epsilon_r = 43.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY5 (IEC/IEC/ANSI C63.19-2011)

DASY52 Configuration:

- Probe: EX3DV4 - SN3877; ConvF(10.64, 10.64) @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 26.06.2020
- Phantom: ELJ v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 39.18 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.767 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid


Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 1.53 W/kg

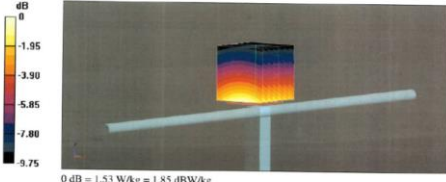

0 dB = 1.53 W/kg = 1.85 dBW/kg

Certificate No: D450V3-1103\_Apr21 Page 5 of 6

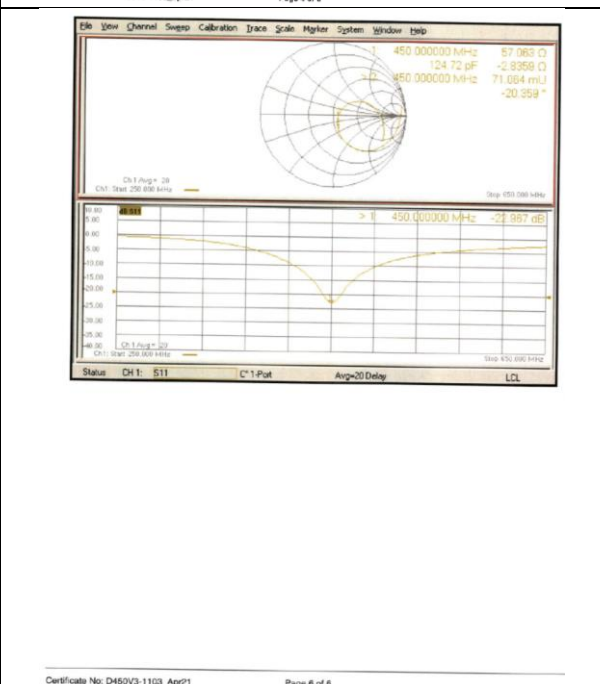

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.3 D750V3 - SN 1188

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            | CAICT                                                                                                                                                                          |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------|------|-------------------------------------------|-----------------------|-------------------------|------------|-------------------------------|--------|-------------------------|------------|-------------------------------|--------|------------------------|---------|------------------------------------|--------|------|---------|------------------------------------|--------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                           |            | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Client: <b>SGS-CN</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            | Certificate No: <b>Z22-60103</b>                                                                                                                                               |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Object: <b>D750V3 - SN: 1188</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Calibration Procedure(s): <b>FF-Z11-003-01</b><br>Calibration Procedures for dipole validation kits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Calibration date: <b>March 28, 2022</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                               |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by: Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>104277</td><td>24-Sep-21 (CTTL No.J21X08328)</td><td>Sep-22</td></tr><tr><td>Power sensor NRP88</td><td>104291</td><td>24-Sep-21 (CTTL No.J21X08328)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX30V4</td><td>SN 7307</td><td>26-May-21(SPEAG No EX3-7307_May21)</td><td>May-22</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22(CTTL-SPEAG No Z22-60007)</td><td>Jan-23</td></tr></tbody></table> |            |                                                                                                                                                                                |                       | Primary Standards   | ID # | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration | Power Meter NRP2        | 104277     | 24-Sep-21 (CTTL No.J21X08328) | Sep-22 | Power sensor NRP88      | 104291     | 24-Sep-21 (CTTL No.J21X08328) | Sep-22 | Reference Probe EX30V4 | SN 7307 | 26-May-21(SPEAG No EX3-7307_May21) | May-22 | DAE4 | SN 1556 | 12-Jan-22(CTTL-SPEAG No Z22-60007) | Jan-23 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ID #       | Cal Date (Calibrated by: Certificate No.)                                                                                                                                      | Scheduled Calibration |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 104277     | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Power sensor NRP88                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 104291     | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Reference Probe EX30V4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | SN 7307    | 26-May-21(SPEAG No EX3-7307_May21)                                                                                                                                             | May-22                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SN 1556    | 12-Jan-22(CTTL-SPEAG No Z22-60007)                                                                                                                                             | Jan-23                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by: Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Signal Generator S4438C</td><td>MY48071430</td><td>13-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY48110673</td><td>14-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr></tbody></table>                                                                                                                                                                                             |            |                                                                                                                                                                                |                       | Secondary Standards | ID # | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration | Signal Generator S4438C | MY48071430 | 13-Jan-22 (CTTL No.J22X00409) | Jan-23 | Network Analyzer E5071C | MY48110673 | 14-Jan-22 (CTTL No.J22X00409) | Jan-23 |                        |         |                                    |        |      |         |                                    |        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ID #       | Cal Date (Calibrated by: Certificate No.)                                                                                                                                      | Scheduled Calibration |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Signal Generator S4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MY48071430 | 13-Jan-22 (CTTL No.J22X00409)                                                                                                                                                  | Jan-23                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | MY48110673 | 14-Jan-22 (CTTL No.J22X00409)                                                                                                                                                  | Jan-23                |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Calibrated by: <b>Zhao Jing</b> SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            | Signature                                                                                                                                                                      |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Reviewed by: <b>Lin Hao</b> SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Approved by: <b>Qi Dianyan</b> SAR Project Leader                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Issued: April 3, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |                                                                                                                                                                                |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            | Page 1 of 6                                                                                                                                                                    |                       |                     |      |                                           |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                    |        |      |         |                                    |        |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          | CAICT                                                                                                                                                                          |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------|-------------|--------------|-------------------------------------------------------|-----------------------------|---------|--------------|--------------------------|------------------------------|-------------------------------------|------------------|--------------------------|---------------------------------------------------------|-------------------|-----|--------------|--------------------|-----------|-------------------------------------|------------------|--------------------------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th>DASY Version</th><th>DASY52</th><th>V52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>750 MHz ± 1 MHz</td><td></td></tr></tbody></table>                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  | DASY Version | DASY52      | V52.10.4     | Extrapolation                                         | Advanced Extrapolation      |         | Phantom      | Triple Flat Phantom 5.1C |                              | Distance Dipole Center - TSL        | 15 mm            | with Spacer              | Zoom Scan Resolution                                    | dx, dy, dz = 5 mm |     | Frequency    | 750 MHz ± 1 MHz    |           |                                     |                  |                          |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | DASY52                   | V52.10.4                                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Advanced Extrapolation   |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Triple Flat Phantom 5.1C |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 15 mm                    | with Spacer                                                                                                                                                                    |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | dx, dy, dz = 5 mm        |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 750 MHz ± 1 MHz          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>42.0</td><td>0.90 mho/m</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>41.4 ± 6 %</td><td>0.89 mho/m ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>                                                                                                                                                                                                                 |                          |                                                                                                                                                                                |                  |              | Temperature | Permittivity | Conductivity                                          | Nominal Head TSL parameters | 22.0 °C | 42.0         | 0.90 mho/m               | Measured Head TSL parameters | (22.0 ± 0.2) °C                     | 41.4 ± 6 %       | 0.89 mho/m ± 6 %         | Head TSL temperature change during test                 | <1.0 °C           | --- | ---          |                    |           |                                     |                  |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Temperature              | Permittivity                                                                                                                                                                   | Conductivity     |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 22.0 °C                  | 42.0                                                                                                                                                                           | 0.90 mho/m       |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | (22.0 ± 0.2) °C          | 41.4 ± 6 %                                                                                                                                                                     | 0.89 mho/m ± 6 % |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <1.0 °C                  | ---                                                                                                                                                                            | ---              |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th></th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR averaged over 1 cm<sup>2</sup> (1 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>2.07 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>8.27 W/kg ± 18.8 % (k=2)</td></tr><tr><td>SAR averaged over 10 cm<sup>2</sup> (10 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>1.37 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>5.48 W/kg ± 18.7 % (k=2)</td></tr></tbody></table> |                          |                                                                                                                                                                                |                  |              | Condition   |              | SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL |                             |         | SAR measured | 250 mW input power       | 2.07 W/kg                    | SAR for nominal Head TSL parameters | normalized to 1W | 8.27 W/kg ± 18.8 % (k=2) | SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL |                   |     | SAR measured | 250 mW input power | 1.37 W/kg | SAR for nominal Head TSL parameters | normalized to 1W | 5.48 W/kg ± 18.7 % (k=2) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Condition                |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 2.07 W/kg                                                                                                                                                                      |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 8.27 W/kg ± 18.8 % (k=2)                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 1.37 W/kg                                                                                                                                                                      |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 5.48 W/kg ± 18.7 % (k=2)                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                     |                                | CAICT                                                                                                                                                                          |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn                                                                                                                                       |                                | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                     |                                |                                                                                                                                                                                |  |
| TSL                                                                                                                                                                                                                                                                                                                  | tissue simulating liquid       |                                                                                                                                                                                |  |
| ConvF                                                                                                                                                                                                                                                                                                                | sensitivity in TSL / NORMx.y.z |                                                                                                                                                                                |  |
| N/A                                                                                                                                                                                                                                                                                                                  | not applicable or not measured |                                                                                                                                                                                |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                |                                |                                                                                                                                                                                |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |                                |                                                                                                                                                                                |  |
| b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                   |                                |                                                                                                                                                                                |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                     |                                |                                                                                                                                                                                |  |
| c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                           |                                |                                                                                                                                                                                |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                             |                                |                                                                                                                                                                                |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                 |                                |                                                                                                                                                                                |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.      |                                |                                                                                                                                                                                |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                              |                                |                                                                                                                                                                                |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                              |                                |                                                                                                                                                                                |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                   |                                |                                                                                                                                                                                |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.                                                                                      |                                |                                                                                                                                                                                |  |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                            |                                | Page 2 of 6                                                                                                                                                                    |  |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                | CAICT                                                                                                                                                                          |  |                                      |                |             |         |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------------------|----------------|-------------|---------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn |  |                                      |                |             |         |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                |  |                                      |                |             |         |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                |                                                                                                                                                                                |  |                                      |                |             |         |
| <table border="1"><thead><tr><th>Impedance, transformed to feed point</th><th>53.60 - 1.13jΩ</th></tr><tr><th>Return Loss</th><th>-28.7dB</th></tr></thead></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                |                                                                                                                                                                                |  | Impedance, transformed to feed point | 53.60 - 1.13jΩ | Return Loss | -28.7dB |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 53.60 - 1.13jΩ |                                                                                                                                                                                |  |                                      |                |             |         |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -28.7dB        |                                                                                                                                                                                |  |                                      |                |             |         |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                                                                                                                                                                                |  |                                      |                |             |         |
| <table border="1"><thead><tr><th>Electrical Delay (one direction)</th><th>0.947 ns</th></tr></thead></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                                                                                                                                                                                |  | Electrical Delay (one direction)     | 0.947 ns       |             |         |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 0.947 ns       |                                                                                                                                                                                |  |                                      |                |             |         |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                                                                                                                                                                                |  |                                      |                |             |         |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                |                                                                                                                                                                                |  |                                      |                |             |         |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                                                                                |  |                                      |                |             |         |
| <table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                                                                                |  | Manufactured by                      | SPEAG          |             |         |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG          |                                                                                                                                                                                |  |                                      |                |             |         |
| Certificate No: Z22-60103                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                | Page 3 of 6                                                                                                                                                                    |  |                                      |                |             |         |

| TTL Speag CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          | CAICT                                                                                                                                                                          |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|--------------|-------------|--------------|-------------------------------------------------------|-----------------------------|---------|--------------|--------------------------|------------------------------|-------------------------------------|------------------|--------------------------|---------------------------------------------------------|-------------------|-----|--------------|--------------------|-----------|-------------------------------------|------------------|--------------------------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                          | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaetl.com http://www.chinaetl.cn |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th>DASY Version</th><th>DASY52</th><th>V52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>750 MHz ± 1 MHz</td><td></td></tr></tbody></table>                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  | DASY Version | DASY52      | V52.10.4     | Extrapolation                                         | Advanced Extrapolation      |         | Phantom      | Triple Flat Phantom 5.1C |                              | Distance Dipole Center - TSL        | 15 mm            | with Spacer              | Zoom Scan Resolution                                    | dx, dy, dz = 5 mm |     | Frequency    | 750 MHz ± 1 MHz    |           |                                     |                  |                          |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | DASY52                   | V52.10.4                                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Advanced Extrapolation   |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | Triple Flat Phantom 5.1C |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 15 mm                    | with Spacer                                                                                                                                                                    |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | dx, dy, dz = 5 mm        |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 750 MHz ± 1 MHz          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>42.0</td><td>0.90 mho/m</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>41.4 ± 6 %</td><td>0.89 mho/m ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>                                                                                                                                                                                                                 |                          |                                                                                                                                                                                |                  |              | Temperature | Permittivity | Conductivity                                          | Nominal Head TSL parameters | 22.0 °C | 42.0         | 0.90 mho/m               | Measured Head TSL parameters | (22.0 ± 0.2) °C                     | 41.4 ± 6 %       | 0.89 mho/m ± 6 %         | Head TSL temperature change during test                 | <1.0 °C           | --- | ---          |                    |           |                                     |                  |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Temperature              | Permittivity                                                                                                                                                                   | Conductivity     |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | 22.0 °C                  | 42.0                                                                                                                                                                           | 0.90 mho/m       |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | (22.0 ± 0.2) °C          | 41.4 ± 6 %                                                                                                                                                                     | 0.89 mho/m ± 6 % |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | <1.0 °C                  | ---                                                                                                                                                                            | ---              |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th></th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR averaged over 1 cm<sup>2</sup> (1 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>2.07 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>8.27 W/kg ± 18.8 % (k=2)</td></tr><tr><td>SAR averaged over 10 cm<sup>2</sup> (10 g) of Head TSL</td><td></td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>1.37 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>5.48 W/kg ± 18.7 % (k=2)</td></tr></tbody></table> |                          |                                                                                                                                                                                |                  |              | Condition   |              | SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL |                             |         | SAR measured | 250 mW input power       | 2.07 W/kg                    | SAR for nominal Head TSL parameters | normalized to 1W | 8.27 W/kg ± 18.8 % (k=2) | SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL |                   |     | SAR measured | 250 mW input power | 1.37 W/kg | SAR for nominal Head TSL parameters | normalized to 1W | 5.48 W/kg ± 18.7 % (k=2) |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Condition                |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 2.07 W/kg                                                                                                                                                                      |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 8.27 W/kg ± 18.8 % (k=2)                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                                                                                                                                                                                |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 250 mW input power       | 1.37 W/kg                                                                                                                                                                      |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | normalized to 1W         | 5.48 W/kg ± 18.7 % (k=2)                                                                                                                                                       |                  |              |             |              |                                                       |                             |         |              |                          |                              |                                     |                  |                          |                                                         |                   |     |              |                    |           |                                     |                  |                          |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

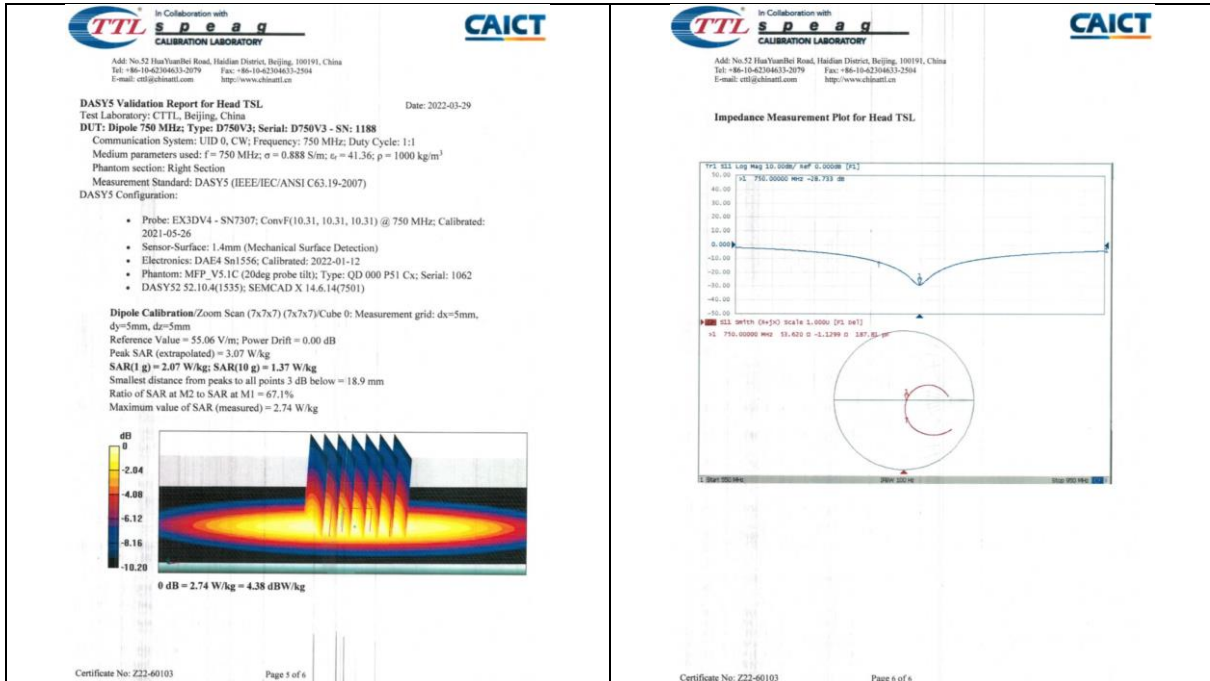

#### 1.4 D835V2 - SN 4d114

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            | CAICT                                                                                                                                                                             |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------|------|-------------------------------------------|-----------------------|-------------------------|------------|--------------------------------|--------|-------------------------|------------|--------------------------------|--------|------------------------|---------|--------------------------------------|--------|------|---------|--------------------------------------|--------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                                                                                                                              |            | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Client: SGS-CN                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | Certificate No: Z22-60104                                                                                                                                                         |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Object: D835V2 - SN: 4d114                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Calibration Procedure(s): FF-Z11-003-01<br>Calibration Procedures for dipole validation kits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Calibration date: March 31, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| This Calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                                     |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Calibration Equipment used (M&E critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by, Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>106277</td><td>24-Sep-21 (CTTL, No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor NRPBS</td><td>104261</td><td>24-Sep-21 (CTTL, No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN 7307</td><td>26-May-21 (SPEAG, No.EX3-7307_May21)</td><td>May-22</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22 (CTTL-SPEAG, No.Z22-60007)</td><td>Jan-23</td></tr></tbody></table> |            |                                                                                                                                                                                   |                       | Primary Standards   | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration | Power Meter NRP2        | 106277     | 24-Sep-21 (CTTL, No.J21X08326) | Sep-22 | Power sensor NRPBS      | 104261     | 24-Sep-21 (CTTL, No.J21X08326) | Sep-22 | Reference Probe EX3DV4 | SN 7307 | 26-May-21 (SPEAG, No.EX3-7307_May21) | May-22 | DAE4 | SN 1556 | 12-Jan-22 (CTTL-SPEAG, No.Z22-60007) | Jan-23 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ID #       | Cal Date (Calibrated by, Certificate No.)                                                                                                                                         | Scheduled Calibration |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 106277     | 24-Sep-21 (CTTL, No.J21X08326)                                                                                                                                                    | Sep-22                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Power sensor NRPBS                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 104261     | 24-Sep-21 (CTTL, No.J21X08326)                                                                                                                                                    | Sep-22                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SN 7307    | 26-May-21 (SPEAG, No.EX3-7307_May21)                                                                                                                                              | May-22                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | SN 1556    | 12-Jan-22 (CTTL-SPEAG, No.Z22-60007)                                                                                                                                              | Jan-23                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by, Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Signal Generator E4438C</td><td>MY46071430</td><td>13-Jan-22 (CTTL, No.J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY46110673</td><td>14-Jan-22 (CTTL, No.J22X00409)</td><td>Jan-23</td></tr></tbody></table>                                                                                                                                                                                                 |            |                                                                                                                                                                                   |                       | Secondary Standards | ID # | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration | Signal Generator E4438C | MY46071430 | 13-Jan-22 (CTTL, No.J22X00409) | Jan-23 | Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL, No.J22X00409) | Jan-23 |                        |         |                                      |        |      |         |                                      |        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ID #       | Cal Date (Calibrated by, Certificate No.)                                                                                                                                         | Scheduled Calibration |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Signal Generator E4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | MY46071430 | 13-Jan-22 (CTTL, No.J22X00409)                                                                                                                                                    | Jan-23                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | MY46110673 | 14-Jan-22 (CTTL, No.J22X00409)                                                                                                                                                    | Jan-23                |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Calibrated by: Zhao Jing SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            | Signature: [Signature]                                                                                                                                                            |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Reviewed by: Lin Hao SAR Test Engineer                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            | Signature: [Signature]                                                                                                                                                            |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Approved by: Qi Dianyan SAR Project Leader                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            | Signature: [Signature]                                                                                                                                                            |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| Issued: April 6, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                                                                                                                                                                   |                       |                     |      |                                           |                       |                         |            |                                |        |                         |            |                                |        |                        |         |                                      |        |      |         |                                      |        |

Certificate No: Z22-60104 Page 1 of 6

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                      |  | CAICT                                                                                                                                                                             |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                     |  | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                   |  |
| TSL                                                                                                                                                                                                                                                                                                                   |  | tissue simulating liquid                                                                                                                                                          |  |
| ConvF                                                                                                                                                                                                                                                                                                                 |  | sensitivity in TSL / NORMx.y.z                                                                                                                                                    |  |
| N/A                                                                                                                                                                                                                                                                                                                   |  | not applicable or not measured                                                                                                                                                    |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                 |  |                                                                                                                                                                                   |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |  |                                                                                                                                                                                   |  |
| b) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                    |  |                                                                                                                                                                                   |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                   |  |
| c) DASY4/5 System Handbook                                                                                                                                                                                                                                                                                            |  |                                                                                                                                                                                   |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                              |  |                                                                                                                                                                                   |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                  |  |                                                                                                                                                                                   |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                                |  |                                                                                                                                                                                   |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.       |  |                                                                                                                                                                                   |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                               |  |                                                                                                                                                                                   |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                                |  |                                                                                                                                                                                   |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                               |  |                                                                                                                                                                                   |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                    |  |                                                                                                                                                                                   |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.                                                                                       |  |                                                                                                                                                                                   |  |

Certificate No: Z22-60104 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic formal documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

| TTL Calibration Laboratory                                                                                                                                                         |                          | CAICT                                                                                                                                                                              |                      |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|
| In Collaboration with                                                                                                                                                              |                          | In Collaboration with                                                                                                                                                              |                      |
| Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |                          | Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |                      |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                         |                          |                                                                                                                                                                                    |                      |
| DASY Version                                                                                                                                                                       | DASY52                   | VS2 10.4                                                                                                                                                                           |                      |
| Extrapolation                                                                                                                                                                      | Advanced Extrapolation   |                                                                                                                                                                                    |                      |
| Phantom                                                                                                                                                                            | Triple Flat Phantom 5.1C |                                                                                                                                                                                    |                      |
| Distance Dipole Center - TSL                                                                                                                                                       | 15 mm                    | with Spacer                                                                                                                                                                        |                      |
| Zoom Scan Resolution                                                                                                                                                               | dx, dy, dz = 5 mm        |                                                                                                                                                                                    |                      |
| Frequency                                                                                                                                                                          | 835 MHz $\pm$ 1 MHz      |                                                                                                                                                                                    |                      |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                                                              |                          |                                                                                                                                                                                    |                      |
| Nominal Head TSL parameters                                                                                                                                                        | Temperature              | Permittivity                                                                                                                                                                       | Conductivity         |
|                                                                                                                                                                                    | 22.0 °C                  | 41.5                                                                                                                                                                               | 0.90 mho/m           |
| Measured Head TSL parameters                                                                                                                                                       | (22.0 $\pm$ 0.2) °C      | 41.0 $\pm$ 5 %                                                                                                                                                                     | 0.91 mho/m $\pm$ 5 % |
| Head TSL temperature change during test                                                                                                                                            | <1.0 °C                  | ---                                                                                                                                                                                | ---                  |
| <b>SAR result with Head TSL</b>                                                                                                                                                    |                          |                                                                                                                                                                                    |                      |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                              | Condition                |                                                                                                                                                                                    |                      |
| SAR measured                                                                                                                                                                       | 250 mW input power       | 2.37 W/kg                                                                                                                                                                          |                      |
| SAR for nominal Head TSL parameters                                                                                                                                                | normalized to 1W         | 9.40 W/kg $\pm$ 18.5 % (k=2)                                                                                                                                                       |                      |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                            | Condition                |                                                                                                                                                                                    |                      |
| SAR measured                                                                                                                                                                       | 250 mW input power       | 1.54 W/kg                                                                                                                                                                          |                      |
| SAR for nominal Head TSL parameters                                                                                                                                                | normalized to 1W         | 6.12 W/kg $\pm$ 18.7 % (k=2)                                                                                                                                                       |                      |
| Certificate No: Z22-60104 Page 3 of 6                                                                                                                                              |                          |                                                                                                                                                                                    |                      |

| TTL Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               | CAICT                                                                                                                                                                              |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               | In Collaboration with                                                                                                                                                              |  |
| Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                          |               | Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |                                                                                                                                                                                    |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |                                                                                                                                                                                    |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 48.70 - j22jQ |                                                                                                                                                                                    |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -25.3dB       |                                                                                                                                                                                    |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |                                                                                                                                                                                    |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.307 ns      |                                                                                                                                                                                    |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |               |                                                                                                                                                                                    |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |               |                                                                                                                                                                                    |  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |               |                                                                                                                                                                                    |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |                                                                                                                                                                                    |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SPEAG         |                                                                                                                                                                                    |  |
| Certificate No: Z22-60104 Page 4 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |                                                                                                                                                                                    |  |

| TTL Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  | CAICT                                                                                                                                                                              |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  | In Collaboration with                                                                                                                                                              |  |
| Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  | Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>DASY Validation Report for Head TSL</b><br>Test Laboratory: CTTL, Beijing, China<br>DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 4d114<br>Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1<br>Medium parameters used: f = 835 MHz; $\sigma$ = 0.907 S/m; $\epsilon_r$ = 40.98; $\rho$ = 1000 kg/m <sup>3</sup><br>Phantom section: Right Section<br>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)<br>DASY5 Configuration: <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7307; ConvF(10.13, 10.13, 10.13) @ 835 MHz; Calibrated: 2021-05-26</li><li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DA-E4 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52 52.10.4(1535); SEMCAD X 14.6(147501)</li></ul> |  |                                                                                                                                                                                    |  |
| Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm<br>Reference Value = 57.88 V/m; Power Drift = 0.04 dB<br>Peak SAR (extrapolated) = 3.56 W/kg<br>SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg<br>Smallest distance from peaks to all points 3 dB below = 15.8 mm<br>Ratio of SAR at M2 to SAR at M1 = 66.2%<br>Maximum value of SAR (measured) = 3.17 W/kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |  |                                                                                                                                                                                    |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |  |                                                                                                                                                                                    |  |
| 0 dB = 3.17 W/kg = 5.01 dBW/kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |                                                                                                                                                                                    |  |
| Certificate No: Z22-60104 Page 5 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |  |                                                                                                                                                                                    |  |
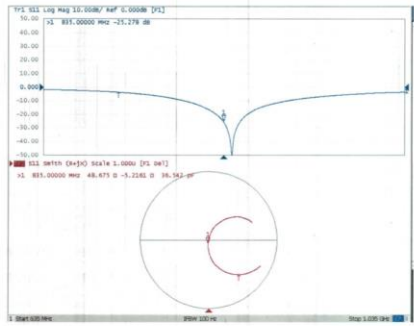
| TTL Calibration Laboratory                                                                                                                                                         |  | CAICT                                                                                                                                                                              |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| In Collaboration with                                                                                                                                                              |  | In Collaboration with                                                                                                                                                              |  |
| Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  | Add: No. 52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                                                     |  |                                                                                                                                                                                    |  |
|                                                                                                |  |                                                                                                                                                                                    |  |
| Certificate No: Z22-60104 Page 6 of 6                                                                                                                                              |  |                                                                                                                                                                                    |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 t(86-512)57370818 [www.sgs.com](http://www.sgs.com)  
t(86-512)57355888 t(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.5 D900V2 - SN 1d079

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            | In Collaboration with<br><b>CAICT</b><br>CALIBRATION LABORATORY                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------------|---------------------|------|------------------------------------------|-----------------------|-------------------------|------------|-------------------------------|--------|-------------------------|------------|-------------------------------|--------|------------------------|---------|-------------------------------------|--------|------|---------|-------------------------------------|--------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Client: <b>SGS-CN</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            | Certificate No: <b>Z22-60184</b>                                                                                            |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Object: <b>D900V2 - SN: 1d079</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Calibration Procedure(s): <b>FF-Z11-003-01</b><br>Calibration Procedures for dipole validation kits                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Calibration date: <b>June 7, 2022</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                                |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity <70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>106277</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor NRP85</td><td>104291</td><td>24-Sep-21 (CTTL No.J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX3DV4</td><td>SN 7464</td><td>28-Jan-22 (SPEAG No.EK3-7464_Jan22)</td><td>Jan-23</td></tr><tr><td>DAE4</td><td>SN 1556</td><td>12-Jan-22 (CTTL-SPEAG No.Z22-60007)</td><td>Jan-23</td></tr></tbody></table> |            |                                                                                                                             |                       | Primary Standards   | ID # | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration | Power Meter NRP2        | 106277     | 24-Sep-21 (CTTL No.J21X08326) | Sep-22 | Power sensor NRP85      | 104291     | 24-Sep-21 (CTTL No.J21X08326) | Sep-22 | Reference Probe EX3DV4 | SN 7464 | 28-Jan-22 (SPEAG No.EK3-7464_Jan22) | Jan-23 | DAE4 | SN 1556 | 12-Jan-22 (CTTL-SPEAG No.Z22-60007) | Jan-23 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                    | Scheduled Calibration |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 106277     | 24-Sep-21 (CTTL No.J21X08326)                                                                                               | Sep-22                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Power sensor NRP85                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 104291     | 24-Sep-21 (CTTL No.J21X08326)                                                                                               | Sep-22                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Reference Probe EX3DV4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | SN 7464    | 28-Jan-22 (SPEAG No.EK3-7464_Jan22)                                                                                         | Jan-23                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SN 1556    | 12-Jan-22 (CTTL-SPEAG No.Z22-60007)                                                                                         | Jan-23                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Signal Generator E4438C</td><td>MY48071430</td><td>13-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY48110673</td><td>14-Jan-22 (CTTL No.J22X00409)</td><td>Jan-23</td></tr></tbody></table>                                                                                                                                                                                               |            |                                                                                                                             |                       | Secondary Standards | ID # | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration | Signal Generator E4438C | MY48071430 | 13-Jan-22 (CTTL No.J22X00409) | Jan-23 | Network Analyzer E5071C | MY48110673 | 14-Jan-22 (CTTL No.J22X00409) | Jan-23 |                        |         |                                     |        |      |         |                                     |        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | ID #       | Cal Date (Calibrated by Certificate No.)                                                                                    | Scheduled Calibration |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Signal Generator E4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | MY48071430 | 13-Jan-22 (CTTL No.J22X00409)                                                                                               | Jan-23                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | MY48110673 | 14-Jan-22 (CTTL No.J22X00409)                                                                                               | Jan-23                |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Calibrated by: <b>Zhao Jing</b> SAR Test Engineer <b>Signature</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Reviewed by: <b>Lin Hao</b> SAR Test Engineer <b>Signature</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Approved by: <b>Qi Danyuan</b> SAR Project Leader <b>Signature</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Issued: June 13, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |            |                                                                                                                             |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |
| Certificate No: Z22-60184                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |            | Page 1 of 6                                                                                                                 |                       |                     |      |                                          |                       |                         |            |                               |        |                         |            |                               |        |                        |         |                                     |        |      |         |                                     |        |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                              |  | In Collaboration with<br><b>CAICT</b><br>CALIBRATION LABORATORY                                                             |  |
|-----------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |  | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |  |
| Certificate No: Z22-60184                                                                                                   |  | Page 2 of 6                                                                                                                 |  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          | In Collaboration with<br><b>CAICT</b><br>CALIBRATION LABORATORY                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------|-----------------|-------------------------------------------------------|-------------|--------------|---------------|-----------------------------|-----------|-------------------------------------|--------------------------|------------------------------|---------------------------------------------------------|------------|-----------------|-----------------------------------------|--------------------|-----------|-------------------------------------|------------------|--------------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                          |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th>DASY Version</th><th>DASY2</th><th>52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom S 1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>dx, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>900 MHz ± 1 MHz</td><td></td></tr></tbody></table>                                                                                                                                                              |                          |                                                                                                                             |                 | DASY Version                                          | DASY2       | 52.10.4      | Extrapolation | Advanced Extrapolation      |           | Phantom                             | Triple Flat Phantom S 1C |                              | Distance Dipole Center - TSL                            | 15 mm      | with Spacer     | Zoom Scan Resolution                    | dx, dy, dz = 5 mm  |           | Frequency                           | 900 MHz ± 1 MHz  |                          |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | DASY2                    | 52.10.4                                                                                                                     |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Advanced Extrapolation   |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Triple Flat Phantom S 1C |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 15 mm                    | with Spacer                                                                                                                 |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | dx, dy, dz = 5 mm        |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 900 MHz ± 1 MHz          |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>41.5</td><td>0.97 nS/m</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>42.1 ± 6 %</td><td>0.98 nS/m ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td>&lt;1.0 °C</td><td>---</td><td>---</td></tr></tbody></table>                                                                                                                                                                                        |                          |                                                                                                                             |                 |                                                       | Temperature | Permittivity | Conductivity  | Nominal Head TSL parameters | 22.0 °C   | 41.5                                | 0.97 nS/m                | Measured Head TSL parameters | (22.0 ± 0.2) °C                                         | 42.1 ± 6 % | 0.98 nS/m ± 6 % | Head TSL temperature change during test | <1.0 °C            | ---       | ---                                 |                  |                          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Temperature              | Permittivity                                                                                                                | Conductivity    |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 22.0 °C                  | 41.5                                                                                                                        | 0.97 nS/m       |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | (22.0 ± 0.2) °C          | 42.1 ± 6 %                                                                                                                  | 0.98 nS/m ± 6 % |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | <1.0 °C                  | ---                                                                                                                         | ---             |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                          |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| <table border="1"><thead><tr><th>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>2.70 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>11.0 W/kg ± 18.8 % (k=2)</td></tr><tr><td>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</td><td>Condition</td><td></td></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>1.73 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>7.09 W/kg ± 18.7 % (k=2)</td></tr></tbody></table> |                          |                                                                                                                             |                 | SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL | Condition   |              | SAR measured  | 250 mW input power          | 2.70 W/kg | SAR for nominal Head TSL parameters | normalized to 1W         | 11.0 W/kg ± 18.8 % (k=2)     | SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL | Condition  |                 | SAR measured                            | 250 mW input power | 1.73 W/kg | SAR for nominal Head TSL parameters | normalized to 1W | 7.09 W/kg ± 18.7 % (k=2) |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Condition                |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 250 mW input power       | 2.70 W/kg                                                                                                                   |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | normalized to 1W         | 11.0 W/kg ± 18.8 % (k=2)                                                                                                    |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Condition                |                                                                                                                             |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 250 mW input power       | 1.73 W/kg                                                                                                                   |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | normalized to 1W         | 7.09 W/kg ± 18.7 % (k=2)                                                                                                    |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |
| Certificate No: Z22-60184                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                          | Page 3 of 6                                                                                                                 |                 |                                                       |             |              |               |                             |           |                                     |                          |                              |                                                         |            |                 |                                         |                    |           |                                     |                  |                          |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                              |  | In Collaboration with<br><b>CAICT</b><br>CALIBRATION LABORATORY                                                             |  |
|-----------------------------------------------------------------------------------------------------------------------------|--|-----------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |  | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |  |
| Certificate No: Z22-60184                                                                                                   |  | Page 4 of 6                                                                                                                 |  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |             | In Collaboration with<br><b>CAICT</b><br>CALIBRATION LABORATORY                                                             |  |                 |             |                                      |  |             |          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-----------------------------------------------------------------------------------------------------------------------------|--|-----------------|-------------|--------------------------------------|--|-------------|----------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2117<br>E-mail: cti@sgs.com.cn |  |                 |             |                                      |  |             |          |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <table border="1"><thead><tr><th></th><th>48.10-8.49d</th></tr></thead><tbody><tr><td>Impedance, transformed to feed point</td><td></td></tr><tr><td>Return Loss</td><td>-23.3 dB</td></tr></tbody></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                |             |                                                                                                                             |  |                 | 48.10-8.49d | Impedance, transformed to feed point |  | Return Loss | -23.3 dB |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 48.10-8.49d |                                                                                                                             |  |                 |             |                                      |  |             |          |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -23.3 dB    |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <table border="1"><thead><tr><th></th><th>1.312 ns</th></tr></thead><tbody><tr><td>Electrical Delay (one direction)</td><td></td></tr></tbody></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |                                                                                                                             |  |                 | 1.312 ns    | Electrical Delay (one direction)     |  |             |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.312 ns    |                                                                                                                             |  |                 |             |                                      |  |             |          |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |             |                                                                                                                             |  |                 |             |                                      |  |             |          |
| <table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |             |                                                                                                                             |  | Manufactured by | SPEAG       |                                      |  |             |          |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG       |                                                                                                                             |  |                 |             |                                      |  |             |          |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |             |                                                                                                                             |  |                 |             |                                      |  |             |          |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

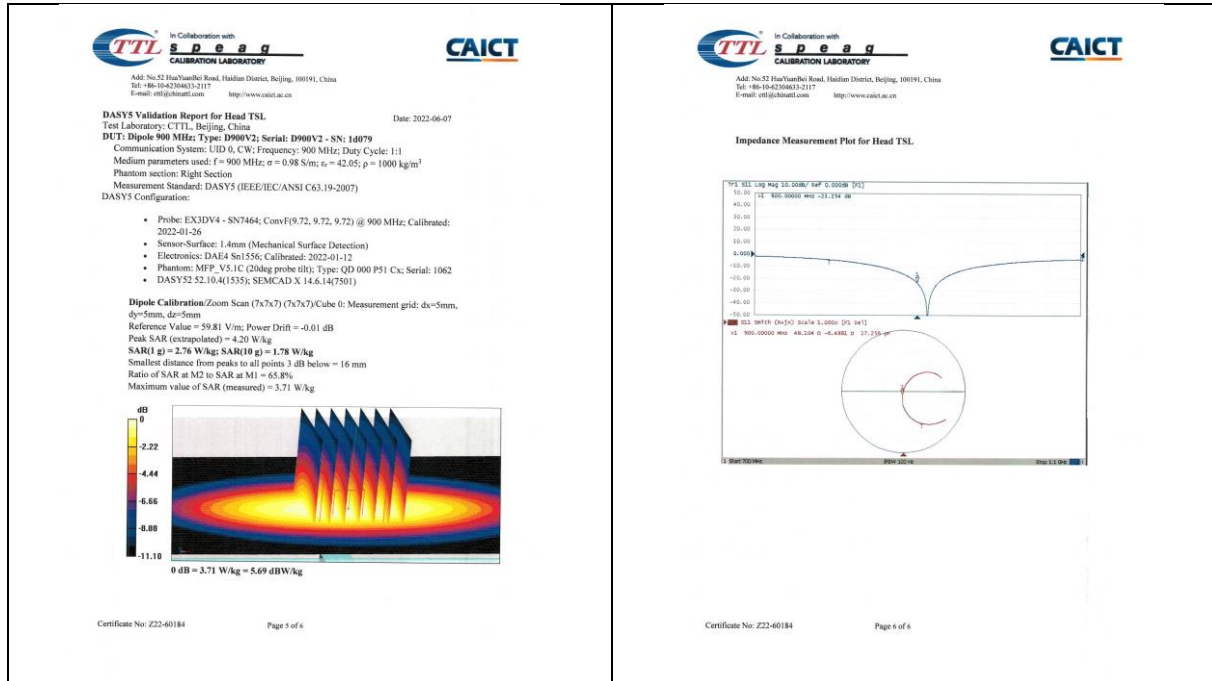

## 1.6 D1800V2 - SN 2d170

**TTL** In Collaboration with **CAICT**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42306033-2117 Fax: +86-10-42306033-2118  
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60105**

**CALIBRATION CERTIFICATE**

Object: **D1800V2 - SN: 2d170**

Calibration Procedure(s): **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **March 31, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No.J21X08326)            | Sep-22                |
| Power sensor NRP8S     | 104291  | 24-Sep-21 (CTTL No.J21X08326)            | Sep-22                |
| Reference Probe EX3DV4 | SN 7307 | 26-May-21 (SPEAG No.EX3-7307_May21)      | May-22                |
| DAE4                   | SN 1556 | 12-Jan-22 (CTTL-SPEAG No.Z22-60007)      | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No.J22X00409)            | Jan-23                |
| Network Analyzer E5071C | MY46110573 | 14-Jan-22 (CTTL No.J22X00409)            | Jan-23                |

Calibrated by: **Zhao Jing** SAR Test Engineer

Reviewed by: **Lin Hao** SAR Test Engineer

Approved by: **Qi Dianyan** SAR Project Leader

Issued April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60105 Page 1 of 6

**TTL** In Collaboration with **CAICT**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-42306033-2079 Fax: +86-10-42306033-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

Glossary:

TSL: tissue simulating liquid  
ConvF: sensitivity in TSL / NORMx,y,z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices, Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60105 Page 2 of 6




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          | CAICT                                                                                                                                                                            |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                          | Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                          |                                                                                                                                                                                  |                  |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | DASY52                   | 52.10.4                                                                                                                                                                          |                  |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Advanced Extrapolation   |                                                                                                                                                                                  |                  |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Triple Flat Phantom 5.1C |                                                                                                                                                                                  |                  |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10 mm                    | with Spacer                                                                                                                                                                      |                  |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | dx, dy, dz = 5 mm        |                                                                                                                                                                                  |                  |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 1800 MHz ± 1 MHz         |                                                                                                                                                                                  |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                                                                                                                                                                                  |                  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Temperature              | Permittivity                                                                                                                                                                     | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 22.0 °C                  | 40.0                                                                                                                                                                             | 1.40 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (22.0 ± 0.2) °C          | 40.8 ± 6 %                                                                                                                                                                       | 1.41 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <1.0 °C                  | ---                                                                                                                                                                              | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                          |                                                                                                                                                                                  |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Condition                |                                                                                                                                                                                  |                  |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 250 mW input power       | 9.73 W/kg                                                                                                                                                                        |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | normalized to 1W         | 38.9 W/kg ± 18.8 % (k=2)                                                                                                                                                         |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Condition                |                                                                                                                                                                                  |                  |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 250 mW input power       | 5.11 W/kg                                                                                                                                                                        |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | normalized to 1W         | 20.4 W/kg ± 18.7 % (k=2)                                                                                                                                                         |                  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                          |                                                                                                                                                                                  |                  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                          |                                                                                                                                                                                  |                  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 47.90-2.54jΩ             |                                                                                                                                                                                  |                  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -29.4dB                  |                                                                                                                                                                                  |                  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                          |                                                                                                                                                                                  |                  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.116 ns                 |                                                                                                                                                                                  |                  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                          |                                                                                                                                                                                  |                  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                          |                                                                                                                                                                                  |                  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                          |                                                                                                                                                                                  |                  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG                    |                                                                                                                                                                                  |                  |
| Certificate No: Z22-60105 Page 3 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                          |                                                                                                                                                                                  |                  |

| TTL Speaq Calibration Laboratory                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | CAICT                                                                                                                                                                            |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  | Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>DASY5 Validation Report for Head TSL</b><br>Test Laboratory: CTTL, Beijing, China<br>Date: 2022-03-31<br>DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 2d170<br>Communication System: UID 0, CW; Frequency: 1800 MHz; Duty Cycle: 1:1<br>Medium parameters used: f = 1800 MHz; σ = 1.411 S/m; ε = 40.62; ρ = 1000 kg/m <sup>3</sup><br>Phantom section: Right Section<br>Measurement Standard: DASY5 (IEEE/ANSI C63.19-2007)<br>DASY5 Configuration: <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7307; ConvF(8.34, 8.34, 8.34) @ 1800 MHz; Calibrated: 2021-05-26</li><li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DAE4 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MFP, V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)</li></ul> <b>Dipole Calibration/Zoom Scan (7x7x7) (Cube 0):</b> Measurement grid: dx=5mm, dy=5mm, dz=5mm<br>Reference Value = 98.14 W/m; Power Drift = 0.03 dB<br>Peak SAR (extrapolated) = 18.2 W/kg<br>SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.11 W/kg<br>Smallest distance from peaks to all points 3 dB below = 10 mm<br>Ratio of SAR at M2 to SAR at M1 = 54%<br>Maximum value of SAR (measured) = 15.2 W/kg |  |                                                                                                                                                                                  |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |  |                                                                                                                                                                                  |  |
| Certificate No: Z22-60105 Page 3 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |  |                                                                                                                                                                                  |  |
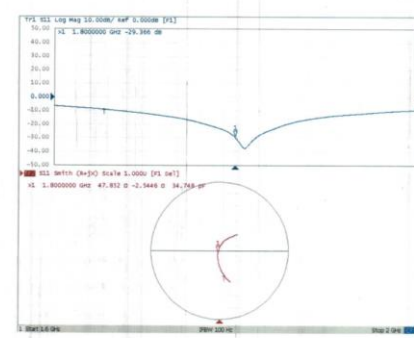
| TTL Speaq Calibration Laboratory                                                                                                                                                 |  | CAICT                                                                                                                                                                            |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  | Add: No.52 HuaYanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com http://www.china.ttl.com |  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                                                   |  |                                                                                                                                                                                  |  |
|                                                                                              |  |                                                                                                                                                                                  |  |
| Certificate No: Z22-60105 Page 6 of 6                                                                                                                                            |  |                                                                                                                                                                                  |  |

## 1.7 D1900V2 - SN 5d136

| TTL S p e a g<br>CALIBRATION LABORATORY                                                                                                                                                                                                                                    |                                                                    | CAICT                                                                                                                         |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn                                                                                                                                              |                                                                    | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn |                       |
| Client: SGS-CN                                                                                                                                                                                                                                                             |                                                                    | Certificate No: Z22-60185                                                                                                     |                       |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                             |                                                                    |                                                                                                                               |                       |
| Object                                                                                                                                                                                                                                                                     | D1900V2 - SN: 5d136                                                |                                                                                                                               |                       |
| Calibration Procedure(s)                                                                                                                                                                                                                                                   | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                               |                       |
| Calibration date:                                                                                                                                                                                                                                                          | June 7, 2022                                                       |                                                                                                                               |                       |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                    |                                                                                                                               |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (23±1)°C and humidity <70%.                                                                                                                                                |                                                                    |                                                                                                                               |                       |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                 |                                                                    |                                                                                                                               |                       |
| Primary Standards                                                                                                                                                                                                                                                          | ID #                                                               | Cal Date (Calibrated by: Certificate No.)                                                                                     | Scheduled Calibration |
| Power Meter NRP2                                                                                                                                                                                                                                                           | 106277                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                 | Sep-22                |
| Power sensor NRP6S                                                                                                                                                                                                                                                         | 104291                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                 | Sep-22                |
| Reference Probe EXSDV4                                                                                                                                                                                                                                                     | SN 7464                                                            | 28-Jan-22 (SPEAG No EX3-7464_Jan22)                                                                                           | Jan-23                |
| DAE4                                                                                                                                                                                                                                                                       | SN 1556                                                            | 12-Jan-22 (CTTL-SPEAG No Z22-60007)                                                                                           | Jan-23                |
| Secondary Standards                                                                                                                                                                                                                                                        | ID #                                                               | Cal Date (Calibrated by: Certificate No.)                                                                                     | Scheduled Calibration |
| Signal Generator E4438C                                                                                                                                                                                                                                                    | MY48071430                                                         | 13-Jan-22 (CTTL No.J22X00409)                                                                                                 | Jan-23                |
| Network Analyzer E5071C                                                                                                                                                                                                                                                    | MY48110073                                                         | 14-Jan-22 (CTTL No.J22X00409)                                                                                                 | Jan-23                |
| Calibrated by:                                                                                                                                                                                                                                                             | Name                                                               | Function                                                                                                                      | Signature             |
|                                                                                                                                                                                                                                                                            | Zhao Jing                                                          | SAR Test Engineer                                                                                                             |                       |
| Reviewed by:                                                                                                                                                                                                                                                               | Lin Hao                                                            | SAR Test Engineer                                                                                                             |                       |
| Approved by:                                                                                                                                                                                                                                                               | Qi Dianyan                                                         | SAR Project Leader                                                                                                            |                       |
| Issued: June 13, 2022                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                               |                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                            |                                                                    |                                                                                                                               |                       |
| Certificate No: Z22-60185                                                                                                                                                                                                                                                  |                                                                    | Page 1 of 6                                                                                                                   |                       |

| TTL S p e a g<br>CALIBRATION LABORATORY                                                                                       |                          | CAICT                                                                                                                         |                 |
|-------------------------------------------------------------------------------------------------------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------|-----------------|
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn |                          | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn |                 |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                    |                          |                                                                                                                               |                 |
| DASY Version                                                                                                                  | DASY52                   | 52.10.4                                                                                                                       |                 |
| Extrapolation                                                                                                                 | Advanced Extrapolation   |                                                                                                                               |                 |
| Phantom                                                                                                                       | Triple Flat Phantom 5.1C |                                                                                                                               |                 |
| Distance Dipole Center - TSL                                                                                                  | 10 mm                    | with Spacer                                                                                                                   |                 |
| Zoom Scan Resolution                                                                                                          | dx, dy, dz = 5 mm        |                                                                                                                               |                 |
| Frequency                                                                                                                     | 1900 MHz ± 1 MHz         |                                                                                                                               |                 |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                         |                          |                                                                                                                               |                 |
| Nominal Head TSL parameters                                                                                                   | Temperature              | Permittivity                                                                                                                  | Conductivity    |
|                                                                                                                               | 22.0 °C                  | 40.0                                                                                                                          | 1.40 nH/m       |
| Measured Head TSL parameters                                                                                                  | (22.0 ± 0.2) °C          | 39.9 ± 6 %                                                                                                                    | 1.39 nH/m ± 6 % |
| Head TSL temperature change during test                                                                                       | +1.0 °C                  | ---                                                                                                                           | ---             |
| <b>SAR result with Head TSL</b>                                                                                               |                          |                                                                                                                               |                 |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                         | Condition                |                                                                                                                               |                 |
| SAR measured                                                                                                                  | 250 mW input power       | 9.55 W/kg                                                                                                                     |                 |
| SAR for nominal Head TSL parameters                                                                                           | normalized to 1W         | 40.0 W/kg ± 16.8 % (k=2)                                                                                                      |                 |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                       | Condition                |                                                                                                                               |                 |
| SAR measured                                                                                                                  | 250 mW input power       | 5.18 W/kg                                                                                                                     |                 |
| SAR for nominal Head TSL parameters                                                                                           | normalized to 1W         | 20.8 W/kg ± 18.7 % (k=2)                                                                                                      |                 |
| Certificate No: Z22-60185                                                                                                     |                          | Page 3 of 6                                                                                                                   |                 |


| TTL S p e a g<br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                | CAICT                                                                                                                         |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|-------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                | Add: No.52 Huayuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42204633-2117<br>E-mail: cti@china.com.cn |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                |                                                                                                                               |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                |                                                                                                                               |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 51.02 ± 7.58 Ω |                                                                                                                               |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -22.4 dB       |                                                                                                                               |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                |                                                                                                                               |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.109 ns       |                                                                                                                               |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                |                                                                                                                               |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                |                                                                                                                               |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                |                                                                                                                               |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG          |                                                                                                                               |  |
| Certificate No: Z22-60185                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                | Page 4 of 6                                                                                                                   |  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com  
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

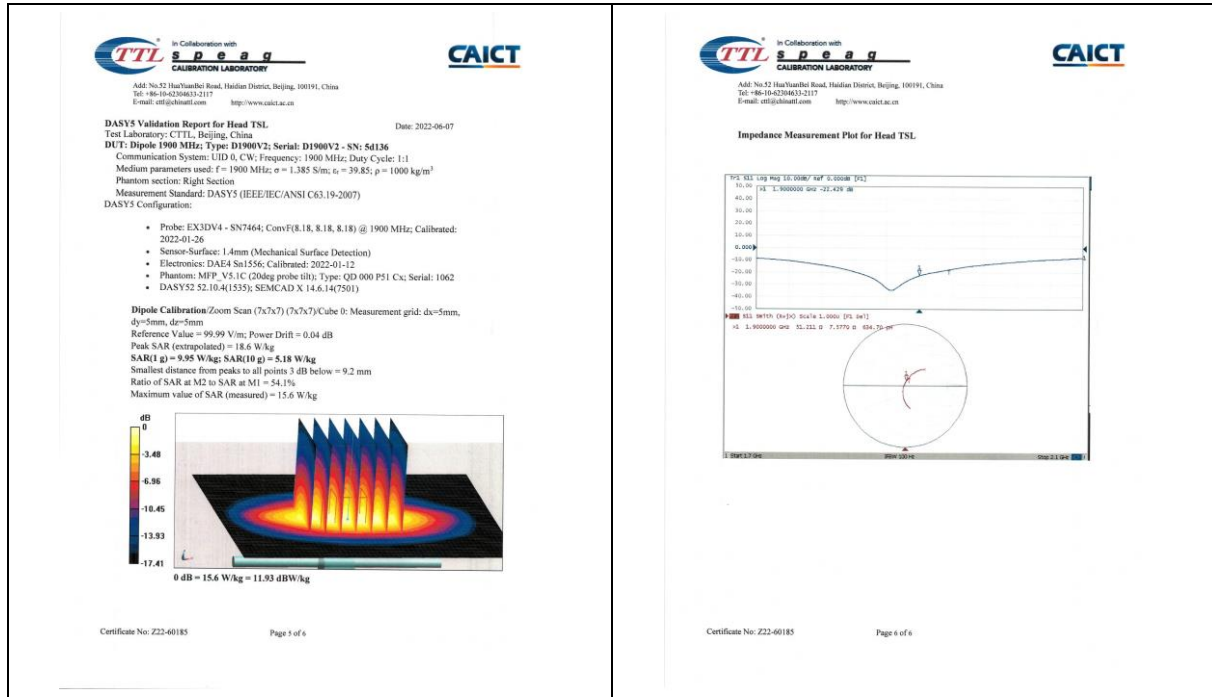

## 1.8 D2000V2 - SN 1041

**Page 1 of 6:**

**CALIBRATION CERTIFICATE**

Client: SGS-CN Certificate No: Z22-60186

Object: D2000V2 - SN 1041

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: June 8, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (B). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility; environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (MATE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|------------------------|---------|------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No. J21X08328)           | Sep-22                |
| Power sensor NRP8S     | 104291  | 24-Sep-21 (CTTL No. J21X08328)           | Sep-22                |
| Reference Probe EX3DV4 | SN 7464 | 26-Jan-22 (SPEAG No. EX3-7464-Jan22)     | Jan-23                |
| DAE4                   | SN 1556 | 12-Jan-22 (CTTL-SPEAG No. Z22-60007)     | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by Certificate No.) | Scheduled Calibration |
|-------------------------|------------|------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No. Z22X00409)           | Jan-23                |
| Network Analyzer E5071C | MY48110673 | 14-Jan-22 (CTTL No. Z22X00409)           | Jan-23                |

Calibrated by: Zhao Jing SAR Test Engineer  
Reviewed by: Lin Hao SAR Test Engineer  
Approved by: Qi Danyuan SAR Project Leader

Issued: June 13, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Page 2 of 6:**

**Glossary:**

TSL: Issue simulating liquid  
ConvF: sensitivity in TSL / NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEC/IEEE 62209-1528, Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz), October 2020
- KOB 865964, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and, for electronic formal documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.10, Welye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                    |                          | <b>CAICT</b>             |                  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6230632-2117<br>E-mail: <a href="mailto:ott@china.ttl.com">ott@china.ttl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |                          |                          |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                                                                       |                          |                          |                  |
| DASY Version                                                                                                                                                                                                                     | DASY52                   | 52.10.4                  |                  |
| Extrapolation                                                                                                                                                                                                                    | Advanced Extrapolation   |                          |                  |
| Phantom                                                                                                                                                                                                                          | Triple Flat Phantom 5.1C |                          |                  |
| Distance Dipole Center - TSL                                                                                                                                                                                                     | 10 mm                    | with Spacer              |                  |
| Zoom Scan Resolution                                                                                                                                                                                                             | dx, dy, dz = 5 mm        |                          |                  |
| Frequency                                                                                                                                                                                                                        | 2000 MHz ± 1 MHz         |                          |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                                                                            |                          |                          |                  |
|                                                                                                                                                                                                                                  | Temperature              | Permittivity             | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                                                                      | 22.0 °C                  | 40.0                     | 1.40 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                     | (22.0 ± 0.2) °C          | 40.2 ± 6 %               | 1.39 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                          | <1.0 °C                  | ---                      | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                  |                          |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                            | Condition                |                          |                  |
| SAR measured                                                                                                                                                                                                                     | 250 mW input power       | 10.4 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                              | normalized to 1W         | 41.8 W/kg ± 16.8 % (n=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                          | Condition                |                          |                  |
| SAR measured                                                                                                                                                                                                                     | 250 mW input power       | 5.30 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                              | normalized to 1W         | 21.3 W/kg ± 18.7 % (n=2) |                  |
| Certificate No: Z22-60186 Page 3 of 6                                                                                                                                                                                            |                          |                          |                  |

| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                               |               | <b>CAICT</b> |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6230632-2117<br>E-mail: <a href="mailto:ott@china.ttl.com">ott@china.ttl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a>                                                                                                                                                                                                                                                                                            |               |              |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |              |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 48.4Ω ± 0.74Ω |              |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | -34.9dB       |              |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |              |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.088 ns      |              |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |               |              |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |               |              |  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |               |              |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |              |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SPEAG         |              |  |
| Certificate No: Z22-60186 Page 4 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |               |              |  |

| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |  | <b>CAICT</b> |  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6230632-2117<br>E-mail: <a href="mailto:ott@china.ttl.com">ott@china.ttl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |  |              |  |
| <b>DASY5 Validation Report for Head TSL</b><br>Test Laboratory: CTTL, Beijing, China<br>DUT: Dipole 2000 MHz; Type: D2000V2; Serial: D2000V2 - SN: 1041<br>Communication System: UTD 0, CW; Frequency: 2000 MHz; Duty Cycle: 1:1<br>Medium parameters used: f = 2000 MHz; σ = 1.392 S/m; ε <sub>r</sub> = 40.21; ρ = 1000 kg/m <sup>3</sup><br>Phantom section: Right Section<br>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)<br>DASY5 Configuration: <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7464; ConvF(8.2, 8.2, 8.2) @ 2000 MHz; Calibrated: 2022-01-26</li><li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DA64 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MPP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52 52.10.4(1555); SEMCAD X 14.6.14(7501)</li></ul> |  |              |  |
| Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm<br>Reference Value = 103.4 V/m; Power Drift = 0.03 dB<br>Peak SAR (extrapolated) = 19.6 W/kg<br>SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.3 W/kg<br>Smallest distance from peaks to all points 3 dB below = 9.1 mm<br>Ratio of SAR at M2 to SAR at M1 = 53.6%<br>Maximum value of SAR (measured) = 16.3 W/kg                                                                                                                                                                                                                                                                                                                                                                                                                                                         |  |              |  |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |  |              |  |
| Certificate No: Z22-60186 Page 5 of 6                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |  |              |  |
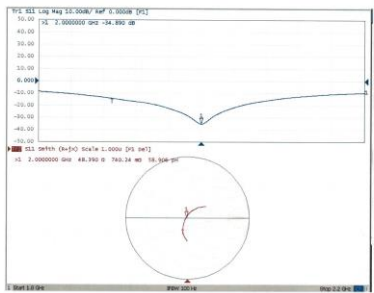
| In Collaboration with<br><b>TTL</b><br>CALIBRATION LABORATORY                                                                                                                                                                    |  | <b>CAICT</b> |  |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-6230632-2117<br>E-mail: <a href="mailto:ott@china.ttl.com">ott@china.ttl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |  |              |  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                                                                                                   |  |              |  |
|                                                                                                                                              |  |              |  |
| Certificate No: Z22-60186 Page 6 of 6                                                                                                                                                                                            |  |              |  |

## 1.9 D2300V2 - SN 1096


| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                    | CAICT                                                                                                                                                                          |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                    | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| Client                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SGS-CN                                                             | Certificate No.                                                                                                                                                                | Z22-60106             |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                    |                                                                                                                                                                                |                       |
| Object                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | D2300V2 - SN: 1096                                                 |                                                                                                                                                                                |                       |
| Calibration Procedure(s)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                                                                                |                       |
| Calibration date:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | March 31, 2022                                                     |                                                                                                                                                                                |                       |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                       |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                    |                                                                                                                                                                                |                       |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                       |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |
| Power Meter NRP2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 108277                                                             | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |
| Power sensor NRP8S                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 104291                                                             | 24-Sep-21 (CTTL No.J21X08328)                                                                                                                                                  | Sep-22                |
| Reference Probe EX30V4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SN 7307                                                            | 26-May-21 (SPEAG No.EK3-7307_May21)                                                                                                                                            | May-22                |
| DAE4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | SN 1556                                                            | 12-Jan-22 (CTTL-SPEAG No.Z22-60007)                                                                                                                                            | Jan-23                |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration |
| Signal Generator E4438C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MY49071430                                                         | 13-Jan-22 (CTTL No.J22X00406)                                                                                                                                                  | Jan-23                |
| Network Analyzer E5071C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | MY48110673                                                         | 14-Jan-22 (CTTL No.J22X00406)                                                                                                                                                  | Jan-23                |
| Calibrated by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Name                                                               | Function                                                                                                                                                                       | Signature             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Zhao Jing                                                          | SAR Test Engineer                                                                                                                                                              |                       |
| Reviewed by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Lin Hao                                                            | SAR Test Engineer                                                                                                                                                              |                       |
| Approved by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | Qi Diqiyuan                                                        | SAR Project Leader                                                                                                                                                             |                       |
| Issued: April 6, 2022                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                                                                                |                       |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                    |                                                                                                                                                                                |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    | Page 1 of 6                                                                                                                                                                    |                       |
| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                    | CAICT                                                                                                                                                                          |                       |
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                    | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| <b>Measurement Conditions</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                    |                                                                                                                                                                                |                       |
| DASY system configuration, as far as not given on page 1:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    |                                                                                                                                                                                |                       |
| DASY Version                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | DASY32                                                             | 52.10.4                                                                                                                                                                        |                       |
| Extrapolation                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | Advanced Extrapolation                                             |                                                                                                                                                                                |                       |
| Phantom                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Triple Flat Phantom 5.1C                                           |                                                                                                                                                                                |                       |
| Distance Dipole Center - TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 10 mm                                                              | with Spacer                                                                                                                                                                    |                       |
| Zoom Scan Resolution                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | dx, dy, dz = 5 mm                                                  |                                                                                                                                                                                |                       |
| Frequency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | 2300 MHz ± 1 MHz                                                   |                                                                                                                                                                                |                       |
| <b>Head TSL parameters</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                       |
| The following parameters and calculations were applied:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                    |                                                                                                                                                                                |                       |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | Temperature                                                        | Permittivity                                                                                                                                                                   | Conductivity          |
| Nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 22.0 °C                                                            | 39.5                                                                                                                                                                           | 1.67 mho/m            |
| Measured Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (22.0 ± 0.2) °C                                                    | 39.8 ± 6 %                                                                                                                                                                     | 1.70 mho/m ± 6 %      |
| Head TSL temperature change during test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | <1.0 °C                                                            | —                                                                                                                                                                              | —                     |
| <b>SAR result with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                                                                    |                                                                                                                                                                                |                       |
| SAR averaged over 1 cm <sup>2</sup> (1 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Condition                                                          |                                                                                                                                                                                |                       |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 250 mW input power                                                 | 12.4 W/kg                                                                                                                                                                      |                       |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | normalized to 1W                                                   | 49.2 W/kg ± 18.8 % (k=2)                                                                                                                                                       |                       |
| SAR averaged over 10 cm <sup>2</sup> (10 g) of Head TSL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Condition                                                          |                                                                                                                                                                                |                       |
| SAR measured                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 250 mW input power                                                 | 5.88 W/kg                                                                                                                                                                      |                       |
| SAR for nominal Head TSL parameters                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | normalized to 1W                                                   | 23.4 W/kg ± 18.7 % (k=2)                                                                                                                                                       |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    | Page 3 of 6                                                                                                                                                                    |                       |
| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                                                                    | CAICT                                                                                                                                                                          |                       |
| Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                    | Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                       |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                    |                                                                                                                                                                                |                       |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                    |                                                                                                                                                                                |                       |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | 49.20 - 4.56jΩ                                                     |                                                                                                                                                                                |                       |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -26.6dB                                                            |                                                                                                                                                                                |                       |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                    |                                                                                                                                                                                |                       |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 1.083 ns                                                           |                                                                                                                                                                                |                       |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |                                                                    |                                                                                                                                                                                |                       |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. |                                                                    |                                                                                                                                                                                |                       |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                       |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | SPEAG                                                              |                                                                                                                                                                                |                       |
| Certificate No: Z22-60106                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                                                                    | Page 4 of 6                                                                                                                                                                    |                       |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us by telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
 No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
 中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 t(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
 t(86-512)57355888 t(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

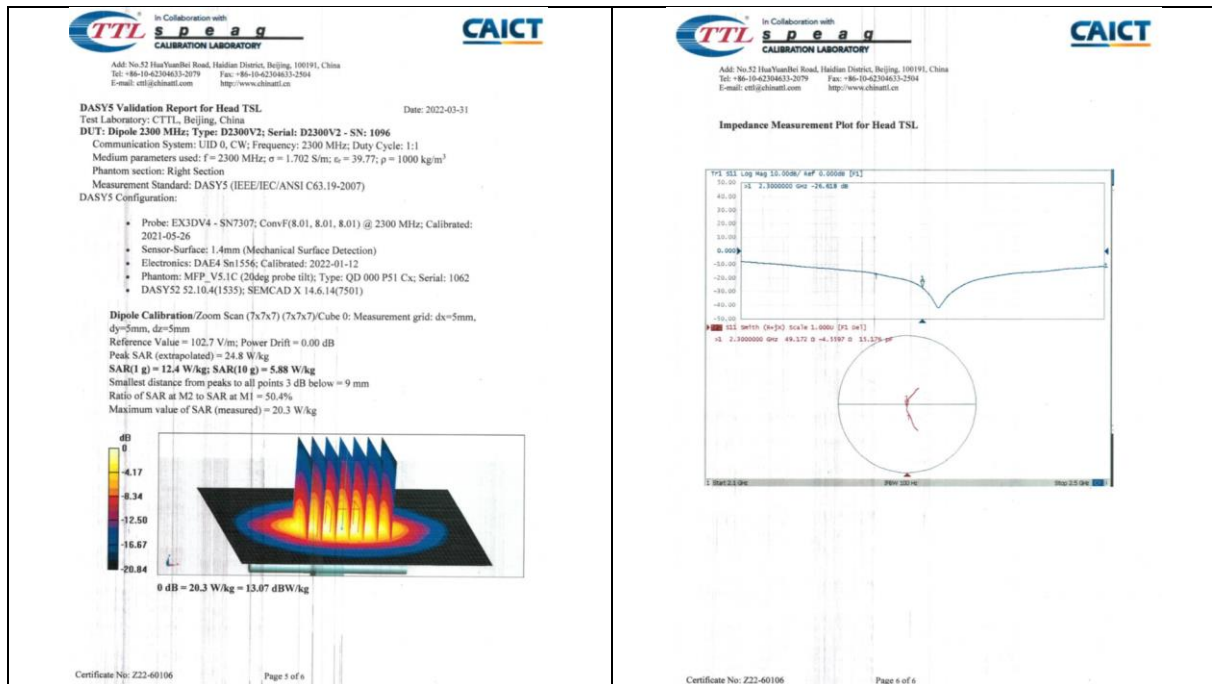

## 1.10 D2450V2 - SN 817

**TTL** In Collaboration with **CAICT**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60107**

**CALIBRATION CERTIFICATE**

Object: **D2450V2 - SN: 817**

Calibration Procedure(s): **FF-Z11-003-01**  
Calibration Procedures for dipole validation kits

Calibration date: **April 1, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|------------------------|---------|-------------------------------------------|-----------------------|
| Power Meter: NRP2      | 106277  | 24-Sep-21 (CTTL No.J21X08320)             | Sep-22                |
| Power sensor: NRP8S    | 104291  | 24-Sep-21 (CTTL No.J21X08320)             | Sep-22                |
| Reference Probe EX3DV4 | SN 7307 | 26-May-21(SPEAG.No.EK3-7307_May21)        | May-22                |
| DAE4                   | SN 1556 | 12-Jan-22(CTTL-SPEAG.No.Z22-60007)        | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|-------------------------|------------|-------------------------------------------|-----------------------|
| Signal Generator E4438C | MY49071430 | 13-Jan-22 (CTTL No.J22X00406)             | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL No.J22X00406)             | Jan-23                |

Calibrated by: **Zhao Jing** SAR Test Engineer  
Reviewed by: **Lin Hao** SAR Test Engineer  
Approved by: **Qi Dianyan** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60107 Page 1 of 6

**TTL** In Collaboration with **CAICT**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62504633-2079 Fax: +86-10-62504633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**Glossary:**

TSL: tissue simulating liquid  
ConvF: sensitivity in TSL / NORMx.y.z  
N/A: not applicable or not measured

**Calibration is Performed According to the Following Standards:**

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020  
b) KDB 655664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

c) DASY4/5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60107 Page 2 of 6





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic formal documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com](http://www.sgs.com)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)
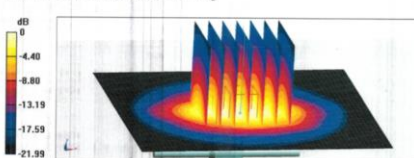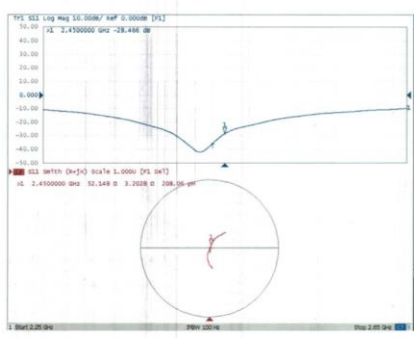
| TTL Speaq Calibration Laboratory                                                                                                                                                        |                          | CAICT                                                                                                                                                                                   |                  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                              |                          |                                                                                                                                                                                         |                  |
| DASY Version                                                                                                                                                                            | DASY52                   | 52.10.4                                                                                                                                                                                 |                  |
| Extrapolation                                                                                                                                                                           | Advanced Extrapolation   |                                                                                                                                                                                         |                  |
| Phantom                                                                                                                                                                                 | Triple Flat Phantom 5.1C |                                                                                                                                                                                         |                  |
| Distance Dipole Center - TSL                                                                                                                                                            | 10 mm                    | with Spacer                                                                                                                                                                             |                  |
| Zoom Scan Resolution                                                                                                                                                                    | dx, dy, dz = 5 mm        |                                                                                                                                                                                         |                  |
| Frequency                                                                                                                                                                               | 2450 MHz ± 1 MHz         |                                                                                                                                                                                         |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied.                                                                                                   |                          |                                                                                                                                                                                         |                  |
|                                                                                                                                                                                         | Temperature              | Permittivity                                                                                                                                                                            | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                             | 22.0 °C                  | 39.2                                                                                                                                                                                    | 1.80 mho/m       |
| Measured Head TSL parameters                                                                                                                                                            | (22.0 ± 0.2) °C          | 39.5 ± 6 %                                                                                                                                                                              | 1.79 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                 | <1.0 °C                  | ---                                                                                                                                                                                     | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                         |                          |                                                                                                                                                                                         |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                   | Condition                |                                                                                                                                                                                         |                  |
| SAR measured                                                                                                                                                                            | 250 mW input power       | 13.2 W/kg                                                                                                                                                                               |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                     | normalized to 1W         | 53.0 W/kg ± 18.8 % (k=2)                                                                                                                                                                |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                 | Condition                |                                                                                                                                                                                         |                  |
| SAR measured                                                                                                                                                                            | 250 mW input power       | 6.15 W/kg                                                                                                                                                                               |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                     | normalized to 1W         | 24.7 W/kg ± 18.7 % (k=2)                                                                                                                                                                |                  |
| Certificate No: Z22-60107 Page 3 of 6                                                                                                                                                   |                          |                                                                                                                                                                                         |                  |
| TTL Speaq Calibration Laboratory                                                                                                                                                        |                          | CAICT                                                                                                                                                                                   |                  |
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                  |
| <b>DASY5 Validation Report for Head TSL</b> Date: 2022-04-01                                                                                                                            |                          |                                                                                                                                                                                         |                  |
| Test Laboratory: CTTL, Beijing, China                                                                                                                                                   |                          |                                                                                                                                                                                         |                  |
| DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817                                                                                                                          |                          |                                                                                                                                                                                         |                  |
| Communication System: UTD 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1                                                                                                                   |                          |                                                                                                                                                                                         |                  |
| Medium parameters used: f = 2450 MHz; σ = 1.79 S/m; ε <sub>r</sub> = 39.52; ρ = 1000 kg/m <sup>3</sup>                                                                                  |                          |                                                                                                                                                                                         |                  |
| Phantom section: Right Section                                                                                                                                                          |                          |                                                                                                                                                                                         |                  |
| Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)                                                                                                                                 |                          |                                                                                                                                                                                         |                  |
| DASY5 Configuration:                                                                                                                                                                    |                          |                                                                                                                                                                                         |                  |
| • Probe: EX3DV4 - SN7307; ConvF(7.75, 7.75, 7.75) @ 2450 MHz; Calibrated: 2021-05-26                                                                                                    |                          |                                                                                                                                                                                         |                  |
| • Sensor-Surface: 1.4mm (Mechanical Surface Detection)                                                                                                                                  |                          |                                                                                                                                                                                         |                  |
| • Electronics: DA14 Sni556; Calibrated: 2022-01-12                                                                                                                                      |                          |                                                                                                                                                                                         |                  |
| • Phantom: MFP_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062                                                                                                              |                          |                                                                                                                                                                                         |                  |
| • DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)                                                                                                                                          |                          |                                                                                                                                                                                         |                  |
| Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm                                                                                           |                          |                                                                                                                                                                                         |                  |
| Reference Value = 104.6 V/m; Power Drift = -0.03 dB                                                                                                                                     |                          |                                                                                                                                                                                         |                  |
| Peak SAR (extrapolated) = 27.0 W/kg                                                                                                                                                     |                          |                                                                                                                                                                                         |                  |
| SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg                                                                                                                                             |                          |                                                                                                                                                                                         |                  |
| Smallest distance from peaks to all points 3 dB below = 8.9 mm                                                                                                                          |                          |                                                                                                                                                                                         |                  |
| Ratio of SAR at M2 to SAR at M1 = 49.2%                                                                                                                                                 |                          |                                                                                                                                                                                         |                  |
| Maximum value of SAR (measured) = 22.1 W/kg                                                                                                                                             |                          |                                                                                                                                                                                         |                  |
|                                                                                                      |                          |                                                                                                                                                                                         |                  |
| Certificate No: Z22-60107 Page 4 of 6                                                                                                                                                   |                          |                                                                                                                                                                                         |                  |
| TTL Speaq Calibration Laboratory                                                                                                                                                        |                          | CAICT                                                                                                                                                                                   |                  |
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn |                  |
| <b>Impedance Measurement Plot for Head TSL</b>                                                                                                                                          |                          |                                                                                                                                                                                         |                  |
|                                                                                                     |                          |                                                                                                                                                                                         |                  |
| Certificate No: Z22-60107 Page 5 of 6                                                                                                                                                   |                          |                                                                                                                                                                                         |                  |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)  
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 t(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 t(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

## 1.11 D2600V2 - SN 1158

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                           |                                                                    | CAICT                                                                                                                                                                          |                        |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191<br>Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                    |                                                                    | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                        |
| Client: SGS-CN                                                                                                                                                                                                                                                             |                                                                    | Certificate No: Z22-60108                                                                                                                                                      |                        |
| <b>CALIBRATION CERTIFICATE</b>                                                                                                                                                                                                                                             |                                                                    |                                                                                                                                                                                |                        |
| Object                                                                                                                                                                                                                                                                     | D2600V2 - SN: 1158                                                 |                                                                                                                                                                                |                        |
| Calibration Procedure(s)                                                                                                                                                                                                                                                   | FF-Z11-003-01<br>Calibration Procedures for dipole validation kits |                                                                                                                                                                                |                        |
| Calibration date:                                                                                                                                                                                                                                                          | March 31, 2022                                                     |                                                                                                                                                                                |                        |
| This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate. |                                                                    |                                                                                                                                                                                |                        |
| All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                        |
| Calibration Equipment used (M&TE critical for calibration)                                                                                                                                                                                                                 |                                                                    |                                                                                                                                                                                |                        |
| Primary Standards                                                                                                                                                                                                                                                          | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration  |
| Power Meter: NRP2                                                                                                                                                                                                                                                          | 106277                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                  | Sep-22                 |
| Power sensor: NRP8S                                                                                                                                                                                                                                                        | 104291                                                             | 24-Sep-21 (CTTL No.J21X08326)                                                                                                                                                  | Sep-22                 |
| Reference Probe EX3DVA                                                                                                                                                                                                                                                     | SN 7307                                                            | 26-May-21(SPEAG.No.EX3-7307_May21)                                                                                                                                             | May-22                 |
| DAE4                                                                                                                                                                                                                                                                       | SN 1556                                                            | 12-Jan-22(CTTL-SPEAG.No.Z22-60007)                                                                                                                                             | Jan-23                 |
| Secondary Standards                                                                                                                                                                                                                                                        | ID #                                                               | Cal Date (Calibrated by Certificate No.)                                                                                                                                       | Scheduled Calibration  |
| Signal Generator E4438C                                                                                                                                                                                                                                                    | MY49071430                                                         | 13-Jan-22 (CTTL No.Z22X00406)                                                                                                                                                  | Jan-23                 |
| Network Analyzer E5071C                                                                                                                                                                                                                                                    | MY48110673                                                         | 14-Jan-22 (CTTL No.Z22X00406)                                                                                                                                                  | Jan-23                 |
| Calibrated by:                                                                                                                                                                                                                                                             | Name: Zhao Jing                                                    | Function: SAR Test Engineer                                                                                                                                                    | Signature: [Signature] |
| Reviewed by:                                                                                                                                                                                                                                                               | Name: Lin Hao                                                      | Function: SAR Test Engineer                                                                                                                                                    | Signature: [Signature] |
| Approved by:                                                                                                                                                                                                                                                               | Name: Qi Diaryuan                                                  | Function: SAR Project Leader                                                                                                                                                   | Signature: [Signature] |
| Issued: April 6, 2022                                                                                                                                                                                                                                                      |                                                                    |                                                                                                                                                                                |                        |
| This calibration certificate shall not be reproduced except in full without written approval of the laboratory.                                                                                                                                                            |                                                                    |                                                                                                                                                                                |                        |
| Certificate No: Z22-60108                                                                                                                                                                                                                                                  |                                                                    | Page 1 of 6                                                                                                                                                                    |                        |

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                               |                          | CAICT                                                                                                                                                                          |                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                          | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |                  |
| <b>Measurement Conditions</b><br>DASY system configuration, as far as not given on page 1.                                                                                     |                          |                                                                                                                                                                                |                  |
| DASY Version                                                                                                                                                                   | DASY52                   | 52.10.4                                                                                                                                                                        |                  |
| Extrapolation                                                                                                                                                                  | Advanced Extrapolation   |                                                                                                                                                                                |                  |
| Phantom                                                                                                                                                                        | Triple Flat Phantom 5.1C |                                                                                                                                                                                |                  |
| Distance Dipole Center - TSL                                                                                                                                                   | 10 mm                    | with Spacer                                                                                                                                                                    |                  |
| Zoom Scan Resolution                                                                                                                                                           | dx, dy, dz = 5 mm        |                                                                                                                                                                                |                  |
| Frequency                                                                                                                                                                      | 2600 MHz ± 1 MHz         |                                                                                                                                                                                |                  |
| <b>Head TSL parameters</b><br>The following parameters and calculations were applied:                                                                                          |                          |                                                                                                                                                                                |                  |
|                                                                                                                                                                                | Temperature              | Permittivity                                                                                                                                                                   | Conductivity     |
| Nominal Head TSL parameters                                                                                                                                                    | 22.0 °C                  | 39.0                                                                                                                                                                           | 1.96 mho/m       |
| Measured Head TSL parameters                                                                                                                                                   | (22.0 ± 0.2) °C          | 38.7 ± 6 %                                                                                                                                                                     | 1.96 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                        | <1.0 °C                  | ---                                                                                                                                                                            | ---              |
| <b>SAR result with Head TSL</b>                                                                                                                                                |                          |                                                                                                                                                                                |                  |
| SAR averaged over 1 cm² (1 g) of Head TSL                                                                                                                                      | Condition                |                                                                                                                                                                                |                  |
| SAR measured                                                                                                                                                                   | 250 mW input power       | 13.7 W/kg                                                                                                                                                                      |                  |
| SAR for nominal Head TSL parameters                                                                                                                                            | normalized to 1W         | 54.8 W/kg ± 18.8 % (k=2)                                                                                                                                                       |                  |
| SAR averaged over 10 cm² (10 g) of Head TSL                                                                                                                                    | Condition                |                                                                                                                                                                                |                  |
| SAR measured                                                                                                                                                                   | 250 mW input power       | 6.12 W/kg                                                                                                                                                                      |                  |
| SAR for nominal Head TSL parameters                                                                                                                                            | normalized to 1W         | 24.6 W/kg ± 18.7 % (k=2)                                                                                                                                                       |                  |
| Certificate No: Z22-60108                                                                                                                                                      |                          | Page 3 of 6                                                                                                                                                                    |                  |

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                      |                                | CAICT                                                                                                                                                                          |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                        |                                | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |  |
| <b>Glossary:</b>                                                                                                                                                                                                                                                                                                      |                                |                                                                                                                                                                                |  |
| TSL                                                                                                                                                                                                                                                                                                                   | tissue simulating liquid       |                                                                                                                                                                                |  |
| ConvF                                                                                                                                                                                                                                                                                                                 | sensitivity in TSL / NORMx.y.z |                                                                                                                                                                                |  |
| N/A                                                                                                                                                                                                                                                                                                                   | not applicable or not measured |                                                                                                                                                                                |  |
| <b>Calibration is Performed According to the Following Standards:</b>                                                                                                                                                                                                                                                 |                                |                                                                                                                                                                                |  |
| a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 |                                |                                                                                                                                                                                |  |
| b) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"                                                                                                                                                                                                                                                    |                                |                                                                                                                                                                                |  |
| <b>Additional Documentation:</b>                                                                                                                                                                                                                                                                                      |                                |                                                                                                                                                                                |  |
| c) DASY4/S System Handbook                                                                                                                                                                                                                                                                                            |                                |                                                                                                                                                                                |  |
| <b>Methods Applied and Interpretation of Parameters:</b>                                                                                                                                                                                                                                                              |                                |                                                                                                                                                                                |  |
| • <b>Measurement Conditions:</b> Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.                                                                                                                  |                                |                                                                                                                                                                                |  |
| • <b>Antenna Parameters with TSL:</b> The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.                                                                                                |                                |                                                                                                                                                                                |  |
| • <b>Feed Point Impedance and Return Loss:</b> These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.       |                                |                                                                                                                                                                                |  |
| • <b>Electrical Delay:</b> One-way delay between the SMA connector and the antenna feed point. No uncertainty required.                                                                                                                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>SAR measured:</b> SAR measured at the stated antenna input power.                                                                                                                                                                                                                                                |                                |                                                                                                                                                                                |  |
| • <b>SAR normalized:</b> SAR as measured, normalized to an input power of 1 W at the antenna connector.                                                                                                                                                                                                               |                                |                                                                                                                                                                                |  |
| • <b>SAR for nominal TSL parameters:</b> The measured TSL parameters are used to calculate the nominal SAR result.                                                                                                                                                                                                    |                                |                                                                                                                                                                                |  |
| The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.                                                                                       |                                |                                                                                                                                                                                |  |
| Certificate No: Z22-60108                                                                                                                                                                                                                                                                                             |                                | Page 2 of 6                                                                                                                                                                    |  |

| TTL Speaq CALIBRATION LABORATORY                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |               | CAICT                                                                                                                                                                          |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn                                                                                                                                                                                                                                                                                                                                              |               | Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504<br>E-mail: cti@chinaatl.com http://www.chinaatl.cn |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                    |               |                                                                                                                                                                                |  |
| <b>Antenna Parameters with Head TSL</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |               |                                                                                                                                                                                |  |
| Impedance, transformed to feed point                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | 49.90- 6.49jΩ |                                                                                                                                                                                |  |
| Return Loss                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | > 23.8dB      |                                                                                                                                                                                |  |
| <b>General Antenna Parameters and Design</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |               |                                                                                                                                                                                |  |
| Electrical Delay (one direction)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | 1.053 ns      |                                                                                                                                                                                |  |
| After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.                                                                                                                                                                                                                                                                                                                                                                                                      |               |                                                                                                                                                                                |  |
| The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. |               |                                                                                                                                                                                |  |
| No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.                                                                                                                                                                                                                                                                                                                                                                              |               |                                                                                                                                                                                |  |
| <b>Additional EUT Data</b>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |               |                                                                                                                                                                                |  |
| Manufactured by                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | SPEAG         |                                                                                                                                                                                |  |
| Certificate No: Z22-60108                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |               | Page 4 of 6                                                                                                                                                                    |  |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weyue Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com](http://www.sgs.com)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

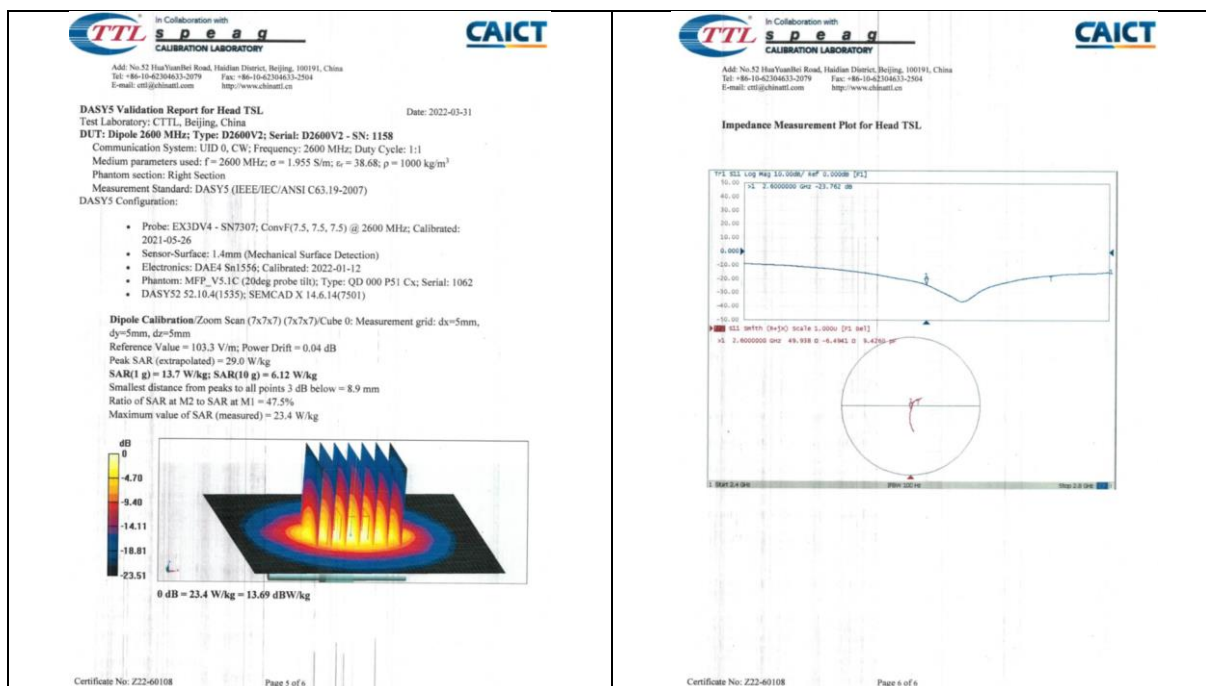

## 1.12 D5GHZV2 - SN 1095

**TTL S p e a g**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

**Client: SGS-CN Certificate No: Z22-60187**

**CALIBRATION CERTIFICATE**

Object: D5GHZV2 - SN: 1095

Calibration Procedure(s): FF-Z11-003-01  
Calibration Procedures for dipole validation kits

Calibration date: June 1, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards      | ID #    | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|------------------------|---------|-------------------------------------------|-----------------------|
| Power Meter NRP2       | 106277  | 24-Sep-21 (CTTL No.J21008328)             | Sep-22                |
| Power sensor NRP8S     | 104201  | 24-Sep-21 (CTTL No.J21008328)             | Sep-22                |
| Reference Probe EX3DV4 | SN 7464 | 26-Jan-22(SPEAG No EX3-7464, Jan22)       | Jan-23                |
| DAE4                   | SN 1556 | 12-Jan-22(CTTL-SPEAG No.Z22-60007)        | Jan-23                |

| Secondary Standards     | ID #       | Cal Date (Calibrated by: Certificate No.) | Scheduled Calibration |
|-------------------------|------------|-------------------------------------------|-----------------------|
| Signal Generator E4438C | MY48071430 | 13-Jan-22 (CTTL No.J22000408)             | Jan-23                |
| Network Analyzer E5071C | MY46110673 | 14-Jan-22 (CTTL No.J22000406)             | Jan-23                |

Calibrated by: Zhao Jing SAR Test Engineer

Reviewed by: Lin Hao SAR Test Engineer

Approved by: Qi Dianyan SAR Project Leader

Issued: June 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60187 Page 1 of 10

**TTL S p e a g**  
CALIBRATION LABORATORY

Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62104633-2079 Fax: +86-10-62104633-2504  
E-mail: cti@china.ttl.com http://www.china.ttl.com

**CAICT**

**Glossary:**

TSL Issue simulating liquid

CorrF sensitivity in TSL / NORMx,y,z

N/A not applicable or not measured

**Calibration is Performed According to the Following Standards:**

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020

b) KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

**Additional Documentation:**

c) DASY5 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60187 Page 2 of 10



| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                               |                                                                              | <b>CAICT</b>                     |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62362117<br>E-mail: <a href="mailto:cnlg@chinaetl.com">cnlg@chinaetl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |                                                                              |                                  |                  |
| <b>Measurement Conditions</b><br>GSEY system configuration, as far as not given on page 1.                                                                                                                                   |                                                                              |                                  |                  |
| DASY Version                                                                                                                                                                                                                 | DASY2                                                                        | 52.10.4                          |                  |
| Extrapolation                                                                                                                                                                                                                | Advanced Extrapolation                                                       |                                  |                  |
| Phantom                                                                                                                                                                                                                      | Triple Flat Phantom 5.1C                                                     |                                  |                  |
| Distance Dipole Center - TSL                                                                                                                                                                                                 | 10 mm                                                                        | with Spacer                      |                  |
| Zoom Scan Resolution                                                                                                                                                                                                         | dx, dy = 4 mm, dz = 1.4 mm                                                   | Graded Ratio = 1.4 (Z direction) |                  |
| Frequency                                                                                                                                                                                                                    | 5200 MHz ± 1 MHz<br>5300 MHz ± 1 MHz<br>5500 MHz ± 1 MHz<br>5600 MHz ± 1 MHz |                                  |                  |
| <b>Head TSL parameters at 5200MHz</b><br>The following parameters and calculations were applied.                                                                                                                             |                                                                              |                                  |                  |
| Nominal Head TSL parameters                                                                                                                                                                                                  | Temperature                                                                  | Permittivity                     | Conductivity     |
|                                                                                                                                                                                                                              | 22.0 °C                                                                      | 35.9                             | 4.76 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                 | (22.0 ± 0.2) °C                                                              | 35.2 ± 6 %                       | 4.73 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                      | <1.0 °C                                                                      | ---                              | ---              |
| <b>SAR result with Head TSL at 5200MHz</b>                                                                                                                                                                                   |                                                                              |                                  |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                        | Condition                                                                    |                                  |                  |
| SAR measured                                                                                                                                                                                                                 | 250 mW input power                                                           | 7.79 W/kg                        |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W                                                             | 77.8 W/kg ± 24.4 % (k=2)         |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                      | Condition                                                                    |                                  |                  |
| SAR measured                                                                                                                                                                                                                 | 250 mW input power                                                           | 2.22 W/kg                        |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W                                                             | 22.1 W/kg ± 24.2 % (k=2)         |                  |
| Certificate No: Z22-60187 Page 3 of 10                                                                                                                                                                                       |                                                                              |                                  |                  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                               |                    | <b>CAICT</b>             |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62362117<br>E-mail: <a href="mailto:cnlg@chinaetl.com">cnlg@chinaetl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |                    |                          |                  |
| <b>Head TSL parameters at 5300MHz</b><br>The following parameters and calculations were applied.                                                                                                                             |                    |                          |                  |
| Nominal Head TSL parameters                                                                                                                                                                                                  | Temperature        | Permittivity             | Conductivity     |
|                                                                                                                                                                                                                              | 22.0 °C            | 35.9                     | 4.76 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                 | (22.0 ± 0.2) °C    | 35.2 ± 6 %               | 4.73 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                      | <1.0 °C            | ---                      | ---              |
| <b>SAR result with Head TSL at 5300MHz</b>                                                                                                                                                                                   |                    |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                        | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 7.94 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 79.1 W/kg ± 24.4 % (k=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                      | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 2.27 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 22.6 W/kg ± 24.2 % (k=2) |                  |
| <b>Head TSL parameters at 5500MHz</b><br>The following parameters and calculations were applied.                                                                                                                             |                    |                          |                  |
| Nominal Head TSL parameters                                                                                                                                                                                                  | Temperature        | Permittivity             | Conductivity     |
|                                                                                                                                                                                                                              | 22.0 °C            | 35.8                     | 4.96 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                 | (22.0 ± 0.2) °C    | 34.8 ± 6 %               | 4.94 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                      | <1.0 °C            | ---                      | ---              |
| <b>SAR result with Head TSL at 5500MHz</b>                                                                                                                                                                                   |                    |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                        | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 8.29 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 82.6 W/kg ± 24.4 % (k=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                      | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 2.34 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 23.3 W/kg ± 24.2 % (k=2) |                  |
| Certificate No: Z22-60187 Page 4 of 10                                                                                                                                                                                       |                    |                          |                  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                               |                    | <b>CAICT</b>             |                  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|--------------------------|------------------|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62362117<br>E-mail: <a href="mailto:cnlg@chinaetl.com">cnlg@chinaetl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |                    |                          |                  |
| <b>Head TSL parameters at 5600MHz</b><br>The following parameters and calculations were applied.                                                                                                                             |                    |                          |                  |
| Nominal Head TSL parameters                                                                                                                                                                                                  | Temperature        | Permittivity             | Conductivity     |
|                                                                                                                                                                                                                              | 22.0 °C            | 35.5                     | 5.07 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                 | (22.0 ± 0.2) °C    | 34.7 ± 6 %               | 5.05 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                      | <1.0 °C            | ---                      | ---              |
| <b>SAR result with Head TSL at 5600MHz</b>                                                                                                                                                                                   |                    |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                        | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 8.12 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 80.8 W/kg ± 24.4 % (k=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                      | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 2.30 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 22.9 W/kg ± 24.2 % (k=2) |                  |
| <b>Head TSL parameters at 5800MHz</b><br>The following parameters and calculations were applied.                                                                                                                             |                    |                          |                  |
| Nominal Head TSL parameters                                                                                                                                                                                                  | Temperature        | Permittivity             | Conductivity     |
|                                                                                                                                                                                                                              | 22.0 °C            | 35.3                     | 5.27 mho/m       |
| Measured Head TSL parameters                                                                                                                                                                                                 | (22.0 ± 0.2) °C    | 34.4 ± 6 %               | 5.25 mho/m ± 6 % |
| Head TSL temperature change during test                                                                                                                                                                                      | <1.0 °C            | ---                      | ---              |
| <b>SAR result with Head TSL at 5800MHz</b>                                                                                                                                                                                   |                    |                          |                  |
| SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL                                                                                                                                                                        | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 7.71 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 76.7 W/kg ± 24.4 % (k=2) |                  |
| SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL                                                                                                                                                                      | Condition          |                          |                  |
| SAR measured                                                                                                                                                                                                                 | 100 mW input power | 2.16 W/kg                |                  |
| SAR for nominal Head TSL parameters                                                                                                                                                                                          | normalized to 1W   | 21.8 W/kg ± 24.2 % (k=2) |                  |
| Certificate No: Z22-60187 Page 5 of 10                                                                                                                                                                                       |                    |                          |                  |

| In Collaboration with<br><b>TTL</b> <b>s p e a g</b><br>CALIBRATION LABORATORY                                                                                                                                               |              | <b>CAICT</b> |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|--------------|--|
| Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br>Tel: +86-10-62362117<br>E-mail: <a href="mailto:cnlg@chinaetl.com">cnlg@chinaetl.com</a> <a href="http://www.caict.ac.cn">http://www.caict.ac.cn</a> |              |              |  |
| <b>Appendix (Additional assessments outside the scope of CNAS L0570)</b>                                                                                                                                                     |              |              |  |
| <b>Antenna Parameters with Head TSL at 5200MHz</b>                                                                                                                                                                           |              |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                         | 48.1D-5.03jΩ |              |  |
| Return Loss                                                                                                                                                                                                                  | -23.8dB      |              |  |
| <b>Antenna Parameters with Head TSL at 5300MHz</b>                                                                                                                                                                           |              |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                         | 47.8D-2.42jΩ |              |  |
| Return Loss                                                                                                                                                                                                                  | -28.5dB      |              |  |
| <b>Antenna Parameters with Head TSL at 5500MHz</b>                                                                                                                                                                           |              |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                         | 50.3D-4.26jΩ |              |  |
| Return Loss                                                                                                                                                                                                                  | -27.4dB      |              |  |
| <b>Antenna Parameters with Head TSL at 5600MHz</b>                                                                                                                                                                           |              |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                         | 54.5D-4.80jΩ |              |  |
| Return Loss                                                                                                                                                                                                                  | -24.0dB      |              |  |
| <b>Antenna Parameters with Head TSL at 5800MHz</b>                                                                                                                                                                           |              |              |  |
| Impedance, transformed to feed point                                                                                                                                                                                         | 51.5D-5.61jΩ |              |  |
| Return Loss                                                                                                                                                                                                                  | -24.9dB      |              |  |
| Certificate No: Z22-60187 Page 6 of 10                                                                                                                                                                                       |              |              |  |




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weyue Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>In Collaboration with<br/><b>TTL</b> <b>s p e a q</b><br/>CALIBRATION LABORATORY</p> <p>CAICT</p> <p>Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br/>Tel: +86-10-62502117<br/>E-mail: cti@chinaetl.com http://www.caict.ac.cn</p> <p><b>General Antenna Parameters and Design</b></p> <p>Electrical Delay (one direction) 1.101 ns</p> <p>After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.</p> <p>The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.</p> <p>No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.</p> <p><b>Additional EUT Data</b></p> <p>Manufactured by SPEAG</p> <p>Certificate No: Z22-60187 Page 7 of 10</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                   | <p>In Collaboration with<br/><b>TTL</b> <b>s p e a q</b><br/>CALIBRATION LABORATORY</p> <p>CAICT</p> <p>Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br/>Tel: +86-10-62502117<br/>E-mail: cti@chinaetl.com http://www.caict.ac.cn</p> <p><b>DASY5 Validation Report for Head TSL</b></p> <p>Test Laboratory: CTTL, Beijing, China<br/>Date: 2022-06-01</p> <p><b>DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095</b></p> <p>Communication System: CW; Frequency: 5200 MHz; Frequency: 5300 MHz;<br/>Frequency: 5500 MHz; Frequency: 5600 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1<br/>Medium parameters used: <math>f = 5200</math> MHz; <math>\sigma = 4.62</math> S/m; <math>\epsilon_r = 35.19</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Medium parameters used: <math>f = 5300</math> MHz; <math>\sigma = 4.73</math> S/m; <math>\epsilon_r = 35.19</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Medium parameters used: <math>f = 5500</math> MHz; <math>\sigma = 4.939</math> S/m; <math>\epsilon_r = 34.83</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Medium parameters used: <math>f = 5600</math> MHz; <math>\sigma = 5.051</math> S/m; <math>\epsilon_r = 34.89</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Medium parameters used: <math>f = 5800</math> MHz; <math>\sigma = 5.247</math> S/m; <math>\epsilon_r = 34.42</math>; <math>\rho = 1000</math> kg/m<sup>3</sup><br/>Phantom section: Right Section<br/>Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)<br/>DASY5 Configuration:</p> <ul style="list-style-type: none"><li>Probe: EX3DV4 - SN7484; ConvF(5.6, 5.6) @ 5200 MHz; ConvF(5.32, 5.32) @ 5300 MHz; ConvF(5.11, 5.11, 5.11) @ 5500 MHz; ConvF(4.91, 4.91, 4.91) @ 5600 MHz; ConvF(5, 5, 5) @ 5800 MHz; Calibrated: 2022-01-26</li><li>Sensor-Surface: 1.4mm (Mechanical Surface Detection)</li><li>Electronics: DA64 Sn1556; Calibrated: 2022-01-12</li><li>Phantom: MPF_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062</li><li>DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501)</li></ul> <p><b>Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b><br/>Reference Value = 60.80 V/m; Power Drift = -0.06 dB<br/>Peak SAR (extrapolated) = 29.8 W/kg<br/>SAR(1 g) = 7.79 W/kg; SAR(10 g) = 2.22 W/kg<br/>Smallest distance from peaks to all points 3 dB below = 7.2 mm<br/>Ratio of SAR at M2 to SAR at M1 = 66.8%<br/>Maximum value of SAR (measured) = 18.3 W/kg</p> <p><b>Dipole Calibration /Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b><br/>Reference Value = 61.08 V/m; Power Drift = -0.07 dB<br/>Peak SAR (extrapolated) = 31.5 W/kg<br/>SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg<br/>Smallest distance from peaks to all points 3 dB below = 7.2 mm<br/>Ratio of SAR at M2 to SAR at M1 = 65.5%<br/>Maximum value of SAR (measured) = 19.0 W/kg</p> <p>Certificate No: Z22-60187 Page 8 of 10</p> |
| <p>In Collaboration with<br/><b>TTL</b> <b>s p e a q</b><br/>CALIBRATION LABORATORY</p> <p>CAICT</p> <p>Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br/>Tel: +86-10-62502117<br/>E-mail: cti@chinaetl.com http://www.caict.ac.cn</p> <p><b>Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b><br/>Reference Value = 61.92 V/m; Power Drift = -0.08 dB<br/>Peak SAR (extrapolated) = 34.7 W/kg<br/>SAR(1 g) = 8.28 W/kg; SAR(10 g) = 2.34 W/kg<br/>Smallest distance from peaks to all points 3 dB below = 7.2 mm<br/>Ratio of SAR at M2 to SAR at M1 = 63.9%<br/>Maximum value of SAR (measured) = 20.2 W/kg</p> <p><b>Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b><br/>Reference Value = 65.08 V/m; Power Drift = -0.07 dB<br/>Peak SAR (extrapolated) = 35.2 W/kg<br/>SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg<br/>Smallest distance from peaks to all points 3 dB below = 7.2 mm<br/>Ratio of SAR at M2 to SAR at M1 = 62.5%<br/>Maximum value of SAR (measured) = 19.1 W/kg</p> <p><b>Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm</b><br/>Reference Value = 62.13 V/m; Power Drift = -0.06 dB<br/>Peak SAR (extrapolated) = 34.8 W/kg<br/>SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.16 W/kg<br/>Smallest distance from peaks to all points 3 dB below = 7.2 mm<br/>Ratio of SAR at M2 to SAR at M1 = 61.6%<br/>Maximum value of SAR (measured) = 18.7 W/kg</p> <p><b>0 dB = 16.7 W/kg = 12.72 dBW/kg</b></p> <p>Certificate No: Z22-60187 Page 9 of 10</p> | <p>In Collaboration with<br/><b>TTL</b> <b>s p e a q</b><br/>CALIBRATION LABORATORY</p> <p>CAICT</p> <p>Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China<br/>Tel: +86-10-62502117<br/>E-mail: cti@chinaetl.com http://www.caict.ac.cn</p> <p><b>Impedance Measurement Plot for Head TSL</b></p>  <p>Certificate No: Z22-60187 Page 10 of 10</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

## 2 DAE4 - SN 1245

| <p>Schmid &amp; Partner Engineering AG<br/>Zeughausstrasse 43, 8004 Zurich, Switzerland<br/>Phone +41 44 245 9700, Fax +41 44 245 9770<br/>www.spgs.ch, info@spgs.ch</p> <p style="text-align: center;"><b>s p e a g</b></p> <p style="text-align: center;"><b>IMPORTANT NOTICE</b></p> <p><b>USAGE OF THE DAE4</b></p> <p>The DAE unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE. Special attention shall be given to the following points:</p> <p><b>Battery Exchange:</b> The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE to wear out.</p> <p><b>Shipping of the DAE:</b> Before shipping the DAE to SPEAG for calibration, remove the batteries and pack the DAE in an anti-static bag. This anti-static bag shall then be packed into a larger box or container which protects the DAE from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside.</p> <p><b>E-stop Failures:</b> Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE carefully and keep the DAE unit in a non-dusty environment if not used for measurements.</p> <p><b>Repair:</b> Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect.</p> <p><b>DASY Configuration Files:</b> Since the exact values of the DAE input resistances, as measured during the calibration procedure of a DAE unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file.</p> <p><b>Important Note:</b><br/>Warranty and calibration is void if the DAE unit is disassembled partly or fully by the Customer.</p> <p><b>Important Note:</b><br/>Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure.</p> <p><b>Important Note:</b><br/>To prevent damage of the DAE probe connector pins, use great care when installing the probe to the DAE. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE.</p> <p>TN_EH190306AE_DAE4.docx 07.03.2019</p> | <p>Calibration Laboratory of<br/>Schmid &amp; Partner<br/>Engineering AG<br/>Zeughausstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>The Swiss Accreditation Service is one of the signatories to the EA<br/>Multilateral Agreement for the recognition of calibration certificates</p> <p>Accreditation No.: SCS 0108</p> <p>Client: <b>SGS-CN (Auden)</b> Certificate No.: <b>DAE4-1245_May22</b></p> <p><b>CALIBRATION CERTIFICATE</b></p> <p>Object: <b>DAE4 - SD 000 D04 BM - SN: 1245</b></p> <p>Calibration procedure(s): <b>QA CAL-06 v30</b><br/>Calibration procedure for the data acquisition electronics (DAE)</p> <p>Calibration date: <b>May 30, 2022</b></p> <p>This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.</p> <p>All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 3) °C and humidity &lt; 70%.</p> <p>Calibration Equipment used (MATE critical for calibration)</p> <table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Kelvin Multimeter Type 2001</td><td>SN: 0810276</td><td>31-Aug-21 (No.31368)</td><td>Aug-22</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Check Date (in house)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Auto DAE Calibration Unit</td><td>SE LWS 003 AA 1001</td><td>24-Jan-22 (in house check)</td><td>In house check: Jan-23</td></tr><tr><td>Calibrator Blue V2.1</td><td>SE LWS 006 AA 1002</td><td>24-Jan-22 (in house check)</td><td>In house check: Jan-23</td></tr></tbody></table> <p>Calibrated by: <b>Dominique Stettin</b> Function: <b>Laboratory Technician</b> Signature: <i>[Signature]</i></p> <p>Approved by: <b>Ben Kohn</b> Technical Manager Signature: <i>[Signature]</i></p> <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory. Issued: May 30, 2022</p> <p>Certificate No: DAE4-1245_May22 Page 1 of 5</p> | Primary Standards          | ID #                   | Cal Date (Certificate No.) | Scheduled Calibration | Kelvin Multimeter Type 2001 | SN: 0810276           | 31-Aug-21 (No.31368)  | Aug-22                | Secondary Standards | ID #                  | Check Date (in house) | Scheduled Check       | Auto DAE Calibration Unit                 | SE LWS 003 AA 1001 | 24-Jan-22 (in house check) | In house check: Jan-23 | Calibrator Blue V2.1 | SE LWS 006 AA 1002 | 24-Jan-22 (in house check) | In house check: Jan-23 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|------------------------|----------------------------|-----------------------|-----------------------------|-----------------------|-----------------------|-----------------------|---------------------|-----------------------|-----------------------|-----------------------|-------------------------------------------|--------------------|----------------------------|------------------------|----------------------|--------------------|----------------------------|------------------------|
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | ID #                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Cal Date (Certificate No.) | Scheduled Calibration  |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Kelvin Multimeter Type 2001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | SN: 0810276                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 31-Aug-21 (No.31368)       | Aug-22                 |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | ID #                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | Check Date (in house)      | Scheduled Check        |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Auto DAE Calibration Unit                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | SE LWS 003 AA 1001                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 24-Jan-22 (in house check) | In house check: Jan-23 |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Calibrator Blue V2.1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | SE LWS 006 AA 1002                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 24-Jan-22 (in house check) | In house check: Jan-23 |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| <p>Calibration Laboratory of<br/>Schmid &amp; Partner<br/>Engineering AG<br/>Zeughausstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>The Swiss Accreditation Service is one of the signatories to the EA<br/>Multilateral Agreement for the recognition of calibration certificates</p> <p>Accreditation No.: SCS 0108</p> <p><b>Glossary</b></p> <p>DAE: data acquisition electronics<br/>Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system.</p> <p><b>Methods Applied and Interpretation of Parameters</b></p> <ul style="list-style-type: none"><li>• <b>DC Voltage Measurement:</b> Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.</li><li>• <b>Connector angle:</b> The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.</li><li>• The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty.</li><li>• <b>DC Voltage Measurement Linearity:</b> Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement.</li><li>• <b>Common mode sensitivity:</b> Influence of a positive or negative common mode voltage on the differential measurement.</li><li>• <b>Channel separation:</b> Influence of a voltage on the neighbor channels not subject to an input voltage.</li><li>• <b>AD Converter Values with inputs shorted:</b> Values on the internal AD converter corresponding to zero input voltage.</li><li>• <b>Input Offset Measurement:</b> Output voltage and statistical results over a large number of zero voltage measurements.</li><li>• <b>Input Offset Current:</b> Typical value for information; Maximum channel input offset current, not considering the input resistance.</li><li>• <b>Input resistance:</b> Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement.</li><li>• <b>Low Battery Alarm Voltage:</b> Typical value for information. Below this voltage, a battery alarm signal is generated.</li><li>• <b>Power consumption:</b> Typical value for information. Supply currents in various operating modes.</li></ul> <p>Certificate No: DAE4-1245_May22 Page 2 of 5</p>                                                                                                                                                                                                                                                 | <p><b>DC Voltage Measurement</b></p> <p>AD - Converter Resolution nominal<br/>High Range: 1LSB = 6.1 μV, full range = -190...+320 mV<br/>Low Range: 1LSB = 61 μV, full range = -1...+3 mV<br/>DASY measurement parameters: Auto Zero-Time: 3 sec; Measuring time: 3 sec</p> <table border="1"><thead><tr><th>Calibration Factors</th><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>High Range</td><td>405.265 ± 0.02% (k=2)</td><td>403.974 ± 0.02% (k=2)</td><td>406.092 ± 0.02% (k=2)</td></tr><tr><td>Low Range</td><td>3.99534 ± 1.50% (k=2)</td><td>3.99508 ± 1.50% (k=2)</td><td>4.01015 ± 1.50% (k=2)</td></tr></tbody></table> <p><b>Connector Angle</b></p> <table border="1"><thead><tr><th>Connector Angle to be used in DASY system</th><th>30.0° ± 1°</th></tr></thead></table> <p>Certificate No: DAE4-1245_May22 Page 3 of 5</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | Calibration Factors        | X                      | Y                          | Z                     | High Range                  | 405.265 ± 0.02% (k=2) | 403.974 ± 0.02% (k=2) | 406.092 ± 0.02% (k=2) | Low Range           | 3.99534 ± 1.50% (k=2) | 3.99508 ± 1.50% (k=2) | 4.01015 ± 1.50% (k=2) | Connector Angle to be used in DASY system | 30.0° ± 1°         |                            |                        |                      |                    |                            |                        |
| Calibration Factors                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            | X                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | Y                          | Z                      |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| High Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 405.265 ± 0.02% (k=2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 403.974 ± 0.02% (k=2)      | 406.092 ± 0.02% (k=2)  |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Low Range                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 3.99534 ± 1.50% (k=2)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | 3.99508 ± 1.50% (k=2)      | 4.01015 ± 1.50% (k=2)  |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |
| Connector Angle to be used in DASY system                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | 30.0° ± 1°                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                            |                        |                            |                       |                             |                       |                       |                       |                     |                       |                       |                       |                                           |                    |                            |                        |                      |                    |                            |                        |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic formal documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgsgroup.com.cn](http://www.sgsgroup.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

#### Appendix (Additional assessments outside the scope of SCS0108)

### 1. DC Voltage Linearity

| X voltage Linearity |                           |                              |           |
|---------------------|---------------------------|------------------------------|-----------|
|                     | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
| Channel X + Input   | 199994.45                 | 1.62                         | 0.00      |
| Channel X - Input   | 200004.58                 | 2.22                         | 0.01      |
| Channel X + Input   | 200000.14                 | 1.12                         | -0.01     |
| Channel Y + Input   | 199994.72                 | 1.50                         | 0.00      |
| Channel Y - Input   | 200001.22                 | 1.90                         | -0.00     |
| Channel Z + Input   | 200000.05                 | -1.57                        | 0.01      |
| Channel Z - Input   | 199992.84                 | 0.19                         | 0.00      |
| Channel Z + Input   | 200003.99                 | 0.98                         | 0.00      |
| Channel Z - Input   | -00001.73                 | -0.27                        | 0.00      |

| Y voltage Linearity |                           |                              |           |
|---------------------|---------------------------|------------------------------|-----------|
|                     | Reading ( $\mu\text{V}$ ) | Difference ( $\mu\text{V}$ ) | Error (%) |
| Channel X + Input   | 2001.91                   | 0.41                         | 0.02      |
| Channel X - Input   | 2002.54                   | 0.95                         | 0.32      |
| Channel X + Input   | 1997.06                   | -0.07                        | -0.04     |
| Channel Y + Input   | 2002.05                   | 0.56                         | 0.03      |
| Channel Y - Input   | 2001.27                   | -0.07                        | -0.03     |
| Channel Y + Input   | 1998.23                   | -0.56                        | 0.03      |
| Channel Z + Input   | 2001.08                   | 0.18                         | 0.00      |
| Channel Z - Input   | 2000.09                   | -1.03                        | -0.76     |
| Channel Z + Input   | 1999.85                   | -1.87                        | 0.79      |

## 2. Common mode sensitivity

**Common mode sensitivity**  
DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

| Parameters: Auto Zero Time: 3 sec, Measuring time: 3 sec |                                   |                                    |                                   |
|----------------------------------------------------------|-----------------------------------|------------------------------------|-----------------------------------|
|                                                          | Common mode<br>Input Voltage (mV) | High Range<br>Average Reading (µV) | Low Range<br>Average Reading (µV) |
| Channel X                                                | 200                               | -5.87                              | -7.69                             |
|                                                          | -200                              | 9.12                               | 7.79                              |
| Channel Y                                                | 200                               | -8.68                              | -9.28                             |
|                                                          | -200                              | 8.52                               | 8.38                              |
| Channel Z                                                | 200                               | -5.38                              | -5.60                             |
|                                                          | -200                              | 5.50                               | 5.00                              |

### 3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Input Voltage (mV) | Channel X ( $\mu$ V) | Channel Y ( $\mu$ V) | Channel Z ( $\mu$ V) |
|-----------|--------------------|----------------------|----------------------|----------------------|
| Channel X | 200                | -                    | 4.07                 | -3.14                |
| Channel Y | 200                | 9.36                 | -                    | 4.27                 |
| Channel Z | 200                | 10.11                | 7.14                 | -                    |

Certificate No: DAE4-1245, May22

Page 4 of 6

#### 4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | High Range (LSB) | Low Range (LSB) |
|-----------|------------------|-----------------|
| Channel X | 15984            | 17040           |
| Channel Y | 16562            | 16768           |
| Channel Z | 16035            | 15958           |

### 5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

|           | Average ( $\mu\text{V}$ ) | min. Offset ( $\mu\text{V}$ ) | max. Offset ( $\mu\text{V}$ ) | Std. Deviation ( $\mu\text{V}$ ) |
|-----------|---------------------------|-------------------------------|-------------------------------|----------------------------------|
| Channel X | 1.00                      | -0.15                         | 1.93                          | 0.45                             |
| Channel Y | -0.18                     | -1.26                         | 0.94                          | 0.45                             |
| Channel Z | -0.58                     | -2.61                         | 0.58                          | 0.60                             |

### 6. Input Offset Current

Nominal input circuitry offset current on all channels:  $\pm 250$

| Input Resistance (Typical values for information) |                |                  |
|---------------------------------------------------|----------------|------------------|
|                                                   | Zeroing (kOhm) | Measuring (MOhm) |
| Channel X                                         | 200            | 200              |
| Channel Y                                         | 200            | 200              |
| Channel Z                                         | 200            | 200              |

### 8. Low Battery Alarm Voltage (Typical values for information)

| Terminal number | Alarm Level (VDC) |
|-----------------|-------------------|
| 1               | 12.0              |
| 2               | 11.5              |
| 3               | 11.0              |
| 4               | 10.5              |
| 5               | 10.0              |
| 6               | 9.5               |
| 7               | 9.0               |
| 8               | 8.5               |
| 9               | 8.0               |
| 10              | 7.5               |
| 11              | 7.0               |
| 12              | 6.5               |
| 13              | 6.0               |
| 14              | 5.5               |
| 15              | 5.0               |
| 16              | 4.5               |
| 17              | 4.0               |
| 18              | 3.5               |
| 19              | 3.0               |
| 20              | 2.5               |
| 21              | 2.0               |
| 22              | 1.5               |
| 23              | 1.0               |
| 24              | 0.5               |
| 25              | 0.0               |

| Typical values | Alarm Level (VDC) |
|----------------|-------------------|
| Supply (+ Vcc) | +7.9              |
| Supply (- Vcc) | -7.6              |

### 9. Power Consumption (Typical values for information)

[illegible]

| Typical values | Switched off (mA) | Stand by (mA) | Transmitting (mA) |
|----------------|-------------------|---------------|-------------------|
| Supply (+ Vcc) | +0.01             | +6            | +14               |
| Supply (- Vcc) | -0.01             | -8            | -9                |

Certificate No: DAE4-1245, May21

Page 5 of 5

**3 EX3DV4 - SN 7767**

| <p><b>Calibration Laboratory of</b><br/> <b>Schmid &amp; Partner</b><br/> <b>Engineering AG</b><br/>         Zeughausstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>         The Swiss Accreditation Service is one of the signatories to the EA<br/>         Multilateral Agreement for the recognition of calibration certificates</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       | <br> | <p>S Schweizerischer Kalibrierdienst<br/>         S Service suisse d'étalonnage<br/>         Servizio svizzero di taratura<br/>         Swiss Calibration Service</p> | <p><b>Calibration Laboratory of</b><br/> <b>Schmid &amp; Partner</b><br/> <b>Engineering AG</b><br/>         Zeughausstrasse 43, 8004 Zurich, Switzerland</p> <p>Accredited by the Swiss Accreditation Service (SAS)<br/>         The Swiss Accreditation Service is one of the signatories to the EA<br/>         Multilateral Agreement for the recognition of calibration certificates</p> | <br> | <p>S Schweizerischer Kalibrierdienst<br/>         S Service suisse d'étalonnage<br/>         Servizio svizzero di taratura<br/>         Swiss Calibration Service</p> |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|-------------------------|-----------------------------------|--------------------------------------------------------------------------------------------------|--------------------|-----------------|---------------------------------|-------------------------------------------------------------------------------------|---------------------|-----------------|---------------------------------|-----------------------|---------------------|-----------------|------------------------------------|-----------------------|------------------------|--------------------|-------------------------------------|-----------------------|----------------------------|------------------|---------------------------------|-----------------------|------|---------|------------------------------|--------|------------------------|--------|------------------------------|--------|
| <p>Client: <b>SGS-CN (Auden)</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                                                                                                                                                                            | <p>Certificate No: <b>EX-7767_0022</b></p>                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                               | <p>Accreditation No.: <b>SCS 0108</b></p>                                                                                                                                      |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p><b>CALIBRATION CERTIFICATE</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p>Object: <b>EX3D04 - SN:7767</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p>Calibration procedure(s): <b>QA CAL-01.v9, QA CAL-12.v9, QA CAL-14.v6, QA CAL-23.v5, QA CAL-05.v7</b><br/> <b>Calibration procedure for dosimetric E-field probes</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p>Calibration date: <b>October 28, 2022</b></p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p>The calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).<br/>         The measurements and the uncertainties with confidence probability are given on the following page and are part of the certificate.<br/>         All calibrations have been conducted in the closest laboratory facility: environment temperature (22 ± 0.3 °C) and humidity &lt; 70%.<br/>         Calibration Equipment used (MATE critical for calibration)</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Primary Standards</th> <th>ID</th> <th>Cal Date (Certificate No.)</th> <th>Scheduled Calibration</th> </tr> </thead> <tbody> <tr> <td>Power meter NRP</td> <td>SN: 104778</td> <td>04-Apr-22 No. 217-03095/035044</td> <td>Apr-23</td> </tr> <tr> <td>Power meter NRP</td> <td>SN: 103044</td> <td>04-Apr-22 No. 217-03095/035044</td> <td>Apr-23</td> </tr> <tr> <td>DCP DAP-3.5 (w/31)</td> <td>SN: 13448</td> <td>04-Apr-22 DCP/DAP/3.5 (349, 00222)</td> <td>Apr-23</td> </tr> <tr> <td>DCP DAP-7.5</td> <td>SN: 13449</td> <td>04-Apr-22 DCP/DAP/7.5 (1018, 00222)</td> <td>Apr-23</td> </tr> <tr> <td>Reference 20 dB Attenuator</td> <td>SN: 025692 (200)</td> <td>04-Apr-22 No. 217-03097</td> <td>Oct-23</td> </tr> <tr> <td>DAQs</td> <td>SN: 466</td> <td>04-Apr-22 No. 10454-68-00222</td> <td>Oct-23</td> </tr> <tr> <td>Reference Probe E552V2</td> <td>SN: 27</td> <td>27-Oct-21 No. E85-3013_00221</td> <td>Dec-23</td> </tr> </tbody> </table> |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       | Primary Standards   | ID                      | Cal Date (Certificate No.)        | Scheduled Calibration                                                                            | Power meter NRP    | SN: 104778      | 04-Apr-22 No. 217-03095/035044  | Apr-23                                                                              | Power meter NRP     | SN: 103044      | 04-Apr-22 No. 217-03095/035044  | Apr-23                | DCP DAP-3.5 (w/31)  | SN: 13448       | 04-Apr-22 DCP/DAP/3.5 (349, 00222) | Apr-23                | DCP DAP-7.5            | SN: 13449          | 04-Apr-22 DCP/DAP/7.5 (1018, 00222) | Apr-23                | Reference 20 dB Attenuator | SN: 025692 (200) | 04-Apr-22 No. 217-03097         | Oct-23                | DAQs | SN: 466 | 04-Apr-22 No. 10454-68-00222 | Oct-23 | Reference Probe E552V2 | SN: 27 | 27-Oct-21 No. E85-3013_00221 | Dec-23 |
| Primary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   | ID                                                                                                                                                                         | Cal Date (Certificate No.)                                                                                                                                            | Scheduled Calibration                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Power meter NRP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SN: 104778                                                                                                                                                                 | 04-Apr-22 No. 217-03095/035044                                                                                                                                        | Apr-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Power meter NRP                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | SN: 103044                                                                                                                                                                 | 04-Apr-22 No. 217-03095/035044                                                                                                                                        | Apr-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| DCP DAP-3.5 (w/31)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | SN: 13448                                                                                                                                                                  | 04-Apr-22 DCP/DAP/3.5 (349, 00222)                                                                                                                                    | Apr-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| DCP DAP-7.5                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | SN: 13449                                                                                                                                                                  | 04-Apr-22 DCP/DAP/7.5 (1018, 00222)                                                                                                                                   | Apr-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Reference 20 dB Attenuator                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | SN: 025692 (200)                                                                                                                                                           | 04-Apr-22 No. 217-03097                                                                                                                                               | Oct-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| DAQs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | SN: 466                                                                                                                                                                    | 04-Apr-22 No. 10454-68-00222                                                                                                                                          | Oct-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Reference Probe E552V2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | SN: 27                                                                                                                                                                     | 27-Oct-21 No. E85-3013_00221                                                                                                                                          | Dec-23                                                                                                                                                                                                                                                                                                                                                                                        |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Secondary Standards</th> <th>ID</th> <th>Check Date (in house)</th> <th>Scheduled Check</th> </tr> </thead> <tbody> <tr> <td>Power meter 1641B9</td> <td>SN: 00471359/14</td> <td>08-Apr-16 in house check Jun-20</td> <td>In house check Jun-24</td> </tr> <tr> <td>Power sensor E4415A</td> <td>SN: 10144486/07</td> <td>08-Apr-16 in house check Jun-20</td> <td>In house check Jun-24</td> </tr> <tr> <td>Power sensor E4415A</td> <td>SN: 10144487/07</td> <td>08-Apr-16 in house check Jun-20</td> <td>In house check Jun-24</td> </tr> <tr> <td>RF generator 10P-66B2C</td> <td>SN: 103664102/1709</td> <td>18-Apr-16 in house check Jun-20</td> <td>In house check Jun-24</td> </tr> <tr> <td>Network Analyzer E699A</td> <td>SN: US4108247/17</td> <td>31-Mar-16 in house check Oct-22</td> <td>In house check Oct-24</td> </tr> </tbody> </table>                                                                                                     |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       | Secondary Standards | ID                      | Check Date (in house)             | Scheduled Check                                                                                  | Power meter 1641B9 | SN: 00471359/14 | 08-Apr-16 in house check Jun-20 | In house check Jun-24                                                               | Power sensor E4415A | SN: 10144486/07 | 08-Apr-16 in house check Jun-20 | In house check Jun-24 | Power sensor E4415A | SN: 10144487/07 | 08-Apr-16 in house check Jun-20    | In house check Jun-24 | RF generator 10P-66B2C | SN: 103664102/1709 | 18-Apr-16 in house check Jun-20     | In house check Jun-24 | Network Analyzer E699A     | SN: US4108247/17 | 31-Mar-16 in house check Oct-22 | In house check Oct-24 |      |         |                              |        |                        |        |                              |        |
| Secondary Standards                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | ID                                                                                                                                                                         | Check Date (in house)                                                                                                                                                 | Scheduled Check                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Power meter 1641B9                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | SN: 00471359/14                                                                                                                                                            | 08-Apr-16 in house check Jun-20                                                                                                                                       | In house check Jun-24                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Power sensor E4415A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | SN: 10144486/07                                                                                                                                                            | 08-Apr-16 in house check Jun-20                                                                                                                                       | In house check Jun-24                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Power sensor E4415A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 | SN: 10144487/07                                                                                                                                                            | 08-Apr-16 in house check Jun-20                                                                                                                                       | In house check Jun-24                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| RF generator 10P-66B2C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | SN: 103664102/1709                                                                                                                                                         | 18-Apr-16 in house check Jun-20                                                                                                                                       | In house check Jun-24                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Network Analyzer E699A                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              | SN: US4108247/17                                                                                                                                                           | 31-Mar-16 in house check Oct-22                                                                                                                                       | In house check Oct-24                                                                                                                                                                                                                                                                                                                                                                         |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">Calibrated by:</td> <td style="width: 33%;">Name<br/>Adrian Gergelyi</td> <td style="width: 33%;">Function<br/>Laboratory Technician</td> <td style="width: 33%;">Signature<br/></td> </tr> <tr> <td>Approved by:</td> <td>Sven Kuhn</td> <td>Technical Manager</td> <td></td> </tr> </table> <p style="text-align: right;">Issued: October 31, 2022</p>                                                                                                                                                                                                                                                                                                                                                                                                                      |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       | Calibrated by:      | Name<br>Adrian Gergelyi | Function<br>Laboratory Technician | Signature<br> | Approved by:       | Sven Kuhn       | Technical Manager               |  |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Calibrated by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Name<br>Adrian Gergelyi                                                                                                                                                    | Function<br>Laboratory Technician                                                                                                                                     | Signature<br>                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| Approved by:                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Sven Kuhn                                                                                                                                                                  | Technical Manager                                                                                                                                                     |                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |
| <p>This calibration certificate shall not be reproduced except in full without written approval of the laboratory.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                            |                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                               |                                                                                                                                                                                |                                                                                                                                                                       |                     |                         |                                   |                                                                                                  |                    |                 |                                 |                                                                                     |                     |                 |                                 |                       |                     |                 |                                    |                       |                        |                    |                                     |                       |                            |                  |                                 |                       |      |         |                              |        |                        |        |                              |        |

Certificate No: EX-7767\_0022

Page 1 of 9

Certificate No: EX-7767\_0022

Page 2 of 9



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that it contains information which reflects the Company's findings and conclusions of its internal control system. It also limits the Company's liability and, therefore, the Company's responsibility to its Client and this document only to exonerate part of a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or retention of a document in any form may render the holder of such document liable for damages. Any document not otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing / inspection report, please visit our website or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学院创业园佳业路10号 邮编 215300

t(86-512)57355888    f(86-512)57370818    www.sgsgroup.com.cn  
t(86-512)57355888    f(86-512)57370818    sqs.china@sqs.com

Member of the SGS Group (SGS SA)

Member of the SGS Group (SGS SA)

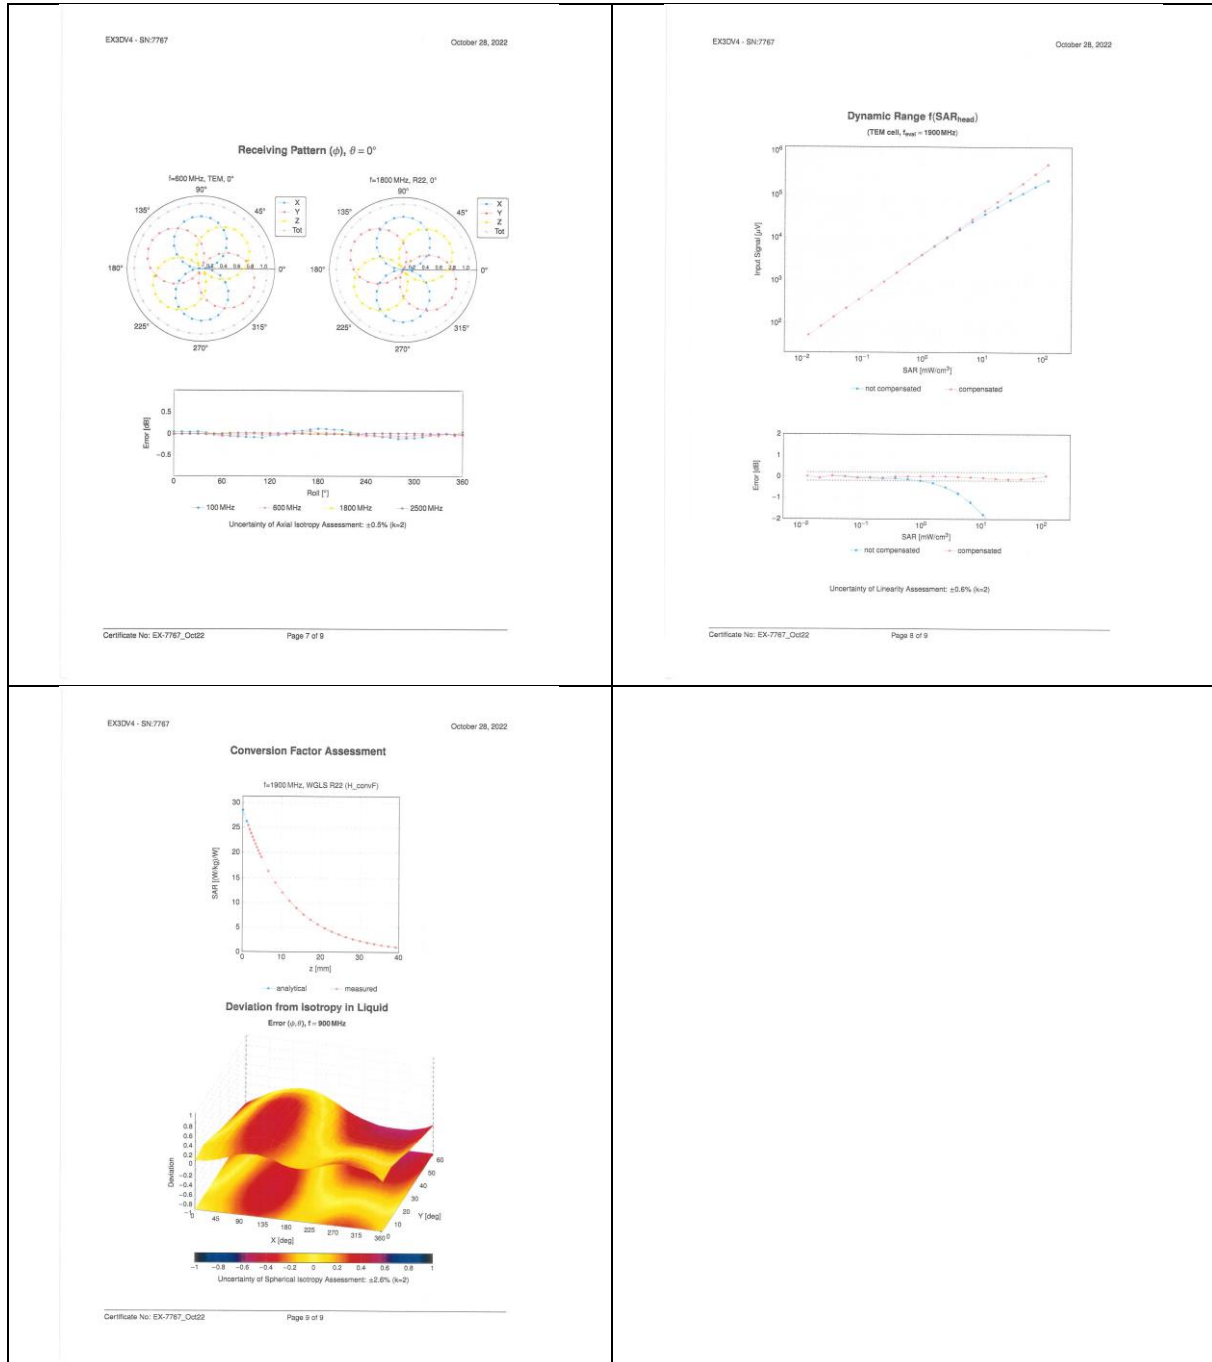

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 [www.sgs.com.cn](http://www.sgs.com.cn)  
t(86-512)57355888 f(86-512)57370818 [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

#### 4 Impedance and return loss

| Dipole CLA150 SN 4025 |                 |            |                        |                |
|-----------------------|-----------------|------------|------------------------|----------------|
| Head Liquid           |                 |            |                        |                |
| Date of Measurement   | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2021/4/26             | -31.4           | /          | 47.8                   | /              |
| Dipole D450V3 SN 1103 |                 |            |                        |                |
| Head Liquid           |                 |            |                        |                |
| Date of Measurement   | Return Loss(dB) | $\Delta$ % | Impedance ( $\Omega$ ) | $\Delta\Omega$ |
| 2021/4/21             | -23             | /          | 57.1                   | /              |



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

Compliance Certification Services (Kunshan) Inc.  
EMC Laboratory

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300  
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn  
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com