

FCC 47 CFR PART 15 SUBPART E

CERTIFICATION TEST REPORT

For

GPON SFU

MODEL No.: 7259G, 7258G, 7257G, 7253G, 7283G

FCC ID: 2AGHCHBMT03

Trade Mark: iPhotonix, Ligent, Hisense

REPORT NO.: ES151113018E2

ISSUE DATE: Dec.12, 2015

Prepared for

Guangdong Hisense Broadband Technology Co., Ltd

**Building 2, No.8, Hisense Road, Tangxia Town, Pengjiang District, Jiangmen,
Guangdong, China**

Prepared by

SHENZHEN EMTEK CO., LTD

**Bldg 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China**

TEL: 86-755-26954280

FAX: 86-755-26954282

1 TEST RESULT CERTIFICATION

Applicant:	Guangdong Hisense Broadband Technology Co., Ltd Building 2, No.8, Hisense Road, Tangxia Town, Pengjiang District, Jiangmen, Guangdong, China
Manufacturer:	Guangdong Hisense Broadband Technology Co., Ltd Building 2, No.8, Hisense Road, Tangxia Town, Pengjiang District, Jiangmen, Guangdong, China
Product Description:	GPON SFU
Model Number:	7259G, 7258G, 7257G, 7253G, 7283G
File Number:	ES151113018E2
Date of Test:	Nov. 24, 2015 to Dec. 12, 2015

Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart E	PASS

The above equipment was tested by SHENZHEN EMTEK CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.407

The test results of this report relate only to the tested sample identified in this report.

Date of Test : Nov. 24, 2015 to Dec. 12, 2015

Prepared by : 
Joe Xia/Editor

Reviewer : 
Jack Li/Supervisor

Approve & Authorized Signer : 
Lisa Wang/Manager

TABLE OF CONTENTS

1	TEST RESULT CERTIFICATION	2
2	EUT TECHNICAL DESCRIPTION	4
3	SUMMARY OF TEST RESULT	7
4	TEST METHODOLOGY	8
4.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	8
4.2	MEASUREMENT EQUIPMENT USED	8
4.3	DESCRIPTION OF TEST MODES.....	9
5	FACILITIES AND ACCREDITATIONS	11
5.1	FACILITIES	11
5.2	LABORATORY ACCREDITATIONS AND LISTINGS	11
6	TEST SYSTEM UNCERTAINTY	12
7	SETUP OF EQUIPMENT UNDER TEST	13
7.1	RADIO FREQUENCY TEST SETUP.....	13
7.2	RADIO FREQUENCY TEST SETUP.....	13
7.3	CONDUCTED EMISSION TEST SETUP	15
7.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	16
7.5	SUPPORT EQUIPMENT.....	16
8	TEST REQUIREMENTS.....	17
8.1	BANDWIDTH MEASUREMENT	17
8.2	MAXIMUM CONDUCTED OUTPUT POWER.....	65
8.3	MAXIMUM PEAK POWER DENSITY	70
8.4	FREQUENCY STABILITY	129
8.5	UNDESIRABLE RADIATED SPURIOUS EMISSION.....	132
8.6	POWER LINE CONDUCTED EMISSIONS	161
8.7	ANTENNA APPLICATION	166

2 EUT TECHNICAL DESCRIPTION

Characteristics	Description
Device Type	Wifi 2.4G Device
IEEE 802.11 WLAN Mode Supported	☒ 802.11b(20MHz bandwidth) ☒ 802.11g(20MHz bandwidth) ☒ 802.11n(20MHz bandwidth) ☒ 802.11n(40MHz bandwidth)
Data Rate	☒ 802.11 b:1,2,5.5,11Mbps ☒ 802.11 g:6,9,12,18,24,36,48,54Mbps ☒ 802.11n(HT20):MCS0-MCS23 ☒ 802.11n(HT40):MCS0-MCS23
MIMO Mode	2T2R
Modulation	DSSS with DBPSK/DQPSK/CCK for 802.11b OFDM with BPSK/QPSK/16QAM/64QAM for 802.11g/n
Operating Frequency Range	☒ 2412-2462MHz for 802.11b/g ☒ 2412-2462MHz for 802.11n(HT20) ☒ 2422-2452MHz for 802.11n(HT40)
Number of Channels	☒ 11 channels for 802.11b/g ☒ 11 channels for 802.11n(HT20) ☒ 7 channels for 802.11n(HT40)
Transmit Power Max	23.97dBm for 802.11b 21.41dBm for 802.11g 22.88dBm for 802.11n(HT20) 21.64dBm for 802.11n(HT40)
Antenna Type	PiFa Antenna
Smart system	☒ SISO for 802.11b/g/n ☒ MIMO for 802.11n
Antenna Gain	3.0dBi
Power supply	☒ DC supply: DC 12V/2.0A from adapter
	☒ Adapter supply: For adapter 1 Model: RD1202000-C65-29MG INPUT: 100-240~50/60Hz 0.6A OUTPUT: 12V/2.0A For adapter 2 Model: YJS024U-1202000U INPUT: 100-240~50/60Hz 800mA OUTPUT: 12V/2.0A

Note: for more details, please refer to the User's manual of the EUT.

Characteristics	Description
Device Type	Wifi 5G Device
IEEE 802.11 WLAN Mode Supported	☒ 802.11a(20MHz channel bandwidth) ☒ 802.11n(20MHz channel bandwidth) ☒ 802.11ac(20MHz channel bandwidth) ☒ 802.11n(40MHz channel bandwidth) ☒ 802.11ac(40MHz channel bandwidth) ☒ 802.11ac(80MHz channel bandwidth)
Data Rate	☒ 802.11 a: 6,9,12,18,24,36,48,54Mbps; ☒ 802.11n(HT20):MCS0-MCS23; ☒ 802.11n(HT40):MCS0-MCS23; ☒ 802.11ac(VHT20):MCS0-MCS9; ☒ 802.11ac(VHT40):MCS0-MCS9; ☒ 802.11ac(VHT80):MCS0-MCS9;
MIMO Mode	3T3R
Modulation	☒ OFDM with BPSK/QPSK/16QAM/64QAM for 802.11a/g/n; ☒ OFDM with BPSK/QPSK/16QAM/64QAM/256QAM for 802.11ac;
Operating Frequency Range	☒ 5180-5240MHz ☒ 5745-5825MHz
Number of Channels	☒ Wifi 5G with 5150MHz-5250MHz Band ☒4 Channels for 802.11a; ☒4 Channels for 802.11n(HT20); ☒4 Channels for 802.11ac(VHT20); ☒2 Channels Hz for 802.11n(HT40); ☒2 Channels for 802.11ac(VHT40); ☒1 Channel for 802.11ac(VHT80); ☒ Wifi 5G with 5725MHz-5850MHz Band ☒5 Channels for 802.11a; ☒5 Channels for 802.11n(HT20); ☒5 Channels for 802.11ac(VHT20); ☒2 Channels for 802.11n(HT40); ☒2 Channels for 802.11ac(VHT40); ☒1 Channels for 802.11ac(VHT80);
Transmit Power Max	23.65dBm for 802.11a; 28.27dBm for 802.11n(HT20); 24.12dBm for 802.11n(HT40); 29.81dBm for 802.11ac(VHT20); 24.35dBm for 802.11ac(VHT40); 24.27dBm for 802.11ac(VHT80);
Antenna Type	PCB Antenna
Smart system	☒ SISO for 802.11a/n/ac ☒ MIMO for 802.11n/ac
Antenna Gain	5G with 5150MHz-5250MHz Band 4.5dBi 5G with 5725MHz-5850MHz Band 4.0dBi
Power supply	☒ DC supply: DC 12V/2.0A from adapter
	☒ Adapter supply: For adapter 1 Model: RD1202000-C65-29MG INPUT: 100-240~50/60Hz 0.6A OUTPUT: 12V/2.0A

	For adapter 2 Model: YJS024U-1202000U INPUT: 100-240~50/60Hz 800mA OUTPUT: 12V/2.0A
--	--

Note: for more details, please refer to the User's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.407 (a)(1) 15.407 (a)(3)	99% , 6dB and 26dB Bandwidth	PASS	
15.407 (a)(1) 15.407 (a)(3)	Maximum Conducted Output Power	PASS	
15.407 (a)(1) 15.407 (a)(3)	Peak Power Spectral Density	PASS	
15.407 (b)(1) 15.407 (b)(4) 15.407 (b)(6)	Radiated Spurious Emission	PASS	
15.407 (a)(6)	Peak Excursion	PASS	
15.209	Radiated Spurious Emission	PASS	
15.407(g)	Frequency Stability	PASS	
15.407 (b)(6) 15.207	Power Line Conducted Emission	PASS	
§15.407(a)&§15.203	Antenna Application	PASS	
NOTE1: N/A (Not Applicable) NOTE2: According to FCC OET KDB 789003 D2 General UNII Test Procedures New Rules v01, In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AGHCHBMT03 filing to comply with Section 15.247 of the FCC Part 15, Subpart E Rules.

The system is compliance with Subpart B is authorized under a DOC procedure

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart E

FCC KDB 789003 D2 General UNII Test Procedures New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 662911 D02 MIMO With Cross Polarized Antenna V01

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2015

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015
Loop Antenna	ARA	PLA-1030/B	1029	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015
Power meter	Anritsu	ML2495A	0824006	05/16/2015
Power sensor	Anritsu	MA2411B	0738172	05/16/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those modulation (☒802.11a; ☒802.11n (HT20); ☒802.11n (HT40); ☒802.11ac (HT20); ☒802.11ac (HT40); ☒802.11ac (HT80);) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

- ☒Frequency and Channel list for 802.11a/n(HT20)/ac(VHT20) band I (5150-5250MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH36	5180	CH44	5220	CH48	5240
CH40	5200				

- ☒Frequency and Channel list for 802.11a/n(HT20)/ac(VH20) band III (5725-5850MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 149	5745	CH 157	5785	CH 165	5825
CH 153	5765	CH 161	5805		

- ☒Frequency and Channel list for 802.11n(HT40)/ac(VHT40) band I (5150-5250MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 38	5190			CH 46	5230

- ☒Frequency and Channel list for 802.11n(HT40)/ac(VHT40) band III (5725-5850MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 151	5755			CH 159	5795

- ☒Frequency and Channel list for 802.11ac(VHT80) band I (5150-5250MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

- ☒Frequency and Channel list for 802.11ac(VHT80) band III (5725-5850MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

- ☒ Test Frequency and Channel for 802.11a/n(HT20)/ac(VH20) band I (5150-5250MHz):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH36	5180	CH44	5220	CH48	5240

- ☒ Test Frequency and channel for 802.11a/n(HT20)/ac(VH20) band III (5725-5850MHz):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 149	5745	CH 157	5785	CH 165	5825

- ☒ Test Frequency and Channel for 802.11n(HT40)/ac(VHT40) band I (5150-5250MHz):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 38	5190			CH 46	5230

- ☒ Test Frequency and channel for 802.11n(HT40)/ac(VHT40) band III (5725-5850MHz):

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
CH 151	5755			CH 159	5795

- ☒ Frequency and Channel list for 802.11ac(VHT80) band I (5150-5250MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210				

- ☒ Frequency and Channel list for 802.11ac(VHT80) band III (5725-5850MHz):

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775				

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)

The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.4

The Laboratory has been assessed according to the requirements ISO/IEC 17025.

Accredited by FCC, April 17, 2013

The Certificate Registration Number is 709623.

Accredited by FCC, July 24, 2013

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 29, 2012

The Certificate Registration Number is 4480A.

Name of Firm

: SHENZHEN EMTEK CO., LTD.

Site Location

: Bldg 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:


Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Power Density	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	± 0.5
Humidity	$\pm 3\%$

Measurement Uncertainty for a level of Confidence of 95%

7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz :

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the the specified distance from the EUT.

Above 30MHz :


The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz :


(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.)

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

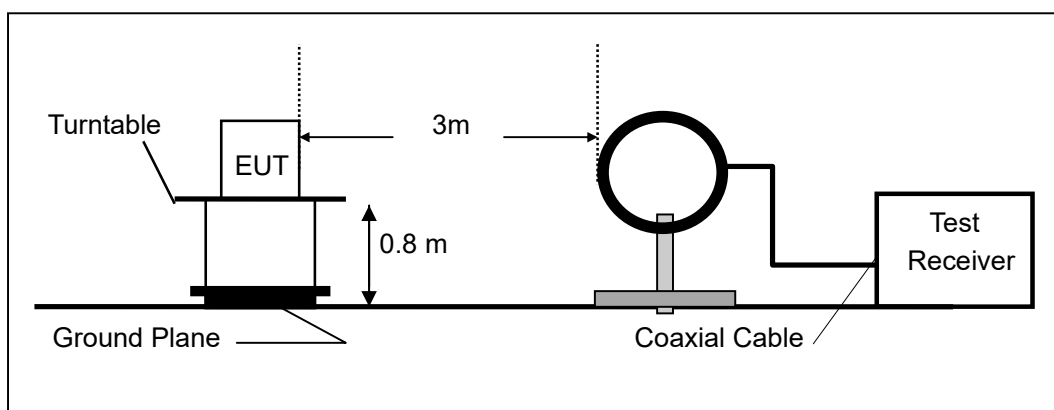

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

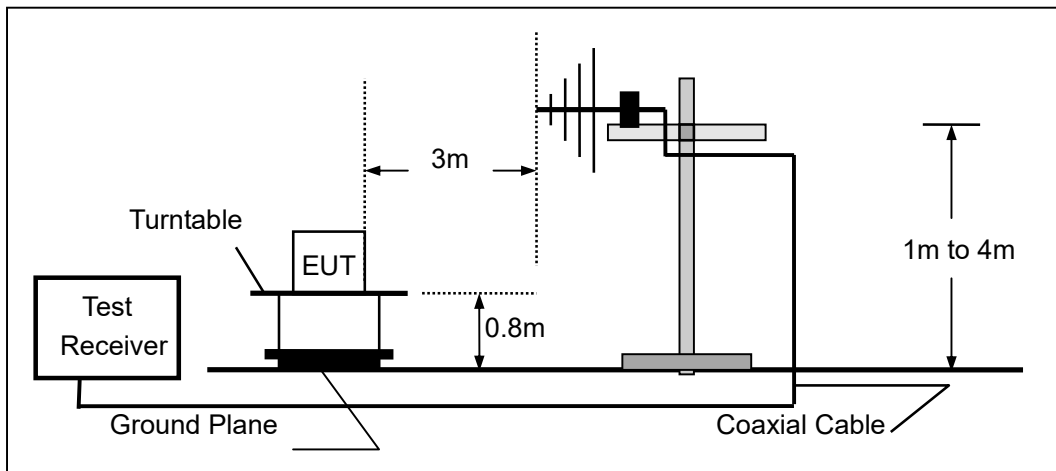

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

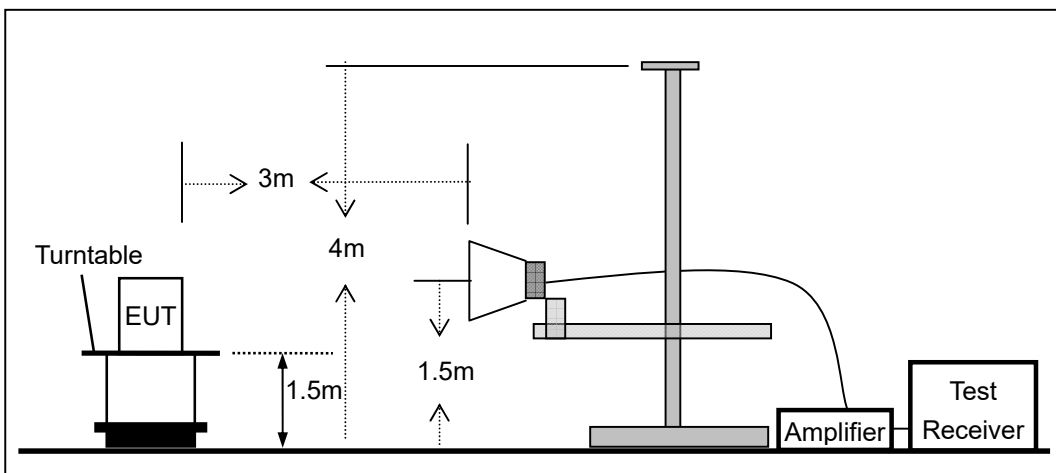


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

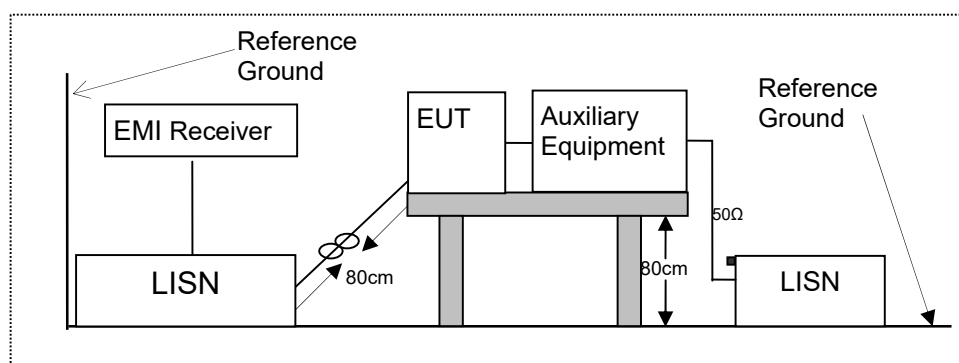

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

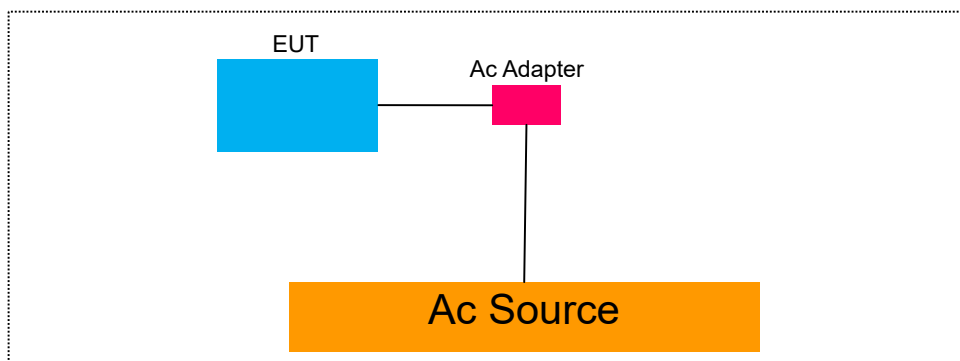

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Series No.	Note
1.	N/A	N/A	N/A	N/A	N/A	

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 BANDWIDTH MEASUREMENT

8.1.1 Applicable Standard

According to FCC Part 15.407(a)(1) for band 5150-5250MHz and KDB 789003 D2
According to FCC Part 15.407(a)(3) for band 5725-5850MHz and KDB 789003 D2

8.1.2 Conformance Limit

No limit requirement.

The minimum 6 dB emission bandwidth of at least 500 KHz for the band 5.725-5.85 GHz.

8.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.1.4 Test Procedure

Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below

■ The following procedure shall be used for measuring (26 dB) power bandwidth:

Center Frequency: test Frequency

Set RBW = approximately 1% of the emission bandwidth.

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

X dB Bandwidth: 26 dB

Measure the maximum width of the emission that is 26 dB down from the maximum of the emission.

Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

■ Minimum Emission Bandwidth for the band 5.725-5.85 GHz

Center Frequency: test Frequency

Set RBW = 100 kHz

Set VBW $\geq 3 \cdot$ RBW

Detector = Peak

Trace mode = max hold

Sweep = auto couple

X dB Bandwidth: 6 dB

Note: The automatic bandwidth measurement capability of a spectrum analyzer or EMI receiver may be employed if it implements the functionality described above.

■ The following procedure shall be used for measuring (99 %) power bandwidth:

Set center frequency to the nominal EUT channel center frequency.

Set span = 1.5 times to 5.0 times the OBW.

Set RBW = 1 % to 5 % of the OBW

Set VBW $\geq 3 \cdot$ RBW

Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.

Use the 99 % power bandwidth function of the instrument (if available).

If the instrument does not have a 99 % power bandwidth function, the trace data points are recovered and directly summed in power units. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5 % of the total is reached; that frequency is recorded as the lower frequency.

The process is repeated until 99.5 % of the total is reached; that frequency is recorded as the upper frequency. The 99% occupied bandwidth is the difference between these two frequencies.

8.1.5 Test Results

☒ Frequency Band I (5150-5250MHz)						
Temperature :		28	Test Date :		December 1, 2015	
Humidity :		65 %	Test By:		King Kong	
Operation Mode	Channel Number	Channel Frequency (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
802.11a	CH36	5180	19.76	16.730	N/A	PASS
	CH44	5220	19.85	16.775	N/A	PASS
	CH48	5240	19.55	16.695	N/A	PASS
802.11n (HT20)	CH36	5180	20.12	17.731	N/A	PASS
	CH44	5220	20.04	17.721	N/A	PASS
	CH48	5240	19.89	17.733	N/A	PASS
802.11n (HT40)	CH38	5190	40.02	36.237	N/A	PASS
	CH46	5230	39.88	36.233	N/A	PASS
802.11ac (VHT20)	CH36	5180	20.32	17.763	N/A	PASS
	CH44	5220	20.32	17.749	N/A	PASS
	CH48	5240	20.25	17.783	N/A	PASS
802.11ac (VHT40)	CH38	5190	39.45	36.270	N/A	PASS
	CH46	5230	39.44	36.357	N/A	PASS
802.11ac (VHT80)	CH42	5210	80.15	75.845	N/A	PASS
Note: N/A (Not Applicable)						

☒ Frequency Band III (5725-5850MHz)						
Temperature :		28	Test Date :		December 1, 2015	
Humidity :		65 %	Test By:		King Kong	
Operation Mode	Channel Number	Channel Frequency (MHz)	26dB EBW	99% OBW	Limit (MHz)	Verdict
802.11a	CH149	5745	19.88	16.707	N/A	PASS
	CH157	5785	21.23	17.791	N/A	PASS
	CH165	5825	19.63	16.663	N/A	PASS
802.11n (HT20)	CH149	5745	20.18	17.754	N/A	PASS
	CH157	5785	20.09	17.780	N/A	PASS
	CH165	5825	19.98	17.793	N/A	PASS
802.11n (HT40)	CH151	5755	40.28	36.221	N/A	PASS
	CH159	5795	39.91	36.239	N/A	PASS
802.11ac (VHT20)	CH149	5745	20.28	17.735	N/A	PASS
	CH157	5785	20.26	17.789	N/A	PASS
	CH165	5825	21.36	17.769	N/A	PASS
802.11ac (VHT40)	CH151	5755	39.71	36.245	N/A	PASS
	CH159	5795	39.55	36.341	N/A	PASS
802.11ac (VHT80)	CH155	5775	80.04	75.893	N/A	PASS
Note: N/A (Not Applicable)						

☒ Frequency Band III (5725-5850MHz)			
Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong

Operation Mode	Channel Number	Channel Frequency (MHz)	6dB Min EBW	Limit (KHz)	Verdict
802.11a	CH 149	5745	15.35	500	PASS
	CH 157	5785	16.30	500	PASS
	CH 165	5825	15.16	500	PASS
802.11n (HT20)	CH 149	5745	17.70	500	PASS
	CH 157	5785	17.69	500	PASS
	CH 165	5825	17.72	500	PASS
802.11n (HT40)	CH 151	5755	36.43	500	PASS
	CH 159	5795	36.44	500	PASS
802.11ac (VHT20)	CH149	5745	13.94	500	PASS
	CH157	5785	15.14	500	PASS
	CH165	5825	15.15	500	PASS
802.11ac (VHT40)	CH151	5755	35.23	500	PASS
	CH159	5795	35.21	500	PASS
802.11ac (VHT80)	CH155	5775	76.00	500	PASS


Note:

N/A (Not Applicable)


Test Model	26dB emission bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	---	---------------------




Test Model	26dB emission bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	---	---------------------

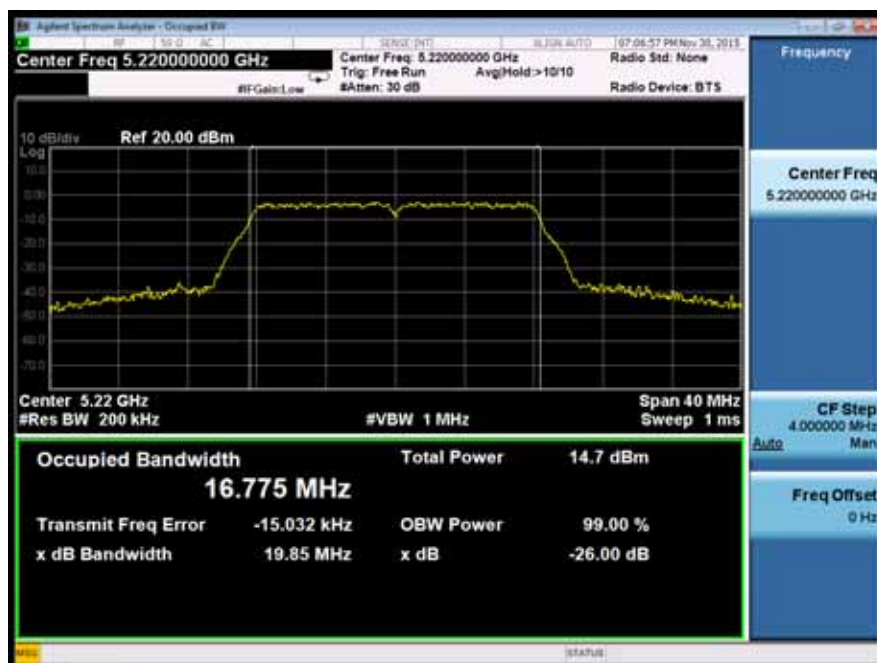


Test Model	26dB emission bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	---	---------------------

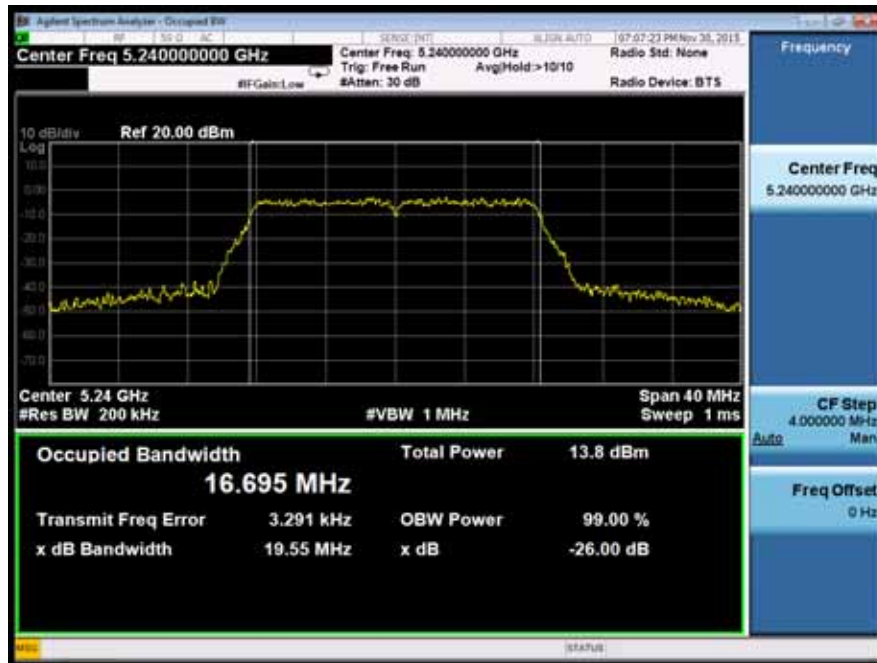


Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	---	---------------------

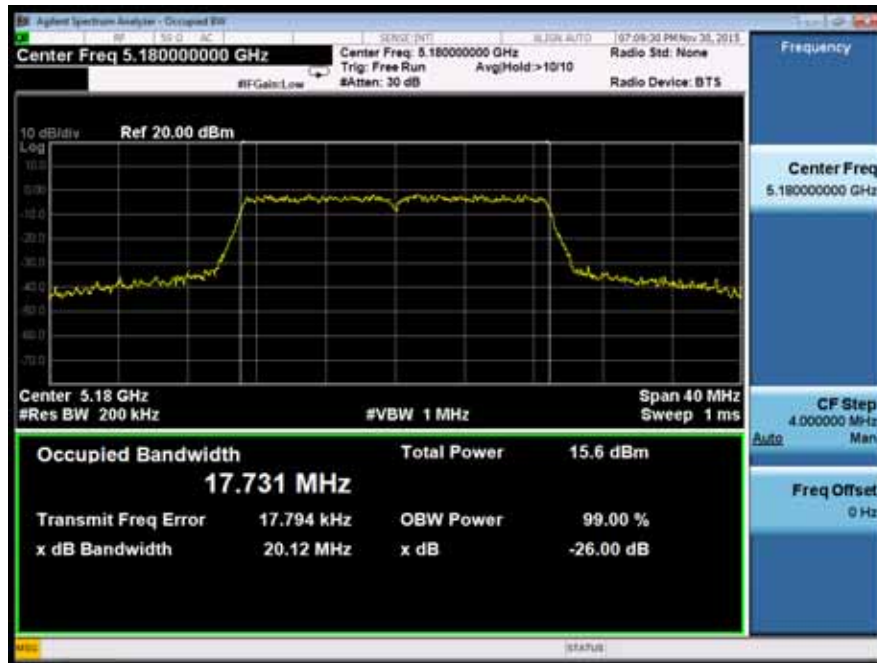

Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	---	---------------------

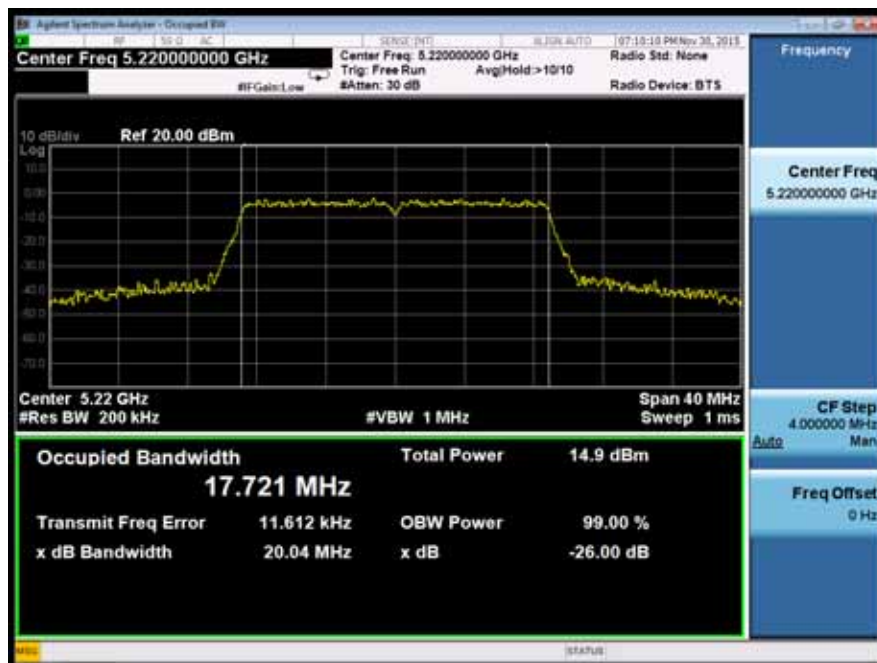


Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	---	---------------------

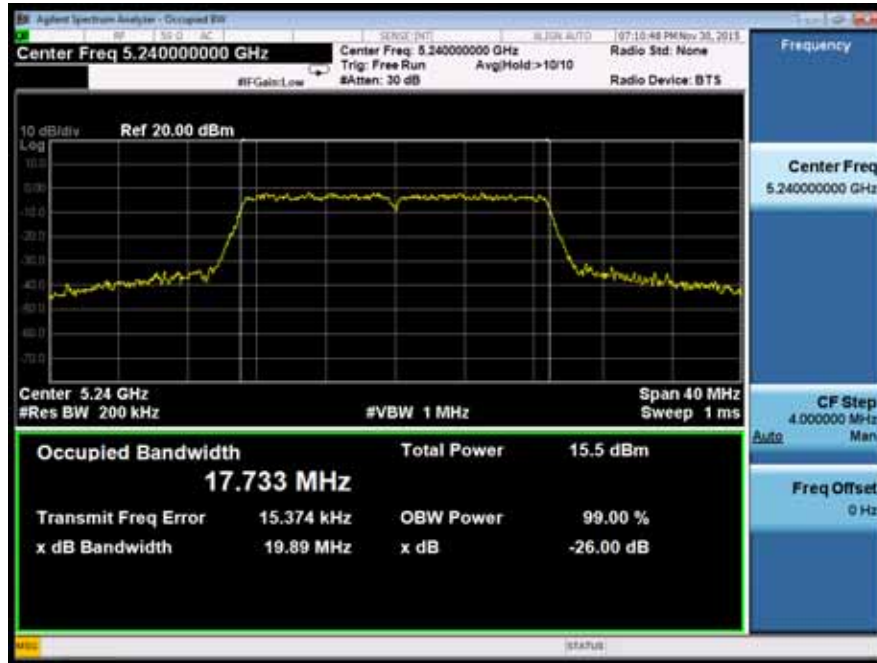

Test Model	26dB emission bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	---	---------------------




Test Model	26dB emission bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	---	---------------------

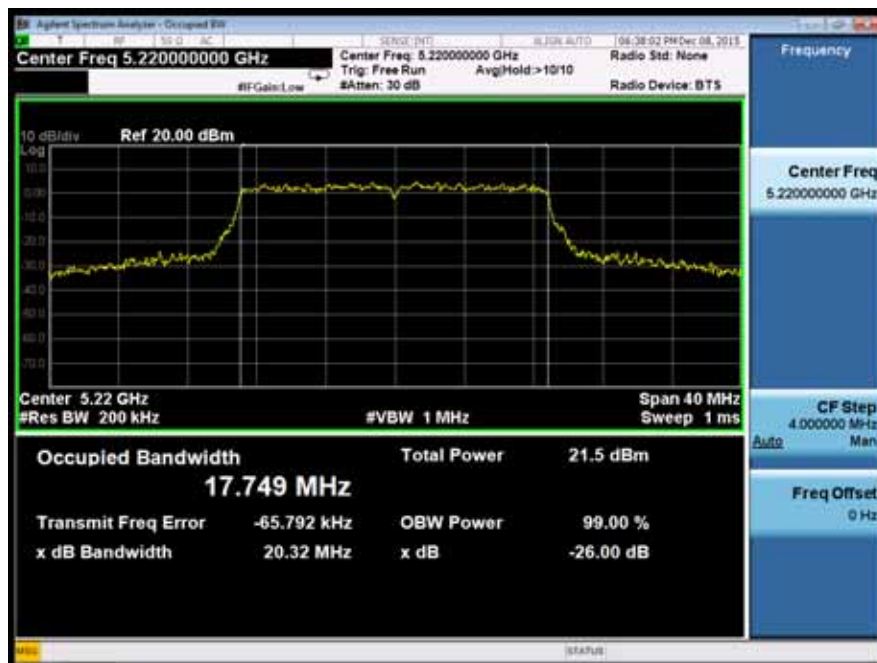


Test Model	26dB emission bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	---	---------------------




Test Model	26dB emission bandwidth 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel 38: 5190MHz
------------	---	---------------------

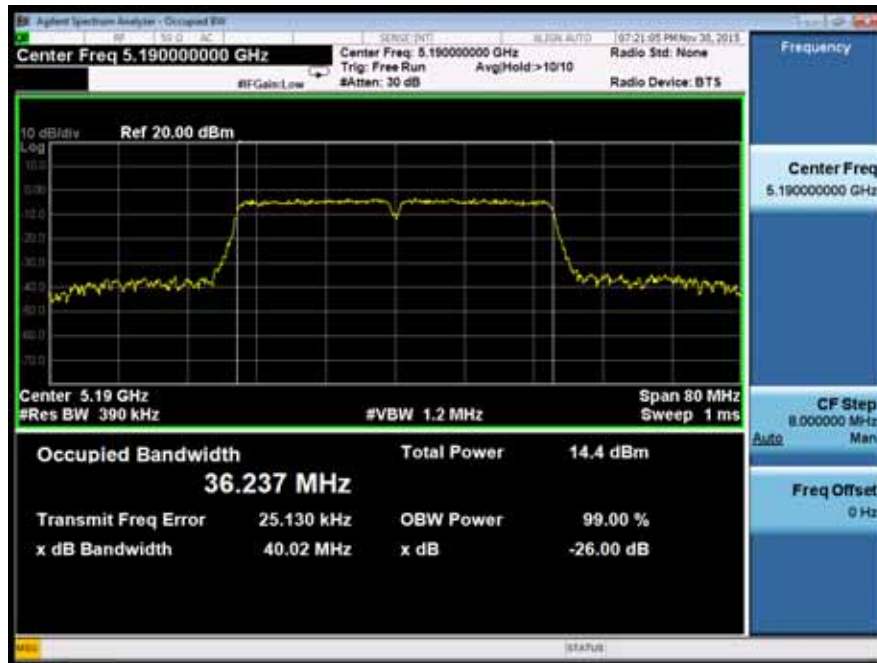


Test Model	26dB emission bandwidth 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel 46: 5230MHz
------------	---	---------------------

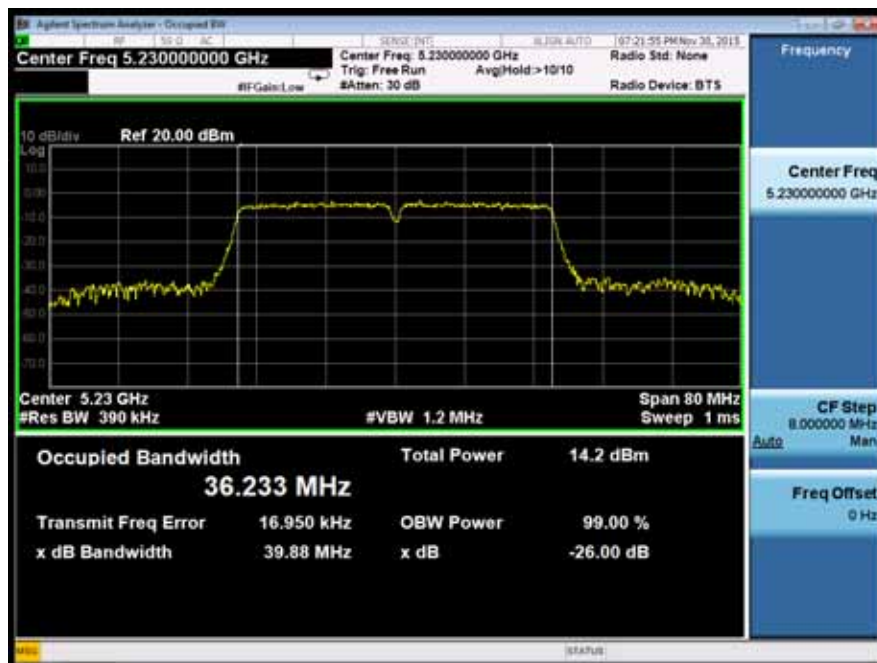

Test Model	26dB emission bandwidth 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel 38: 5190MHz
------------	---	---------------------

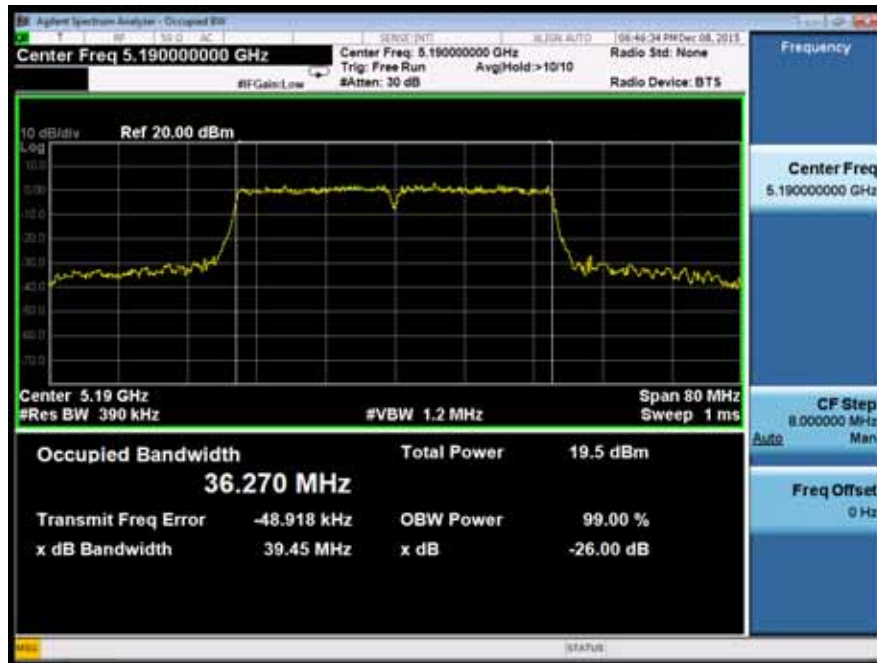


Test Model	26dB emission bandwidth 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel 46: 5230MHz
------------	---	---------------------

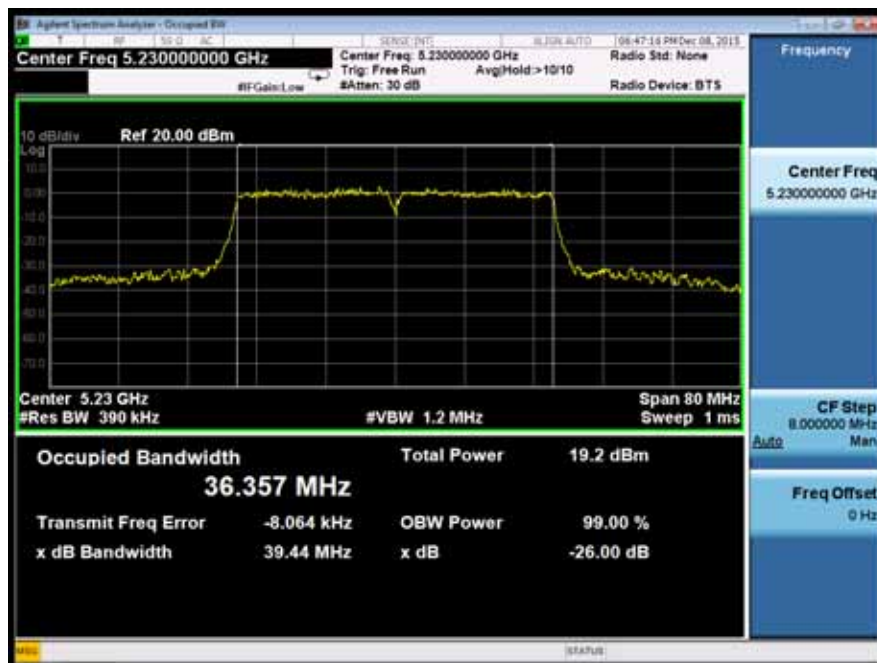


Test Model	26dB emission bandwidth 802.11ac(VHT80) Frequency Band I (5150-5250MHz)	Channel 42: 5210MHz
------------	---	---------------------




Test Model	26dB emission bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz

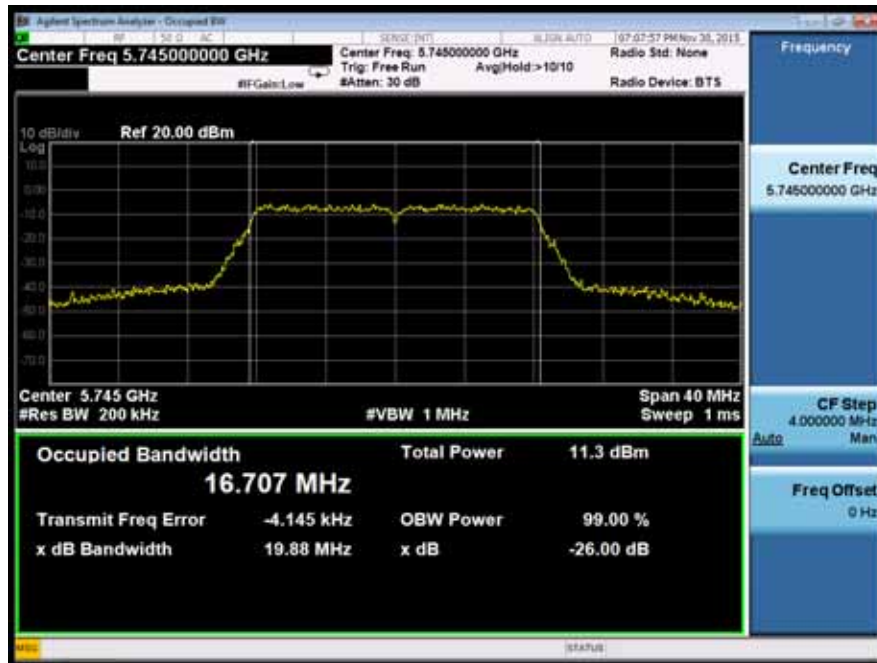


Test Model	26dB emission bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz

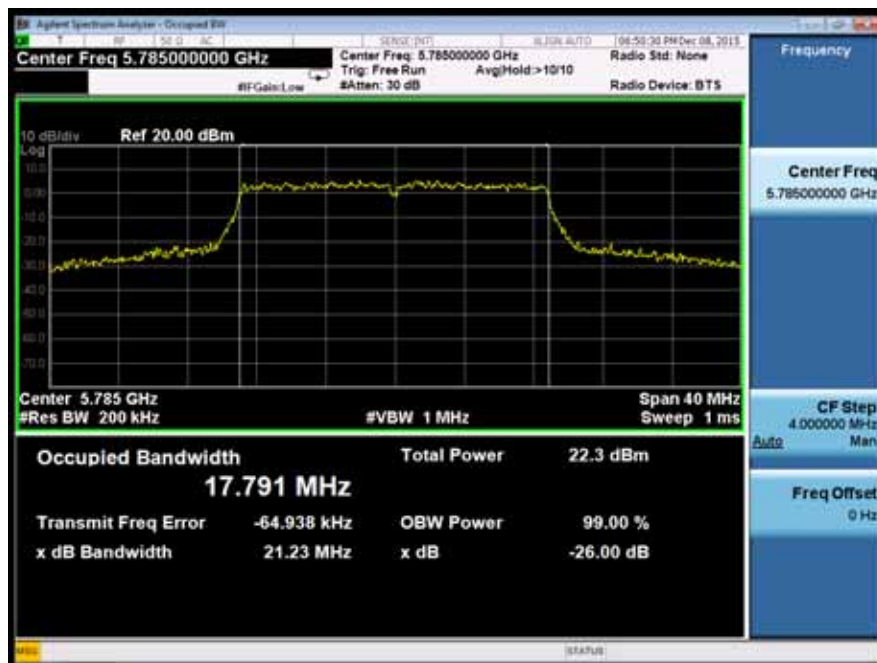


Test Model	26dB emission bandwidth 802.11a Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------

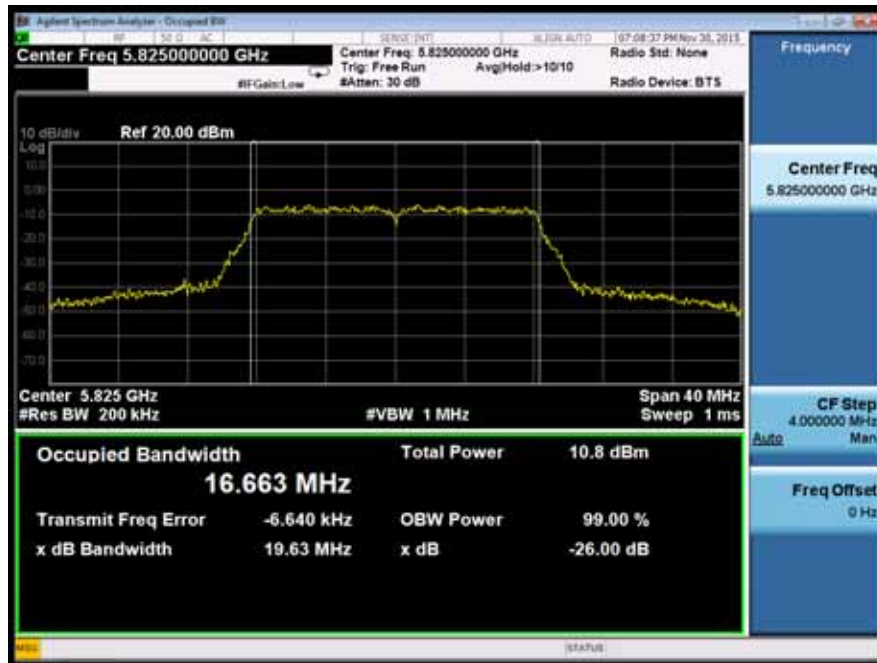


Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------

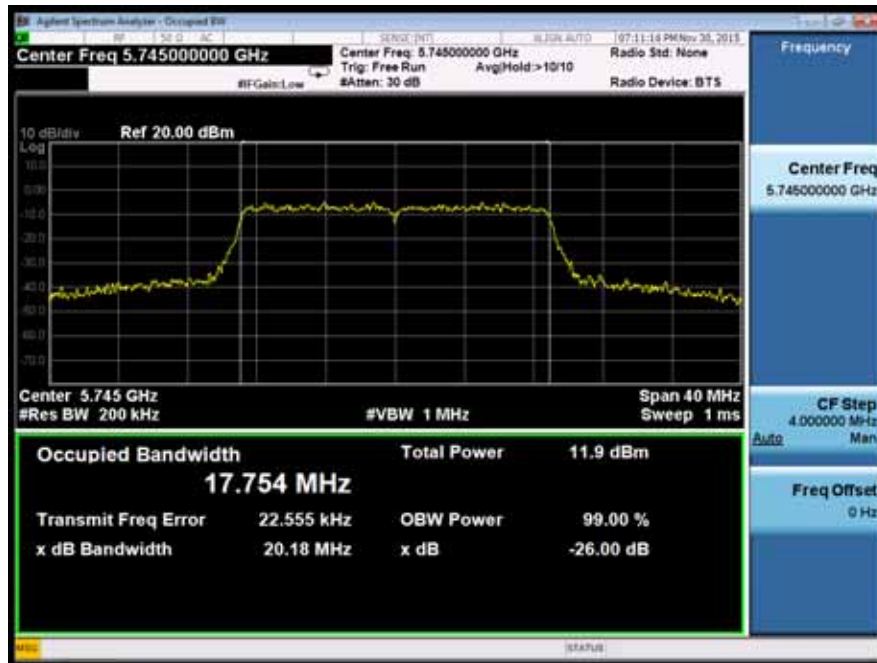

Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

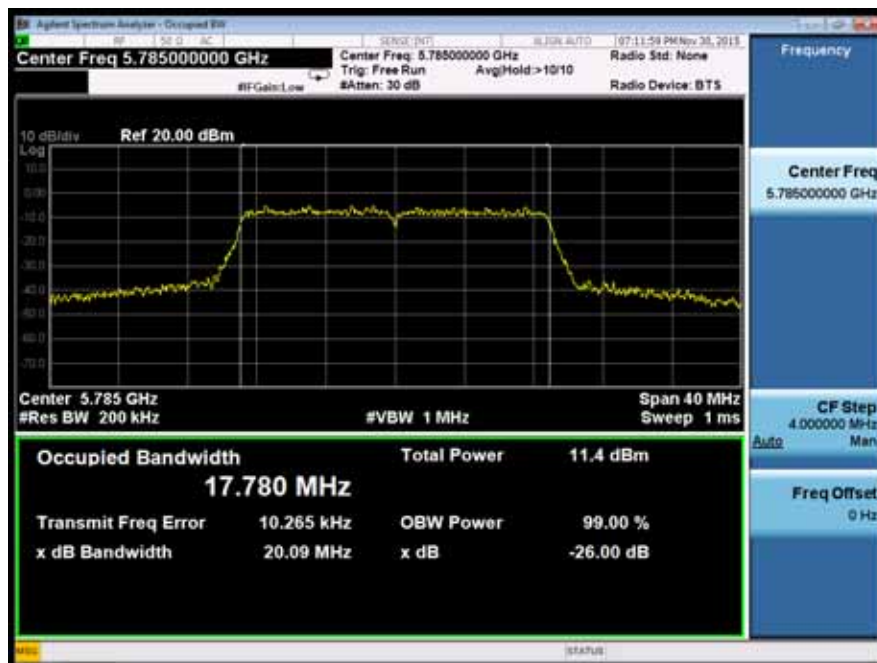


Test Model	26dB emission bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------

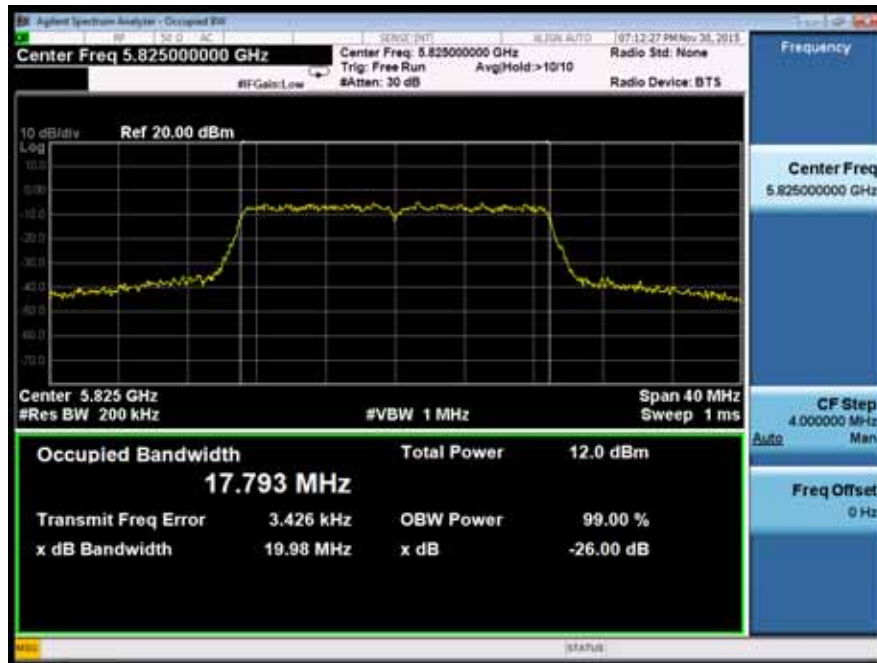

Test Model	26dB emission bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------




Test Model	26dB emission bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

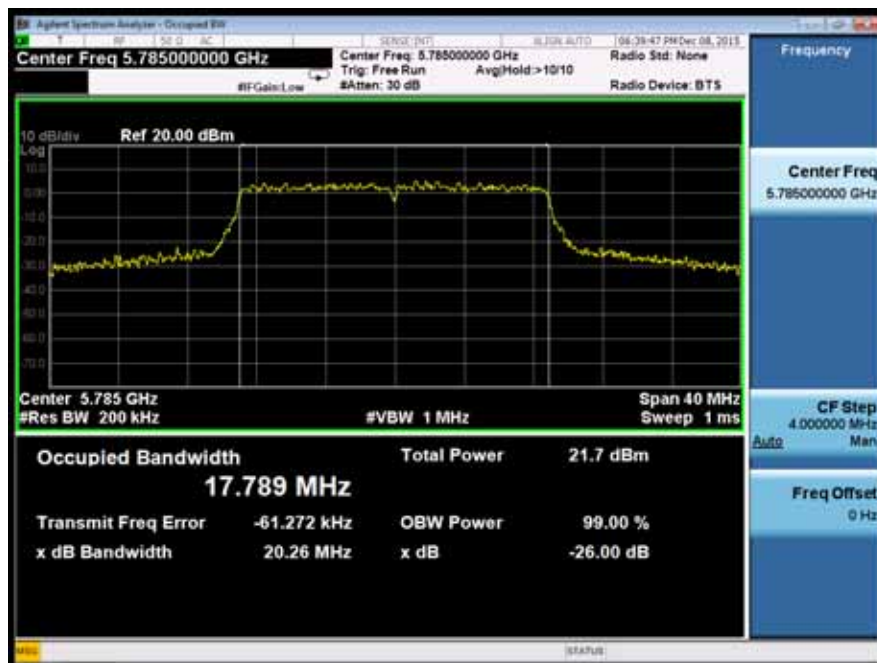


Test Model	26dB emission bandwidth	
	802.11ac(VHT20)	
	Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz




Test Model	26dB emission bandwidth 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------

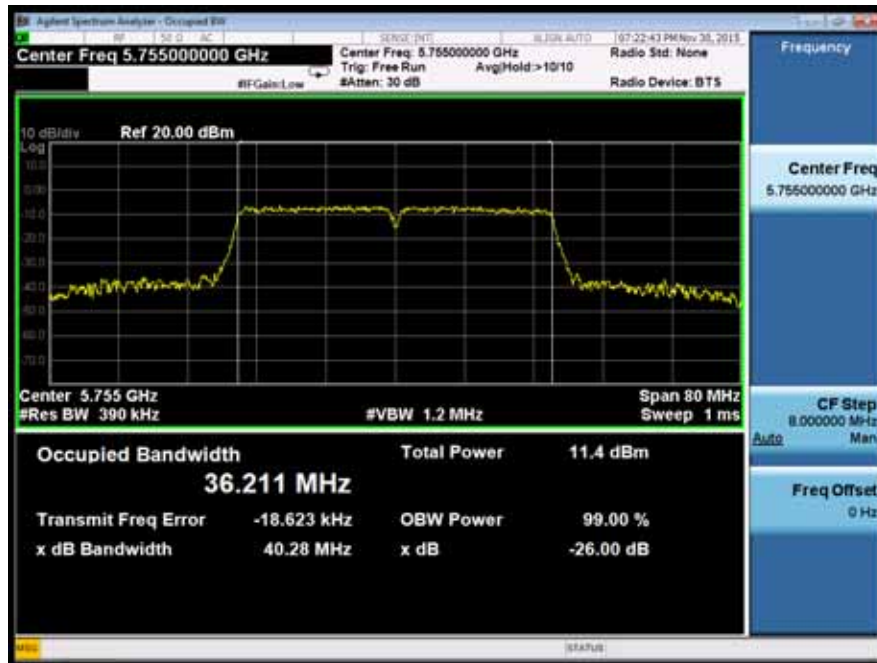


Test Model	26dB emission bandwidth 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------

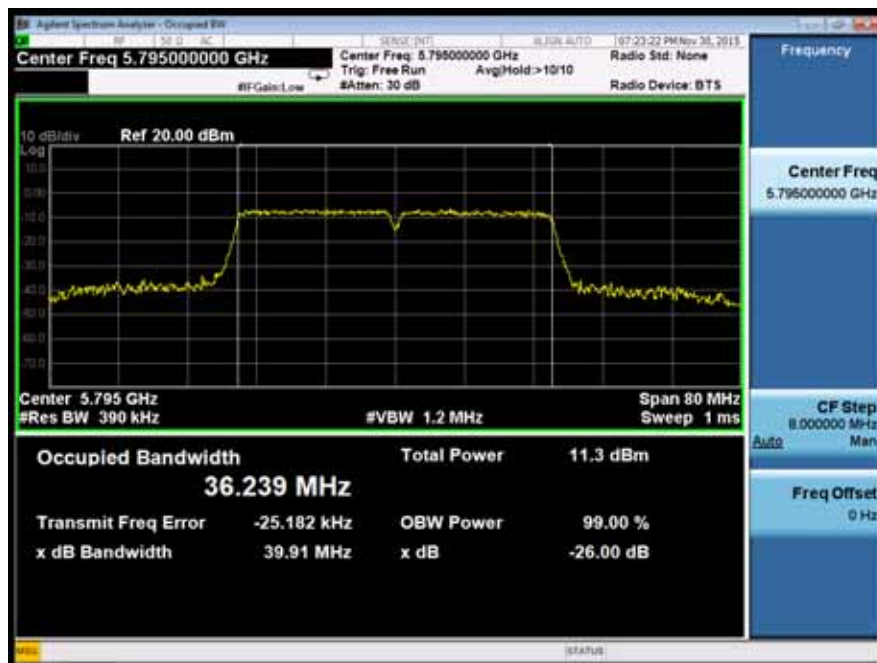


Test Model	26dB emission bandwidth 802.11ac(VHT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------

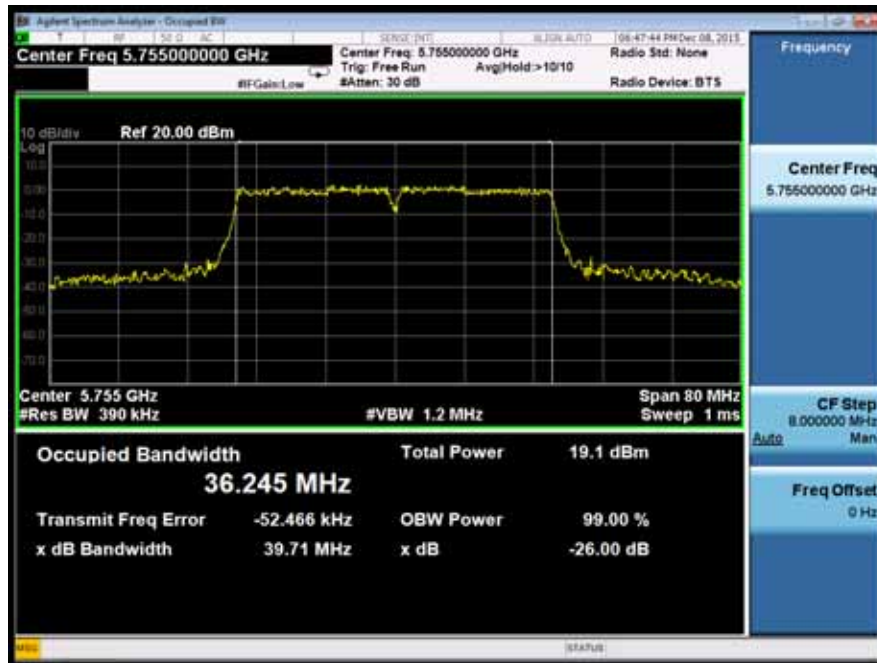

Test Model	26dB emission bandwidth 802.11ac(VHT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------

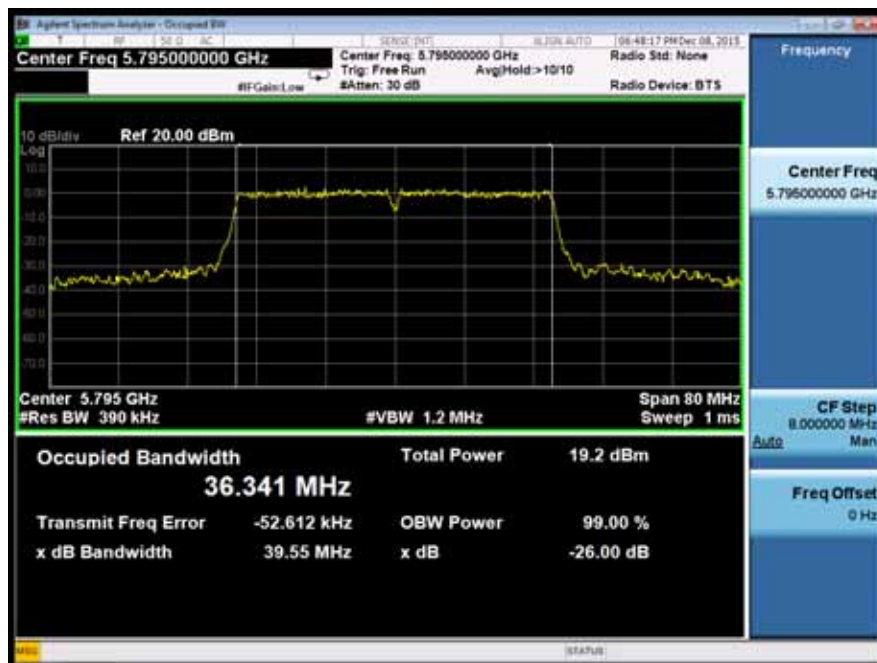


Test Model	26dB emission bandwidth 802.11ac(VHT80) Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz
------------	---	----------------------

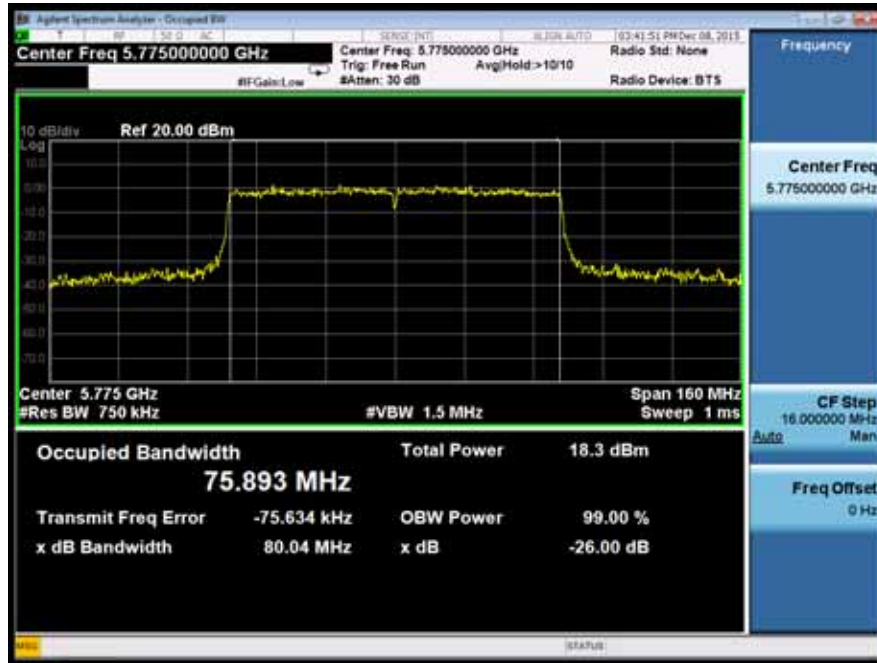


Test Model	99% Occupied Bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	--	---------------------




Test Model	99% Occupied Bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	--	---------------------

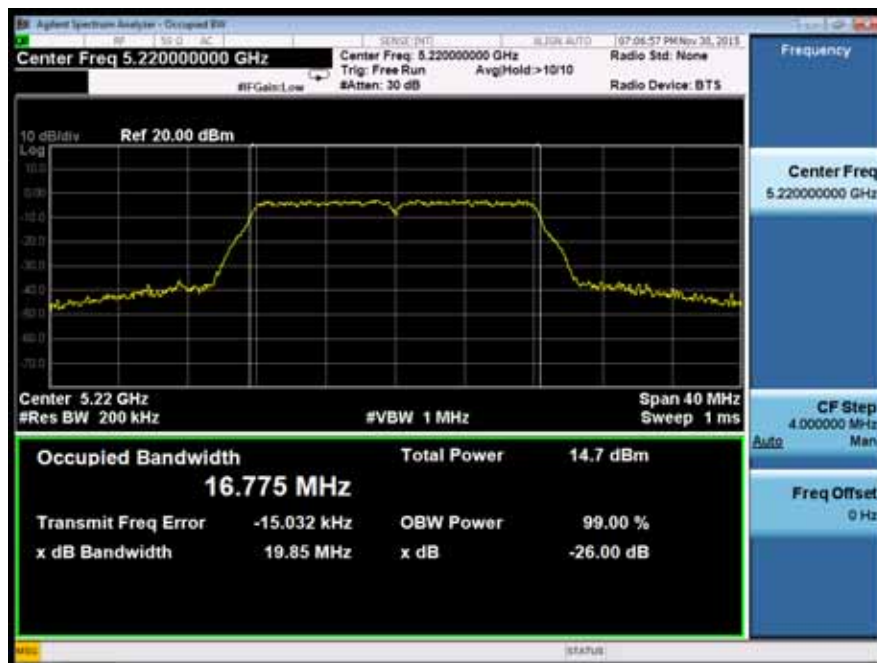


Test Model	99% Occupied Bandwidth 802.11a Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	--	---------------------

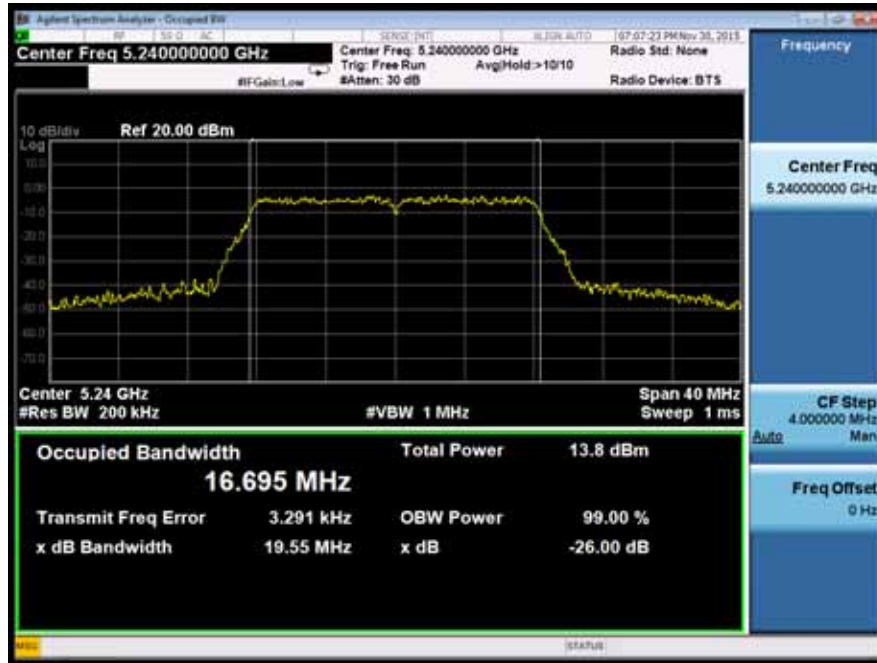


Test Model	99% Occupied Bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	--	---------------------

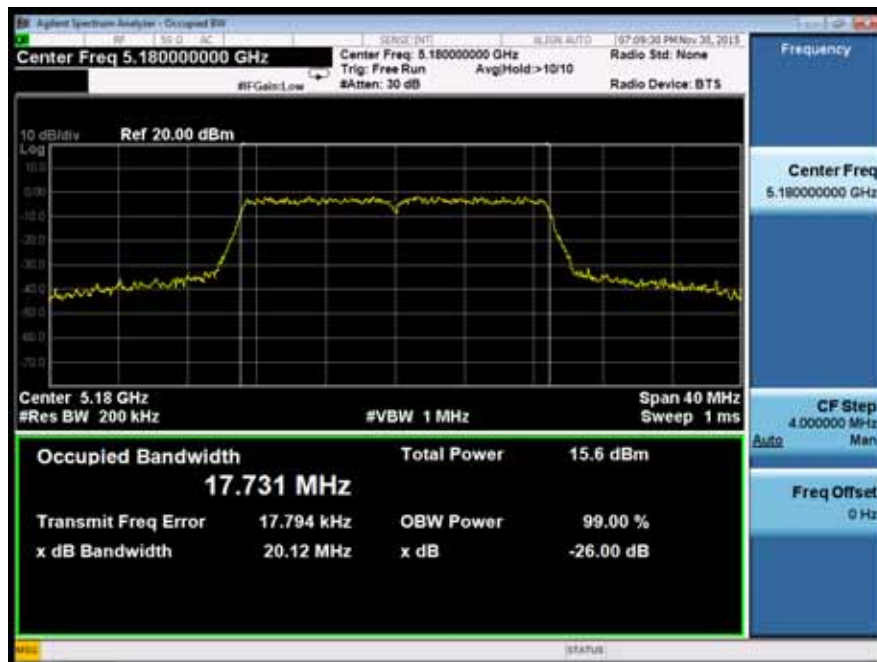

Test Model	99% Occupied Bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	--	---------------------

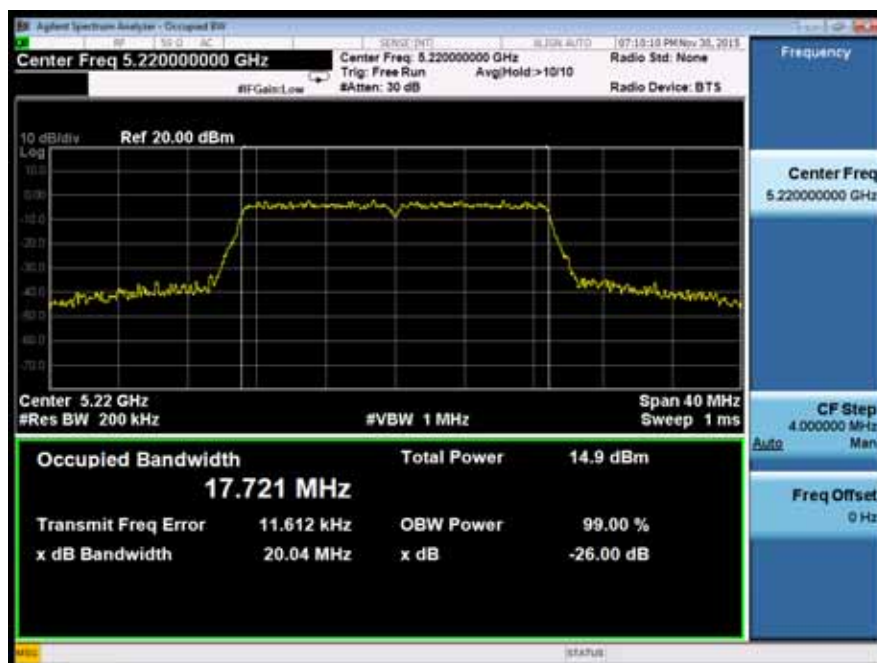


Test Model	99% Occupied Bandwidth 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	--	---------------------

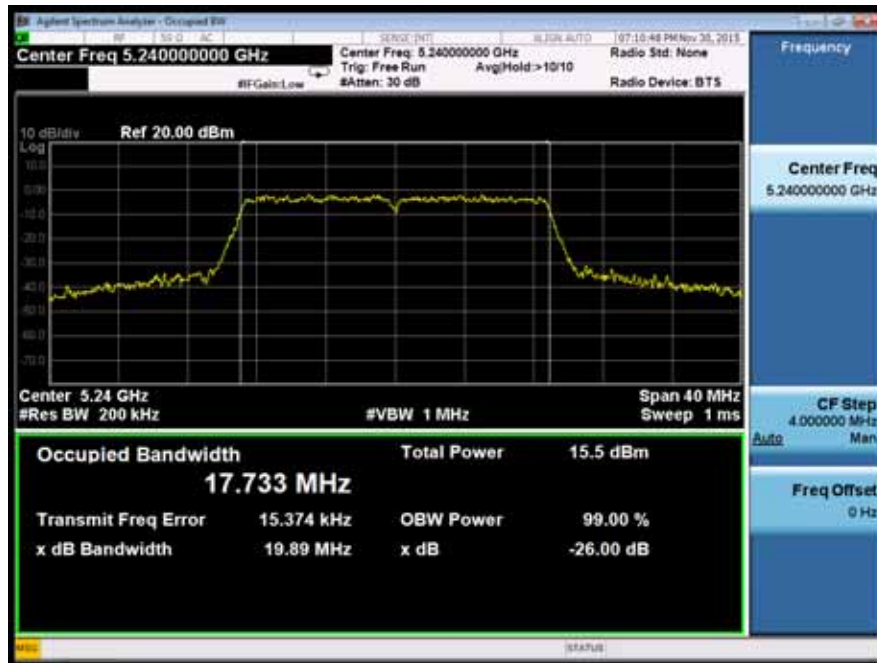

Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 36: 5180MHz
------------	--	---------------------




Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 44: 5220MHz
------------	--	---------------------

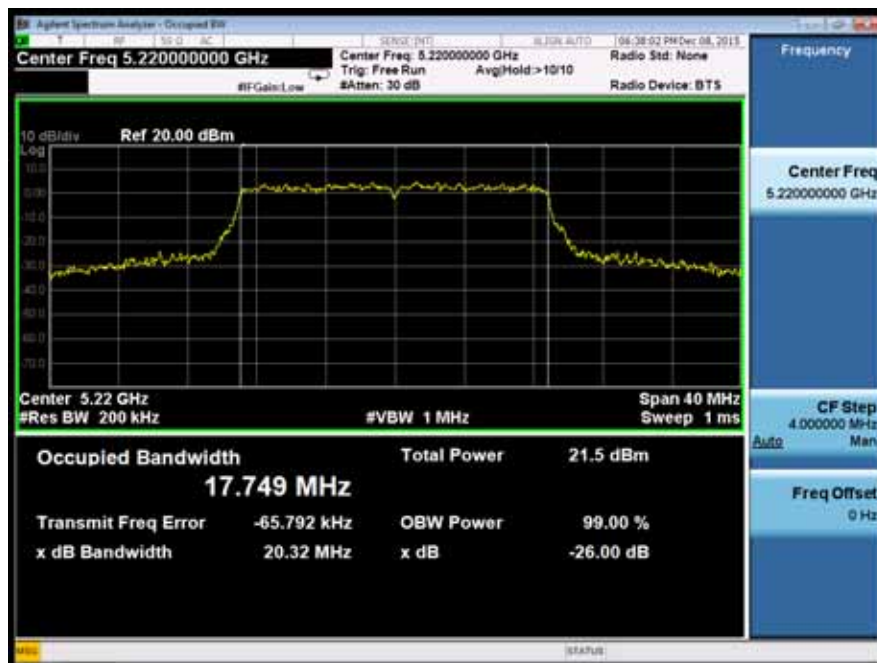


Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel 48: 5240MHz
------------	--	---------------------




Test Model	99% Occupied Bandwidth 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel 38: 5190MHz
------------	--	---------------------

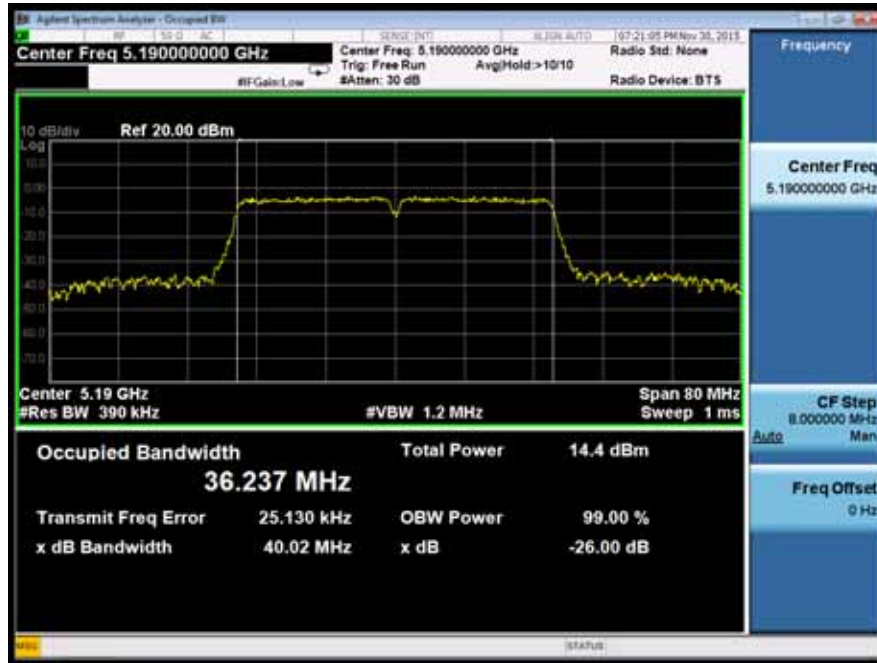


Test Model	99% Occupied Bandwidth 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel 46: 5230MHz
------------	--	---------------------

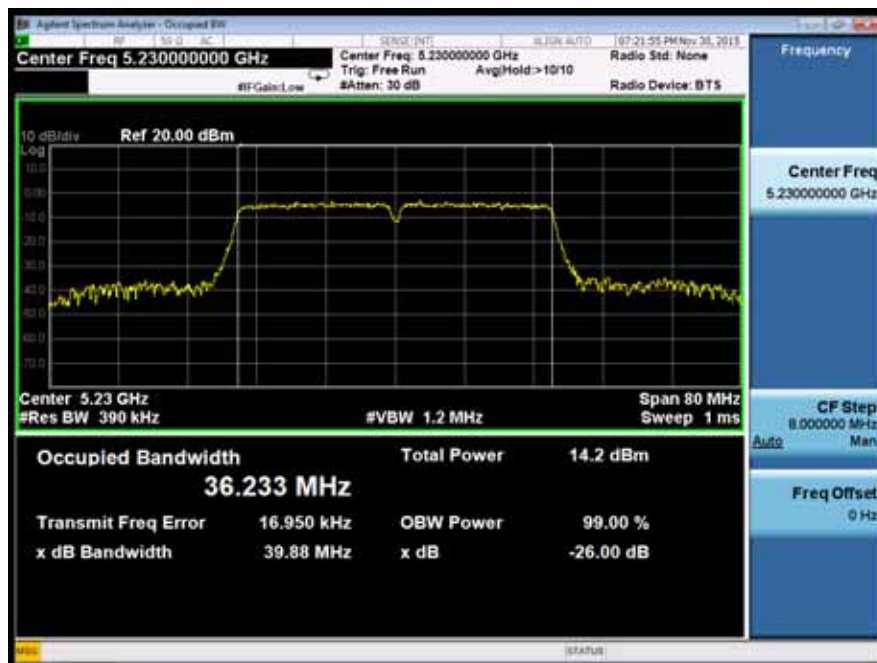

Test Model	99% Occupied Bandwidth 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel 38: 5190MHz
------------	--	---------------------

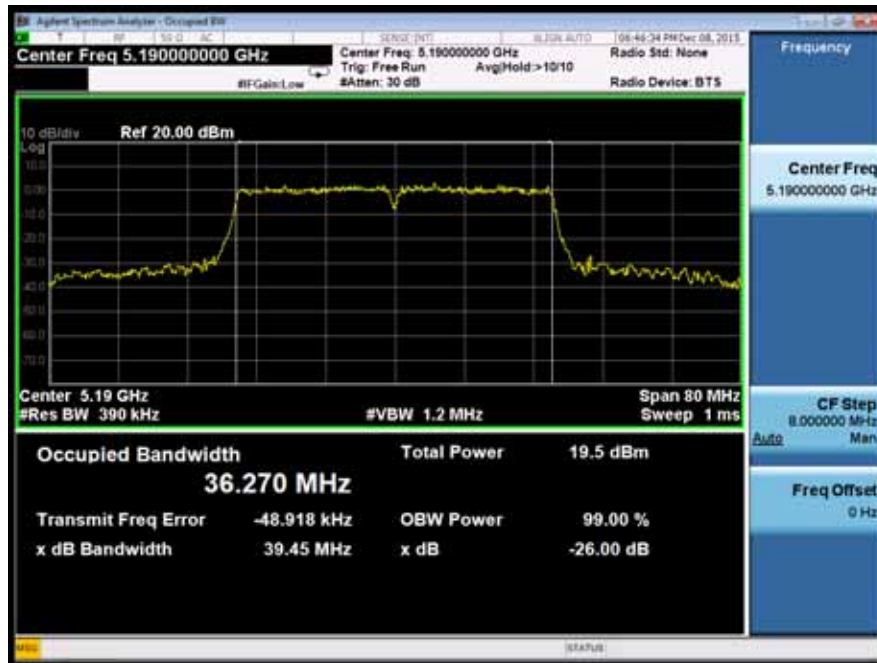


Test Model	99% Occupied Bandwidth 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel 46: 5230MHz
------------	--	---------------------

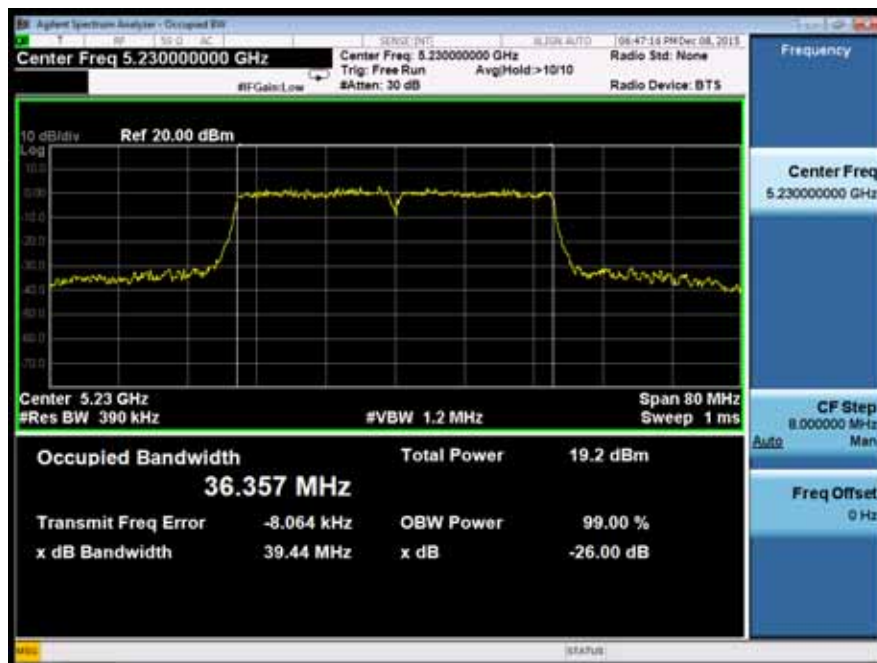


Test Model	99% Occupied Bandwidth 802.11ac(VHT80) Frequency Band I (5150-5250MHz)	Channel 42: 5210MHz
------------	--	---------------------




Test Model	99% Occupied Bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz

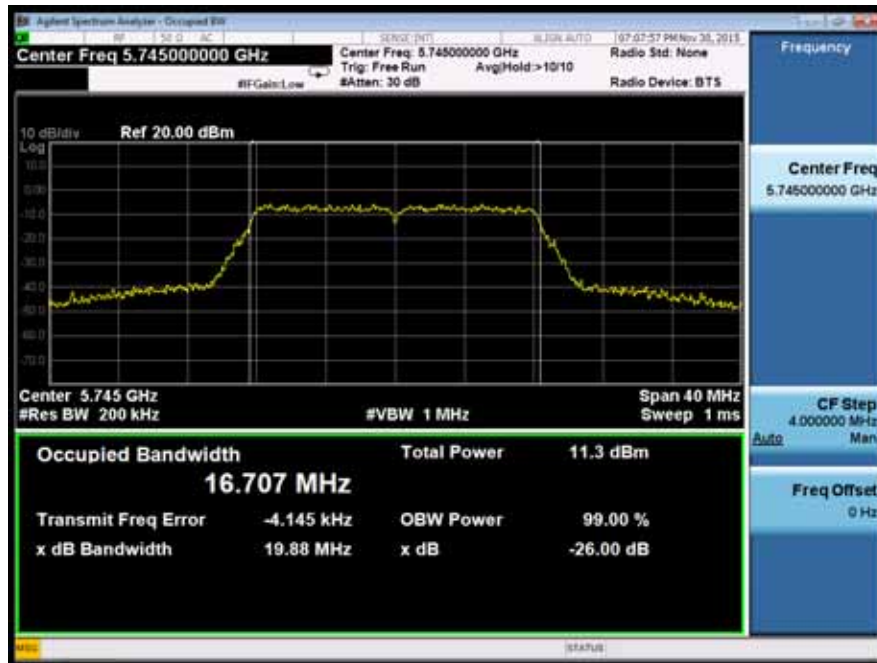


Test Model	99% Occupied Bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz

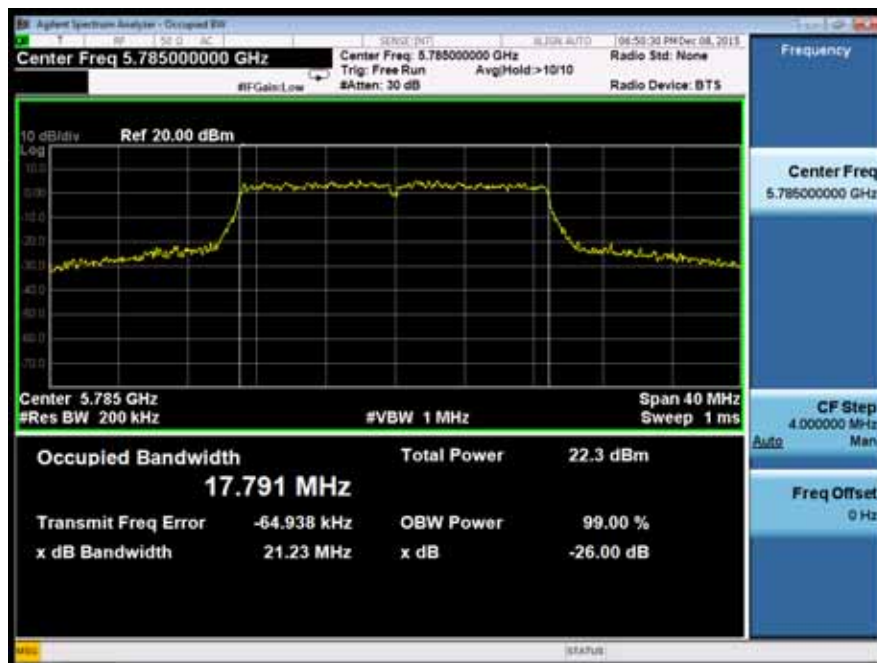


Test Model	99% Occupied Bandwidth 802.11a Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	--	----------------------

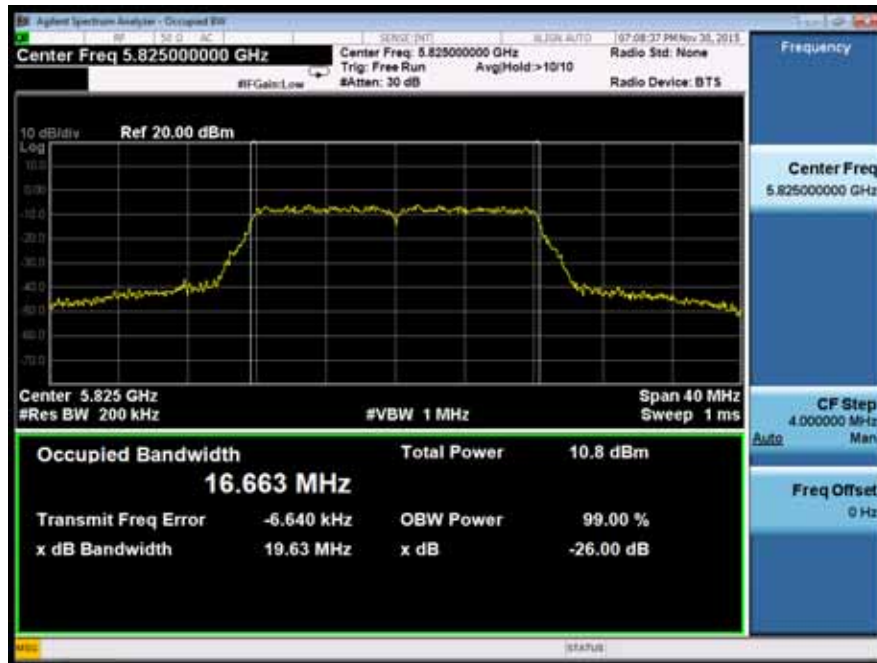


Test Model	99% Occupied Bandwidth 802.11n(HT20)	Channel 149: 5745MHz
	Frequency Band III (5725-5850MHz)	

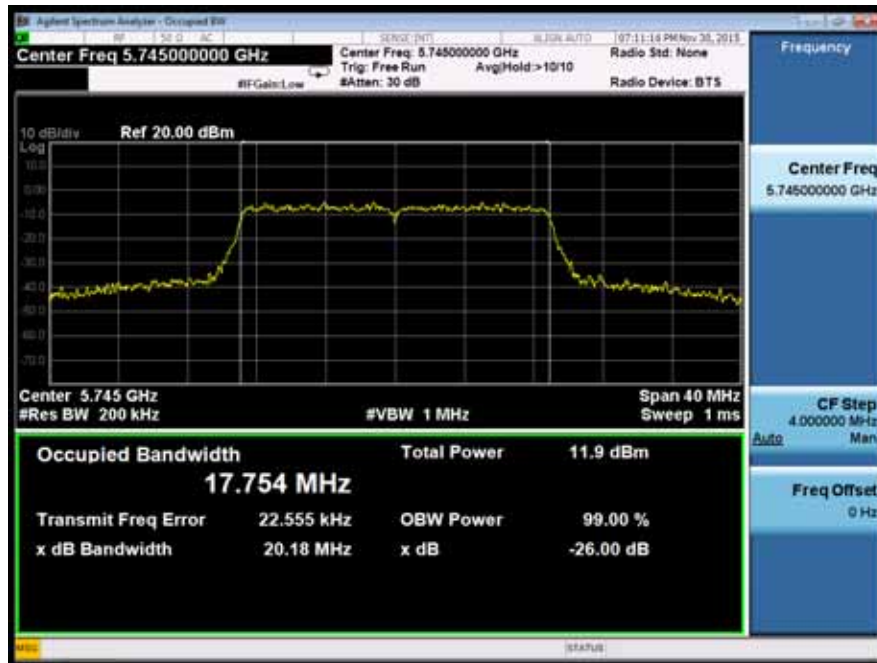


Test Model	99% Occupied Bandwidth 802.11n(HT20)	Channel 157: 5785MHz
	Frequency Band III (5725-5850MHz)	

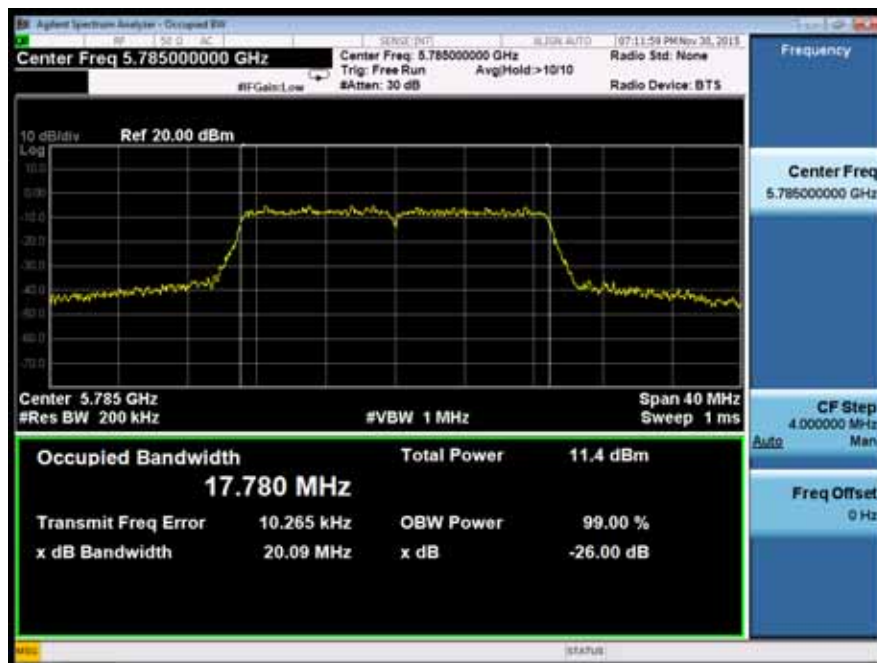


Test Model	99% Occupied Bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	--	----------------------

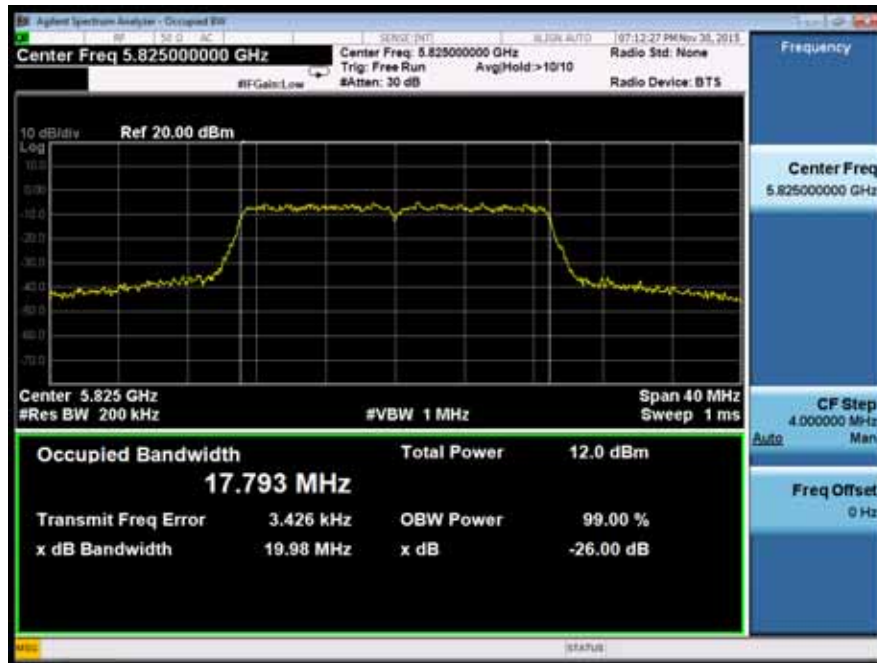

Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	--	----------------------

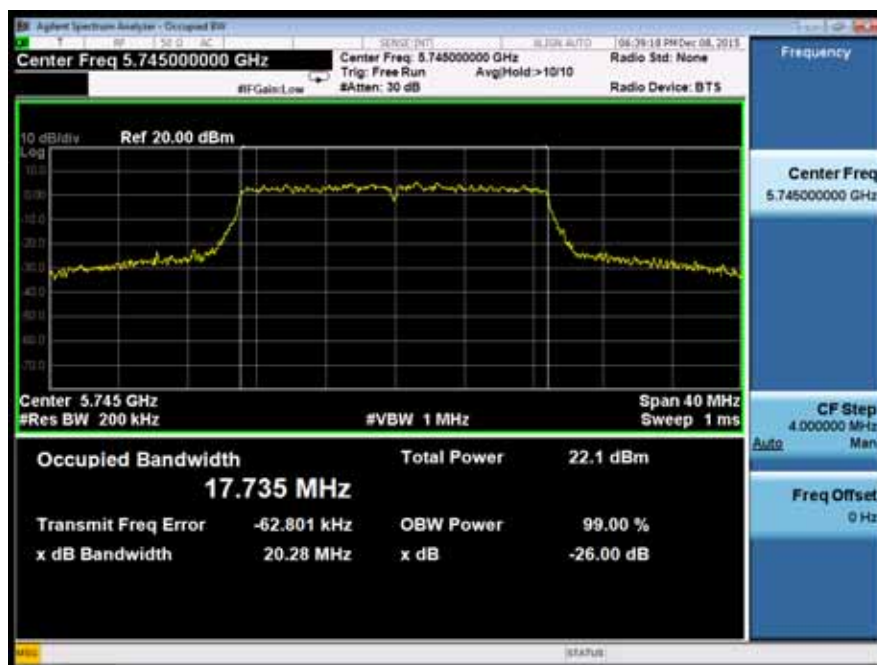


Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	--	----------------------

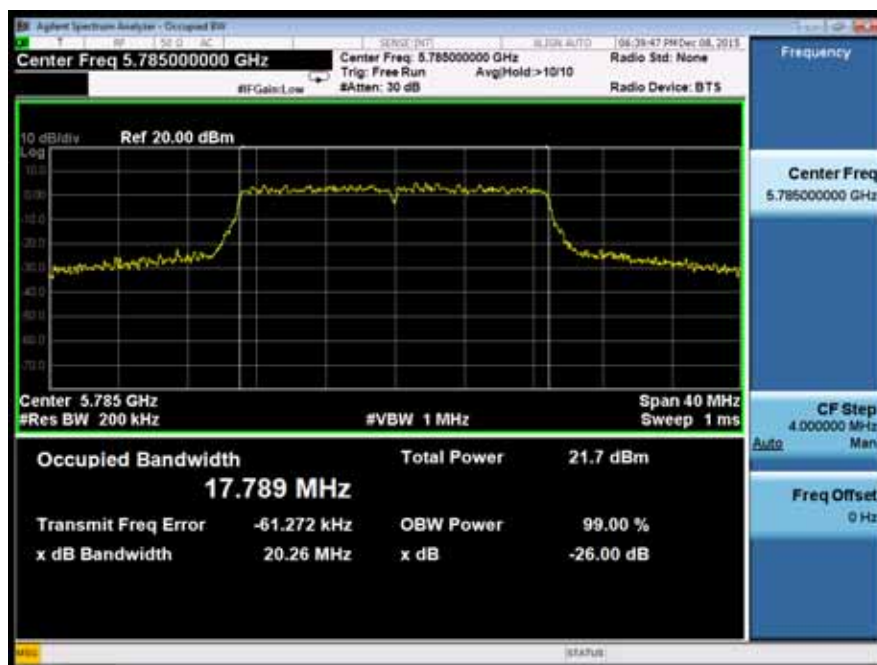


Test Model	99% Occupied Bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	--	----------------------




Test Model	99% Occupied Bandwidth 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	--	----------------------

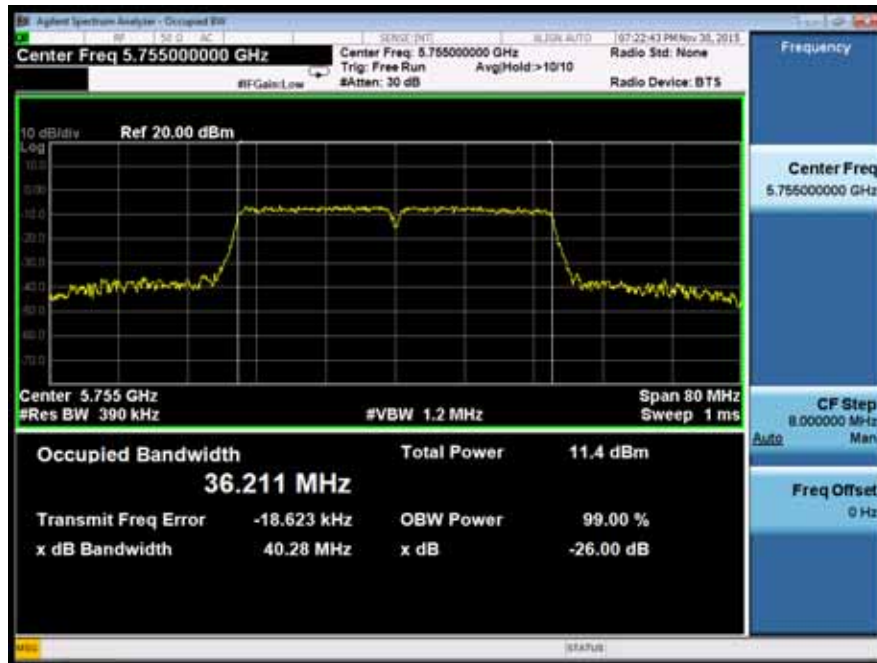


Test Model	99% Occupied Bandwidth 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	--	----------------------

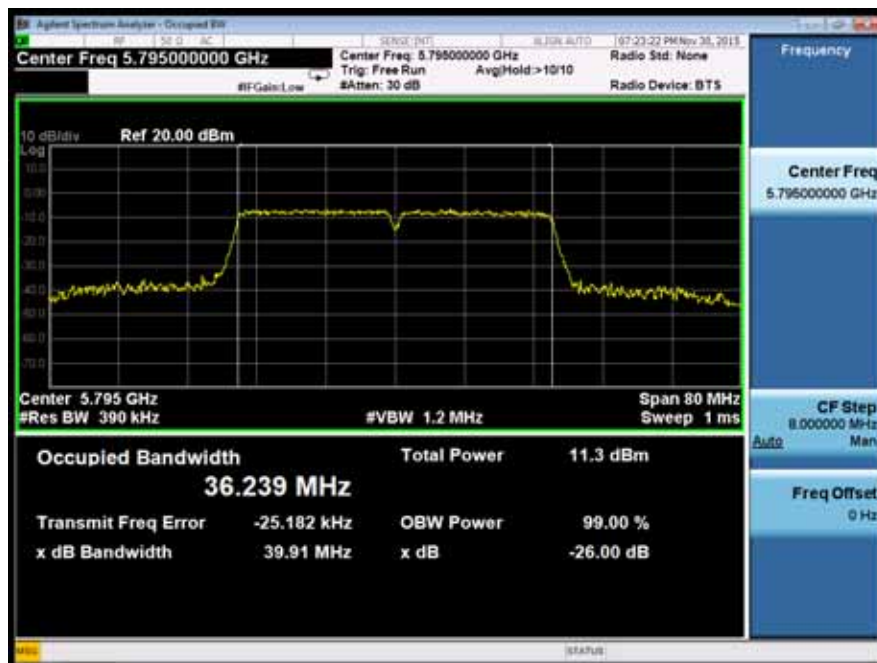

Test Model	99% Occupied Bandwidth 802.11ac(VHT40)	Channel 151: 5755MHz
	Frequency Band III (5725-5850MHz)	

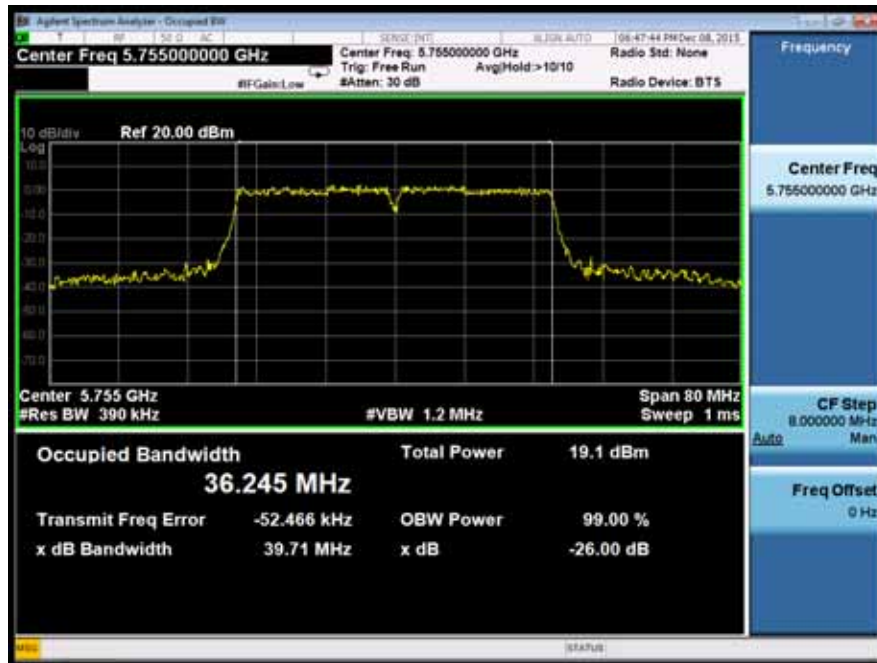

Test Model	99% Occupied Bandwidth 802.11ac(VHT40)	Channel 159: 5795MHz
	Frequency Band III (5725-5850MHz)	

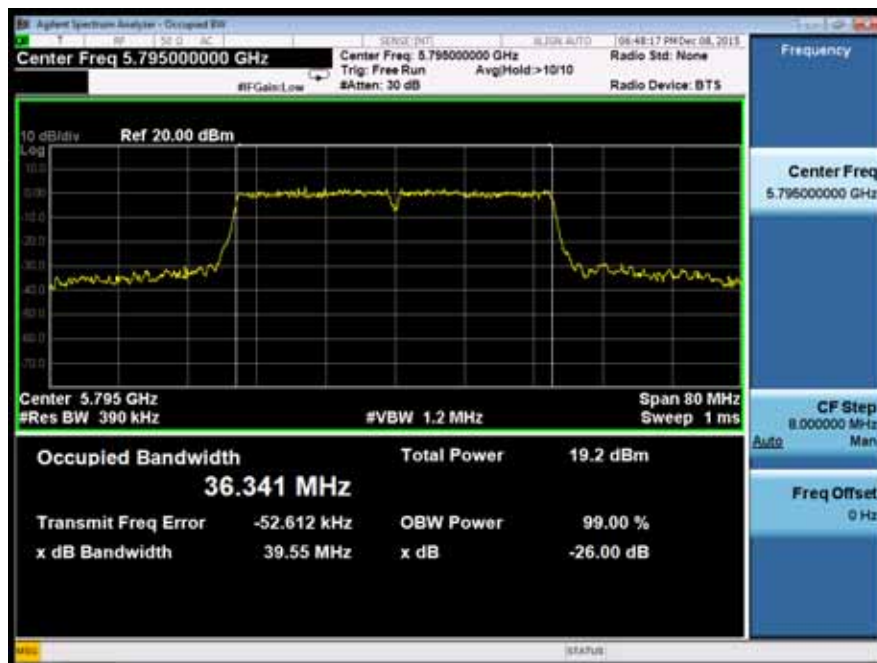

Test Model	99% Occupied Bandwidth 802.11ac(VHT80) Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz
------------	--	----------------------



Test Model	6dB Minimum Emission Bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz



Test Model	6dB Minimum Emission Bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz




Test Model	6dB Minimum Emission Bandwidth	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz




Test Model	6dB Minimum Emission Bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	--	----------------------



Test Model	6dB Minimum Emission Bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	--	----------------------

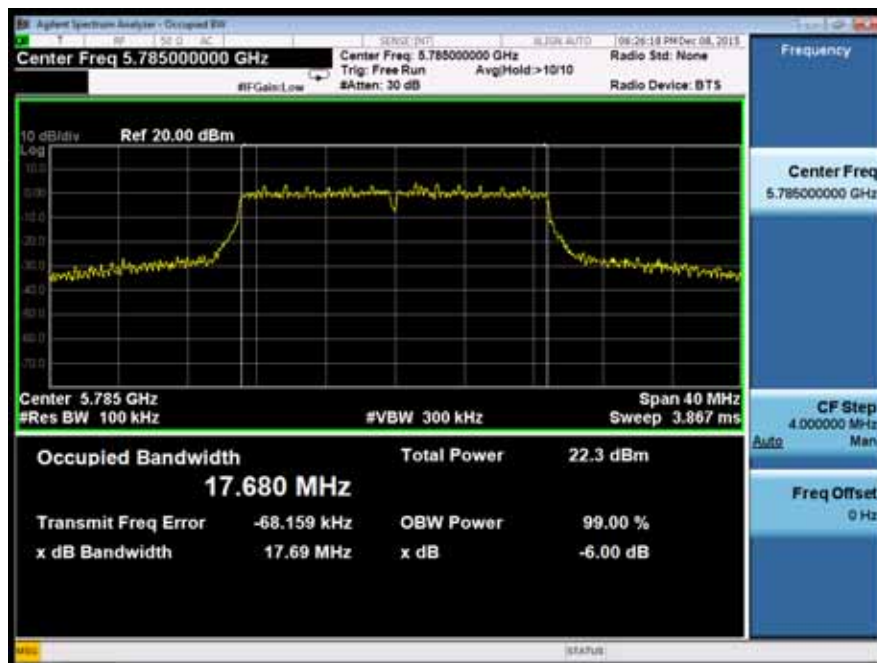

Test Model	6dB Minimum Emission Bandwidth 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	--	----------------------

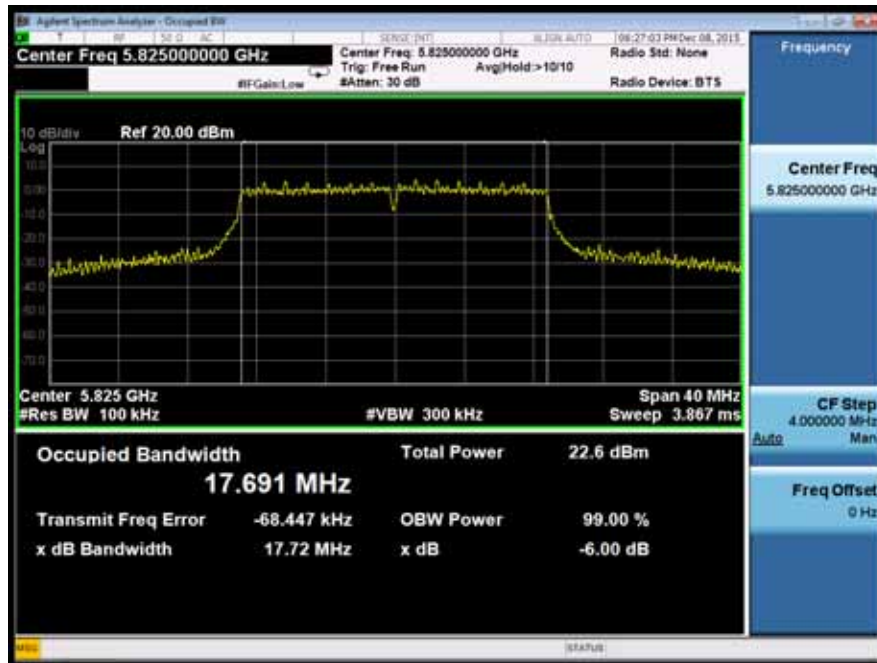

Test Model	6dB Minimum Emission Bandwidth	
	802.11ac(VHT20)	
	Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz




Test Model	6dB Minimum Emission Bandwidth	
	802.11ac(VHT20)	
	Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz




Test Model	6dB Minimum Emission Bandwidth 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	--	----------------------




Test Model	6dB Minimum Emission Bandwidth 802.11n(HT40)	Channel 151: 5755MHz
	Frequency Band III (5725-5850MHz)	

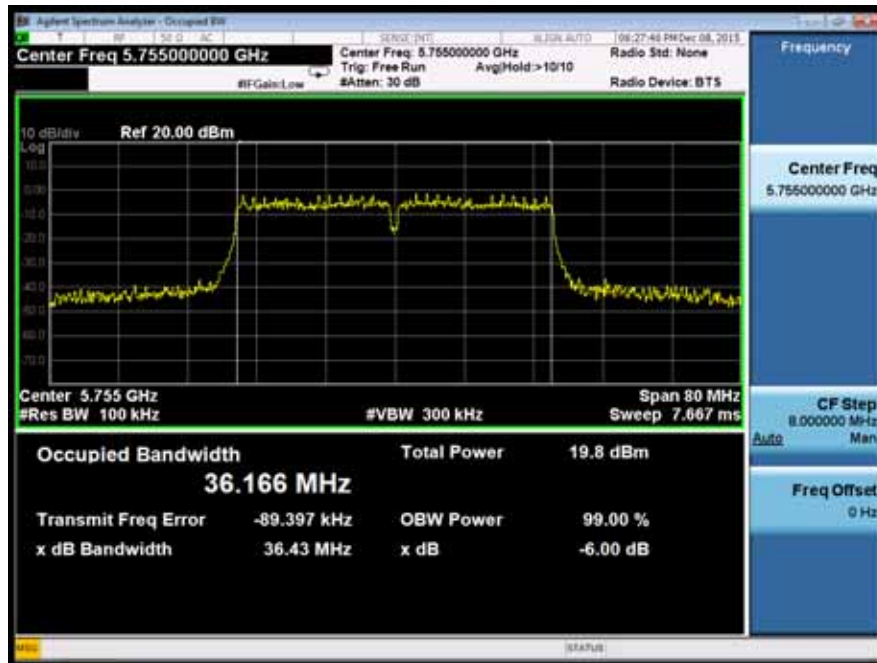


Test Model	6dB Minimum Emission Bandwidth 802.11n(HT40)	Channel 159: 5795MHz
	Frequency Band III (5725-5850MHz)	

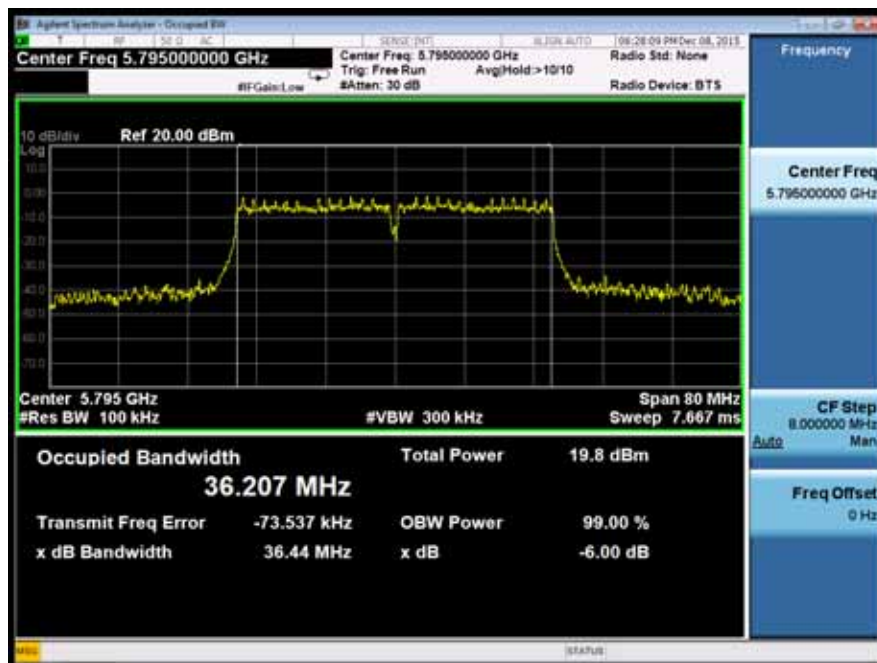


Test Model	6dB Minimum Emission Bandwidth	
	802.11ac(VHT40)	
	Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz

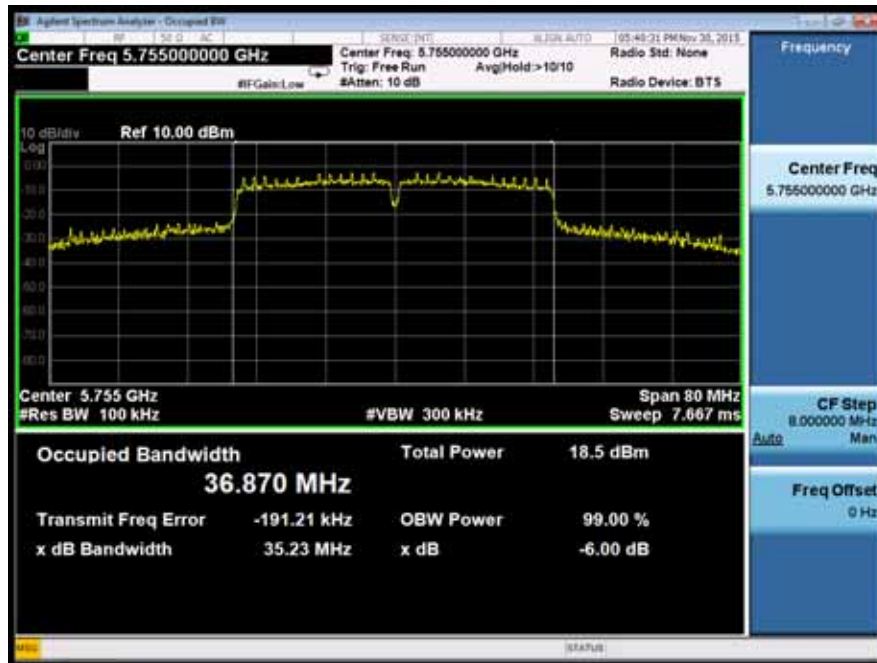

Test Model	6dB Minimum Emission Bandwidth	
	802.11ac(VHT40)	
	Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz

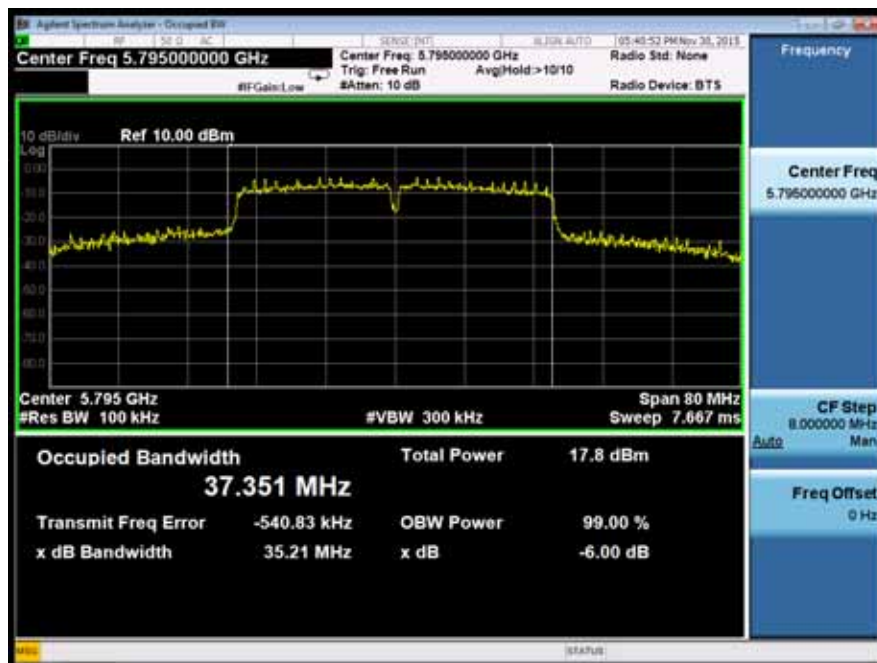

Test Model	6dB Minimum Emission Bandwidth 802.11ac(VHT80) Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz
------------	--	----------------------

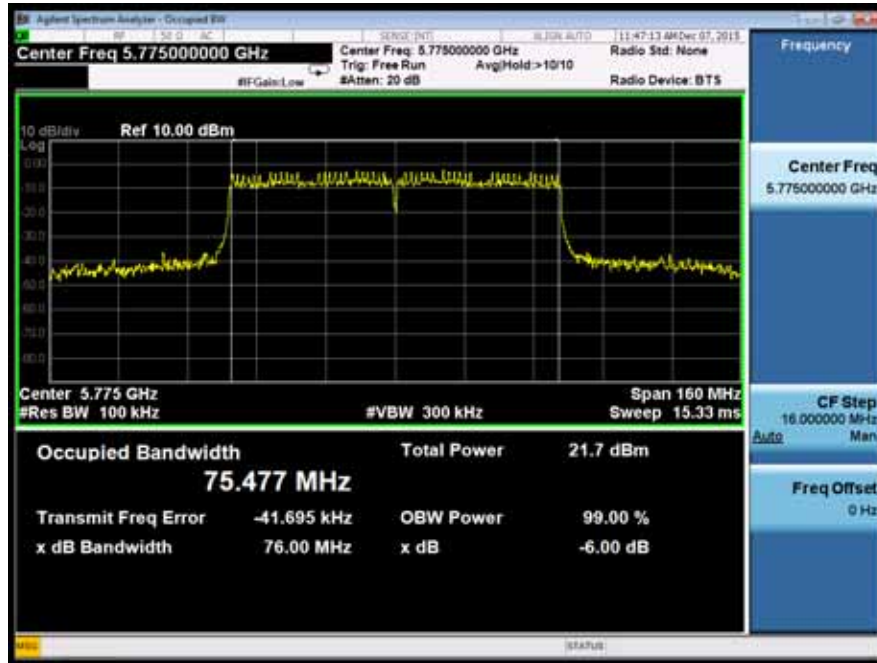

8.2 MAXIMUM CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.407 (a)(1) for band 5150-5250MHz and KDB 789003 D2

According to FCC Part 15.407 (a)(3) for band 5725-5850MHz and KDB 789003 D2

8.2.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.2.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.2.4 Test Procedure

The maximum average conducted output power can be measured using Method PM-G (Measurement using a gated RF average power meter):

Measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

- a. The Transmitter output (antenna port) was connected to the power meter.
- b. Turn on the EUT and power meter and then record the power value.
- c. Repeat above procedures on all channels needed to be tested.

8.2.5 Test Results

☑ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH36	5180	23.46	30	PASS
	CH44	5220	23.18	30	PASS
	CH48	5240	23.65	30	PASS
802.11n (HT20)	CH36	5180	23.89	30	PASS
	CH44	5220	23.33	30	PASS
	CH48	5240	23.75	30	PASS
802.11n (HT40)	CH 38	5190	19.09	30	PASS
	CH 46	5230	18.76	30	PASS
802.11ac (VHT20)	CH36	5180	19.01	30	PASS
	CH44	5220	23.18	30	PASS
	CH48	5240	23.42	30	PASS
802.11ac (VHT40)	CH38	5190	19.46	30	PASS
	CH46	5230	19.81	30	PASS
802.11ac (VHT80)	CH42	5210	19.72	30	PASS
Note: N/A (Not Applicable)					

☑ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	2	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH36	5180	23.16	30	PASS
	CH44	5220	23.40	30	PASS
	CH48	5240	23.06	30	PASS
802.11n (HT20)	CH36	5180	23.11	30	PASS
	CH44	5220	23.36	30	PASS
	CH48	5240	23.43	30	PASS
802.11n (HT40)	CH 38	5190	19.25	30	PASS
	CH 46	5230	19.00	30	PASS
802.11ac (VHT20)	CH36	5180	19.18	30	PASS
	CH44	5220	23.17	30	PASS
	CH48	5240	23.15	30	PASS
802.11ac (VHT40)	CH38	5190	19.53	30	PASS
	CH46	5230	19.68	30	PASS
802.11ac (VHT80)	CH42	5210	19.74	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	3	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH36	5180	23.41	30	PASS
	CH44	5220	23.18	30	PASS
	CH48	5240	23.05	30	PASS
802.11n (HT20)	CH36	5180	23.47	30	PASS
	CH44	5220	23.23	30	PASS
	CH48	5240	23.08	30	PASS
802.11n (HT40)	CH 38	5190	19.12	30	PASS
	CH 46	5230	19.05	30	PASS
802.11ac (VHT20)	CH36	5180	19.24	30	PASS
	CH44	5220	23.36	30	PASS
	CH48	5240	23.25	30	PASS
802.11ac (VHT40)	CH38	5190	19.35	30	PASS
	CH46	5230	19.24	30	PASS
802.11ac (VHT80)	CH42	5210	19.00	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1+2+3	Mode:	MIMO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11n (HT20)	CH36	5180	28.27	30	PASS
	CH44	5220	28.08	30	PASS
	CH48	5240	28.20	30	PASS
802.11n (HT40)	CH 38	5190	23.93	30	PASS
	CH 46	5230	23.71	30	PASS
802.11ac (VHT20)	CH36	5180	23.92	30	PASS
	CH44	5220	28.01	30	PASS
	CH48	5240	28.05	30	PASS
802.11ac (VHT40)	CH38	5190	24.22	30	PASS
	CH46	5230	24.35	30	PASS
802.11ac (VHT80)	CH42	5210	24.27	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH 149	5745	23.15	30	PASS
	CH 157	5785	23.42	30	PASS
	CH 165	5825	23.64	30	PASS
802.11n (HT20)	CH 149	5745	23.24	30	PASS
	CH 157	5785	23.16	30	PASS
	CH 165	5825	23.00	30	PASS
802.11n (HT40)	CH 151	5755	19.42	30	PASS
	CH 159	5795	19.35	30	PASS
802.11ac (VHT20)	CH149	5745	23.14	30	PASS
	CH157	5785	23.39	30	PASS
	CH165	5825	23.50	30	PASS
802.11ac (VHT40)	CH151	5755	19.25	30	PASS
	CH159	5795	19.03	30	PASS
802.11ac (VHT80)	CH155	5775	19.00	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	2	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH 149	5745	23.46	30	PASS
	CH 157	5785	23.11	30	PASS
	CH 165	5825	23.40	30	PASS
802.11n (HT20)	CH 149	5745	23.62	30	PASS
	CH 157	5785	23.17	30	PASS
	CH 165	5825	23.53	30	PASS
802.11n (HT40)	CH 151	5755	19.00	30	PASS
	CH 159	5795	19.20	30	PASS
802.11ac (VHT20)	CH149	5745	23.14	30	PASS
	CH157	5785	23.16	30	PASS
	CH165	5825	23.82	30	PASS
802.11ac (VHT40)	CH151	5755	19.69	30	PASS
	CH159	5795	19.58	30	PASS
802.11ac (VHT80)	CH155	5775	19.90	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	3	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11a	CH 149	5745	23.10	30	PASS
	CH 157	5785	23.62	30	PASS
	CH 165	5825	23.14	30	PASS
802.11n (HT20)	CH 149	5745	23.43	30	PASS
	CH 157	5785	23.82	30	PASS
	CH 165	5825	23.40	30	PASS
802.11n (HT40)	CH 151	5755	19.35	30	PASS
	CH 159	5795	19.50	30	PASS
802.11ac (VHT20)	CH149	5745	23.18	30	PASS
	CH157	5785	23.06	30	PASS
	CH165	5825	26.92	30	PASS
802.11ac (VHT40)	CH151	5755	19.35	30	PASS
	CH159	5795	19.42	30	PASS
802.11ac (VHT80)	CH155	5775	19.17	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1+2+3	Mode:	MIMO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm)	Limit (dBm)	Verdict
802.11n (HT20)	CH 149	5745	28.20	30	PASS
	CH 157	5785	28.17	30	PASS
	CH 165	5825	28.09	30	PASS
802.11n (HT40)	CH 151	5755	24.03	30	PASS
	CH 159	5795	24.12	30	PASS
802.11ac (VHT20)	CH149	5745	27.92	30	PASS
	CH157	5785	27.98	30	PASS
	CH165	5825	29.81	30	PASS
802.11ac (VHT40)	CH151	5755	24.21	30	PASS
	CH159	5795	24.12	30	PASS
802.11ac (VHT80)	CH155	5775	24.15	30	PASS
Note: N/A (Not Applicable)					

8.3 MAXIMUM PEAK POWER DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.407 (a)(1) for band 5150-5250MHz and KDB 789003 D2

According to FCC Part 15.407 (a)(3) for band 5725-5850MHz and KDB 789003 D2

8.3.2 Conformance Limit

■ For the band 5.15-5.25 GHz,

(a) (1) (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(a) (1) (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(a) (1) (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(a) (1) (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

■ For the band 5.725-5.85 GHz

(a) (3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

8.3.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.3.4 Test Procedure

Methods refer to FCC KDB 789033

1) Create an average power spectrum for the EUT operating mode being tested by following the instructions in section E)2) for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, "Compute power..."

2) Use the peak search function on the instrument to find the peak of the spectrum.

3) The result is the PPSD.

4) The above procedures make use of 500kHz resolution bandwidth to satisfy the 500kHz measurement bandwidth specified in the 15.407(a)(5). That rule section also permits use of resolution bandwidths less than 1 MHz "provided that the measured power is integrated to show the total power over the measurement bandwidth" (i.e., 1 MHz). If measurements are performed using a reduced resolution bandwidth and integrated over 500kHz bandwidth

Note: As a practical matter, it is recommended to use reduced RBW of 500 kHz for the sections 5.c) and 5.d) above, since RBW=500 kHz is available on nearly all spectrum analyzers.

8.3.5 Test Results

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	CH36	5180	3.607	11	N/A
	CH44	5220	3.175	11	N/A
	CH48	5240	2.162	11	N/A
802.11n (HT20)	CH36	5180	2.871	11	N/A
	CH44	5220	2.187	11	N/A
	CH48	5240	2.404	11	N/A
802.11n (HT40)	CH 38	5190	-1.750	11	N/A
	CH 46	5230	-1.658	11	N/A
802.11ac (VHT20)	CH36	5180	2.350	11	N/A
	CH44	5220	2.221	11	N/A
	CH48	5240	1.962	11	N/A
802.11ac (VHT40)	CH38	5190	-2.960	11	N/A
	CH46	5230	-2.854	11	N/A
802.11ac (VHT80)	CH42	5210	-4.272	11	N/A
Note: N/A (Not Applicable)					

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	2	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	CH36	5180	3.762	11	N/A
	CH44	5220	2.308	11	N/A
	CH48	5240	3.844	11	N/A
802.11n (HT20)	CH36	5180	2.438	11	N/A
	CH44	5220	2.166	11	N/A
	CH48	5240	3.911	11	N/A
802.11n (HT40)	CH 38	5190	-1.310	11	N/A
	CH 46	5230	-1.254	11	N/A
802.11ac (VHT20)	CH36	5180	2.391	11	N/A
	CH44	5220	2.391	11	N/A
	CH48	5240	2.363	11	N/A
802.11ac (VHT40)	CH38	5190	-2.960	11	N/A
	CH46	5230	-3.051	11	N/A
802.11ac (VHT80)	CH42	5210	-4.710	11	N/A
Note: N/A (Not Applicable)					

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	3	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11a	CH36	5180	2.331	11	N/A
	CH44	5220	3.334	11	N/A
	CH48	5240	4.203	11	N/A
802.11n (HT20)	CH36	5180	2.257	11	N/A
	CH44	5220	1.465	11	N/A
	CH48	5240	2.079	11	N/A
802.11n (HT40)	CH 38	5190	-1.268	11	N/A
	CH 46	5230	-1.085	11	N/A
802.11ac (VHT20)	CH36	5180	2.257	11	N/A
	CH44	5220	3.705	11	N/A
	CH48	5240	2.337	11	N/A
802.11ac (VHT40)	CH38	5190	-2.960	11	N/A
	CH46	5230	-3.658	11	N/A
802.11ac (VHT80)	CH42	5210	-5.509	11	N/A
Note: N/A (Not Applicable)					

☒ Frequency Band I (5150-5250MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1+2+3	Mode:	MIMO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/MHz)	Limit (dBm/MHz)	Verdict
802.11n (HT20)	CH36	5180	7.30	11	N/A
	CH44	5220	6.72	11	N/A
	CH48	5240	7.64	11	N/A
802.11n (HT40)	CH 38	5190	3.33	11	N/A
	CH 46	5230	3.45	11	N/A
802.11ac (VHT20)	CH36	5180	7.10	11	N/A
	CH44	5220	7.60	11	N/A
	CH48	5240	7.00	11	N/A
802.11ac (VHT40)	CH38	5190	1.81	11	N/A
	CH46	5230	1.60	11	N/A
802.11ac (VHT80)	CH42	5210	-0.03	11	N/A
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
802.11a	CH 149	5745	0.845	30	PASS
	CH 157	5785	0.974	30	PASS
	CH 165	5825	1.330	30	PASS
802.11n (HT20)	CH 149	5745	0.496	30	PASS
	CH 157	5785	-0.028	30	PASS
	CH 165	5825	-0.923	30	PASS
802.11n (HT40)	CH 151	5755	-4.038	30	PASS
	CH 159	5795	-4.538	30	PASS
802.11ac (VHT20)	CH149	5745	-0.600	30	PASS
	CH157	5785	-0.804	30	PASS
	CH165	5825	1.580	30	PASS
802.11ac (VHT40)	CH151	5755	-5.586	30	PASS
	CH159	5795	-4.227	30	PASS
802.11ac (VHT80)	CH155	5775	-9.702	30	PASS
Note: N/A (Not Applicable)					


☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	2	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
802.11a	CH 149	5745	0.529	30	PASS
	CH 157	5785	0.869	30	PASS
	CH 165	5825	0.779	30	PASS
802.11n (HT20)	CH 149	5745	1.482	30	PASS
	CH 157	5785	0.911	30	PASS
	CH 165	5825	-0.635	30	PASS
802.11n (HT40)	CH 151	5755	-4.238	30	PASS
	CH 159	5795	-6.169	30	PASS
802.11ac (VHT20)	CH149	5745	-1.417	30	PASS
	CH157	5785	-0.286	30	PASS
	CH165	5825	-0.351	30	PASS
802.11ac (VHT40)	CH151	5755	-6.860	30	PASS
	CH159	5795	-3.996	30	PASS
802.11ac (VHT80)	CH155	5775	-9.944	30	PASS
Note: N/A (Not Applicable)					

☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	3	Mode:	SISO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
802.11a	CH 149	5745	-0.229	30	PASS
	CH 157	5785	-0.066	30	PASS
	CH 165	5825	-0.073	30	PASS
802.11n (HT20)	CH 149	5745	-0.023	30	PASS
	CH 157	5785	0.235	30	PASS
	CH 165	5825	-0.351	30	PASS
802.11n (HT40)	CH 151	5755	-4.270	30	PASS
	CH 159	5795	-4.227	30	PASS
802.11ac (VHT20)	CH149	5745	-0.344	30	PASS
	CH157	5785	-0.890	30	PASS
	CH165	5825	0.249	30	PASS
802.11ac (VHT40)	CH151	5755	-5.902	30	PASS
	CH159	5795	-6.169	30	PASS
802.11ac (VHT80)	CH155	5775	-6.948	30	PASS
Note: N/A (Not Applicable)					


☒ Frequency Band III (5725-5850MHz)					
Temperature :	28	Test Date :	December 1, 2015		
Humidity :	65 %	Test By:	King Kong		
Antenna:	1+2+3	Mode:	MIMO		
Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Level (dBm/500KHz)	Limit (dBm/500KHz)	Verdict
802.11n (HT20)	CH 149	5745	5.47	30	PASS
	CH 157	5785	5.16	30	PASS
	CH 165	5825	4.14	30	PASS
802.11n (HT40)	CH 151	5755	0.59	30	PASS
	CH 159	5795	-0.13	30	PASS
802.11ac (VHT20)	CH149	5745	4.01	30	PASS
	CH157	5785	4.12	30	PASS
	CH165	5825	5.34	30	PASS
802.11ac (VHT40)	CH151	5755	-1.31	30	PASS
	CH159	5795	0.08	30	PASS
802.11ac (VHT80)	CH155	5775	-3.87	30	PASS
Note: N/A (Not Applicable)					

Antenna 1

Test Model	Peak Power Spectral Density
	802.11a
	Frequency Band I (5150-5250MHz)
	Channel36 : 5180MHz

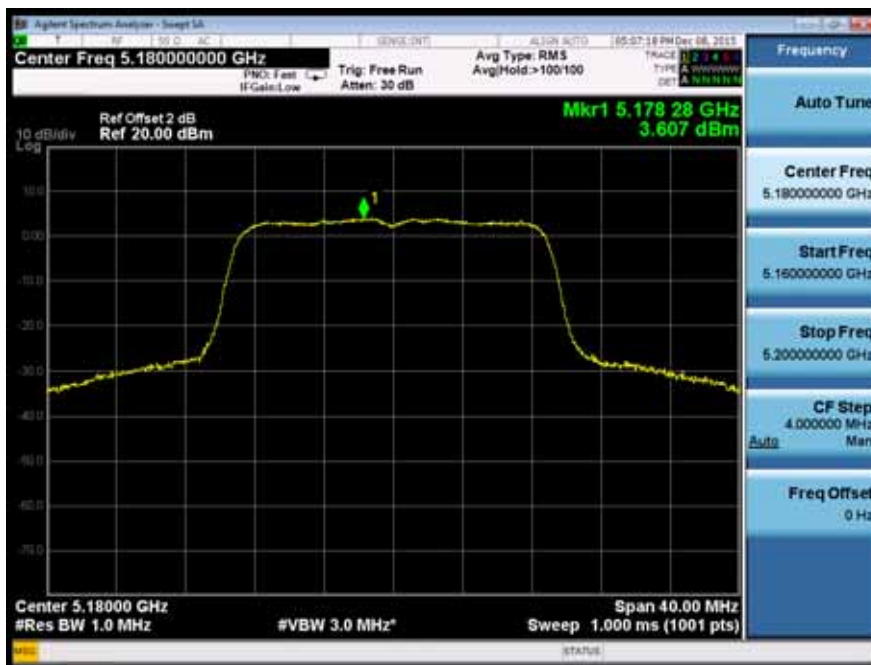


Test Model	Peak Power Spectral Density
	802.11a
	Frequency Band I (5150-5250MHz)
	Channel44 : 5220MHz

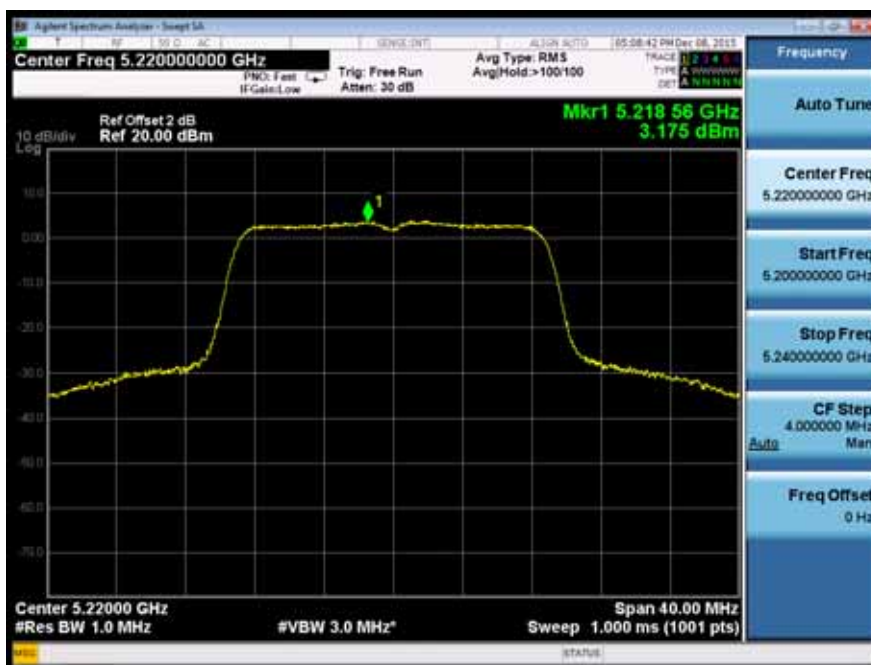

Test Model	Peak Power Spectral Density 802.11a	Channel48 : 5240MHz
	Frequency Band I (5150-5250MHz)	




Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------

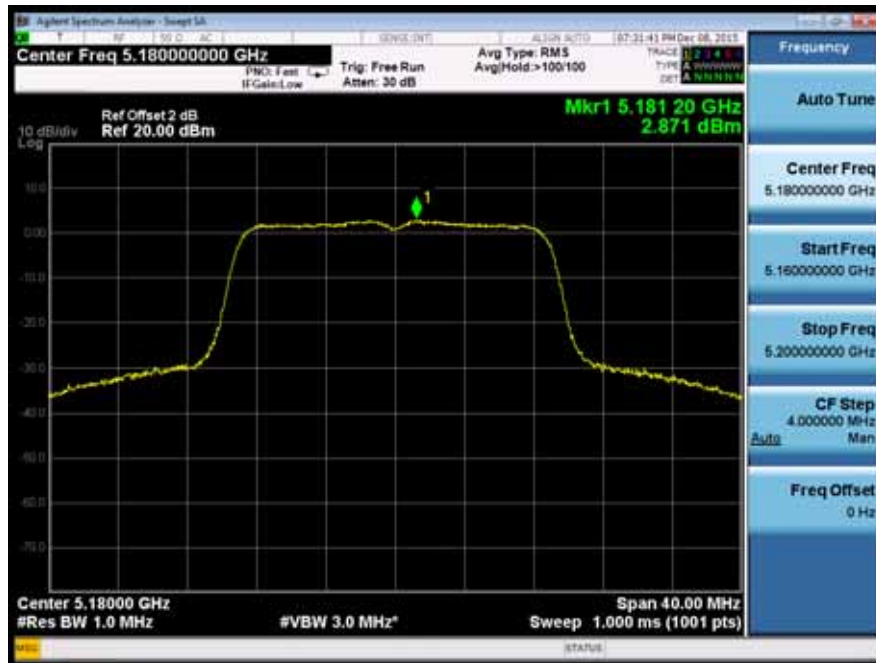

Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11n(HT20)	Channel48 : 5240MHz
	Frequency Band I (5150-5250MHz)	

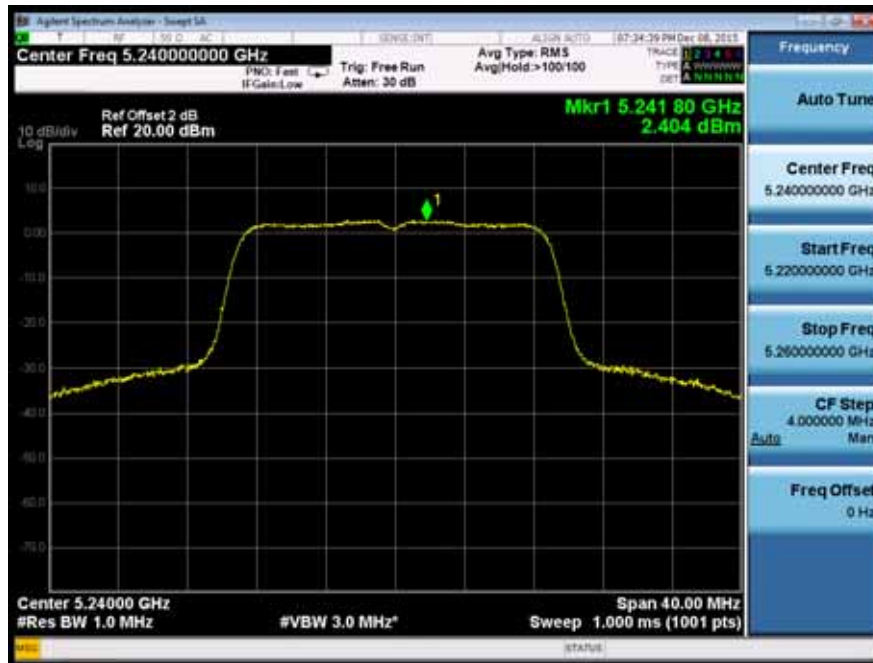

Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------

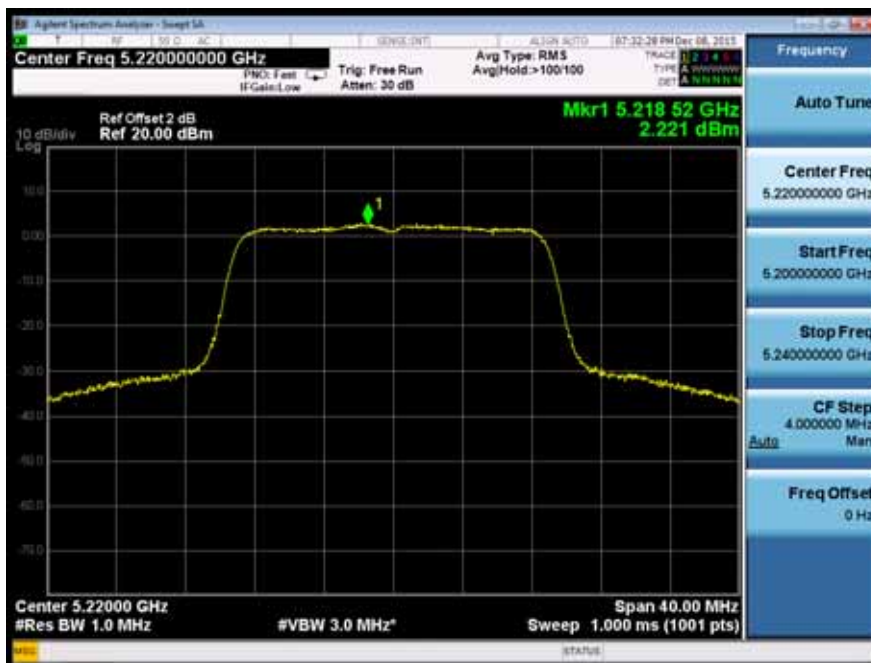


Test Model	Peak Power Spectral Density 802.11ac(VHT20)	Channel48 : 5240MHz
	Frequency Band I (5150-5250MHz)	



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------

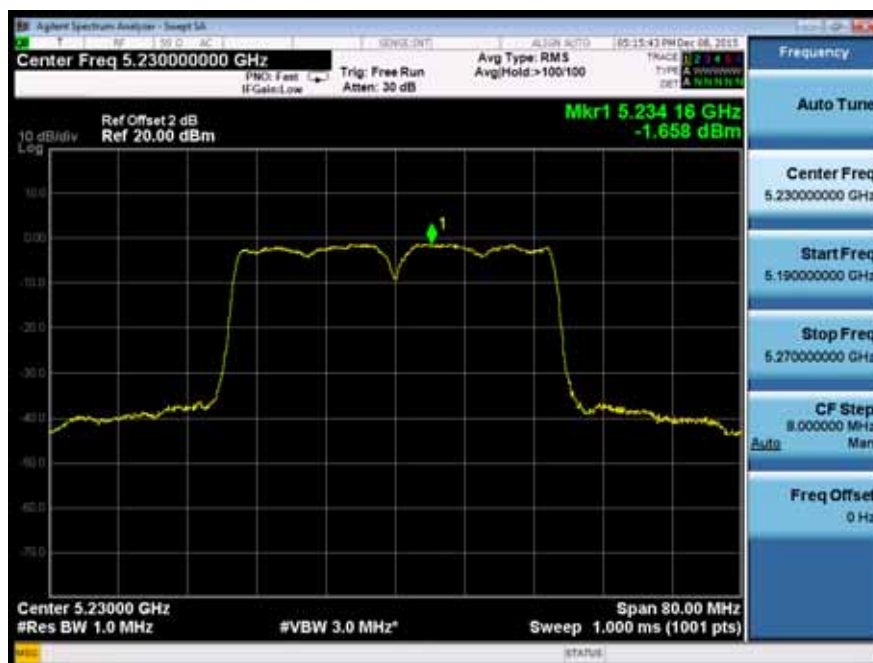

Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11ac(VHT80)	Channel42 : 5210MHz
	Frequency Band I (5150-5250MHz)	



Test Model	Peak Power Spectral Density	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz




Test Model	Peak Power Spectral Density	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz

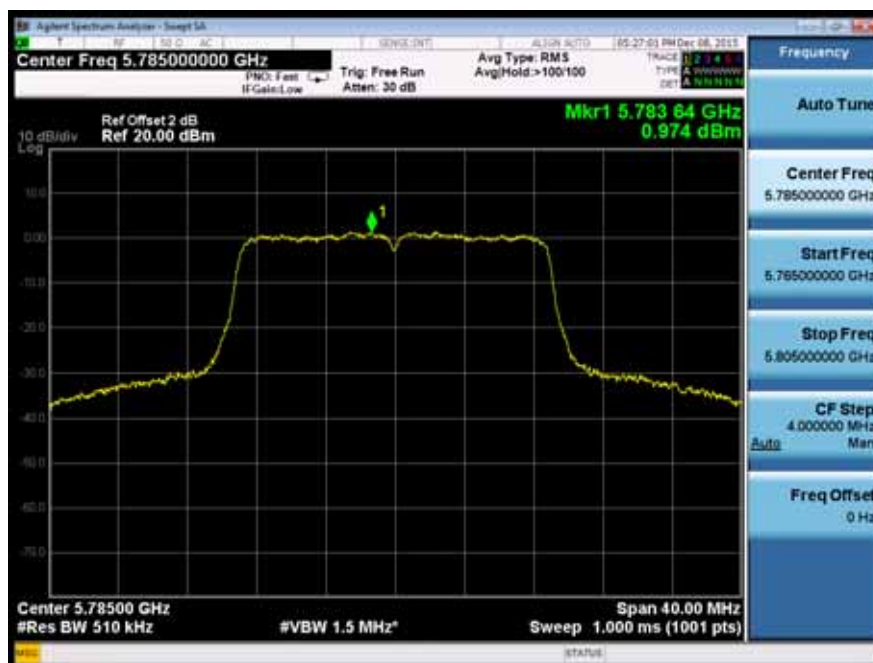


Test Model	Peak Power Spectral Density 802.11a Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------

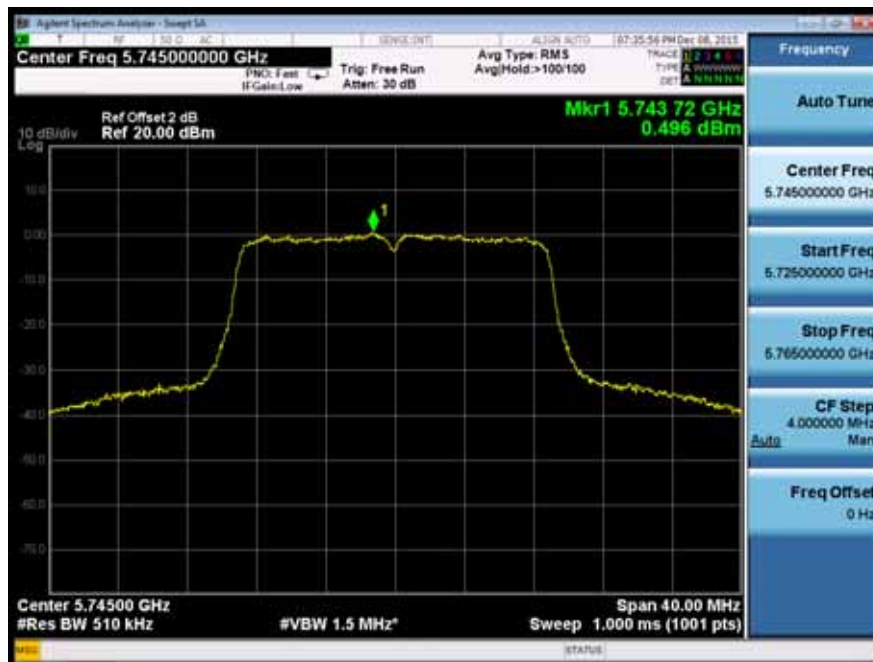

Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

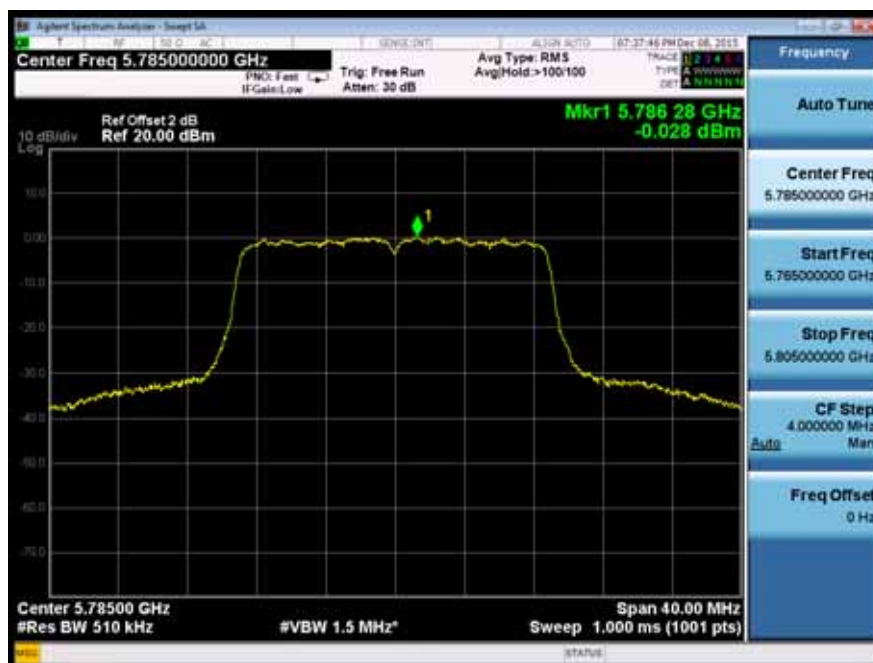

Test Model	Peak Power Spectral Density 802.11n(HT20)	Channel 165: 5825MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11ac(VHT20)	Channel 149: 5745MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11ac(VHT20)	Channel 157: 5785MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------




Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------

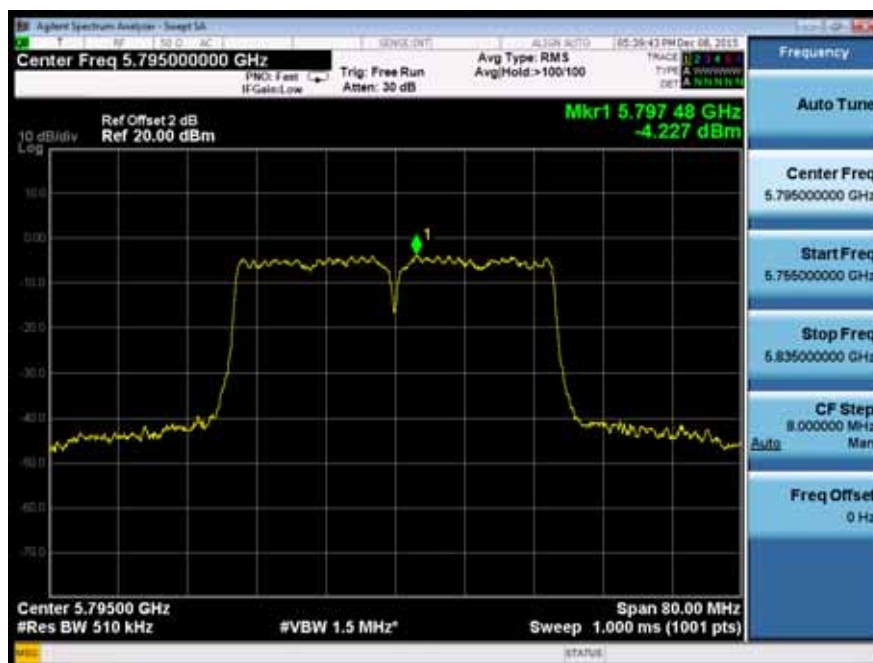

Test Model	Peak Power Spectral Density	
	802.11ac(VHT80)	
	Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz



Antenna 2

Peak Power Spectral Density
802.11a

Test Model

Frequency Band I (5150-5250MHz)

Channel36 : 5180MHz




Peak Power Spectral Density
802.11a

Test Model

Frequency Band I (5150-5250MHz)

Channel44 : 5220MHz

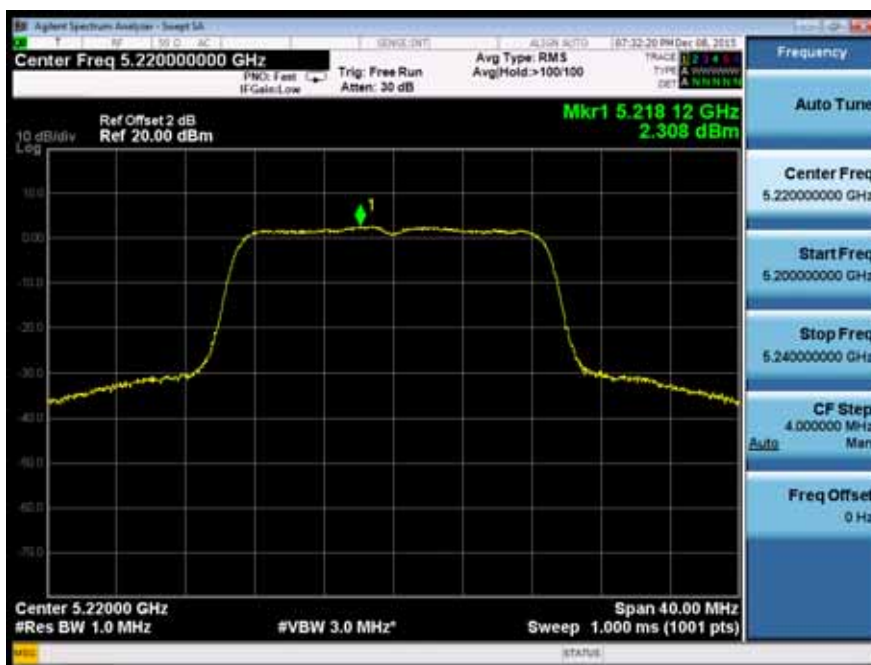

Test Model	Peak Power Spectral Density 802.11a Frequency Band I (5150-5250MHz)	Channel48 : 5240MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11n(HT20)	Channel48 : 5240MHz
------------	--	---------------------

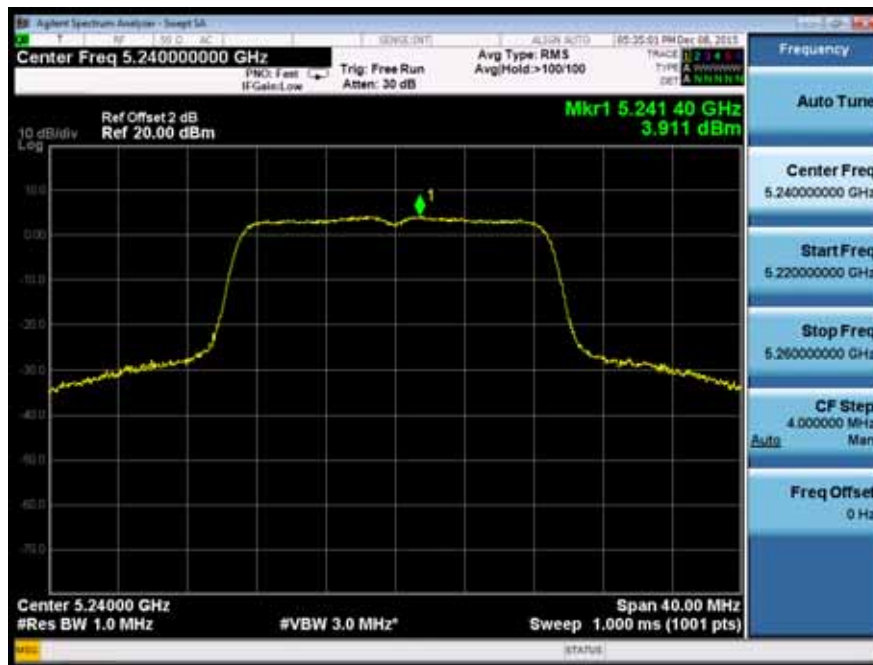

Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------

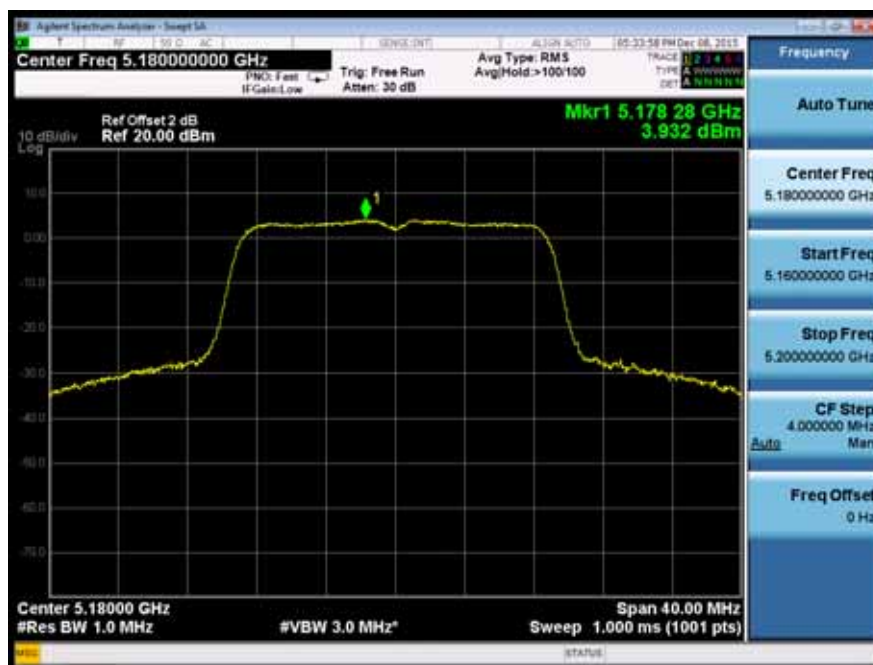

Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------

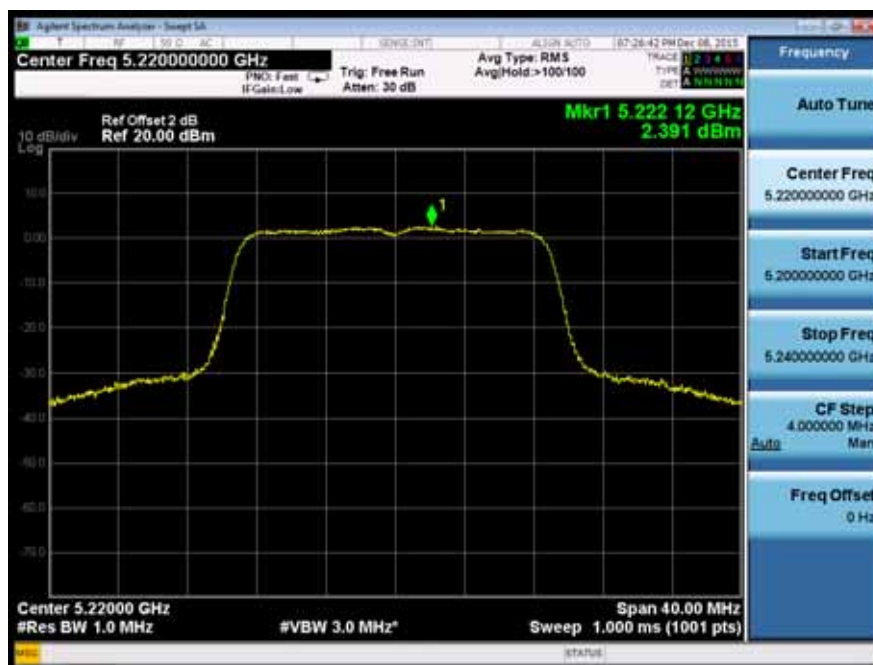

Test Model	Peak Power Spectral Density 802.11ac(VHT20)	Channel48 : 5240MHz
	Frequency Band I (5150-5250MHz)	



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11ac(VHT80)	Channel42 : 5210MHz
------------	--	---------------------



Test Model	Peak Power Spectral Density 802.11a	Channel 149: 5745MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11a	Channel 157: 5785MHz
	Frequency Band III (5725-5850MHz)	

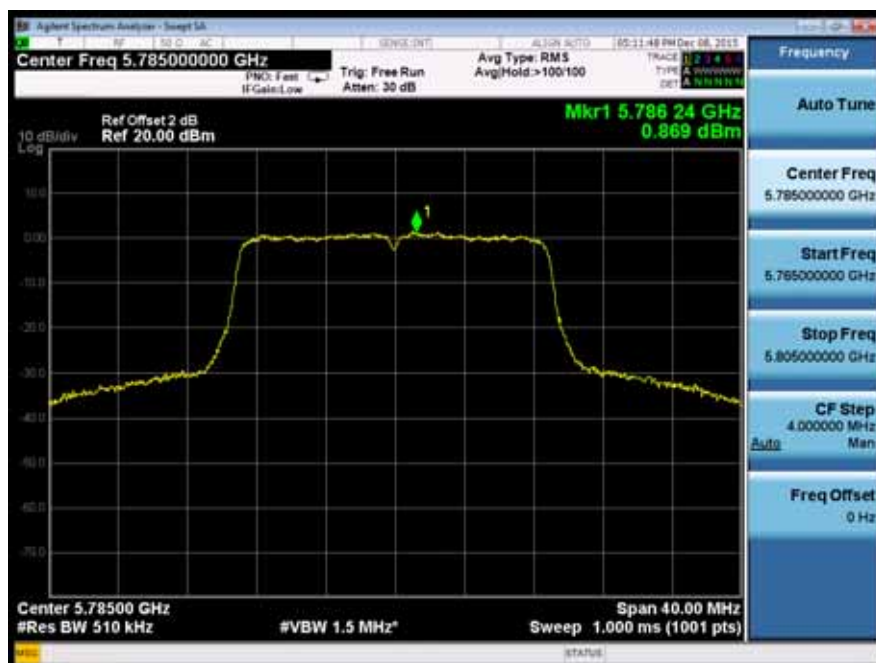


Test Model	Peak Power Spectral Density	
	802.11a	
	Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

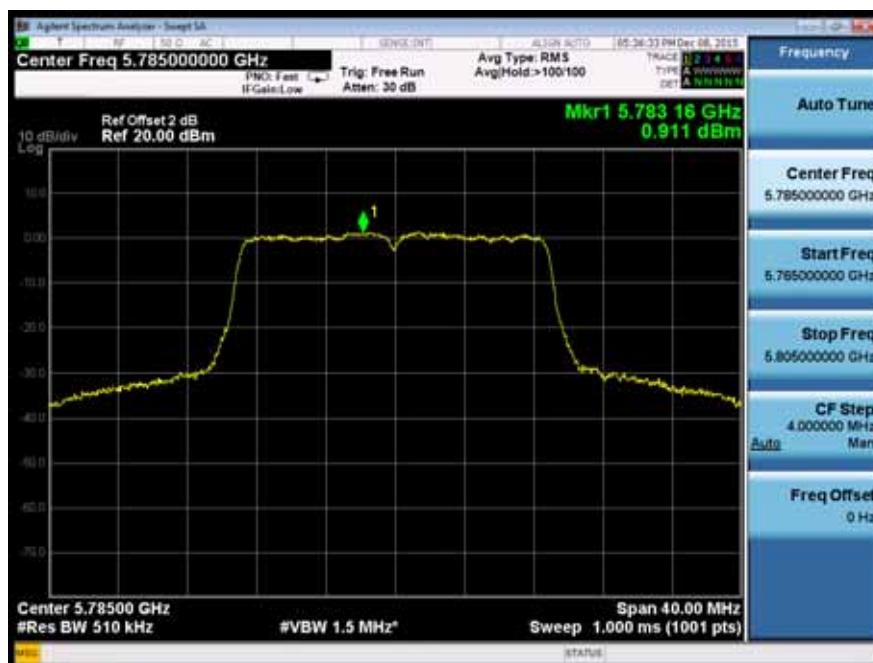


Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

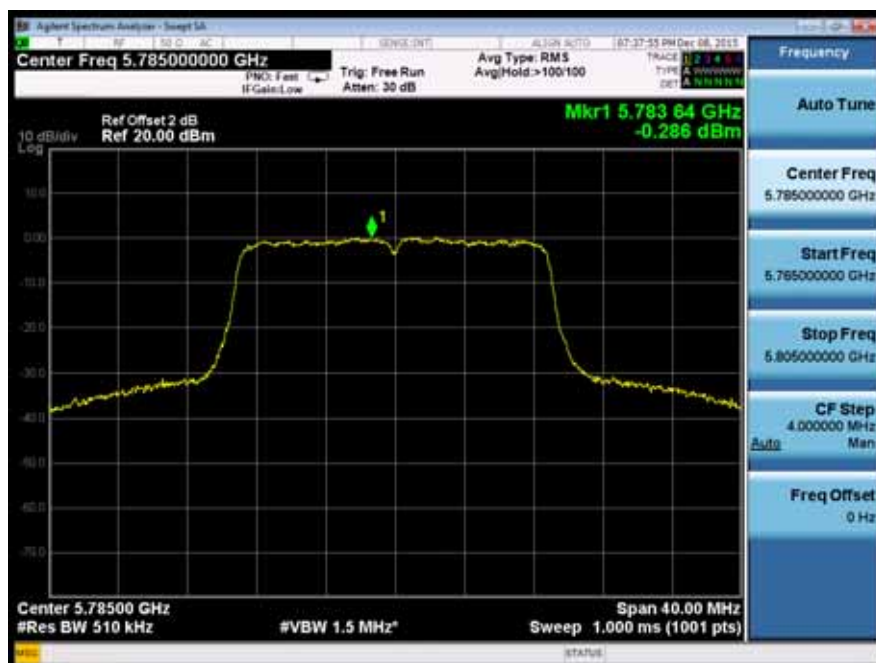

Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40)	Channel 151: 5755MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11ac(VHT40)	Channel 159: 5795MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11ac(VHT80) Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz
------------	---	----------------------




Antenna 3

Peak Power Spectral Density
802.11a

Test Model

Frequency Band I (5150-5250MHz)

Channel36 : 5180MHz

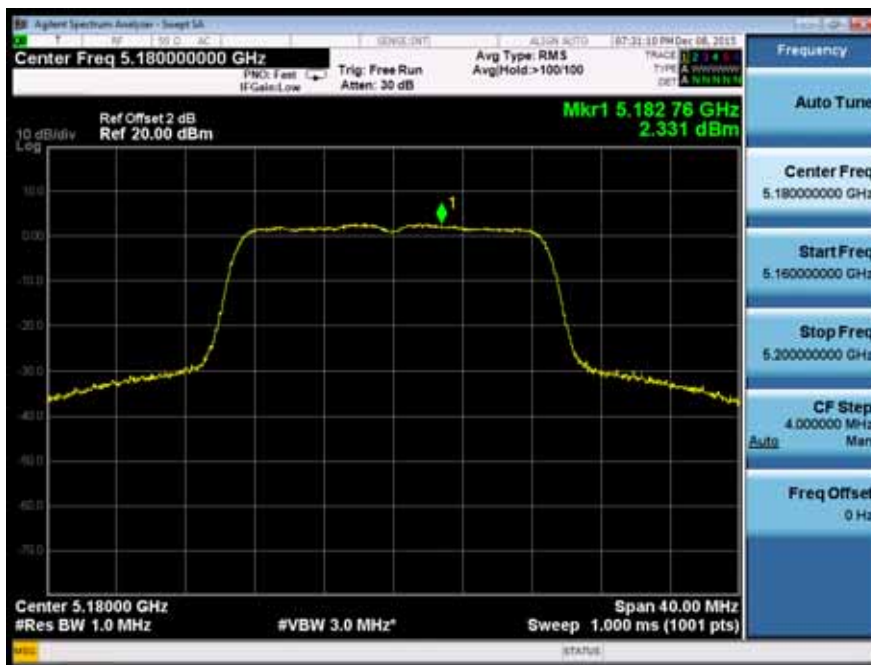


Peak Power Spectral Density
802.11a

Test Model

Frequency Band I (5150-5250MHz)


Channel44 : 5220MHz

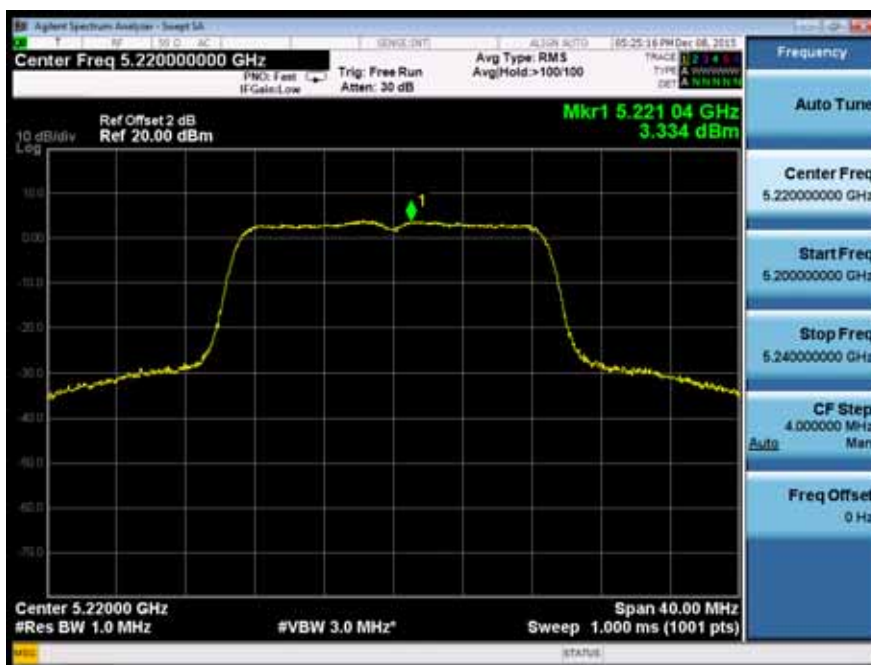


Test Model	Peak Power Spectral Density 802.11a Frequency Band I (5150-5250MHz)	Channel48 : 5240MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------

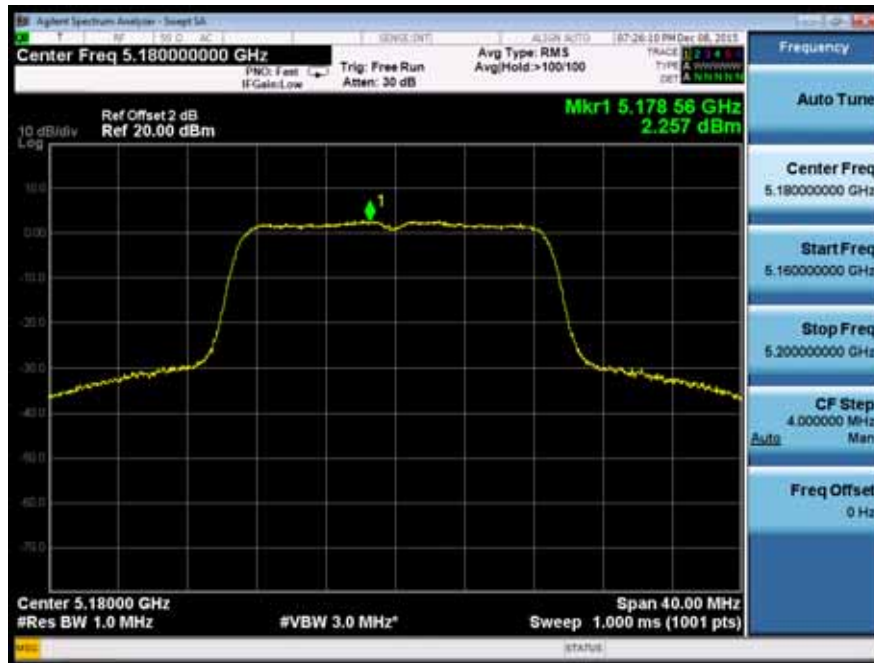


Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------

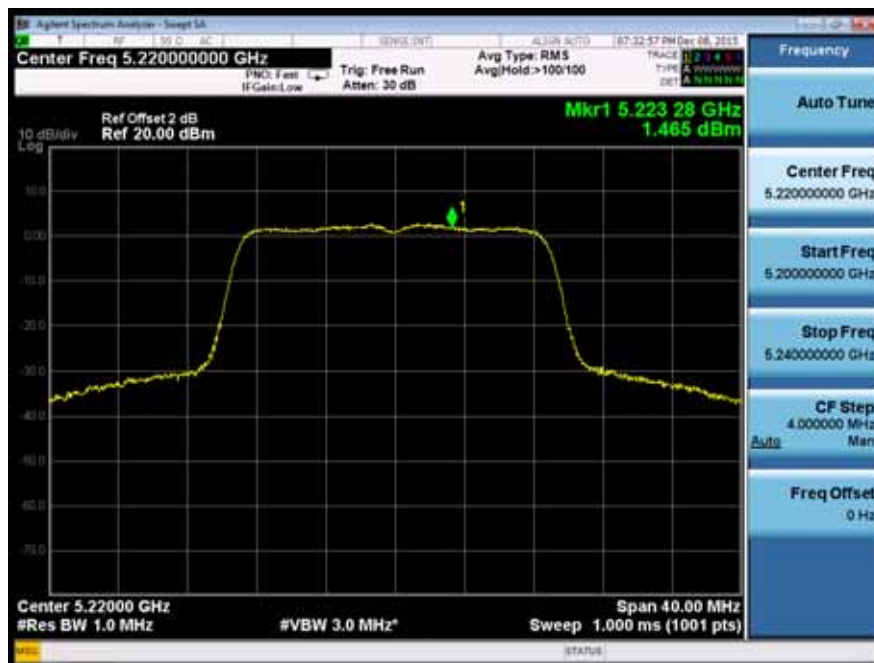


Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band I (5150-5250MHz)	Channel48 : 5240MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel36 : 5180MHz
------------	---	---------------------

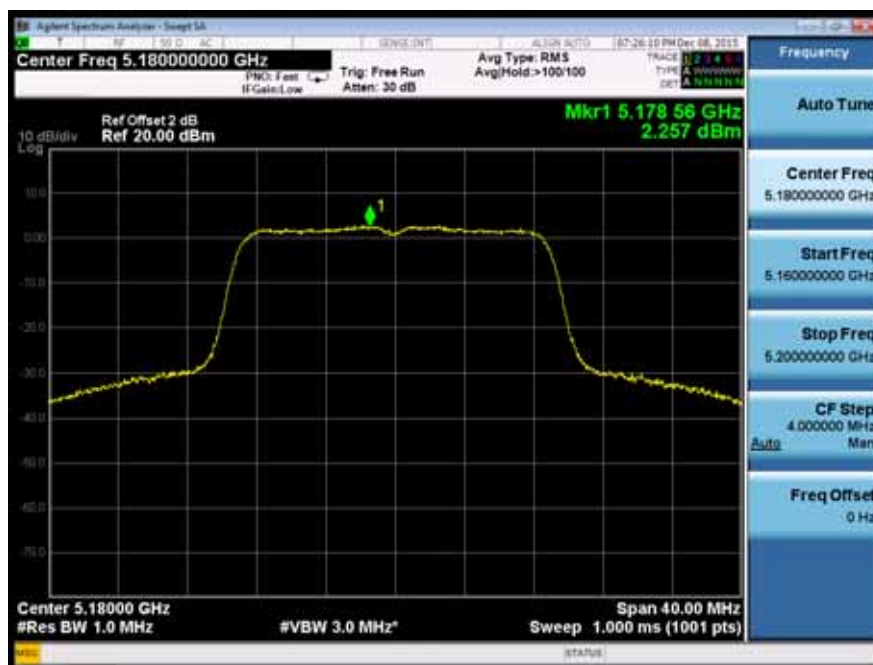

Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band I (5150-5250MHz)	Channel44 : 5220MHz
------------	---	---------------------

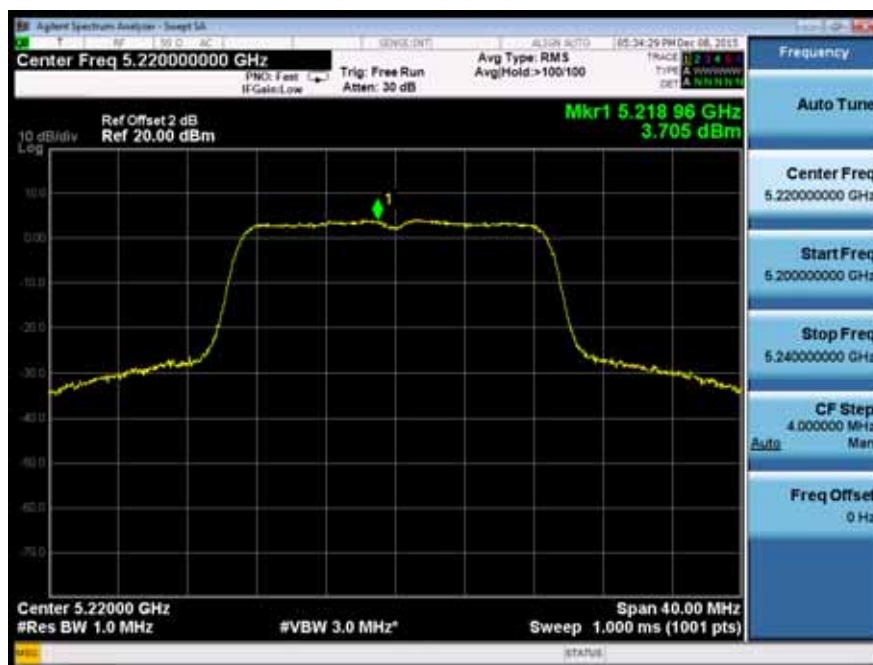

Test Model	Peak Power Spectral Density 802.11ac(VHT20)	Channel48 : 5240MHz
	Frequency Band I (5150-5250MHz)	



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel38 : 5190MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11ac(VHT40) Frequency Band I (5150-5250MHz)	Channel46 : 5230MHz
------------	---	---------------------




Test Model	Peak Power Spectral Density 802.11ac(VHT80)	Channel42 : 5210MHz
	Frequency Band I (5150-5250MHz)	



Test Model	Peak Power Spectral Density 802.11a Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------

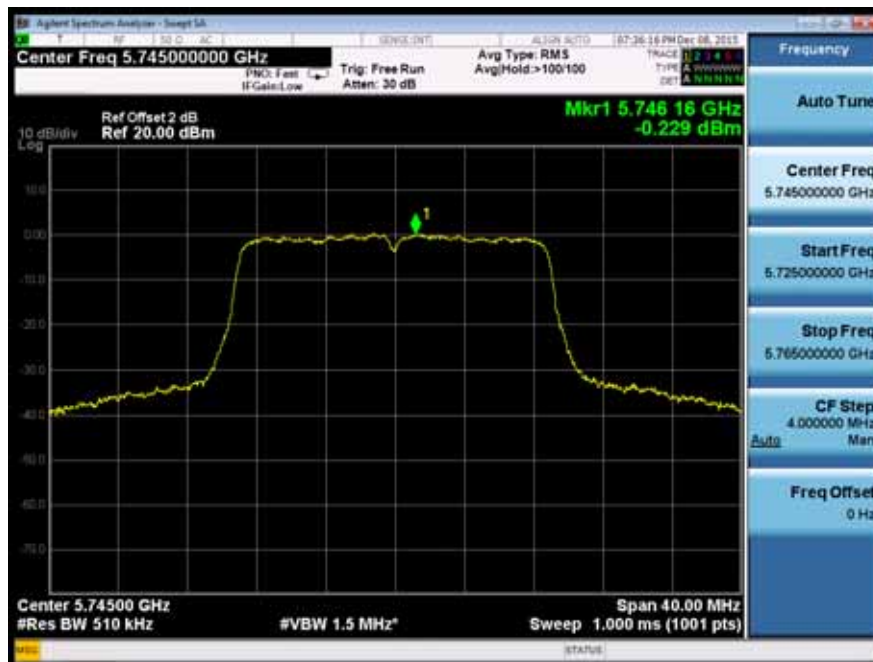

Test Model	Peak Power Spectral Density 802.11a Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------

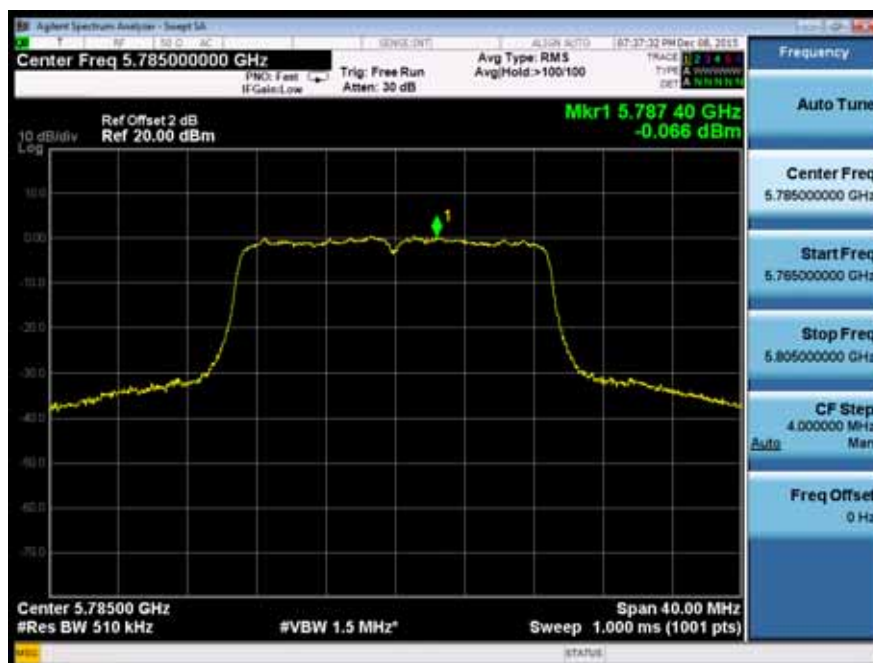

Test Model	Peak Power Spectral Density 802.11a	Channel 165: 5825MHz
	Frequency Band III (5725-5850MHz)	



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11n(HT20) Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz
------------	---	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 149: 5745MHz
------------	---	----------------------




Test Model	Peak Power Spectral Density 802.11ac(VHT20) Frequency Band III (5725-5850MHz)	Channel 157: 5785MHz
------------	---	----------------------




Test Model	Peak Power Spectral Density	
	802.11ac(VHT20)	
	Frequency Band III (5725-5850MHz)	Channel 165: 5825MHz



Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	---	----------------------

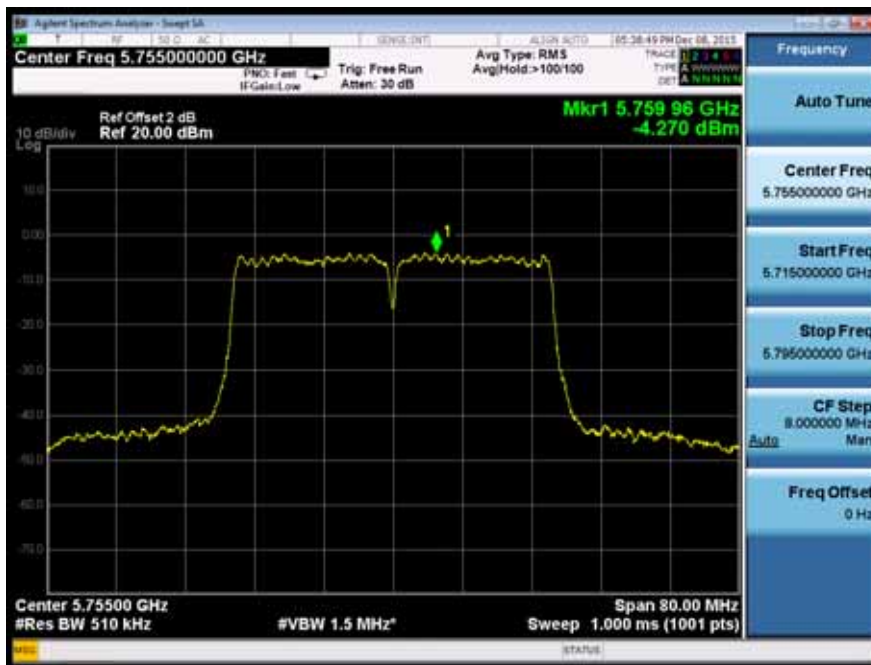

Test Model	Peak Power Spectral Density 802.11n(HT40) Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	---	----------------------

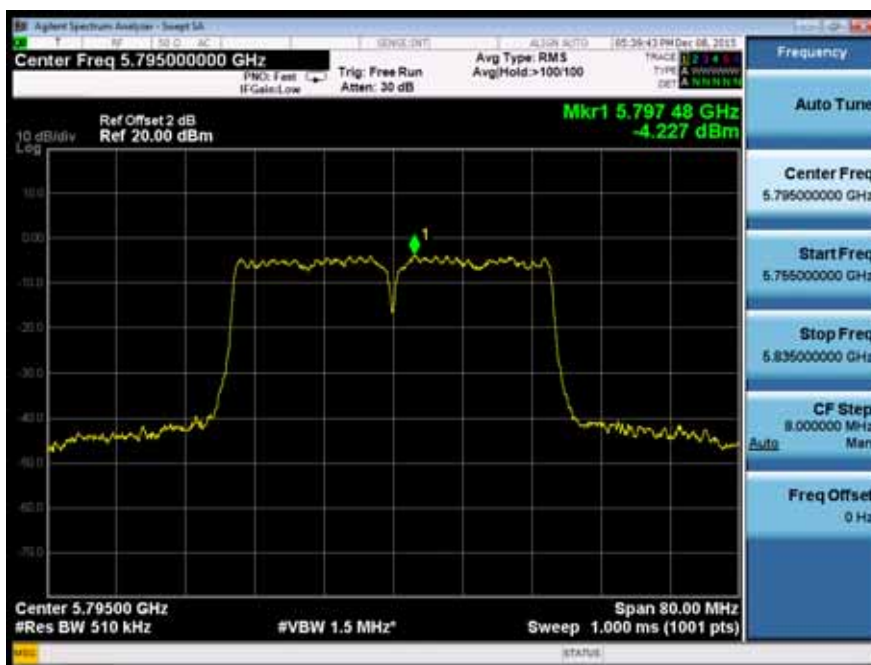

Test Model	Peak Power Spectral Density 802.11ac(VHT40)	Frequency Band III (5725-5850MHz)	Channel 151: 5755MHz
------------	--	-----------------------------------	----------------------



Test Model	Peak Power Spectral Density 802.11ac(VHT40)	Frequency Band III (5725-5850MHz)	Channel 159: 5795MHz
------------	--	-----------------------------------	----------------------



Test Model	Peak Power Spectral Density	
	802.11ac(VHT80)	
	Frequency Band III (5725-5850MHz)	Channel 155: 5775MHz



8.4 FREQUENCY STABILITY

8.4.1 Applicable Standard

According to FCC Part 15.407(g) and KDB 789003 D2

8.4.2 Conformance Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

8.4.3 Test Configuration

Test according to clause 6.1 radio frequency test setup

8.4.4 Test Procedure

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 10 kHz.

Set the video bandwidth (VBW) =30 kHz.

Set Span= Entire absence of modulation emissions bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value.

Beginning at each temperature level specified in user manual , the frequency shall be measured within one minute after application of primary power to the transmitter and at intervals of no more than one minute thereafter until ten minutes have elapsed or until sufficient measurements are obtained to indicate clearly that the frequency has stabilized within the applicable tolerance, whichever time period is greater. During each test, the ambient temperature shall not be allowed to rise more than 10° centigrade above the respective beginning ambient temperature level

Measure and record the results in the test report.

8.4.5 Test Results

All the modes 802.11a/n/ac and antenna has been tested and the worst result 802.11a recorded as below

☒ Frequency Band I (5150-5250MHz)						
Temperature : --		Test Date : December 1, 2015				
Humidity : 65 %		Test By: King Kong				
Channel Number	Test Conditions		Test Frequency (MHz)	Max. Deviation (MHz)	Max. Deviation (ppm)	Verdict
	Voltage(V)	Temp()				
CH36	Vnom	-20	5180.0193	-0.0193	3.73	PASS
		-10	5180.0198	-0.0198	3.82	PASS
		0	5180.0200	-0.0200	3.86	PASS
		10	5180.0190	-0.0190	3.67	PASS
		20	5180.0183	-0.0183	3.53	PASS
		30	5180.0175	-0.0175	3.38	PASS
		40	5180.0188	-0.0188	3.63	PASS
		50	5180.0196	-0.0196	3.78	PASS
	85% Vnom	20	5180.0196	-0.0196	3.78	PASS
	115% Vnom	20	5180.0185	-0.0185	3.57	PASS
CH44	Vnom	-20	5220.0201	-0.0201	3.85	PASS
		-10	5220.0198	-0.0198	3.79	PASS
		0	5220.0198	-0.0198	3.79	PASS
		10	5220.0198	-0.0198	3.79	PASS
		20	5220.0201	-0.0201	3.85	PASS
		30	5220.0198	-0.0198	3.79	PASS
		40	5220.0195	-0.0195	3.74	PASS
		50	5220.0195	-0.0195	3.74	PASS
	85% Vnom	20	5220.0196	-0.0196	3.75	PASS
	115% Vnom	20	5220.0196	-0.0196	3.75	PASS
CH48	Vnom	-20	5240.0225	-0.0225	4.29	PASS
		-10	5240.0220	-0.0220	4.20	PASS
		0	5240.0220	-0.0220	4.20	PASS
		10	5240.0225	-0.0225	4.29	PASS
		20	5240.0215	-0.0215	4.10	PASS
		30	5240.0225	-0.0225	4.29	PASS
		40	5240.0230	-0.0230	4.39	PASS
		50	5240.0230	-0.0230	4.39	PASS
	85% Vnom	20	5240.0225	-0.0225	4.29	PASS
	115% Vnom	20	5240.0225	-0.0225	4.29	PASS
Note: N/A (Not Applicable)						

☒ Frequency Band III (5725-5850MHz)						
Temperature : --		Test Date : December 1, 2015				
Humidity : 65 %		Test By: King Kong				
Channel Number	Test Conditions		Test Frequency (MHz)	Max. Deviation (MHz)	Max. Deviation (ppm)	Verdict
	Voltage(V)	Temp()				
CH 149	Vnom	-20	5745.0350	-0.0350	6.09	PASS
		-10	5745.0350	-0.0350	6.09	PASS
		0	5745.0300	-0.0300	5.22	PASS
		10	5745.0350	-0.0350	6.09	PASS
		20	5745.0350	-0.0350	6.09	PASS
		30	5745.0350	-0.0350	6.09	PASS
		40	5745.0300	-0.0300	5.22	PASS
		50	5745.0350	-0.0350	6.09	PASS
	85% Vnom	20	5745.0350	-0.0350	6.09	PASS
	115% Vnom	20	5745.0350	-0.0350	6.09	PASS
CH 157	Vnom	-20	5785.0350	-0.0350	6.05	PASS
		-10	5785.0350	-0.0350	6.05	PASS
		0	5785.0300	-0.0300	5.19	PASS
		10	5785.0350	-0.0350	6.05	PASS
		20	5785.0300	-0.0300	5.19	PASS
		30	5785.0350	-0.0350	6.05	PASS
		40	5785.0350	-0.0350	6.05	PASS
		50	5785.0300	-0.0300	5.19	PASS
	85% Vnom	20	5785.0350	-0.0350	6.05	PASS
	115% Vnom	20	5785.0300	-0.0300	5.19	PASS
CH 165	Vnom	-20	5825.0300	-0.0300	5.15	PASS
		-10	5825.0350	-0.0350	6.01	PASS
		0	5825.0350	-0.0350	6.01	PASS
		10	5825.0350	-0.0350	6.01	PASS
		20	5825.0300	-0.0300	5.15	PASS
		30	5825.0350	-0.0350	6.01	PASS
		40	5825.0350	-0.0350	6.01	PASS
		50	5825.0350	-0.0350	6.01	PASS
	85% Vnom	20	5825.0350	-0.0350	6.01	PASS
	115% Vnom	20	5825.0300	-0.0300	5.15	PASS
Note: N/A (Not Applicable)						

8.5 UNDESIRABLE RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.407 (b)(1)(5)(6) for band 5150-5250MHz and KDB 789003 D2

According to FCC Part 15.407 (b)(4)(5)(6) for band 5725-5850MHz and KDB 789003 D2

8.5.2 Conformance Limit

For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz

For transmitters operating in the 5.725-5.850 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table 15.209(a):

Restricted Frequency(MHz)	Field Strength ($\mu\text{V/m}$)	Field Strength (dB $\mu\text{V/m}$)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log ($\mu\text{V/m}$)	300
0.490-1.705	2400/F(KHz)	20 log ($\mu\text{V/m}$)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The provisions of §15.205 apply to intentional radiators operating under this section, 15.205 Restricted bands of operation

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- Remark:
1. Emission level in dB $\mu\text{V/m}$ =20 log ($\mu\text{V/m}$)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of § 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

8.5.3 Test Configuration

Test according to clause 6.2 radio frequency test setup

8.5.4 Test Procedure

■ Unwanted Emissions Measurements below 1000 MHz

Compliance shall be demonstrated using CISPR quasi-peak detection; however, peak detection is permitted as an alternative to quasi-peak detection.

The EUT was placed on a turn table which is 0.8m above ground plane.

And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

Repeat above procedures until all frequency measured was complete.

We use software control the EUT, Let EUT hopping on and transmit with highest power, All the modes have been tested and the worst result was reported.

Use the following spectrum analyzer settings:

Set RBW=120kHz for $f < 1$ GHz(30MHz to 1GHz), 200Hz for $f < 150$ KHz(9KHz to 150KHz), 9KHz for < 30 MHz (150KHz to 30KHz).

Set the VBW > RBW.

Detector = Peak.

Trace mode = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

■ Unwanted Maximum peak Emissions Measurements above 1000 MHz

Maximum emission levels are measured by setting the analyzer as follows:

RBW = 1 MHz.

VBW $\geq$ 3 MHz.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow sweeps to continue until the trace stabilizes. Note that if the transmission is not continuous, the time required for the trace to stabilize will increase by a factor of approximately $1/x$, where x is the duty cycle. For example, at 50 percent duty cycle, the measurement time will increase by a factor of two relative to measurement time for continuous transmission.

■ Unwanted Average Emissions Measurements above 1000 MHz

Method VB (Averaging using reduced video bandwidth): Alternative method.

RBW = 1 MHz.

Video bandwidth. • If the EUT is configured to transmit with duty cycle ≥ 98 percent, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz.

• If the EUT duty cycle is < 98 percent, set $VBW \geq 1/T$, where T is defined in section II.B.1.a).

Video bandwidth mode or display mode • The instrument shall be set to ensure that video filtering is applied in the power domain. Typically, this requires setting the detector mode to RMS and setting the Average-VBW Type to Power (RMS).

• As an alternative, the analyzer may be set to linear detector mode. Ensure that video filtering is applied in linear voltage domain (rather than in a log or dB domain). Some analyzers require linear display mode in order to accomplish this. Others have a setting for Average-VBW Type, which can be set to "Voltage" regardless of the display mode.

Detector = Peak.

Sweep time = auto.

Trace mode = max hold.

Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98 percent duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle. For example, use at least 200 traces if the duty cycle is 25 percent. (If a specific emission is demonstrated to be continuous—i.e., 100 percent duty cycle—rather than turning on and off with the transmit cycle, at least 50 traces shall be averaged.)

■ Band edge measurements.

Unwanted band-edge emissions may be measured using either of the special band-edge measurement techniques (the marker-delta or integration methods) described below. Note that the marker-delta method is primarily a radiated measurement technique that requires the 99% occupied bandwidth edge to be within 2 MHz of the authorized band edge, whereas the integration method can be used in either a radiated or conducted measurement without any special requirement with regards to the displacement of the unwanted emission(s) relative to the authorized bandwidth.

Marker-Delta Method.

The marker-delta method, as described in ANSI C63.10, can be used to perform measurements of the radiated unwanted emissions level of emissions provided that the 99% occupied bandwidth of the fundamental is within 2 MHz of the authorized band-edge.

8.5.5 Test Results

■ ☒ For Undesirable radiated Spurious Emission in Band I (5150-5250MHz)

All the modes 802.11a/n/ac and antenna has been tested and the worst result 802.11a recorded as below

- ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 36: 5180MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8056.14	V	51.29	-43.91	-27.00	-16.91
10742.11	V	56.41	-38.79	-27.00	-11.79
14125.19	V	62.93	-32.27	-27.00	-5.27
7920.15	H	54.71	-40.49	-27.00	-13.49
11286.16	H	56.08	-39.12	-27.00	-12.12
14312.14	H	65.31	-29.89	-27.00	-2.89

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 44: 5220MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8057.29	V	50.00	-45.20	-27.00	-18.20
10743.27	V	55.03	-40.17	-27.00	-13.17
14126.36	V	64.68	-30.52	-27.00	-3.52
7921.28	H	53.08	-42.12	-27.00	-15.12
11287.32	H	54.73	-40.47	-27.00	-13.47
14313.29	H	65.56	-29.64	-27.00	-2.64

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 48: 5240MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8056.09	V	48.83	-46.37	-27.00	-19.37
10744.41	V	56.27	-38.93	-27.00	-11.93
14127.52	V	63.53	-31.67	-27.00	-4.67
7920.07	H	51.97	-43.23	-27.00	-16.23
11288.47	H	55.85	-39.35	-27.00	-12.35
14312.13	H	65.40	-29.80	-27.00	-2.80

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77

d is the measurement distance in 3 meters

● ☒ Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz)

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 36: 5180MHz

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5094.00	H	57.83	74.00	--	42.10	54.00	--
5100.00	V	49.88	74.00	--	36.70	54.00	--

● ☒ Undesirable radiated Spurious Emission in Restricted Band (5350-5460MHz)

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 48: 5240MHz

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
5397.96	H	52.70	74.00	-21.30	37.90	54.00	-16.10
5397.74	V	49.68	74.00	-24.32	35.70	54.00	-18.30

- ☒ Undesirable radiated Undesirable radiated Spurious Emission in Band Edge

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 36: 5180MHz


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5150.000	V	47.38	-47.82	-27.00	-20.82
5149.100	H	65.72	-29.48	-27.00	-2.48

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 48: 5240MHz


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5404.900	V	43.27	-51.93	-27.00	-24.93
5404.900	H	45.02	-50.18	-27.00	-23.18

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Probe Factor +Cable Loss.
 (3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
 d is the measurement distance in 3 meters


Band I (5150-5250MHz)	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)
	☒ 802.11a
☒ CH36	☐ CH44
☐ CH48	Ant.Pol
	H

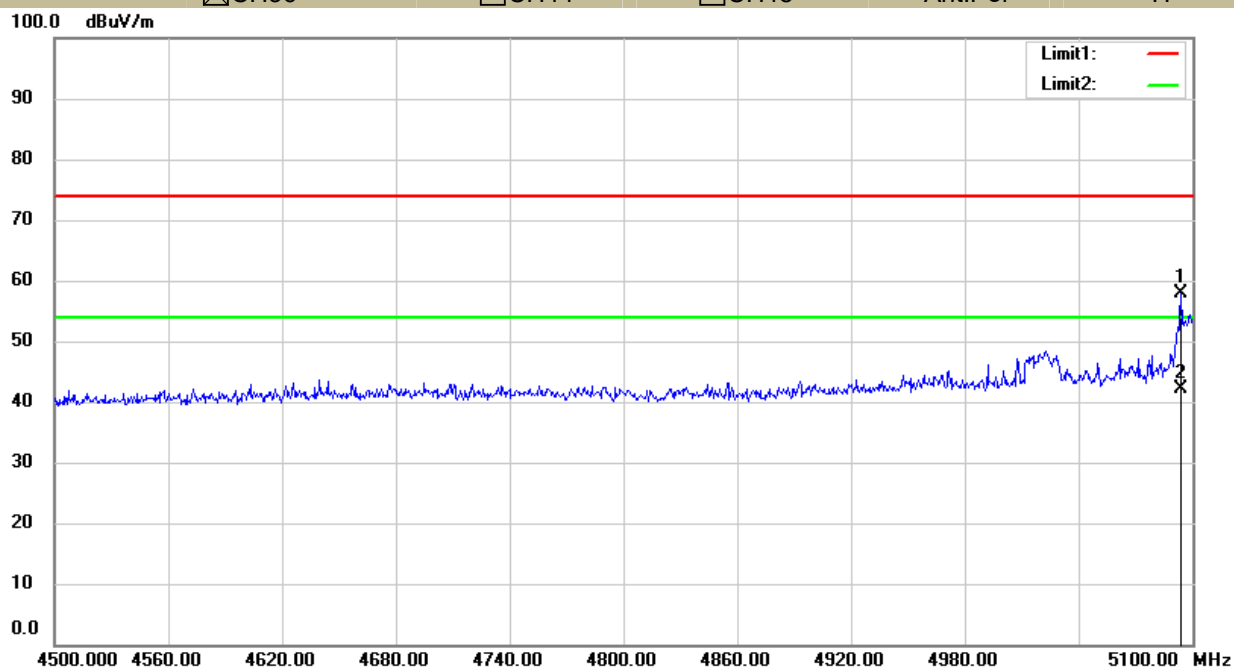


Band I (5150-5250MHz)	
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)
	☒ 802.11a
☒ CH36	☐ CH44
☐ CH48	Ant.Pol
	V

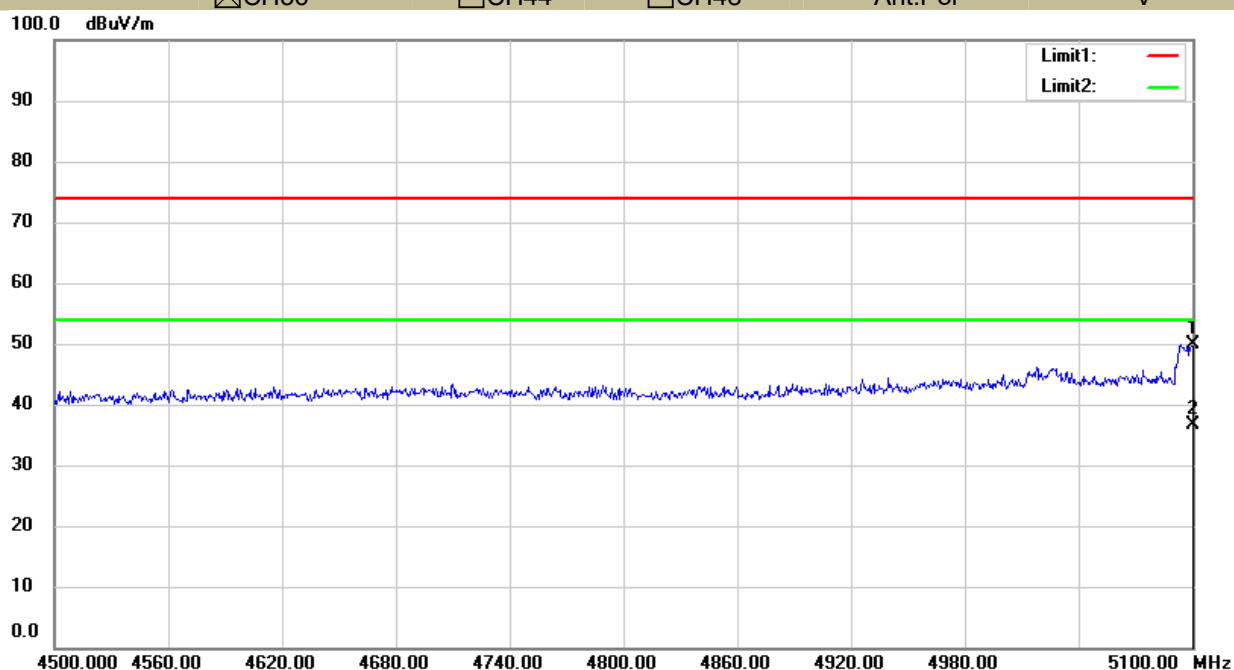


Test Model	Band I (5150-5250MHz)						
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)						
	☒ 802.11a	☐ CH36	☐ CH44	☒ CH48	Ant.Pol	H	

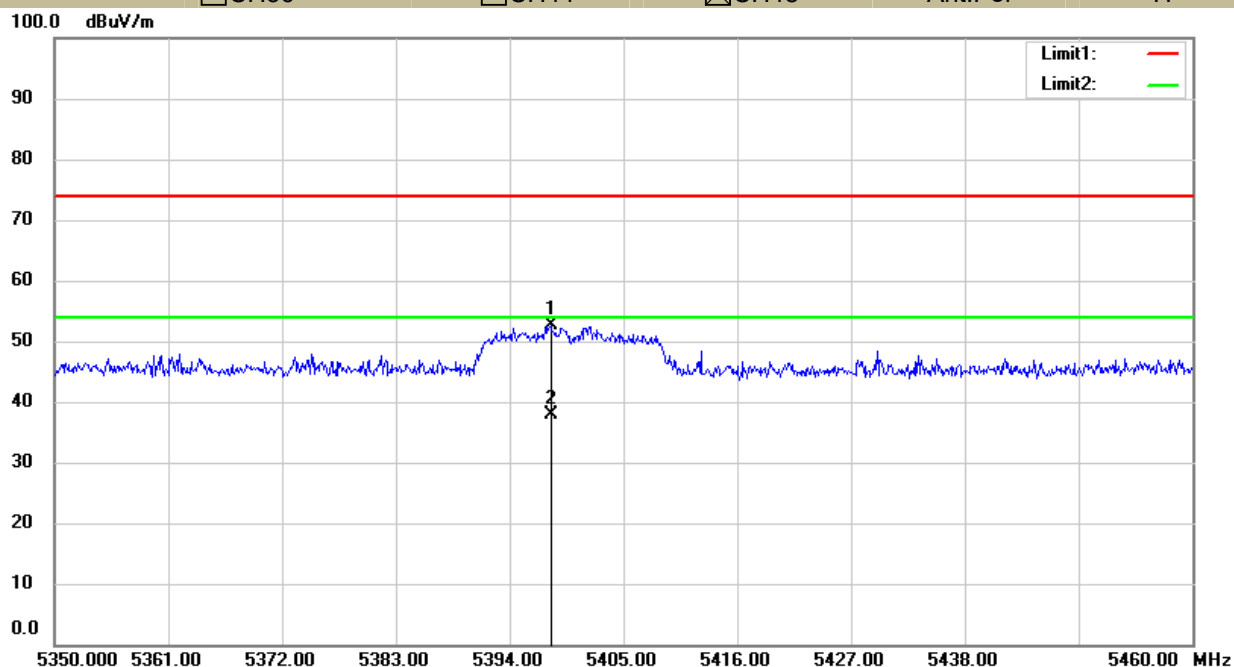


Test Model	Band I (5150-5250MHz)						
	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)						
	☒ 802.11a	☐ CH36	☐ CH44	☒ CH48	Ant.Pol	V	

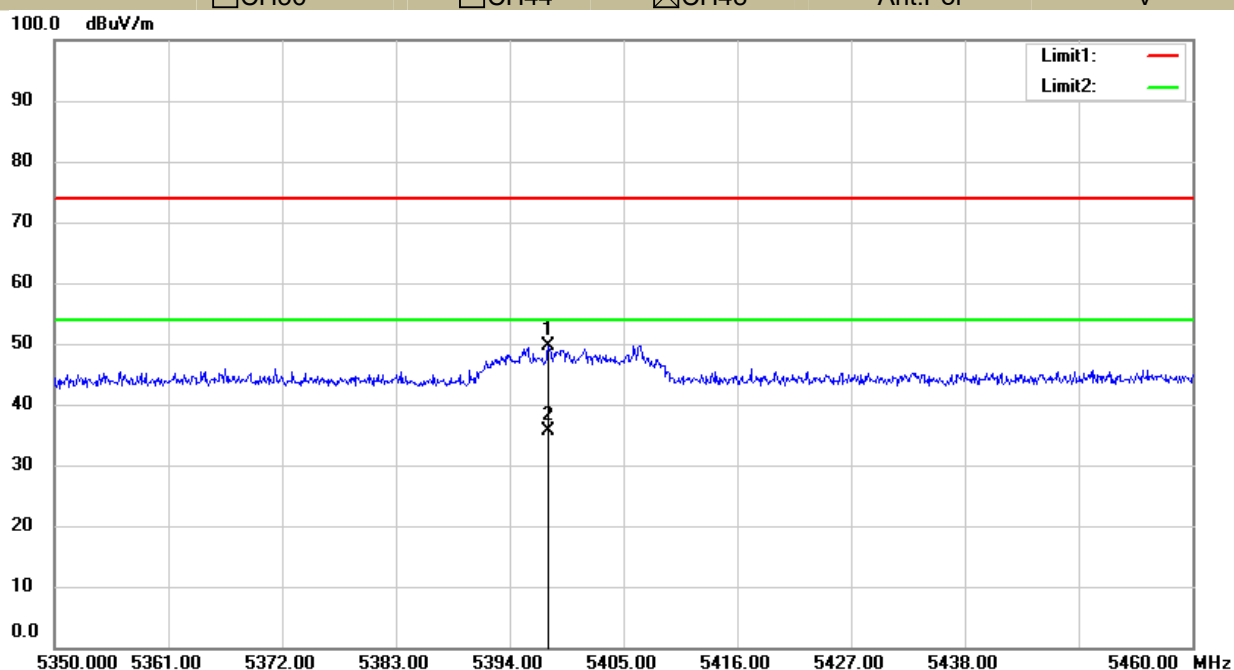


Band I (5150-5250MHz)					
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge				
	☒ 802.11a				
	☒ CH36	☐ CH44	☐ CH48	Ant.Pol	H

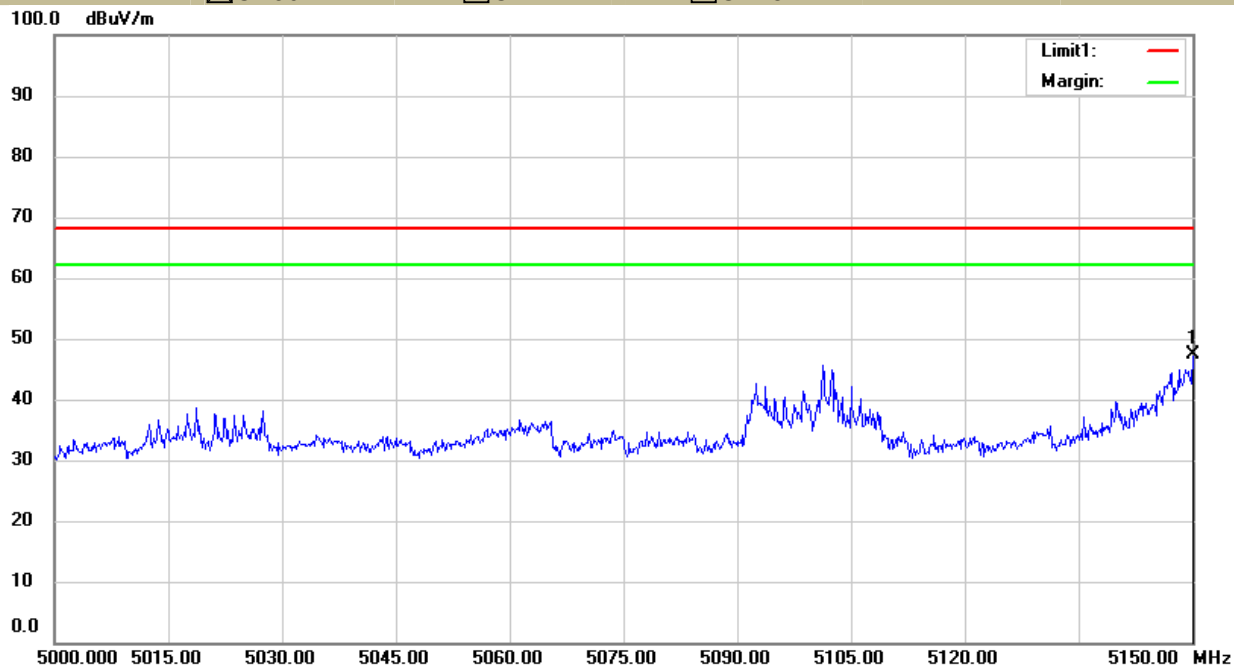


Band I (5150-5250MHz)					
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge				
	☒ 802.11a				
	☒ CH36	☐ CH44	☐ CH48	Ant.Pol	V

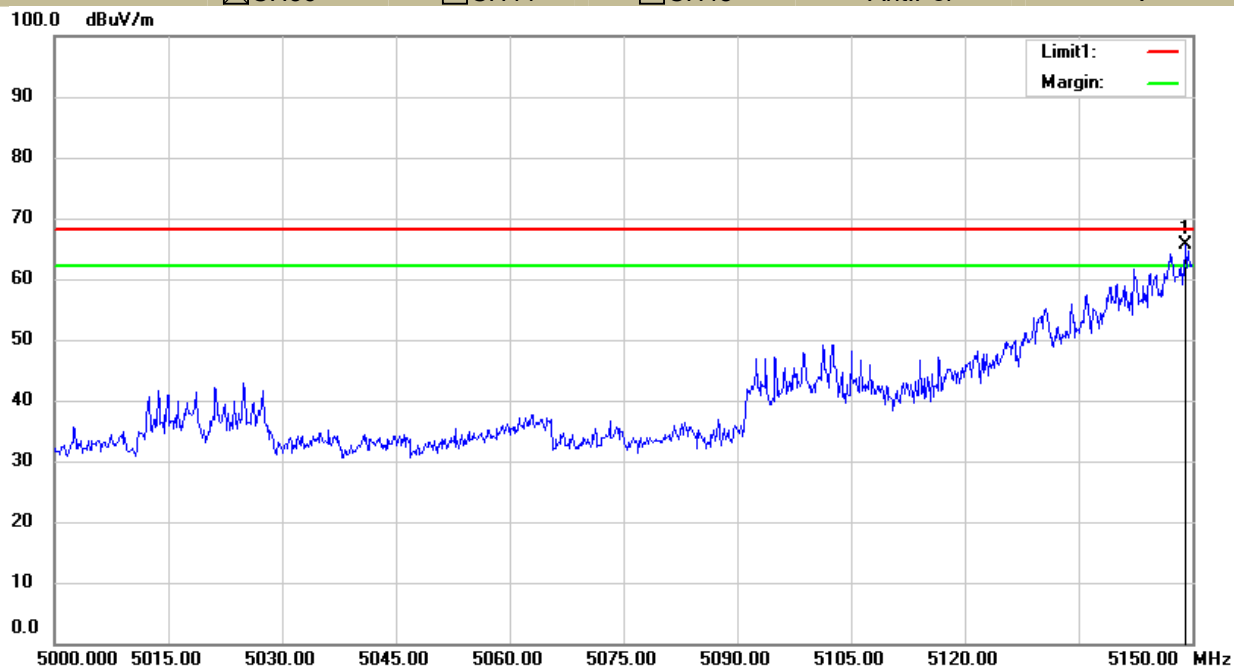

Band I (5150-5250MHz)					
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge				
	☒ 802.11a	☐ CH36	☐ CH44	☒ CH48	Ant.Pol H

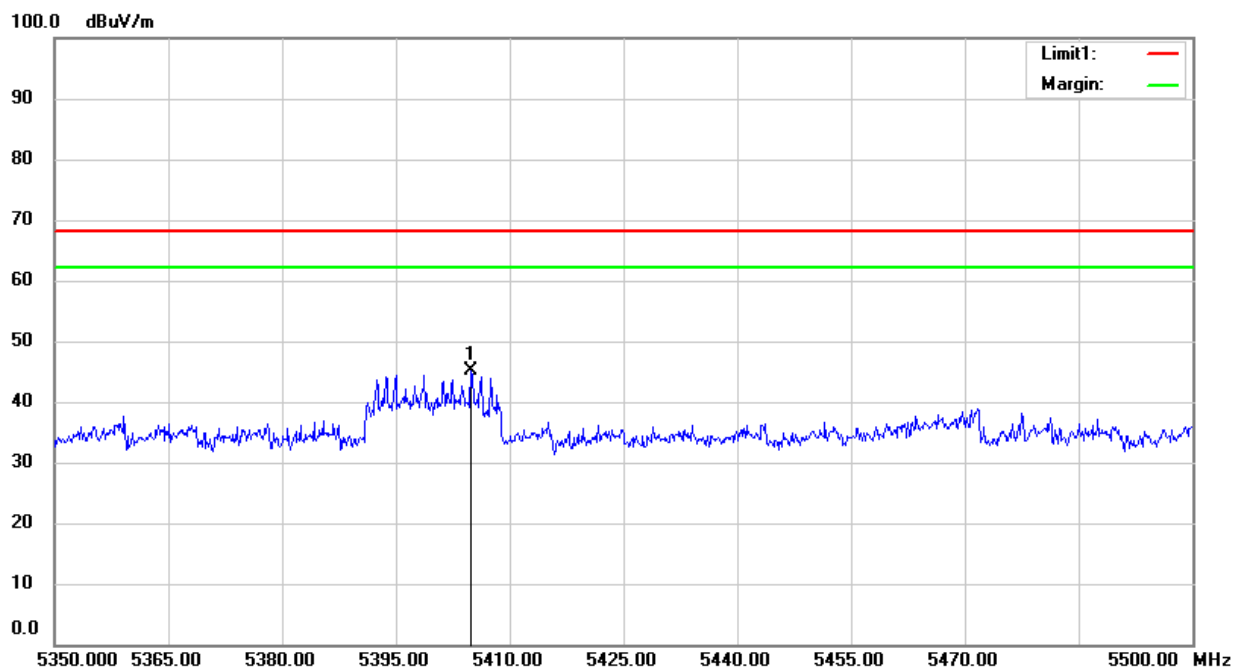

Band I (5150-5250MHz)					
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge				
	☒ 802.11a	☐ CH36	☐ CH44	☒ CH48	Ant.Pol V

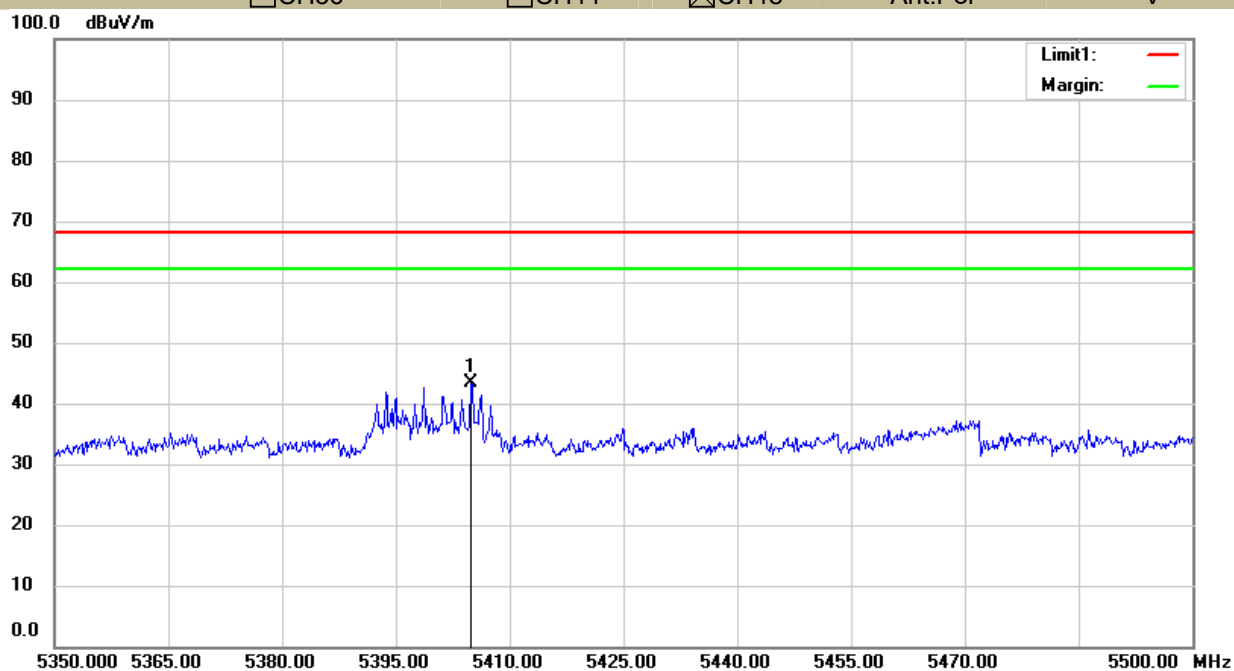

- ☒ For Undesirable radiated Spurious Emission in Band III (5725-5850MHz)

All the modes 802.11a/n/ac and antenna has been tested and the worst result 802.11a recorded as below

- ☒ Undesirable radiated Spurious Emission Above 1GHz (1GHz to 40GHz)

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 149: 5745MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8056.12	V	51.01	-44.19	-27.00	-17.19
10742.13	V	59.19	-36.01	-27.00	-9.01
14125.14	V	63.18	-32.02	-27.00	-5.02
7920.11	H	51.74	-43.46	-27.00	-16.46
11286.19	H	56.34	-38.86	-27.00	-11.86
14312.15	H	64.26	-30.94	-27.00	-3.94

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 157: 5785MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8057.20	V	50.90	-44.30	-27.00	-17.30
10743.22	V	59.34	-35.86	-27.00	-8.86
14123.79	V	62.53	-32.67	-27.00	-5.67
7921.22	H	51.54	-43.66	-27.00	-16.66
11284.80	H	58.83	-36.37	-27.00	-9.37
14310.76	H	63.09	-32.11	-27.00	-5.11

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 165: 5825MHz

Freq. (MHz)	Ant.Pol. H/V	Field Strength (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Over(dB)
8055.82	V	51.14	-44.06	-27.00	-17.06
10741.67	V	58.91	-36.29	-27.00	-9.29
14122.31	V	63.00	-32.20	-27.00	-5.20
7919.74	H	51.72	-43.48	-27.00	-16.48
11283.37	H	58.71	-36.49	-27.00	-9.49
14309.44	H	63.29	-31.91	-27.00	-4.91

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) EIRP[dBm] = E[dBuV/m] + 20 log(d[meters]) - 104.77
d is the measurement distance in 3 meters

- ☒ Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 149: 5745MHz

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
4978.08	H	43.67	74.00	-30.33	29.40	54.00	-24.60
5004.96	V	43.56	74.00	-30.44	26.40	54.00	-27.60
5420.64	H	44.27	74.00	-29.24	30.10	54.00	-23.90
5431.20	V	43.95	74.00	-30.05	28.70	54.00	-25.30

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 165: 5825MHz

Freq. (MHz)	Ant.Pol. H/V	PK (dBuV/m) (VBW=3MHz)	Limit 3m (dBuV/m)	Margin (dB)	PK (dBuV/m) (VBW=10Hz)	Limit 3m (dBuV/m)	Margin (dB)
4812.96	H	41.75	74.00	-32.25	26.70	54.00	--27.30
4901.28	V	42.04	74.00	-31.96	27.40	54.00	-26.60
5442.72	H	44.84	74.00	-29.16	29.10	54.00	-24.90
5408.16	V	44.50	74.00	-29.50	29.60	54.00	-24.40

- ☒ Undesirable radiated Spurious Emission in band edge

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 149: 5745MHz


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5705.900	H	57.38	-37.82	-27	PASS
5721.050	H	77.00	-18.20	-17	PASS
5708.150	V	43.15	-52.05	-27	PASS
5725.000	V	71.43	-23.77	-17	PASS

Temperature :	28	Test Date :	December 1, 2015
Humidity :	65 %	Test By:	King Kong
Test mode:	802.11a	Frequency:	Channel 165: 5825MHz


Freq. (MHz)	Ant.Pol. H/V	Field Strength (RBW=100KHz) (dBuV/m)	E.I.R.P (dBm)	Limit (dBm)	Verdict
5850.000	H	53.04	-42.16	-17	PASS
5897.600	H	44.37	-50.83	-27	PASS
5850.000	V	54.09	-41.11	-17	PASS
5898.800	V	46.26	-48.94	-27	PASS

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).
(2) Emission Level= Reading Level+Probe Factor +Cable Loss.
(3) $EIRP[dBm] = E[dBuV/m] + 20 \log(d[meters]) - 104.77$
d is the measurement distance in 3 meters


Band III (5725-5850MHz)					
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)				
	☒ 802.11a	☐	☐	☐	
	☒ CH149	☐ CH157	☐ CH165	Ant.Pol	H

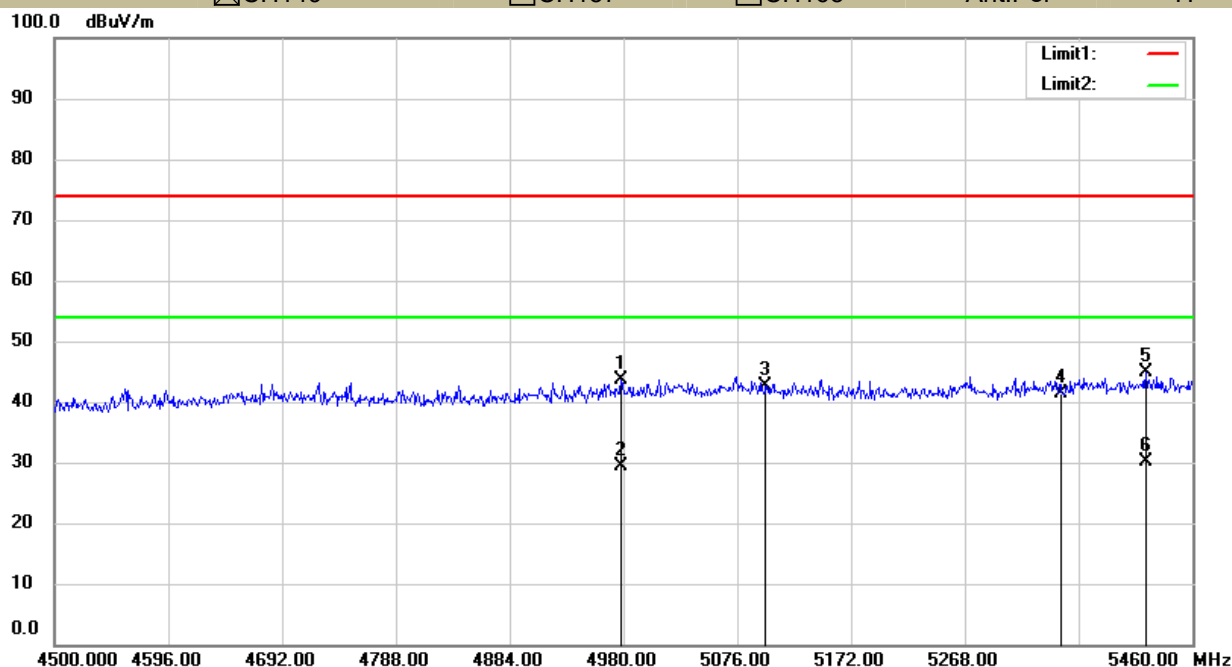


Band III (5725-5850MHz)					
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)				
	☒ 802.11a	☐	☐	☐	
	☒ CH149	☐ CH157	☐ CH165	Ant.Pol	V

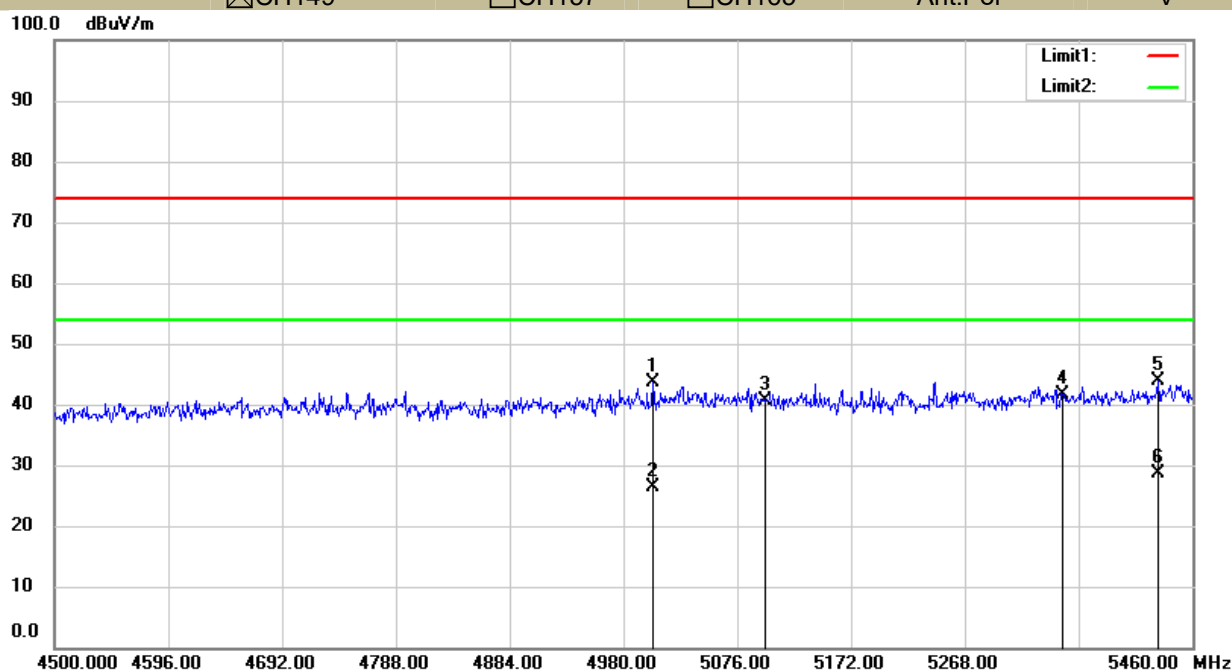


Band III (5725-5850MHz)				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)			
	☒ 802.11a	☐	☐	
	☐ CH149	☐ CH157	☒ CH165	Ant.Pol H

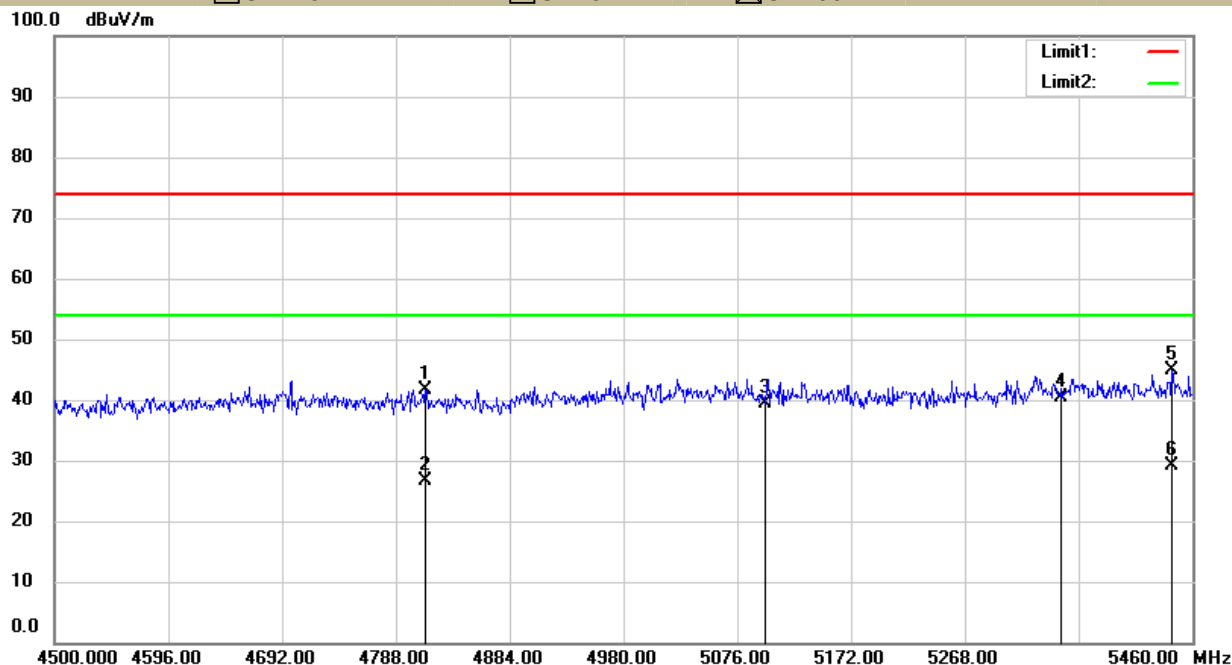


Band III (5725-5850MHz)				
Test Model	Undesirable radiated Spurious Emission in Restricted Band (4500-5100MHz and 5350-5460MHz)			
	☒ 802.11a	☐	☐	
	☐ CH149	☐ CH157	☒ CH165	Ant.Pol V

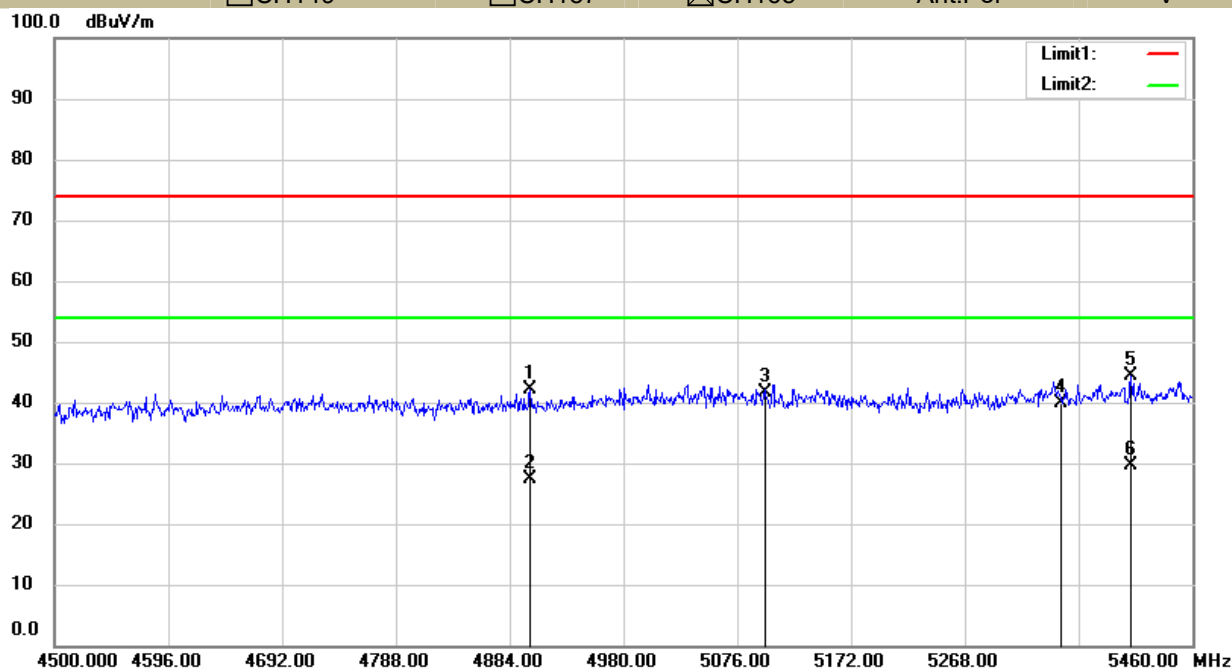


Band III (5725-5850MHz)			
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge		
	☒ 802.11a	☒ CH149	
		Ant.Pol	H

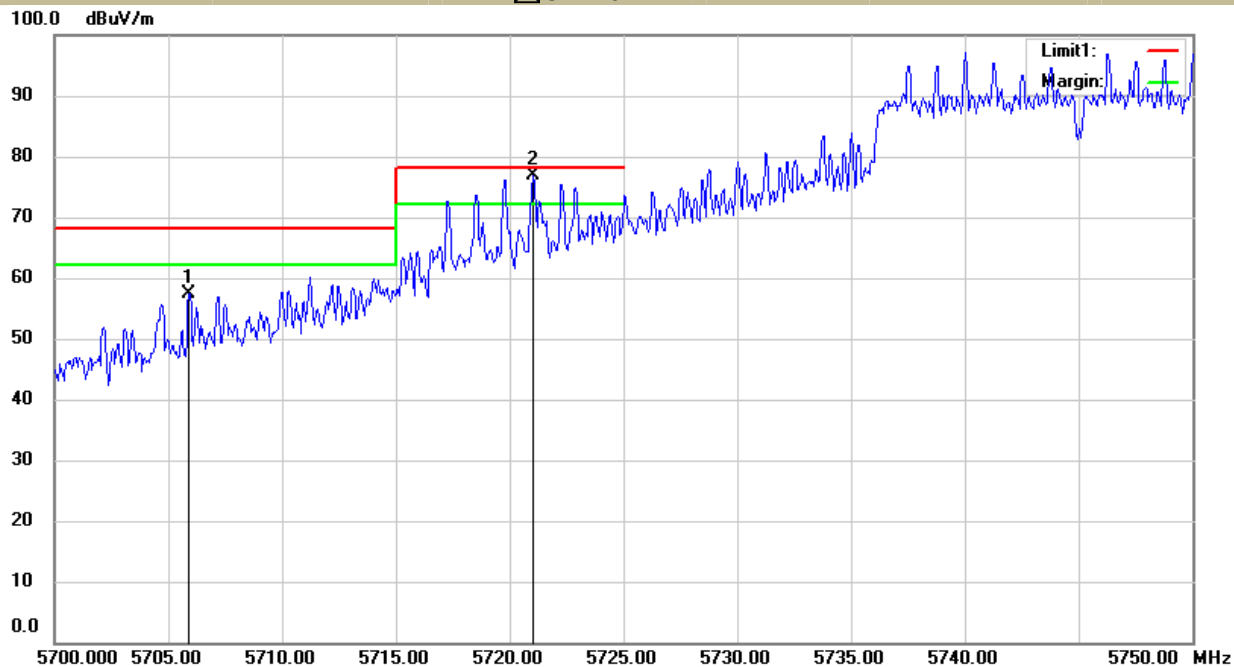


Band III (5725-5850MHz)			
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge		
	☒ 802.11a	☒ CH149	
		Ant.Pol	V

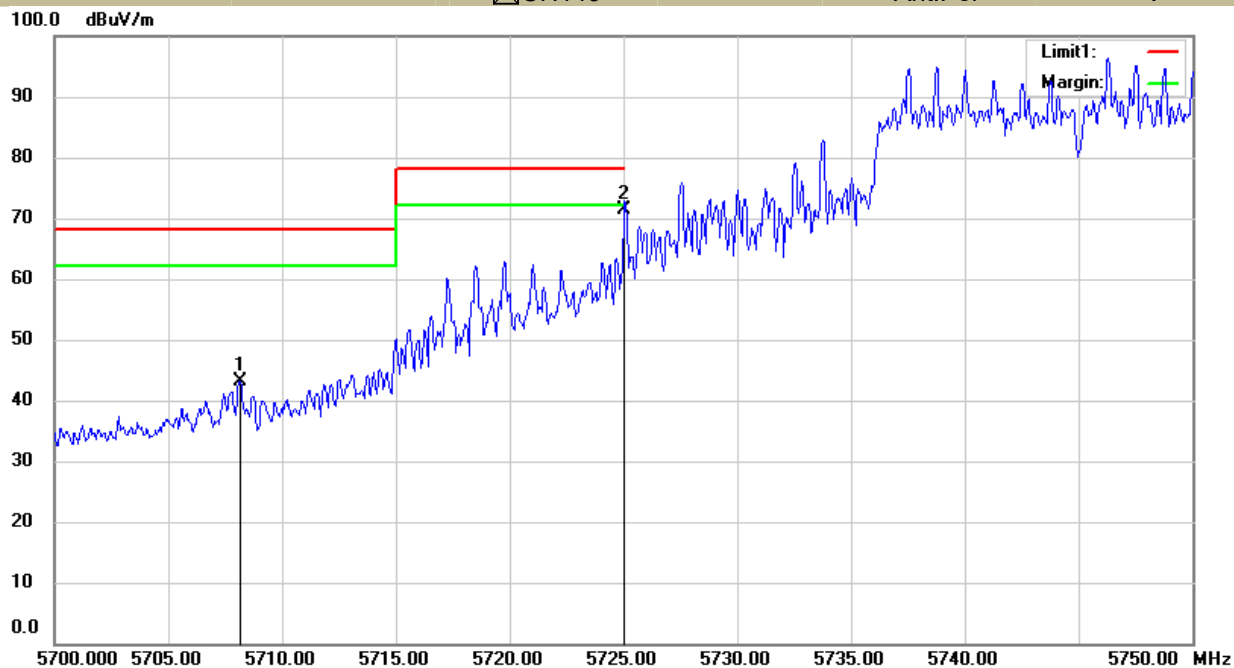


Band III (5725-5850MHz)				
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge			
	☒ 802.11a	☒ CH165	Ant.Pol	H

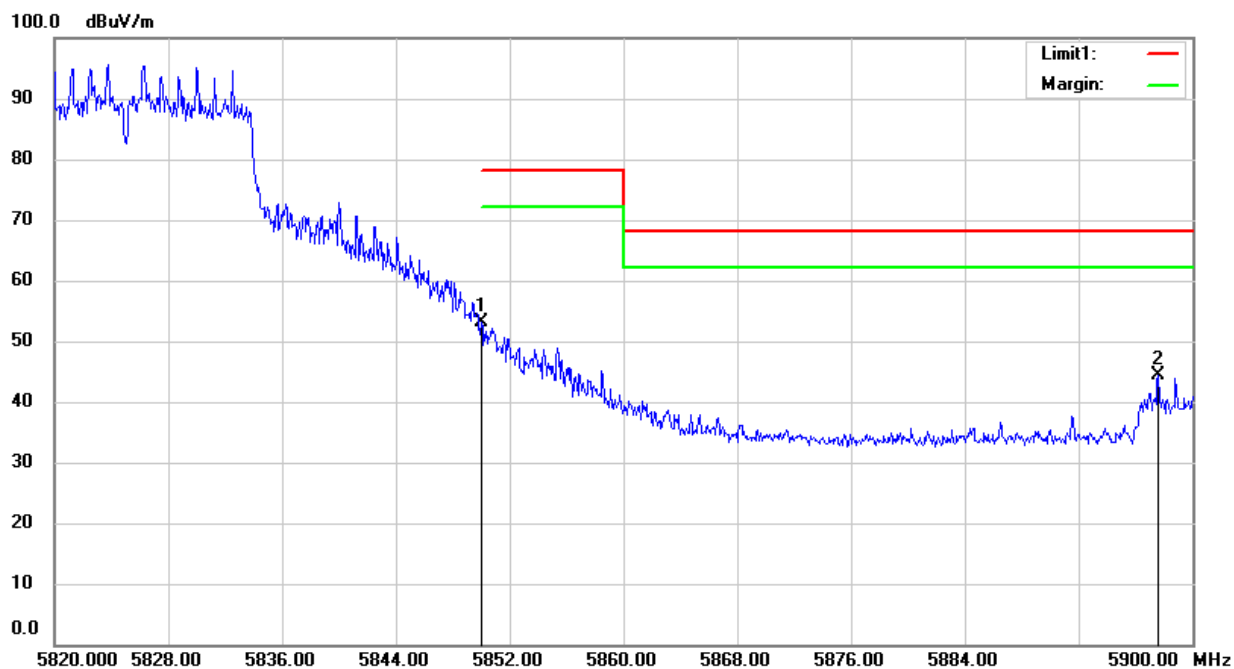

Band III (5725-5850MHz)				
Test Model	Undesirable radiated Undesirable radiated Spurious Emission in Band Edge			
	☒ 802.11a	☒ CH165	Ant.Pol	V

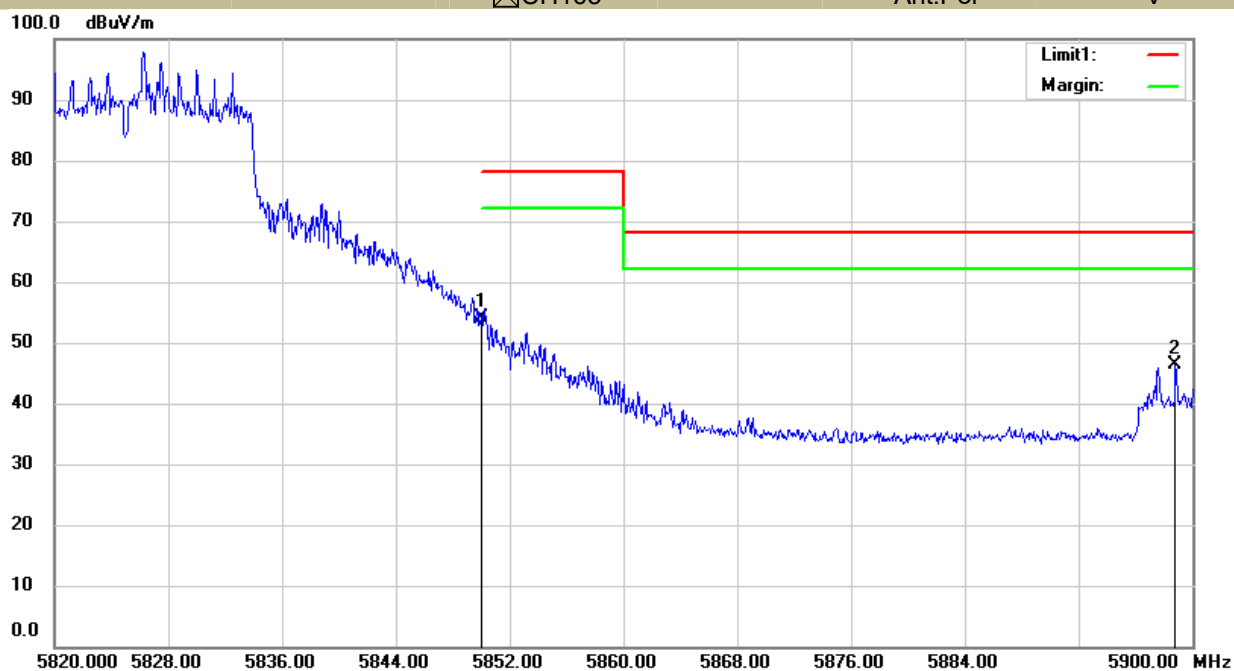


● Undesirable radiated Spurious Emission below 1GHz (30MHz to 1GHz)

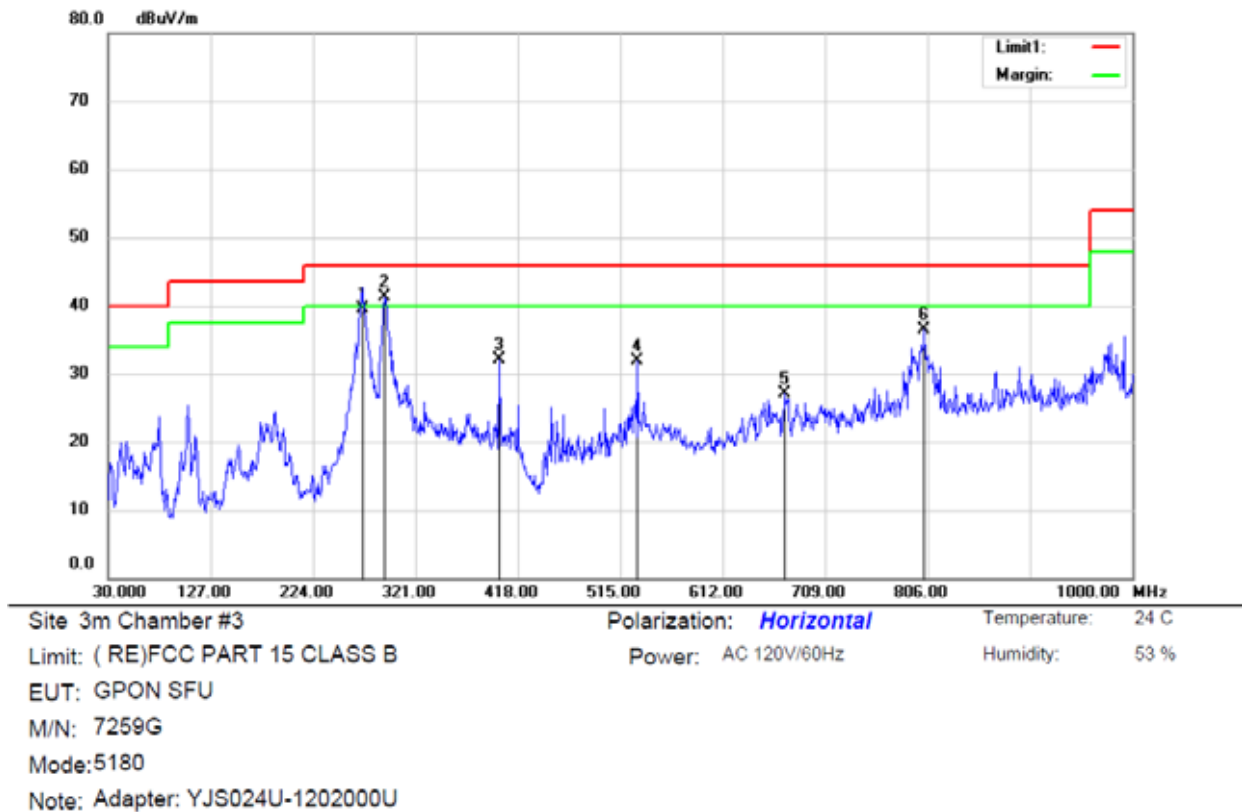

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		270.5600	52.28	-12.68	39.60	46.00	-6.40	QP		
2	*	291.9000	54.56	-13.32	41.24	46.00	-4.76	QP		
3		400.5400	41.04	-8.89	32.15	46.00	-13.85	QP		
4		531.4900	39.52	-7.55	31.97	46.00	-14.03	QP		
5		671.1700	33.32	-6.27	27.05	46.00	-18.95	QP		
6		803.0900	39.22	-2.80	36.42	46.00	-9.58	QP		

*:Maximum data x:Over limit !:over margin

Operator: CSL

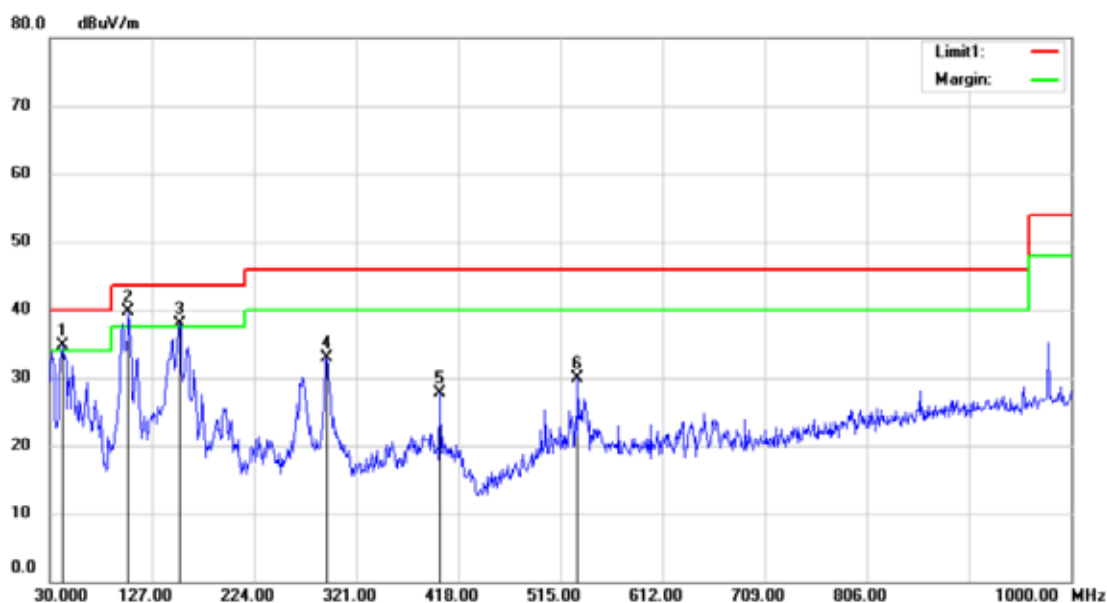

Site 3m Chamber #3

Polarization: **Vertical**

Temperature: 24 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 53 %

EUT: GPON SFU

M/N: 7259G


Mode:5180

Note: Adapter: YJS024U-1202000U

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	42.6100	47.82	-13.02	34.80	40.00	-5.20	QP		
2	*	104.6900	53.75	-14.10	39.65	43.50	-3.85	QP		
3	!	153.1900	56.18	-18.29	37.89	43.50	-5.61	QP		
4		292.8700	46.22	-13.39	32.83	46.00	-13.17	QP		
5		400.5400	36.55	-8.89	27.66	46.00	-18.34	QP		
6		531.4900	37.40	-7.55	29.85	46.00	-16.15	QP		

*:Maximum data x:Over limit !:over margin


Operator: CSL

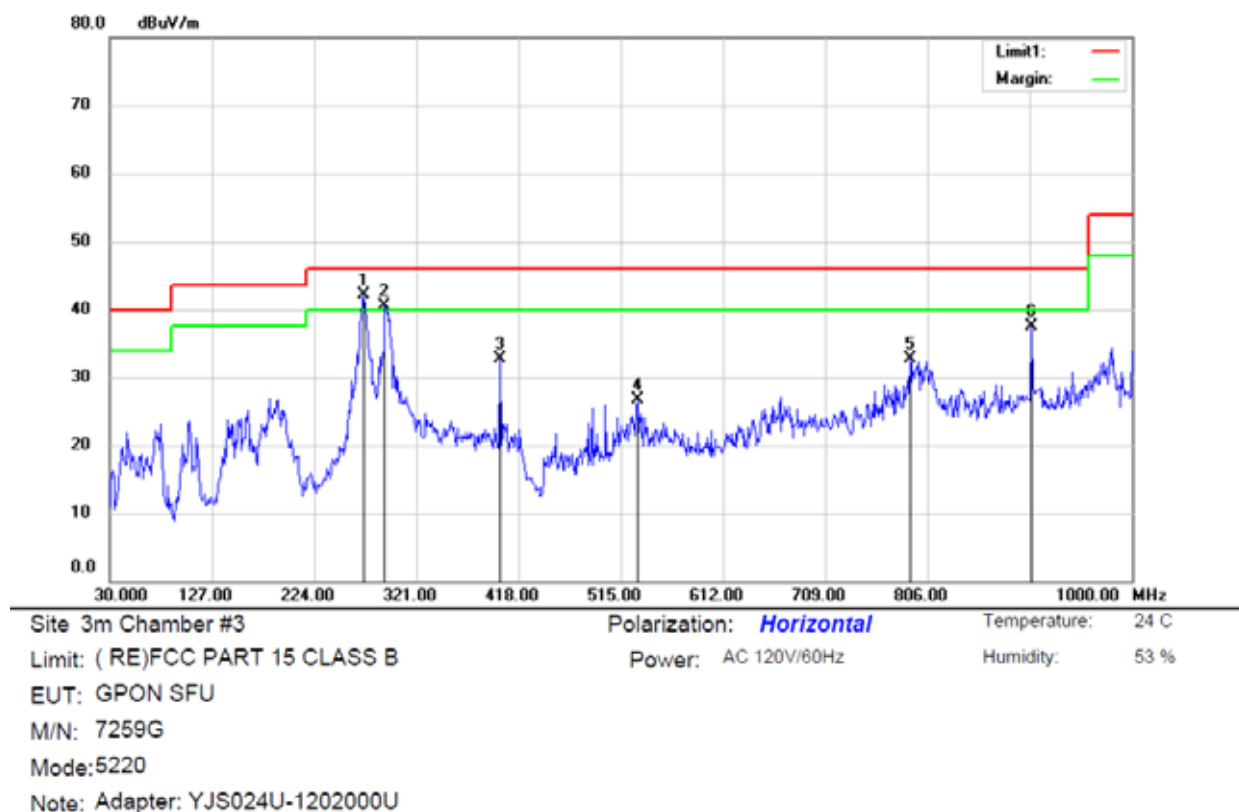

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	270.5600	54.71	-12.68	42.03	46.00	-3.97	QP		
2	I	290.9300	53.71	-13.26	40.45	46.00	-5.55	QP		
3		400.5400	41.52	-8.89	32.63	46.00	-13.37	QP		
4		531.4900	34.29	-7.55	26.74	46.00	-19.26	QP		
5		789.5100	35.85	-3.19	32.66	46.00	-13.34	QP		
6		904.9400	38.20	-0.63	37.57	46.00	-8.43	QP		

*:Maximum data x:Over limit I:over margin


Operator: CSL

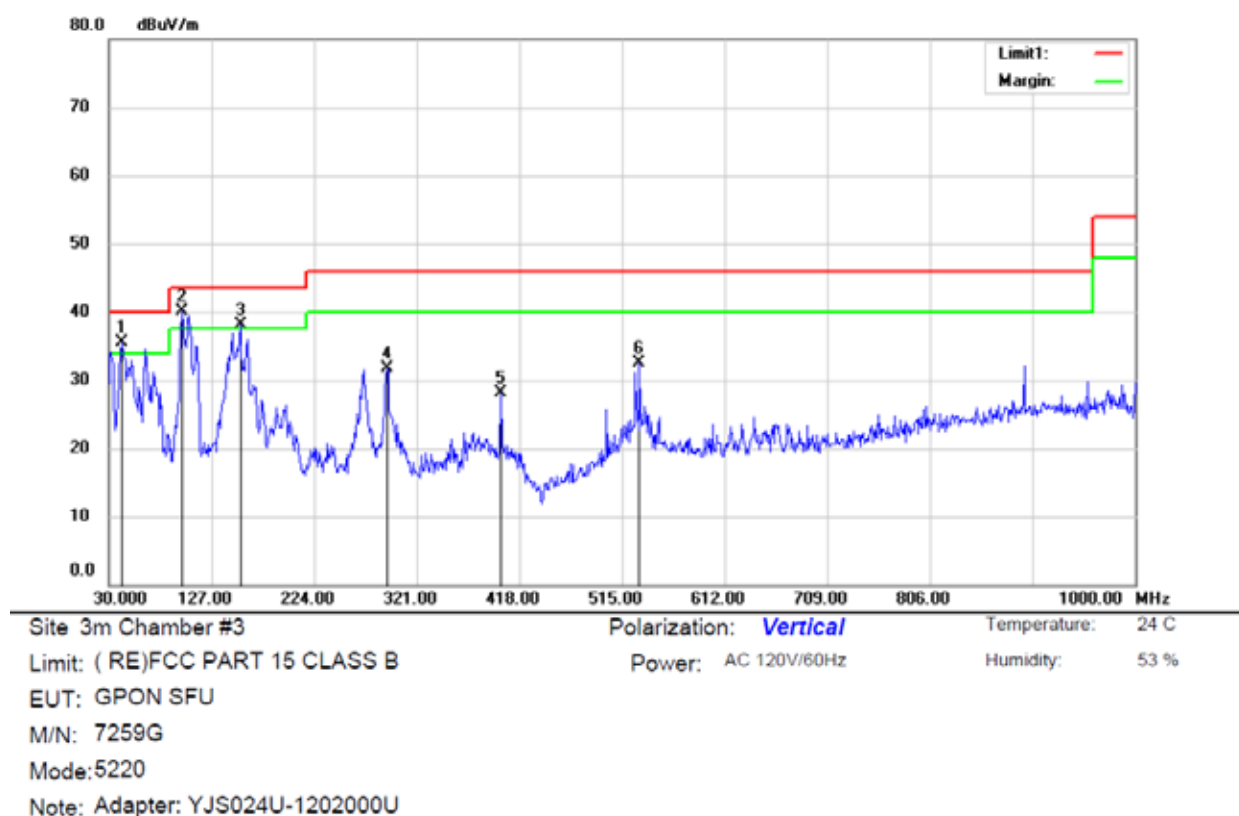

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	I	42.6100	48.55	-13.02	35.53	40.00	-4.47	QP		
2	*	98.8700	54.27	-14.26	40.01	43.50	-3.49	QP		
3	I	154.1600	56.51	-18.36	38.15	43.50	-5.35	QP		
4		292.8700	45.02	-13.39	31.63	46.00	-14.37	QP		
5		400.5400	37.05	-8.89	28.16	46.00	-17.84	QP		
6		531.4900	40.05	-7.55	32.50	46.00	-13.50	QP		

*:Maximum data x:Over limit I:over margin


Operator: CSL

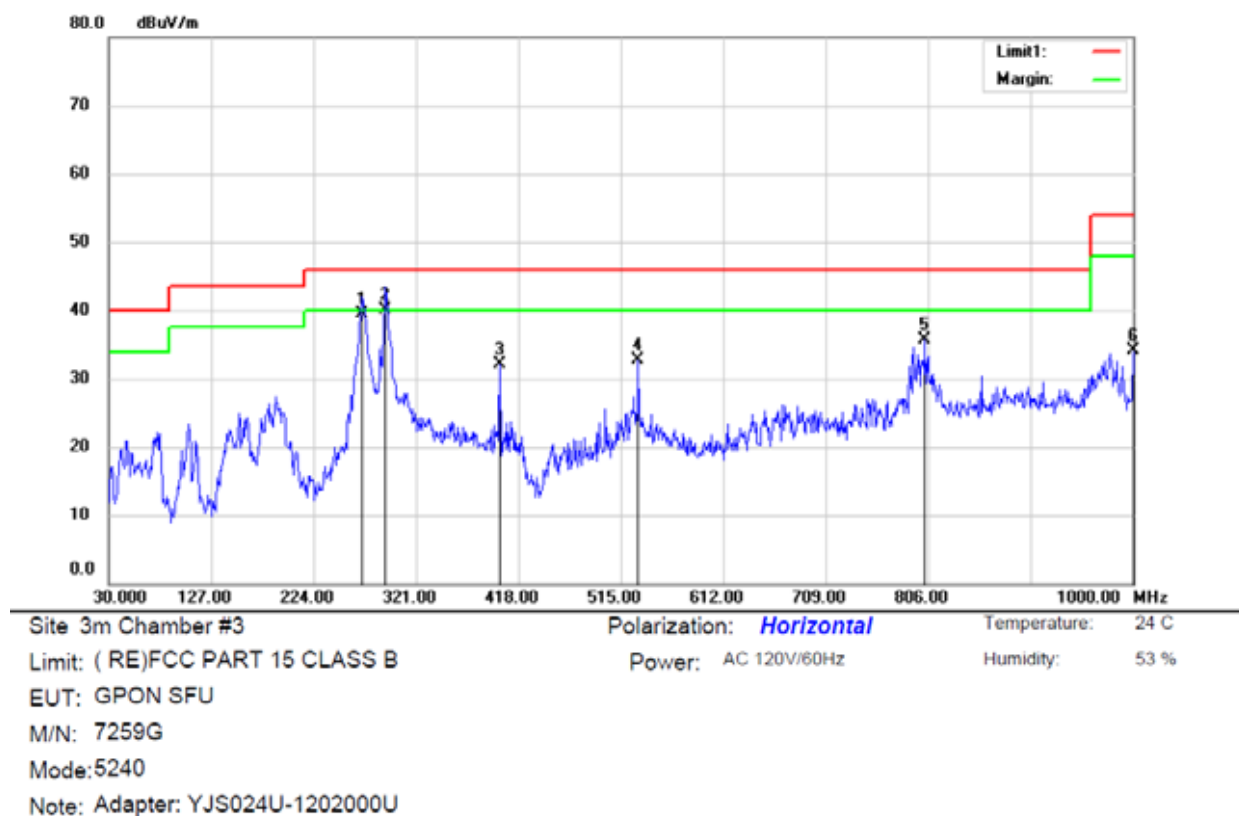

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Comment
1		269.5900	52.19	-12.69	39.50	46.00	-6.50	QP		
2	*	291.9000	53.42	-13.32	40.10	46.00	-5.90	QP		
3		400.5400	41.06	-8.89	32.17	46.00	-13.83	QP		
4		531.4900	40.27	-7.55	32.72	46.00	-13.28	QP		
5		803.0900	38.45	-2.80	35.65	46.00	-10.35	QP		
6		1000.000	34.93	-0.78	34.15	54.00	-19.85	QP		

*:Maximum data x:Over limit l:over margin

Operator: CSL

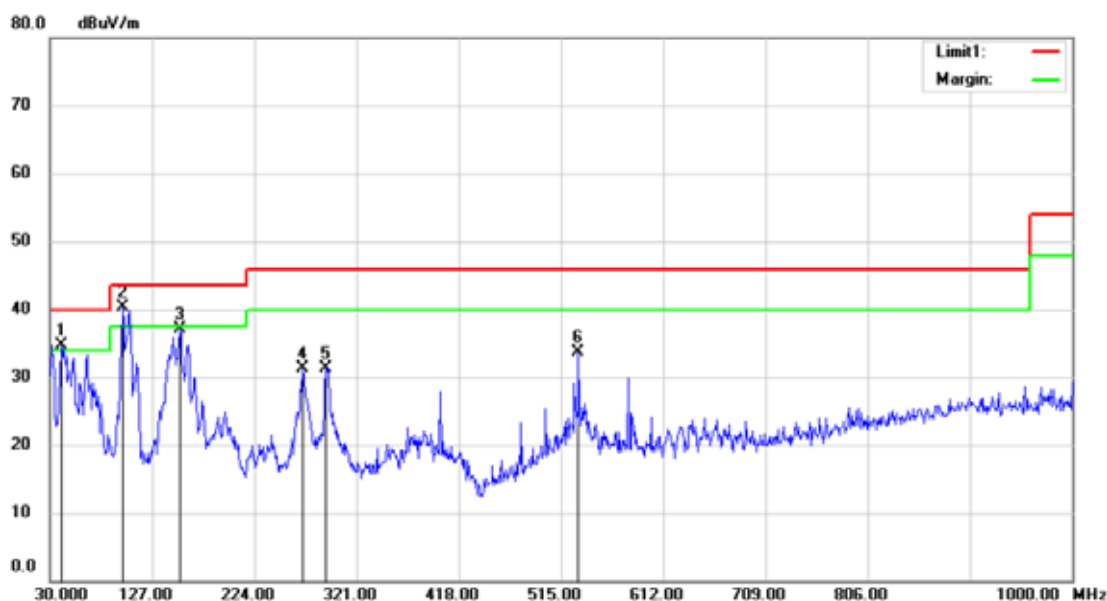

Site 3m Chamber #3

Limit: (RE)FCC PART 15 CLASS B

EUT: GPON SFU

M/N: 7259G

Mode:5240

Note: Adapter: YJS024U-1202000U

Polarization: **Vertical**

Power: AC 120V/60Hz


Temperature: 24 C

Humidity: 53 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	I	40.6700	47.59	-12.87	34.72	40.00	-5.28			QP
2	*	98.8700	54.61	-14.26	40.35	43.50	-3.15			QP
3		153.1900	55.36	-18.29	37.07	43.50	-6.43			QP
4		269.5900	43.91	-12.69	31.22	46.00	-14.78			QP
5		291.9000	44.65	-13.32	31.33	46.00	-14.67			QP
6		531.4900	41.35	-7.55	33.80	46.00	-12.20			QP

*:Maximum data x:Over limit !:over margin

Operator: CSL

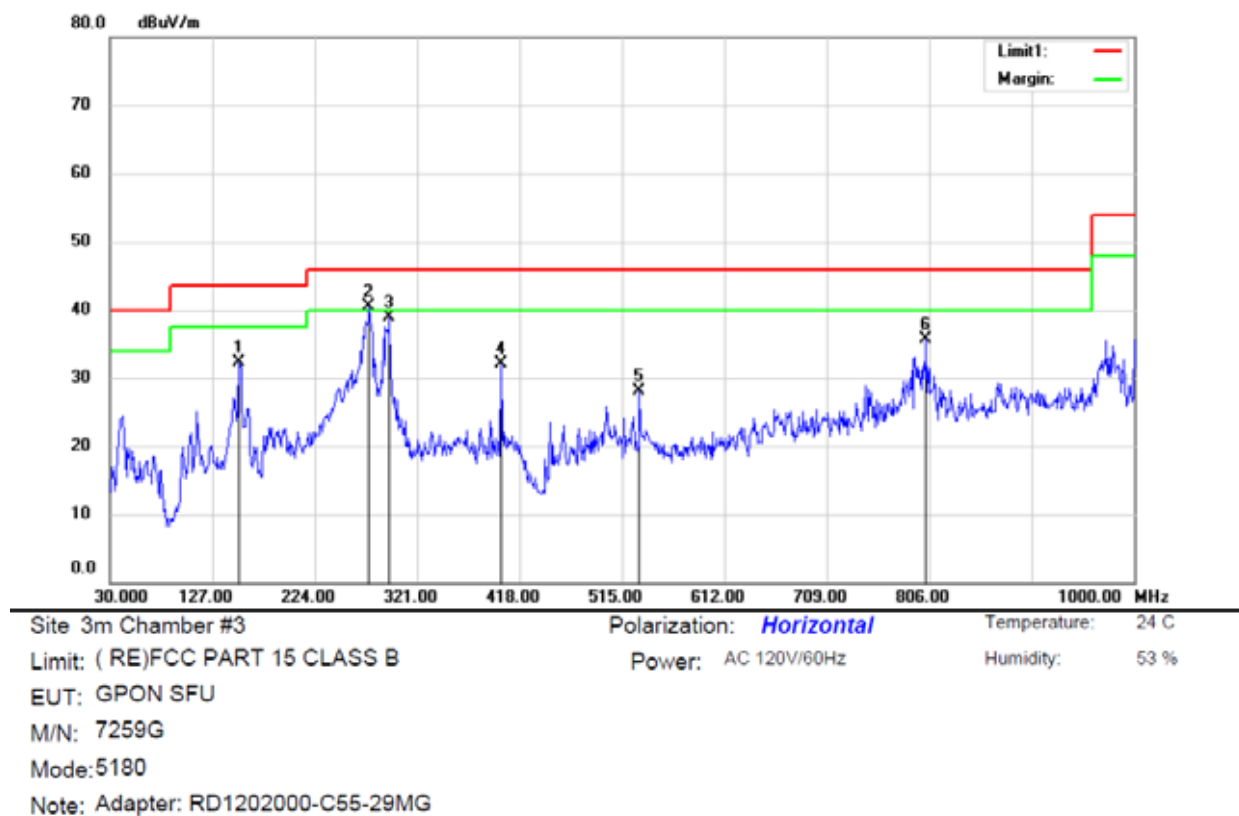

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		152.2200	50.62	-18.24	32.38	43.50	-11.12	QP		
2	*	275.4100	53.19	-12.62	40.57	46.00	-5.43	QP		
3		294.8100	52.40	-13.50	38.90	46.00	-7.10	QP		
4		400.5400	40.95	-8.89	32.06	46.00	-13.94	QP		
5		531.4900	35.72	-7.55	28.17	46.00	-17.83	QP		
6		803.0900	38.41	-2.80	35.61	46.00	-10.39	QP		

*:Maximum data x:Over limit l:over margin

Operator: CSL



Site 3m Chamber #3
 Limit: (RE)FCC PART 15 CLASS B
 EUT: GPON SFU
 M/N: 7259G
 Mode:5180
 Note: Adapter: RD1202000-C55-29MG


Polarization: **Vertical**
 Power: AC 120V/60Hz

Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	42.6100	48.22	-13.02	35.20	40.00	-4.80	QP		
2		98.8700	49.96	-14.26	35.70	43.50	-7.80	QP		
3		153.1900	55.09	-18.29	36.80	43.50	-6.70	QP		
4		275.4100	45.91	-12.62	33.29	46.00	-12.71	QP		
5		291.9000	48.19	-13.32	34.87	46.00	-11.13	QP		
6		531.4900	40.62	-7.55	33.07	46.00	-12.93	QP		

*:Maximum data x:Over limit l:over margin

Operator: CSL

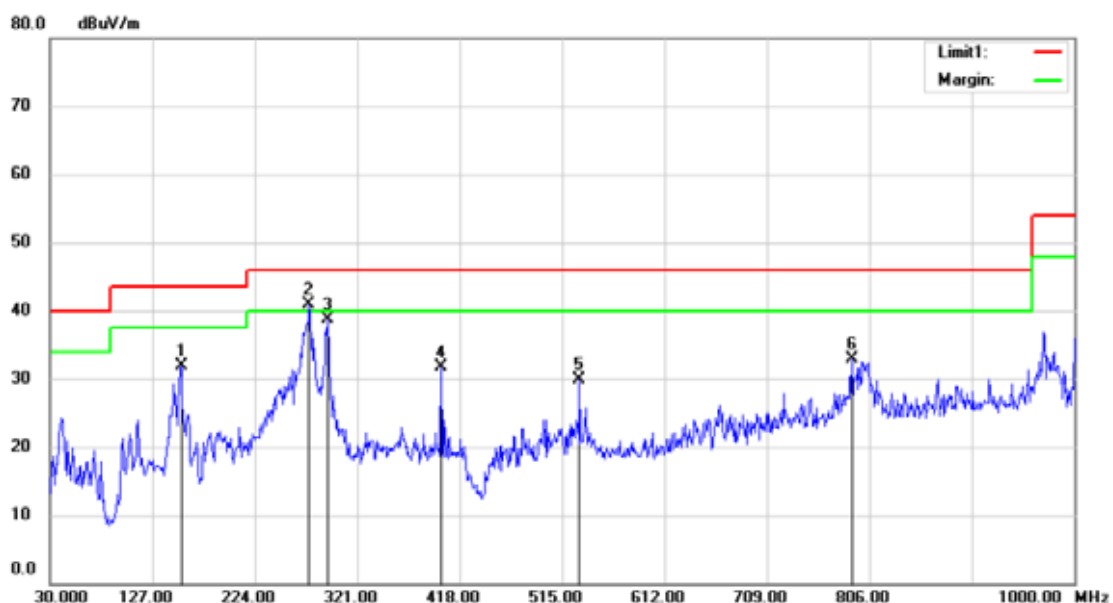


Site 3m Chamber #3 Polarization: **Horizontal** Temperature: 24 C
Limit: (RE)FCC PART 15 CLASS B Power: AC 120V/60Hz Humidity: 53 %
EUT: GPON SFU
M/N: 7259G
Mode:5220
Note: Adapter: RD1202000-C55-29MG

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		154.1600	50.21	-18.36	31.85	43.50	-11.65	QP		
2	*	275.4100	53.57	-12.62	40.95	46.00	-5.05	QP		
3		292.8700	52.07	-13.39	38.68	46.00	-7.32	QP		
4		400.5400	40.51	-8.89	31.62	46.00	-14.38	QP		
5		531.4900	37.50	-7.55	29.95	46.00	-16.05	QP		
6		789.5100	36.14	-3.19	32.95	46.00	-13.05	QP		

*:Maximum data x:Over limit l:over margin


Operator: CSL

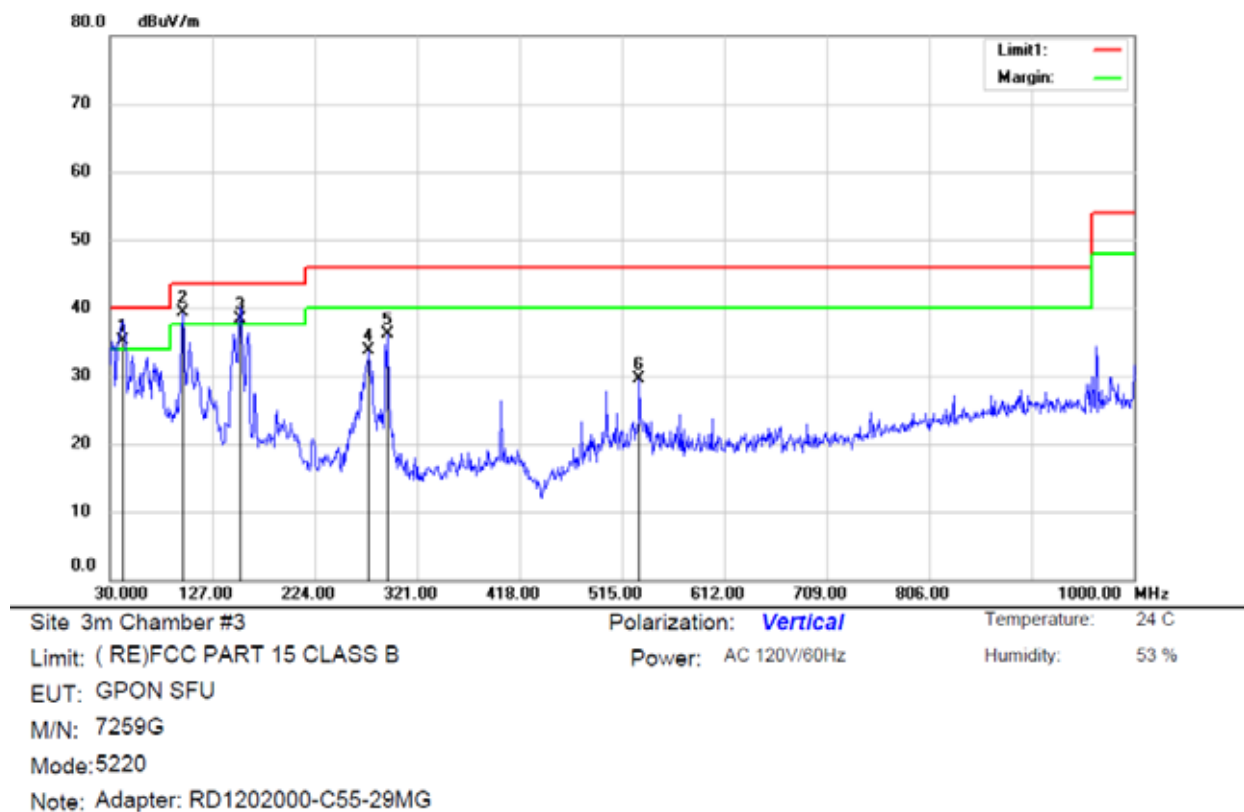

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	!	42.6100	48.22	-13.02	35.20	40.00	-4.80	QP		
2	*	98.8700	53.57	-14.26	39.31	43.50	-4.19	QP		
3	!	153.1900	56.69	-18.29	38.40	43.50	-5.10	QP		
4		275.4100	46.38	-12.62	33.76	46.00	-12.24	QP		
5		292.8700	49.45	-13.39	36.06	46.00	-9.94	QP		
6		531.4900	37.04	-7.55	29.49	46.00	-16.51	QP		

!:Maximum data x:Over limit !:over margin

Operator: CSL

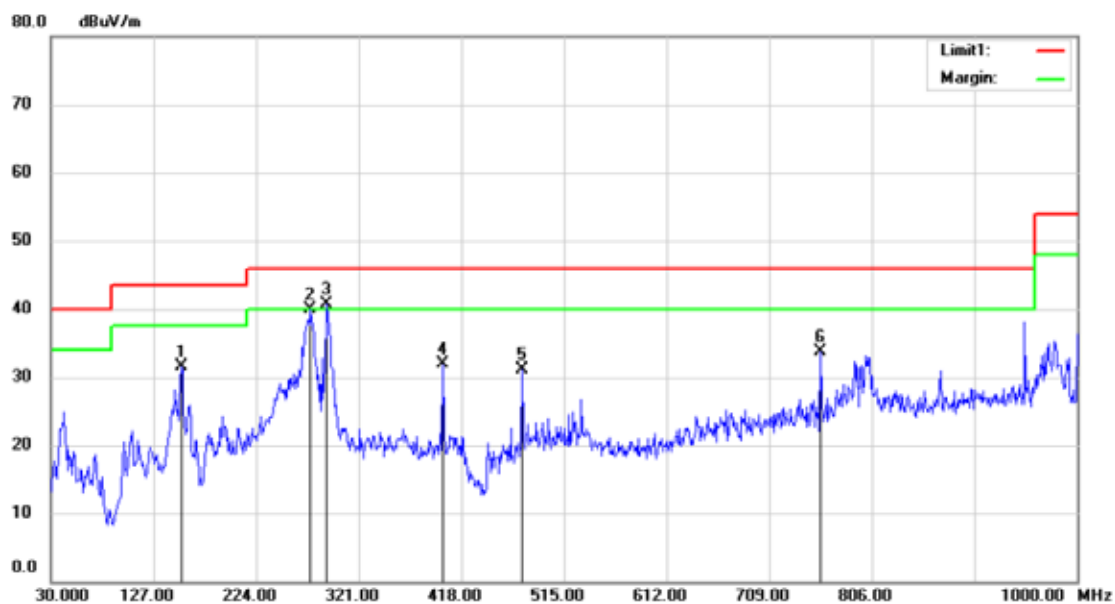


Site: 3m Chamber #3
 Limit: (RE)FCC PART 15 CLASS B
 EUT: GPON SFU
 M/N: 7259G
 Mode: 5240
 Note: Adapter: RD1202000-C55-29MG

Polarization: **Horizontal**
 Power: AC 120V/60Hz
 Temperature: 24 C
 Humidity: 53 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		153.1900	49.74	-18.29	31.45	43.50	-12.05	QP		
2		275.4100	52.53	-12.62	39.91	46.00	-6.09	QP		
3	*	290.9300	53.92	-13.26	40.66	46.00	-5.34	QP		
4		400.5400	40.75	-8.89	31.86	46.00	-14.14	QP		
5		475.2300	41.01	-9.97	31.04	46.00	-14.96	QP		
6		757.5000	37.90	-4.20	33.70	46.00	-12.30	QP		

*:Maximum data x:Over limit !:over margin

Operator: CSL

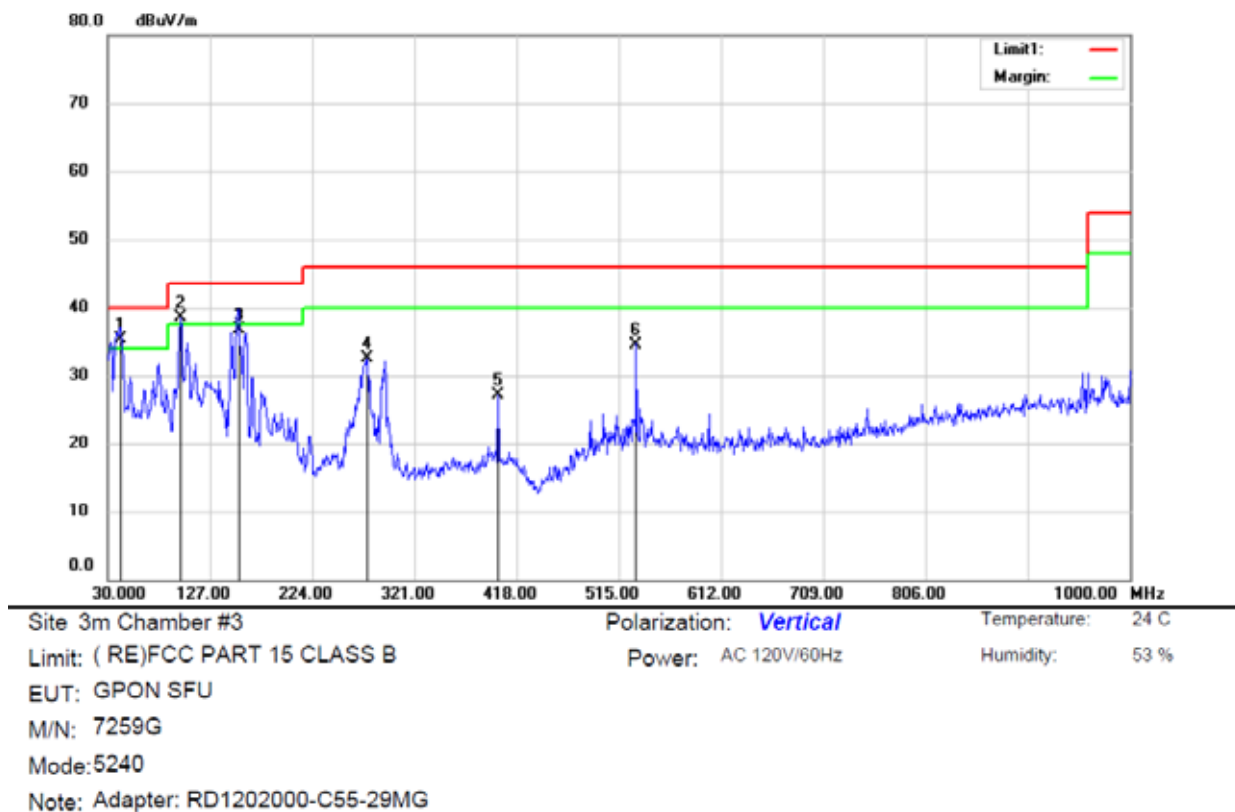

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	41.6400	48.33	-12.93	35.40	40.00	-4.60	QP		
2	!	98.8700	52.71	-14.26	38.45	43.50	-5.05	QP		
3		154.1600	55.16	-18.36	36.80	43.50	-6.70	QP		
4		276.3800	45.11	-12.61	32.50	46.00	-13.50	QP		
5		400.5400	36.00	-8.89	27.11	46.00	-18.89	QP		
6		531.4900	42.15	-7.55	34.60	46.00	-11.40	QP		

*:Maximum data x:Over limit !:over margin

Operator: CSL

8.6 POWER LINE CONDUCTED EMISSIONS

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 6.3 conducted emission test setup

8.6.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.


Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results

Pass

We test the EUT at 120V and 240V, and show the worst result as bellow.

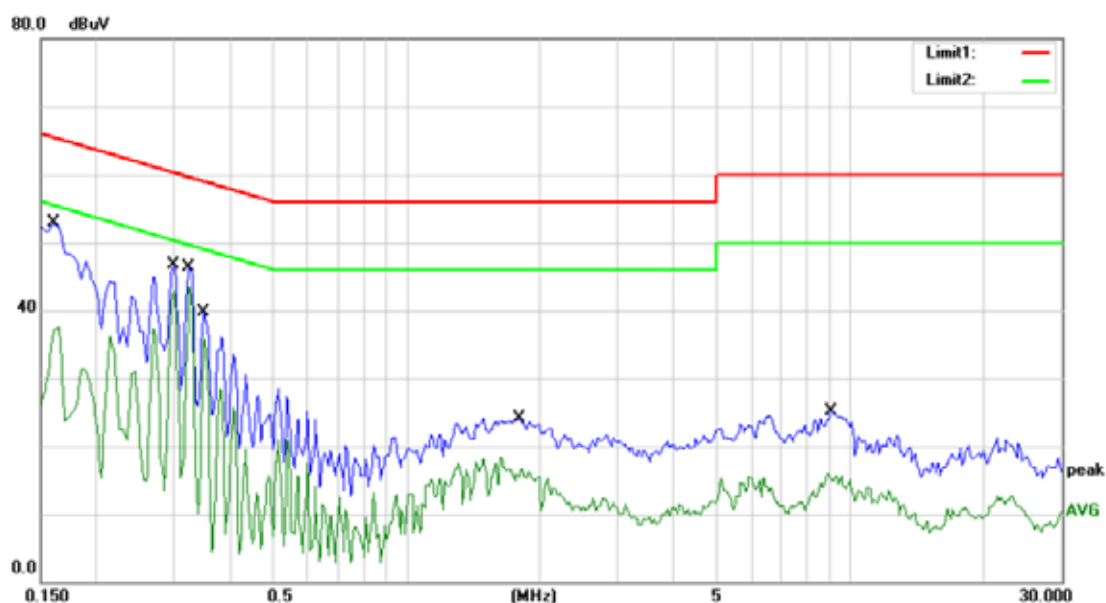

Site Conduction #1

Phase: L1

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: GPON SFU


M/N: 7259G

Mode: ON

Note: YJS024U-1202000U

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1600	52.88	0.00	52.88	65.46	-12.58	QP	
2		0.1600	37.48	0.00	37.48	55.46	-17.98	AVG	
3		0.3000	46.78	0.00	46.78	60.24	-13.46	QP	
4		0.3000	43.00	0.00	43.00	50.24	-7.24	AVG	
5		0.3250	46.32	0.00	46.32	59.58	-13.26	QP	
6	*	0.3250	43.28	0.00	43.28	49.58	-6.30	AVG	
7		0.3500	39.71	0.00	39.71	58.96	-19.25	QP	
8		0.3500	35.67	0.00	35.67	48.96	-13.29	AVG	
9		1.7950	24.03	0.00	24.03	56.00	-31.97	QP	
10		1.7950	16.82	0.00	16.82	46.00	-29.18	AVG	
11		9.0600	25.12	0.00	25.12	60.00	-34.88	QP	
12		9.0600	15.95	0.00	15.95	50.00	-34.05	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: Chensl

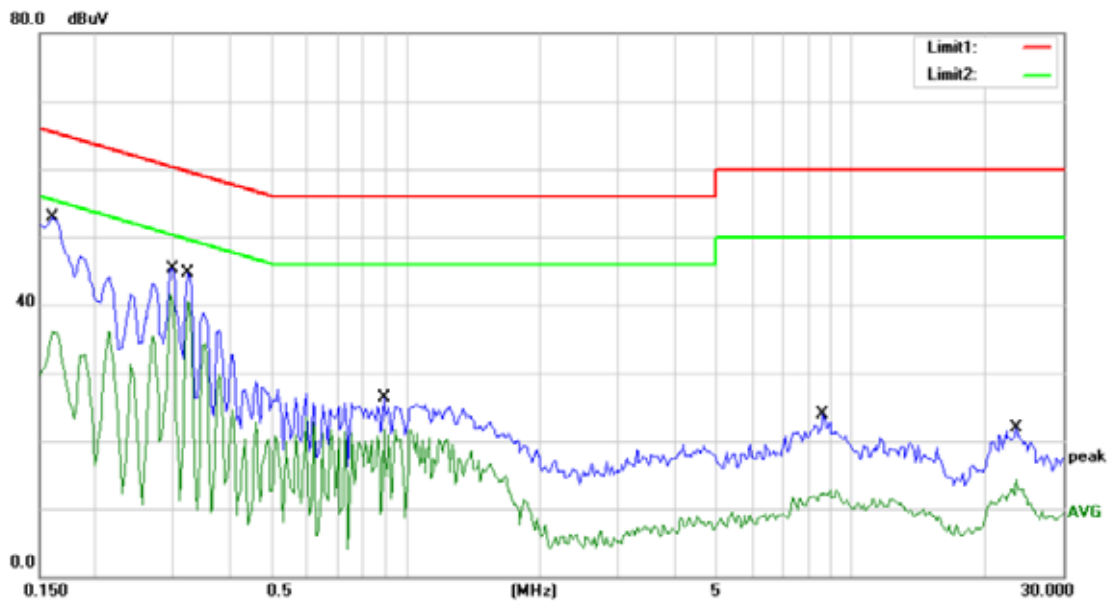

Site Conduction #1

Phase: **N**

Temperature: 22

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 50 %

EUT: GPON SFU


M/N: 7259G

Mode: ON

Note: YJS024U-1202000U

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1600	52.84	0.00	52.84	65.46	-12.62	QP	
2		0.1600	36.10	0.00	36.10	55.46	-19.36	AVG	
3		0.3000	45.37	0.00	45.37	60.24	-14.87	QP	
4	*	0.3000	41.43	0.00	41.43	50.24	-8.81	AVG	
5		0.3250	44.61	0.00	44.61	59.58	-14.97	QP	
6		0.3250	40.42	0.00	40.42	49.58	-9.16	AVG	
7		0.8900	26.25	0.00	26.25	56.00	-29.75	QP	
8		0.8900	21.77	0.00	21.77	46.00	-24.23	AVG	
9		8.6600	23.84	0.00	23.84	60.00	-36.16	QP	
10		8.6600	12.77	0.00	12.77	50.00	-37.23	AVG	
11		23.5750	21.86	0.00	21.86	60.00	-38.14	QP	
12		23.5750	13.00	0.00	13.00	50.00	-37.00	AVG	

*:Maximum data x:Over limit l:over margin Comment: Factor build in receiver. Operator: Chensl

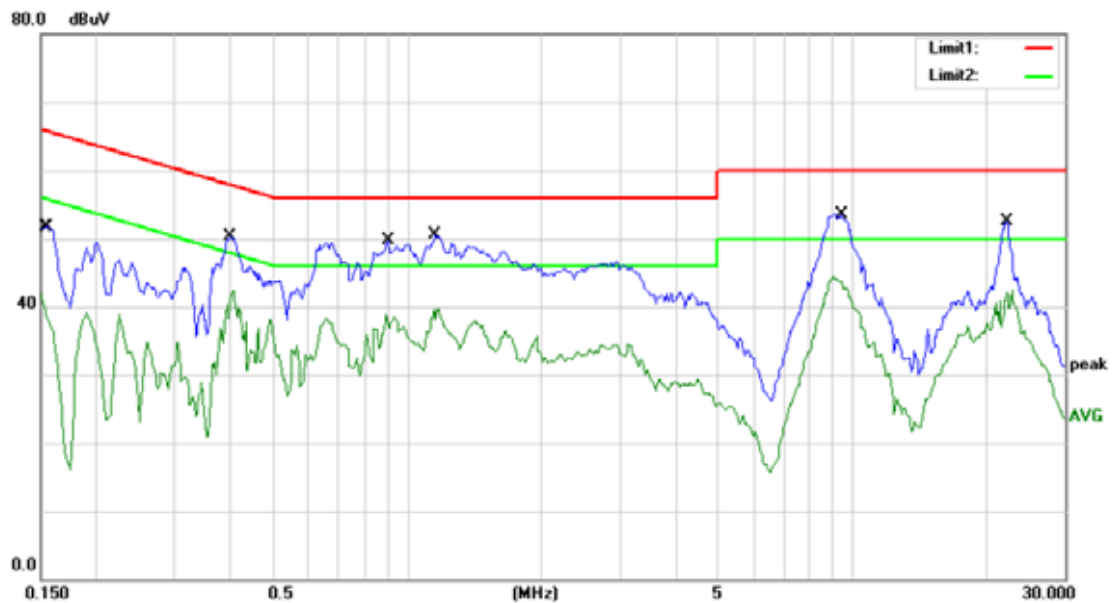


Site Conduction #1
 Limit: (CE)FCC PART 15 class B_QP
 EUT: GPON SFU
 M/N: 7259G
 Mode: ON
 Note: RD1202000-C55-29MG

Phase: **L1**
 Power: AC 120V/60Hz

Temperature: 22
 Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1500	41.89	0.00	41.89	56.00	-14.11	AVG	
2		0.1550	51.74	0.00	51.74	65.73	-13.99	QP	
3		0.3996	50.23	0.00	50.23	57.86	-7.63	QP	
4	*	0.3996	42.40	0.00	42.40	47.86	-5.46	AVG	
5		0.9050	49.65	0.00	49.65	56.00	-6.35	QP	
6		0.9050	38.93	0.00	38.93	46.00	-7.07	AVG	
7		1.1550	50.42	0.00	50.42	56.00	-5.58	QP	
8		1.1550	39.74	0.00	39.74	46.00	-6.26	AVG	
9		9.4700	53.52	0.00	53.52	60.00	-6.48	QP	
10		9.4700	44.44	0.00	44.44	50.00	-5.56	AVG	
11		22.2500	52.49	0.00	52.49	60.00	-7.51	QP	
12		22.2500	42.60	0.00	42.60	50.00	-7.40	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Chensl

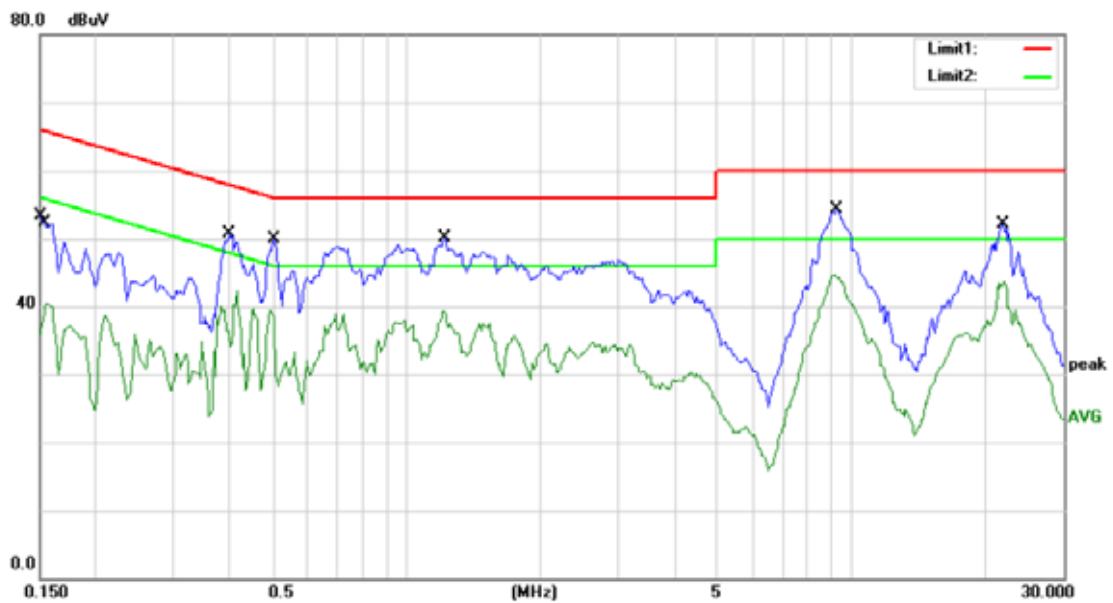

Site Conduction #1
 Limit: (CE)FCC PART 15 class B_QP
 EUT: GPON SFU
 M/N: 7259G
 Mode: ON
 Note: RD1202000-C55-29MG

Phase: **N**
 Power: AC 120V/60Hz

Temperature: 22
 Humidity: 50 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1500	53.40	0.00	53.40	66.00	-12.60	QP	
2		0.1550	40.54	0.00	40.54	55.73	-15.19	AVG	
3		0.3996	50.66	0.00	50.66	57.86	-7.20	QP	
4		0.3996	42.23	0.00	42.23	47.86	-5.63	AVG	
5		0.5050	49.96	0.00	49.96	56.00	-6.04	QP	
6		0.5050	39.53	0.00	39.53	46.00	-6.47	AVG	
7		1.2200	50.10	0.00	50.10	56.00	-5.90	QP	
8		1.2200	39.33	0.00	39.33	46.00	-6.67	AVG	
9		9.2700	54.25	0.00	54.25	60.00	-5.75	QP	
10	*	9.2700	44.69	0.00	44.69	50.00	-5.31	AVG	
11		21.9463	52.18	0.00	52.18	60.00	-7.82	QP	
12		21.9463	43.69	0.00	43.69	50.00	-6.31	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: Chensl

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.407 (a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS.

The EUT has 1 antenna: a Ceramic Chip Antenna for BT3.0 with classic model, the gain is 1.4 dBi;

The EUT has 1 antenna: a Ceramic Chip Antenna for BT4.0 with BLE model, the gain is 1.4 dBi;

The EUT has 1 antenna: a Ceramic Chip Antenna for wifi 2.4G, the gain is 1.4 dBi;

The EUT has 1 antenna: a Ceramic Chip Antenna for wifi 5.8G, the gain is 2.3 dBi;

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.