

FCC 15.247& RSS-247
2.4 GHz Report

for

Embertec Pty Ltd

182 Fullarton Road, Dulwich, Australia, 5065

Product Name : Bluetooth Smart Sensor
Model Name : BT-02
FCC ID : 2AGKS-BT02SENSOR
IC : 20880-BT02SENSOR

TABLE OF CONTENTS

<u>Description</u>	<u>Page</u>
TEST REPORT CERTIFICATION	4
1. REPORT HISTORY.....	5
2. SUMMARY OF TEST RESULTS	6
3. GENERAL INFORMATION	7
3.1. Description of EUT	7
3.2. EUT Specifications Assessed in Current Report.....	8
3.3. Antenna Information.....	8
3.4. Test Configuration	9
3.5. Tested Supporting System List.....	10
3.6. Setup Configuration	10
3.7. Operating Condition of EUT	10
3.8. Description of Test Facility	11
3.9. Measurement Uncertainty	12
4. MEASUREMENT EQUIPMENT LIST	13
4.1. Conducted Emission Measurement.....	13
4.2. Radiated Emission Measurement.....	13
4.3. RF Conducted Measurement.....	13
5. CONDUCTED EMISSION MEASUREMET.....	14
5.1. Block Diagram of Test Setup	14
5.2. Power Line Conducted Emission Limit.....	14
5.3. Test Procedure	14
5.4. Conducted Emission Measurement Results	15
6. RADIATED EMISSION MEASUREMENT	17
6.1. Block Diagram of Test Setup	17
6.2. Radiated Emission Limits	18
6.3. Test Procedure	18
6.4. Measurement Result Explanation	19
6.5. Test Results.....	19
7. 6dB BANDWIDTH MEASUREMENT	28
7.1. Block Diagram of Test Setup	28
7.2. Specification Limits	28
7.3. Test Procedure	28
7.4. Test Results.....	28
8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT	30
8.1. Block Diagram of Test Setup	30
8.2. Specification Limits	30
8.3. Test Procedure	30
8.4. Test Results.....	31
9. EMISSION LIMITATIONS MEASUREMENT	33
9.1. Block Diagram of Test Setup	33
9.2. Specification Limits	33
9.3. Test Procedure	33
9.4. Test Results.....	34

10. POWER SPECTRAL DENSITY	40
10.1. Block Diagram of Test Setup	40
10.2. Specification Limits	40
10.3. Test Procedure	40
10.4. Test Results.....	41
11. DEVIATION TO TEST SPECIFICATIONS.....	42

APPENDIX A TEST PHOTOGRAPHS

TEST REPORT CERTIFICATION

Applicant : Embertec Pty Ltd
Manufacture : Embertec Pty Ltd
Product Name : Bluetooth Smart Sensor
Model No. : BT-02
Serial No. : N/A
Power Supply : DC 5V (Power Bar)
Test Voltage : AC 120V, 60Hz (Via Power Bar)

Applicable Standards:

FCC Rules and Regulations Part 15 Subpart C, Oct. 2014
RSS-Gen (Issue 4), November 2014
RSS-247 (Issue 1), May 2015
ANSI C63.10:2013
KDB 558074 D01 DTS Meas Guidance v03r03

AUDIX Technology Corp. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report. **AUDIX Technology Corp.** does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens and samples.

Date of Test: 2015. 11. 19 ~ 25

Date of Report: 2015. 11. 30

Producer: Sabrina Wang
(Sabrina Wang/Administrator)

Signatory: Ben Cheng
(Ben Cheng/Manager)

1. REPORT HISTORY

Revision	Date	Revision Summary	Report Number
0	2015. 11. 30	Original Report.	EM-F150744

2. SUMMARY OF TEST RESULTS

Rule		Description	Results
FCC	IC		
15.207	RSS-Gen §8.8	Conducted Emission	PASS
15.247(d)/ 15.205	RSS-Gen §8.9 RSS-247 §5.5	Radiated Band Edge and Radiated Spurious Emission	PASS
15.247(a)(2)	RSS-247 §5.2(1)	6dB Bandwidth	PASS
15.247(b)(3)	RSS-247 §5.4(4)	Maximum Peak Output	PASS
15.247(d)	RSS-247 §5.5	Conducted Band Edges and Conducted Spurious Emission	PASS
15.247 (e)	RSS-247 §5.2(2)	Power Spectral Density	PASS
15.203	---	Antenna Requirement	PASS

3. GENERAL INFORMATION

3.1. Description of EUT

Product	Bluetooth Smart Sensor
Model Number	BT-02
Serial Number	N/A
Applicant	Embertec Pty Ltd 182 Fullarton Road, Dulwich, Australia, 5065
Manufacture	Embertec Pty Ltd 182 Fullarton Road, Dulwich, Australia, 5065
RF Features	Bluetooth Low Energy (BLE)
Transmit Type	1T1R
Device Category	<input type="checkbox"/> Outdoor Access Point <input type="checkbox"/> Fixed point-to-point Access Point <input type="checkbox"/> Indoor Access Point <input checked="" type="checkbox"/> Mobile and Portable client device
Date of Receipt of Sample	2015. 11. 13

3.2. EUT Specifications Assessed in Current Report

RF Features	Fundamental Range (MHz)	Channel Number	Modulation	Data Rate (Mbps)
BLE	2402-2480	40	GFSK	1

Channel List				
Channel Number	Frequency (MHz)	Channel Number	Frequency (MHz)	
00	2402	20	2442	
01	2404	21	2444	
02	2406	22	2446	
03	2408	23	2448	
04	2410	24	2450	
05	2412	25	2452	
06	2414	26	2454	
07	2416	27	2456	
08	2418	28	2458	
09	2420	29	2460	
10	2422	30	2462	
11	2424	31	2464	
12	2426	32	2466	
13	2428	33	2468	
14	2430	34	2470	
15	2432	35	2472	
16	2434	36	2474	
17	2436	37	2476	
18	2438	38	2478	
19	2440	39	2480	

3.3. Antenna Information

Antenna Part Number	Manufacture	Antenna Type	Frequency	Max Gain
---	---	Printed Antenna	2405-2480MHz	1.15354dBi

3.4. Test Configuration

RF Features	Duty Cycle (x)	T (ms)	Duty Cycle Factor (dB)
BLE	0.60	N/A	N/A

Note: When duty cycle is less than 98% (0.98) that duty cycle factor $10\log(1/x)$ is needed to add in conducted test items measured in average detector.

AC Conduction	
Test Case	Normal operation

	Item	Test Channel
Radiated Test Case	Radiated Band Edge ^{Note1}	00/39
	Radiated Spurious Emission (30MHz-1GHz) ^{Note1}	00/19/39
	Radiated Spurious Emission (Above 1GHz) ^{Note1}	00/19/39
Conducted Test Case	6dB Bandwidth	00/19/39
	Peak Power Spectral Density	00/19/39
	Peak Output Power	00/19/39
	Band Edge	00/39
	Spurious Emission	00/19/39

Note 1:

Mobile Device

Portable Device, and 3 axis were assessed. The worst scenario for Radiated Spurious Emission as follow:

- Lie
- Side
- Stand

3.5. Tested Supporting System List

3.5.1. Support Peripheral Unit

No.	Product	Brand	Model No.	Serial No.	FCC ID
1.	Power Bar	N/A	ESUSAV8-ET-10B	N/A	N/A

3.5.2. Cable Lists

No.	Cable Description Of The Above Support Units
1.	LAN Cable: Shielded, Detachable, 3.0m AC Power Cord: Unshielded, Undetachable, 0.5m (3C)

3.6. Setup Configuration

3.6.1. EUT Configuration for Power Line and Radiated Emission



3.6.2. EUT Configuration for Conducted Test Items



3.7. Operating Condition of EUT

To set EUT RF function under continues transmitting and choosing channel.

3.8. Description of Test Facility

Test Firm Name	:	AUDIX Technology Corporation EMC Department No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
Test Location & Facility	:	No. 8 Shielded Room No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan
		No. 3 3M Semi-Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan IC Test Site Registration No.: 5183B-3 Renewal on August 24, 2015
		Fully Anechoic Chamber No. 53-11, Dingfu, Linkou Dist., New Taipei City 244, Taiwan IC Test Site Registration No.: 5183B-4 Renewal on August 31, 2015
NVLAP Lab. Code	:	200077-0
TAF Accreditation No	:	1724

3.9. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty
Conduction Test	150kHz~30MHz	±3.5dB
Radiation Test (Distance: 3m)	30MHz~300MHz	± 3.64dB
	300MHz~1000MHz	± 4.70dB
	Above 1GHz	± 2.94dB

Remark : Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6dB Bandwidth	± 0.05kHz
Maximum peak output power	± 0.33dB
Power spectral density	± 0.13dB
Conducted Emission Limitations	± 0.13dB

4. MEASUREMENT EQUIPMENT LIST

4.1. Conducted Emission Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Test Receiver	R&S	ESR3	101774	2015. 02. 06	1 Year
2.	A.M.N.	R&S	ENV4200	100169	2015. 05. 08	1 Year
3.	Pulse Limiter	R&S	ESH3-Z2	100354	2015. 01. 17	1 Year

4.2. Radiated Emission Measurement

4.2.1. Frequency Range 30MHz~1000MHz (Semi-Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9010A-526	MY53400071	2015. 09. 14	1 Year
2.	Test Receiver	R & S	ESCS30	100338	2015. 06. 24	1 Year
3.	Amplifier	HP	8447D	2944A06305	2015. 02. 12	1 Year
4.	Bilog Antenna	TESEQ	CBL6112D	33821	2015. 02. 27	1 Year

4.2.2. Frequency Range Above 1000MHz (Fully Anechoic Chamber)

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	E4446A	US44300366	2015. 08. 20	1 Year
2.	Amplifier	Sonoma	310N	187161	2015. 06. 17	1 Year
3.	Horn Antenna	ETS-Lindgren	3117	00135902	2015. 03. 06	1 Year
4.	2.4GHz Notch Filter	K&L	7NSL10-244 1.5E130.5-00	1	2015. 07. 22	1 Year
5.	3G High Pass Filter	Microware Circuits	H3G018G1	484796	2014. 08. 25	1 Year


4.3. RF Conducted Measurement

Item	Type	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Interval
1.	Spectrum Analyzer	Agilent	N9030A-544	US51350140	2015. 06. 10	1 Year

5. CONDUCTED EMISSION MEASUREMET

5.1. Block Diagram of Test Setup

Shielded Room Setup Diagram

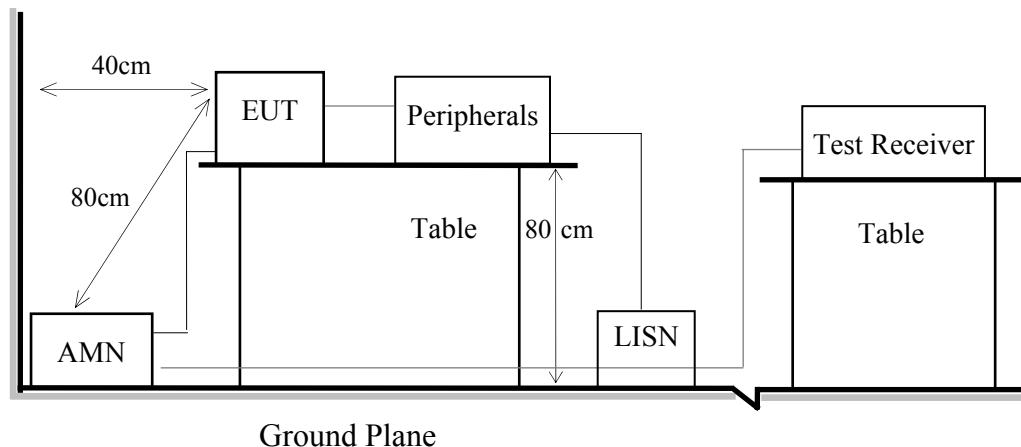

5.2. Power Line Conducted Emission Limit

Frequency	Conducted Limit	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark 1.: If the average limit is met when using a Quasi-Peak detector,

the measurement using the average detector is not required.

2.: The lower limit applies to the band edges.

5.3. Test Procedure

- 5.3.1. To set up the EUT as indicated in ANSI C 63.10. The EUT was placed on the table which has 80 cm height to the ground and 40 cm distance to the conducting wall.
- 5.3.2. Power supplier of the EUT was connected to the AC mains through an Artificial Mains Network (A.M.N.).
- 5.3.3. The AC power supplies to all peripheral devices must be provided through line impedance stabilization network (L.I.S.N.)
- 5.3.4. Checking frequency range from 150 kHz to 30 MHz and record the emission which does not have 20 dB below limit.

5.4. Conducted Emission Measurement Results


PASSED.

Test Date	2015/11/25	Temp./Hum.	28°C/48%
Test Voltage	AC 120V, 60Hz (Via Power Bar)		



AUDIX Technology Corp. EMC Department
No.53-11, Dingfu, Linkou Dist.,New Taipei City
244, Taiwan R.O.C.
Tel :+886-2-26092133 Fax :+886-2-26099303
Email:emc@audixtech.com

Data: 2 File: D:\test data\REPORT\2015\C1M1511XXX\C1M1511205-C-D-RF.EM6 (2)

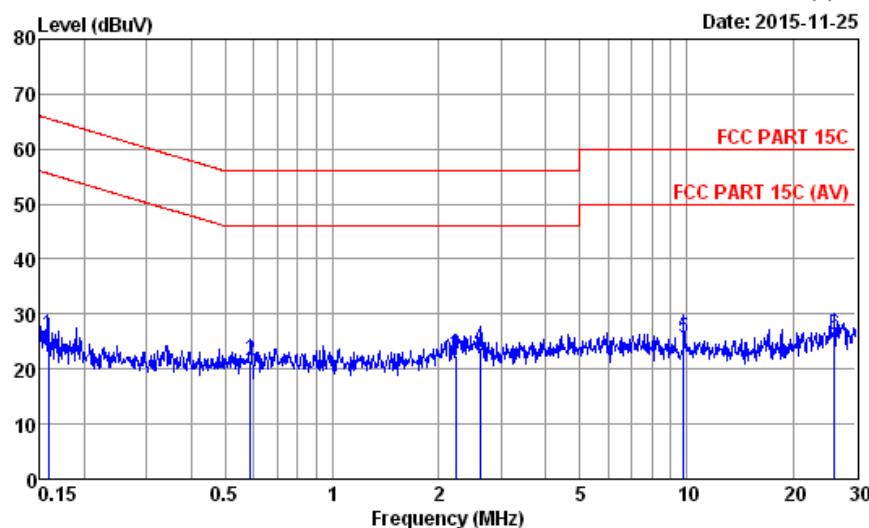


Site no. : No.8 Shielded Room Data no. : 2
Condition : ENV4200 358 (H) Phase : NEUTRAL
Limit : FCC PART 15C
Env. / Ins. : 28°C / 48% ESR3 (1774) Engineer : Tim
EUT : ET-02
Power Rating : 120Vac/60Hz
Test Mode : Operating

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Emission				Remark
				Reading (dB μ V)	Level (dB μ V)	Limits (dB μ V)	Margin (dB)	
1 0.158	10.25	0.03	9.87	6.12	26.27	65.56	39.29	QP
2 0.589	10.20	0.04	9.88	1.31	21.43	56.00	34.57	QP
3 2.225	10.19	0.09	9.87	2.22	22.37	56.00	33.63	QP
4 2.608	10.19	0.10	9.88	3.71	23.88	56.00	32.12	QP
5 9.809	10.18	0.21	9.90	5.52	25.81	60.00	34.19	QP
6 26.139	10.33	0.30	9.99	5.60	26.22	60.00	33.78	QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.



AUDIX Technology Corp. EMC Department
No.53-11, Dingfu, Linkou Dist., New Taipei City
244, Taiwan R.O.C.
Tel: +886-2-26092133 Fax: +886-2-26099303
Email: emc@audixtech.com

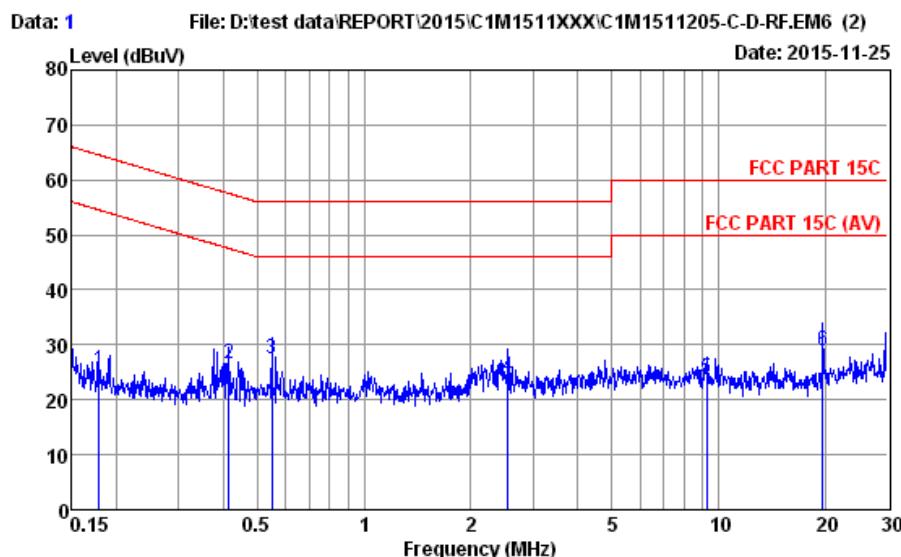

Site no. : No.8 Shielded Room Data no. : 1
Condition : ENV4200 358 (H) Phase : LINE
Limit : FCC PART 15C
Env. / Ins. : 28°C / 48% ESR3 (1774) Engineer : Tim
EUT : ET-02
Power Rating : 120Vac/60Hz
Test Mode : Operating

Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Pulse Att. (dB)	Emission				Remark
				Reading (dB μ V)	Level (dB μ V)	Limits (dB μ V)	Margin (dB)	
1	0.179	10.27	0.03	9.87	5.29	25.46	64.55	39.09 QP
2	0.415	10.23	0.03	9.87	6.38	26.51	57.55	31.04 QP
3	0.549	10.22	0.04	9.88	7.29	27.43	56.00	28.57 QP
4	2.540	10.21	0.10	9.88	4.12	24.31	56.00	31.69 QP
5	9.253	10.17	0.20	9.90	3.50	23.77	60.00	36.23 QP
6	19.635	10.09	0.27	9.94	8.52	28.82	60.00	31.18 QP

Remarks: 1. Emission Level= AMN Factor + Cable Loss + Pulse Att. + Reading.
2. If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.


6. RADIATED EMISSION MEASUREMENT

6.1. Block Diagram of Test Setup

6.1.1. Block Diagram of EUT


Indicated as section 3.6

6.1.2. Setup Diagram for 30-1000 MHz

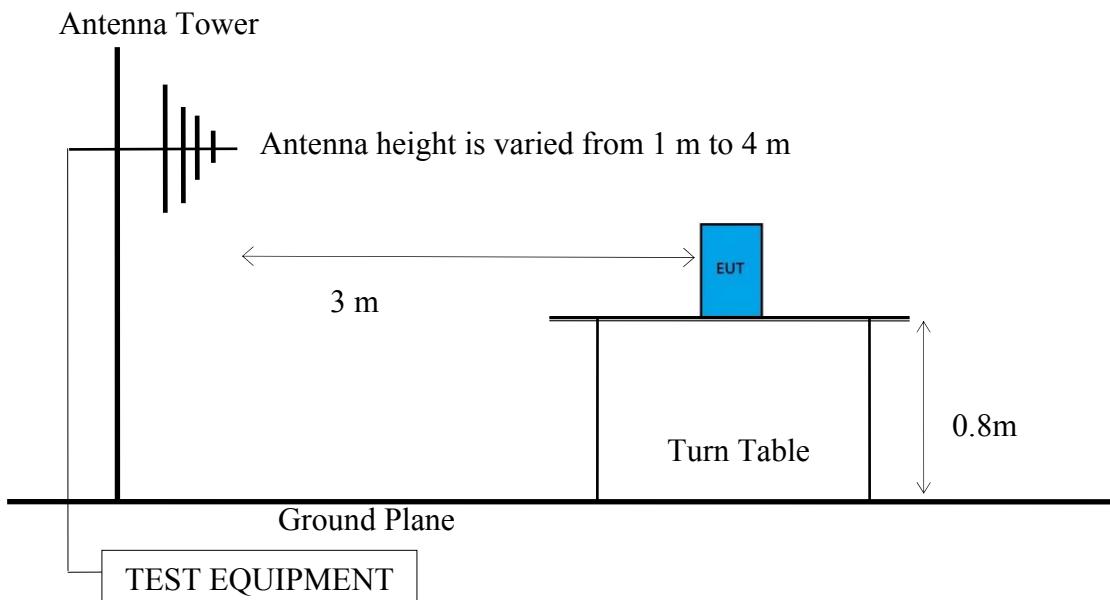

6.1.3. Semi-Anechoic Chamber (3m) Setup Diagram for above 1GHz

Antenna Tower

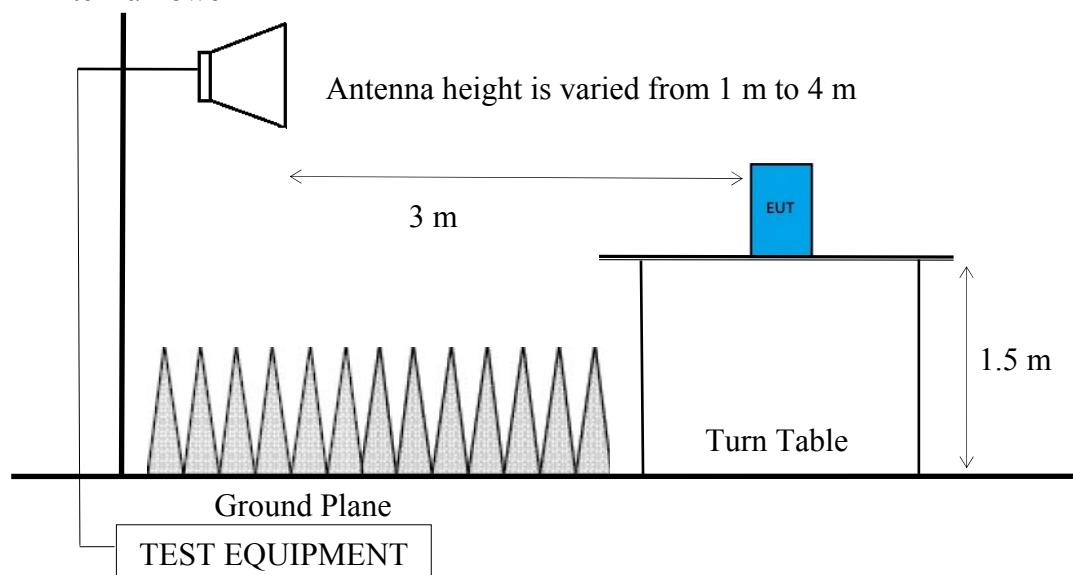

6.2. Radiated Emission Limits

In any 100kHz bandwidth outside the frequency band, the radio frequency power produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified as below.

Frequency (MHz)	Distance (m)	Field Strengths Limits	
		µV/m	dBµV/m
30 ~ 88	3	100	40.0
88 ~ 216	3	150	43.5
216 ~ 960	3	200	46.0
Above 960	3	500	54.0
Above 1000	3	74.0 dBµV/m (Peak) 54.0 dBµV/m (Average)	

Remark : (1) $\text{dB}\mu\text{V}/\text{m} = 20 \log (\mu\text{V}/\text{m})$

- (2) The tighter limit applies to the edge between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.
- (4) Fundamental and emission fall within operation band are exempted from this section.
- (5) Pursuant to ANSI C63.10: 6.6.4.3, if the maximized peak measured value complies with the average limit, then it is unnecessary to perform an average measurement.

6.3. Test Procedure

The EUT setup on the turn table which has 1.5m height to the ground. The turn table rotated 360 degrees and antenna varied from 1 m to 4 m to find the maximum emission level. Both horizontal and vertical polarization are required. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2013, RSS-Gen and RSS-247 regulation.

Frequency below 1 GHz:

Spectrum Analyzer is used for pre-testing with following setting:

- (1) RBW = 120KHz
- (2) VBW $\geq 3 \times \text{RBW}$.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the Q.P. detector is not required. Otherwise using Q.P. for finally measurement.

Frequency above 1GHz to 10th harmonic:

Peak Detector:

- (1) RBW = 1MHz
- (2) VBW \geq 3 x RBW.
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.
- (7) When peak-detected value is lower than limit that the measurement using the average detector is not required. Otherwise using average for finally measurement.

Average Measurement:

Option 1:

- (1) RBW = 1 MHz
- (2) VBW = $1/T$
- (3) Detector = Peak.
- (4) Sweep time = auto.
- (5) Trace mode = max hold.
- (6) Allow sweeps to continue until the trace stabilizes.

Option 2:

Average Emission Level= Peak Emission Level+ D.C.C.F.

6.4. Measurement Result Explanation

Peak Emission Level=Antenna Factor + Cable Loss + Meter Reading

Average Emission Level =Antenna Factor + Cable Loss + Meter Reading

Average Emission Level= Peak Emission Level+ DCCF

Duty Cycle Correction Factor (DCCF)= $20\log(TX_{on}/TX_{on+off})$ presented in section 3.4

EPR= Peak Emission Level-95.2dB-2.14dBi

6.5. Test Results

PASSED.


Test Date	2015/11/26	Temp./Hum.	22°C/48%
Test Voltage	DC 5V (From Power Bar)		

6.5.1. Emissions within Restricted Frequency Bands

6.5.1.1. Frequency Below 1 GHz


Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

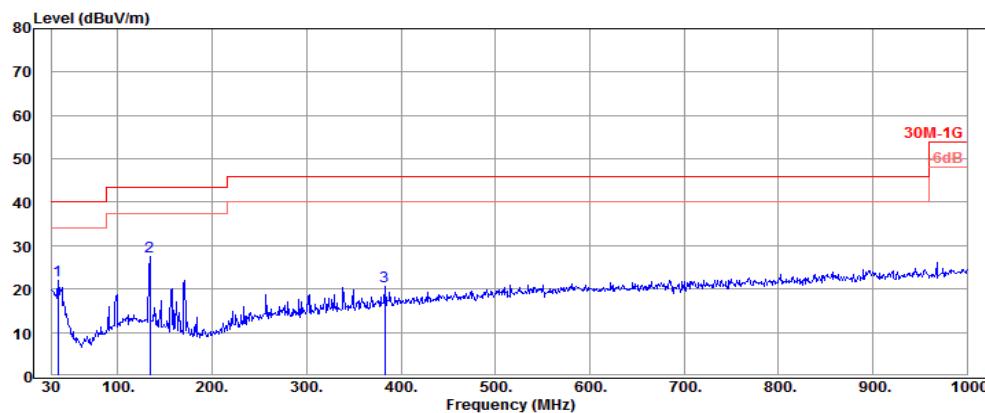


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.79	16.70	0.51	4.83	22.04	40.00	17.96	Peak
133.79	12.19	1.00	14.35	27.54	43.50	15.96	Peak
383.08	15.52	1.80	3.33	20.65	46.00	25.35	Peak

Antenna at Vertical Polarization

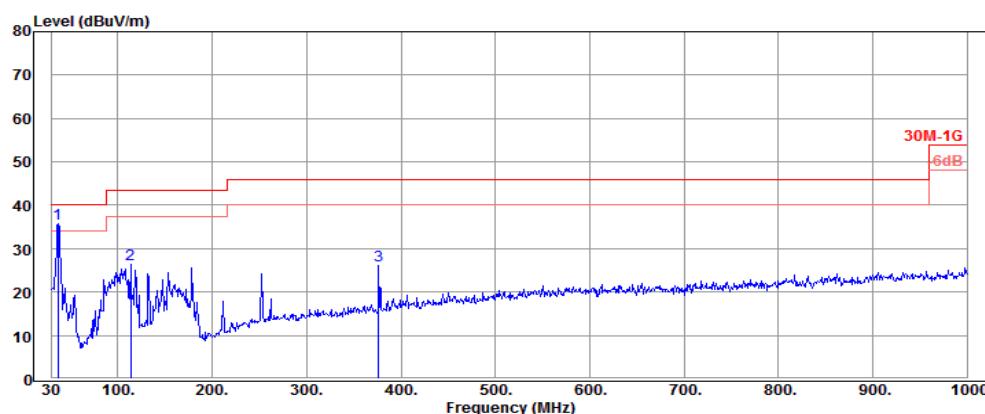


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dBμV)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector
36.79	16.70	0.51	18.47	35.68	40.00	4.32	Peak
113.42	12.19	0.91	13.38	26.48	43.50	17.02	Peak
376.29	15.39	1.78	8.81	25.98	46.00	20.02	Peak

Mode	BLE	Frequency	TX 2440MHz
------	-----	-----------	------------

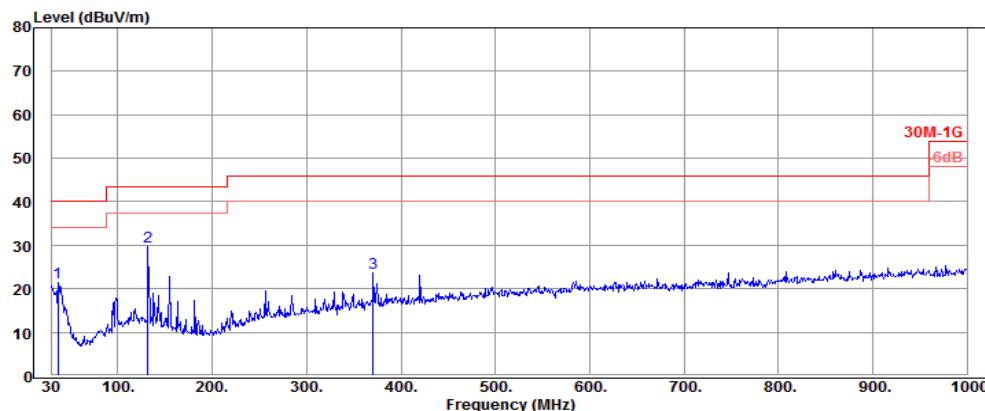Antenna at Horizontal Polarization


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
36.79	16.70	0.51	4.28	21.49	40.00	18.51	Peak
131.85	12.22	0.99	16.43	29.64	43.50	13.86	Peak
370.47	15.29	1.76	6.67	23.72	46.00	22.28	Peak

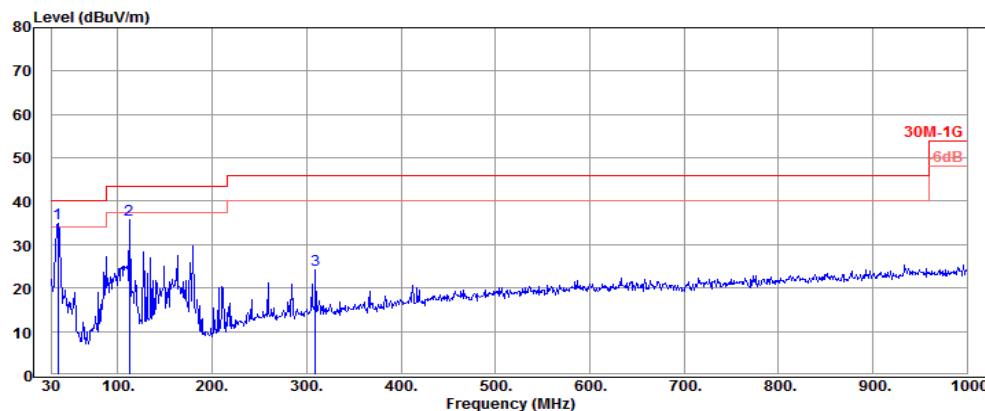Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
36.79	16.70	0.51	17.69	34.90	40.00	5.10	Peak
112.45	12.15	0.91	22.64	35.70	43.50	7.80	Peak
309.36	13.96	1.59	8.56	24.11	46.00	21.89	Peak


Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

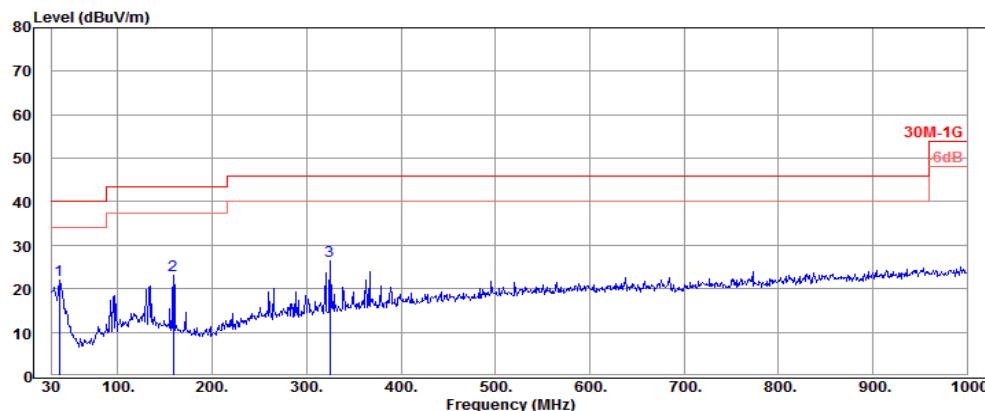

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
37.76	16.34	0.51	5.01	21.86	40.00	18.14	Peak
159.01	10.55	1.10	11.44	23.09	43.50	20.41	Peak
324.88	14.32	1.63	10.44	26.39	46.00	19.61	Peak

Antenna at Vertical Polarization

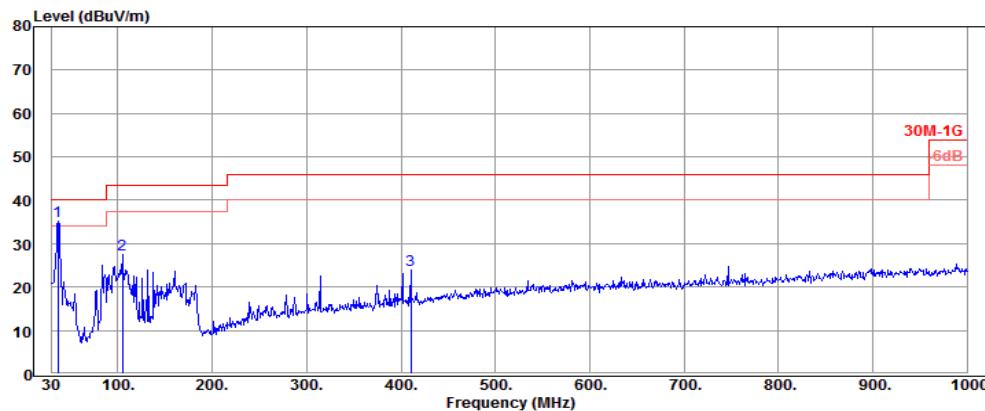


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
36.79	16.70	0.51	18.06	35.27	40.00	4.73	Peak
104.69	11.78	0.88	14.91	27.57	43.50	15.93	Peak
410.24	16.05	1.88	5.85	23.78	46.00	22.22	Peak

6.5.1.2. Frequency Above 1 GHz to 10th harmonics

Band Edge:


Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Horizontal Polarization

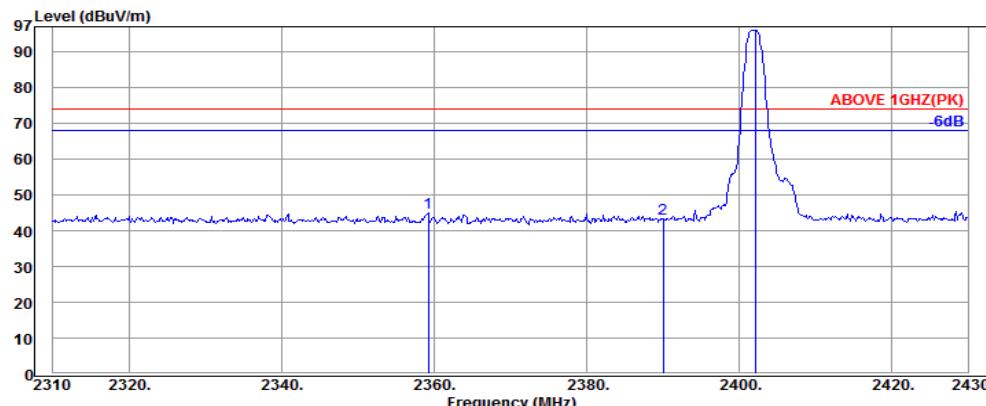

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2359.20	32.11	5.69	7.20	45.00	74.00	29.00	Peak
2390.04	32.16	5.72	5.55	43.43	74.00	30.57	Peak
2402.16	32.16	5.72	58.18	96.06	---	---	Peak


Antenna at Horizontal Polarization

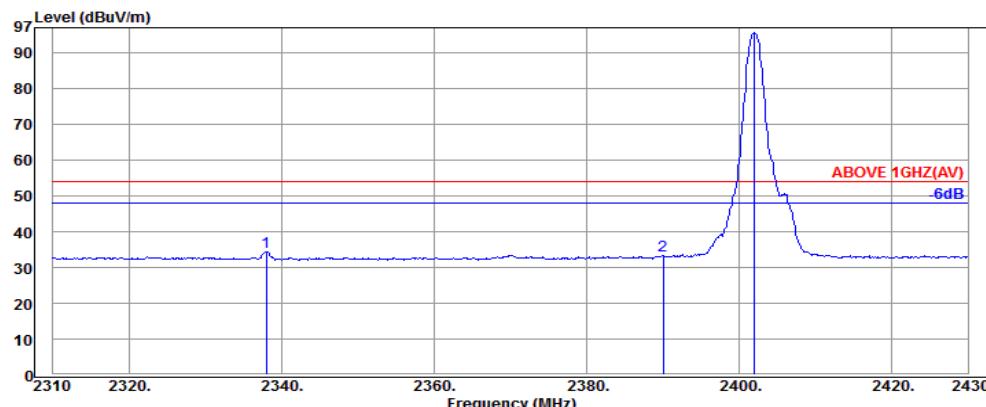

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2337.96	32.08	5.68	-3.33	34.43	54.00	19.57	Average
2390.04	32.16	5.72	-4.62	33.26	54.00	20.74	Average
2402.04	32.16	5.72	57.71	95.59	---	---	Average


Mode	BLE	Frequency	TX 2402MHz
------	-----	-----------	------------

Antenna at Vertical Polarization

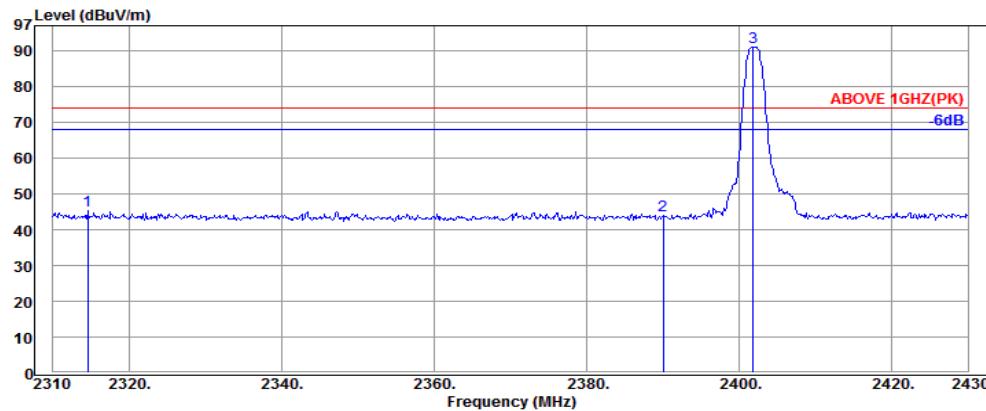


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2314.56	32.03	5.65	7.51	45.19	74.00	28.81	Peak
2390.04	32.16	5.72	6.12	44.00	74.00	30.00	Peak
2401.80	32.16	5.72	53.27	91.15	---	---	Peak

Antenna at Vertical Polarization

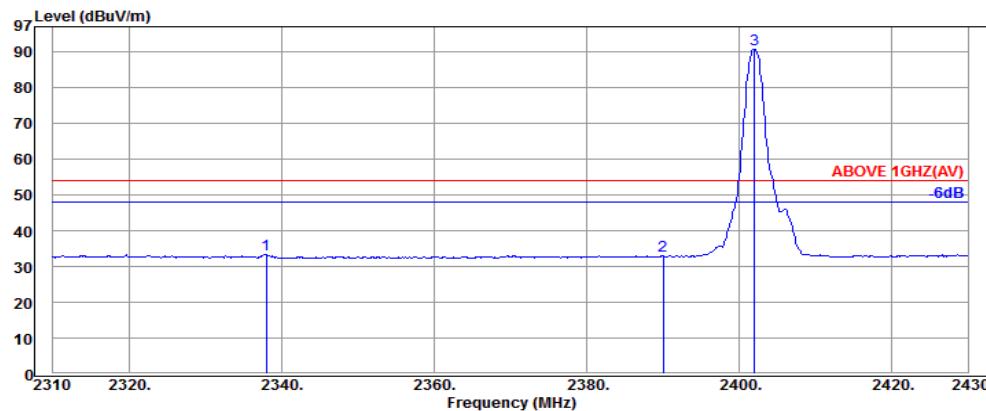


Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2337.96	32.08	5.68	-4.44	33.32	54.00	20.68	Average
2390.04	32.16	5.72	-5.00	32.88	54.00	21.12	Average
2402.04	32.16	5.72	52.86	90.74	---	---	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

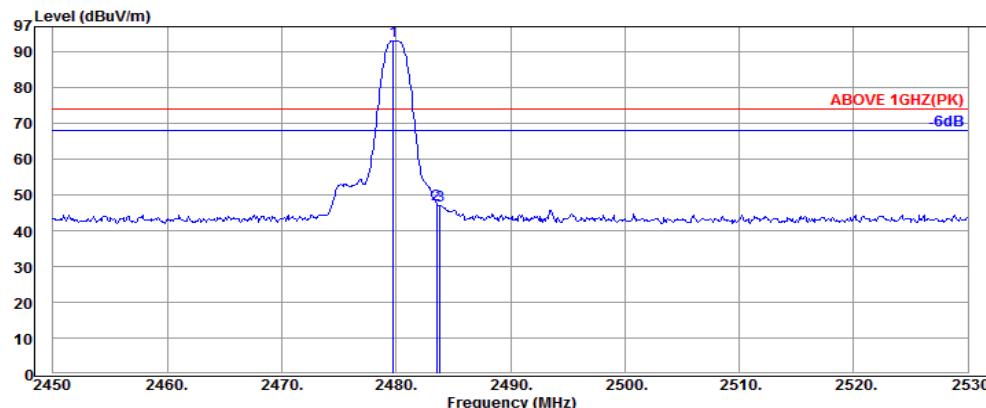
Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.76	32.28	5.82	54.99	93.09	---	---	Peak
2483.52	32.28	5.82	9.34	47.44	74.00	26.56	Peak
2483.84	32.28	5.82	8.95	47.05	74.00	26.95	Peak

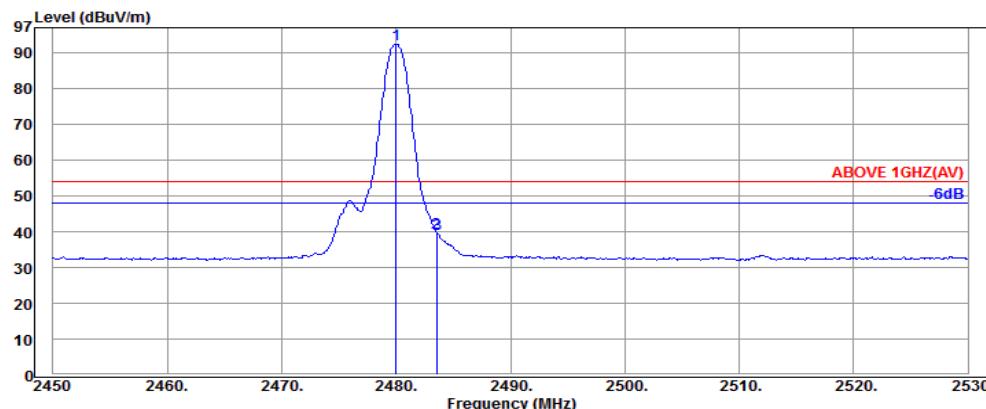
Antenna at Horizontal Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.00	32.28	5.82	54.39	92.49	---	---	Average
2483.52	32.28	5.82	1.57	39.67	54.00	14.33	Average
2483.60	32.28	5.82	1.33	39.43	54.00	14.57	Average

Mode	BLE	Frequency	TX 2480MHz
------	-----	-----------	------------

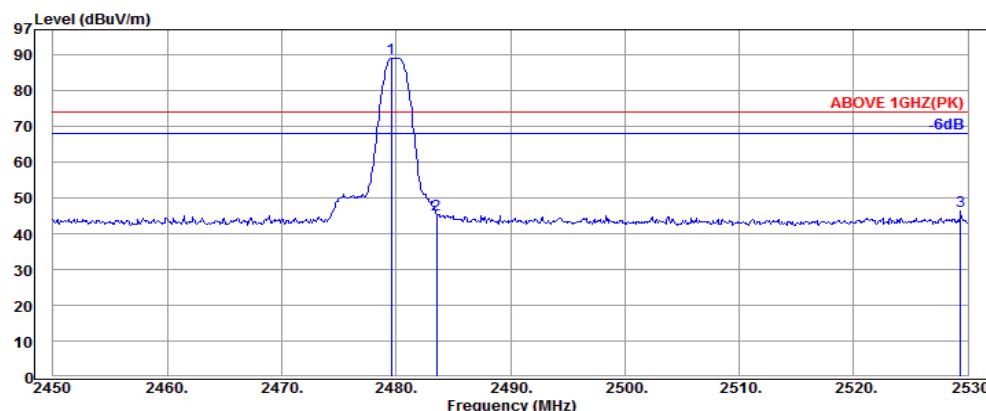Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2479.60	32.28	5.82	51.02	89.12	---	---	Peak
2483.52	32.28	5.82	7.29	45.39	74.00	28.61	Peak
2529.36	32.34	5.89	8.02	46.25	74.00	27.75	Peak

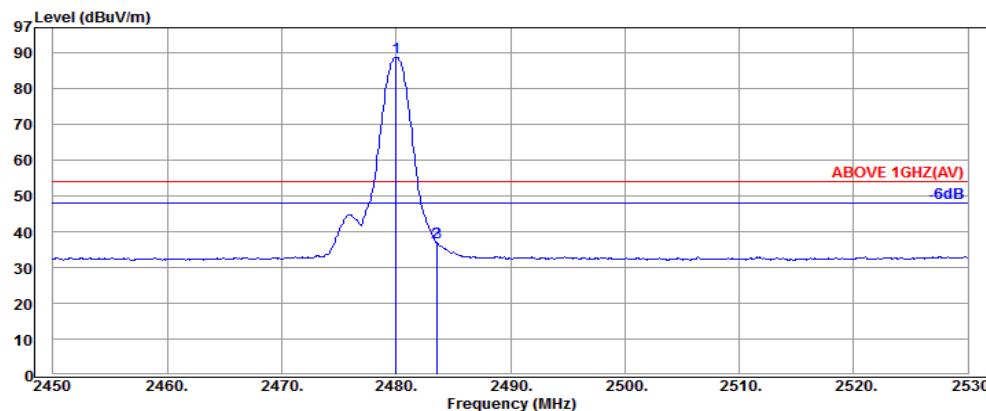Antenna at Vertical Polarization

Emission Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Meter Reading (dB μ V)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector
2480.00	32.28	5.82	50.57	88.67	---	---	Average
2483.52	32.28	5.82	-1.17	36.93	54.00	17.07	Average
2483.60	32.28	5.82	-1.25	36.85	54.00	17.15	Average

6.5.2. Emissions outside the frequency band:


The emissions (up to 25GHz) not reported for there is no emission be found.

6.5.3. Emissions in Non-restricted Frequency Bands

Pursuant to KDB 558074 D01 v03r03 that emission levels below the 15.209/RSS-Gen Section 8.9 table 4 general radiated emissions limits is not required.

7. 6dB BANDWIDTH MEASUREMENT

7.1. Block Diagram of Test Setup

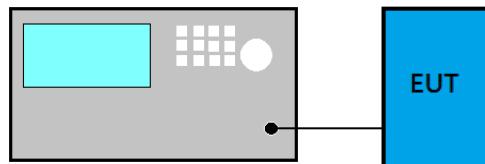

7.2. Specification Limits

The minimum 6dB bandwidth shall be at least 500kHz.

7.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

■ Option 2

- (1) Set RBW = 100 kHz.
- (2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- (3) Detector = Peak.
- (4) Trace mode = max hold.
- (5) Sweep = auto couple.
- (6) Allow the trace to stabilize.
- (7) Setting channel bandwidth function x dB to -6 3dB to record the final bandwidth.


7.4. Test Results

Test Date	2015. 11. 19	Temp./Hum.	22°C/48%
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

7.4.1. 6dB Bandwidth Result


Mode	Centre Frequency (MHz)	6 dB Bandwidth (MHz)
BLE	2402	0.5570
	2440	0.5517
	2480	0.5480

7.4.2. Measurement Plots

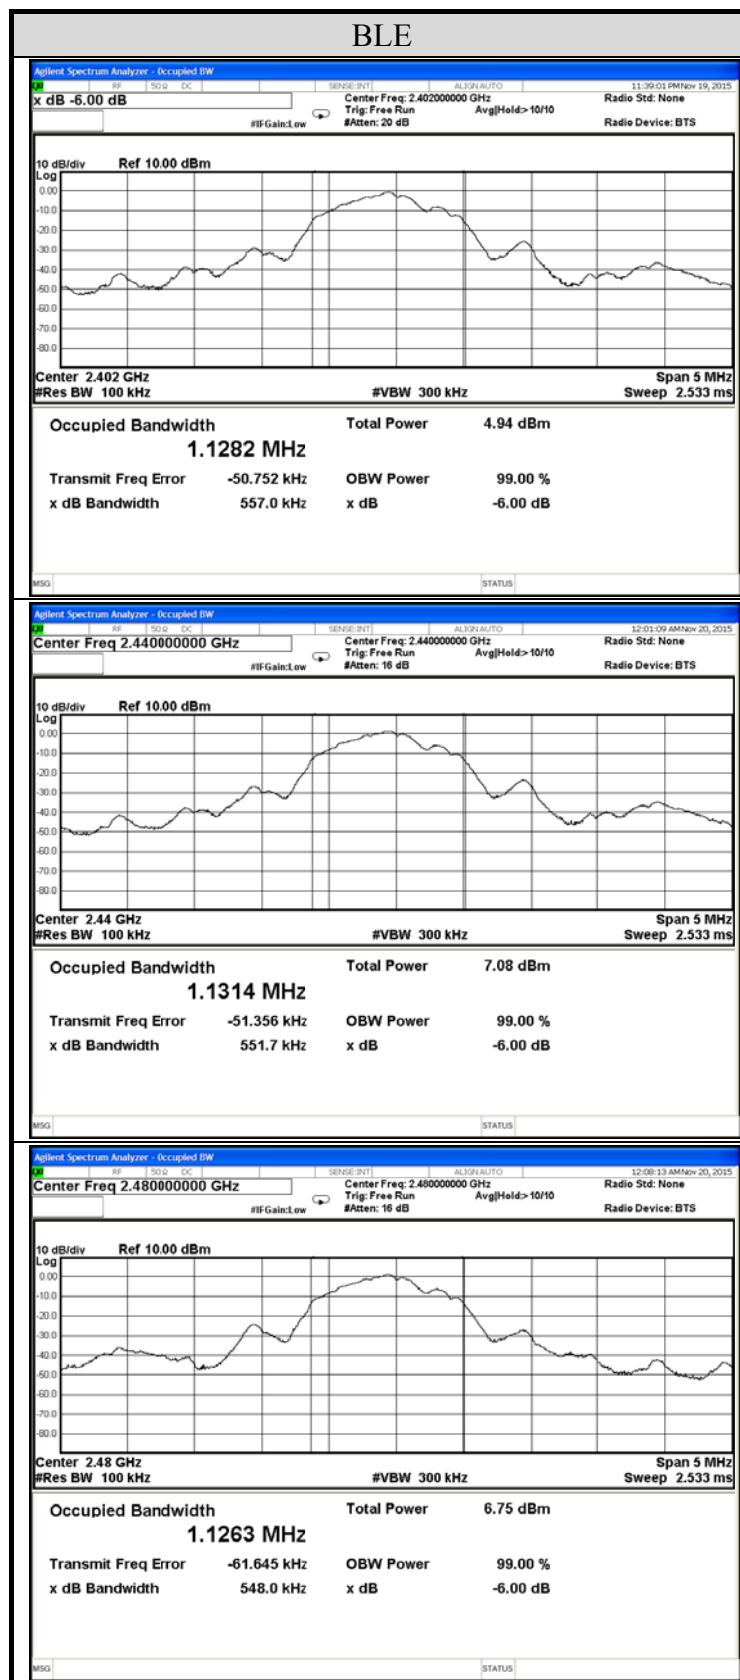

8. MAXIMUM PEAK OUTPUT POWER MEASUREMENT

8.1. Block Diagram of Test Setup

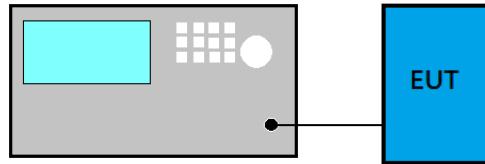

8.2. Specification Limits

The Limits of maximum Peak Output Power for digital modulation in 2400-2483.5MHz is : 1Watt. (30dBm)

8.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

PKPM1 Peak power meter method:

EUT is connected to power sensor and record the maximum output power.

Method AVGPM (Measurement using an RF average power meter):

EUT is connected to power sensor and record the maximum average output power and duty cycle factor is added when duty cycle presented in section 3.5.1 is < 98%.

RBW≥DTS bandwidth

- (1) Set span to at least 3 times the OBW
- (2) Set $RBW \geq OBW$
- (3) Set the video bandwidth (VBW) $\geq 3 \times RBW$.
- (4) Detector = Peak
- (5) Trace mode = max hold
- (6) Sweep = auto couple.
- (7) To find the peak amplitude level.

8.4. Test Results


Test Date	2015. 11. 19	Temp./Hum.	22°C/48%
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

8.4.1. Peak Output Power

Mode	Centre Frequency (MHz)	Peak Output Power			Limit
		(dBm)	(W)	(mW)	
BLE	2402	-0.003	0.000999	0.999	< 30 dBm (1 W)
	2440	2.119	0.001629	1.629	
	2480	1.836	0.001526	1.526	


Note: The results have been included cable loss.

8.4.2. Peak Measurement Plots

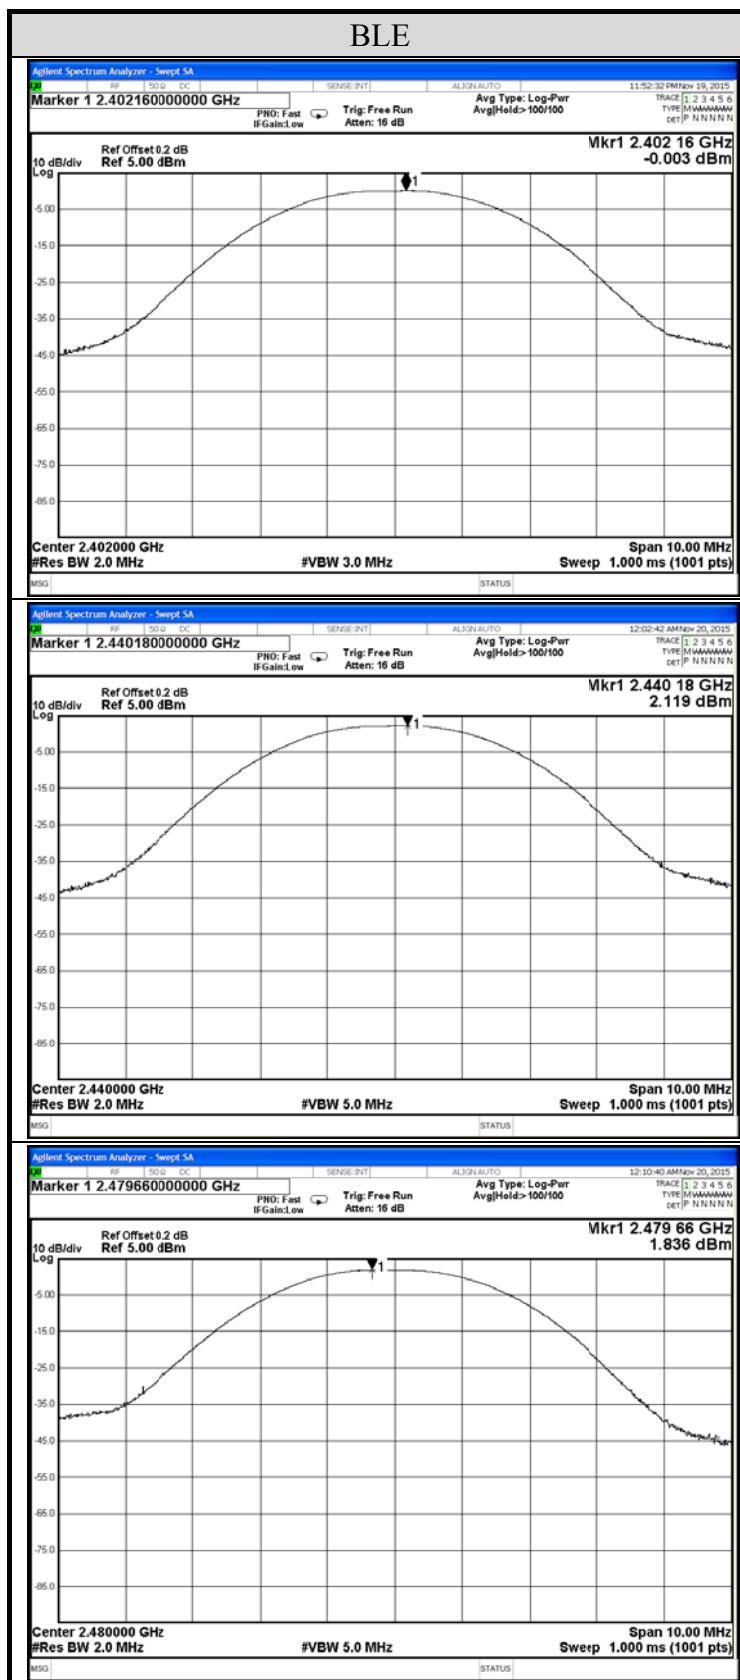

9. EMISSION LIMITATIONS MEASUREMENT

9.1. Block Diagram of Test Setup

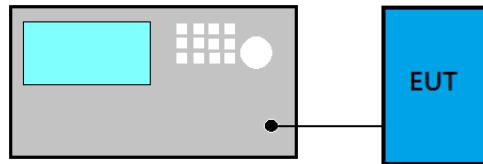

9.2. Specification Limits

In any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (See Section 15.205(c)).

9.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

■ Reference Level


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max PSD as reference level.

■ Emission Level Measurement

- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: 100 kHz.
- (4) Set the VBW $\geq 3 \times$ RBW.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize to find the max level.


9.4. Test Results

Test Date	2015. 11. 20	Temp./Hum.	22°C/48%
Mode	BLE	Frequency	TX 2402MHz
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

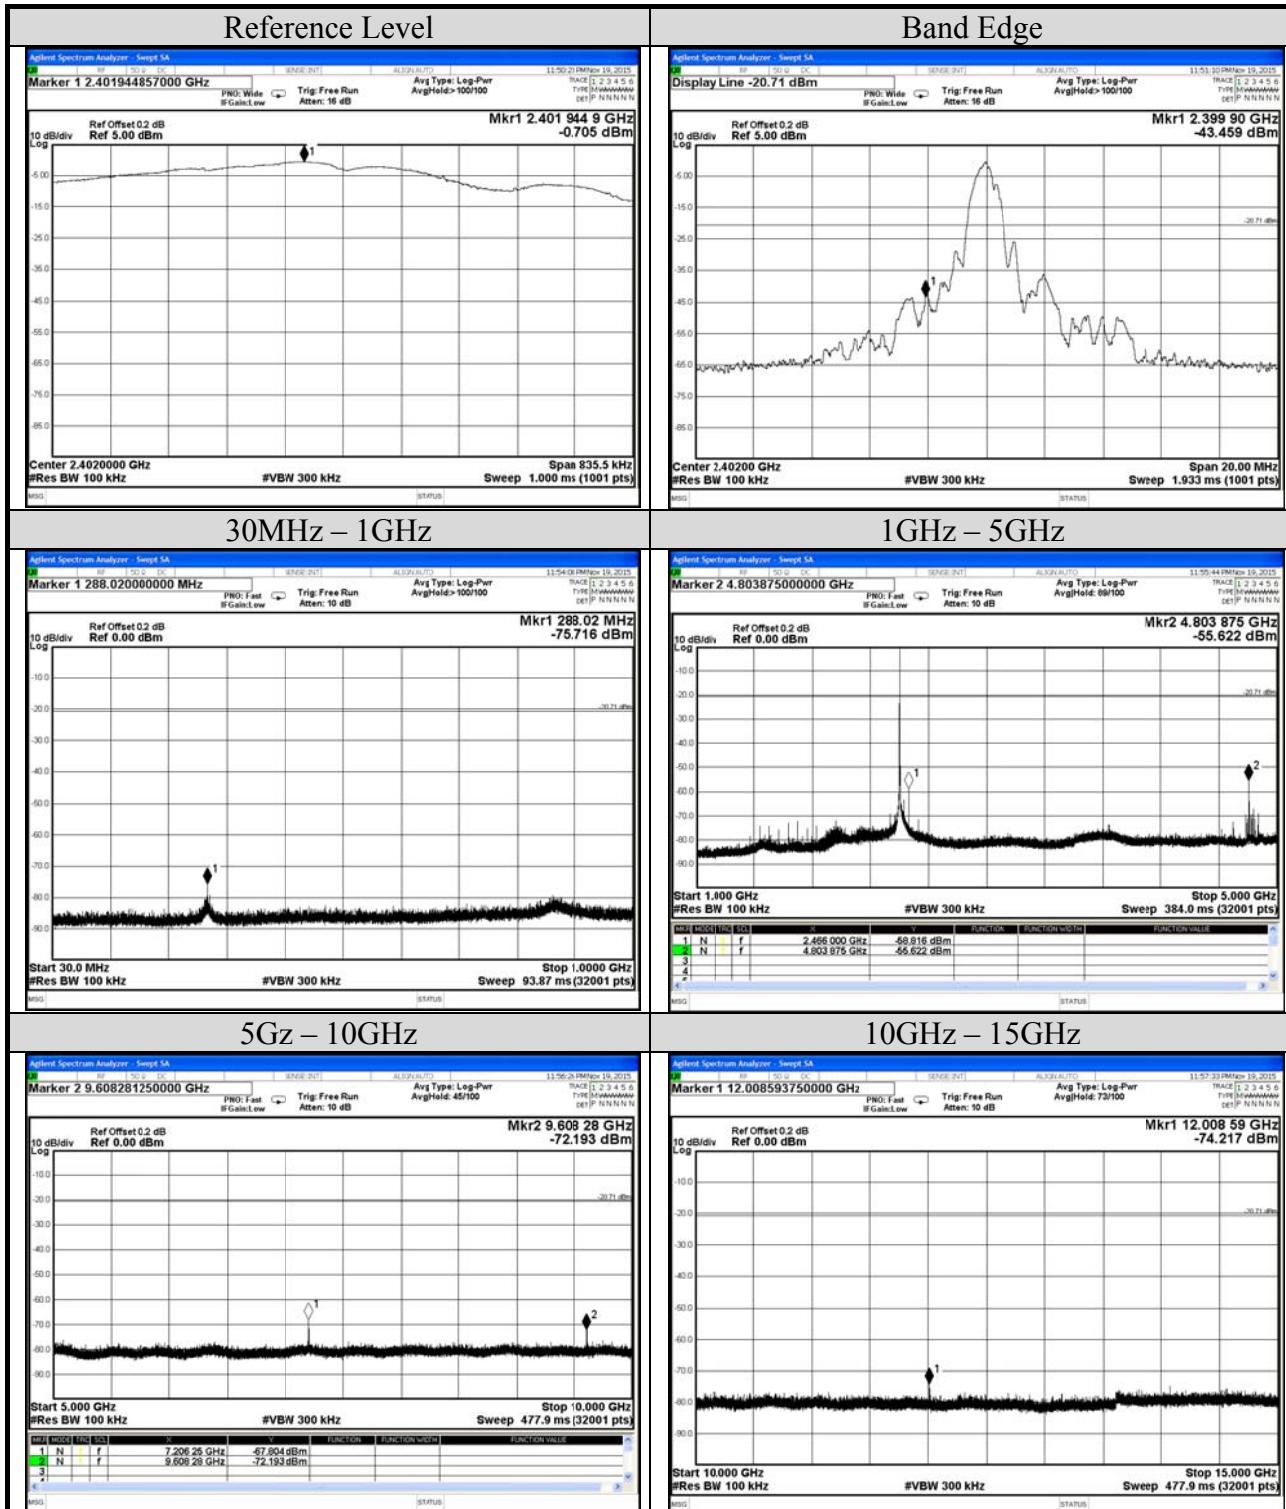


AUDIX Technology Corp.
No. 53-11, Dingfu, Linkou, Dist.,
New Taipei City244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

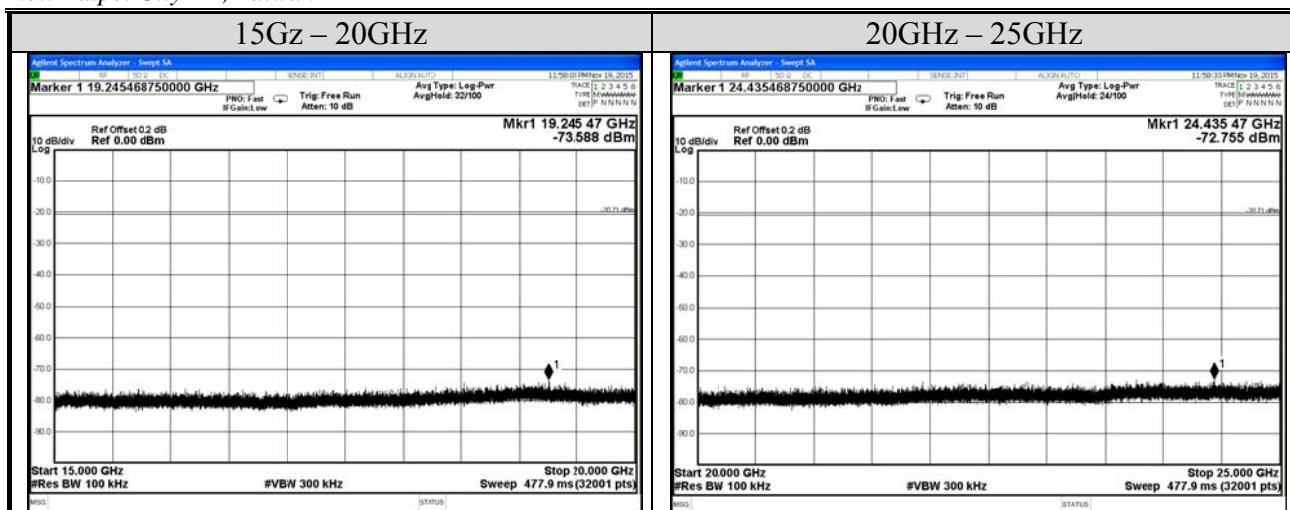


Test Date	2015. 11. 20	Temp./Hum.	22°C/48%
Mode	BLE	Frequency	TX 2440MHz
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

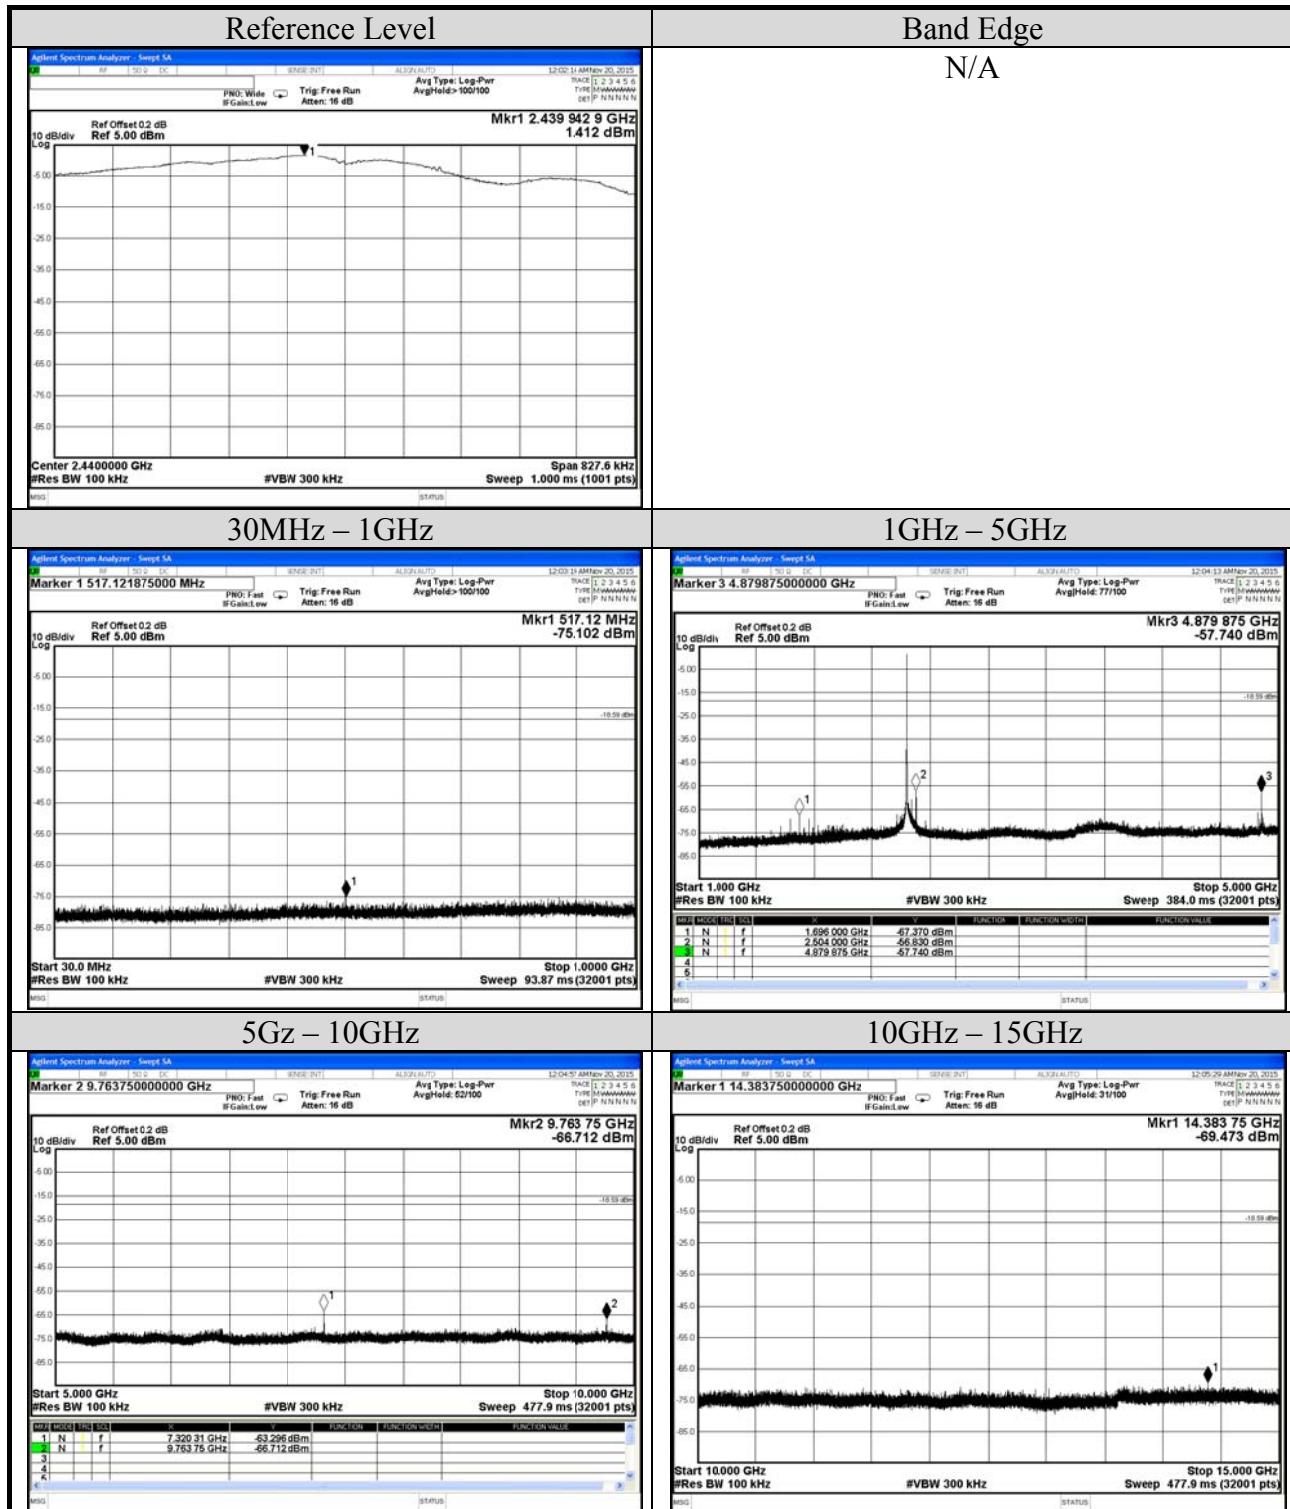


AUDIX Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

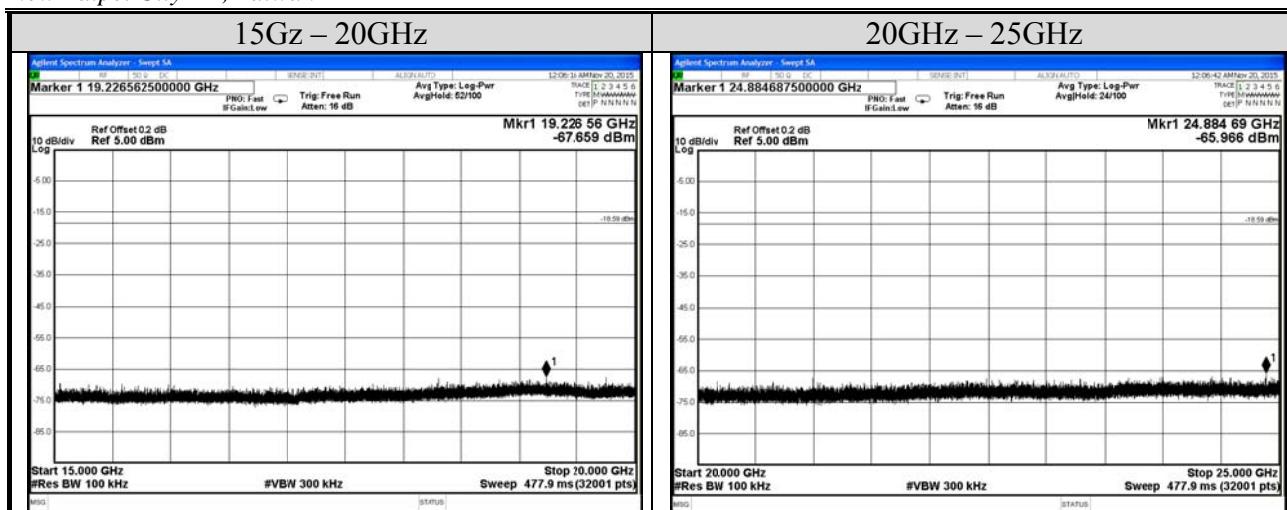


Test Date	2015. 11. 20	Temp./Hum.	22°C/48%
Mode	BLE	Frequency	TX 2480MHz
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

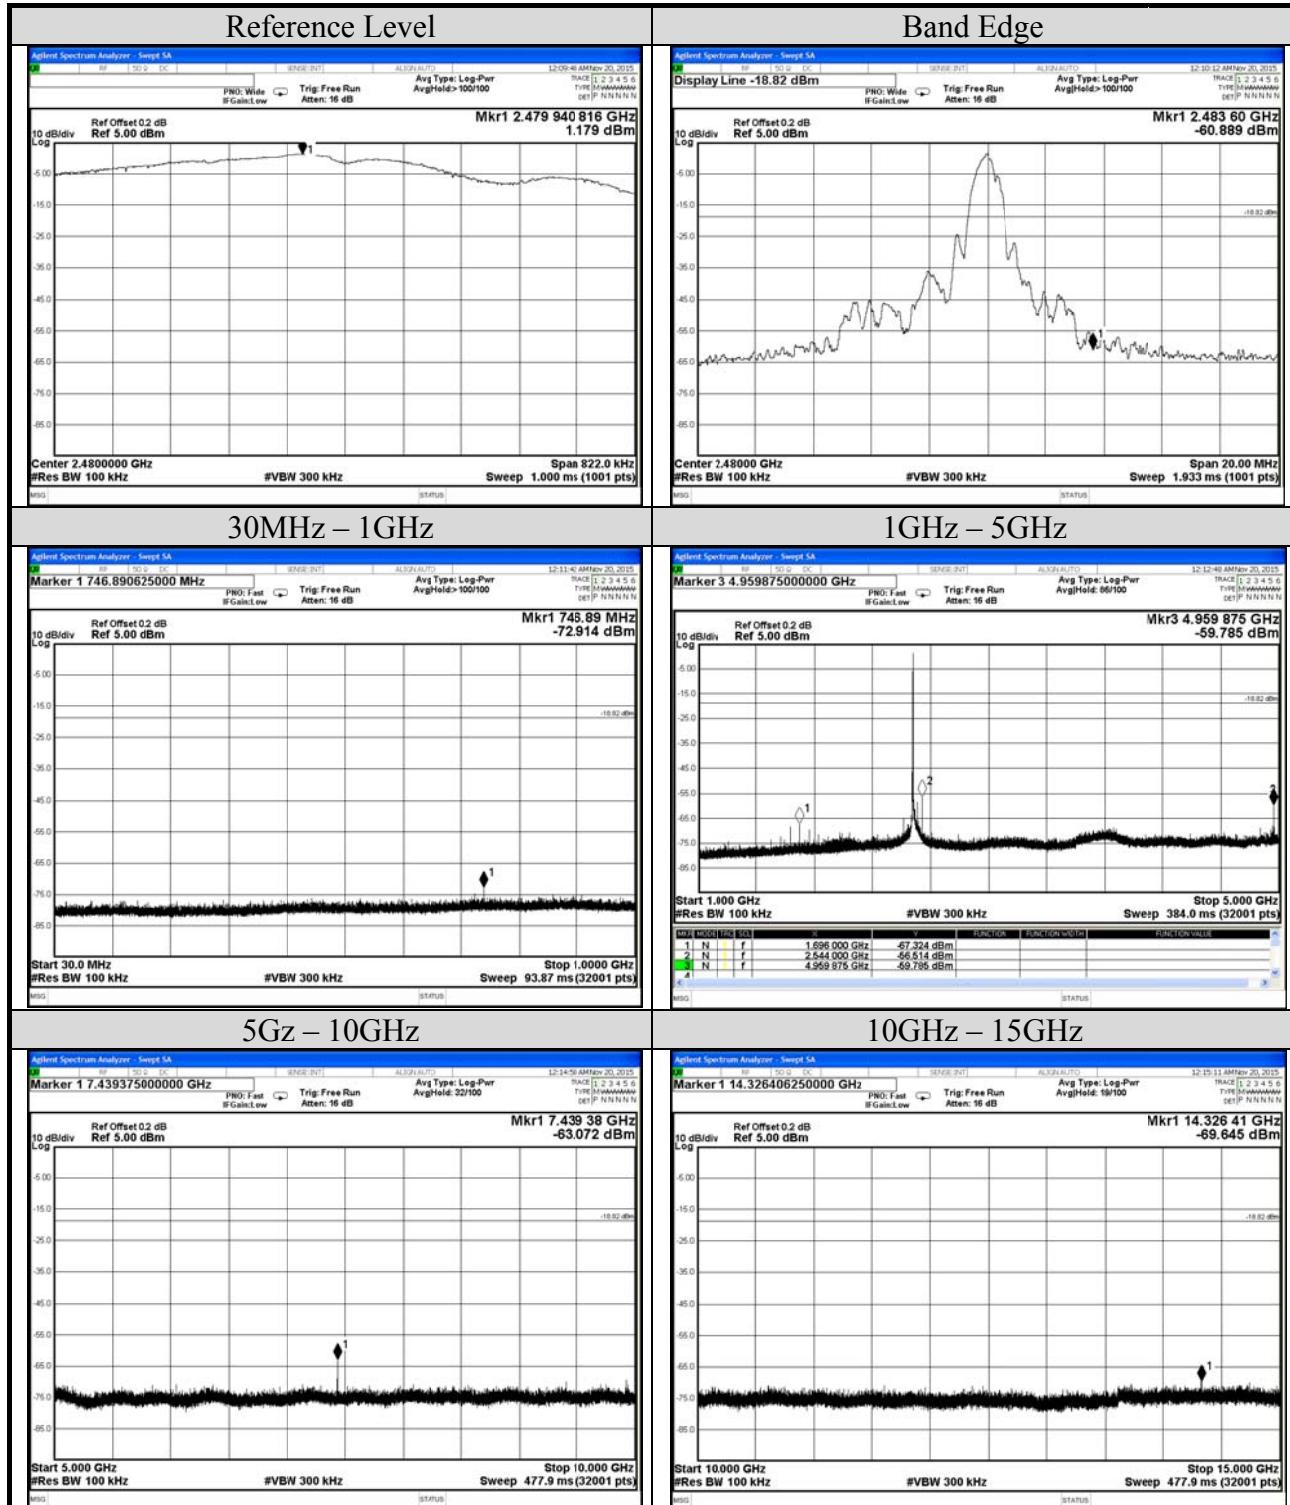


AUDIX Technology Corp.
 No. 53-11, Dingfu, Linkou, Dist.,
 New Taipei City 244, Taiwan

Tel: +886 2 26099301
Fax: +886 2 26099303

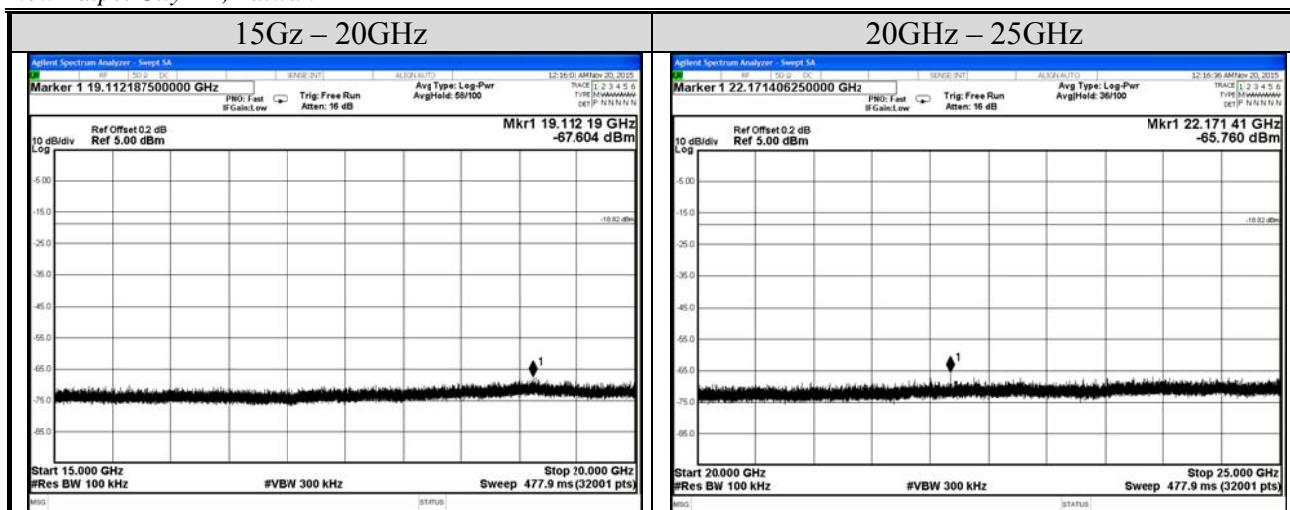

10. POWER SPECTRAL DENSITY

10.1. Block Diagram of Test Setup

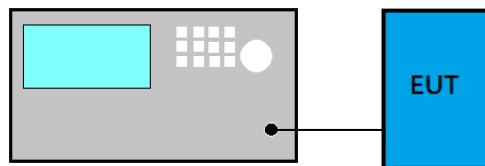

10.2. Specification Limits

The peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3kHz band.

10.3. Test Procedure

Following measurement procedure is reference to KDB 558074 D01 DTS Meas Guidance v03r03:

Method PKPSD (peak PSD)


- (1) Set analyzer center frequency to DTS channel center frequency.
- (2) Set the span to 1.5 times the DTS bandwidth.
- (3) Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- (4) Set the VBW $\geq 3 \times \text{RBW}$.
- (5) Detector = peak.
- (6) Sweep time = auto couple.
- (7) Trace mode = max hold.
- (8) Allow trace to fully stabilize.
- (9) Use the peak marker function to determine the maximum amplitude level.
- (10) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

Method AVGPSD-2

- (1) Using peak PSD procedure step 1 to step 4.
- (2) Detector= RMS detector
- (3) Sweep time = auto couple
- (4) Trace mode = trace averaging over a minimum of 100 traces
- (5) Use the peak marker function to determine the maximum amplitude level.
- (6) Duty cycle factor is added when duty cycle presented in section 3.5.1. $< 98\%$.
- (7) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

10.4. Test Results

Test Date	2015. 11. 20	Temp./Hum.	22°C/48%
Cable Loss	0.2dB	Test Voltage	DC 5V (From Power Bar)

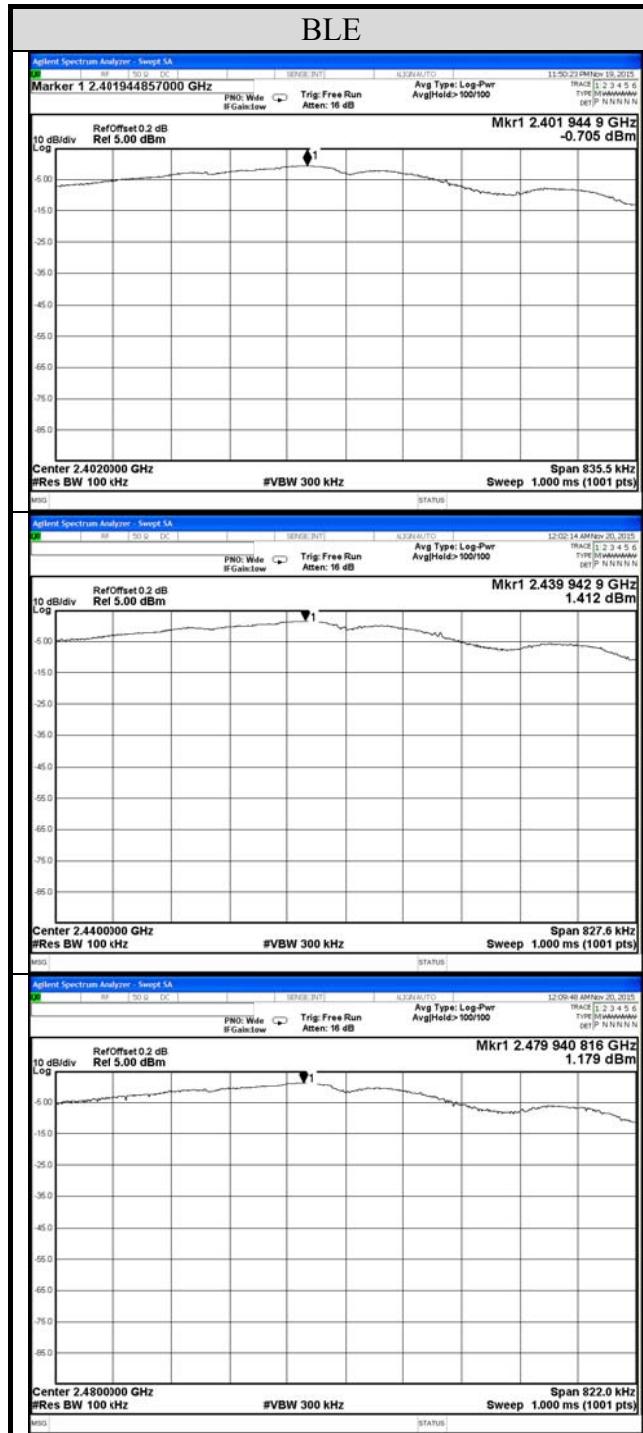

11. DEVIATION TO TEST SPECIFICATIONS

【NONE】