

FCC 47 CFR PART 15 SUBPART C CERTIFICATION TEST REPORT

For

Electric Jukebox

Model No.: EJ80, EJ81

FCC ID: 2AGKTEJ81

Trademark: Electric Jukebox

REPORT NO.: ES151110025E4

ISSUE DATE: December 14, 2015

Prepared for

MAGIC MEDIA WORKS LIMITED

One West Smithfield London EC1A 9JU UK.

Prepared by

EMTEK (SHENZHEN) CO., LTD

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

TEL: 86-755-26954280 FAX: 86-755-26954282



TABLE OF CONTENTS

1	TES	ST RESULT CERTIFICATION	3
2	EUT	T TECHNICAL DESCRIPTION	4
3	SUN	MMARY OF TEST RESULT	6
4	TES	ST METHODOLOGY	7
	4.1 4.2 4.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	7
5	FAC	CILITIES AND ACCREDITATIONS	9
	5.1 5.2	FACILITIESLABORATORY ACCREDITATIONS AND LISTINGS	9
6	TES	ST SYSTEM UNCERTAINTY	10
7	SET	TUP OF EQUIPMENT UNDER TEST	11
	7.1 7.2 7.3 7.4 7.5	RADIO FREQUENCY TEST SETUP 1 RADIO FREQUENCY TEST SETUP 2 CONDUCTED EMISSION TEST SETUP BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM SUPPORT EQUIPMENT	
8	TES	ST REQUIREMENTS	15
	8.1 8.2 8.3 8.4	BANDWIDTH TESTRADIATED SPURIOUS EMISSIONCONDUCTED EMISSIONS TESTANTENNA APPLICATION	



1 TEST RESULT CERTIFICATION

Applicant:	MAGIC MEDIA WORKS LIMITED One West Smithfield London EC1A 9JU UK.
Manufacturer:	LITE STAR ELECTRONICS TECHNOLOGY CO., LTD. Xingchen Science & Technology Park, Lianbi Road, Wulian Industry Area, Fenggang Town, Dongguan, China.
Product Description:	Electric Jukebox
Model Number:	EJ80, EJ81
File Number:	ES151110025E4
Date of Test:	November 11, 2015 to November 30, 2015

Measurement Procedure Used:

APPLICABLE STANDARDS		
STANDARD	TEST RESULT	
FCC 47 CFR Part 2, Subpart J:2014 FCC 47 CFR Part 15, Subpart C:2014	PASS	

The above equipment was tested by EMTEK (SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 2 and Part 15.249

The test results of this report relate only to the tested sample identified in this report.

Date of Test :	November 11, 2015 to November 30, 2015
Prepared by :	Jarle Li
	Jack Li/Editor
Reviewer :	Toe Xia
	Joe Xia/Supervisor
Approve & Authorized Signer:	
	Lisa Wang/Manager

TRF No.: FCC 15.249/A Page 3 of 38 Report No.: ES1511110025E4 Ver.1.0



2 EUT TECHNICAL DESCRIPTION

Device Type:	Fixed Device		
Exposure Category:	Uncontrolled Environment/General Population		
Product Name:	Electric Jukebox (Note: The device consists of a TV stick and controller.)		
Model Number:	EJ80, EJ81 (Note:These models are identical in circuitry and electrical, mechanical and physical construction; the only differences are the silk-screen, color and model no. for trading purpose. We prepare EJ80 for test. and the worst result recorded in the report.)		
Controller information as	s below:		
	☑DC supply: DC 3.7V/550mAh from Li-ion Battery or DC 5V from USB Port.		
Power supply:	Adapter supply: Model: TKAC-201-DC Input: AC 100-240V, 50/60Hz, 0.6A Max Output: DC 5V 1.5A Output: USB 5V 0.5A		
Operating Mode(s) & Operating Frequency Range(s):	2.4G ISM Band: 2404MHz-2480MHz		
Test Modulation:	GFSK;		
Number of Channels:	77 Channels;		
Type of Antenna:	PCB Antenna		
Antenna Gain:	1dBi		
Temperature Extreme Range:	0°C ~ +40°C		

Note: for more details, please refer to the User's manual of the EUT.



Modified Information

Version.	Summary	Date of Rev.	Report No.
Ver.1.0	Original Report	2015-11-30	ES151110025E4



3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.207	Conducted Emission	PASS	
15.209	Radiated Emission	PASS	
15.249	Radiated Spurious Emission		
15.249	Band edge test	PASS	
15.249	20dB Bandwidth	PASS	

NOTE1: N/A (Not Applicable)

NOTE2: The report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: 2AGKTEJ81 filing to comply with Section 15.249 of the FCC Part 15, Subpart C Rules.

The system is compliance with Subpart B is authorized under a DOC procedure

TRF No.: FCC 15.249/A Page 6 of 38 Report No.: ES1511110025E4 Ver.1.0



4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards: FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C

4.2 MEASUREMENT EQUIPMENT USED

4.2.1 Conducted Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Test Receiver	Rohde & Schwarz	ESCS30	828985/018	05/16/2015
L.I.S.N.	Schwarzbeck	NNLK8129	8129203	05/16/2015
50Ω Coaxial Switch	Anritsu	MP59B	M20531	N/A
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	05/16/2015
Voltage Probe	Rohde & Schwarz	TK9416	N/A	05/16/2015
I.S.N	Rohde & Schwarz	ENY22	1109.9508.02	05/16/2015

4.2.2 Radiated Emission Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
EMI Test Receiver	Rohde & Schwarz	ESU	1302.6005.26	05/16/2015
Pre-Amplifier	HP	8447D	2944A07999	05/16/2015
Bilog Antenna	Schwarzbeck	VULB9163	142	05/16/2015
Loop Antenna	Schwarzbeck	FMZB 1519	012	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170399	05/16/2015
Horn Antenna	Schwarzbeck	BBHA 9120	D143	05/16/2015
Cable	Schwarzbeck	AK9513	ACRX1	05/16/2015
Cable	Rosenberger	N/A	FP2RX2	05/16/2015
Cable	Schwarzbeck	AK9513	CRPX1	05/16/2015
Cable	Schwarzbeck	AK9513	CRRX2	05/16/2015
Pre-Amplifier	A.H.	PAM-0126	1415261	05/16/2015

4.2.3 Radio Frequency Test Equipment

EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.
Spectrum Analyzer	Agilent	E4407B	88156318	05/16/2015
EMI Test Receiver	Rohde & Schwarz	FSV30	103040	05/16/2015
Signal Analyzer	Agilent	N9010A	My53470879	05/16/2015
Power meter	Anritsu	ML2495A	0824006	05/16/2015
Power sensor	Anritsu	MA2411B	0738172	05/16/2015

Remark: Each piece of equipment is scheduled for calibration once a year.

TRF No.: FCC 15.249/A Page 7 of 38 Report No.: ES1511110025E4 Ver.1.0



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those modulation GFSK were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2404	35	2436		
2	2405	36	2438	75	2478
3	2406	37	2440	76	2479
				77	2480

TRF No.: FCC 15.249/A Page 8 of 38 Report No.: ES151110025E4 Ver.1.0



5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Bldg 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

5.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

TRF No.: FCC 15.249/A

EMC Lab. : Accredited by CNAS, 2013.10.29

The certificate is valid until 2016.10.28

The Laboratory has been assessed and proved to be in compliance with

CNAS-CL01:2006 (identical to ISO/IEC 17025:2005) The Certificate Registration Number is L2291.

Accredited by TUV Rheinland Shenzhen 2015.08.04

The Laboratory has been assessed according to the requirements

ISO/IEC 17025.

Accredited by FCC, April 17, 2013

The Certificate Registration Number is 709623.

Accredited by FCC, July 24, 2013

The Certificate Registration Number is 406365.

Accredited by Industry Canada, November 24, 2015 The Certificate Registration Number is 4480A-2.

Name of Firm : EMTEK (SHENZHEN) CO., LTD.
Site Location : Bldg 69. Majialong Industry Zone.

Bldg 69, Majialong Industry Zone, Nanshan District, Shenzhen, Guangdong, China

Page 9 of 38

Report No.: ES151110025E4 Ver.1.0



6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

,	The second secon
Parameter	Uncertainty
Radio Frequency	±1x10^-5
Maximum Peak Output Power Test	±1.0dB
Conducted Emissions Test	±2.0dB
Radiated Emission Test	±2.0dB
Power Density	±2.0dB
Occupied Bandwidth Test	±1.0dB
Band Edge Test	±3dB
All emission, radiated	±3dB
Antenna Port Emission	±3dB
Temperature	±0.5℃
Humidity	±3%


Measurement Uncertainty for a level of Confidence of 95%



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The WLAN component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m.The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

Above 1GHz:

(Note: the FCC's permission to use 1.5m as an alternative per TCBC Conf call of Dec. 2, 2014.) The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

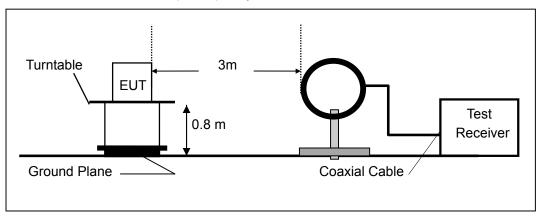


TRF No.: FCC 15.249/A Page 11 of 38 Report No.: ES151110025E4 Ver.1.0



(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

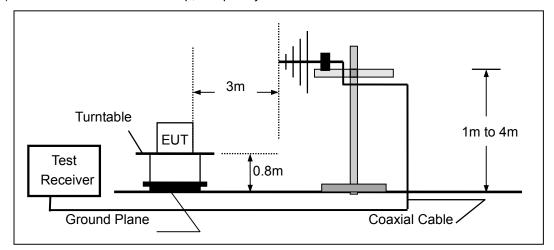

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

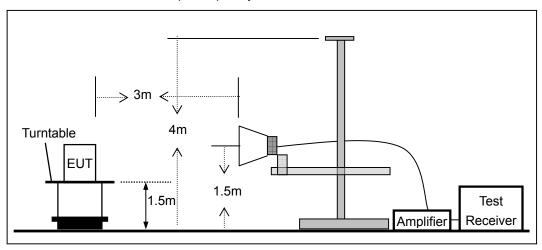




7.3 CONDUCTED EMISSION TEST SETUP

The mains cable of the EUT (Electric Jukebox) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.8 m.


According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

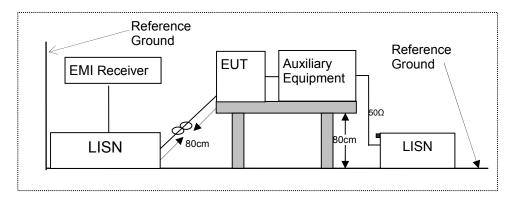

TRF No.: FCC 15.249/A Page 13 of 38 Report No.: ES151110025E4 Ver.1.0



7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

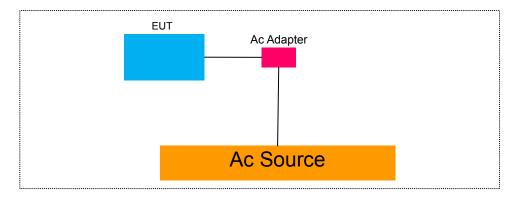

7.5 SUPPORT EQUIPMENT

Item	Equipment	Mfr/Brand	Model/Type No.	FCC ID	Note
1	Electric Jukebox	Electric Jukebox	EJ80	2AGKTEJ81	EUT

Notes:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.



8 TEST REQUIREMENTS

8.1 BANDWIDTH TEST

8.1.1 Applicable Standard

According to FCC Part 15.249

8.1.2 Conformance Limit

N/A

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1

8.1.4 Test Procedure

The EUT was operating in controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 100 kHz.

Set the video bandwidth (VBW) =300 kHz.

Set Span=2 times OBW

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

8.1.5 Test Results


Temperature : 28°C Test Date : November 23, 2015 Humidity : 65 % Test By: YXL

Operation Mode	Channel Number	Channel Frequency (MHz)	Measurement Bandwidth (KHz)	Limit (kHz)	Verdict
	1	2404	285.1	N/A	PASS
GFSK	37	2440	292.7	N/A	PASS
	77	2480	297.9	N/A	PASS



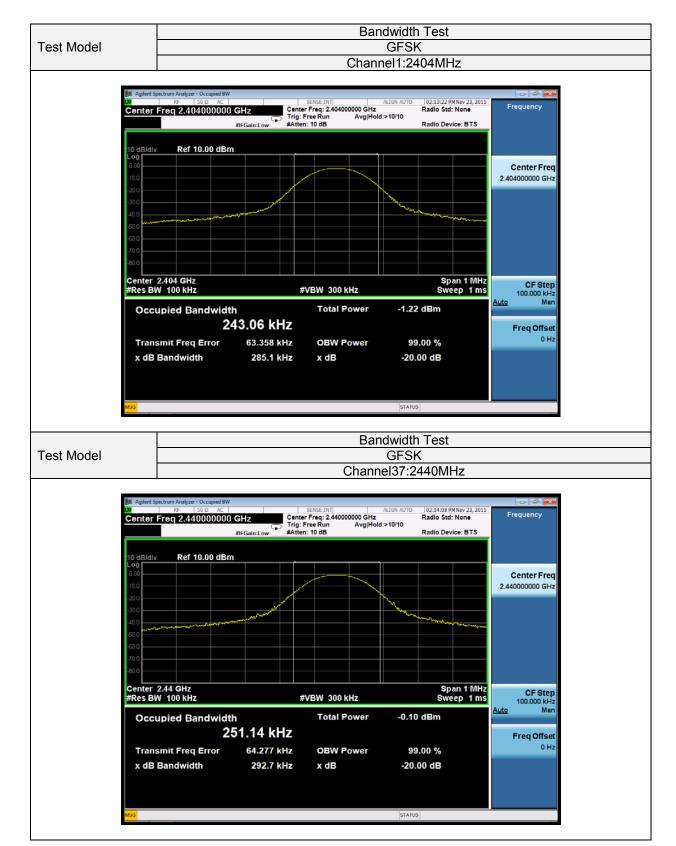



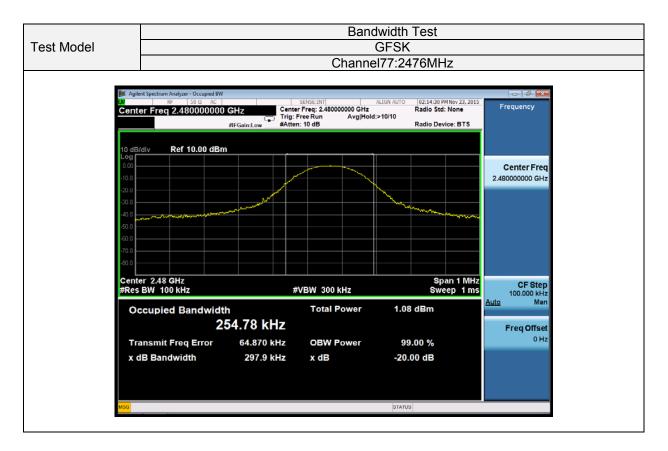



8.2 RADIATED SPURIOUS EMISSION

8.2.1 Applicable Standard

According to FCC Part 15.249 and 15.209

8.2.2 Conformance Limit

According to FCC Part 15.249: radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41	_	_	

According to FCC Part15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table

Restricted Restricted Restricted

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBµV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	2400/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Remark :1. Emission level in dBuV/m=20 log (uV/m)

- 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
- 3. Distance extrapolation factor =40log(Specific distance/ test distance)(dB); Limit line=Specific limits(dBuV) + distance extrapolation factor.

for the frequency ranges below 30 MHz, a narrower RBW is used for these ranges but the measured value should add a RBW correction factor (RBWCF) where RBWCF [dB] =10*lg(100 [kHz]/narrower RBW [kHz])., the narrower RBW is 1 kHz and RBWCF is 20 dB for the frequency 9 kHz to 150 kHz, and the narrower RBW is 10 kHz and RBWCF is 10 dB for the frequency 150 kHz to 30 MHz.

TRF No.: FCC 15.249/A Page 18 of 38 Report No.: ES151110025E4 Ver.1.0



Field strength of fundamental and Field strength of harmonics Limit:

	<u> </u>	
Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50(94 dBV/m)	500(54 dBV/m)
2400-2483.5 MHz	50(94 dBV/m)	500(54 dBV/m)
5725-5875 MHz	50(94 dBV/m)	500(54 dBV/m)
24.0-24.25 GHz	250(108 dBV/m)	2500(68 dBV/m)

8.2.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2

8.2.4 **Test Procedure**

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

For Above 1GHz:

The EUT was placed on a turn table which is 1.5m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

For Below 1GHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

For Below 30MHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured RBW = 9kHz

 $VBW \ge RBW$

Sweep = auto

Detector function = peak

Trace = max hold

For Below 150KHz:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 200Hz

 $VBW \geq RBW$

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT,

TRF No.: FCC 15.249/A Page 19 of 38 Report No.: ES151110025E4 Ver.1.0



measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data. Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a "duty cycle correction factor", derived from 20log(dwell time/100 ms), in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.

8.2.5 Test Results

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Temperature: 24℃ Test Date: November 23, 2015

Humidity: 53 % Test By: YXL

Test mode: TX Mode

Freq.	Ant.Pol.	Emission Le	evel(dBuV/m)	Limit 3r	n(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	PK AV		AV	

Note: the amplitude of spurious emission that is attenuated by more than 20dB below the permissible limit has no need to be reported.

Distance extrapolation factor =40log(Specific distance/ test distance)(dB);


Limit line=Specific limits(dBuV) + distance extrapolation factor

TRF No.: FCC 15.249/A Page 20 of 38 Report No.: ES151110025E4 Ver.1.0



53 %

Spurious Emission below 1GHz (30MHz to 1GHz)

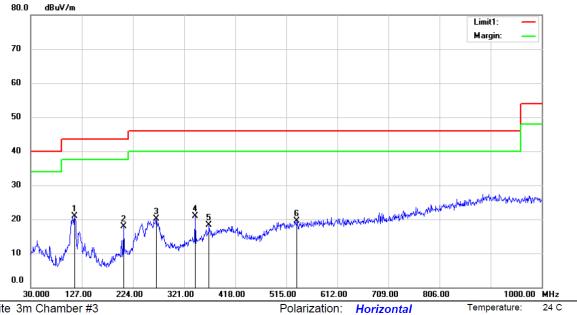

Site 3m Chamber #3

Limit: (RE)FCC PART 15 CLASS B

Mode: GFSK TX Channel Low

Note:


No.	Mł	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1	*	113.4200	35.94	-14.94	21.00	43.50	-22.50	QP			
2		206.5400	34.25	-16.38	17.87	43.50	-25.63	QP			
3		268.6200	32.71	-12.70	20.01	46.00	-25.99	QP			
4		342.3400	33.11	-12.26	20.85	46.00	-25.15	QP			
5		368.5300	28.70	-10.42	18.28	46.00	-27.72	QP			
6		535.3700	27.03	-7.51	19.52	46.00	-26.48	QP			

Power: AC 120V/60Hz

^{*:}Maximum data !:over margin Operator: KK x:Over limit



53 %

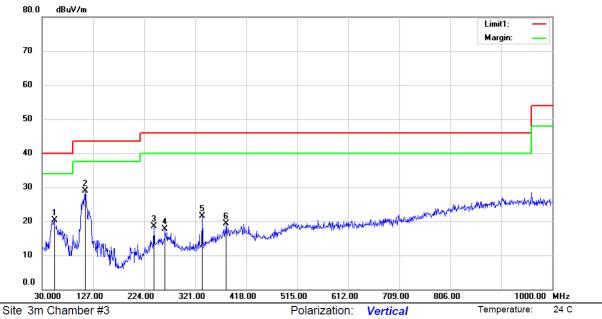

Power: AC 120V/60Hz

Limit: (RE)FCC PART 15 CLASS B

Mode:GFSK TX Channel Low


Note:

No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBuV/m	dB	Detector	cm	degree	Comment
1		53.2800	36.03	-15.73	20.30	40.00	-19.70	QP			
2	*	112.4500	43.67	-14.74	28.93	43.50	-14.57	QP			
3		242.4300	32.16	-13.71	18.45	46.00	-27.55	QP			
4		263.7700	30.47	-12.75	17.72	46.00	-28.28	QP			
5		334.5800	34.34	-12.75	21.59	46.00	-24.41	QP			
6		380.1700	29.38	-9.99	19.39	46.00	-26.61	QP			

*:Maximum data x:Over limit !:over margin Operator: KK



53 %

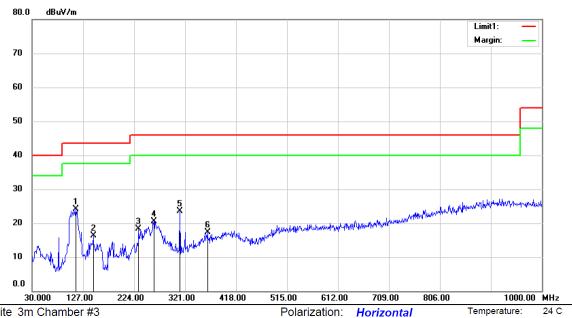

Site 3m Chamber #3

Limit: (RE)FCC PART 15 CLASS B Mode: GFSK TX Channel Mid

Note:


No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1	*	113.4200	38.99	-14.94	24.05	43.50	-19.45	QP			
2		146.4000	34.22	-17.99	16.23	43.50	-27.27	QP			
3		232.7300	33.00	-14.75	18.25	46.00	-27.75	QP			
4		261.8300	33.24	-12.77	20.47	46.00	-25.53	QP			
5		311.3000	37.08	-13.64	23.44	46.00	-22.56	QP			
6		363.6800	27.93	-10.59	17.34	46.00	-28.66	QP			

Power: AC 120V/60Hz

*:Maximum data x:Over limit !:over margin Operator: KK



53 %

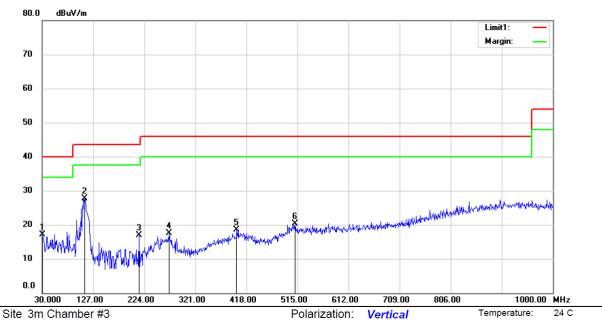

Limit: (RE)FCC PART 15 CLASS B

Mode: GFSK TX Channel Mid

Note:

No.	Mk	c. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.0000	33.54	-16.46	17.08	40.00	-22.92	QP			
2	*	110.5100	41.96	-14.33	27.63	43.50	-15.87	QP			
3		214.3000	33.23	-16.38	16.85	43.50	-26.65	QP			
4		271.5300	30.19	-12.67	17.52	46.00	-28.48	QP			
5		399.5700	27.37	-8.89	18.48	46.00	-27.52	QP			
6		510.1500	28.07	-7.72	20.35	46.00	-25.65	QP			


Power: AC 120V/60Hz

*:Maximum data x:Over limit !:over margin Operator: KK

TRF No.: FCC 15.249/A Page 24 of 38 Report No.: ES1511110025E4 Ver.1.0



53 %

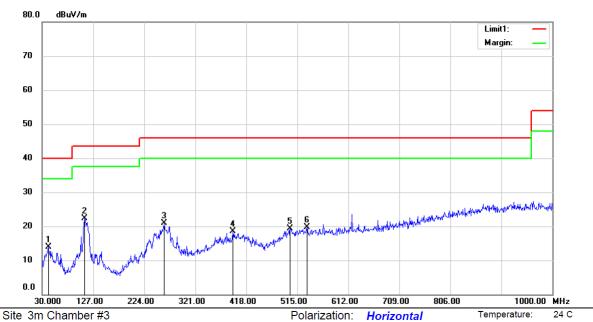

Limit: (RE)FCC PART 15 CLASS B

Mode: GFSK TX Channel High


Note:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∀	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		41.6400	26.74	-12.93	13.81	40.00	-26.19	QP			
2	*	110.5100	36.67	-14.33	22.34	43.50	-21.16	QP			
3		261.8300	33.61	-12.77	20.84	46.00	-25.16	QP			
4		392.7800	27.71	-9.28	18.43	46.00	-27.57	QP			
5		501.4200	27.14	-7.80	19.34	46.00	-26.66	QP			
6		533.4300	27.28	-7.53	19.75	46.00	-26.25	QP			

Power: AC 120V/60Hz

*:Maximum data x:Over limit !:over margin Operator: KK



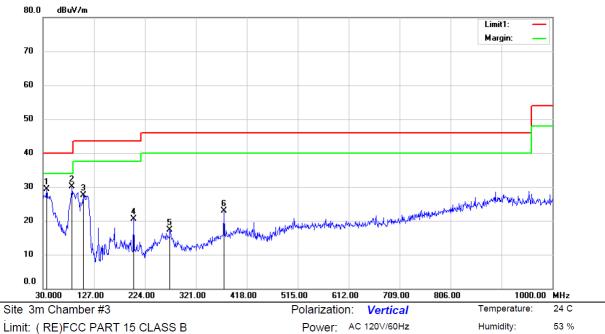

Limit: (RE)FCC PART 15 CLASS B

Mode: GFSK TX Channel High

Note:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		36.7900	43.40	-14.09	29.31	40.00	-10.69	QP			
2	*	85.2900	48.47	-18.41	30.06	40.00	-9.94	QP			
3		106.6300	41.66	-14.15	27.51	43.50	-15.99	QP			
4		202.6600	36.98	-16.40	20.58	43.50	-22.92	QP			
5		271.5300	30.00	-12.67	17.33	46.00	-28.67	QP			
6		374.3500	33.02	-10.21	22.81	46.00	-23.19	QP			

TRF No.: FCC 15.249/A Page 26 of 38 Report No.: ES151110025E4 Ver.1.0

^{*:}Maximum data Operator: KK x:Over limit !:over margin



■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Temperature : 28℃ Test Date : November 23, 2015

Humidity: 65 % Test By: YXL
Test mode: GFSK Frequency: 2404MHz

Freq.	Ant.Pol.	Emission Lev	vel(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)
(MHz)	H/V	PK	` AV ´	PK `	AV	PK `	AV
4853.00	V	56.43	31.75	74.00	54.00	-17.57	-22.25
11075.00	V	52.24	31.66	74.00	54.00	-21.76	-22.34
13353.00	V	52.76	34.26	74.00	54.00	-21.24	-19.74
				-			
4836.00	Н	58.72	42.36	74.00	54.00	-15.28	-11.64
11398.00	Н	51.26	36.76	74.00	54.00	-22.74	-17.24
13319.00	Н	51.65	36.96	74.00	54.00	-22.35	-17.04

Temperature : 28° Test Date : November 23, 2015

Humidity: 65 % Test By: YXL
Test mode: GFSK Frequency: 2440MHz

Freq.	Ant.Pol.	Emission Lev	rel(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4904.00	V	58.49	34.35	74.00	54.00	-15.51	-19.65
7318.00	V	52.13	34.82	74.00	54.00	-21.87	-19.18
12979.00	V	52.99	36.81	74.00	54.00	-21.01	-17.19
				-			
				1			
4904.00	Н	58.54	34.26	74.00	54.00	-15.46	-19.74
7318.00	Н	55.56	33.82	74.00	54.00	-18.44	-20.18
12826.00	Н	51.86	36.56	74.00	54.00	-22.14	-17.44

Temperature : 28° Test Date : November 23, 2015

Humidity: 65 % Test By: YXL Test mode: GFSK Frequency: 2480MHz

Freq.	Ant.Pol.	Emission Lev	rel(dBuV/m)	Limit 3m(d	dBuV/m)	Over(d	dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
4972.00	V	59.04	33.15	74.00	54.00	-14.96	-20.85
7437.00	V	57.31	34.52	74.00	54.00	-16.69	-19.48
13948.00	V	51.83	37.35	74.00	54.00	-22.17	-16.65
			-			-	-
4938.00	Н	58.95	34.35	74.00	54.00	-15.05	-19.65
7437.00	Н	56.90	34.82	74.00	54.00	-17.10	-19.18
13387.00	Н	53.90	36.48	74.00	54.00	-20.10	-17.52

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.

(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

TRF No.: FCC 15.249/A Page 27 of 38 Report No.: ES1511110025E4 Ver.1.0



■ Transmitter Fundamental Field Strength(2400MHz~2483.5MHz)

Temperature : 28℃ Test Date : November 23, 2015

Humidity: 65 % Test By: YXL
Test mode: GFSK Frequency: 2404MHz

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)	Over(dB)	
(MHz)	H/V	PK	AV	PK	AV	PK	AV
2404.00	Н	82.27	81.50	114.00	94.00	-31.73	-12.50
2404.00	V	76.55	75.40	114.00	94.00	-37.45	-18.60

Temperature : 28℃ Test Date : November 23, 2015

Humidity: 65 % Test By: YXL
Test mode: GFSK Frequency: 2440MHz

Freq.	Ant.Pol.	Emission Lev	rel(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)
(MHz)	H/V	PK	AV	PK	AV	PK	AV
2440.00	Н	82.06	81.50	114.00	94.00	-31.94	-12.50
2440.00	V	73.90	72.80	114.00	94.00	-40.10	-21.20

Temperature : 28℃ Test Date : November 23, 2015

Humidity: 65 % Test By: YXL
Test mode: GFSK Frequency: 2480MHz

Freq.	Ant.Pol.	Emission Level(dBuV/m)		Limit 3m(dBuV/m)	Over(dB)		
(MHz)	H/V	PK	AV	PK	AV	PK	AV	
2480.00	Н	79.72	78.50	114.00	94.00	-34.28	-15.50	
2480.00	V	72.22	71.30	114.00	94.00	-41.78	-22.70	

Note: (1) All Readings are Peak Value (VBW=3MHz) and Peak Value (VBW=10Hz).

(2) Emission Level= Reading Level+Probe Factor +Cable Loss.


(3) Data of measurement within this frequency range shown " -- " in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

TRF No.: FCC 15.249/A Page 28 of 38 Report No.: ES151110025E4 Ver.1.0



■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

	Spurious Emission in Restricted Band 2310-2	2390MHz
Toot Model	GFSK	
Test Model	Channel 1: 2404MHz	Polarity: H
	VBW=3MHz	Test By: YXL

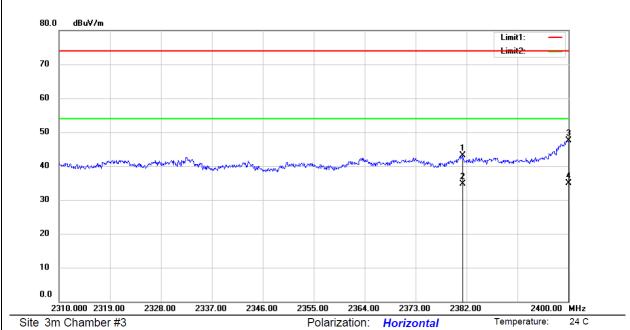

Limit: (RE)FCC PART 15 SUBPART C

Mode: GFSK TX Channel Low

Note:

No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		2381.280	64.90	-21.87	43.03	74.00	-30.97	peak			
2		2381.280	56.54	-21.87	34.67	54.00	-19.33	AVG			
3		2400.000	69.26	-21.82	47.44	74.00	-26.56	peak			
4	*	2400.000	56.77	-21.82	34.95	54.00	-19.05	AVG			

Power: AC 120V/60Hz

Humidity:


53 %


*:Maximum data x:Over limit !:over margin Operator: KK



53 %

Humidity:



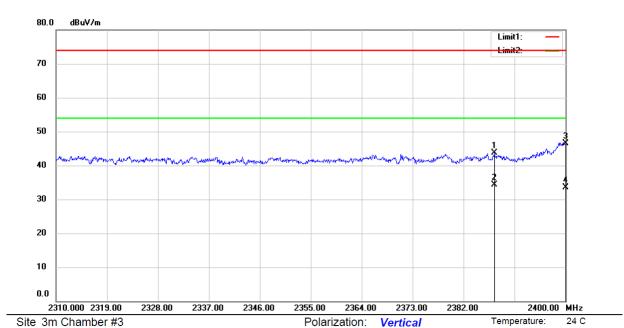

Limit: (RE)FCC PART 15 SUBPART C

Mode: GFSK TX Channel Low

Note:


No.	Mk	. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBu∨	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		2387.490	65.63	-21.85	43.78	74.00	-30.22	peak			
2	*	2387.490	56.13	-21.85	34.28	54.00	-19.72	AVG			
3		2400.000	68.26	-21.82	46.44	74.00	-27.56	peak			
4		2400.000	55.29	-21.82	33.47	54.00	-20.53	AVG			


Power: AC 120V/60Hz

*:Maximum data	x:Over limit	!:over margin	Operator: KK



_



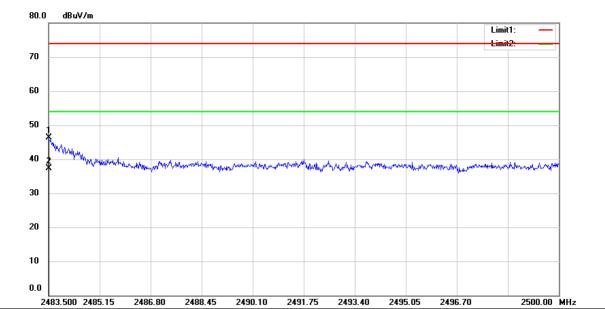

Site 3m Chamber #3

Polarization: Horizontal

Temperature: 24 C

Limit: (RE)FCC PART 15 SUBPART C

Power: AC 120V/60Hz

Humidity: 53 %

Operator: KK

Mode: GFSK TX Channel High

Note:

*:Maximum data


x:Over limit

!:over margin

No.	Mk	k. Freq.	Reading Level	Correct Factor	Measure- ment		Over		Antenna Height		
		MHz	dBu∨	dB	dBuV/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		2483.500	69.70	-23.44	46.26	74.00	-27.74	peak			
2	*	2483.500	60.72	-23.44	37.28	54.00	-16.72	AVG			



	Spurious Emission in Restricted Band 2483.5	-2500MHz
Test Model	GFSK	
i est iviouei	Channel 34: 2476MHz	Polarity: H
	VBW=3MHz	Test By: YXL

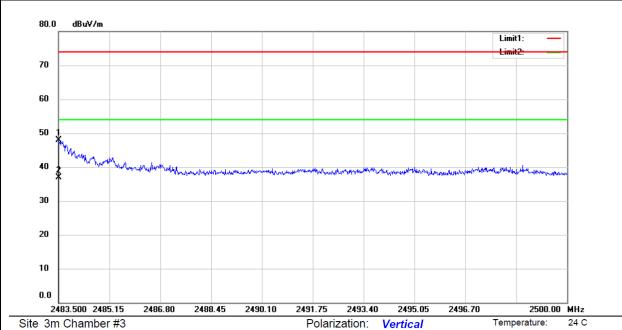

Limit: (RE)FCC PART 15 SUBPART C

Mode: GFSK TX Channel High

Note:

*:Maximum data

x:Over limit

!:over margin

No.	Mł	k. Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
		MHz	dBu∨	dB	dBu∀/m	dBu∀/m	dB	Detector	cm	degree	Comment
1		2483.517	71.34	-23.44	47.90	74.00	-26.10	peak			
2	*	2483.517	60.26	-23.44	36.82	54.00	-17.18	AVG			

Power: AC 120V/60Hz

Humidity:

Operator: KK

53 %



8.3 CONDUCTED EMISSIONS TEST

8.3.1 Applicable Standard

According to FCC Part 15.207(a)

8.3.2 Conformance Limit

Conducted Emission Limit							
Frequency(MHz)	Quasi-peak	Average					
0.15-0.5	66-56	56-46					
0.5-5.0	56	46					
5.0-30.0	60	50					

Note: 1. The lower limit shall apply at the transition frequencies

8.3.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.3.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Repeat above procedures until all frequency measured were complete.


8.3.5 Test Results

Pass

^{2.} The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.



50 %

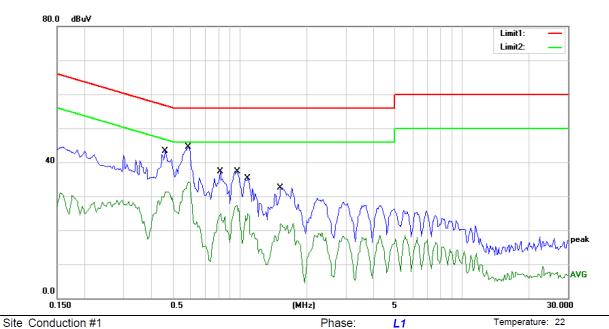

Power: AC 240V/50Hz

Limit: (CE)FCC PART 15 class B_QP

Mode: ON Note:


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1		0.4600	43.39	0.00	43.39	56.69	-13.30	QP	
2		0.4600	31.40	0.00	31.40	46.69	-15.29	AVG	
3	*	0.5850	44.50	0.00	44.50	56.00	-11.50	QP	
4		0.5850	34.23	0.00	34.23	46.00	-11.77	AVG	
5		0.8150	37.32	0.00	37.32	56.00	-18.68	QP	
6		0.8150	24.90	0.00	24.90	46.00	-21.10	AVG	
7		0.9700	37.38	0.00	37.38	56.00	-18.62	QP	
8		0.9700	27.26	0.00	27.26	46.00	-18.74	AVG	
9		1.0850	35.22	0.00	35.22	56.00	-20.78	QP	
10		1.0850	24.80	0.00	24.80	46.00	-21.20	AVG	
11		1.5250	32.53	0.00	32.53	56.00	-23.47	QP	
12		1.5250	21.90	0.00	21.90	46.00	-24.10	AVG	

*:Maximum data Comment: Factor build in receiver. x:Over limit !:over margin Operator: CSL

TRF No.: FCC 15.249/A Page 34 of 38 Report No.: ES151110025E4 Ver.1.0



50 %

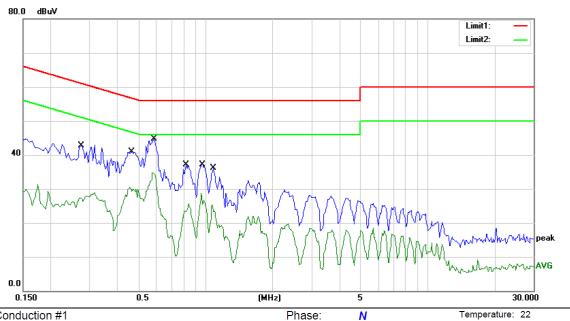

Power: AC 240V/50Hz

Site Conduction #1

Limit: (CE)FCC PART 15 class B_QP

Mode: ON Note:


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
	MHz	dBu∨	dB	dBu∀	dBu∨	dB	Detector	Comment
1	0.2750	42.80	0.00	42.80	60.97	-18.17	QP	
2	0.2750	28.80	0.00	28.80	50.97	-22.17	AVG	
3	0.4650	40.93	0.00	40.93	56.60	-15.67	QP	
4	0.4650	30.56	0.00	30.56	46.60	-16.04	AVG	
5	0.5850	44.64	0.00	44.64	56.00	-11.36	QP	
6 *	0.5850	34.78	0.00	34.78	46.00	-11.22	AVG	
7	0.8150	37.02	0.00	37.02	56.00	-18.98	QP	
8	0.8150	25.71	0.00	25.71	46.00	-20.29	AVG	
9	0.9650	37.20	0.00	37.20	56.00	-18.80	QP	
10	0.9650	28.73	0.00	28.73	46.00	-17.27	AVG	
11	1.0800	36.13	0.00	36.13	56.00	-19.87	QP	
12	1.0800	25.38	0.00	25.38	46.00	-20.62	AVG	

*:Maximum data !:over margin Comment: Factor build in receiver. Operator: CSL x:Over limit

TRF No.: FCC 15.249/A Page 35 of 38 Report No.: ES151110025E4 Ver.1.0



50 %

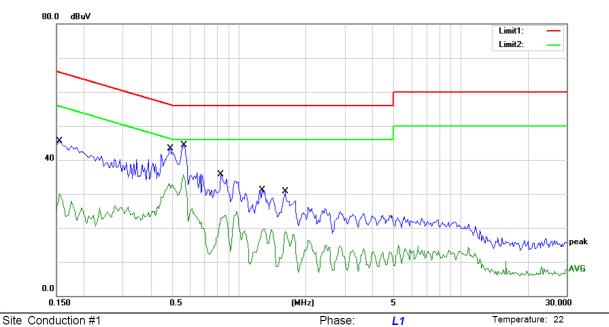

Power: AC 120V/60Hz

Limit: (CE)FCC PART 15 class B_QP


Mode: ON Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∨	dB	dBu∨	dBu∨	dB	Detector	Comment
1		0.1550	45.48	0.00	45.48	65.73	-20.25	QP	
2		0.1550	30.02	0.00	30.02	55.73	-25.71	AVG	
3		0.4900	43.27	0.00	43.27	56.17	-12.90	QP	
4		0.4900	33.10	0.00	33.10	46.17	-13.07	AVG	
5		0.5650	44.24	0.00	44.24	56.00	-11.76	QP	
6	*	0.5650	35.66	0.00	35.66	46.00	-10.34	AVG	
7		0.8300	35.69	0.00	35.69	56.00	-20.31	QP	
8		0.8300	24.94	0.00	24.94	46.00	-21.06	AVG	
9		1.2750	31.14	0.00	31.14	56.00	-24.86	QP	
10		1.2750	19.78	0.00	19.78	46.00	-26.22	AVG	
11		1.6150	30.70	0.00	30.70	56.00	-25.30	QP	
12		1.6150	19.16	0.00	19.16	46.00	-26.84	AVG	

*:Maximum data Comment: Factor build in receiver. Operator: CSL x:Over limit !:over margin



50 %

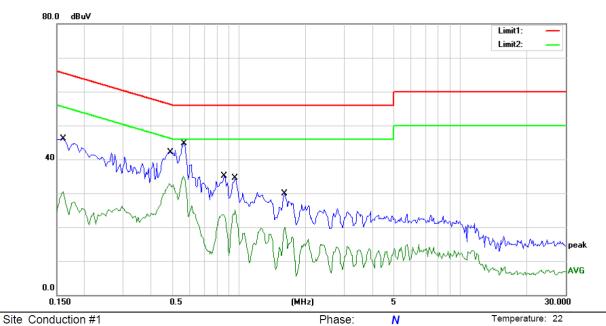

Power: AC 120V/60Hz

. Limit: (CE)FCC PART 15 class B_QP

Mode: ON Note:

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		
		MHz	dBu∀	dB	dBu∀	dBu∀	dB	Detector	Comment
1		0.1600	46.03	0.00	46.03	65.46	-19.43	QP	
2		0.1600	30.59	0.00	30.59	55.46	-24.87	AVG	
3		0.4900	42.17	0.00	42.17	56.17	-14.00	QP	
4		0.4900	32.86	0.00	32.86	46.17	-13.31	AVG	
5		0.5650	44.75	0.00	44.75	56.00	-11.25	QP	
6	*	0.5650	35.01	0.00	35.01	46.00	-10.99	AVG	
7		0.8550	35.12	0.00	35.12	56.00	-20.88	QP	
8		0.8550	23.79	0.00	23.79	46.00	-22.21	AVG	
9		0.9600	34.46	0.00	34.46	56.00	-21.54	QP	
10		0.9600	25.06	0.00	25.06	46.00	-20.94	AVG	
11		1.6050	29.81	0.00	29.81	56.00	-26.19	QP	
12		1.6050	19.94	0.00	19.94	46.00	-26.06	AVG	

*:Maximum data x:Over limit !:over margin Comment: Factor build in receiver. Operator: CSL

TRF No.: FCC 15.249/A Page 37 of 38 Report No.: ES151110025E4 Ver.1.0



8.4 ANTENNA APPLICATION

8.4.1 Antenna Requirement

Standard	Requirement
Standard	l l
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

8.4.2 **Result**

The EUT'S antenna is PCB Antenna, and the antenna can't be replaced by the user, which in accordance to section 15.203, please refer to the internal photos. The antenna's gain is 1dBi and meets the requirement.

END OF REPORT

TRF No.: FCC 15.249/A Page 38 of 38 Report No.: ES151110025E4 Ver.1.0