

FCC TEST REPORT

FOR

Flysound Technology Limited

Audio guide system

Test Model: ATG01

Additional Model No.: ATG02, ATG03, ATG04, ATG05, ATG06, ATG07, ATG08

Prepared for : Flysound Technology Limited
Address : A307 Zhantao Technology Building, Minzhi BLVD, Longhua, Baoan District, Shenzhen, Guangdong, China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : November 12, 2015
Number of tested samples : 1
Sample number : 15110921
Date of Test : November 12, 2015 - November 24, 2015
Date of Report : November 24, 2015

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.249): 2014****Report Reference No. : LCS1511120899E**

Date of Issue : November 24, 2015

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Testing Location/ Procedure..... : Full application of Harmonised standards Partial application of Harmonised standards Other standard testing method **Applicant's Name : Flysound Technology Limited**

Address : A307 Zhantao Technology Building, Minzhi BLVD, Longhua, Baoan District, Shenzhen, Guangdong, China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249): 2014 / ANSI C63.10: 2013

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Audio guide system

Trade Mark : Flysoundtech

Test Model..... : ATG01


Ratings..... : DC 3.7V by Lithium polymer battery(1480mAh)

Result : Positive**Compiled by:**

Leo Lee/ File administrators

Supervised by:

Glin Lu/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS1511120899E	<u>November 24, 2015</u>
	Date of issue

Test Model..... : ATG01

EUT..... : Audio guide system

Applicant..... : Flysound Technology Limited

Address..... : A307 Zhantao Technology Building, Minzhi BLVD, Longhua, Baoan District, Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Manufacturer..... : Flysound Technology Limited

Address..... : A307 Zhantao Technology Building, Minzhi BLVD, Longhua, Baoan District, Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Factory..... : Flysound Technology Limited

Address..... : A307 Zhantao Technology Building, Minzhi BLVD, Longhua, Baoan District, Shenzhen, Guangdong, China

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

TABLE OF CONTENTS

1. GENERAL INFORMATION	5
1.1. Description of Device (EUT).....	5
1.2. Support Equipment List	5
1.3. External I/O.....	5
1.4. Description of Test Facility	6
1.5. List Of Measuring Equipments	6
1.6. Statement of the measurement uncertainty	7
1.7. Measurement Uncertainty	7
1.8. Description Of Test Modes	8
2. TEST METHODOLOGY.....	10
2.1. EUT Configuration	10
2.2. EUT Exercise	10
2.3. General Test Procedures	10
3. CONNECTION DIAGRAM OF TEST SYSTEM	11
3.1. Justification	11
3.2. EUT Exercise Software.....	11
3.3. Special Accessories.....	11
3.4. Block Diagram/Schematics.....	11
3.5. Equipment Modifications.....	11
3.6. Test Setup.....	11
4. SUMMARY OF TEST RESULTS.....	12
5. ANTENNA REQUIREMENT	13
5.1. Standard Applicable	13
5.2. Antenna Connected Construction	13
6. LINE CONDUCTED EMISSIONS	14
6.1 Standard Applicable	14
6.2 Block Diagram of Test Setup.....	14
6.3 Test Results	14
7. RADIATED EMISSION MEASUREMENT.....	17
7.1. Standard Applicable	17
7.2. Instruments Setting.....	17
7.3. Test Procedure	18
7.4. Block Diagram of Test Setup.....	22
7.5. Test Results	23
7.6. Results for Band edge Testing (Radiated)	25
7.7. Results for Radiated Emissions (Above 1GHz).....	26
8. 20 DB BANDWIDTH MEASUREMENT	27
8.1. Standard Applicable	27
8.2. Block Diagram of Test Setup.....	27
8.3. Test Procedure	27
8.4. Test Results	28

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Audio guide system
 Model Number : ATG01, ATG02, ATG03, ATG04, ATG05, ATG06, ATG07, ATG08
 Model Declaration : PCB board, structure and internal of the related model(s) are the same, So no additional models were tested.
 Test Model : ATG01
 Hardware Version : V7.0
 Software Version : FSD_FCC_V6.0
 Power Supply : DC 3.7V by Lithium polymer battery(1480mAh)
 Frequency Range : 910.0MHz-919.8MHz
 Channel Number : 50 Channels
 Channel Spacing : See more details at section 1.8
 Modulation Type : FSK
 Antenna Description : PCB Antenna, 2.0dBi(Max.)

1.2. Support Equipment List

Manufacturer	Description	Model	Serial Number	Certificate
Lenovo	Notebook	B470	WB05067151	DOC
Lenovo	AC/DC ADAPTER	ADP-90DD B	36001941	VOC

1.3. External I/O

I/O Port Description	Quantity	Cable
DC IN Port	1	0.8m, unshielded
Line&MIC Input Port	1	1.0m, unshielded

1.4. Description of Test Facility

CNAS Registration Number. is L4595.
 FCC Registration Number. is 899208.
 Industry Canada Registration Number. is 9642A-1.
 VCCI Registration Number. is C-4260 and R-3804.
 ESMD Registration Number. is ARCB0108.
 UL Registration Number. is 100571-492.
 TUV SUD Registration Number. is SCN1081.
 TUV RH Registration Number. is UA 50296516-001

1.5. List Of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2015	June 17,2016
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2015	July 15,2016
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2015	June 17,2016
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2015	June 17,2016
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2015	June 17,2016
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2015	June 17,2016
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2015	June 17,2016
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2015	June 17,2016
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2015	July 15,2016
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2015	July 15,2016
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2015	July 15,2016
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2015	Oct. 26, 2016
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2015	June 17,2016
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2015	June 09,2016
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2015	June 09,2016
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2015	June 09,2016
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2015	June 17,2016
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2015	June 17,2016
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2015	June 17,2016
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2015	June 17,2016
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2015	June 17,2016
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2015	June 17,2016

Note: All equipment through GRGT EST calibration

1.6. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.7. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	3.10dB	(1)
	30MHz~200MHz	2.96dB	(1)
	200MHz~1000MHz	3.10dB	(1)
	1GHz~26.5GHz	4.00dB	(1)
Conduction Uncertainty :	150kHz~30MHz	1.63dB	(1)
Power disturbance :	30MHz~300MHz	1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.8. Description Of Test Modes

Channel List:

Channel No.	Channel Frequency (MHz)	Channel No.	Channel Frequency (MHz)
0	910.0	25	915.0
1	910.8	26	915.6
2	911.6	27	914.2
3	910.4	28	914.6
4	911.2	29	915.8
5	911.0	30	916.0
6	911.6	31	916.8
7	910.2	32	917.6
8	910.6	33	916.4
9	911.8	34	917.2
10	912.0	35	917.0
11	912.8	36	917.6
12	913.6	37	916.2
13	912.4	38	916.6
14	913.2	39	917.8
15	913.0	40	918.0
16	913.6	41	918.8
17	912.2	42	919.6
18	912.6	43	918.4
19	913.8	44	919.2
20	914.0	45	919.0
21	914.8	46	919.6
22	915.6	47	918.2
23	914.4	48	918.6
24	915.2	49	919.8

The EUT operates in the unlicensed ISM band at 902MHz~928MHz band. The following operating modes were applied for the related test items.

All test modes were tested, only the result of the worst case was recorded in the report. The EUT is considered a portable unit and was set to transmit at 100% duty cycle. It was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane.

Mode of Operations	Transmitting Frequency (MHz)
FSK	910.0
	915.0
	919.8
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

Worst-case mode and channel used for 150kHz-30 MHz power line conducted emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel(910.0MHz).

Worst-case mode and channel used for 9kHz-1000 MHz radiated emissions was the mode and channel with the highest output power, that was determined to be TX-Low Channel(910.0MHz).

***Note: Using a temporary antenna connector for the EUT when the conducted measurements are performed.

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10: 2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd..

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions

According to the requirements in Section 6.2 of ANSI C63.10: 2013, AC power-line conducted emissions shall be measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table and the turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10: 2013

3. CONNECTION DIAGRAM OF TEST SYSTEM

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

N/A

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Power Line Conducted Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249	Band Edges Measurement	Compliant
§15.249, §15.215	20 dB Bandwidth	Compliant

5. ANTENNA REQUIREMENT

5.1. Standard Applicable

According to § 15.203, An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

5.2. Antenna Connected Construction

The antenna used for transmitting is permanently attached and no consideration of replacement. Please see EUT photo for details.

Result: Compliance.


6. LINE CONDUCTED EMISSIONS

6.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolt (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range are listed as follows:

Frequency Range(MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

6.2 Block Diagram of Test Setup

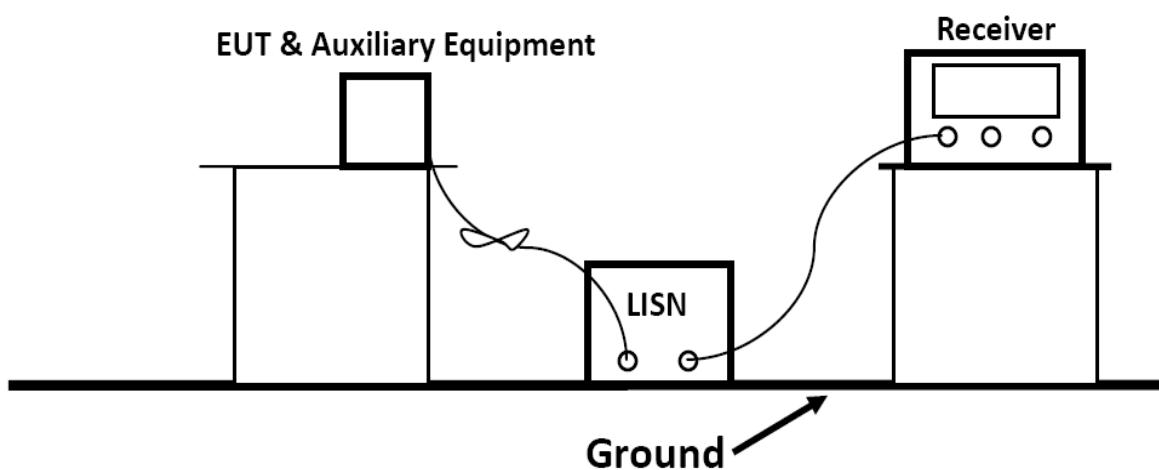


6.3 Test Results

PASS.

The test data please refer to following page.


Test Result For Line Power Input AC 120V/60Hz

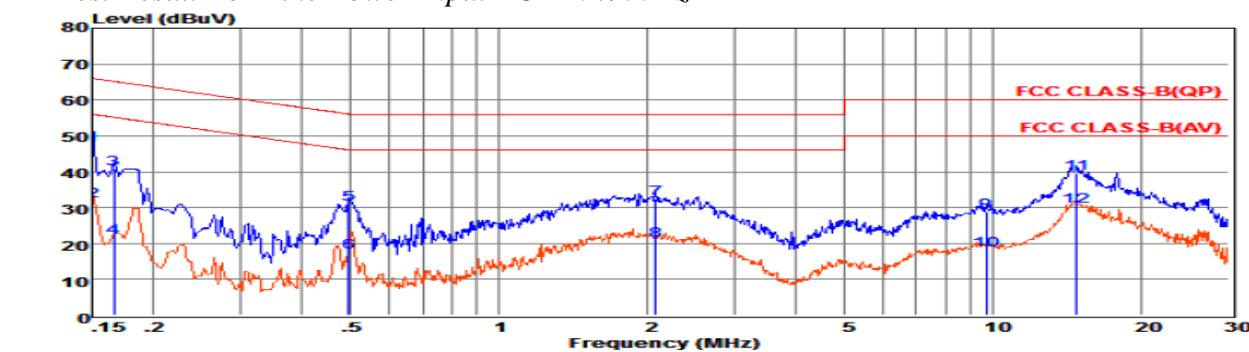

Env. Ins: 24*/56%
 EUT: Audio guide system
 M/N: ATG01
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel
 Operator: Leo
 Memo:
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15000	28.06	9.57	0.02	10.00	47.65	66.00	-18.35 QP
2	0.15010	12.24	9.57	0.02	10.00	31.83	55.99	-24.16 Average
3	0.16589	21.13	9.59	0.02	10.00	40.74	65.16	-24.42 QP
4	0.16599	2.02	9.59	0.02	10.00	21.63	55.16	-33.53 Average
5	0.49673	11.18	9.62	0.04	10.00	30.84	56.05	-25.21 QP
6	0.49683	-2.05	9.62	0.04	10.00	17.61	46.05	-28.44 Average
7	2.07684	12.67	9.64	0.05	10.00	32.36	56.00	-23.64 QP
8	2.07784	1.23	9.64	0.05	10.00	20.92	46.00	-25.08 Average
9	9.70514	9.03	9.69	0.08	10.00	28.80	60.00	-31.20 QP
10	9.70614	-1.57	9.69	0.08	10.00	18.20	50.00	-31.80 Average
1114.74970	19.81	9.71	0.10	10.00	39.62	60.00	-20.38 QP	
1214.75070	10.51	9.71	0.10	10.00	30.32	50.00	-19.68	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

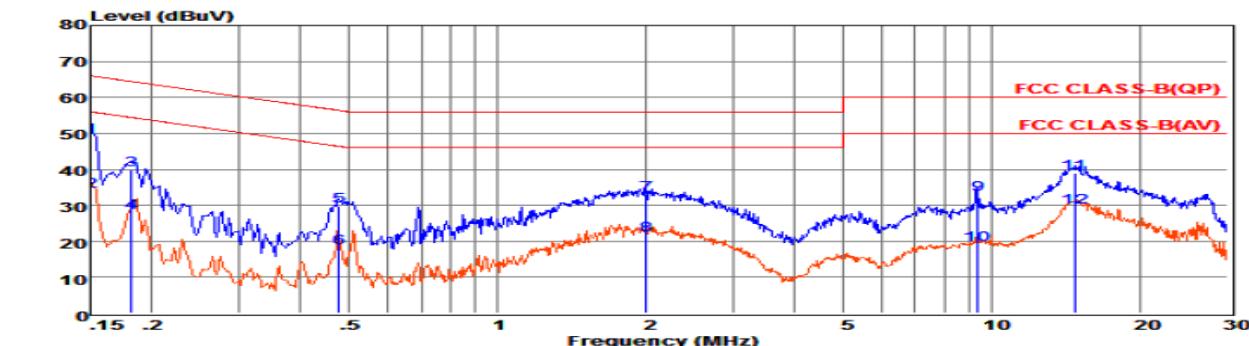


Env. Ins: 24*/56%
 EUT: Audio guide system
 M/N: ATG01
 Power Rating: AC 120V/60Hz
 Test Mode: TX-Low Channel
 Operator: Leo
 Memo:
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1	0.15000	29.29	9.70	0.02	10.00	49.01	66.00	-16.99 QP
2	0.15010	14.32	9.70	0.02	10.00	34.04	55.99	-21.95 Average
3	0.18152	20.33	9.63	0.02	10.00	39.98	64.42	-24.44 QP
4	0.18162	8.28	9.63	0.02	10.00	27.93	54.41	-26.48 Average
5	0.47865	10.06	9.62	0.04	10.00	29.72	56.36	-26.64 QP
6	0.47875	-1.49	9.62	0.04	10.00	18.17	46.36	-28.19 Average
7	2.00122	13.25	9.63	0.05	10.00	32.93	56.00	-23.07 QP
8	2.00222	1.92	9.63	0.05	10.00	21.60	46.00	-24.40 Average
9	9.35179	13.11	9.71	0.08	10.00	32.90	60.00	-27.10 QP
10	9.35279	-0.85	9.71	0.08	10.00	18.94	50.00	-31.06 Average
1114.67176	19.15	9.74	0.10	10.00	38.99	60.00	-21.01 QP	
1214.67276	9.68	9.74	0.10	10.00	29.52	50.00	-20.48	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.


Test Result For Line Power Input AC 240V/60Hz

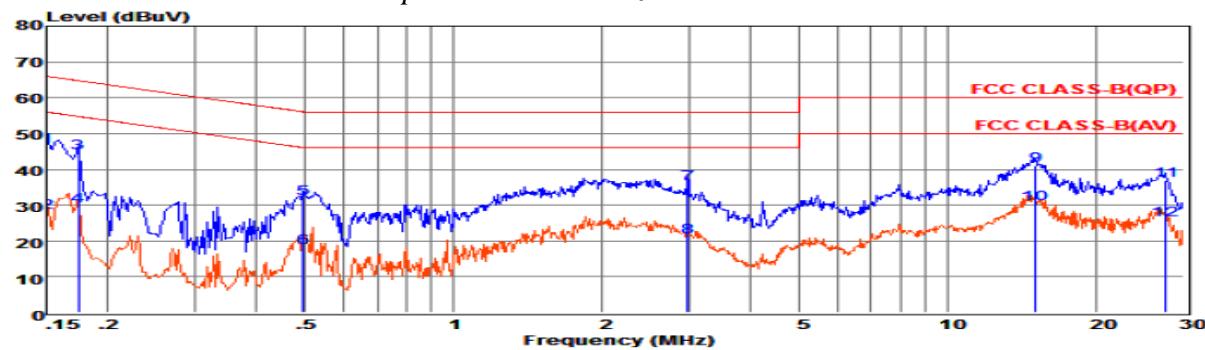

Env. Ins: 24*/56%
 EUT: Audio guide system
 M/N: ATG01
 Power Rating: AC 240V/60Hz
 Test Mode: TX-Low Channel
 Operator: Leo
 Memo:
 Pol: LINE

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15000	26.83	9.57	0.02	10.00	46.42	66.00	-19.58	QP
2 0.15010	8.22	9.57	0.02	10.00	27.81	55.99	-28.18	Average
3 0.17399	24.96	9.60	0.02	10.00	44.58	64.77	-20.19	QP
4 0.17409	10.00	9.60	0.02	10.00	29.62	54.76	-25.14	Average
5 0.49673	12.25	9.62	0.04	10.00	31.91	56.05	-24.14	QP
6 0.49683	-1.57	9.62	0.04	10.00	18.09	46.05	-27.96	Average
7 2.97764	16.19	9.64	0.06	10.00	35.89	56.00	-20.11	QP
8 2.97864	1.43	9.64	0.06	10.00	21.13	46.00	-24.87	Average
915.06563	21.35	9.71	0.10	10.00	41.16	60.00	-18.84	QP
1015.06763	10.62	9.71	0.10	10.00	30.43	50.00	-19.57	Average
1127.56162	16.99	9.71	0.14	10.00	36.84	60.00	-23.16	QP
1227.56262	6.01	9.71	0.14	10.00	25.86	50.00	-24.14	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

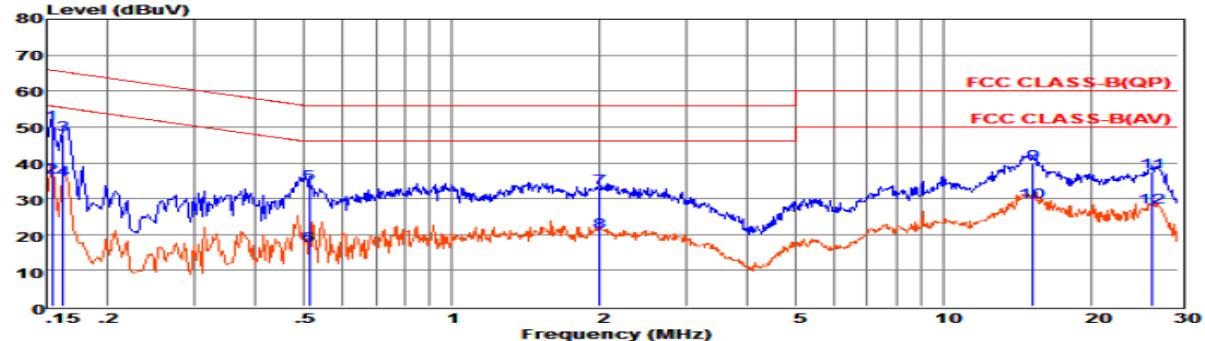

Env. Ins: 24*/56%
 EUT: Audio guide system
 M/N: ATG01
 Power Rating: AC 240V/60Hz
 Test Mode: TX-Low Channel
 Operator: Leo
 Memo:
 Pol: NEUTRAL

Freq	Reading	LisnFac	CabLos	Atten_Fac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB	dB	dBuV	dBuV	dB	
1 0.15403	31.15	9.69	0.02	10.00	50.86	65.78	-14.92	QP
2 0.15413	16.39	9.69	0.02	10.00	36.10	55.77	-19.67	Average
3 0.16241	28.12	9.67	0.02	10.00	47.81	65.34	-17.53	QP
4 0.16251	15.75	9.67	0.02	10.00	35.44	55.33	-19.89	Average
5 0.51278	14.59	9.62	0.04	10.00	34.25	56.00	-21.75	QP
6 0.51288	-2.84	9.62	0.04	10.00	16.82	46.00	-29.18	Average
7 2.00122	13.41	9.63	0.05	10.00	33.09	56.00	-22.91	QP
8 2.00222	1.14	9.63	0.05	10.00	20.82	46.00	-25.18	Average
915.22613	20.14	9.74	0.10	10.00	39.98	60.00	-20.02	QP
1015.22713	9.41	9.74	0.10	10.00	29.25	50.00	-20.75	Average
1126.55813	17.37	9.83	0.13	10.00	37.33	60.00	-22.67	QP
1226.55913	7.56	9.83	0.13	10.00	27.52	50.00	-22.48	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss+Atten_Fac.
 2. The emission levels that are 20dB below the official limit are not reported.

Note: Pre-scan all modes and recorded the worst case results in this report.

7. RADIATED EMISSION MEASUREMENT

7.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) and 15.249 limit in the table below has to be followed.

Fundamental Frequency	Field Strength of fundamental (millivolts/meter)	Field Strength of harmonics (microvolts/meter)
902-928MHz	50	500
2400-2483.5MHz	50	500
5725-5875MHz	50	500
24.0-24.25GHz	250	2500

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

7.2. Instruments Setting

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1000KHz / 1000KHz for peak

7.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0 ° to 360 °) and by rotating the elevation axes (0 ° to 360 °).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45 °) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0 ° to 315 ° using 45 ° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position (± 45 °) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.




Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

7.4. Block Diagram of Test Setup

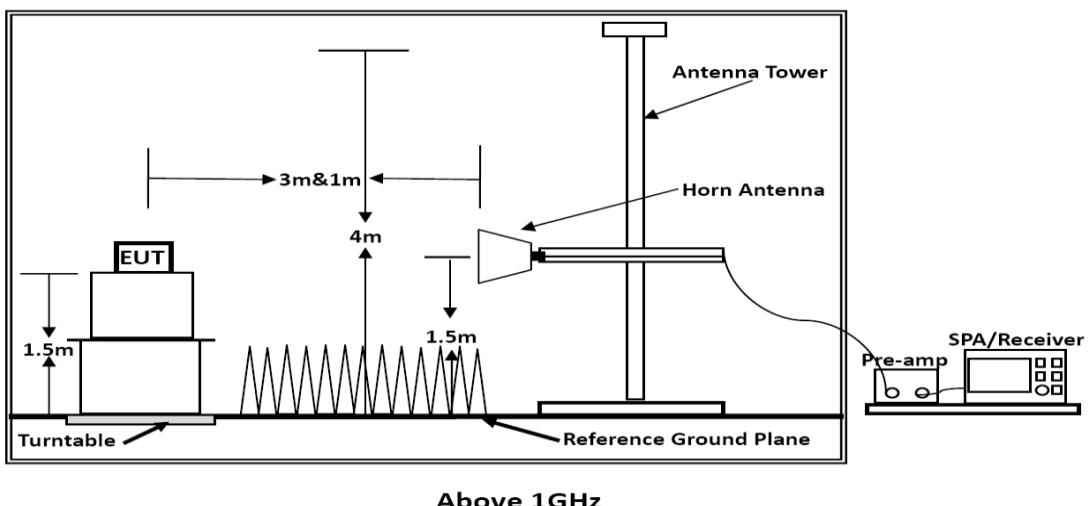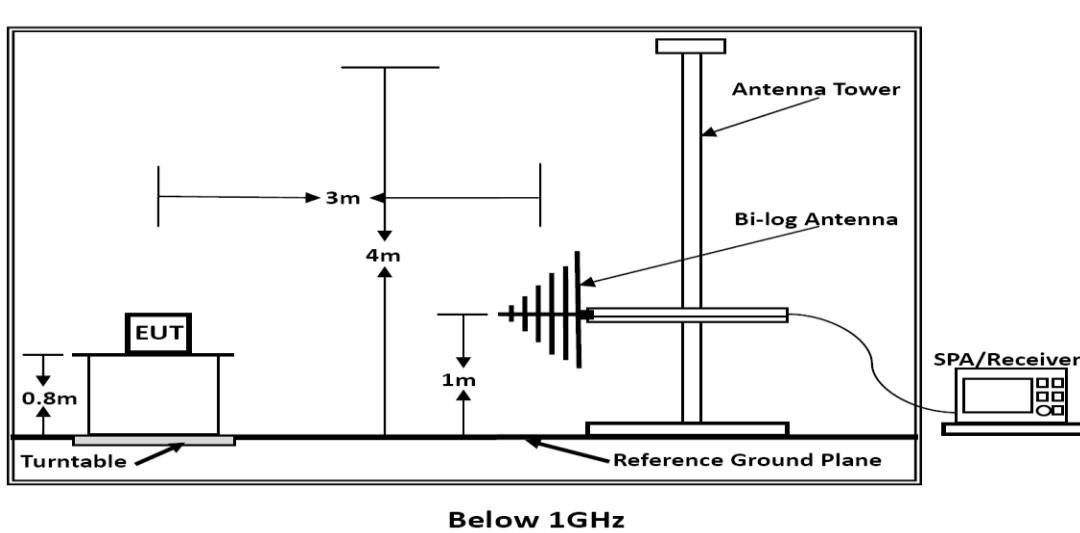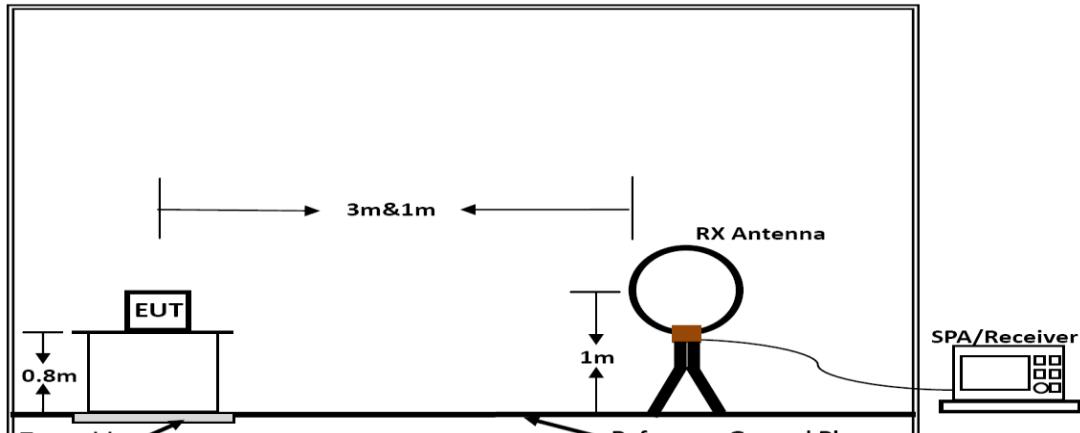

7.5. Test Results

Results of Radiated Emissions (9kHz~30MHz)


Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
-	-	-	-	See Note

Note:

The radiated emissions from 9kHz to 30MHz are at least 20dB below the official limit and no need to report.

Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor.


Results of Radiated Emissions (30MHz~1000MHz)

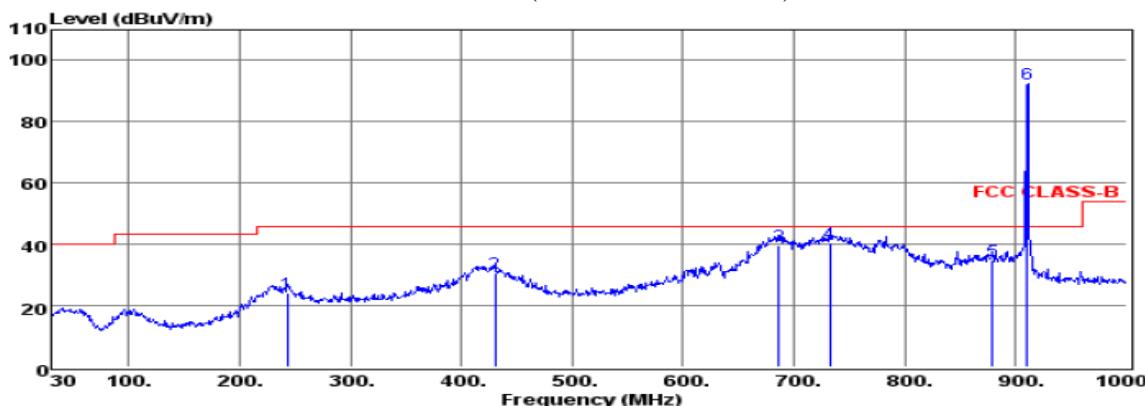

Env./Ins: 24°C / 56%
 EUT: Audio guide system
 M/N: ATG01
 Power Rating: DC 3.7V
 Test Mode: TX-Low Channel
 Operator: Leo
 Memo:
 pol: HORIZONTAL

Freq	Reading	CabLos	Antfac	Measured		Limit	Over	Remark
				MHz	dBuV	dB	dB/m	
1 243.40	11.07	0.90	12.08	24.05	46.00	-21.95		QP
2 430.61	13.76	1.28	15.52	30.56	46.00	-15.44		QP
3 686.69	19.34	1.73	18.76	39.83	46.00	-6.17		QP
4 732.28	19.51	1.62	19.21	40.34	46.00	-5.66		QP
5 878.75	11.83	1.88	20.87	34.58	46.00	-11.42		QP
6 910.00	69.34	1.88	21.16	92.38	46.00	-21.26		QP

Note: 1. All readings are Quasi-peak values.
 2. Measured = Reading + Antenna Factor + Cable Loss
 3. The emission that ate 20db blow the offical limit are not reported

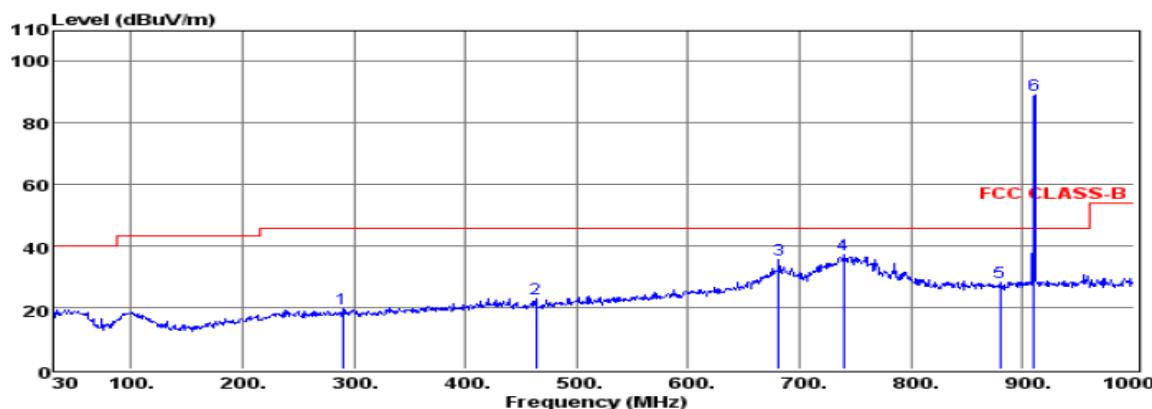

Env./Ins:

24 °C / 56%

EUT:

Audio guide system

M/N:

ATG01

Power Rating:

DC 3.7V

Test Mode:

TX-Low Channel

Operator:

Leo

Memo:

Vertical

pol:

Freq	Reading	CabLoss	Antfac	Measured	Limit	Over	Remark
MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1 289.96	5.79	1.01	12.86	19.66	46.00	-26.34	QP
2 463.59	5.94	1.36	15.68	22.98	46.00	-23.02	QP
3 680.87	15.38	1.61	18.74	35.73	46.00	-10.27	QP
4 739.07	16.21	1.60	19.30	37.11	46.00	-8.89	QP
5 879.72	5.65	1.88	20.88	28.41	46.00	-17.59	QP
6 910.00	66.09	1.88	21.16	89.13	-114.00	-24.87	QP

Note: 1. All readings are Quasi-peak values.

2. Measured = Reading + Antenna Factor + Cable Loss

3. The emission that ate 20db blow the official limit are not reported

***Note: Pre-scan all mode and recorded the worst case results in this report (TX- Low Channel).

Field Strength Of Fundamental (TX-Low Channel)						
Frequency (MHz)	Pol.	Measure Result (QP, dBuV/m)	Measure Result (AVG, dBuV/m)	QP Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
910.0	H	92.38	92.24	114	94	Pass
910.0	V	89.13	88.97	114	94	Pass

Field Strength Of Fundamental (TX-Middle Channel)						
Frequency (MHz)	Pol.	Measure Result (QP, dBuV/m)	Measure Result (AVG, dBuV/m)	QP Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
915.0	H	91.71	91.57	114	94	Pass
915.0	V	87.46	87.28	114	94	Pass

Field Strength Of Fundamental (TX-High Channel)						
Frequency (MHz)	Pol.	Measure Result (QP, dBuV/m)	Measure Result (AVG, dBuV/m)	QP Limit (dBuV/m)	AVG Limit (dBuV/m)	Result
919.8	H	90.16	89.94	114	94	Pass
919.8	V	86.59	86.41	114	94	Pass

7.6. Results for Band edge Testing (Radiated)

Only record the worst test case as following:

TX-Low Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
676.42	20.97	18.73	1.73	41.43	46	-4.57	QP	Horizontal
736.09	20.54	19.26	1.66	41.46	46	-3.54	QP	Horizontal
903.48	16.37	21.11	1.87	39.35	46	-6.65	QP	Horizontal
686.22	10.62	18.76	1.73	31.11	46	-14.89	QP	Vertical
793.62	8.35	19.98	1.73	30.06	46	-15.94	QP	Vertical
893.07	3.28	21.02	1.84	26.14	46	-19.86	QP	Vertical

TX-High Channel

Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
922.80	9.22	21.24	1.99	32.45	46	-13.55	QP	Horizontal
937.30	4.77	21.33	1.93	28.03	46	-17.97	QP	Horizontal
957.40	5.28	21.46	1.89	28.63	46	-17.37	QP	Horizontal
921.85	2.96	21.23	1.90	26.09	46	-19.91	QP	Vertical
935.30	2.78	21.32	1.93	26.03	46	-19.97	QP	Vertical
957.40	6.05	21.46	1.89	29.40	46	-16.60	QP	Vertical

7.7. Results for Radiated Emissions (Above 1GHz)

Field Strength Of Fundamental (TX-Low Channel)									
Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1820.13	47.14	26.39	37.03	4.47	40.97	74	-33.03	Peak	Horizontal
1820.16	37.35	26.39	37.03	4.47	31.18	54	-22.82	Average	Horizontal
1820.13	45.90	26.47	37.03	4.47	39.81	74	-34.19	Peak	Vertical
1820.16	34.43	26.47	37.03	4.47	28.34	54	-25.66	Average	Vertical

Field Strength Of Fundamental (TX-Middle Channel)									
Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1830.21	46.31	26.39	37.03	4.47	40.14	74	-33.86	Peak	Horizontal
1830.23	35.78	26.39	37.03	4.47	29.61	54	-24.39	Average	Horizontal
1830.21	45.64	26.47	37.03	4.47	39.55	74	-34.45	Peak	Vertical
1830.23	34.91	26.47	37.03	4.47	28.82	54	-25.18	Average	Vertical

Field Strength Of Fundamental (TX-High Channel)									
Freq. MHz	Reading Level dBuV	Ant. Fac. dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuV/m	Limit dBuV/m	Margin dB	Remark	Pol.
1839.66	45.47	26.39	37.03	4.47	39.30	74	-34.70	Peak	Horizontal
1839.69	34.59	26.39	37.03	4.47	28.42	54	-25.58	Average	Horizontal
1839.66	43.76	26.47	37.03	4.47	37.67	74	-36.33	Peak	Vertical
1839.69	34.11	26.47	37.03	4.47	28.02	54	-25.98	Average	Vertical

Notes:


1. Measuring frequencies from 9k~10th harmonic (ex. 10GHz), No emission found between lowest internal used/generated frequency to 30MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.
3. No emission was recorded above 18GHz means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

8. 20 DB BANDWIDTH MEASUREMENT

8.1. Standard Applicable

According to §15.215

8.2. Block Diagram of Test Setup

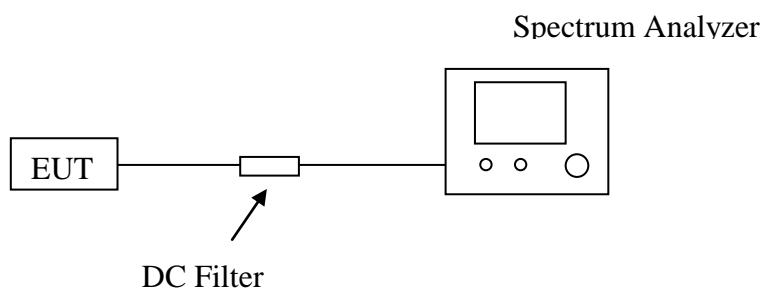

8.3. Test Procedure

Use the following spectrum analyzer settings:

Span = 500KHz

RBW = 30KHz

VBW = 100KHz

Sweep = auto


Detector function = peak



Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

8.4. Test Results

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (KHz)	Limit (MHz)
910.0	129.2	Non-Specified
915.0	128.8	
919.8	128.9	

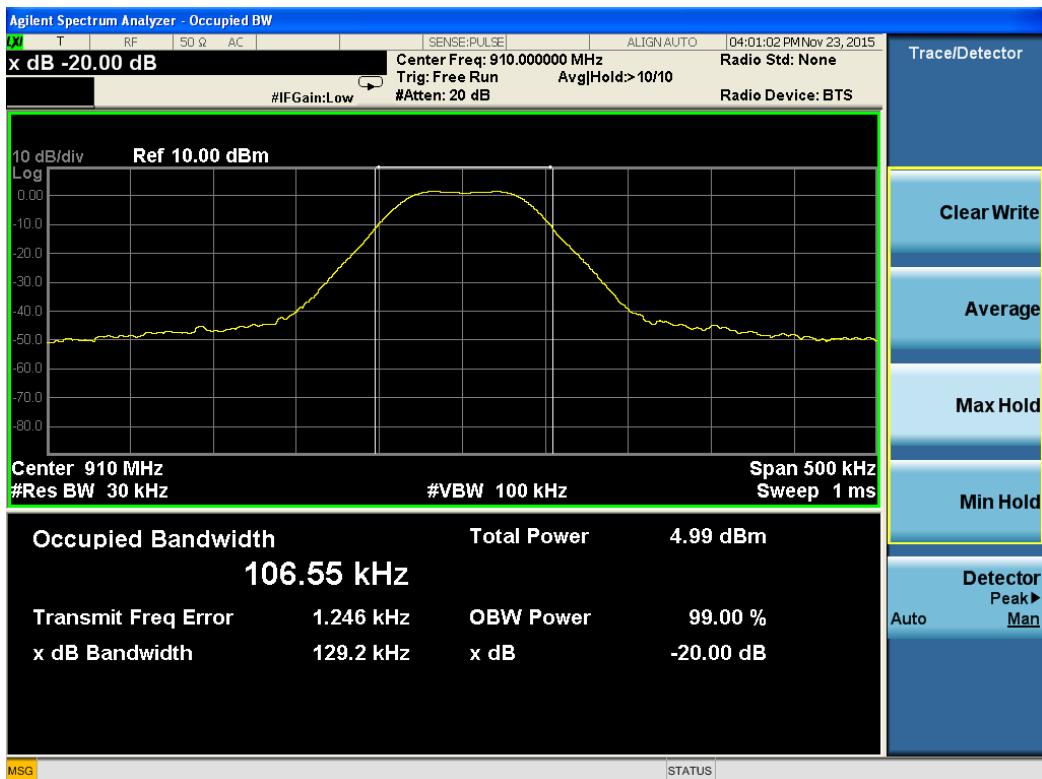

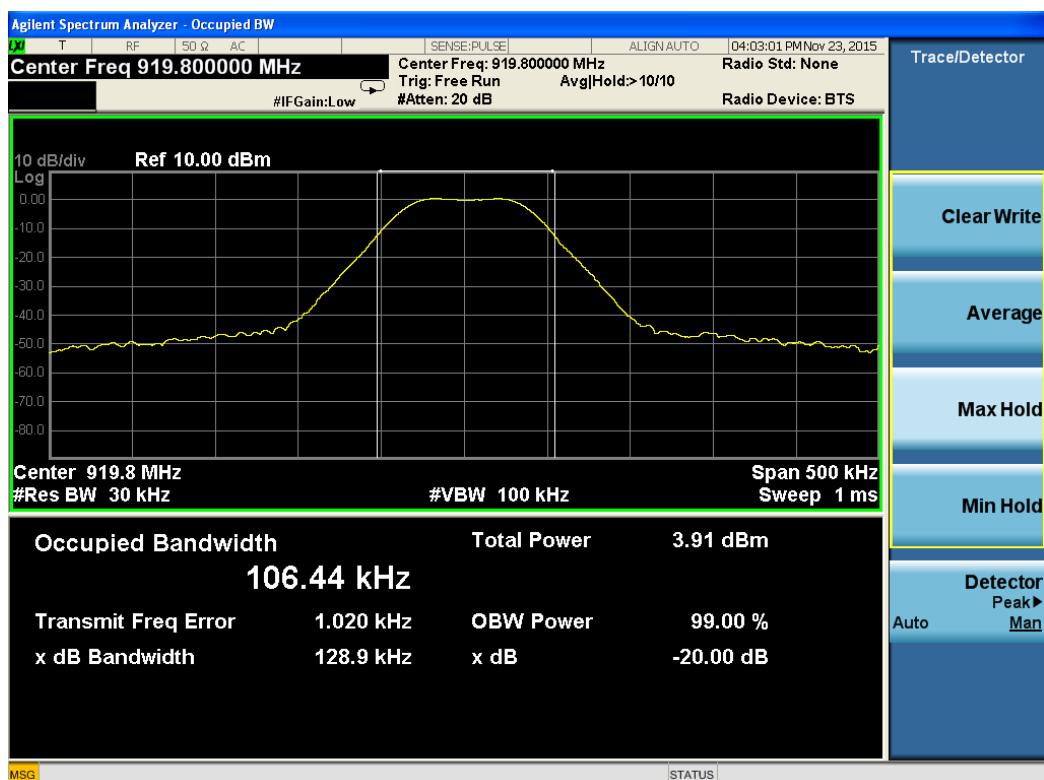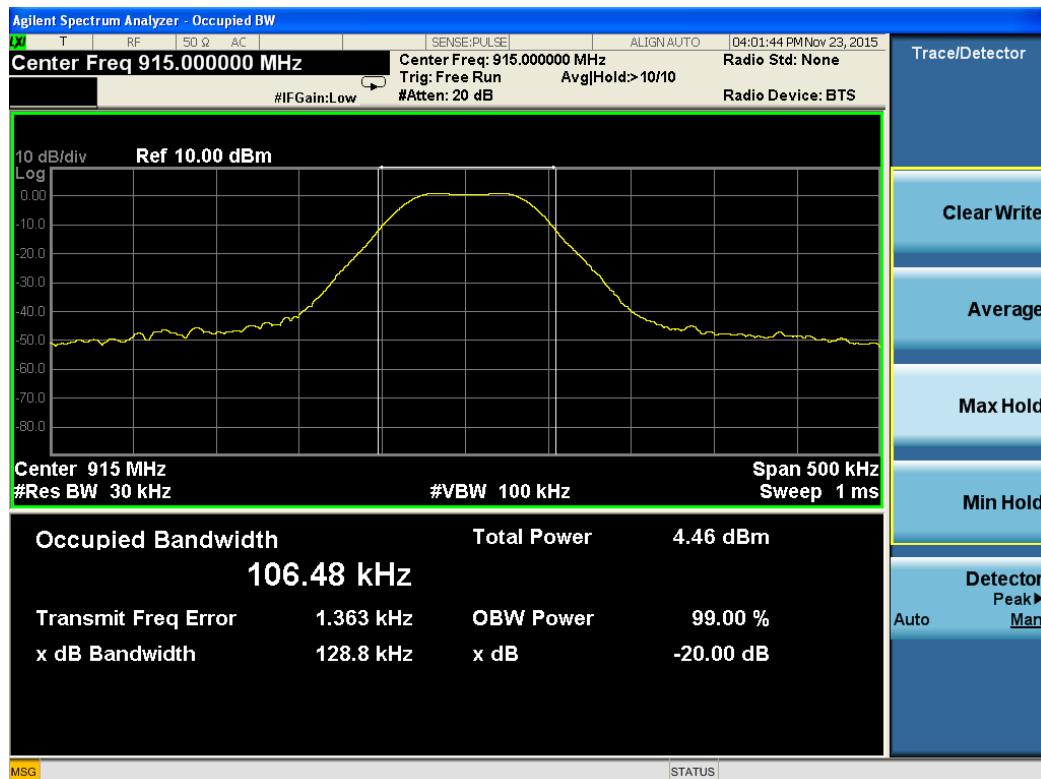

-----THE END OF REPORT-----