



TEST REPORT

Applicant: Autel Robotics Co., Ltd.

Address: 601,701,801,901, Block B1, Nanshan iPark, No. 1001 Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, 518055, China

Product Name: EVO Max

FCC ID: 2AGNTMDX600958A

Standard(s): 47 CFR Part 15, Subpart C(15.255)
ANSI C63.10-2020 +Cor.1-2023

Report Number: 2402A51128E-RF-00BA2

Report Date: 2025/1/11

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Reviewed By: Pedro Yun

Approved By: Gavin Xu

Title: Project Engineer

Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	5
1.2 ACCESSORY INFORMATION.....	5
1.3 ANTENNA INFORMATION DETAIL▲.....	5
1.4 EQUIPMENT MODIFICATIONS	5
2. SUMMARY OF TEST RESULTS	6
3. DESCRIPTION OF TEST CONFIGURATION	7
3.1 EUT OPERATION CONDITION.....	7
3.2 EUT EXERCISE SOFTWARE.....	7
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	7
3.4 SUPPORT CABLE LIST AND DETAILS	7
3.5 BLOCK DIAGRAM OF TEST SETUP	8
3.6 TEST FACILITY.....	9
3.7 MEASUREMENT UNCERTAINTY	9
4. REQUIREMENTS TEST RESULTS	10
4.1 AC LINE CONDUCTED EMISSIONS.....	10
4.2 PEAK EIRP AND TRANSMITTER OFF-TIMES	11
4.2.1 Applicable Standard.....	11
4.2.2 EUT Setup.....	11
4.2.3 Test Procedure	12
4.2.4 Test Result	13
4.3 EMISSION BANDWIDTH:	18
4.3.1 Applicable Standard.....	18
4.3.2 EUT Setup.....	18
4.3.3 Test Procedure	19
4.3.4 Test Data	20
4.4 RADIATED EMISSIONS	25
4.4.1 Applicable Standard.....	25
4.4.2 EUT Setup.....	25
4.4.3 EMI Test Receiver & Spectrum Analyzer Setup	28
4.4.4 Test Procedure	29
4.4.5 Corrected Amplitude & Margin Calculation.....	30
4.4.6 Test Data	31
4.5 FREQUENCY STABILITY.....	41
4.5.1 Applicable Standard.....	41
4.5.2 EUT Setup Block Diagram	41

4.5.3 Test Procedure	41
4.5.3 Test Result	42
4.6 OPERATION RESTRICTION AND GROUP INSTALLATION	44
4.6.1 Applicable Standard.....	44
4.6.2 Result	44
4.7 ANTENNA REQUIREMENT.....	45
4.7.1 Applicable Standard.....	45
4.7.2 Judgment	45
EXHIBIT A - TEST SETUP PHOTOGRAPHS.....	46
EXHIBIT B - RF EXPOSURE EVALUATION	47
MAXIMUM PERMISSIBLE EXPOSURE (MPE).....	47
APPLICABLE STANDARD.....	47
PROCEDURE	47
CALCULATED RESULT.....	48

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402A51128E-RF-00BA2	Class II Permissive Change Report	2025/1/11

1. GENERAL INFORMATION

1.1 General Description of Equipment under Test

EUT Name:	EVO Max
EUT Model:	MDX
Operation Frequency Range:	61.47-62GHz(Front/Top Radar) 60.57-61.1GHz(Rear/Bottom Radar)
Maximum Peak EIRP:	13.04 dBm(Front Radar) 8.80 dBm(Rear Radar) 11.12 dBm(Top Radar) 8.77 dBm(Bottom Radar)
Modulation Type:	FMCW
Chirps Time[▲]:	20μs
Emission Designator:	N0N
Rated Input Voltage[▲]:	DC 14.88V from battery
Serial Number:	2WO3-1
EUT Received Date:	2024/12/28
EUT Received Status:	Good

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Esun Power Technology Co.,Ltd	MDX120W	Input: 100-240Vac,50/60Hz,3.0A Output: Main:17Vdc,7.06A; USB-C:5.0V,3.0A; 9.0V,3.0A;12.0V,2.5A Total Output Power:120.0W Max

1.3 Antenna Information Detail▲

Antenna Type	input impedance (Ohm)	Antenna Gain	Frequency Range
Microstrip Patch	50	7.2dBi	60-64 GHz
The design of compliance with §15.203:			
<input checked="" type="checkbox"/> Unit uses a permanently attached antenna.			
<input type="checkbox"/> Unit uses a unique coupling to the intentional radiator.			
<input type="checkbox"/> Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.			

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s)/Rule(s)	Description of Test	Result
§15.207(a)	AC Line Conducted Emissions	Not Applicable
§15.255(b)(3)	Peak EIRP and Transmitter Off-times	Compliant
§15.215, §15.255 (e)	Occupied Bandwidth	Compliant
§15.205, §15.209, §15.255(d)	Radiated Spurious Emissions	Compliant
§15.255 (f)	Frequency Stability	Compliant
§15.255 (a),(b),(h)	Operation Restriction And Group Installation	Compliant
§15.203	Antenna Requirement	Compliant
FCC §15.255(g) & §1.1310 & §2.1091	MAXIMUM PERMISSIBLE EXPOSURE (MPE)	Compliant

Note 1:

This is Class II permissive change application based on the original device, FCC ID: 2AGNTMDX600958A, which was granted on 2024/01/17. The changes based on original device as following:

1. Upgraded the radar software for better performance index, the upgrades reduced the power and decreased the frequency.

Based on the above changes, the above applicable items were tested because of RF parameters changed.

Note 2:

Not applicable for AC Line Conducted Emissions, the EUT was power by battery.

3. DESCRIPTION OF TEST CONFIGURATION

3.1 EUT Operation Condition

The system was configured for testing in production version with highest transmitter activity (on time), which was provided by the manufacturer. According to 15.31(c) and KDB 364244 D01 Meas 15.255 Radars v01, the device tested at Swept mode for FMCW modulation. The device was built in 4 radar modules, each module was tested separately except radiation emissions below 40GHz test simultaneously.

The EUT have 4 Radar modules operate on the frequency 60-64GHz:

Front Radar: 61.47-62GHz

Rear Radar: 60.57-61.1GHz

Top Radar: 61.47-62GHz

Bottom Radar: 60.57-61.1GHz

3.2 EUT Exercise Software

No software was used in test. The EUT transmit when EUT was power up.

3.3 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/

3.5 Block Diagram of Test Setup

Radiated Spurious Emissions:

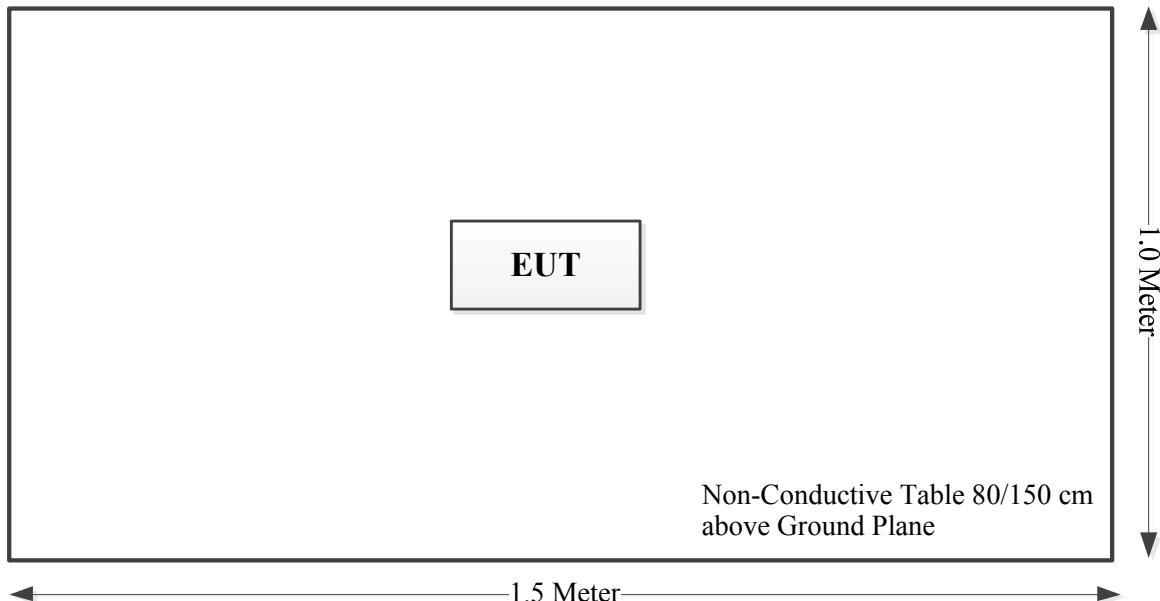

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz: 5.47 dB, 26.5GHz~40GHz: 5.63 dB 40~60G: 4.83dB, 60G~90G: 4.94dB, 90G~140G: 5.46dB, 140G~220G: 6.00dB, 220G~325G: 7.35dB
EIRP	4.94dB
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS TEST RESULTS

4.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery when operating.


4.2 Peak EIRP And Transmitter Off-times

4.2.1 Applicable Standard

FCC §15.255(b)(3)

Field disturbance sensors/radar devices deployed on unmanned aircraft may operate within the frequency band 60 – 64 GHz, provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.

4.2.2 EUT Setup

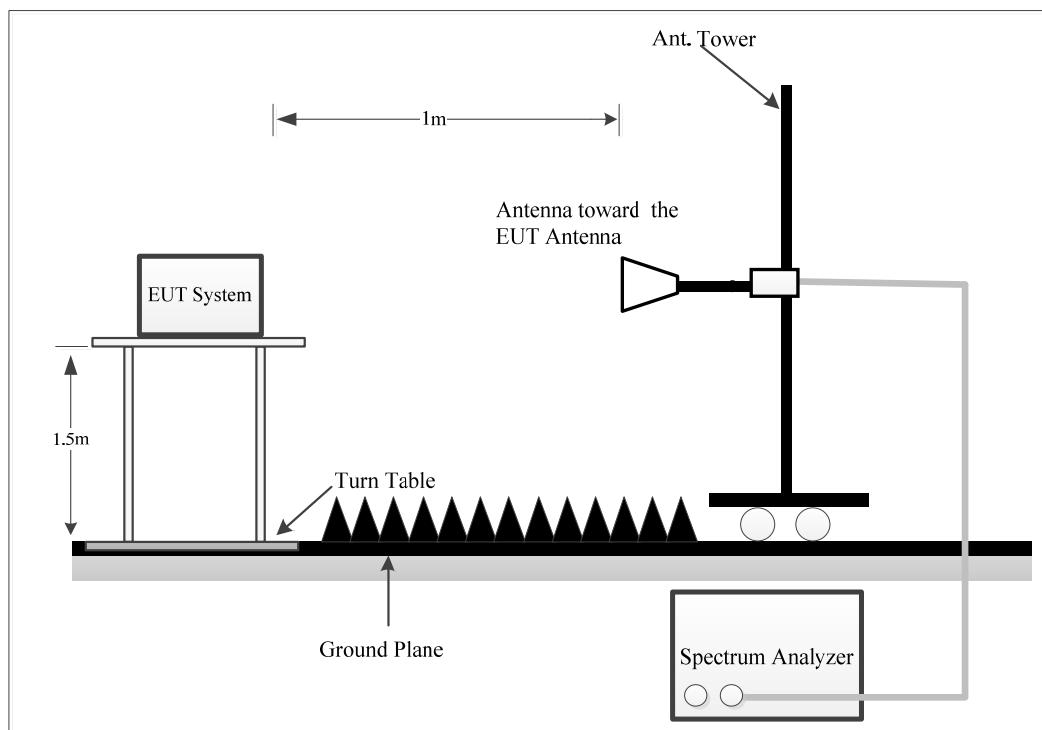

Place the measurement antenna at a measurement distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna. The EIRP test was performed at 1m distance, which was larger than the minimum test distance, please refer to section 4.4.4 for more detail.

4.2.3 Test Procedure

Refer to ANSI C63.10-2020 Clause 9.8

For radiated measurements:

- 1) Place the measurement antenna at a measurement distance that is in the far-field of the measurement antenna, in the far-field of the EUT antenna, and meets the measurement distance requirements for final radiated measurements as specified in 9.1.4.
- 2) Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission using the procedures of 9.7, noting that multiple peaks can be found at different beam orientations and/or polarizations.
- 3) Correct the power reading from the spectrum analyzer for any external gain and/or attenuation between the measurement antenna and the spectrum analyzer. This is the power at the output of the measurement antenna
- 4) Calculate the EIRP from the power at the output of the measurement antenna using Equation (22), and then convert to linear form using Equation (24).

$$EIRP = 21.98 - 20\log(\lambda) + 20\log(d_{\text{Meas}}) + P - G \quad (22)$$

where

$EIRP$ is the equivalent isotropic radiated power, in dBm
 λ is the wavelength of the emission under investigation [300/f(MHz)], in m
 d_{Meas} is the measurement distance, in m
 P is the power measured at the output of the measurement antenna, in dBm
 G is the gain of the measurement antenna, in dBi

NOTE—The measured power P includes all applicable instrument correction factors up to the connection to the measurement antenna.

- 5) Where applicable, calculate conducted output power from the EIRP using Equation (27).

For FMCW emissions, the procedures in 4.1.5.2.8 and Annex L shall be used.

4.2.4 Test Result

Serial Number:	2WO3-1	Test Date:	2025/1/5
Test Site:	Chamber B	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.4
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Chirps Correction Factor

Radar	Chirps Time (μs)	BW _{chirp} (MHz)	RBW (MHz)	Chirps Correction Factor (dB)
Front	20	513.81	1	10.56
Rear	20	517.90	1	10.60
Top	20	513.96	1	10.57
Bottom	20	513.81	1	10.56

Refer to ANSI C63.10-2020/cor 1-2023 Annex L.1. The chirps correction factor was calculated using the formula:

$$\alpha = \frac{1}{\left(1 + \left[\left(\frac{2 \times \ln(2)}{\pi}\right)^2 \times \left(\frac{BW_{Chirp}}{T_{Chirp} \times RBW^2}\right)^2\right]\right)^{0.25}}$$

where

α is the reduction in amplitude
 BW_{Chirp} is the FMCW Chirp Bandwidth
 T_{Chirp} is the FMCW Chirp Time

Front Radar**EIRP:**

Frequency (GHz)	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)	E-Field@1m (dB μ V/m)	Chirps Correction Factor (dB)	EIRP (dBm)	Limit (dBm)
61.7	65.10	PK	V	42.18	107.28	10.56	13.04	20.00

Factor = Antenna Factor

EIRP = Reading + Factor + $20\log(\text{Measurement distance}) - 104.8$

Measurement distance = 1m


The Mixers and it's RF cables is compose a system for calibration.

The test data recorded was the maximum polarization.

Transmitter Off-times

Transmitter On (ms)	Observation Time (ms)	Sum of continuous transmitter off-times (ms)	Limit (ms)
11.1	33	21.9	≥ 16.5

Note: Sum of Continuous Transmitter Off-times = Observation Time(33ms) - Ton

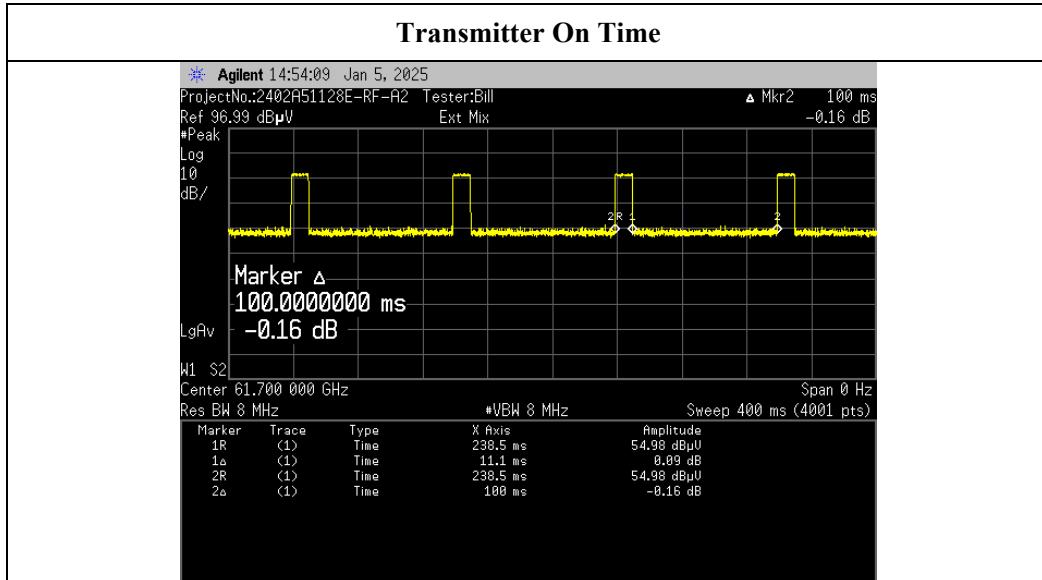

**Rear Radar
EIRP:**

Frequency (GHz)	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)	E-Field@1m (dB μ V/m)	Chirps Correction Factor (dB)	EIRP (dBm)	Limit (dBm)
60.8	60.97	PK	V	42.03	103.00	10.60	8.80	20.00

Factor = Antenna Factor

EIRP = Reading + Factor + $20\log(\text{Measurement distance}) - 104.8$

Measurement distance = 1m


The Mixers and its RF cables is compose a system for calibration.

The test data recorded was the maximum polarization.

Transmitter Off-times

Transmitter On (ms)	Observation Time (ms)	Sum of continuous transmitter off-times (ms)	Limit (ms)
11.39	33	21.61	≥ 16.5

Note: Sum of Continuous Transmitter Off-times = Observation Time(33ms) - Ton

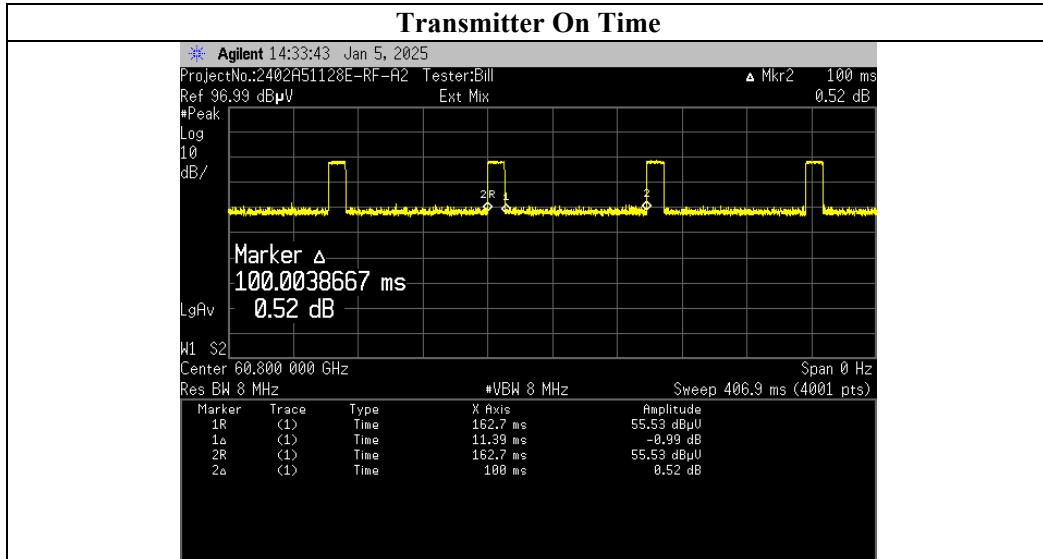

**Top Radar
EIRP:**

Frequency (GHz)	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)	E-Field@1m (dB μ V/m)	Chirps Correction Factor (dB)	EIRP (dBm)	Limit (dBm)
61.73	63.17	PK	V	42.18	105.35	10.57	11.12	20.00

Factor = Antenna Factor

EIRP = Reading + Factor + $20\log(\text{Measurement distance}) - 104.8$

Measurement distance = 1m


The Mixers and it's RF cables is compose a system for calibration.

The test data recorded was the maximum polarization.

Transmitter Off-times

Transmitter On (ms)	Observation Time (ms)	Sum of continuous transmitter off-times (ms)	Limit (ms)
12	33	21	≥ 16.5

Note: Sum of Continuous Transmitter Off-times = Observation Time(33ms) - Ton

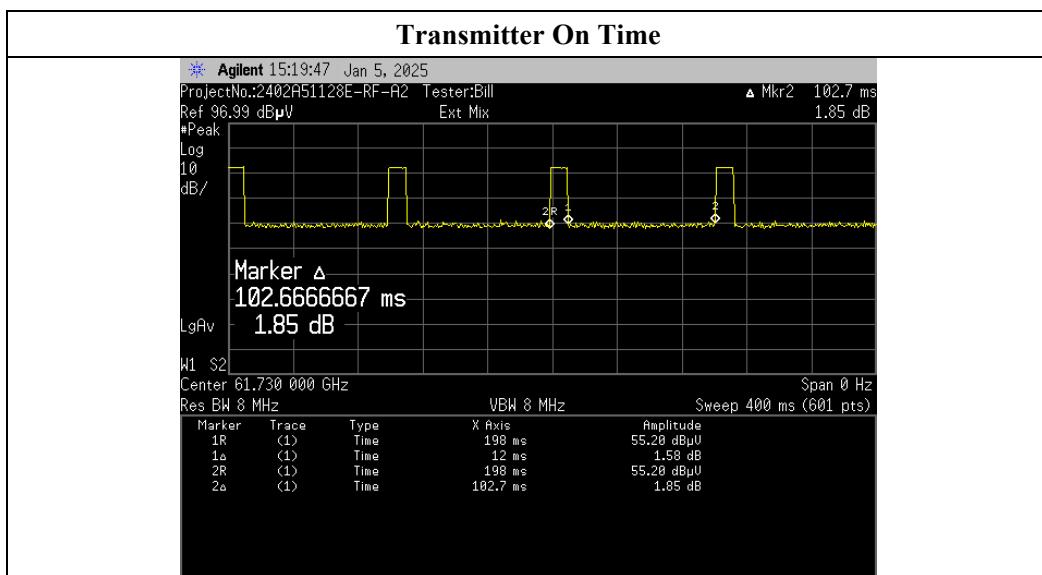

Bottom Radar**EIRP:**

Frequency (GHz)	Reading (dB μ V)	Detector	Polar (H/V)	Factor (dB/m)	E-Field@1m (dB μ V/m)	Chirps Correction Factor (dB)	EIRP (dBm)	Limit (dBm)
60.8	60.98	PK	V	42.03	103.01	10.56	8.77	20.00

Factor = Antenna Factor

EIRP = Reading + Factor + $20\log(\text{Measurement distance}) - 104.8$

Measurement distance = 1m


The Mixers and it's RF cables is compose a system for calibration.

The test data recorded was the maximum polarization.

Transmitter Off-times

Transmitter On (ms)	Observation Time (ms)	Sum of continuous transmitter off-times (ms)	Limit (ms)
12	33	21	≥ 16.5

Note: Sum of Continuous Transmitter Off-times = Observation Time(33ms) - Ton

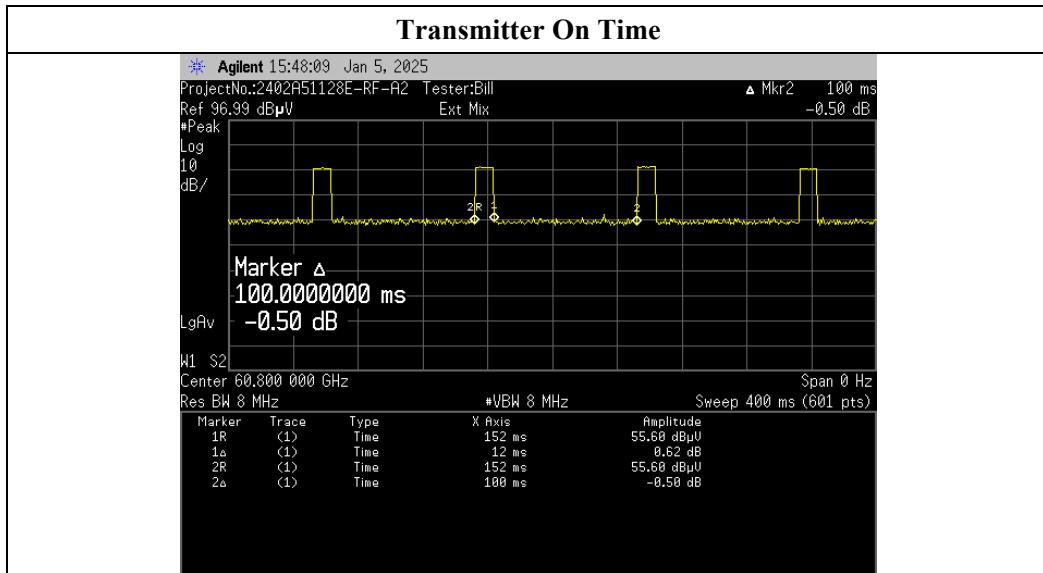


4.3 Emission Bandwidth:

4.3.1 Applicable Standard

KDB 364244 D01 Meas 15.255 Radars v01

For other than pulsed radar transmitters, the fundamental emission bandwidth is presumed to be “...the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage $\beta/2$ of the total mean power of a given emission. Unless otherwise specified in an ITU-R Recommendation for the appropriate class of emission, the value of $\beta/2$ should be taken as 0.5%,” as defined in §2.1(c) of the FCC rules. This is also known as the 99% occupied bandwidth (OBW).

4.3.2 EUT Setup

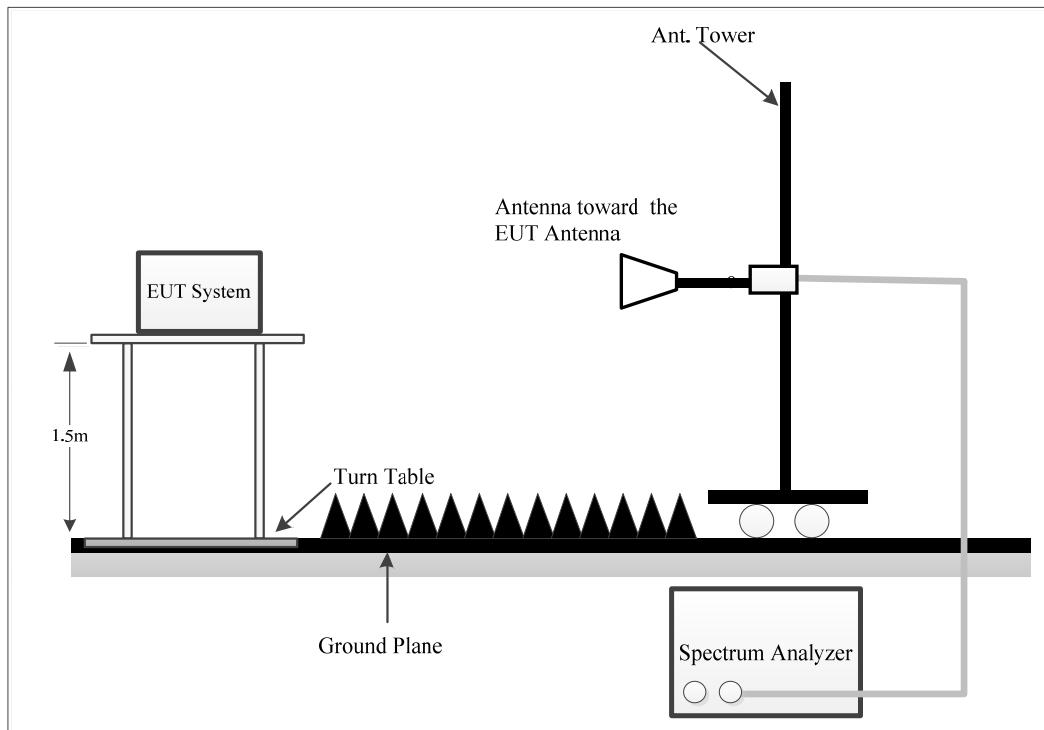

Place the measurement antenna in the main beam of the EUT then maximize the fundamental emission, noting that multiple peaks can be found at different beam orientations and/or polarizations.

4.3.3 Test Procedure

KDB 364244 D01 Meas 15.255 Radars v01

Clauses 9.3 and 9.4 of C63.10-2020 provide standardized procedures recognized by the FCC for measuring both the relative (-10 dB) bandwidth and the 99% OBW.

The occupied bandwidth (OBW) is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

a) The following procedure shall be used for measuring 99% power bandwidth: Use the following spectrum analyzer settings:

- 1) Span equal to approximately 1.5 times the OBW, centered on the carrier frequency
- 2) RBW, prefer 1% to 5% of OBW, or a minimum of 1 MHz if this is not possible due to a large OBW
- 3) VBW approximately $3 \times$ RBW
- 4) Set the reference level of the instrument as required to reduce the chance of the signal amplitude exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.1.6.
- 5) Sweep = No faster than coupled (auto) time.
- 6) Detector function = peak.
- 7) Trace = max-hold.

b) The EUT shall be transmitting at its maximum data rate. Allow the trace to stabilize.

c) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.

d) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

e) Repeat this test for each modulation scheme using the guidance of 5.6.2.1.

4.3.4 Test Data

Serial Number:	2WO3-1	Test Date:	2025/1/5
Test Site:	Chamber B	Test Mode:	Swept
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:					
Temperature: (°C)	21.4	Relative Humidity: (%)	30	ATM Pressure: (kPa)	101.4


Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28


* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Test Mode	99% Occupied Bandwidth (MHz)	F _L (GHz)	Limit F _L (GHz)	F _H (GHz)	Limit F _H (GHz)
Front	513.81	61.4778	60	61.9916	64
Rear	517.903	60.5764	60	61.0943	64
Top	513.96	61.4775	60	61.9915	64
Bottom	513.81	60.5778	60	61.0916	64

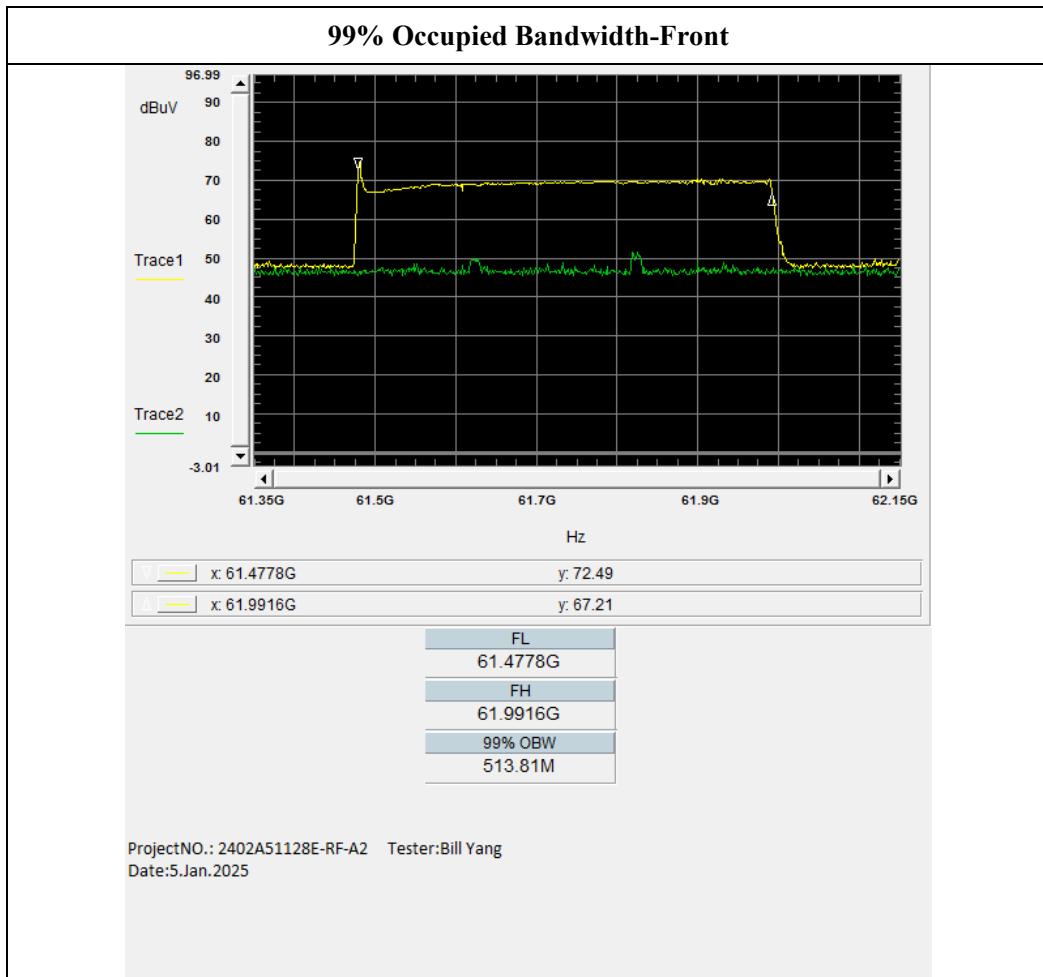

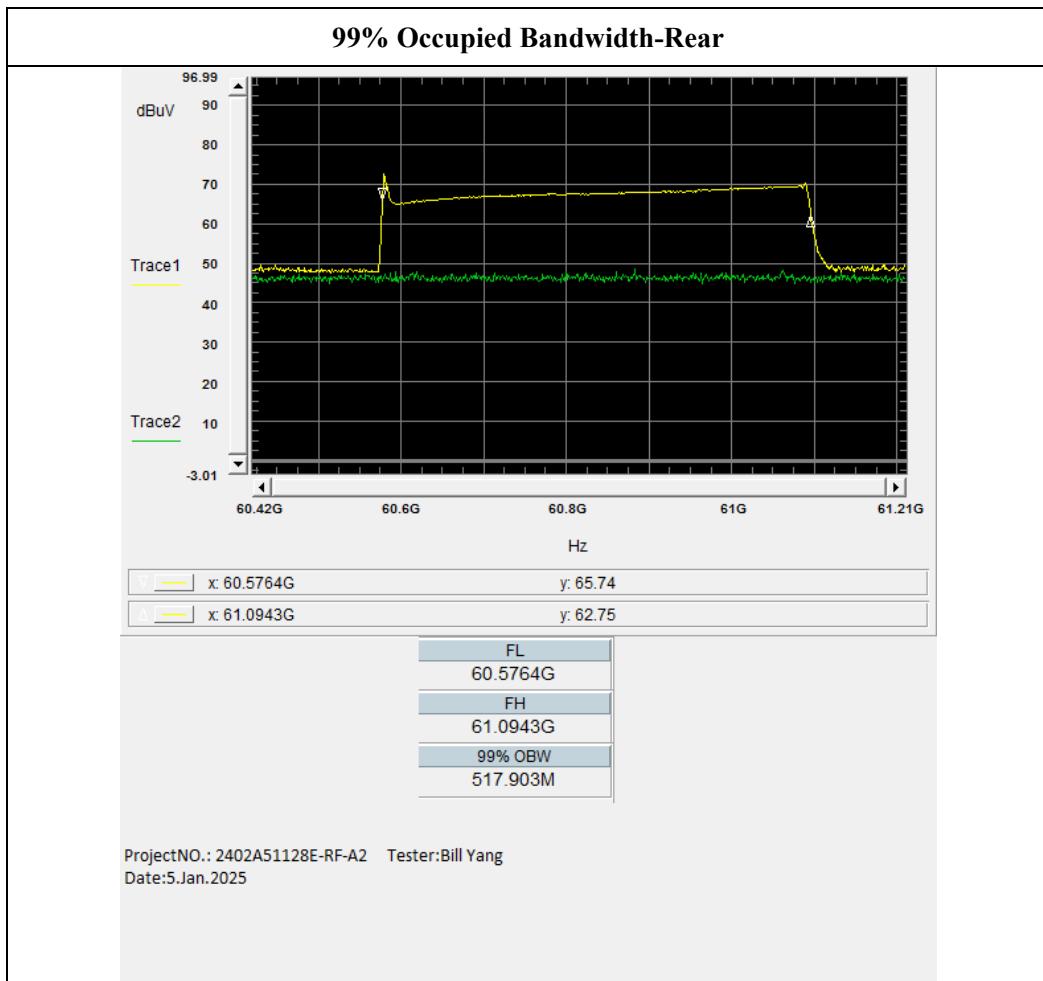

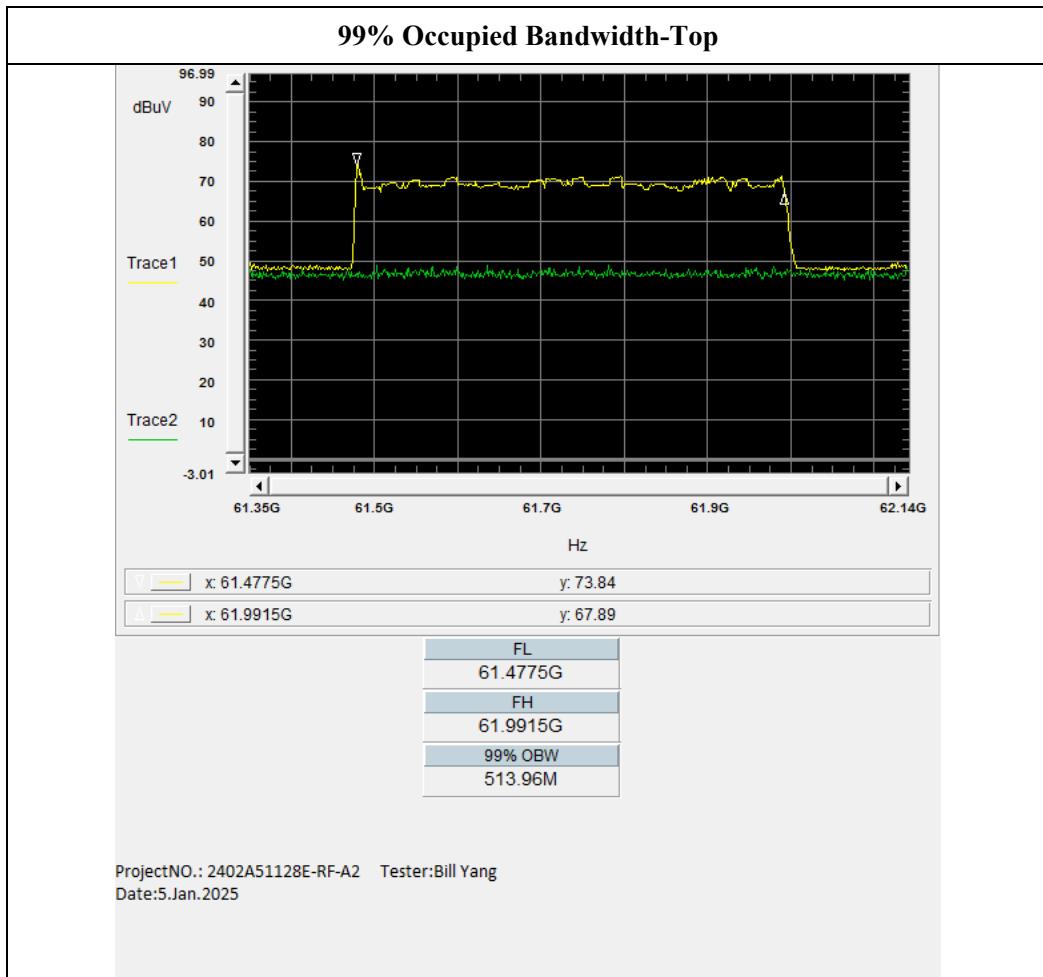

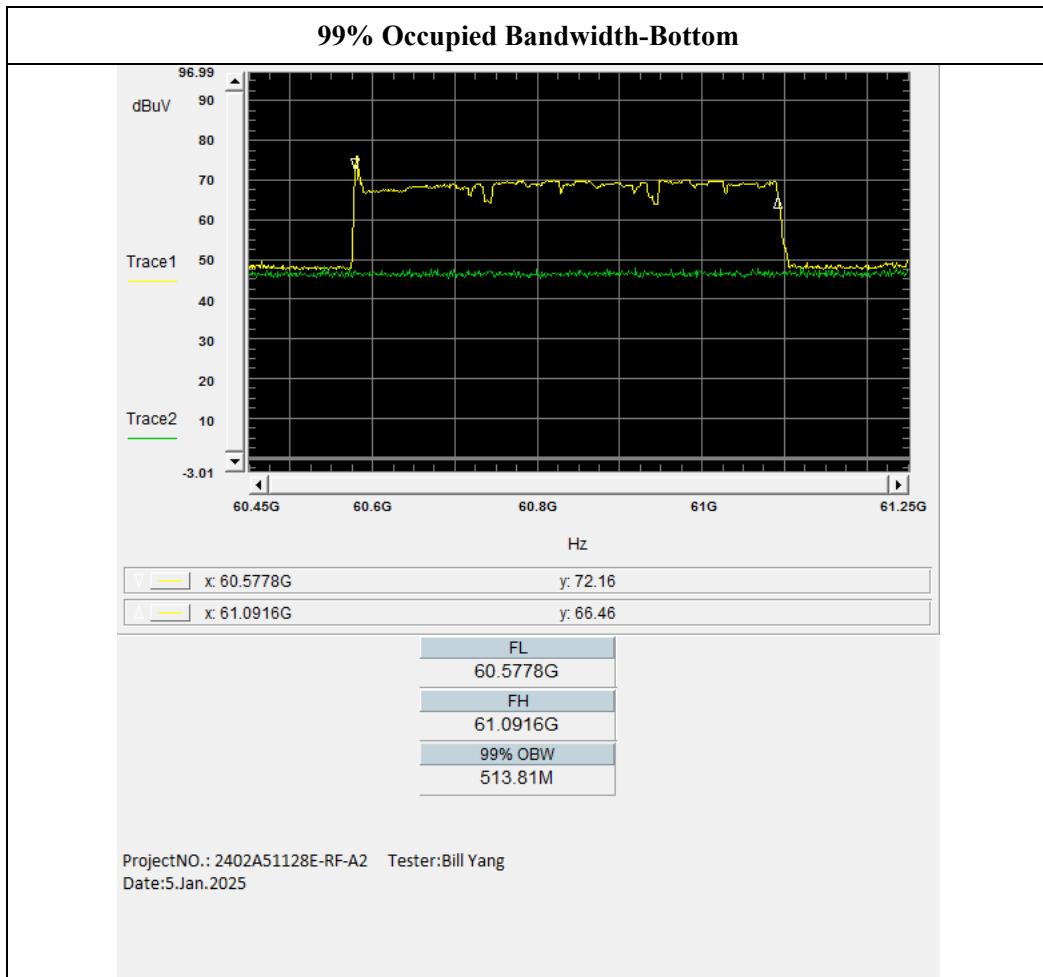

4.4 Radiated Emissions

4.4.1 Applicable Standard


FCC §15.255(d)



Limits on spurious emissions:



- (1) The power density of any emissions outside the 57-71 GHz band shall consist solely of spurious emissions.
- (2) Radiated emissions below 40 GHz shall not exceed the general limits in § 15.209.
- (3) Between 40 GHz and 200 GHz, the level of these emissions shall not exceed 90 pW/cm² at a distance of 3 meters.
- (4) The levels of the spurious emissions shall not exceed the level of the fundamental emission.


4.4.2 EUT Setup

9kHz-30MHz:

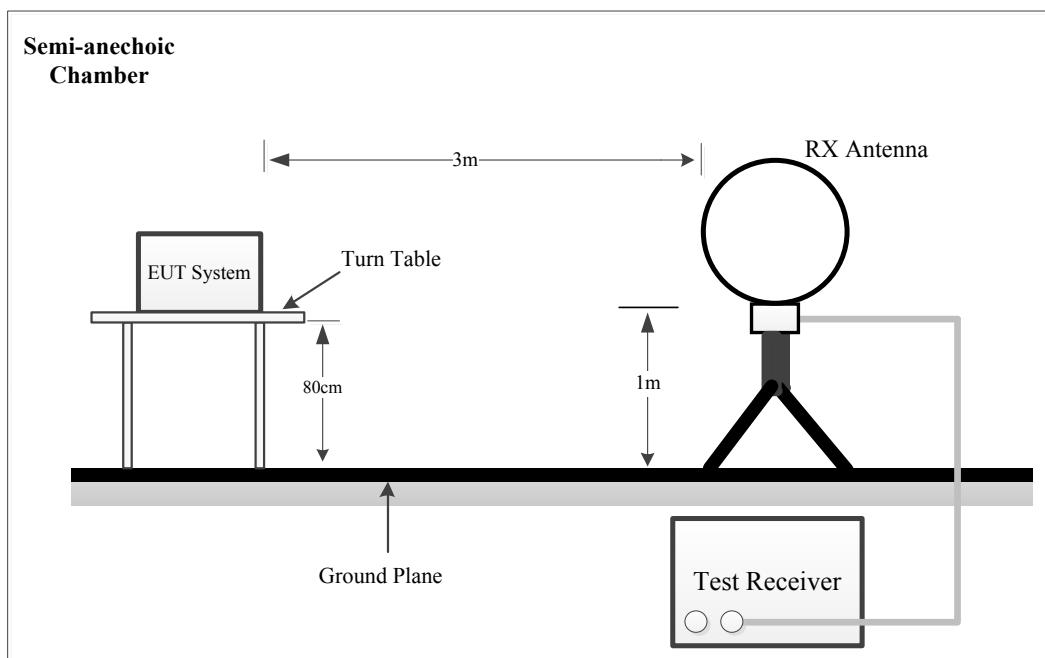

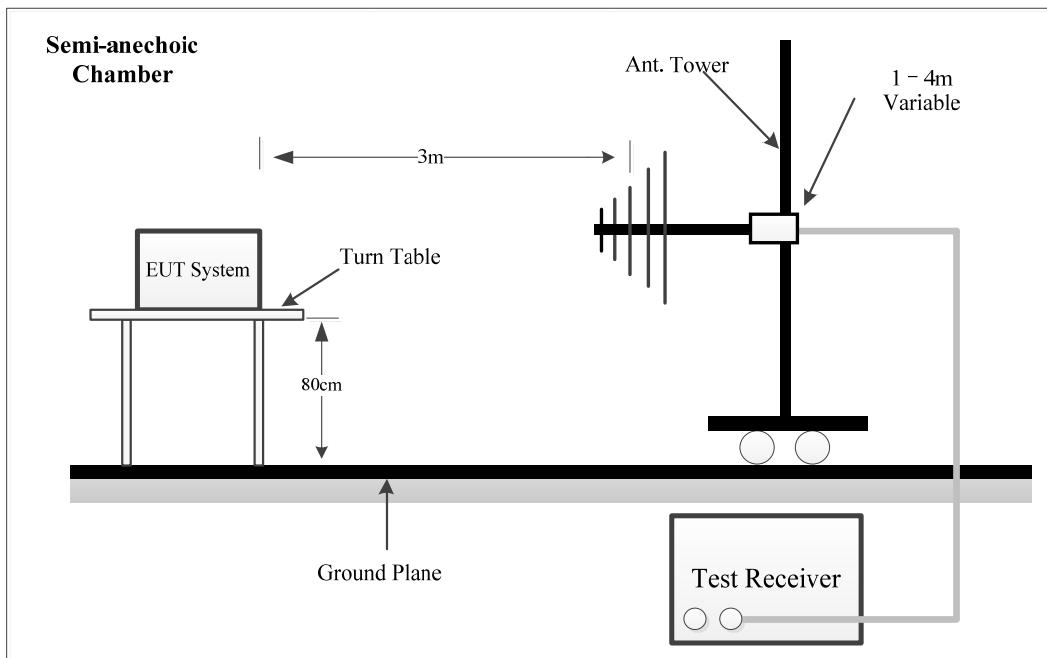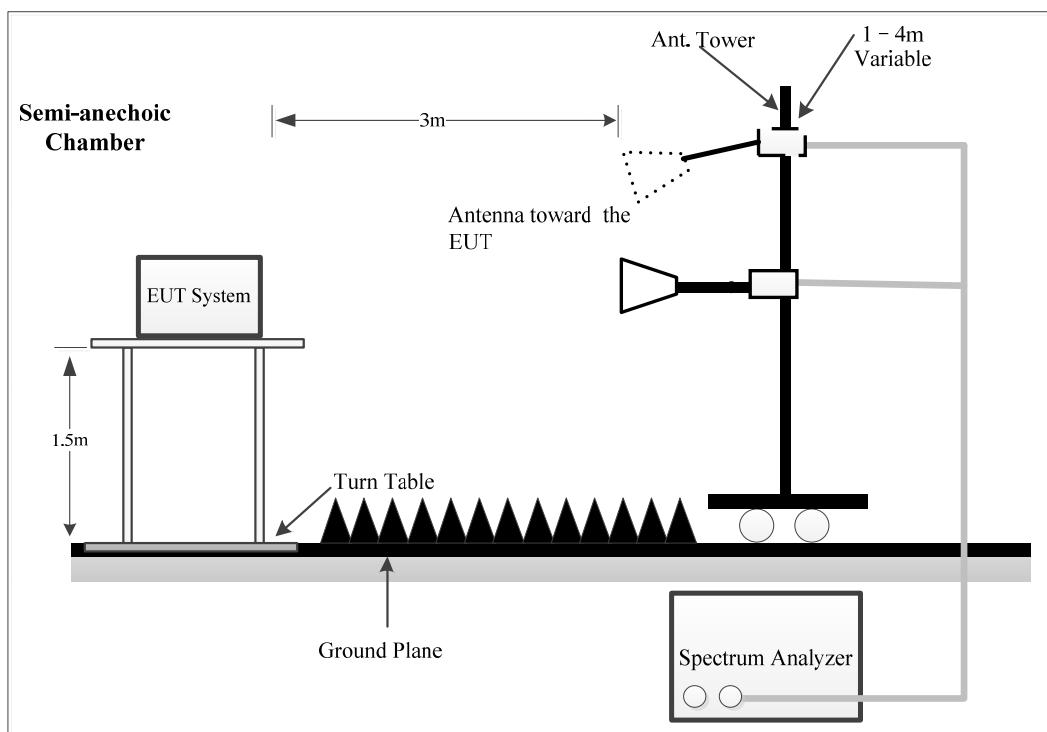30MHz~1GHz:**1~26.5 GHz:**

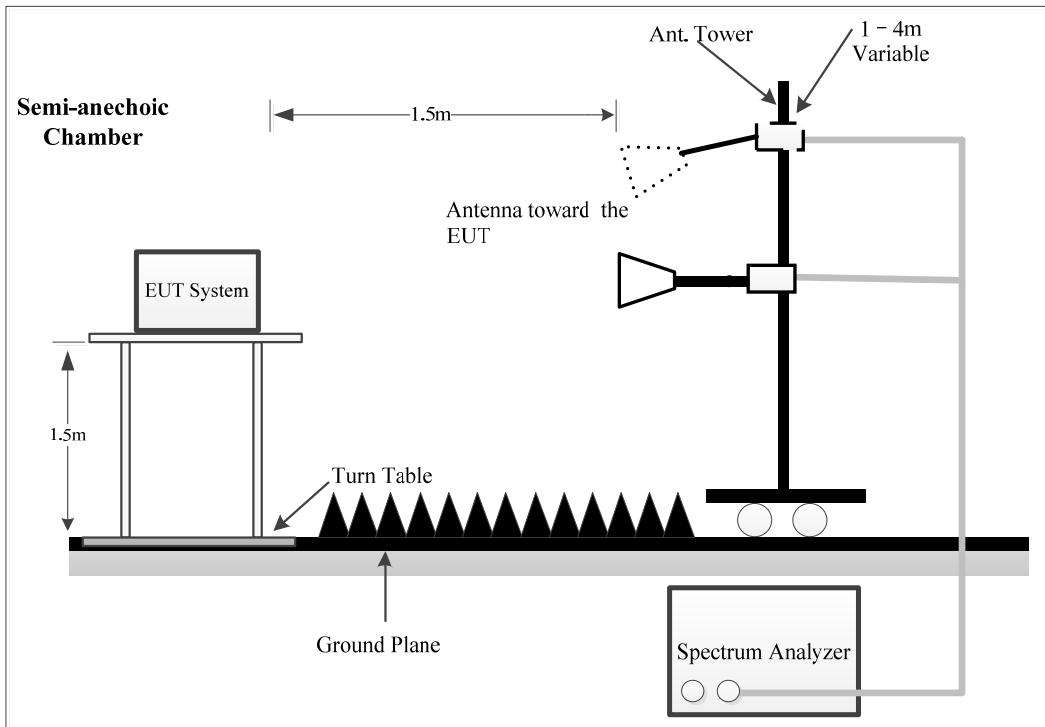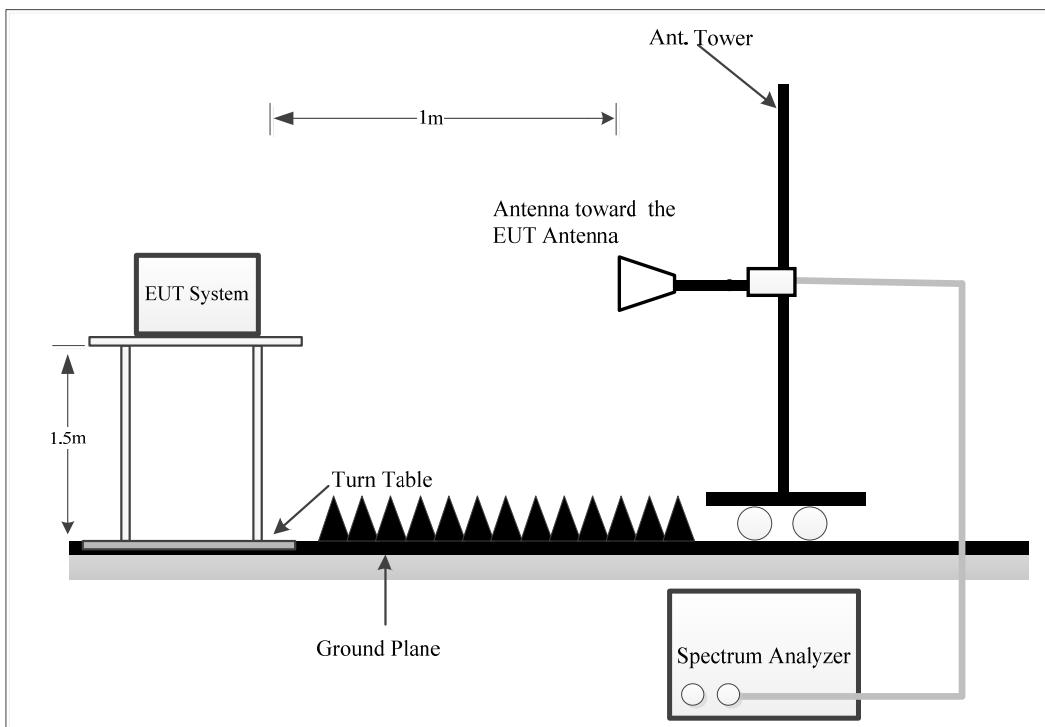26.5~40 GHz:**40~90 GHz:**

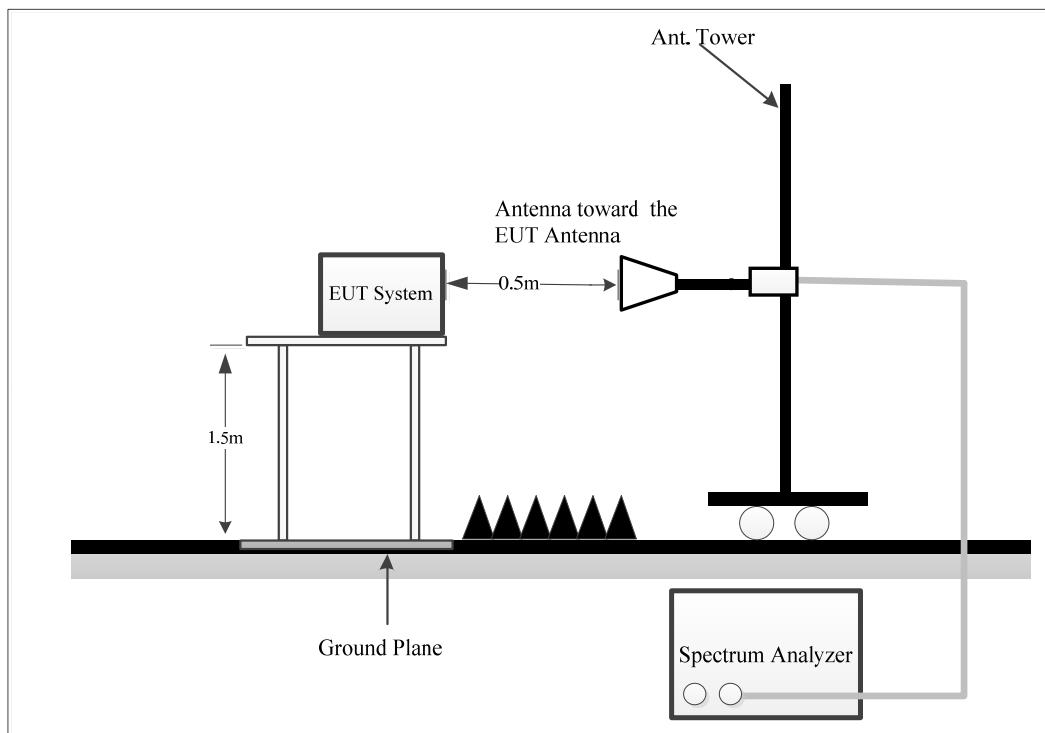90~200 GHz:**Above 40GHz:**

The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations, at the distance of 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200 GHz.

The radiated emission and out of band emission tests were performed in the 3 meters chamber, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209/15.205/15.255 limits.

4.4.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 200 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:
9kHz-1000MHz:

Frequency Range	RBW	Video B/W	IF B/W	Measurement	Detector
9 kHz – 150 kHz	300 Hz	1 kHz	200 Hz	QP/Average	QP/Average
150 kHz – 30 MHz	10 kHz	30 kHz	9 kHz	QP/Average	QP/Average
30 MHz – 1000 MHz	/	/	120 kHz	QP	QP
	100 kHz	300 kHz	/	PK	PK

1-40GHz:

Pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	5kHz	PK

Final measurement for emission identified during the pre-scan:

Frequency Range	Measurement	RBW	Video B/W	Detector
1-40 GHz	Peak	1MHz	3 MHz	PK
	AV	1MHz	10Hz	PK

Above 40GHz:

Frequency Range	Measurement	RBW	Video B/W	Detector
Above 40GHz	AV	1MHz	3MHz	AV

Note: Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-30MHz except 9 – 90 kHz, 110 – 490 kHz, employing an average detector.

4.4.4 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.10, and 9.11.

A Maximizing procedure was performed to ensure that the highest emissions from the EUT were actually measured in all of the Test Arrangements of the EUT and Local Support Equipment.

All emissions under the average limit and under the noise floor have not recorded in the report. According to C63.10, the 26.5-40GHz test result shall be extrapolated to the specified distance using an extrapolation factor of 20dB/decade from 3m to 1.5m

Distance extrapolation factor = $20 \log (\text{specific distance [3m]}/\text{test distance [1.5m]})$ dB= 6.0 dB

For above 40GHz:

External harmonic mixers are utilized. The antenna is scanned around the entire perimeter surface of the EUT, in both horizontal and vertical polarizations. The Mixers and it's RF cables is compose a system for calibration, the conversion factor was added into the test Spectrum Analyzer in testing.

The far-field boundary is given in ANSI C63.10-2020:

$$R_m = 2D^2 / \lambda$$

Where:

D is the largest dimension of the antenna aperture in m and

λ is the free-space wavelength in m at the frequency of measurement.

The minimum test distance for the frequency range 40GHz-200GHz determine as below:

Model	Frequency Range (GHz)	Largest Dimension of the Horn Antenna (mm)	Minimum Test Distance R_m (m)
M19RH	40-60	46.3	0.86
861/385	50-75	43.7	0.95
M12RH	60-90	30.02	0.54
M08RH	90-140	19.7	0.36
M05RH	140-220	12.5	0.23

Note: the test distances used were 1.0 m from 40 GHz to 90 GHz, and 0.5 m from 90 GHz to 200GHz, it can be seen that the EUT was always in the Far-field of the Receive Antenna during all Radiated Emissions Tests.

4.4.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

For 9kHz-26.5GHz:

Result = Reading + Factor

For 26.5GHz-40GHz

Result = Reading + Factor-Distance extrapolation Factor

Note: the antenna JB3 was calibrated with 6dB Attenuator, the antenna factor includes the insertion loss of the Attenuator.

The “Margin” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.4.6 Test Data

Serial Number:	2WO3-1	Test Date:	Below 1GHz: 2025/1/9~2025/1/10 Above 1GHz: 2025/1/5~2025/1/9
Test Site:	Chamber 10m , Chamber B	Test Mode:	Transmitting
Tester:	Zoo Zou, Nat Zhou , Bill Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	21.4~22	Relative Humidity: (%)	30~43	ATM Pressure: (kPa)	101.4~102.3
-------------------	---------	------------------------	-------	---------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2023/2/22	2026/2/21
Ducommun Technologies	Horn Antenna	ARH-2823-02	1007726-01 1302	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004 #0001	2024/11/17	2025/11/16
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001 #0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/15
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
Audix	Test Software	E3	191218 V9	N/A	N/A
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26
OML	Waveguide Mixer	WR19/M19HWD	U60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M19RH	11648-01	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR12/M12HWD	E60120-1	2023/2/16	2026/2/15

OML	Horn Antenna	M12RH	E60120-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR08/M08HWD	F60313-1	2023/2/16	2026/2/15
OML	Horn Antenna	M08RH	F60313-2	2023/2/27	2026/2/26
OML	Waveguide Mixer	WR05/M05HWD	G60106-1	2023/2/16	2026/2/15
OML	Horn Antenna	M05RH	G60106-2	2023/2/27	2026/2/26
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28

** Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*


Test Data:

Please refer to the below table and plots.

After pre-scan in the X, Y and Z axes of orientation, the worst case is refer to table and plots.

1) 9kHz~30MHz(All Radar Modules transmit simultaneously)


Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

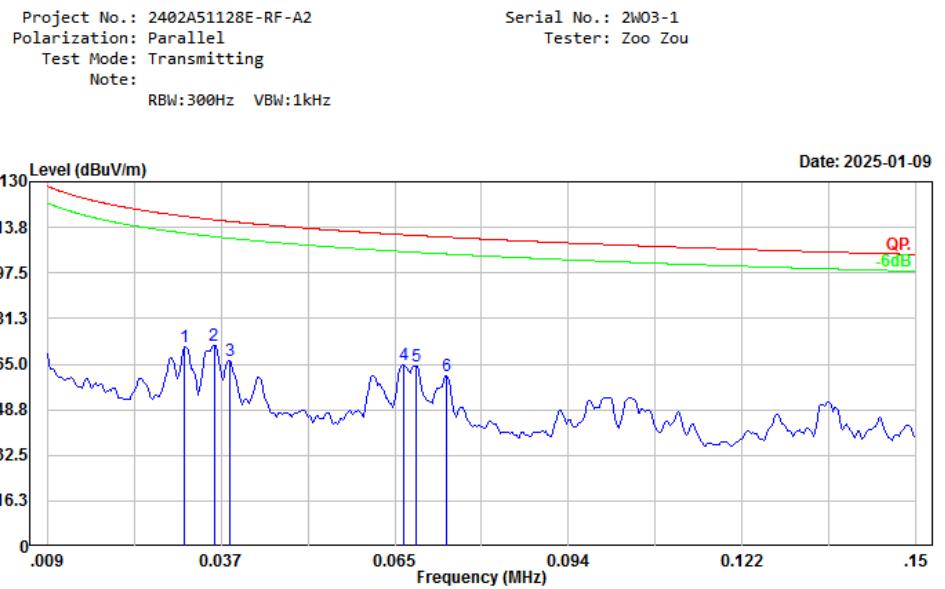

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
<hr/>							
1	0.031	23.59	47.32	70.91	117.70	46.79	Peak
2	0.036	25.26	46.47	71.73	116.46	44.73	Peak
3	0.039	20.32	46.02	66.34	115.87	49.53	Peak
4	0.067	23.68	41.15	64.83	111.11	46.28	Peak
5	0.069	23.47	40.80	64.27	110.86	46.59	Peak
6	0.074	20.72	39.94	60.66	110.24	49.58	Peak

Project No.: 2402A51128E-RF-A2
Polarization: Parallel
Test Mode: Transmitting
Note:
RBW:10kHz VBW:30kHz

Serial No.: 2W03-1
Tester: Zoo Zou

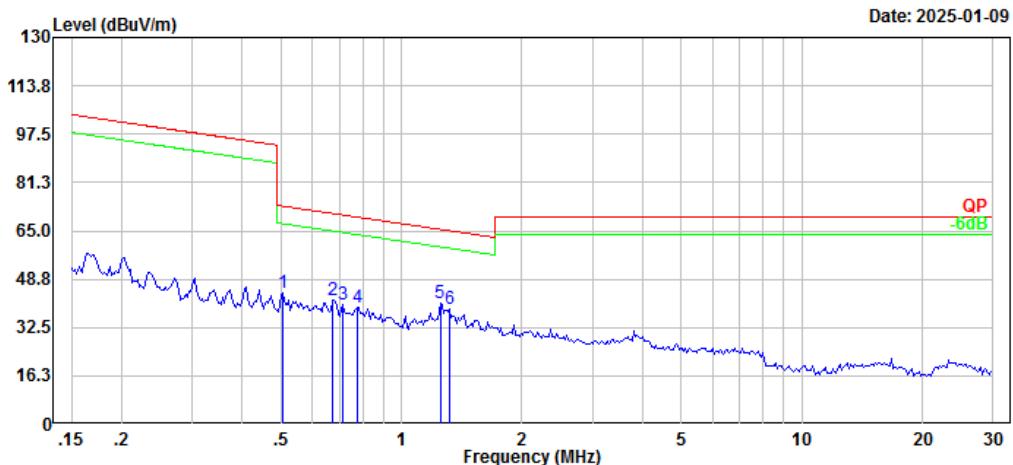


No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
<hr/>							
1	0.507	20.59	23.45	44.04	73.49	29.45	Peak
2	0.675	20.22	21.71	41.93	70.95	29.02	Peak
3	0.712	18.74	21.36	40.10	70.48	30.38	Peak
4	0.775	18.52	20.78	39.30	69.73	30.43	Peak
5	1.249	25.17	15.45	40.62	65.50	24.88	Peak
6	1.317	23.51	15.15	38.66	65.03	26.37	Peak

2) 30MHz-1GHz(All Radar Modules transmit simultaneously)

Project No.: 2402A51128E-RF-A2
Polarization: Horizontal
Test Mode: Transmitting
Note:
RBW:100kHz VBW:300kHz

Serial No.: 2W03-1
Tester: Zoo Zou

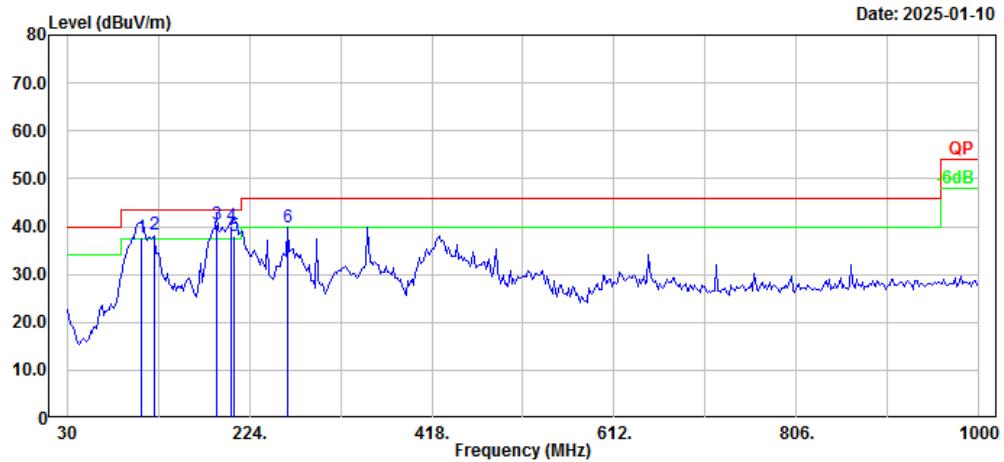

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	109.540	49.29	-11.49	37.80	43.50	5.70	QP
2	123.120	48.40	-9.92	38.48	43.50	5.02	QP
3	189.080	52.61	-12.15	40.46	43.50	3.04	QP
4	204.600	52.10	-12.01	40.09	43.50	3.41	QP
5	208.480	50.29	-12.40	37.89	43.50	5.61	QP
6	264.740	50.57	-10.63	39.94	46.00	6.06	Peak


Project No.: 2402A51128E-RF-A2
Polarization: Vertical

Serial No.: 2W03-1
Tester: Zoo Zou

Test Mode: Transmitting


Note:

RBW:100kHz VBW:300kHz

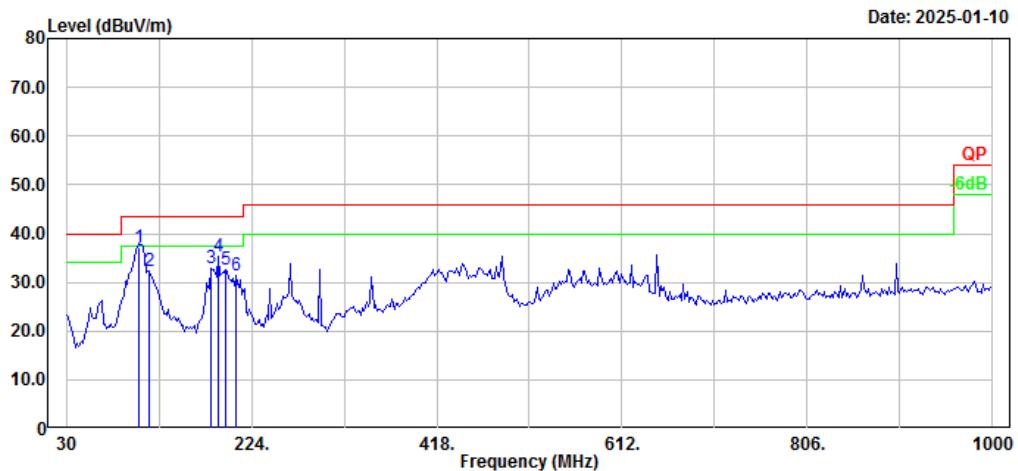

No.	Frequency (MHz)	Reading (dB μ V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Detector
1	105.660	49.70	-12.68	37.02	43.50	6.48	QP
2	117.300	42.51	-10.33	32.18	43.50	11.32	Peak
3	181.320	45.29	-12.33	32.96	43.50	10.54	Peak
4	189.080	47.40	-12.15	35.25	43.50	8.25	Peak
5	196.840	44.30	-11.72	32.58	43.50	10.92	Peak
6	208.480	43.68	-12.40	31.28	43.50	12.22	Peak

2) 1GHz-40GHz(All Radar Modules transmit simultaneously):

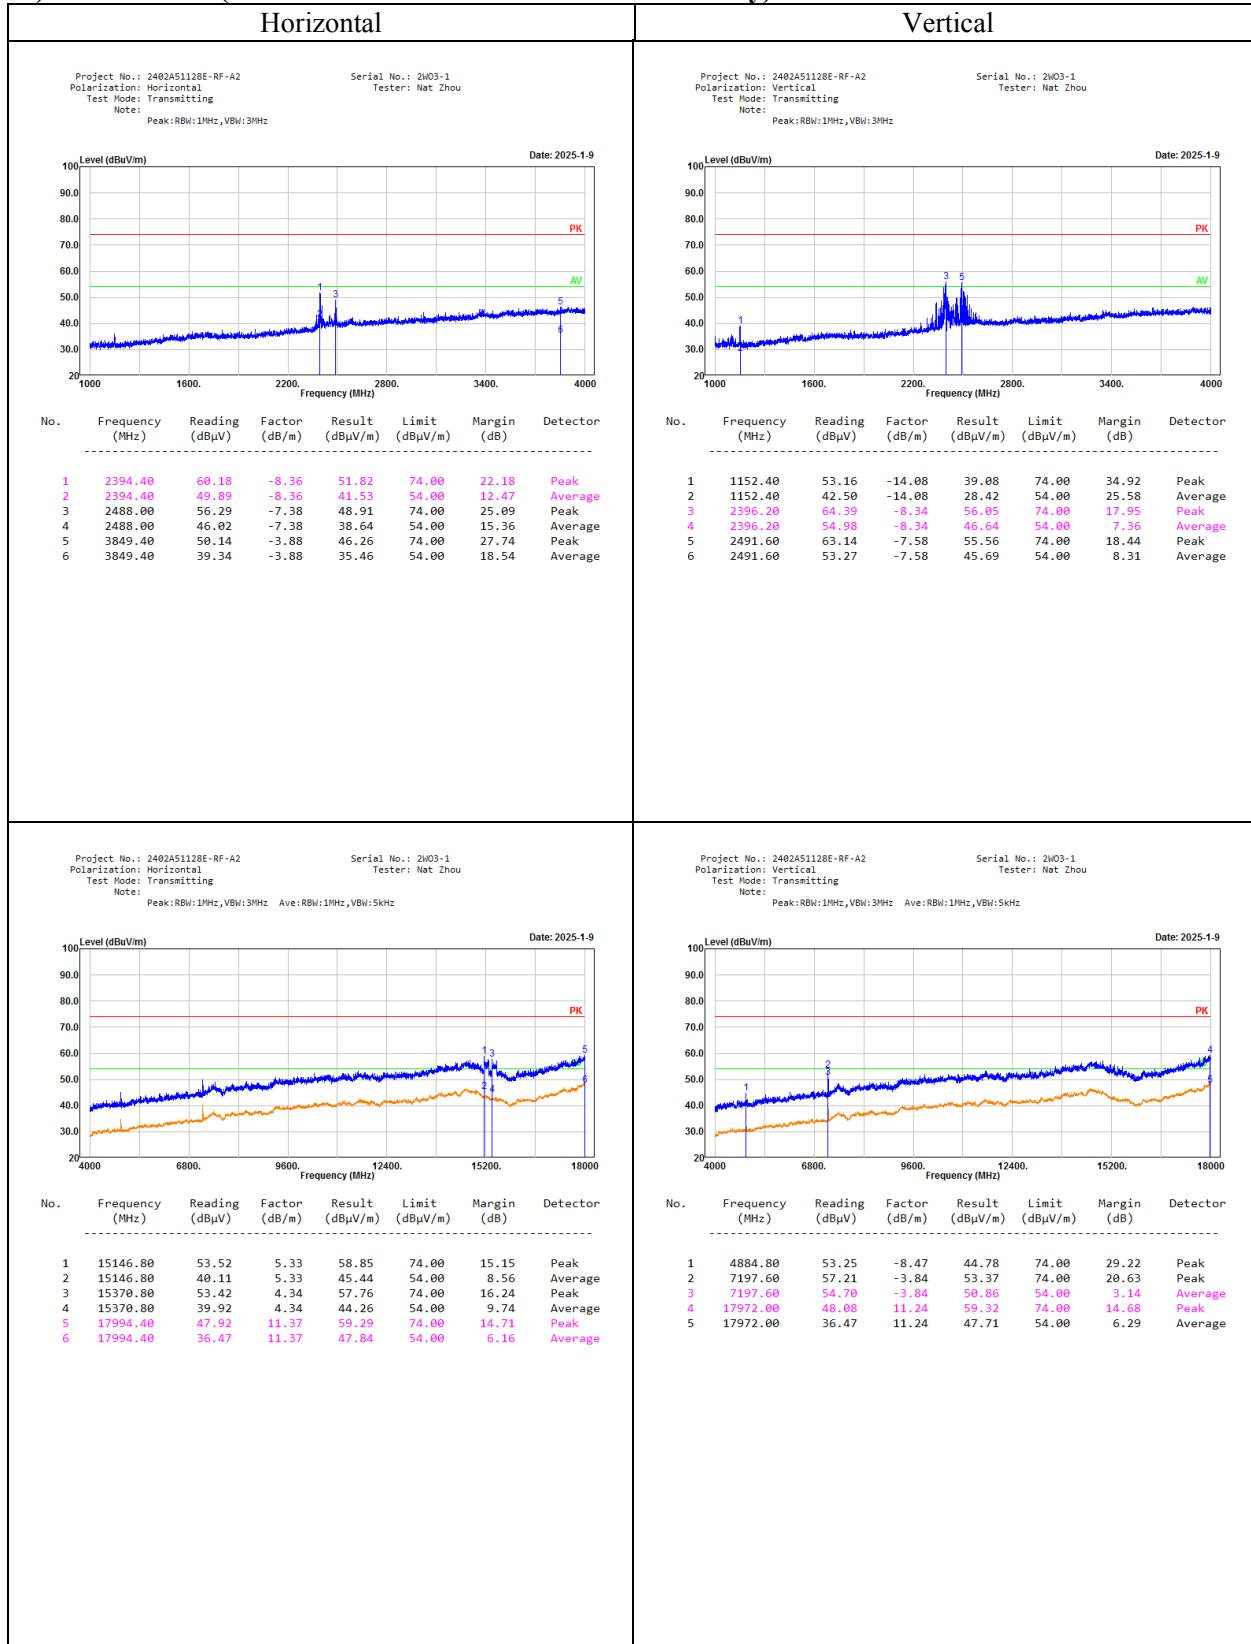



3) 40GHz-200GHz:**Front Radar:**

Frequency (GHz)	Reading (dB μ V)	Polar (H/V)	Factor (dB/m)	Field Strength (dB μ V/m)	Power Density (pW/cm 2)	Limit (pW/cm 2)
41.460	52.30	H	39.02	81.78	39.96	90.00
41.790	54.62	V	39.07	84.15	68.97	90.00
90.740	53.26	H	45.20	82.90	51.72	90.00
91.420	52.69	V	45.28	82.41	46.20	90.00
141.230	50.62	H	48.95	84.01	66.78	90.00
141.290	50.29	V	48.95	83.68	61.90	90.00

Rear Radar:

Frequency (GHz)	Reading (dB μ V)	Polar (H/V)	Factor (dB/m)	Field Strength (dB μ V/m)	Power Density (pW/cm 2)	Limit (pW/cm 2)
41.330	53.00	H	39.00	82.46	46.74	90.00
41.650	54.19	V	39.05	83.70	62.18	90.00
90.980	53.68	H	45.23	83.35	57.37	90.00
90.800	54.08	V	45.20	83.72	62.47	90.00
140.350	50.33	H	48.91	83.68	61.92	90.00
142.060	50.49	V	48.98	83.91	65.26	90.00

Top Radar:

Frequency (GHz)	Reading (dB μ V)	Polar (H/V)	Factor (dB/m)	Field Strength (dB μ V/m)	Power Density (pW/cm 2)	Limit (pW/cm 2)
42.320	53.26	H	39.15	82.87	51.36	90.00
42.580	53.14	V	39.19	82.79	50.43	90.00
90.550	53.06	H	45.17	82.67	49.05	90.00
90.160	53.19	V	45.13	82.76	50.08	90.00
140.510	51.06	H	48.92	84.42	73.39	90.00
140.360	51.32	V	48.91	84.67	77.74	90.00

Bottom Radar:

Frequency (GHz)	Reading (dB μ V)	Polar (H/V)	Factor (dB/m)	Field Strength (dB μ V/m)	Power Density (pW/cm ²)	Limit (pW/cm ²)
40.650	52.32	H	38.89	81.67	38.96	90.00
40.180	53.16	V	38.82	82.44	46.52	90.00
90.580	53.22	H	45.18	82.84	51.01	90.00
90.320	53.26	V	45.15	82.85	51.13	90.00
140.580	50.69	H	48.92	84.05	67.40	90.00
140.800	50.41	V	48.93	83.78	63.34	90.00

Note:

Factor = Antenna Factor

Field Strength = Reading + Factor + 20log(d_{Meas}/d_{SpecLimit})

d_{Meas} is the measurement distance, in m

d_{SpecLimit} is the distance specified by the limit, in m

$$PD = \frac{E_{\text{SpecLimit}}^2}{377}$$

where

PD is the power density at the distance specified by the limit, in W/m²
 $E_{\text{SpecLimit}}$ is the field strength at the distance specified by the limit, in V/m

The Specified distance is 3m.


4.5 Frequency Stability

4.5.1 Applicable Standard

FCC §15.255(f)

(f) Frequency stability. Fundamental emissions must be contained within the frequency bands specified in this section during all conditions of operation. Equipment is presumed to operate over the temperature range -20 to $+50$ degrees Celsius with an input voltage variation of 85% to 115% of rated input voltage, unless justification is presented to demonstrate otherwise.

4.5.2 EUT Setup Block Diagram

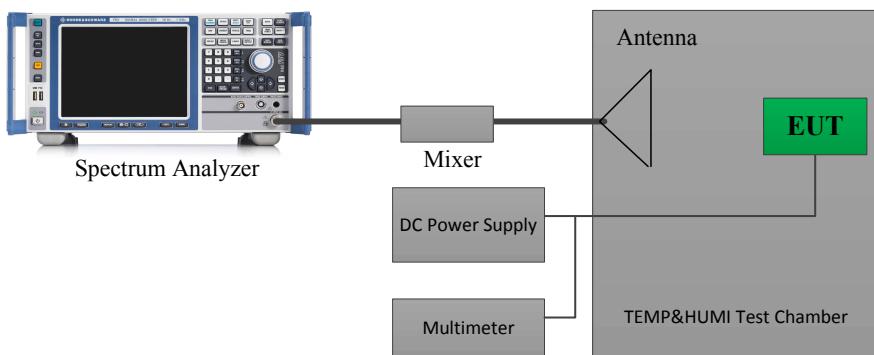

4.5.3 Test Procedure

Refer to ANSI C63.10-2020 Clauses 9.5.

The following procedure shall be used for determining frequency stability of millimeter-wave systems:

- a) Arrange EUT and test equipment as shown in Figure 21. Some temperature chambers have a window or other opening that permits locating the receive antenna outside the chamber.
- b) With the EUT at ambient temperature (approximately 25 °C) and voltage source set to the EUT nominal operating voltage (100%), record the spectrum mask of the EUT emission on the spectrum analyzer.
- c) Vary EUT power supply between 85% and 115% of nominal, and record the frequency excursion of the EUT emission mask.
- d) Set the power supply to 100% nominal setting, and raise EUT operating temperature to 50 °C. Record the frequency excursion of the EUT emission mask.
- e) Repeat step d) at each 10 °C increment down to -20 °C.

4.5.3 Test Result

Serial Number:	2WO3-1	Test Date:	2025/1/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Bill Yang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.4	Relative Humidity: (%)	41	ATM Pressure: (kPa)	101.4
-------------------	------	------------------------	----	---------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Agilent	Waveguide Mixer	11970V	2521A011767	2023/2/16	2026/2/15
Flann Microwave	Horn Antenna	861V/385	736	2023/2/27	2026/2/26
Agilent	Spectrum Analyzer	E4440A	MY44303352	2024/10/22	2025/10/21
Resenberger	Coaxial Cable	LU7-022-1000	0031	2024/3/1	2025/2/28
Resenberger	Coaxial Cable	LU7-022-1000	0032	2024/3/1	2025/2/28
BACL	TEMP&HUMI Test Chamber	BTH-150-40	30173	2024/9/6	2025/9/5
All-sun	Multimeter	EM305A	8348897	2024/8/16	2025/8/15
TDK-Lambda	DC Power Supply	Z+60-14	F-08-EM038-1	N/A	N/A

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:**Front Radar:**

Temperature °C	Voltage V _{DC}	Frequency (GHz)			
		f _L	f _H	f _L Limit	f _H Limit
-20	14.88	61.4775	61.9918	60	64
-10	14.88	61.4772	61.9919	60	64
0	14.88	61.4782	61.9911	60	64
10	14.88	61.4771	61.9905	60	64
20	14.88	61.4778	61.9916	60	64
30	14.88	61.4785	61.9922	60	64
40	14.88	61.4775	61.9918	60	64
50	14.88	61.4774	61.9913	60	64
20	12.70	61.4773	61.9921	60	64
20	17.00	61.4784	61.9919	60	64

Rear Radar:

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.5769	61.0942	60	64
-10	14.88	60.5765	61.0941	60	64
0	14.88	60.5761	61.0939	60	64
10	14.88	60.5758	61.0952	60	64
20	14.88	60.5764	61.0943	60	64
30	14.88	60.5771	61.0946	60	64
40	14.88	60.5768	61.0949	60	64
50	14.88	60.5770	61.0945	60	64
20	12.70	60.5766	61.0938	60	64
20	17.00	60.5769	61.0946	60	64

Top Radar:

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	61.4766	61.9918	60	64
-10	14.88	61.4764	61.9915	60	64
0	14.88	61.4774	61.9911	60	64
10	14.88	61.4781	61.9909	60	64
20	14.88	61.4775	61.9915	60	64
30	14.88	61.4779	61.9923	60	64
40	14.88	61.4782	61.9919	60	64
50	14.88	61.4785	61.9913	60	64
20	12.70	61.4768	61.9914	60	64
20	17.00	61.4772	61.9922	60	64

Bottom Radar:

Temperature	Voltage	Frequency (GHz)			
°C	V _{DC}	f _L	f _H	f _L Limit	f _H Limit
-20	14.88	60.5774	61.0918	60	64
-10	14.88	60.5775	61.0917	60	64
0	14.88	60.5779	61.0921	60	64
10	14.88	60.5769	61.0911	60	64
20	14.88	60.5778	61.0916	60	64
30	14.88	60.5782	61.0926	60	64
40	14.88	60.5781	61.0923	60	64
50	14.88	60.5783	61.0924	60	64
20	12.70	60.5773	61.0917	60	64
20	17.00	60.5777	61.0919	60	64

Note: The Voltage range was declared by manufacturer▲.

4.6 Operation Restriction and Group Installation

4.6.1 Applicable Standard

§15.255 (a) General. Operation under the provisions of this section is not permitted for equipment used on satellites.

§15.255 (b) Operation on aircraft. Operation on aircraft is permitted under the following conditions:

(1) When the aircraft is on the ground.

(2) While airborne, only in closed exclusive on-board communication networks within the aircraft, with the following exceptions:

(i) Equipment shall not be used in wireless avionics intra-communication (WAIC) applications where external structural sensors or external cameras are mounted on the outside of the aircraft structure.

(ii) Except as permitted in paragraph (b)(3) of this section, equipment shall not be used on aircraft where there is little attenuation of RF signals by the body/fuselage of the aircraft.

(iii) Field disturbance sensor/radar devices may only operate in the frequency band 59.3–71.0 GHz while installed in passengers' personal portable electronic equipment (e.g., smartphones, tablets) and shall comply with paragraph (b)(2)(i) of this section, and relevant requirements of paragraphs (c)(2) through (c)(4) of this section.

(3) Field disturbance sensors/radar devices deployed on unmanned aircraft may operate within the frequency band 60–64 GHz, provided that the transmitter not exceed 20 dBm peak EIRP. The sum of continuous transmitter off-times of at least two milliseconds shall equal at least 16.5 milliseconds within any contiguous interval of 33 milliseconds. Operation shall be limited to a maximum of 121.92 meters (400 feet) above ground level.

§15.255 (h) Any transmitter that has received the necessary FCC equipment authorization under the rules of this chapter may be mounted in a group installation for simultaneous operation with one or more other transmitter(s) that have received the necessary FCC equipment authorization, without any additional equipment authorization. However, no transmitter operating under the provisions of this section may be equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

4.6.2 Result

15.255(a), the device is a unmanned aircraft. Not used on satellites.

15.255(b)(1), the Radar Operation on aircraft when the aircraft is on the ground.

15.255(b)(2), not applicable, the device is a unmanned aircraft.

15.255(b)(3), Operation be limited to a maximum of 121.92 meters (400 feet) above ground level. Please refer to the user manual.

§15.255 (h), No equipped with external phase-locking inputs that permit beam-forming arrays to be realized.

4.7 Antenna Requirement

4.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.
- c. Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

4.7.2 Judgment

Please refer to the Antenna Information detail in Section 1.3.

EXHIBIT A - TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2402A51128E-RF-00BA2-TSP test setup photographs.

EXHIBIT B - RF EXPOSURE EVALUATION

MAXIMUM PERMISSIBLE EXPOSURE (MPE)

Applicable Standard

FCC §15.255(g) & §1.1310 & §2.1091

Regardless of the power density levels permitted under this subpart, devices operating under the provisions of this subpart are subject to the radiofrequency radiation exposure requirements specified in §§ 1.1307(b), 2.1091, and 2.1093 of this chapter, as appropriate. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

(B) Limits for General Population/Uncontrolled Exposure				
Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Averaging Time (minutes)
0.3–1.34	614	1.63	*(100)	30
1.34–30	824/f	2.19/f	*(180/f ²)	30
30–300	27.5	0.073	0.2	30
300–1500	/	/	f/1500	30
1500–100,000	/	/	1.0	30

f = frequency in MHz; * = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

Procedure

Prediction of power density at the distance of the applicable MPE limit

$S = PG/4\pi R^2$ = power density (in appropriate units, e.g. mW/cm²);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

For simultaneously transmit system, the calculated power density should comply with:

$$\sum_i \frac{S_i}{S_{Limit,i}} \leq 1$$

Calculated Result

For SRD and WiFi:

Operation Modes	Frequency (MHz)	Antenna Gain		Conducted output power including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBi)	(numeric)	(dBm)	(mW)			
SRD	904-926	0.3	1.07	29	794.33	20.00	0.169	0.6
	2403.5-2475.5	1.9	1.55	27	501.19	20.00	0.155	1.0
	5154-5246	0.7	1.17	20.5	112.20	20.00	0.026	1.0
	5728-5847	0.9	1.23	25	316.23	20.00	0.077	1.0
WiFi	2412-2462	2.2	1.66	27	501.19	20.00	0.166	1.0
	5150-5250	2.6	1.82	18	63.10	20.00	0.023	1.0
	5725-5850	3.7	2.34	16.5	44.67	20.00	0.021	1.0

Note: The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.

For Radar:

Radar	Frequency (GHz)	EIRP including Tune-up Tolerance		Evaluation Distance (cm)	Power Density (mW/cm ²)	MPE Limit (mW/cm ²)
		(dBm)	(mW)			
Front Radar	61.47-62	14	25.12	20.00	0.005	1.0
Top Radar	61.47-62	12	15.85	20.00	0.003	1.0
Rear Radar	60.57-61.1	9	7.94	20.00	0.002	1.0
Bottom Radar	60.57-61.1	9	7.94	20.00	0.002	1.0

Note: The EIRP Tune-up power was declared by the manufacturer.

Simultaneous transmission:

SRD/ Radar can't transmit simultaneously with WiFi,
SRD and 4 Radars can transmit simultaneously:

$$\sum_i \frac{S_i}{S_{\text{Limit},i}} \leq 1$$

$$S_{\text{Front Radar}}/S_{\text{limit- Front Radar}} + S_{\text{Top Radar}}/S_{\text{limit- Top Radar}} + S_{\text{Rear Radar}}/S_{\text{limit- Rear Radar}} + S_{\text{Bottom Radar}}/S_{\text{limit- Bottom Radar}} + S_{\text{SRD}}/S_{\text{limit- SRD}}$$

$$=0.005/1.0+0.003/1.0+0.002/1.0+0.002/1.0+0.169/0.6$$

$$=0.29$$

$$< 1.0$$

Result: The device meet FCC MPE at 20 cm distance.

***** END OF REPORT *****