

TEST REPORT

Applicant: Autel Robotics Co., Ltd

Address: 601,701,801,901, Block B1, Nanshan iPark, No. 1001 Xueyuan Avenue, Nanshan District, Shenzhen, Guangdong, 518055, China

Product Name: EVO Max 4T, EVO Max 4N, EVO Max 4T XE, EVO Max 4T Pro

FCC ID: 2AGNTMDX600958C

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

Report Number: 2402A23350E-RF-00D

Report Date: 2025/2/18

The above device has been tested and found compliant with the requirement of the relative standards by Bay Area Compliance Laboratories Corp. (Dongguan).

Pedro Yun

Reviewed By: Pedro Yun
Title: Project Engineer

Gavin Xu

Approved By: Gavin Xu
Title: RF Supervisor

Bay Area Compliance Laboratories Corp. (Dongguan)
No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China

Tel: +86-769-86858888

Fax: +86-769-86858891

www.baclcorp.com.cn

Note: The information marked ▲ is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report cannot be reproduced except in full, without prior written approval of the Company. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0. This report may contain data that are not covered by the accreditation scope and shall be marked with ★. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government. Each test item follows the test standard(s) without deviation.

CONTENTS

DOCUMENT REVISION HISTORY	4
1. GENERAL INFORMATION	5
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
1.2 ACCESSORY INFORMATION	5
1.3 ANTENNA INFORMATION DETAIL▲	6
1.4 EQUIPMENT MODIFICATIONS	6
2. SUMMARY OF TEST RESULTS	7
3. DESCRIPTION OF TEST CONFIGURATION	8
3.1 OPERATION FREQUENCY DETAIL	8
3.2 EUT OPERATION CONDITION	10
3.3 SUPPORT EQUIPMENT LIST AND DETAILS	10
3.4 SUPPORT CABLE LIST AND DETAILS	10
3.5 BLOCK DIAGRAM OF TEST SETUP	11
3.6 TEST FACILITY	12
3.7 MEASUREMENT UNCERTAINTY	12
4. REQUIREMENTS AND TEST PROCEDURES	13
4.1 AC LINE CONDUCTED EMISSIONS	13
4.1.1 Applicable Standard	13
4.1.2 EUT Setup	14
4.1.3 EMI Test Receiver Setup	14
4.1.4 Test Procedure	15
4.1.5 Corrected Amplitude & Margin Calculation	15
4.1.6 Test Result	15
4.2 RADIATION SPURIOUS EMISSIONS	16
4.2.1 Applicable Standard	16
4.2.2 EUT Setup	16
4.2.3 EMI Test Receiver & Spectrum Analyzer Setup	18
4.2.4 Test Procedure	18
4.2.5 Corrected Result & Margin Calculation	18
4.2.6 Test Result	19
4.3 MINIMUM 6 DB EMISSION BANDWIDTH	20
4.3.1 Applicable Standard	20
4.3.2 EUT Setup	20
4.3.3 Test Procedure	20
4.3.4 Test Result	20
4.4 99% OCCUPIED BANDWIDTH	21
4.4.1 EUT Setup	21
4.4.2 Test Procedure	21
4.4.3 Test Result	21
4.5 MAXIMUM CONDUCTED OUTPUT POWER	22

4.5.1 Applicable Standard	22
4.5.2 EUT Setup	22
4.5.3 Test Procedure	22
4.5.4 Test Result	22
4.6 MAXIMUM POWER SPECTRAL DENSITY	23
4.6.1 Applicable Standard	23
4.6.2 EUT Setup	23
4.6.3 Test Procedure	23
4.6.4 Test Result	23
4.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE	24
4.7.1 Applicable Standard	24
4.7.2 EUT Setup	24
4.7.3 Test Procedure	24
4.7.4 Test Result	24
4.8 DUTY CYCLE	25
4.8.1 EUT Setup	25
4.8.2 Test Procedure	25
4.8.3 Judgment	25
4.9 ANTENNA REQUIREMENT	26
4.9.1 Applicable Standard	26
4.9.2 Judgment	26
5. Test DATA AND RESULTS	27
5.1 AC LINE CONDUCTED EMISSIONS	27
5.2 RADIATION SPURIOUS EMISSIONS	28
5.3 MINIMUM 6 DB EMISSION BANDWIDTH	59
5.4 99% OCCUPIED BANDWIDTH	64
5.5 MAXIMUM CONDUCTED OUTPUT POWER	69
5.6 MAXIMUM POWER SPECTRAL DENSITY	70
5.7 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE:	79
5.8 DUTY CYCLE:	84
EXHIBIT A - EUT PHOTOGRAPHS	86
EXHIBIT B - TEST SETUP PHOTOGRAPHS	87

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2402A23350E-RF-00D	Original Report	2025/2/18

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	EVO Max 4T, EVO Max 4N, EVO Max 4T XE, EVO Max 4T Pro
EUT Model:	MDX
Operation Frequency:	900M SRD SRD 1.4MHz:904-926 MHz SRD 10MHz:909-921MHz SRD 20MHz:914-916MHz 2.4G SRD SRD 1.4MHz:2403.5-2475.5MHz SRD 10MHz:2407.5-2471.5MHz SRD 20MHz:2412.5-2462.5MHz
Maximum Average Output Power (Conducted):	20.84dBm(900M SRD) 26.12dBm(2.4G SRD)
Modulation Type:	OFDM(QPSK, 16QAM)
Rated Input Voltage:	DC 14.76V from battery or DC 14.88V from battery
Serial Number:	2WN8-1(For RF Conducted Test) 2WN8-2(For Radiated Spurious Emissions Test)
EUT Received Date:	2024/12/28
EUT Received Status:	Good
Note: The device can install difference Gimbal camera, test was only performed with Gimbal camera 3#(4T).	

1.2 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
Adapter	Shenzhen Esun Power Technology Co.,Ltd	MDX120W	Input:100-240Vac,50/60Hz,3.0A Output:Main:17Vdc.7.06A; USB-C:5.0V,3.0A;9.0V,3.0A;12.0V,2.5A Total Output Power:120.02W Max
Battery 1#	Xiamen Ampace Technology Limited	ABX40	DC 14.88V
Battery 2#	Xiamen Ampace Technology Limited	ABX41	DC 14.76V
Battery 3#	Xiamen Ampace Technology Limited	MDX_8070_1488	DC 14.88V

Note: Per 15B report, Powered by Battery 2# was the worst, so only performed it.

1.3 Antenna Information Detail ▲

Antenna	Antenna Manufacturer	Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
Chain 0 (Tx&Rx)	Dongguan YiJia Electronics Communication Technology Co.,Ltd	PCB	50	902-928MHz	0.3dBi
		PCB	50	2400-2500MHz	1.7dBi
Chain 1 (Tx&Rx)		PCB	50	902-928MHz	-0.8dBi
		PCB	50	2400-2500MHz	1.9dBi
Chain 2 (Rx Only)		PCB	50	902-928MHz	1.8dBi
		PCB	50	2400-2500MHz	1.3dBi
Chain 3 (Rx Only)		PCB	50	902-928MHz	1.1dBi
		PCB	50	2400-2500MHz	1.5dBi

Note:

The system supports 2T4R .

Per KDB 662911 D01 Multiple Transmitter Output v02r01:

SRD-900MHz:

For power measurements:

CDD Mode:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
directional gain=0.3 +0dB =0.3dBi

For power spectral density (PSD) measurements:

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

directional gain=0.3dBi +3dB =3.3dBi

SRD-2.4GHz:

For power measurements:

CDD Mode:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
directional gain=1.9dBi +0dB =1.9dBi

For power spectral density (PSD) measurements:

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

directional gain=1.9dBi +3dB =4.9dBi

The design of compliance with §15.203:

☒ Unit uses a permanently attached antenna.

☐ Unit uses a unique coupling to the intentional radiator.

☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.4 Equipment Modifications

No modifications are made to the EUT during all test items.

2. SUMMARY OF TEST RESULTS

Standard(s) Section	Test Items	Result
§15.207(a)	AC Line Conducted Emissions	Not applicable
§15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
§15.247 (a)(2)	Minimum 6 dB Bandwidth	Compliant
§15.247(b)(3)	Maximum Conducted Output Power	Compliant
§15.247(d)	100 kHz Bandwidth Of Frequency Band Edge	Compliant
§15.247(e)	Power Spectral Density	Compliant
§15.203	Antenna Requirement	Compliant
Note 1: Not Applicable, the device was powered by battery when operating. Note 2: For Radiated Spurious Emissions 9kHz~1GHz and 18~25GHz, the maximum output power mode and channel was tested.		

3. DESCRIPTION OF TEST CONFIGURATION

3.1 Operation Frequency Detail

For SRD-900MHz band 1.4MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	904	13	916
2	905	14	917
3	906	15	918
...	...	...	...
...	...	22	925
11	914	23	926
12	915	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	904
Middle	916
Highest	926

For SRD-900MHz band 10MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	909	8	916
2	910	9	917
3	911	10	918
4	912	11	919
5	913	12	920
6	914	13	921
7	915	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	909
Middle	915
Highest	921

For SRD-900MHz band 20MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	914	3	916
2	915	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	914
Middle	915
Highest	916

For SRD-2.4GHz band 1.4MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2403.5	38	2440.5
2	2404.5	39	2441.5
3	2405.5	40	2442.5
...	...	...	...
...	...	72	2474.5
36	2438.5	73	2475.5
37	2439.5	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2403.5
Middle	2439.5
Highest	2475.5

For SRD-2.4GHz band 10MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2407.5	34	2440.5
2	2408.5	35	2441.5
3	2409.5	36	2442.5
...	...	...	...
...	...	64	2470.5
32	2438.5	65	2471.5
33	2439.5	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2407.5
Middle	2439.5
Highest	2471.5

For SRD-2.4GHz band 20MHz Bandwidth Mode:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412.5	27	2438.5
2	2413.5	28	2439.5
3	2414.5	29	2440.5
...	...	...	...
...	...	50	2461.5
25	2436.5	51	2462.5
26	2437.5	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2412.5
Middle	2437.5
Highest	2462.5

3.2 EUT Operation Condition

The system was configured for testing in Engineering Mode, which was provided by the manufacturer. The EUT configuration as below:

EUT Exercise Software:			RRTL6.0.0_VCOM					
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:								
Test Modes		Data rate	Power Level Setting					
			Lowest Channel		Middle Channel		Highest Channel	
			Chain 0	Chain 1	Chain 0	Chain 1	Chain 0	Chain 1
900MHz Band QPSK	1.4M	120kbps	80	80	86	86	86	86
	10M	19Mbps	70	70	75	75	75	75
	20M	38Mbps	65	65	65	65	65	65
2.4GHz Band QPSK	1.4M	120kbps	35	35	35	35	60	60
	10M	19Mbps	50	50	50	50	50	50
	20M	38Mbps	62	62	57	57	57	57

Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.

2. The device supports SISO in all BW modes, and MIMO 2TX in all BW modes, per pretest, 2TX mode was the worst mode and reported for all BW modes.

3. For 2.4G SRD QPSK, the power level from channel 38 to channel 72 is 60.

3.3 Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/


3.4 Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
/	/	/	/	/	/


3.5 Block Diagram of Test Setup

Radiated Spurious Emissions:

Below 1GHz:

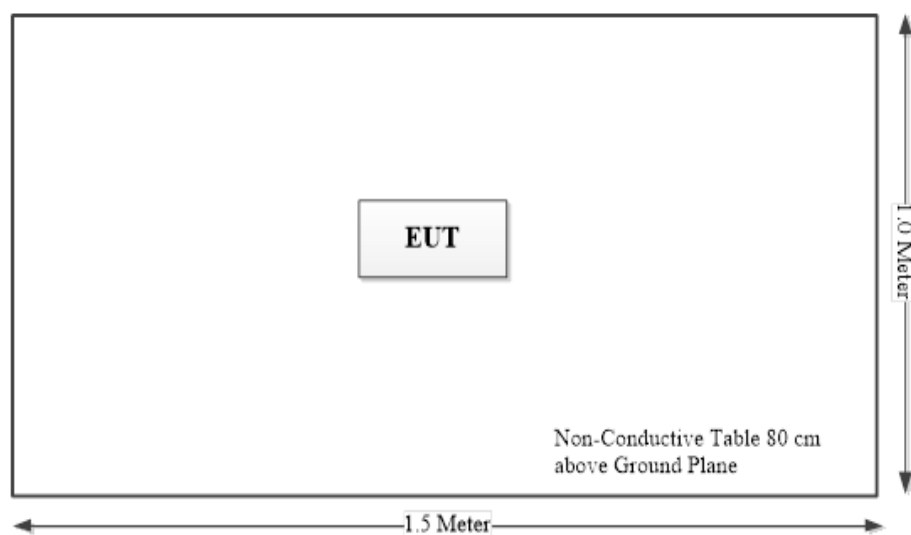

Above 1GHz:

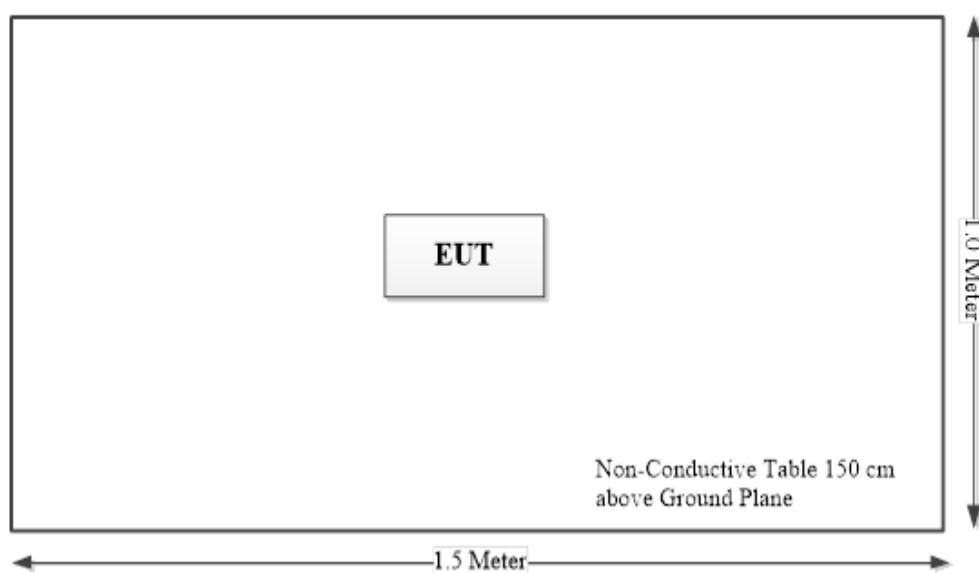

3.6 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1st Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 829273, the FCC Designation No. : CN5044.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

3.7 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	9kHz~30MHz: 3.3dB, 30MHz~200MHz: 4.55 dB, 200MHz~1GHz: 5.92 dB, 1GHz~6GHz: 4.98 dB, 6GHz~18GHz: 5.89 dB, 18GHz~26.5GHz:5.47 dB, 26.5GHz~40GHz:5.63 dB
Unwanted Emissions, conducted	±2.47 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	3.11 dB (150 kHz to 30 MHz)

4. REQUIREMENTS AND TEST PROCEDURES

4.1 AC Line Conducted Emissions

4.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

4.1.2 EUT Setup

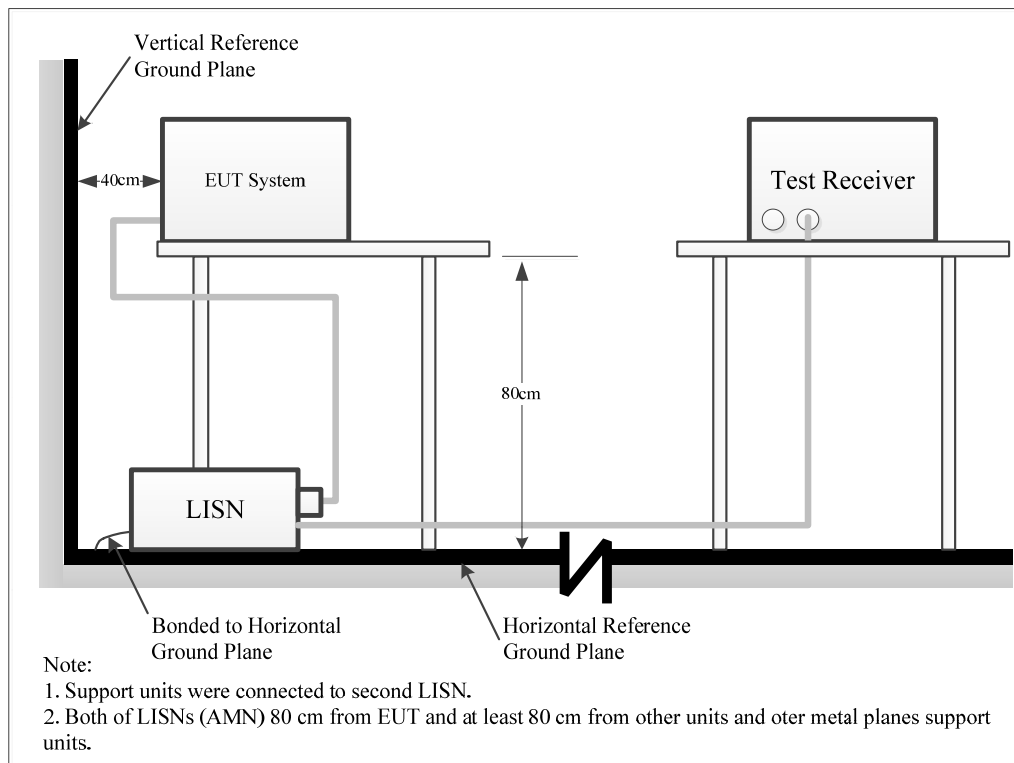

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

4.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

4.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

4.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

4.1.6 Test Result

Please refer to section 5.1.

4.2 Radiation Spurious Emissions


4.2.1 Applicable Standard



FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.2.2 EUT Setup

9kHz~30MHz:

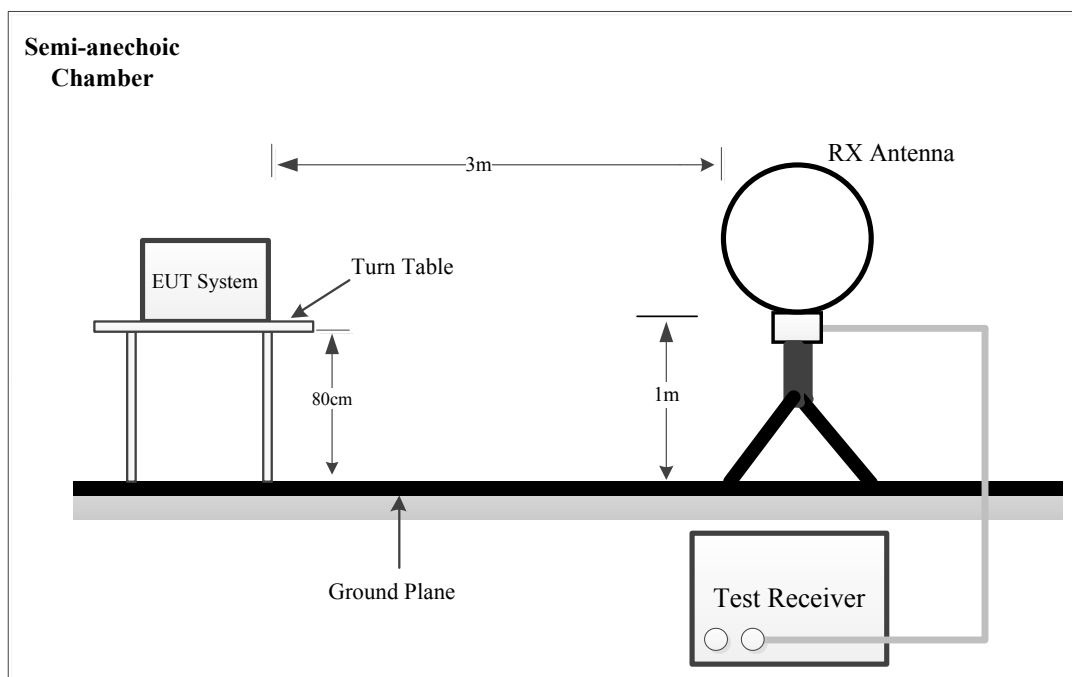

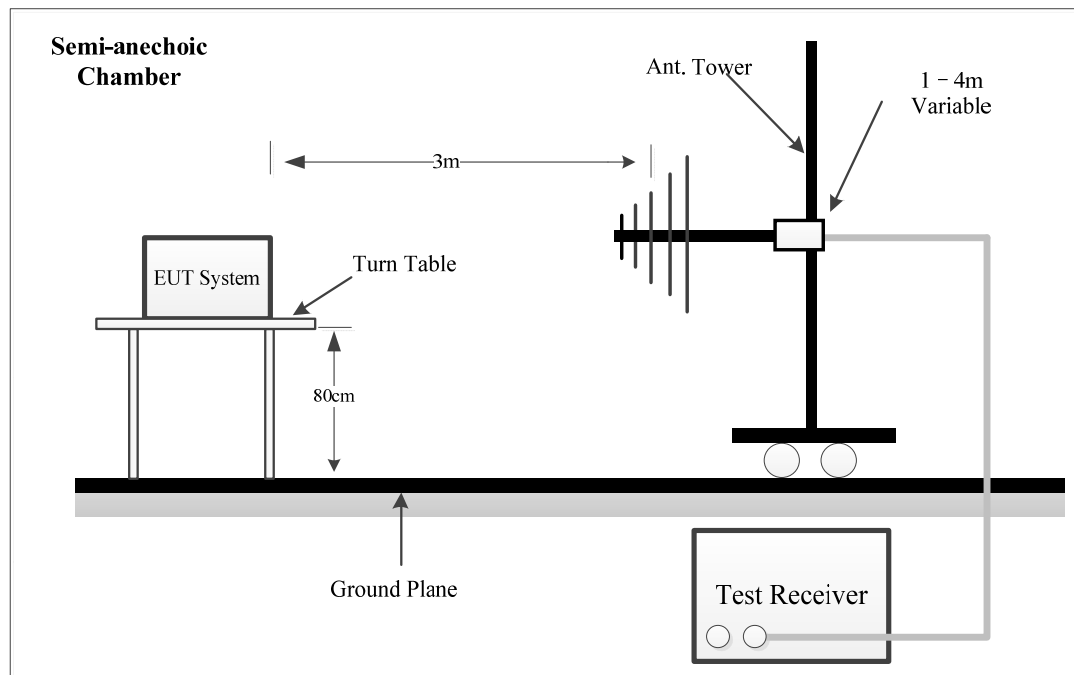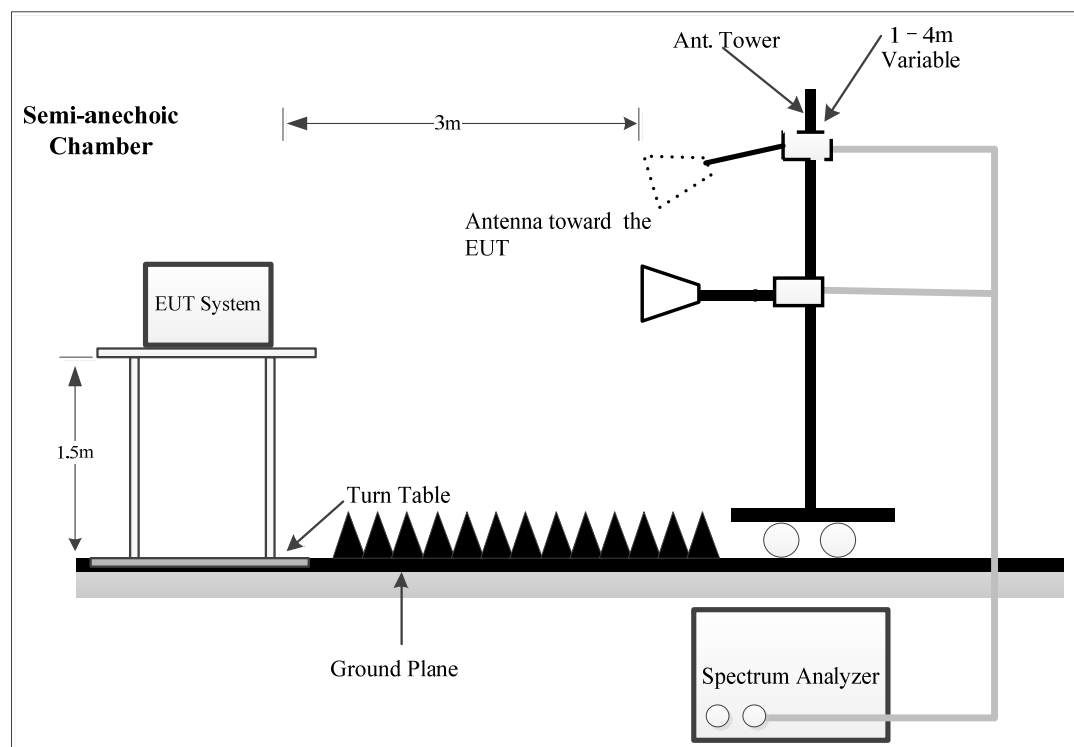30MHz~1GHz:**Above 1GHz:**

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

4.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

9kHz-1000MHz:

Frequency Range	Measurement	RBW	Video B/W	IF B/W	Detector
9 kHz – 150 kHz	QP/AV	300Hz	1 kHz	200 Hz	QP/AV
150 kHz – 30 MHz	QP/AV	10 kHz	30 kHz	9 kHz	QP/AV
30MHz – 1000 MHz	PK	100 kHz	300 kHz	/	PK
	QP	/	/	120kHz	QP

1GHz- 25GHz:

Pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	5kHz
		<98%	1MHz	≥1/T, not less than 5kHz

Final measurement for emission identified during the pre-scan:

Measurement	Detector	Duty cycle	RBW	Video B/W
PK	PK	Any	1MHz	3 MHz
Ave.	PK	>98%	1MHz	10 Hz
		<98%	1MHz	≥1/T

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP limit more than 6dB, then it is unnecessary to perform an QP measurement.

If the maximized peak measured value complies with under the Average limit, then it is unnecessary to perform an Average measurement.

4.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz -1 GHz, except 9-90 kHz, 110-490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

4.2.5 Corrected Result & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$

4.2.6 Test Result

Please refer to section 5.2.


4.3 Minimum 6 dB Emission Bandwidth

4.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

4.3.2 EUT Setup

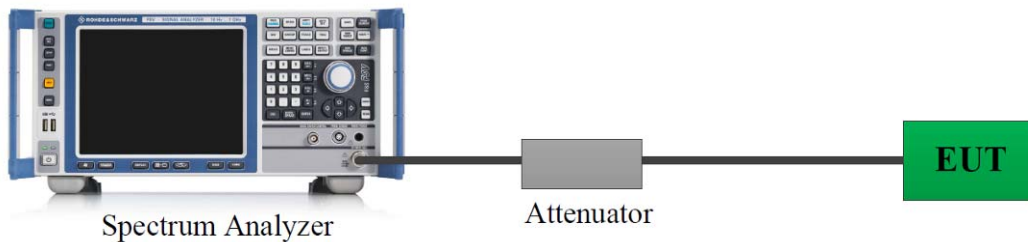

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8


- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times \text{RBW}$.
- Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

4.3.4 Test Result

Please refer to section 5.3.

4.4 99% Occupied Bandwidth

4.4.1 EUT Setup

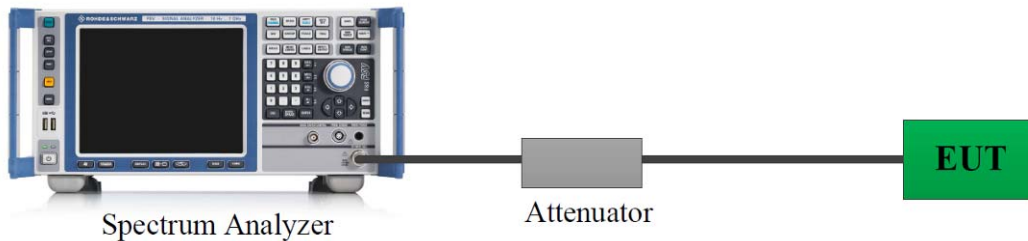

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.4.2 Test Procedure

According to ANSI C63.10-2013 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be approximately three times the RBW, unless otherwise specified by the applicable requirement.
- Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2.
- Step a) through step c) might require iteration to adjust within the specified range.
- Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

4.4.3 Test Result

Please refer to section 5.4.


4.5 Maximum Conducted Output Power

4.5.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

4.5.2 EUT Setup



A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

4.5.4 Test Result

Please refer to section 5.5.


4.6 Maximum Power Spectral Density

4.6.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

4.6.2 EUT Setup

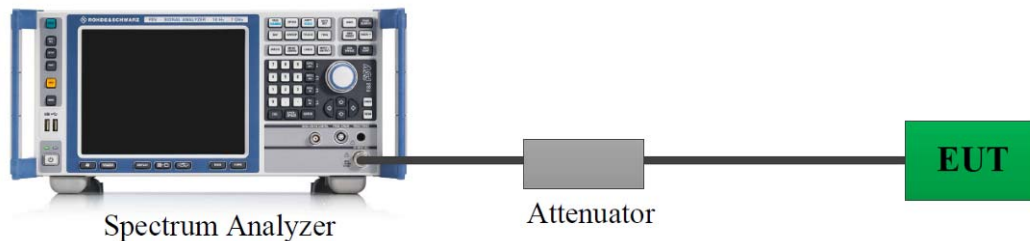

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.6.3 Test Procedure

Duty cycle $\geq 98\%$

According to ANSI C63.10-2013 Section 11.10.3

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$

According to ANSI C63.10-2013 Section 11.10.5

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

According to ANSI C63.10-2013 Section 11.10.7

4.6.4 Test Result

Please refer to section 5.6.


4.7 100 kHz Bandwidth of Frequency Band Edge

4.7.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

4.7.2 EUT Setup

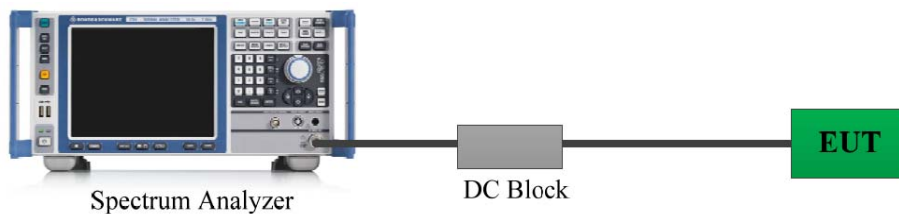

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.7.3 Test Procedure

According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

4.7.4 Test Result

Please refer to section 5.7.

4.8 Duty Cycle

4.8.1 EUT Setup

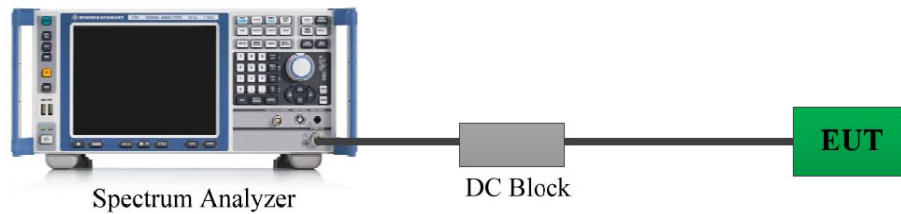

A short RF cable with low cable loss connected to the EUT antenna port, which was provided by manufacturer. The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

4.8.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

4.8.3 Judgment

Report Only. Please refer to section 5.8.

4.9 Antenna Requirement

4.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

4.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.3.

5. Test DATA AND RESULTS

5.1 AC Line Conducted Emissions

Not Applicable, the device was powered by battery when operating.

5.2 Radiation Spurious Emissions

Serial Number:	2WN8-2	Test Date:	Below 1GHz: 2025/1/13~2025/1/14 Above 1GHz: 2025/1/21~2025/1/22
Test Site:	Chamber 10m, Chamber B	Test Mode:	Transmitting
Tester:	Leesin Xiang, Colin Yang, Leo Xiao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	19.4~20.3	Relative Humidity: (%)	32~38	ATM Pressure: (kPa)	101.0~101.8
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
9kHz~1000MHz					
EMCO	Passive Loop Antenna	6512	9706-1206	2023/10/25	2026/10/24
Sunol Sciences	Hybrid Antenna	JB3	A060611-1	2023/9/6	2026/9/5
Narda	Coaxial Attenuator	779-6dB	04269	2023/9/6	2026/9/5
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-04	2024/7/1	2025/6/30
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2024/7/1	2025/6/30
Sonoma	Amplifier	310N	185914	2024/8/26	2025/8/25
R&S	EMI Test Receiver	ESCI	100224	2024/8/26	2025/8/25
Audix	Test Software	E3	191218 V9	N/A	N/A
E-Microwave	Band Rejection Filter	OBF-ZP-902-928-SMAF	OE01902428	2024/6/11	2025/6/10
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2023/9/7	2026/9/6
Xinhang Macrowave	Coaxial Cable	XH750A-N/J-SMA/J-10M	20231117004#0001	2024/11/17	2025/11/16
AH	Preamplifier	PAM-0118P	469	2024/4/15	2025/4/14
Audix	Test Software	E3	191218 V9	N/A	N/A
R&S	Spectrum Analyzer	FSV40	101944	2024/9/6	2025/9/5
R&S	Spectrum Analyzer	FSV40	101589	2024/9/5	2025/9/4
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-021304	2023/2/22	2026/2/21
Xinhang Macrowave	Coaxial Cable	XH360A-2.92/J-2.92/J-6M-A	20231208001#0001	2024/12/9	2025/12/8
AH	Preamplifier	PAM-1840VH	191	2024/9/5	2025/9/4
E-Microwave	Band Rejection Filter	OBF-ZP-902-928-SMAF	OE01902428	2024/6/11	2025/6/10
Decentest	Multiplex Switch Test Control Set & Filter Switch Unit	DT7220SCU & DT7220FCU	DC79902 & DC79905	2024/8/27	2025/8/26

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.

1) 9kHz~30MHz

Three antenna orientations (parallel, perpendicular, and ground-parallel) was measured, the worst orientations was below:

2.4G SRD(1.4M Low channel was tested):

Project No.: 2402A23350E-RF

Serial No.: 2WN8-2


Polarization: Parallel

Tester: Leesin Xiang

Test Mode: Transmitting

Note: 4T

RBW:300Hz VBW:1kHz

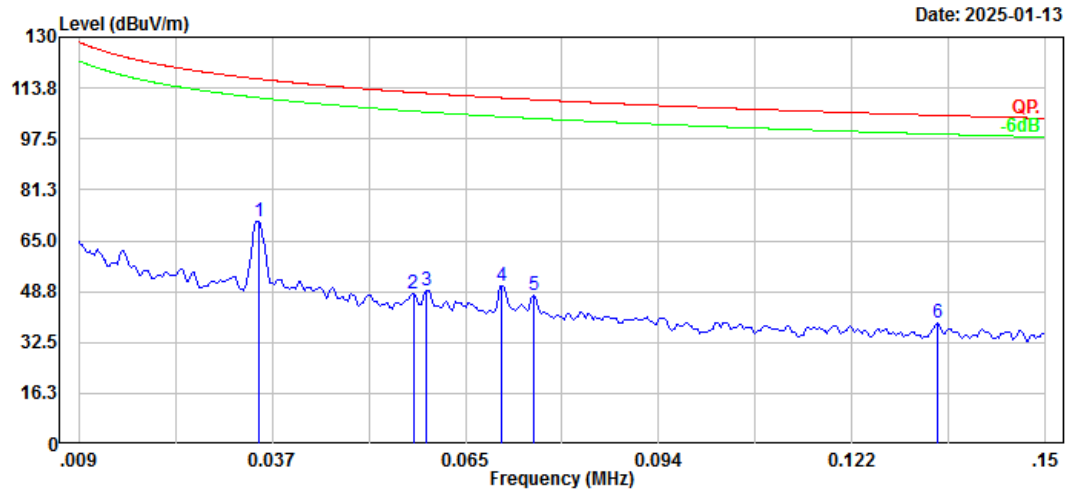


No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.035	24.71	46.62	71.33	116.67	45.34	Peak
2	0.058	5.20	42.72	47.92	112.37	64.45	Peak
3	0.060	6.64	42.38	49.02	112.08	63.06	Peak
4	0.071	10.02	40.46	50.48	110.61	60.13	Peak
5	0.075	7.70	39.71	47.41	110.07	62.66	Peak
6	0.134	5.03	33.51	38.54	105.05	66.51	Peak

Project No.: 2402A23350E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 4T
RBW:10kHz VBW:30kHz

Serial No.: 2WN8-2
Tester: Leesin Xiang

Date: 2025-01-13

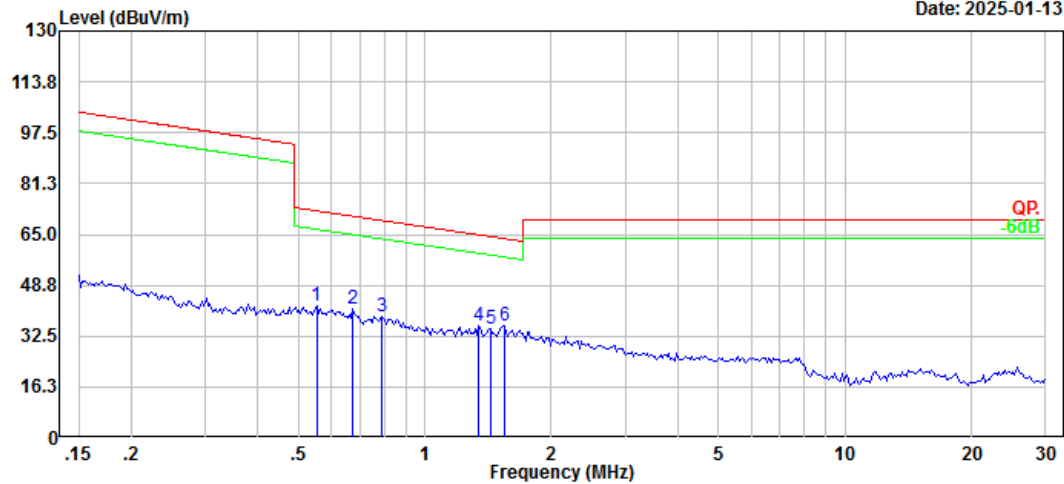


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.552	19.04	22.97	42.01	72.74	30.73	Peak
2	0.675	19.37	21.71	41.08	70.95	29.87	Peak
3	0.792	18.05	20.63	38.68	69.54	30.86	Peak
4	1.345	20.76	15.03	35.79	64.84	29.05	Peak
5	1.433	20.30	14.64	34.94	64.28	29.34	Peak
6	1.544	21.74	14.14	35.88	63.62	27.74	Peak

900MHz SRD(20M High channel was tested):

Project No.: 2402A23350E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 4T
RBW:300Hz VBW:1kHz

Serial No.: 2WN8-2
Tester: Leesin Xiang

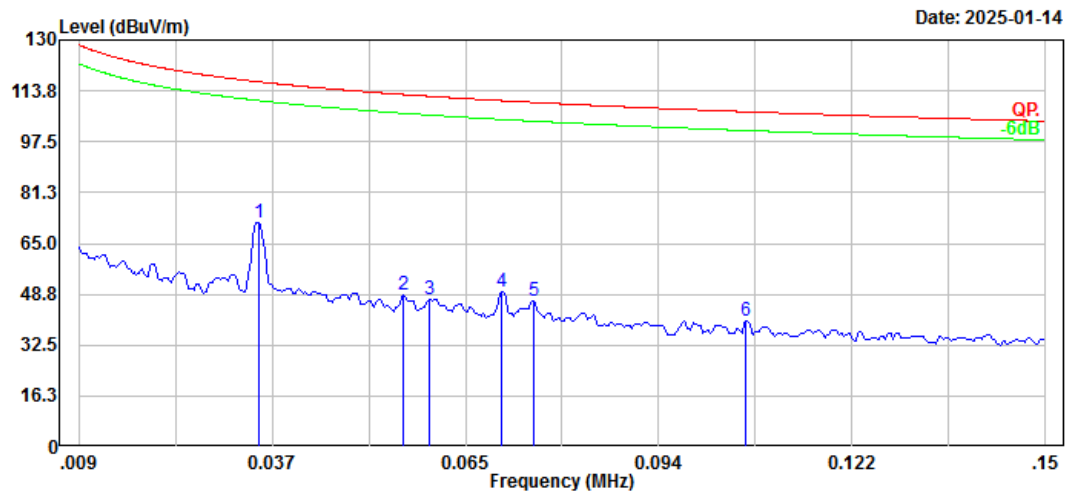


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.035	25.24	46.62	71.86	116.67	44.81	Peak
2	0.056	5.42	42.96	48.38	112.58	64.20	Peak
3	0.060	4.78	42.33	47.11	112.04	64.93	Peak
4	0.071	8.99	40.46	49.45	110.61	61.16	Peak
5	0.075	6.88	39.71	46.59	110.07	63.48	Peak
6	0.106	4.96	35.05	40.01	107.07	67.06	Peak

Project No.: 2402A23350E-RF
Polarization: Parallel
Test Mode: Transmitting
Note: 4T
RBW:10kHz VBW:30kHz

Serial No.: 2WN8-2
Tester: Leesin Xiang

Date: 2025-01-14

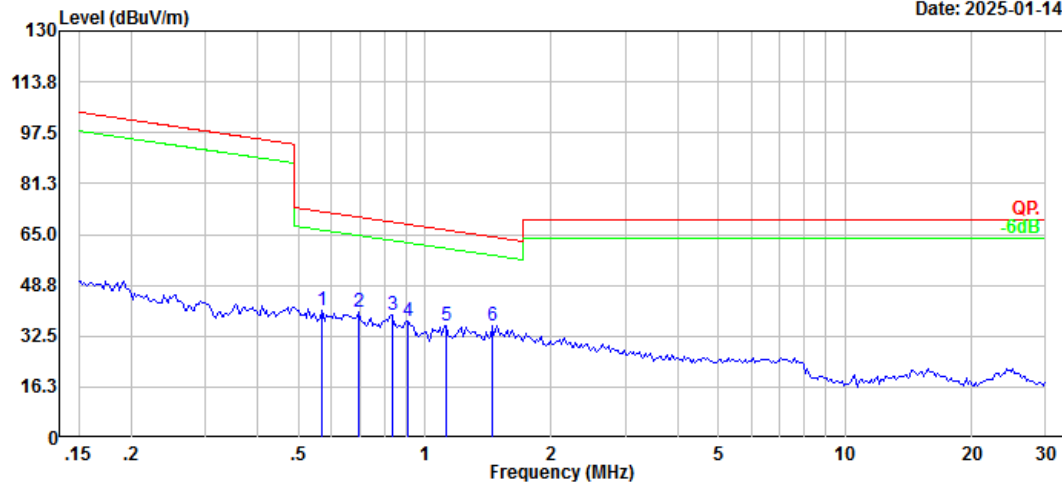


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	0.570	17.96	22.78	40.74	72.46	31.72	Peak
2	0.697	18.87	21.49	40.36	70.67	30.31	Peak
3	0.835	19.25	19.86	39.11	69.07	29.96	Peak
4	0.909	18.91	18.39	37.30	68.32	31.02	Peak
5	1.123	19.78	16.02	35.80	66.44	30.64	Peak
6	1.449	21.06	14.57	35.63	64.19	28.56	Peak

2) 30MHz-1GHz**2.4G SRD(1.4M Low channel was tested):**

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 4T
RBW:100kHz VBW:300kHz


Serial No.: 2WN8-2
Tester: Leesin Xiang

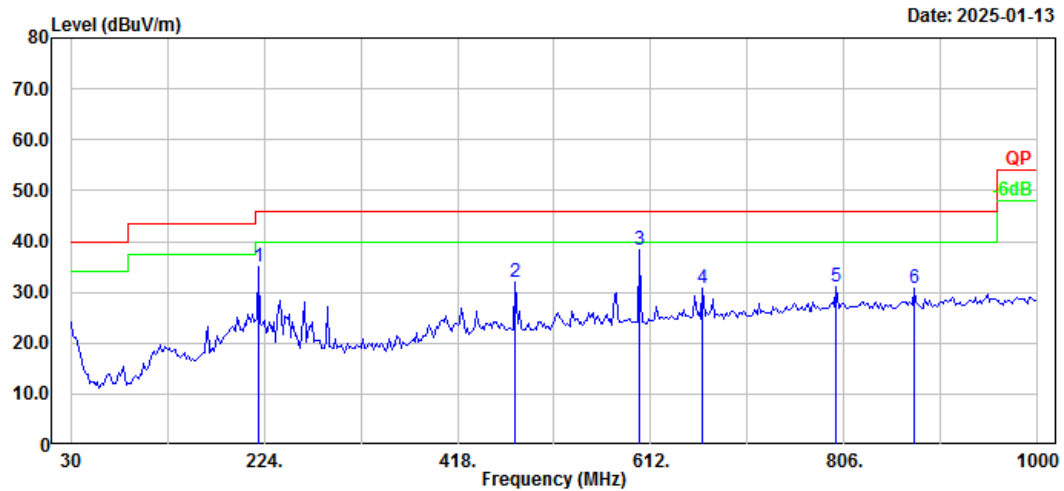

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	218.18	47.54	-12.51	35.03	46.00	10.97	Peak
2	476.20	36.75	-4.79	31.96	46.00	14.04	Peak
3	600.36	41.29	-2.91	38.38	46.00	7.62	Peak
4	664.38	32.54	-1.70	30.84	46.00	15.16	Peak
5	798.24	30.56	0.43	30.99	46.00	15.01	Peak
6	875.84	29.61	1.16	30.77	46.00	15.23	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 4T
RBW:100kHz VBW:300kHz

Serial No.: 2WN8-2
Tester: Leesin Xiang

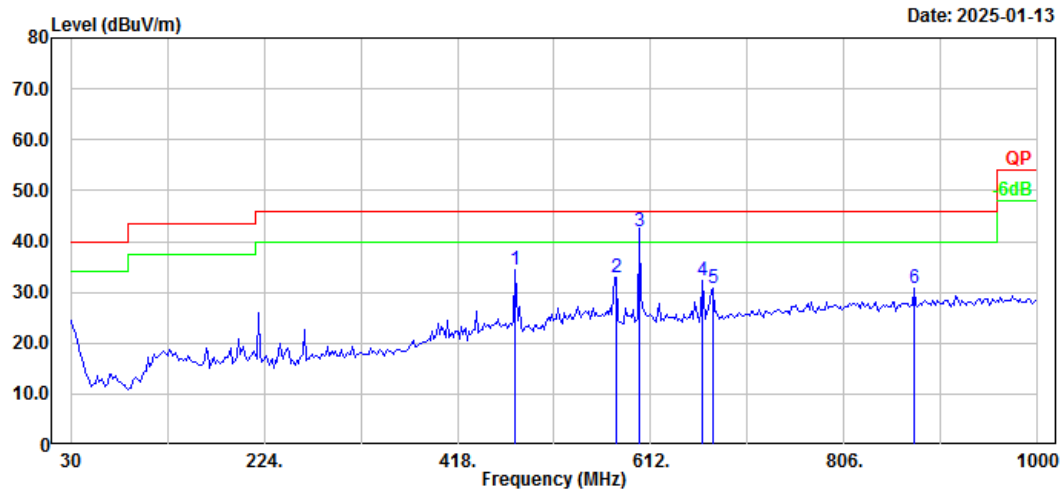


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	476.20	39.33	-4.79	34.54	46.00	11.46	Peak
2	577.08	36.21	-3.16	33.05	46.00	12.95	Peak
3	600.36	45.00	-2.91	42.09	46.00	3.91	QP
4	664.38	34.11	-1.70	32.41	46.00	13.59	Peak
5	674.08	32.28	-1.59	30.69	46.00	15.31	Peak
6	875.84	29.59	1.16	30.75	46.00	15.25	Peak

900MHz SRD(20M High channel was tested):

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: 4T
RBW:100kHz VBW:300kHz

Serial No.: 2WN8-2
Tester: Leesin Xiang

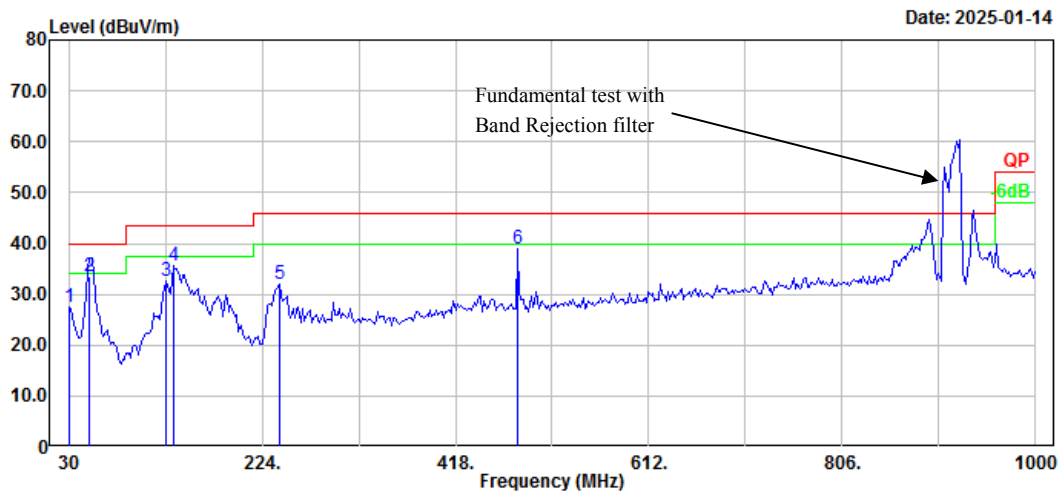


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	31.31	-3.80	27.51	40.00	12.49	Peak
2	51.34	50.09	-16.49	33.60	40.00	6.40	QP
3	127.00	42.37	-9.89	32.48	43.50	11.02	Peak
4	134.76	45.74	-10.14	35.60	43.50	7.90	Peak
5	241.46	43.72	-11.71	32.01	46.00	13.99	Peak
6	480.08	43.67	-4.71	38.96	46.00	7.04	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: 4T
RBW:100kHz VBW:300kHz

Serial No.: 2WN8-2
Tester: Leeson Xiang


Date: 2025-01-14

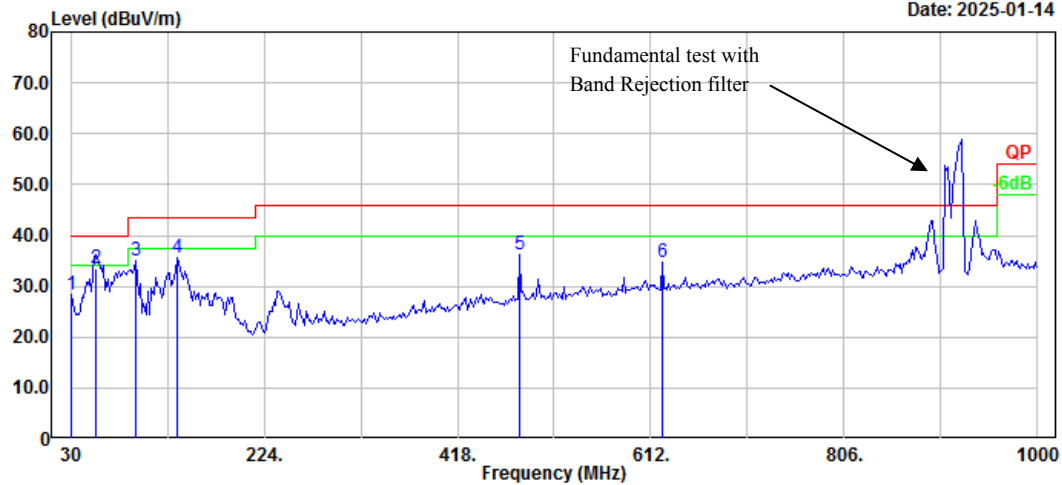




No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.00	32.27	-3.80	28.47	40.00	11.53	Peak
2	55.22	50.00	-16.55	33.45	40.00	6.55	QP
3	95.96	50.31	-15.22	35.09	43.50	8.41	Peak
4	136.70	45.90	-10.26	35.64	43.50	7.86	Peak
5	480.08	40.94	-4.71	36.23	46.00	9.77	Peak
6	623.64	37.00	-2.43	34.57	46.00	11.43	Peak

3) 2.4G SRD 1-18GHz:

1.4MHz mode, Low Channel, Horizontal

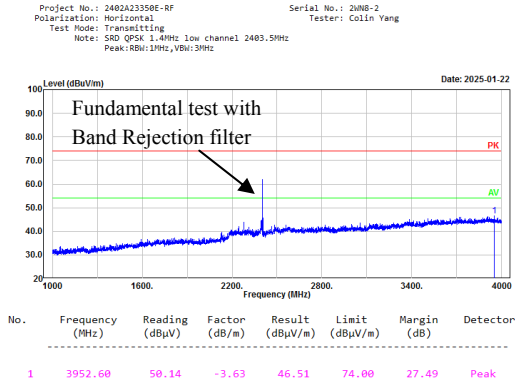

1.4MHz mode, Low Channel, Vertical

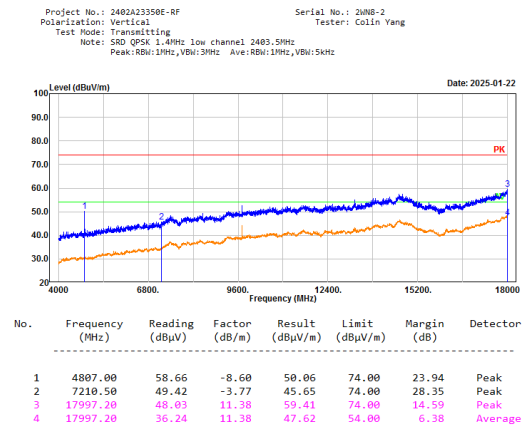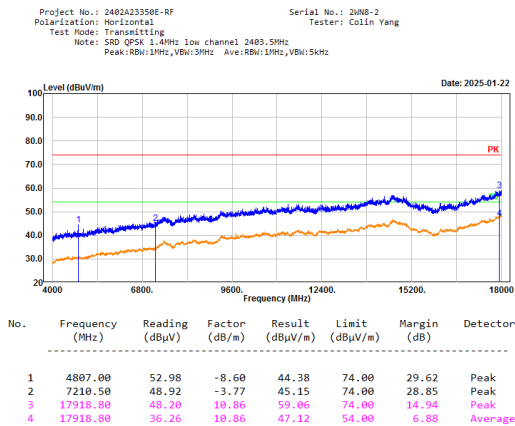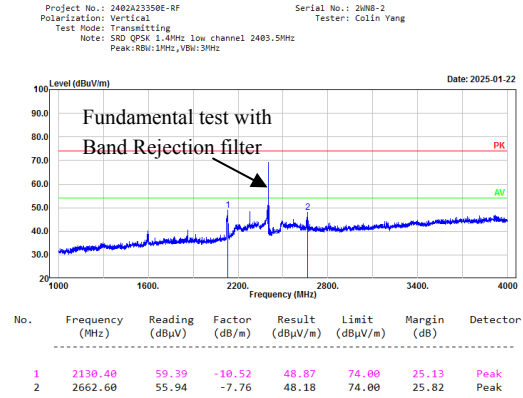


1.4MHz mode, Middle Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

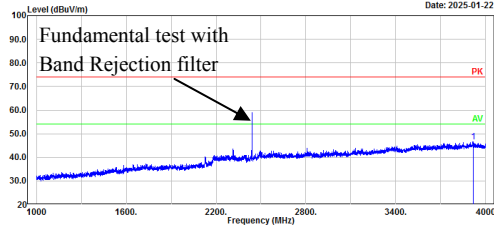


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3917.80	50.28	-3.72	46.56	74.00	27.44	Peak

1.4MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

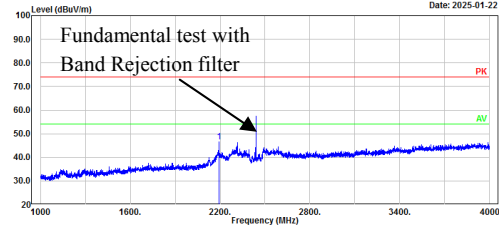


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2193.40	56.92	-10.26	46.66	74.00	27.34	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

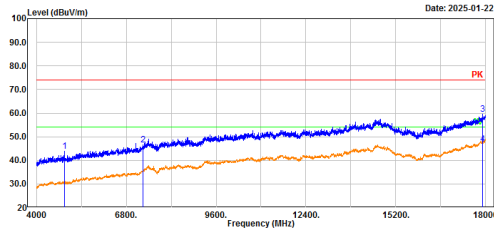


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4879.00	52.33	-8.48	43.85	74.00	30.15	Peak
2	7318.50	49.68	-3.23	46.45	74.00	27.55	Peak
3	17918.40	48.62	10.80	59.42	74.00	14.58	Peak
4	17918.40	36.09	10.80	46.89	54.00	7.11	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

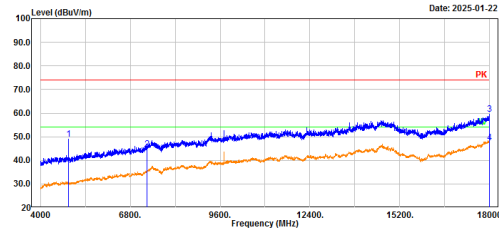


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4879.00	57.41	-8.48	48.93	74.00	25.07	Peak
2	7318.50	48.01	-3.23	44.78	74.00	29.22	Peak
3	17986.00	48.25	11.32	59.57	74.00	14.43	Peak
4	17986.00	36.24	11.32	47.56	54.00	6.44	Average

1.4MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 2475.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24NB-2
Tester: Colin Yang

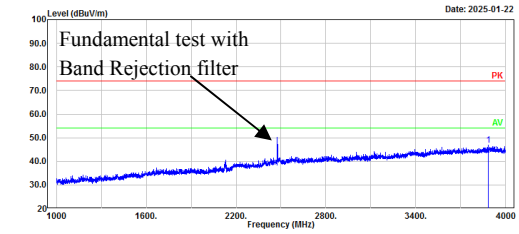


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3884.80	50.74	-3.85	46.89	74.00	27.11	Peak

1.4MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 2475.5MHz
Peak: RBW:1MHz, VBW:3MHz


Serial No.: 24NB-2
Tester: Colin Yang

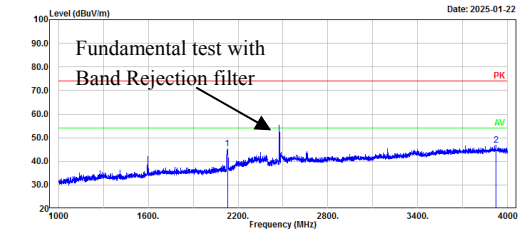

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2128.60	55.93	-10.53	45.40	74.00	28.60	Peak
2	3922.60	50.55	-3.75	46.80	74.00	27.20	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 2475.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 24NB-2
Tester: Colin Yang

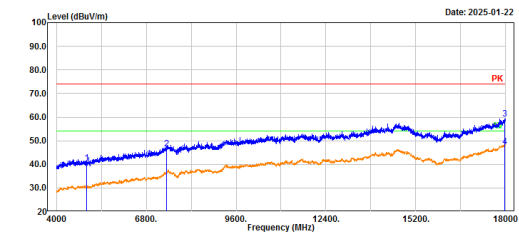

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4951.00	48.90	-8.48	40.42	74.00	33.58	Peak
2	7426.50	49.17	-2.64	46.53	74.00	27.47	Peak
3	17977.60	48.09	11.28	59.37	74.00	14.63	Peak
4	17977.60	36.08	11.28	47.36	54.00	6.64	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 2475.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

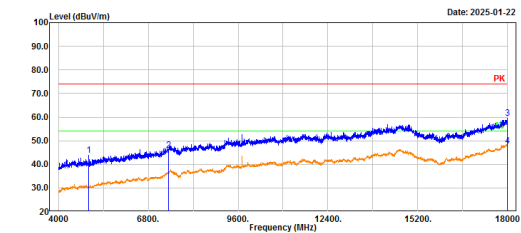


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4951.00	52.23	-8.48	43.75	74.00	30.25	Peak
2	7426.50	48.64	-2.64	46.00	74.00	28.00	Peak
3	17988.80	48.18	11.33	59.51	74.00	14.49	Peak
4	17988.80	36.31	11.33	47.64	54.00	6.36	Average

10MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

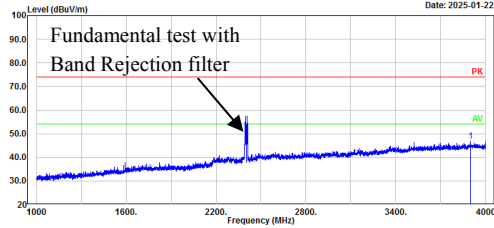


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3898.60	50.42	-3.60	46.82	74.00	27.18	Peak

10MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

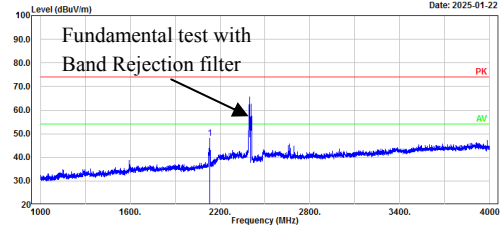


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2130.40	58.57	-10.52	48.05	74.00	25.95	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

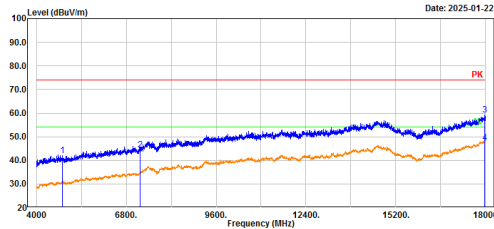


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4815.00	50.55	-8.59	41.96	74.00	32.04	Peak
2	7222.50	48.09	-3.74	44.35	74.00	29.65	Peak
3	17977.60	48.09	11.28	59.37	74.00	14.63	Peak
4	17977.60	36.21	11.28	47.49	54.00	6.51	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 2MNB-2
Tester: Colin Yang

Date: 2025-01-22

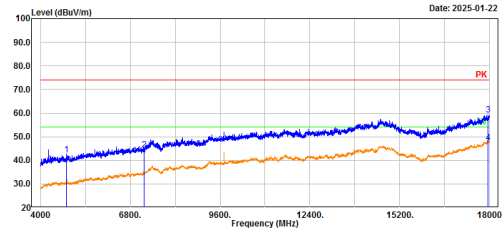


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4815.00	51.01	-8.59	42.42	74.00	31.58	Peak
2	7222.50	48.30	-3.74	44.56	74.00	29.44	Peak
3	17946.80	48.22	11.06	59.28	74.00	14.72	Peak
4	17946.80	36.28	11.06	47.34	54.00	6.66	Average

10MHz mode, Middle Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24NB-2
Tester: Colin Yang

Date: 2025-01-22

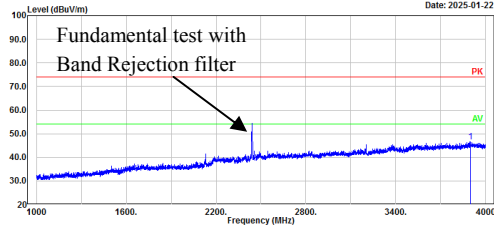


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3896.80	50.31	-3.62	46.69	74.00	27.31	Peak

10MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24NB-2
Tester: Colin Yang

Date: 2025-01-22

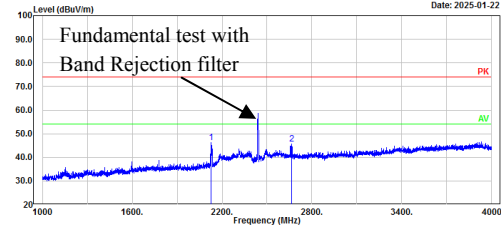


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2127.40	56.93	-10.53	46.40	74.00	27.60	Peak
2	2666.20	53.56	-7.79	45.77	74.00	28.23	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

Date: 2025-01-22

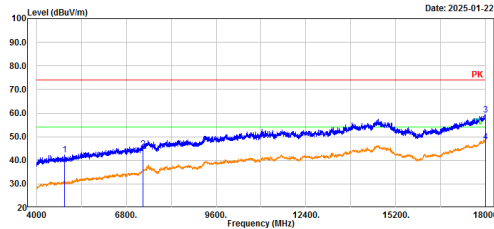


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4879.00	50.82	-8.48	42.34	74.00	31.66	Peak
2	7318.50	47.92	-3.23	44.69	74.00	29.31	Peak
3	17991.60	48.04	11.35	59.39	74.00	14.61	Peak
4	17991.60	36.38	11.35	47.73	54.00	6.27	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 2439.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

Date: 2025-01-22

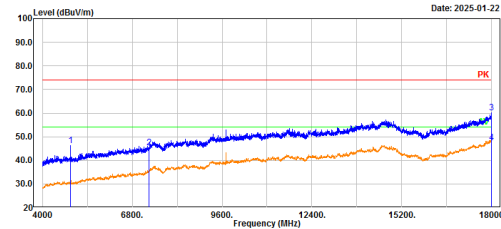


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4879.00	54.81	-8.48	46.33	74.00	27.67	Peak
2	7318.50	48.58	-3.23	45.35	74.00	28.65	Peak
3	17991.60	48.69	11.35	60.04	74.00	13.96	Peak
4	17991.60	36.13	11.35	47.48	54.00	6.52	Average

10MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24N8-2
Tester: Colin Yang

Date: 2025-01-22

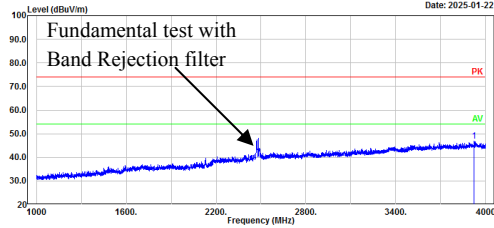


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3923.80	50.49	-3.75	46.74	74.00	27.26	Peak

10MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24N8-2
Tester: Colin Yang

Date: 2025-01-22

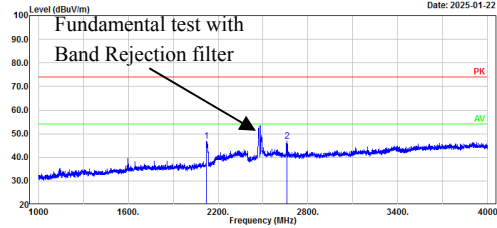


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2123.20	57.43	-10.54	46.89	74.00	27.11	Peak
2	2657.80	54.54	-7.74	46.80	74.00	27.20	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 24N8-2
Tester: Colin Yang

Date: 2025-01-22

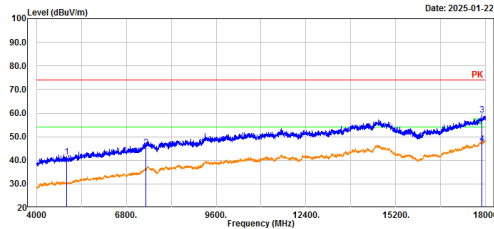


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4943.00	49.98	-8.47	41.51	74.00	32.49	Peak
2	7412.50	48.12	-2.66	45.46	74.00	28.54	Peak
3	17885.20	48.44	10.66	59.10	74.00	14.90	Peak
4	17885.20	36.22	10.66	46.88	54.00	7.12	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 24N8-2
Tester: Colin Yang

Date: 2025-01-22

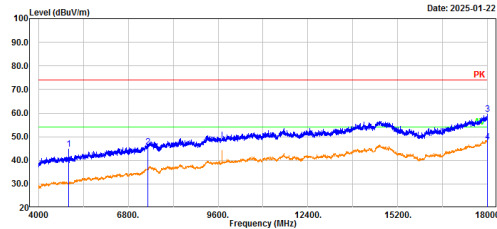


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4943.00	53.20	-8.47	44.73	74.00	29.27	Peak
2	7412.50	48.18	-2.66	45.52	74.00	28.48	Peak
3	17994.40	48.24	11.37	59.61	74.00	14.39	Peak
4	17994.40	36.29	11.37	47.66	54.00	6.34	Average

20MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 24N8-2
Tester: Colin Yang

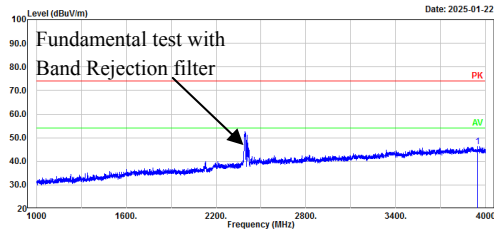


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3944.20	50.03	-3.63	46.40	74.00	27.60	Peak

20MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak: RBW:1MHz, VBW:3MHz


Serial No.: 24N8-2
Tester: Colin Yang

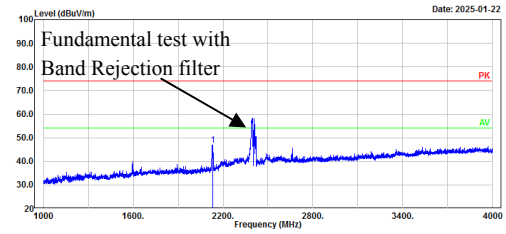

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2129.20	57.38	-10.53	46.85	74.00	27.15	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 24N8-2
Tester: Colin Yang

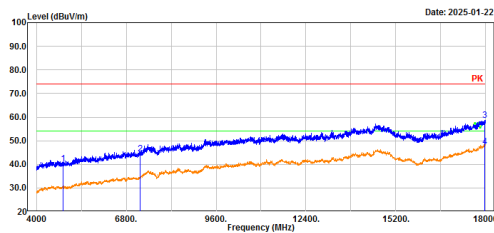

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4825.00	48.85	-8.58	40.27	74.00	33.73	Peak
2	7237.50	48.12	-3.67	44.45	74.00	29.55	Peak
3	17963.60	47.56	11.18	58.74	74.00	15.26	Peak
4	17963.60	36.19	11.18	47.37	54.00	6.63	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz


Serial No.: 24N8-2
Tester: Colin Yang

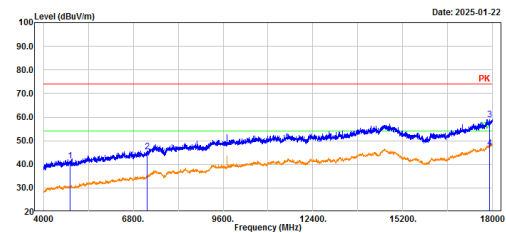

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4825.00	49.89	-8.58	41.31	74.00	32.69	Peak
2	7237.50	49.08	-3.67	45.41	74.00	28.59	Peak
3	17962.00	48.25	10.74	58.99	74.00	15.01	Peak
4	17962.00	36.06	10.74	46.80	54.00	7.20	Average

20MHz mode, Middle Channel, Horizontal


Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Serial No.: 20NB-2
Tester: Colin Yang
Note: SRD QPSK 20MHz middle channel 2437.5MHz
Peak: RBW:1MHz, VBW:3MHz

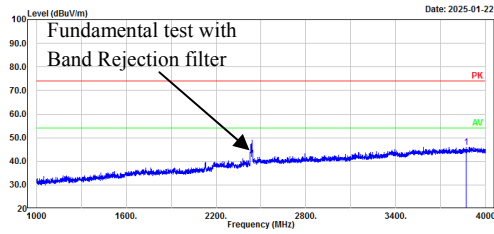

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3871.60	49.90	-3.96	45.94	74.00	28.06	Peak


20MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Serial No.: 20NB-2
Tester: Colin Yang
Note: SRD QPSK 20MHz middle channel 2437.5MHz
Peak: RBW:1MHz, VBW:3MHz

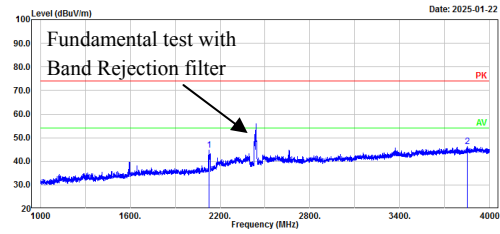


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2125.60	55.25	-10.54	44.71	74.00	29.29	Peak
2	3858.00	50.27	-3.89	46.38	74.00	27.62	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Serial No.: 20NB-2
Tester: Colin Yang
Note: SRD QPSK 20MHz middle channel 2437.5MHz
Peak: RBW:1MHz, VBW:3MHz
Ave: RBW:1MHz, VBW:5kHz

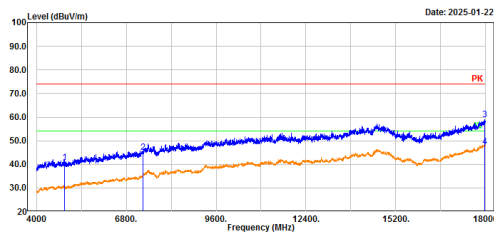

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4875.00	49.25	-8.49	40.76	74.00	33.24	Peak
2	7312.50	48.35	-3.27	45.08	74.00	28.92	Peak
3	17972.00	47.62	11.24	58.86	74.00	15.14	Peak
4	17972.00	36.14	11.24	47.38	54.00	6.62	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Serial No.: 20NB-2
Tester: Colin Yang
Note: SRD QPSK 20MHz middle channel 2437.5MHz
Peak: RBW:1MHz, VBW:3MHz
Ave: RBW:1MHz, VBW:5kHz

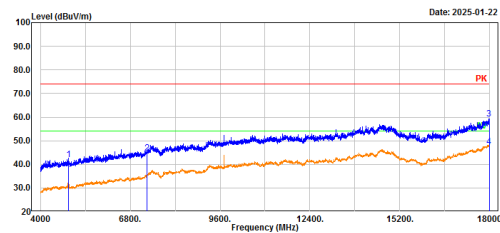


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4875.00	50.44	-8.49	41.95	74.00	32.05	Peak
2	7312.50	48.16	-3.27	44.89	74.00	29.11	Peak
3	17980.40	47.86	11.30	59.16	74.00	14.84	Peak
4	17980.40	36.16	11.30	47.46	54.00	6.54	Average

20MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 20NB-2
Tester: Colin Yang

Date: 2025-01-22

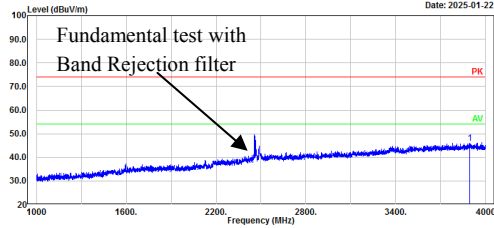


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	3893.80	49.63	-3.67	45.96	74.00	28.04	Peak

20MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak: RBW:1MHz, VBW:3MHz

Serial No.: 20NB-2
Tester: Colin Yang

Date: 2025-01-22

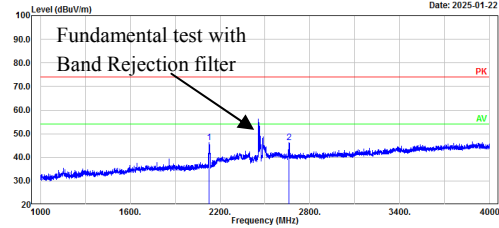


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2125.60	56.73	-10.54	46.19	74.00	27.81	Peak
2	2668.80	53.99	-7.76	46.23	74.00	27.77	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 20NB-2
Tester: Colin Yang

Date: 2025-01-22

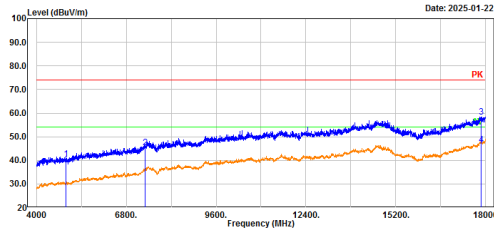


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4925.00	48.93	-8.47	40.46	74.00	33.54	Peak
2	7387.50	47.94	-2.70	45.24	74.00	28.76	Peak
3	17862.80	47.91	10.53	58.44	74.00	15.56	Peak
4	17862.80	36.02	10.53	46.55	54.00	7.45	Average

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak: RBW:1MHz, VBW:3MHz Ave: RBW:1MHz, VBW:5kHz

Serial No.: 20NB-2
Tester: Colin Yang



Date: 2025-01-22




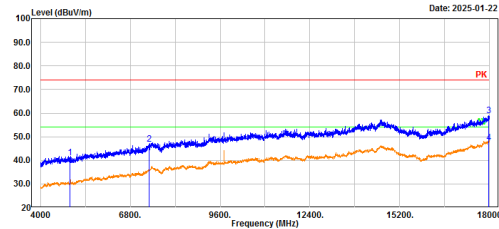


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	4925.00	49.61	-8.47	41.14	74.00	32.86	Peak
2	7387.50	49.45	-2.70	46.75	74.00	27.25	Peak
3	17963.60	47.80	11.18	58.98	74.00	15.02	Peak
4	17963.60	36.20	11.18	47.38	54.00	6.62	Average

18-25GHz:

No Emission was detected in the range 18-25GHz, test was performed on the mode and channel which with the maximum power.

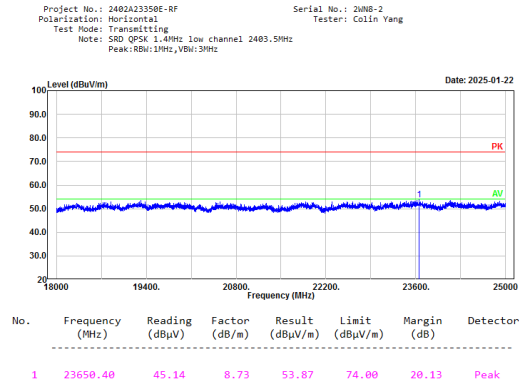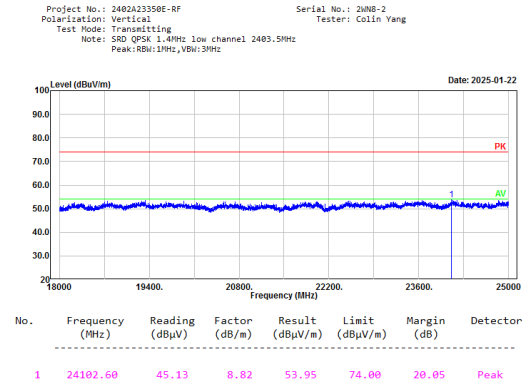
1.4MHz mode, Low Channel, Horizontal**1.4MHz mode, Low Channel, Vertical**

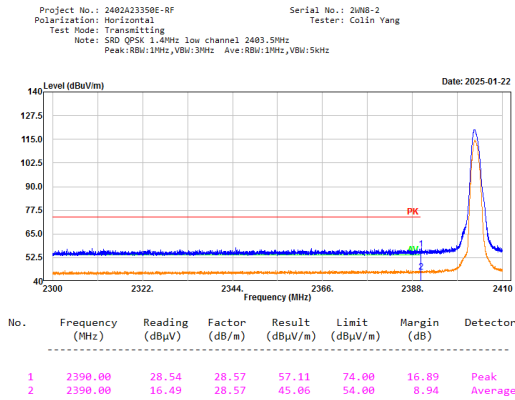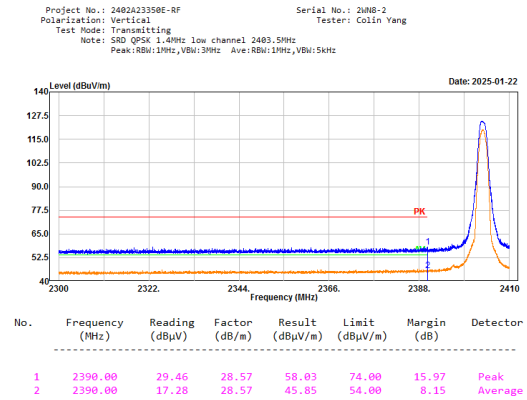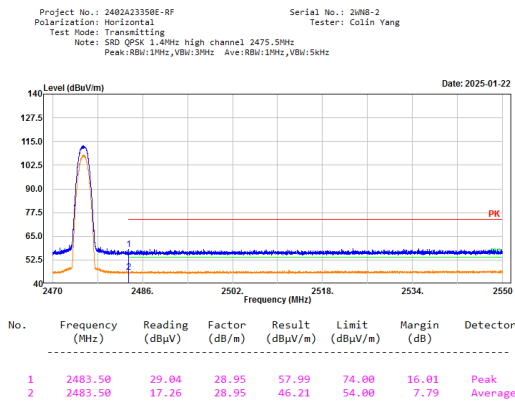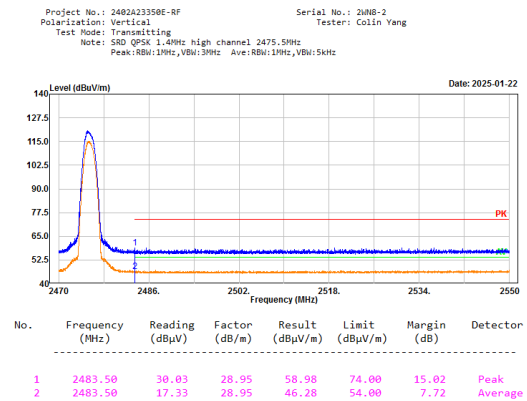**Bandedge:
2.4G SRD****1.4MHz mode, Low Channel, Horizontal****1.4MHz mode, Low Channel, Vertical****1.4MHz mode, High Channel, Horizontal****1.4MHz mode, High Channel, Vertical**

10MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

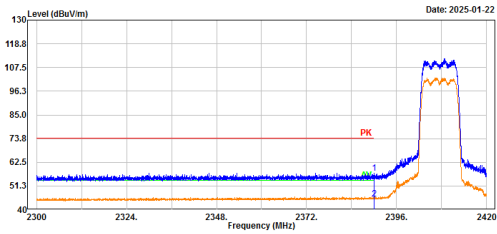


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	28.75	28.57	57.32	74.00	16.68	Peak
2	2390.00	16.55	28.57	45.12	54.00	8.88	Average

10MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 2407.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

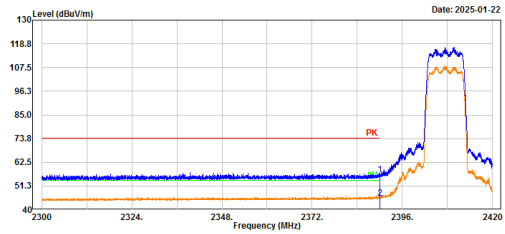


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	28.12	28.57	56.69	74.00	17.31	Peak
2	2390.00	16.86	28.57	45.43	54.00	8.57	Average

10MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

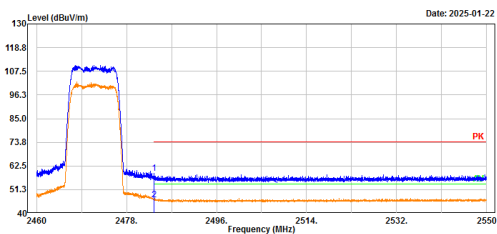


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	29.96	28.95	58.91	74.00	15.09	Peak
2	2483.50	17.62	28.95	46.57	54.00	7.43	Average

10MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 2471.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

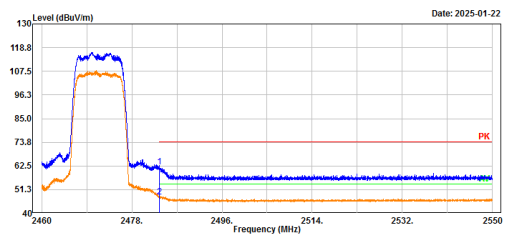


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	33.12	28.95	62.07	74.00	11.93	Peak
2	2483.50	18.86	28.95	47.81	54.00	6.19	Average

20MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

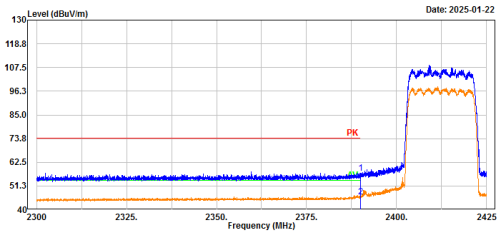


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	28.67	28.57	57.24	74.00	16.76	Peak
2	2390.00	17.49	28.57	46.06	54.00	7.94	Average

20MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 2412.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

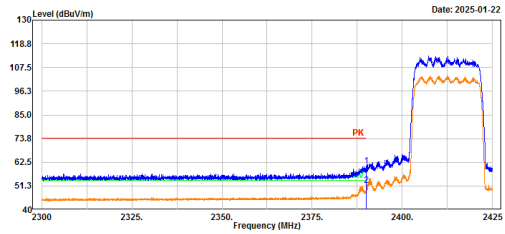


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2390.00	32.24	28.57	60.81	74.00	13.19	Peak
2	2390.00	22.83	28.57	51.40	54.00	2.60	Average

20MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

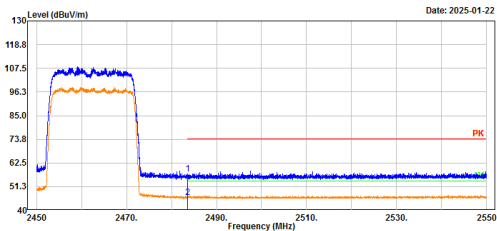


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	28.41	28.95	57.36	74.00	16.64	Peak
2	2483.50	17.23	28.95	46.18	54.00	7.82	Average

20MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 2462.5MHz
Peak:RBW:1MHz,VBW:3MHz Ave:RBW:1MHz,VBW:5kHz

Serial No.: 24NB-2
Tester: Colin Yang

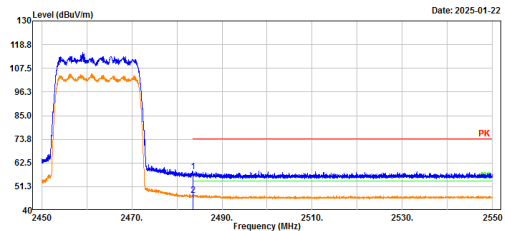

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	2483.50	29.46	28.95	58.41	74.00	15.59	Peak
2	2483.50	18.26	28.95	47.21	54.00	6.79	Average


900M SRD(1-10GHz)

1.4MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz low channel 904MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24NB-2
Tester: Leo Xiao

Date: 2025-01-21

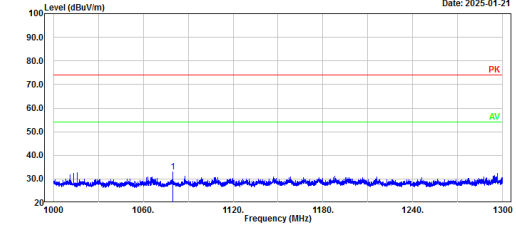


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1079.68	50.88	-17.85	33.03	74.00	40.97	Peak

1.4MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz low channel 904MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24NB-2
Tester: Leo Xiao

Date: 2025-01-21

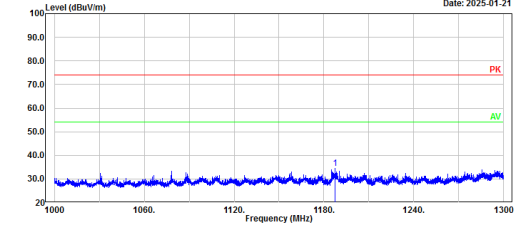


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1187.44	52.12	-17.75	34.37	74.00	39.63	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz low channel 904MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24NB-2
Tester: Leo Xiao

Date: 2025-01-21

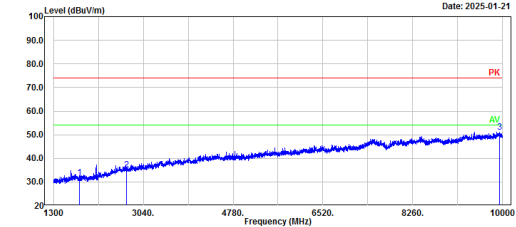


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1808.00	46.97	-15.27	31.70	74.00	42.30	Peak
3	9935.62	49.29	-1.84	51.13	74.00	22.87	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz low channel 904MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24NB-2
Tester: Leo Xiao

Date: 2025-01-21

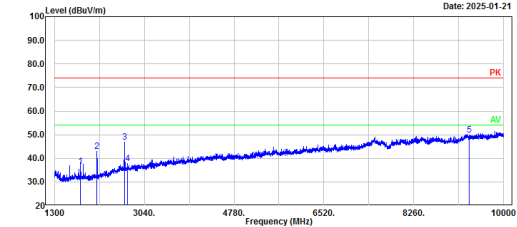


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1808.00	52.01	-15.27	36.74	74.00	37.26	Peak
2	2123.02	57.45	-14.42	43.03	74.00	30.97	Peak
3	2657.20	59.10	-12.24	46.86	74.00	27.14	Peak
4	2712.00	50.00	-12.18	37.82	74.00	36.18	Peak
5	9335.32	49.13	0.84	49.97	74.00	24.03	Peak

1.4MHz mode, Middle Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 916MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2MNB-2
Tester: Leo Xiao

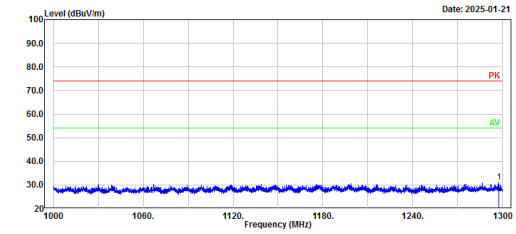


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1297.24	48.58	-17.52	31.06	74.00	42.94	Peak

1.4MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 916MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 2MNB-2
Tester: Leo Xiao

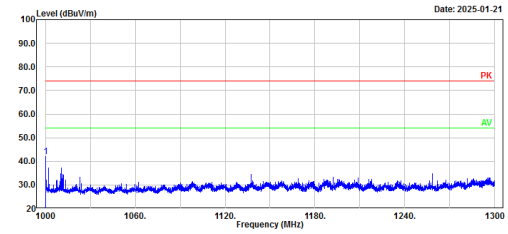

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.24	60.07	-17.94	42.13	74.00	31.87	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 916MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 2MNB-2
Tester: Leo Xiao

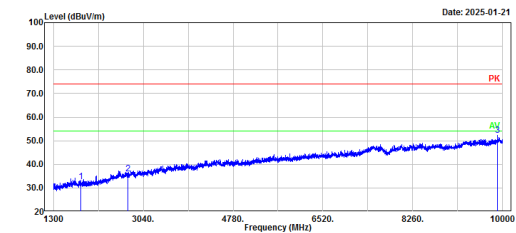

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1832.00	47.82	-15.19	32.63	74.00	41.37	Peak
2	2748.00	48.01	-12.12	35.89	74.00	38.11	Peak
3	9902.56	50.45	1.78	52.23	74.00	21.77	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz middle channel 916MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2MNB-2
Tester: Leo Xiao

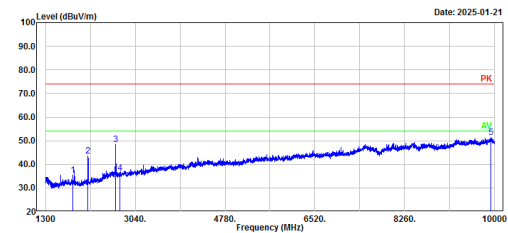


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1832.00	50.47	-15.19	35.28	74.00	38.72	Peak
2	2126.50	58.05	-14.42	43.63	74.00	30.37	Peak
3	2664.16	60.77	-12.25	48.52	74.00	25.48	Peak
4	2748.00	48.48	-12.12	36.36	74.00	37.64	Peak
5	9925.18	49.55	1.83	51.38	74.00	22.62	Peak

1.4MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 926MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2MNB-2
Tester: Leo Xiao

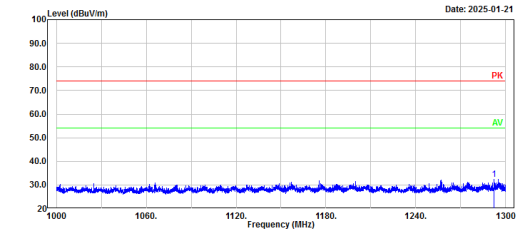


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1292.14	49.94	-17.54	32.40	74.00	41.60	Peak

1.4MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 926MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 2MNB-2
Tester: Leo Xiao

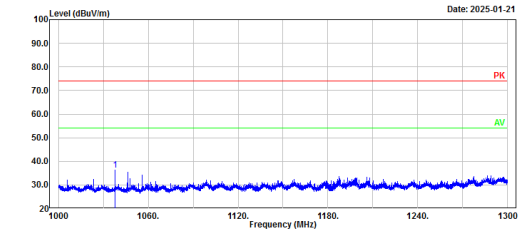

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1037.80	54.31	-17.90	36.41	74.00	37.59	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 926MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 2MNB-2
Tester: Leo Xiao

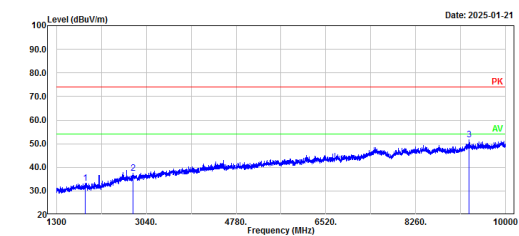

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1852.00	48.43	-15.14	33.29	74.00	40.71	Peak
2	2778.00	49.63	-12.06	37.57	74.00	36.43	Peak
3	9291.82	51.11	0.70	51.81	74.00	22.19	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 1.4MHz high channel 926MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 2MNB-2
Tester: Leo Xiao

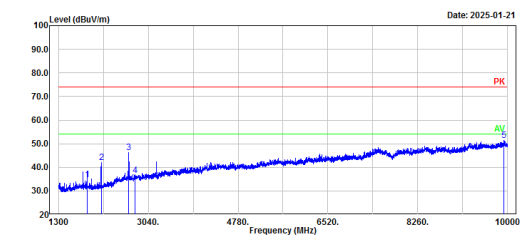


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1852.00	49.82	-15.14	34.68	74.00	39.32	Peak
2	2129.98	56.43	-14.40	42.03	74.00	31.97	Peak
3	2655.46	58.43	-12.24	46.19	74.00	27.81	Peak
4	2778.00	48.59	-12.06	36.53	74.00	37.47	Peak
5	9930.40	49.45	1.84	51.29	74.00	22.71	Peak

10MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 909MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24N8-2
Tester: Leo Xiao

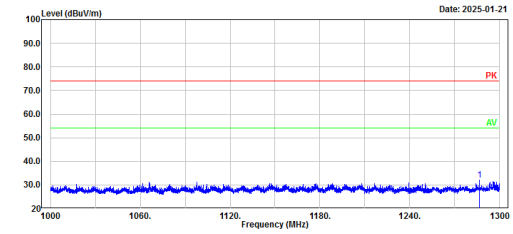


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1286.32	49.77	-17.55	32.22	74.00	41.78	Peak

10MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 909MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 24N8-2
Tester: Leo Xiao

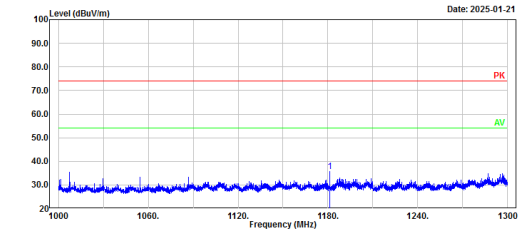

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1181.14	53.42	-17.76	35.66	74.00	38.34	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 909MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 24N8-2
Tester: Leo Xiao

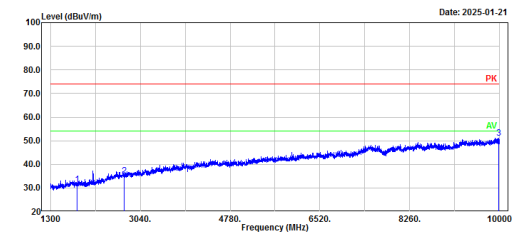

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1818.00	46.61	-15.23	31.38	74.00	42.62	Peak
2	2727.00	47.12	-12.16	34.96	74.00	39.04	Peak
3	9977.38	49.02	1.96	50.98	74.00	23.02	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz low channel 909MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 24N8-2
Tester: Leo Xiao

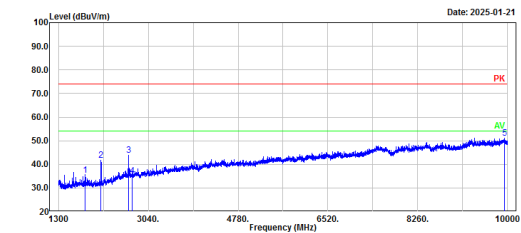


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1818.00	50.49	-15.23	35.26	74.00	38.74	Peak
2	2126.50	56.03	-14.42	41.61	74.00	32.39	Peak
3	2660.68	55.94	-12.24	43.70	74.00	30.30	Peak
4	2727.00	47.37	-12.16	35.21	74.00	38.79	Peak
5	9935.62	49.33	1.84	51.17	74.00	22.83	Peak

10MHz mode, Middle Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

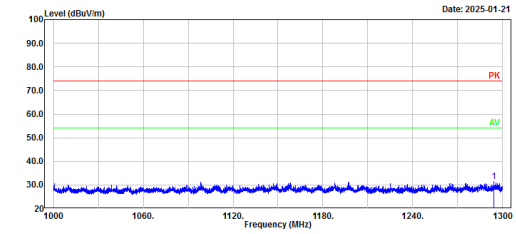


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1294.12	48.99	-17.54	31.45	74.00	42.55	Peak

10MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

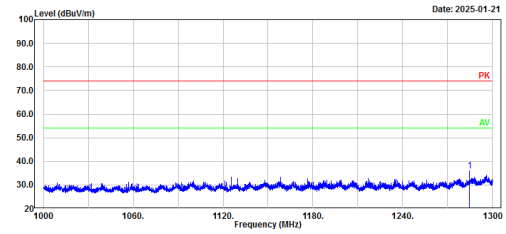

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1284.52	53.60	-17.55	36.05	74.00	37.95	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

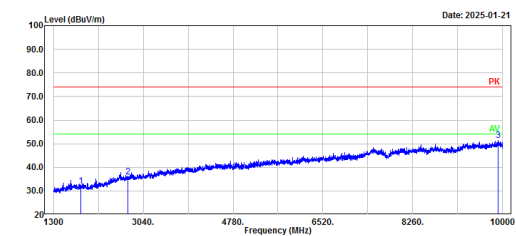

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.00	47.23	-15.19	32.04	74.00	41.96	Peak
2	2745.00	48.08	-12.13	35.95	74.00	38.05	Peak
3	9986.04	49.62	1.79	51.41	74.00	22.59	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

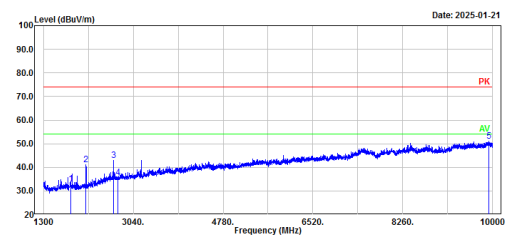


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.00	48.25	-15.19	33.06	74.00	40.94	Peak
2	2126.50	55.59	-14.42	41.17	74.00	32.83	Peak
3	2655.46	55.29	-12.24	43.05	74.00	30.95	Peak
4	2745.00	47.73	-12.13	35.60	74.00	38.40	Peak
5	9921.70	49.22	1.82	51.04	74.00	22.96	Peak

10MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 921MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 20NB-2
Tester: Leo Xiao

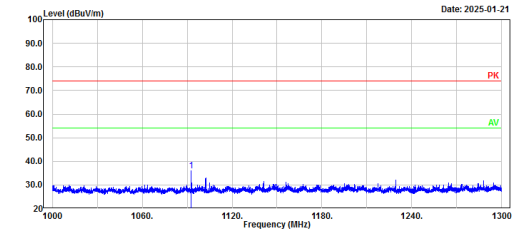


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1092.52	53.71	-17.84	35.87	74.00	38.13	Peak

10MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 921MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 20NB-2
Tester: Leo Xiao

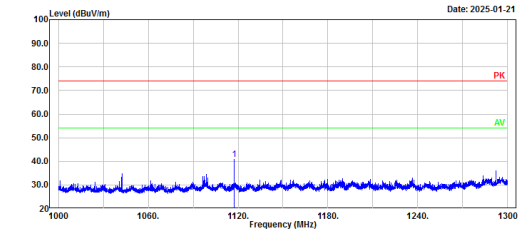

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1117.24	58.60	-17.81	40.79	74.00	33.21	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 921MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 20NB-2
Tester: Leo Xiao

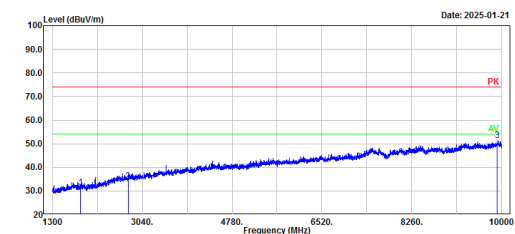

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1842.00	46.50	-15.16	31.34	74.00	42.66	Peak
2	2763.00	46.41	-12.08	34.33	74.00	39.67	Peak
3	9918.22	49.65	1.82	51.47	74.00	22.53	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 10MHz high channel 921MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 20NB-2
Tester: Leo Xiao

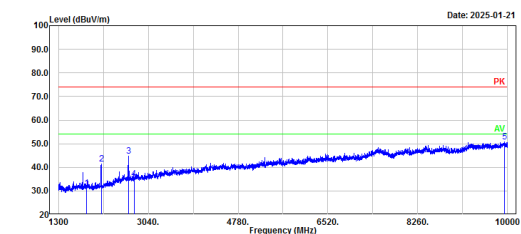


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1842.00	46.29	-15.16	31.13	74.00	42.87	Peak
2	2128.24	55.93	-14.41	41.52	74.00	32.48	Peak
3	2655.46	57.08	-12.24	44.84	74.00	29.16	Peak
4	2763.00	47.29	-12.08	35.21	74.00	38.79	Peak
5	9940.84	48.95	1.85	50.80	74.00	23.20	Peak

20MHz mode, Low Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 914MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

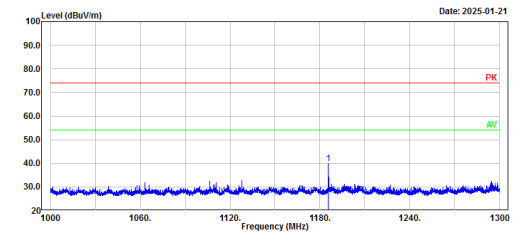


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1185.70	57.76	-17.75	40.01	74.00	33.99	Peak

20MHz mode, Low Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 914MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

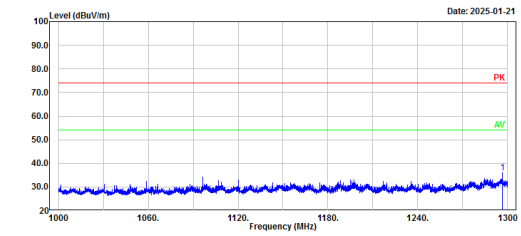

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1296.52	53.52	-17.53	35.99	74.00	38.01	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 914MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

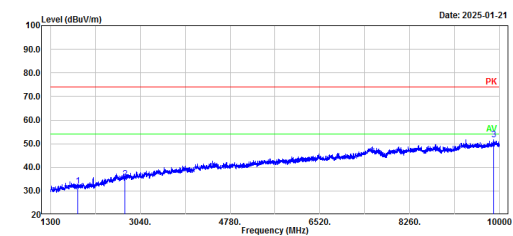

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1828.00	47.27	-15.20	32.07	74.00	41.93	Peak
2	2742.00	47.15	-12.13	35.02	74.00	38.98	Peak
3	9898.38	50.02	1.77	51.79	74.00	22.21	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz low channel 914MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

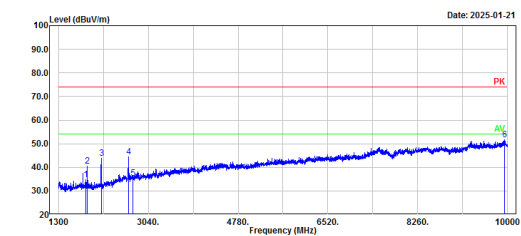


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1828.00	49.92	-15.20	34.72	74.00	39.28	Peak
2	1858.54	55.68	-15.11	40.57	74.00	33.43	Peak
3	2129.98	58.21	-14.40	43.81	74.00	30.19	Peak
4	2664.16	56.67	-12.25	44.42	74.00	29.58	Peak
5	2742.00	47.58	-12.13	35.45	74.00	38.55	Peak
6	9939.18	49.70	1.85	51.55	74.00	22.45	Peak

20MHz mode, Middle Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

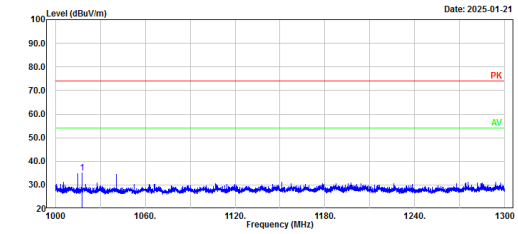


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1017.82	52.90	-17.92	34.98	74.00	39.02	Peak

20MHz mode, Middle Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

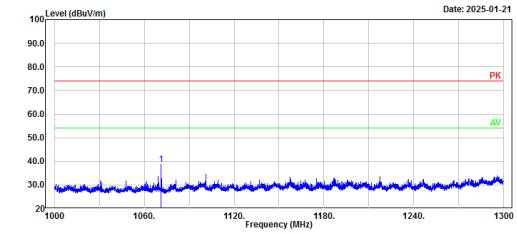

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1071.40	56.72	-17.87	38.85	74.00	35.15	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz


Serial No.: 20NB-2
Tester: Leo Xiao

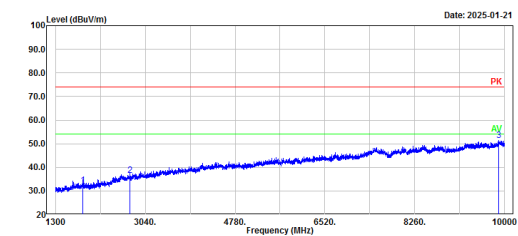

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.00	47.47	-15.19	32.28	74.00	41.72	Peak
2	2745.00	48.74	-12.13	36.61	74.00	37.39	Peak
3	9888.64	49.57	1.77	51.34	74.00	22.66	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz middle channel 915MHz
Peak:RBW:1MHz,VBW:30Hz

Serial No.: 20NB-2
Tester: Leo Xiao

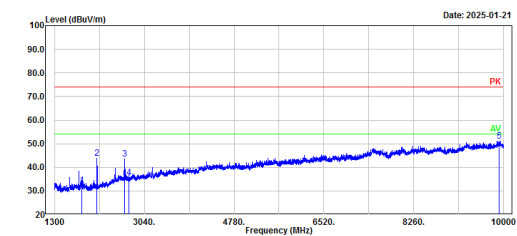


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1830.00	47.65	-15.19	32.46	74.00	41.54	Peak
2	2124.76	58.18	-14.42	43.76	74.00	30.24	Peak
3	2657.20	55.75	-12.24	43.51	74.00	30.49	Peak
4	2745.00	47.94	-12.13	35.81	74.00	38.19	Peak
5	9914.74	49.30	1.81	51.11	74.00	22.89	Peak

20MHz mode, High Channel, Horizontal

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 916MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 20NB-2
Tester: Leo Xiao

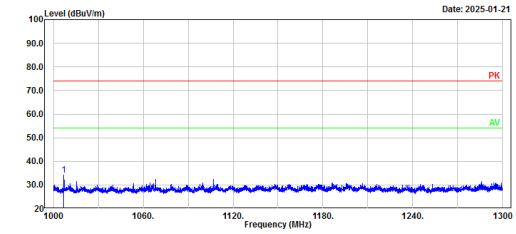


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1006.78	52.13	-17.93	34.20	74.00	39.80	Peak

20MHz mode, High Channel, Vertical

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 916MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 20NB-2
Tester: Leo Xiao

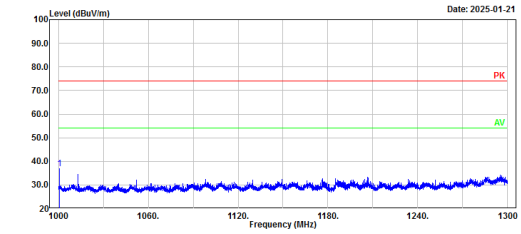

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1000.60	54.79	-17.94	36.85	74.00	37.15	Peak

Project No.: 2402A23350E-RF
Polarization: Horizontal
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 916MHz
Peak:RBW:1MHz,VBW:3MHz


Serial No.: 20NB-2
Tester: Leo Xiao

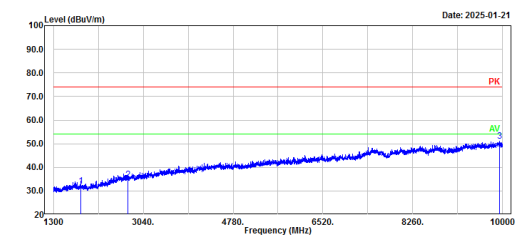

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1832.00	47.22	-15.19	32.03	74.00	41.97	Peak
2	2748.00	46.78	-12.12	34.66	74.00	39.34	Peak
3	9942.58	49.07	1.88	50.95	74.00	23.05	Peak

Project No.: 2402A23350E-RF
Polarization: Vertical
Test Mode: Transmitting
Note: SRD QPSK 20MHz high channel 916MHz
Peak:RBW:1MHz,VBW:3MHz

Serial No.: 20NB-2
Tester: Leo Xiao

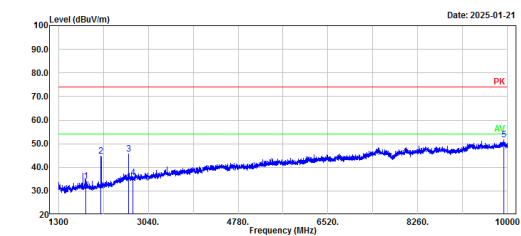

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	1832.00	49.30	-15.19	34.11	74.00	39.89	Peak
2	2126.50	59.18	-14.42	44.76	74.00	29.24	Peak
3	2662.42	57.91	-12.24	45.67	74.00	28.33	Peak
4	2748.00	47.95	-12.12	35.83	74.00	38.17	Peak
5	9932.14	49.75	1.84	51.59	74.00	22.41	Peak

5.3 Minimum 6 dB Emission Bandwidth

Serial No.:	2WN8-1	Test Date:	2025/1/20~2025/2/8
Test Site:	RF	Test Mode:	Transmitting
Tester:	Jojo Zhou	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.6~24.8	Relative Humidity: (%)	37~48	ATM Pressure: (kPa)	101.0~102.1
-----------------------------	-----------	----------------------------------	-------	-------------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSV40	101461	2024/9/5	2025/9/4
Eastsheep	Coaxial Attenuator	5W-N-JK-6G-10dB	F-08-EM503	2024/6/7	2025/6/6

* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Test Data:

Operation Bands	Test Modes	Test Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)
900MHz SRD	1.4M QPSK	904	1.129	≥ 0.5
		916	1.129	≥ 0.5
		926	1.125	≥ 0.5
	10M QPSK	909	9.001	≥ 0.5
		915	9.001	≥ 0.5
		921	9.001	≥ 0.5
	20M QPSK	914	18.061	≥ 0.5
		915	18.061	≥ 0.5
		916	18.061	≥ 0.5
2.4GHz SRD	1.4M QPSK	2403.5	1.133	≥ 0.5
		2439.5	1.133	≥ 0.5
		2475.5	1.125	≥ 0.5
	10M QPSK	2407.5	9.001	≥ 0.5
		2439.5	9.001	≥ 0.5
		2471.5	9.001	≥ 0.5
	20M QPSK	2412.5	18.061	≥ 0.5
		2437.5	18.061	≥ 0.5
		2462.5	18.061	≥ 0.5

Note: Test only was performed at Chain 0.


900MHz SRD Band:

1.4MHz,QPSK Lowest Channel

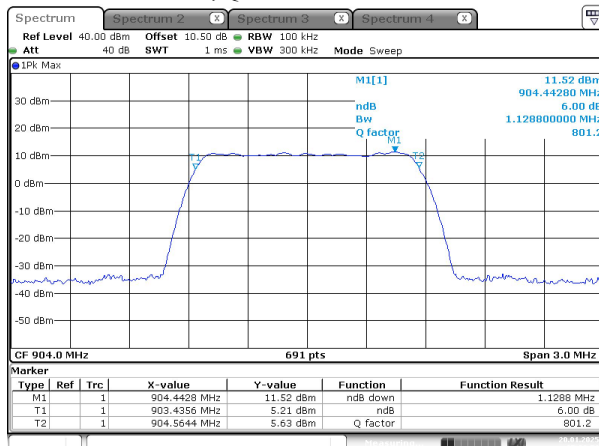


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 15:32:51

1.4MHz,QPSK Middle Channel

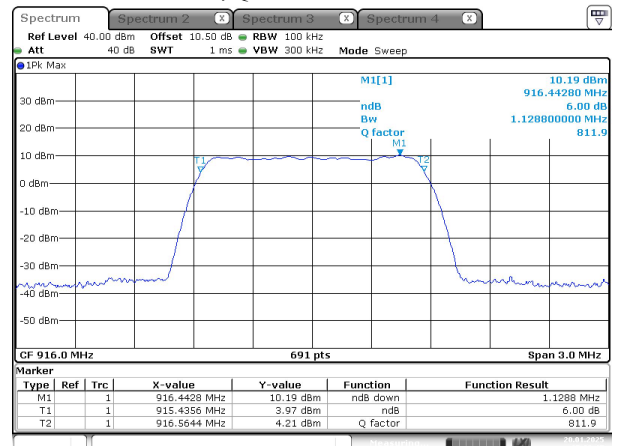


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 15:36:15

1.4MHz,QPSK Highest Channel

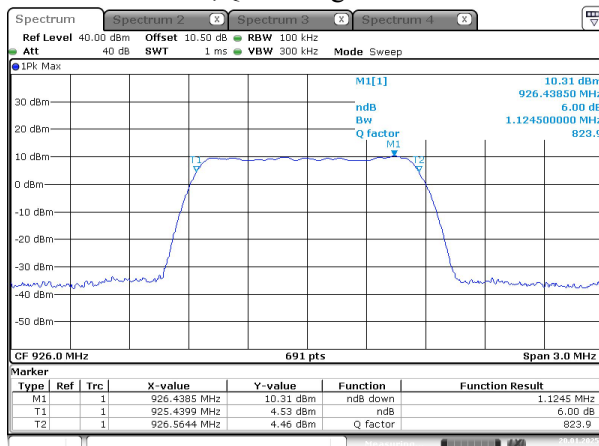


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 15:39:44

10MHz,QPSK Lowest Channel

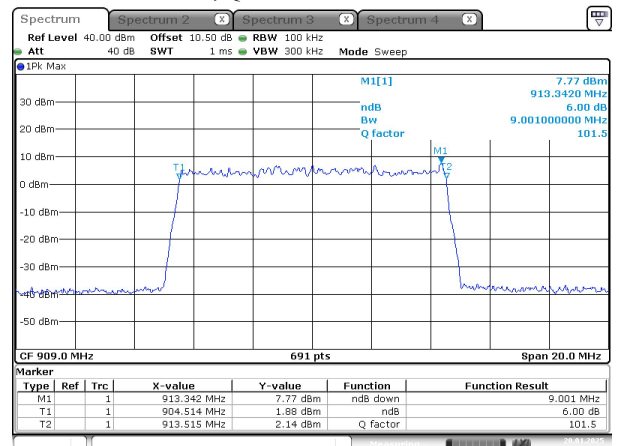


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 15:44:56

10MHz,QPSK Middle Channel

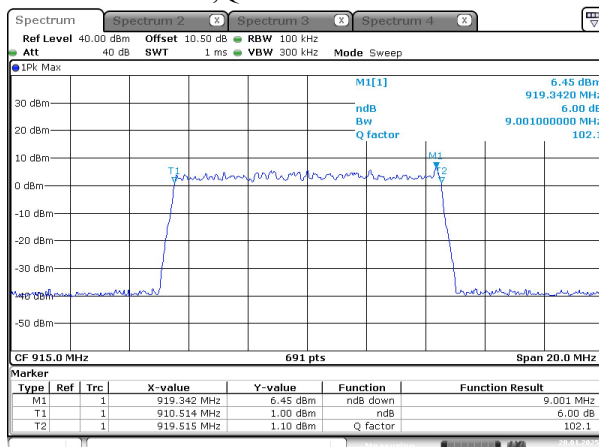


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 16:44:33

10MHz,QPSK Highest Channel

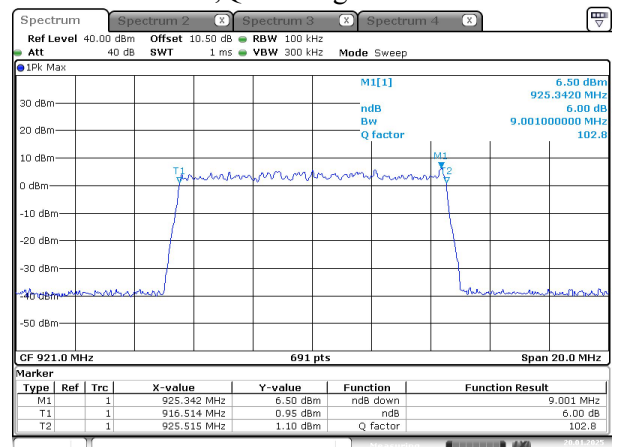


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 20.JAN.2025 16:47:53

20MHz,QPSK Lowest Channel

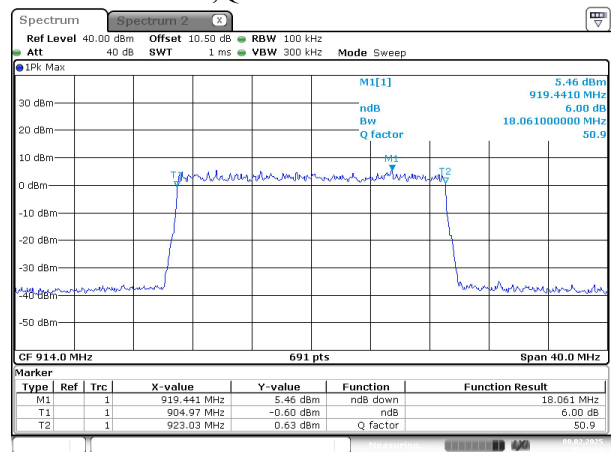


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 8.FEB.2025 10:28:36

20MHz,QPSK Middle Channel

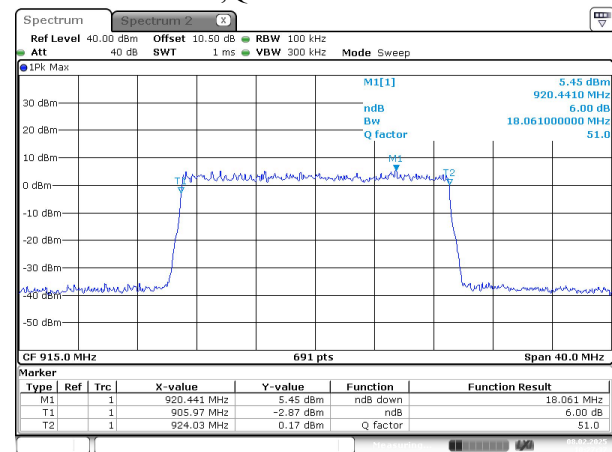


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 8.FEB.2025 10:27:37


20MHz,QPSK Highest Channel

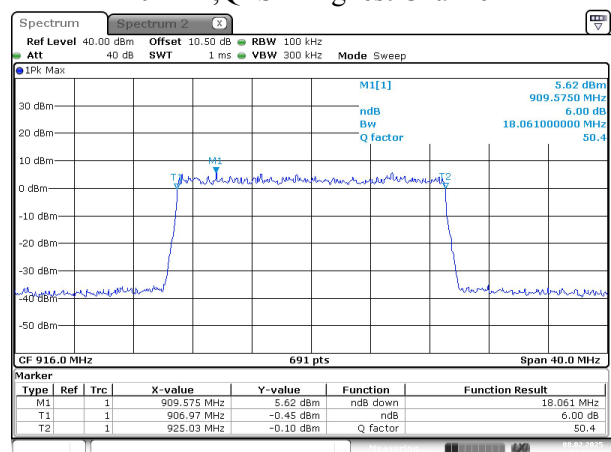


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 8.FEB.2025 10:26:35

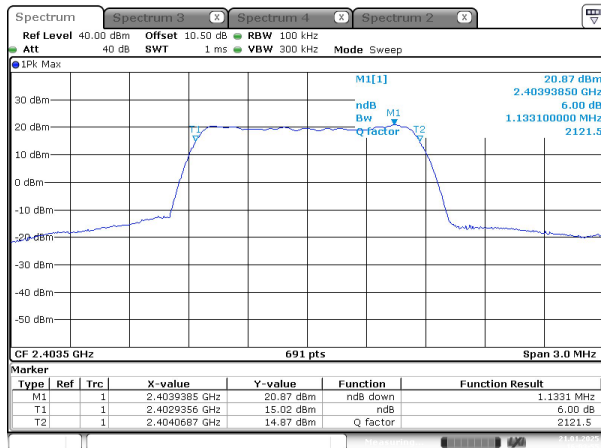2.4GHz SRD Band:**1.4MHz,QPSK Lowest Channel**


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:03:55

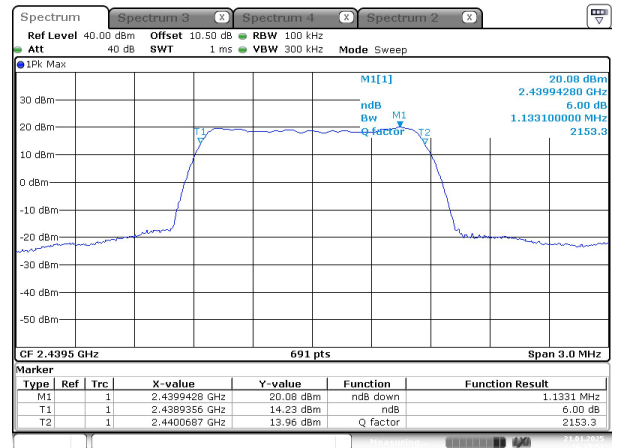1.4MHz,QPSK Middle Channel


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:15:51

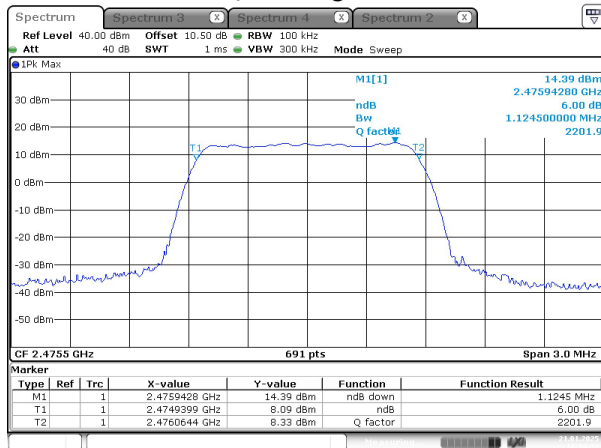1.4MHz,QPSK Highest Channel


ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:19:23

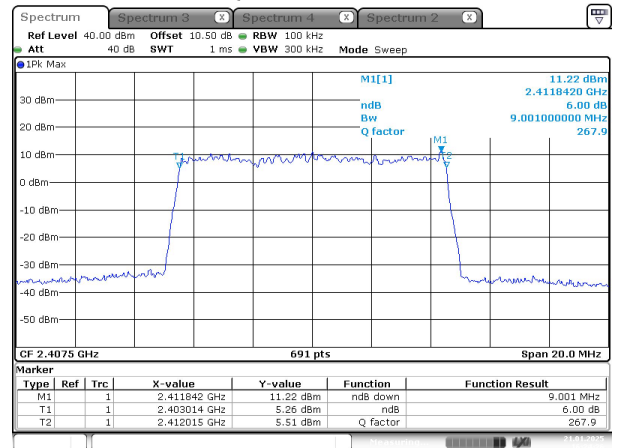10MHz,QPSK Lowest Channel

ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:24:26

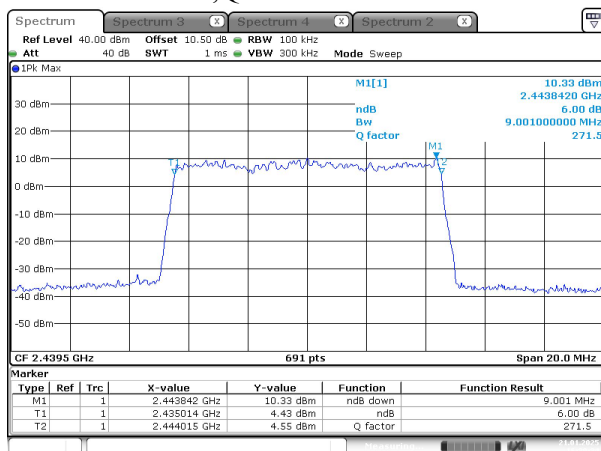10MHz,QPSK Middle Channel

ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:30:35

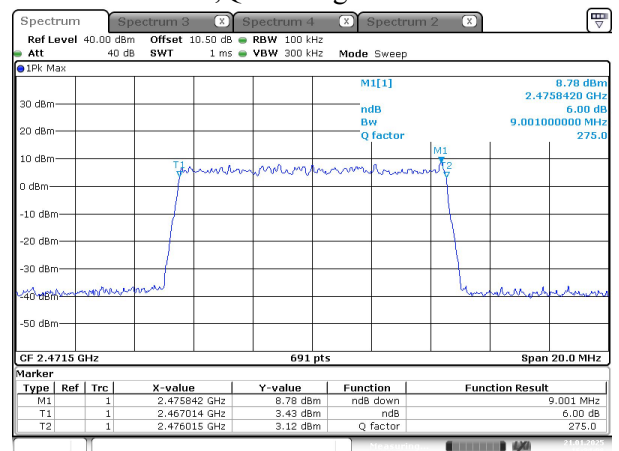10MHz,QPSK Highest Channel

ProjectNo.:2402A23350E-RF Tester:Jojo Zhou
Date: 21.JAN.2025 16:34:09