


Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

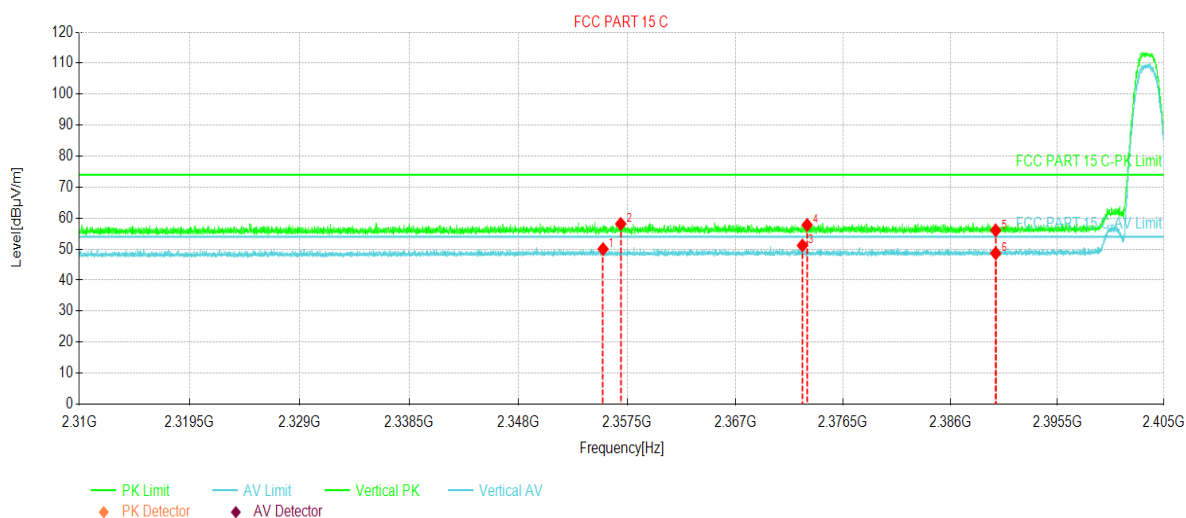


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2355.39	43.06	50.02	6.96	54.00	3.98	AV	Vertical
2	2356.94	51.18	58.15	6.97	74.00	15.85	PK	Vertical
3	2372.90	44.16	51.18	7.02	54.00	2.82	AV	Vertical
4	2373.32	50.79	57.81	7.02	74.00	16.19	PK	Vertical
5	2390.00	49.01	56.09	7.08	74.00	17.91	PK	Vertical
6	2390.00	41.58	48.66	7.08	54.00	5.34	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

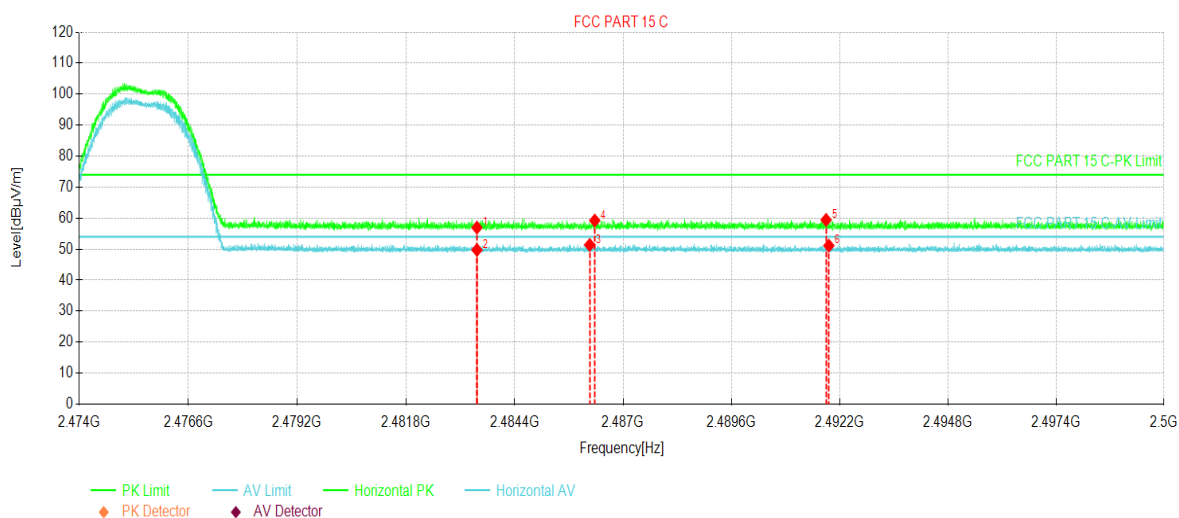


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.26	56.95	7.69	74.00	17.05	PK	Horizontal
2	2483.50	42.06	49.75	7.69	54.00	4.25	AV	Horizontal
3	2486.20	43.68	51.38	7.70	54.00	2.62	AV	Horizontal
4	2486.32	51.52	59.23	7.71	74.00	14.77	PK	Horizontal
5	2491.87	51.68	59.42	7.74	74.00	14.58	PK	Horizontal
6	2491.93	43.40	51.14	7.74	54.00	2.86	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

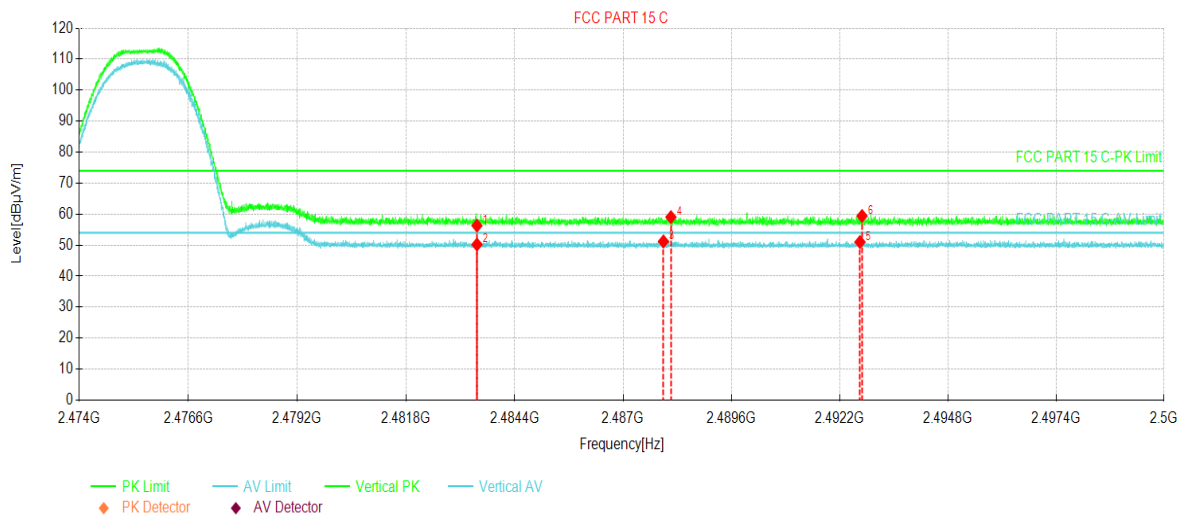


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	48.61	56.30	7.69	74.00	17.70	PK	Vertical
2	2483.50	42.50	50.19	7.69	54.00	3.81	AV	Vertical
3	2487.96	43.47	51.19	7.72	54.00	2.81	AV	Vertical
4	2488.14	51.34	59.06	7.72	74.00	14.94	PK	Vertical
5	2492.68	43.26	51.01	7.75	54.00	2.99	AV	Vertical
6	2492.73	51.67	59.42	7.75	74.00	14.58	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

BW: 10MHz

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

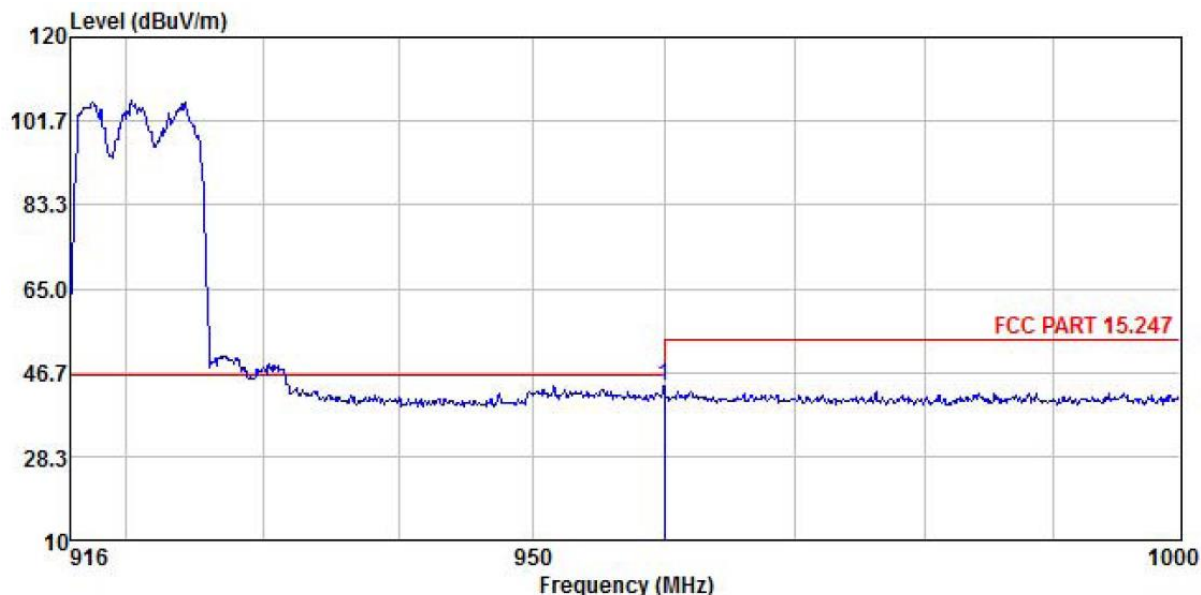


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Level	Line	Limit
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
	MHz						
1	960.023	17.12	22.86	3.51	0.00	43.49	54.00 -10.51

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

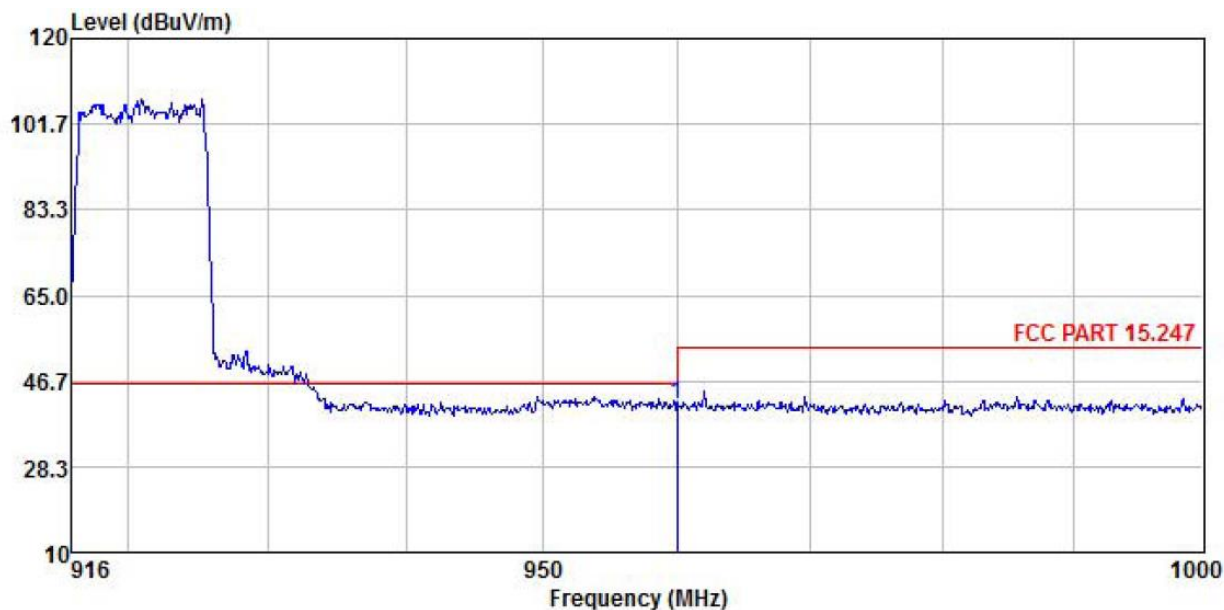


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.023	15.47	22.86	3.51	0.00	41.84	54.00	-12.16

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

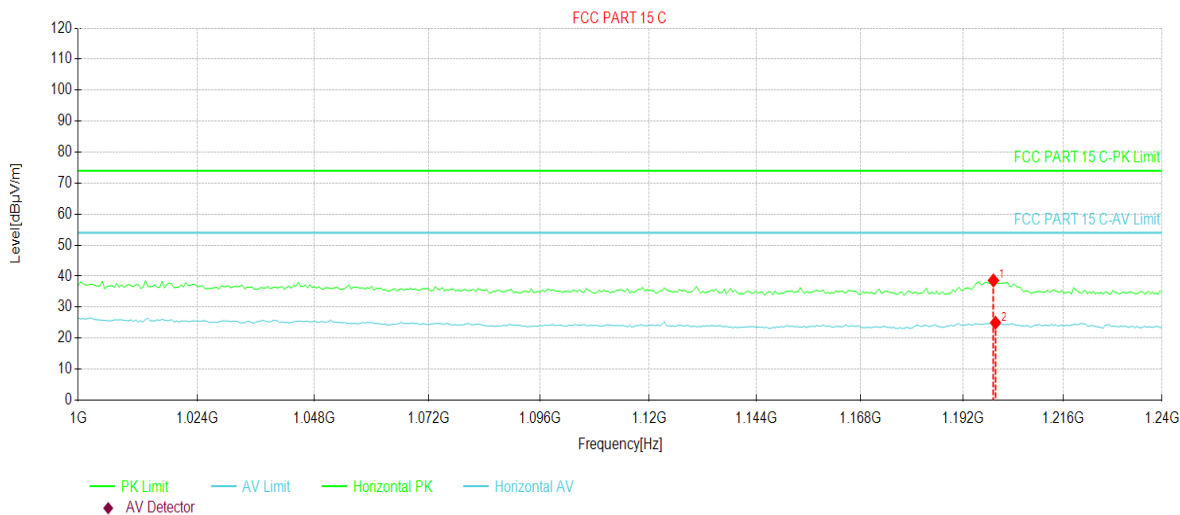


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1199.20	62.18	38.62	-23.56	74.00	35.38	PK	Horizontal
2	1199.68	48.52	24.96	-23.56	54.00	29.04	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

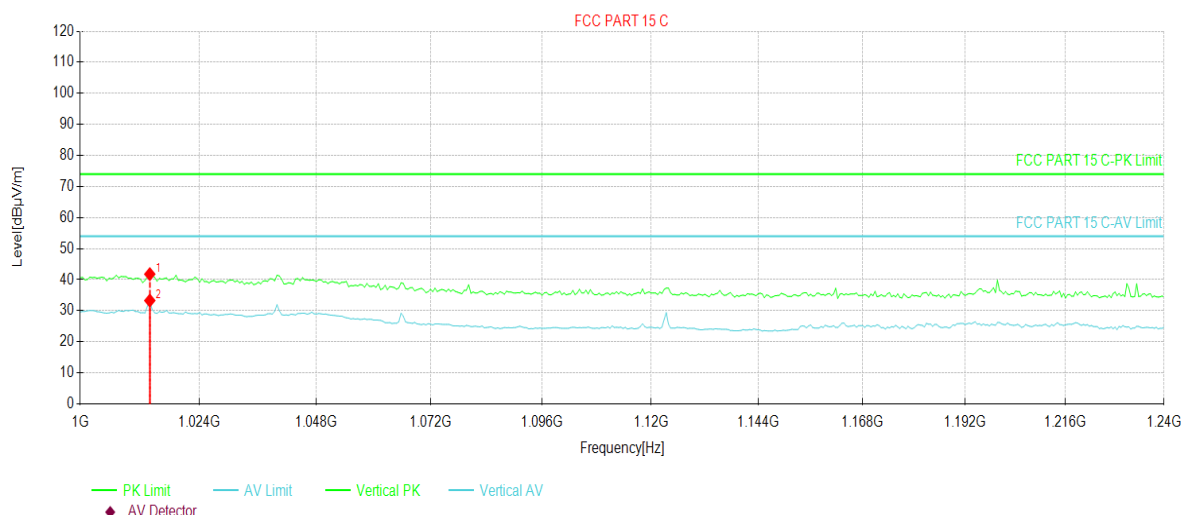


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1013.92	63.54	41.79	-21.75	74.00	32.21	PK	Vertical
2	1013.92	55.03	33.28	-21.75	54.00	20.72	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

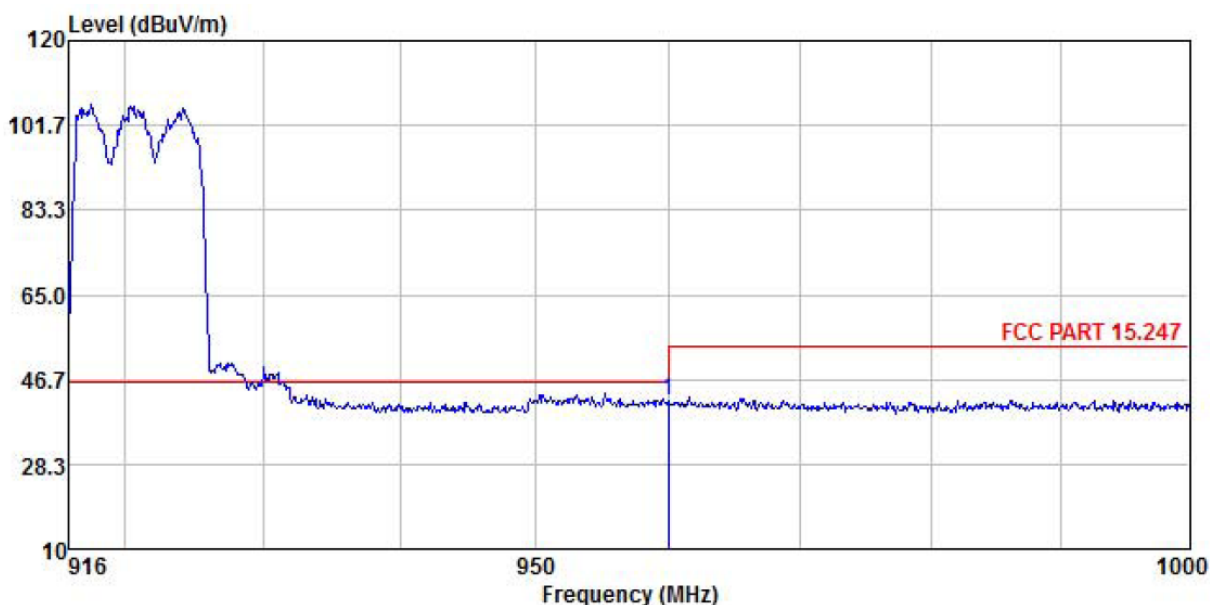


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.023	15.53	22.86	3.51	0.00	41.90	54.00	-12.10	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

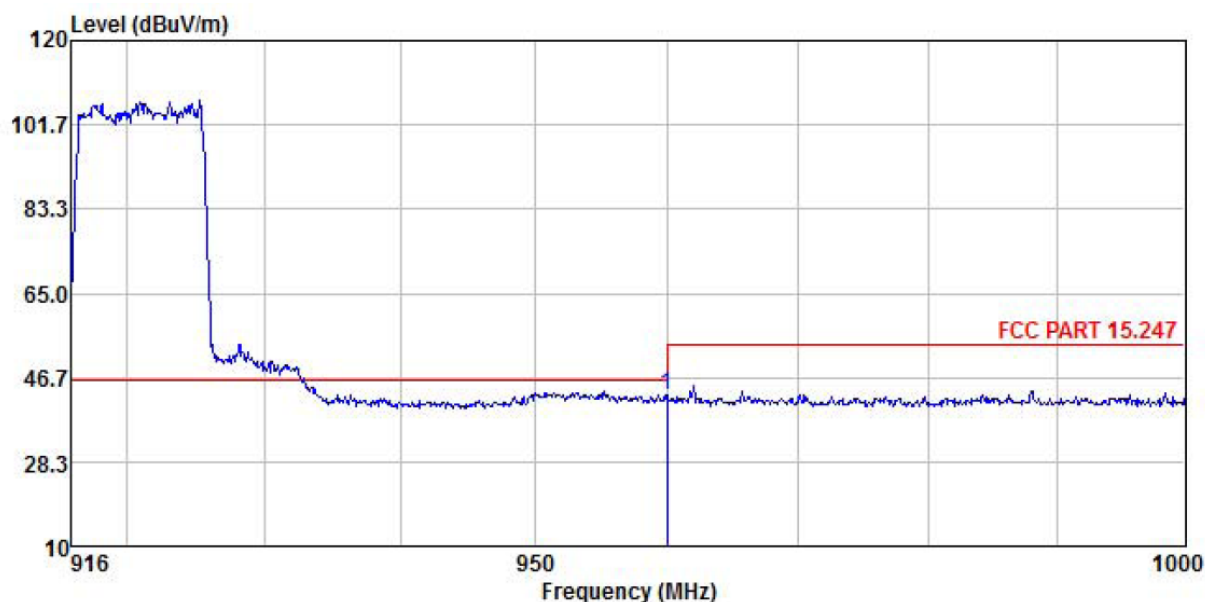


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	dBuV/m	dBuV/m	Limit	Remark
		dBuV	dB/m	dB	dB			dB	
1	960.023	16.40	22.86	3.51	0.00	42.77	54.00	-11.23	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

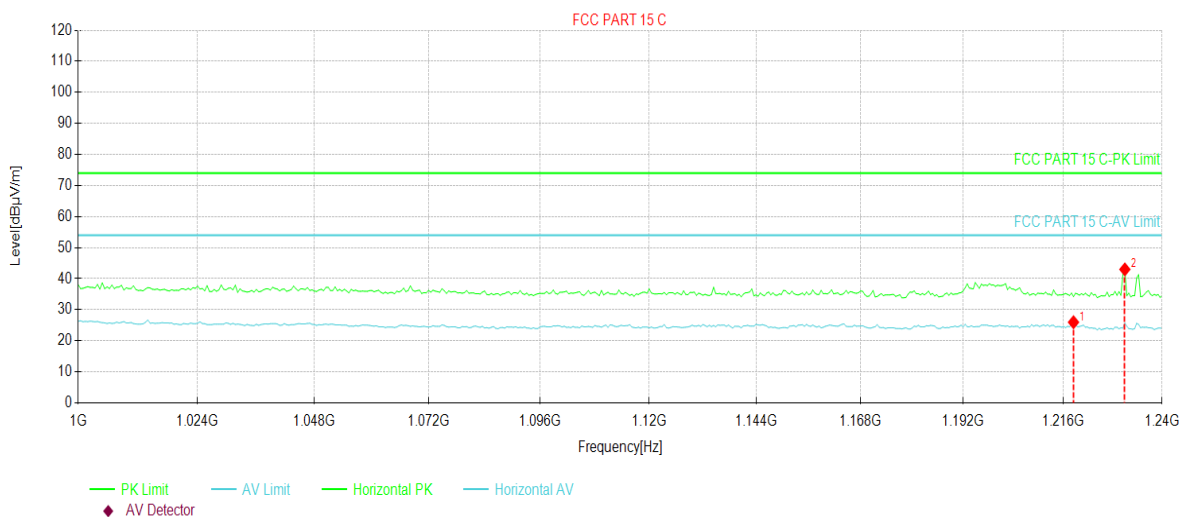


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1218.40	49.45	25.96	-23.49	54.00	28.04	AV	Horizontal
2	1230.88	66.43	42.99	-23.44	74.00	31.01	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

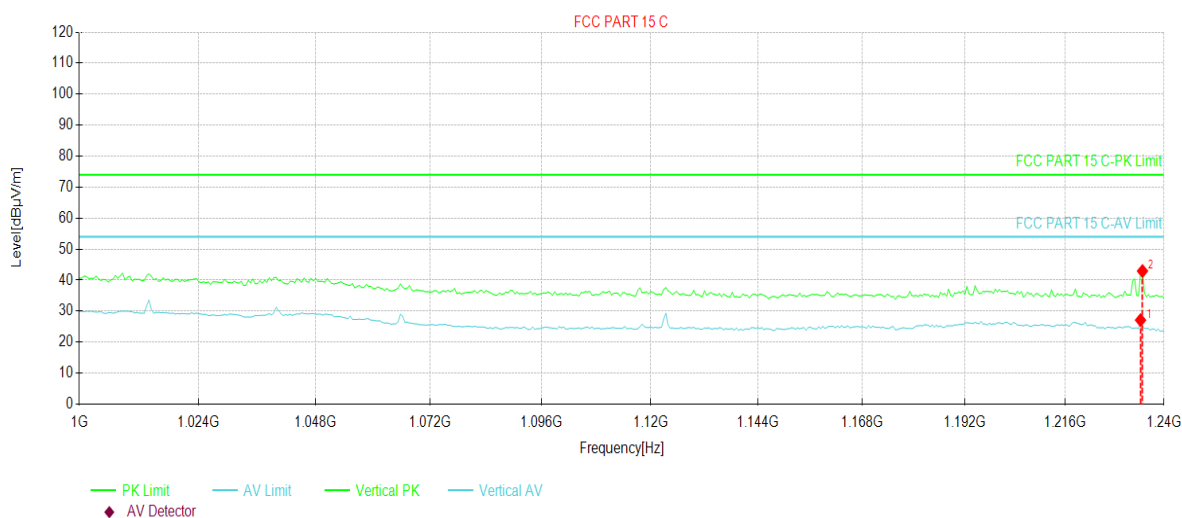


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1234.24	50.51	27.09	-23.42	54.00	26.91	AV	Vertical
2	1234.72	66.35	42.93	-23.42	74.00	31.07	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

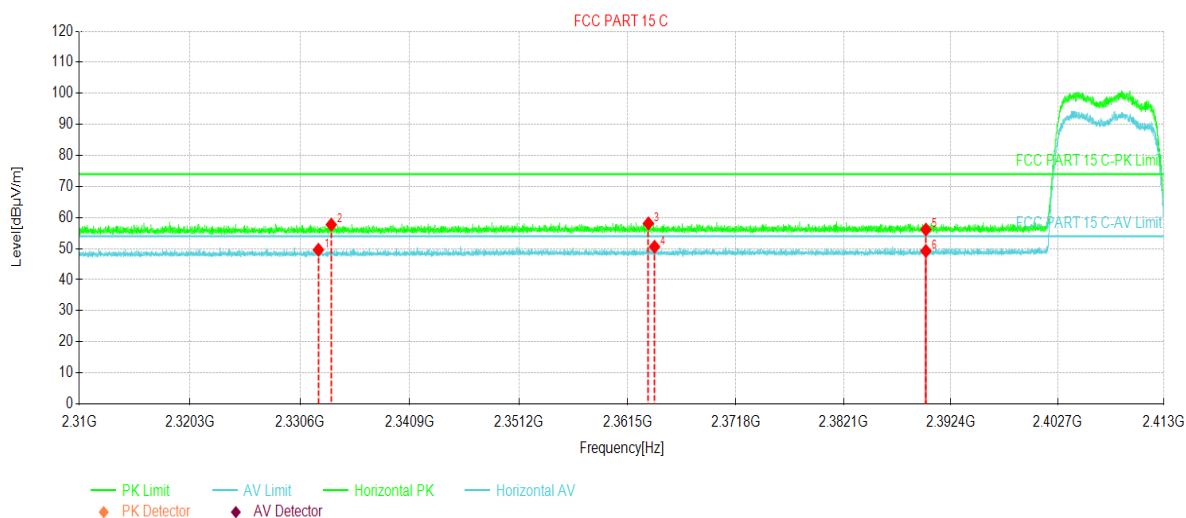


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2332.33	42.73	49.62	6.89	54.00	4.38	AV	Horizontal
2	2333.53	50.82	57.71	6.89	74.00	16.29	PK	Horizontal
3	2363.48	51.12	58.11	6.99	74.00	15.89	PK	Horizontal
4	2364.07	43.60	50.59	6.99	54.00	3.41	AV	Horizontal
5	2390.00	49.06	56.14	7.08	74.00	17.86	PK	Horizontal
6	2390.00	42.17	49.25	7.08	54.00	4.75	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

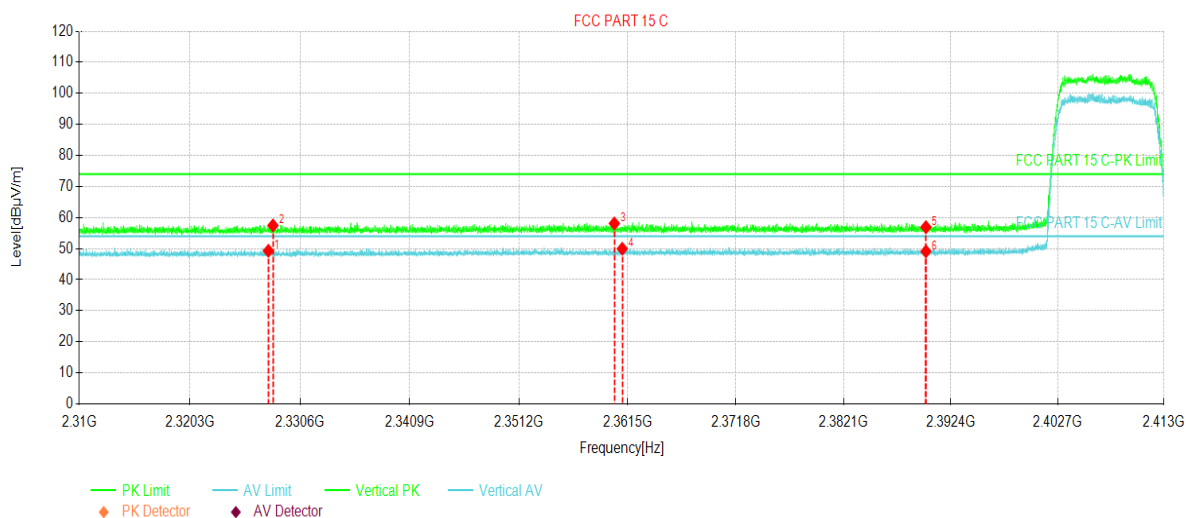


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2327.63	42.43	49.30	6.87	54.00	4.70	AV	Vertical
2	2328.06	50.59	57.46	6.87	74.00	16.54	PK	Vertical
3	2360.24	51.12	58.10	6.98	74.00	15.90	PK	Vertical
4	2361.00	42.98	49.96	6.98	54.00	4.04	AV	Vertical
5	2390.00	49.81	56.89	7.08	74.00	17.11	PK	Vertical
6	2390.00	42.03	49.11	7.08	54.00	4.89	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

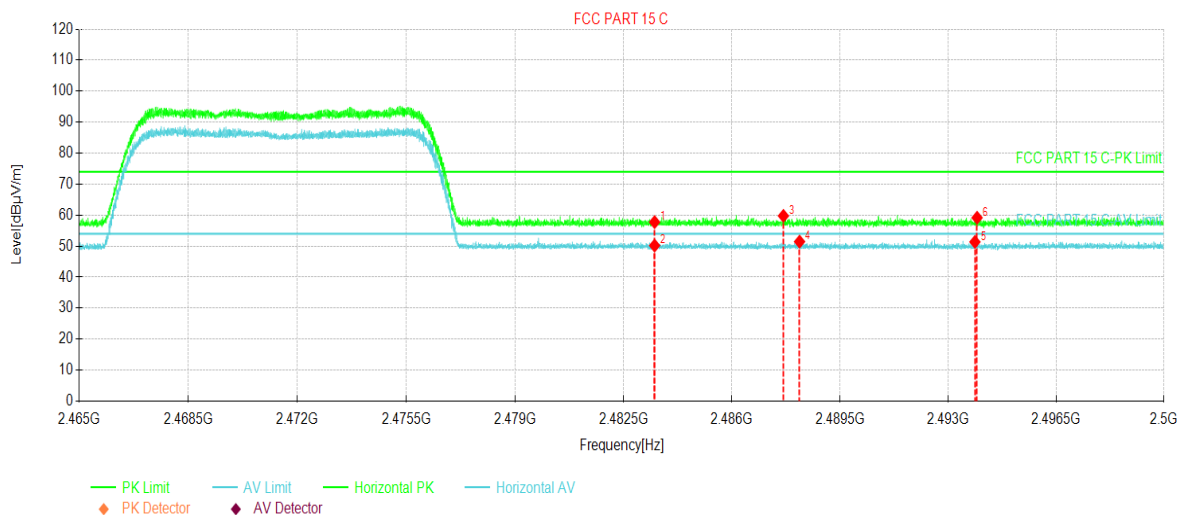


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	50.08	57.77	7.69	74.00	16.23	PK	Horizontal
2	2483.50	42.51	50.20	7.69	54.00	3.80	AV	Horizontal
3	2487.66	52.05	59.76	7.71	74.00	14.24	PK	Horizontal
4	2488.18	43.74	51.46	7.72	54.00	2.54	AV	Horizontal
5	2493.86	43.60	51.36	7.76	54.00	2.64	AV	Horizontal
6	2493.93	51.41	59.17	7.76	74.00	14.83	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

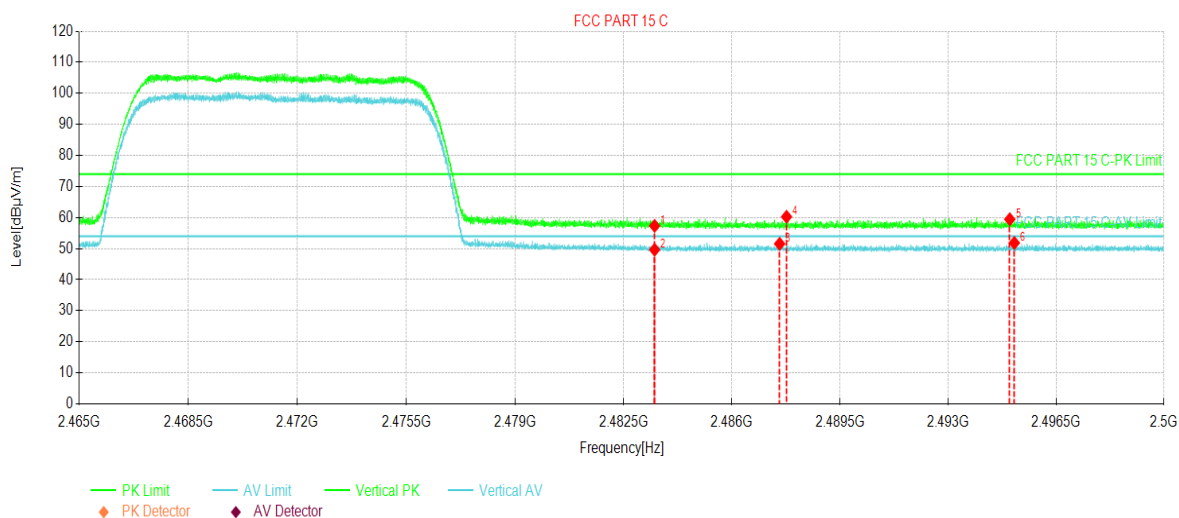


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.65	57.34	7.69	74.00	16.66	PK	Vertical
2	2483.50	41.95	49.64	7.69	54.00	4.36	AV	Vertical
3	2487.54	43.83	51.54	7.71	54.00	2.46	AV	Vertical
4	2487.76	52.53	60.25	7.72	74.00	13.75	PK	Vertical
5	2494.99	51.68	59.45	7.77	74.00	14.55	PK	Vertical
6	2495.14	44.07	51.84	7.77	54.00	2.16	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

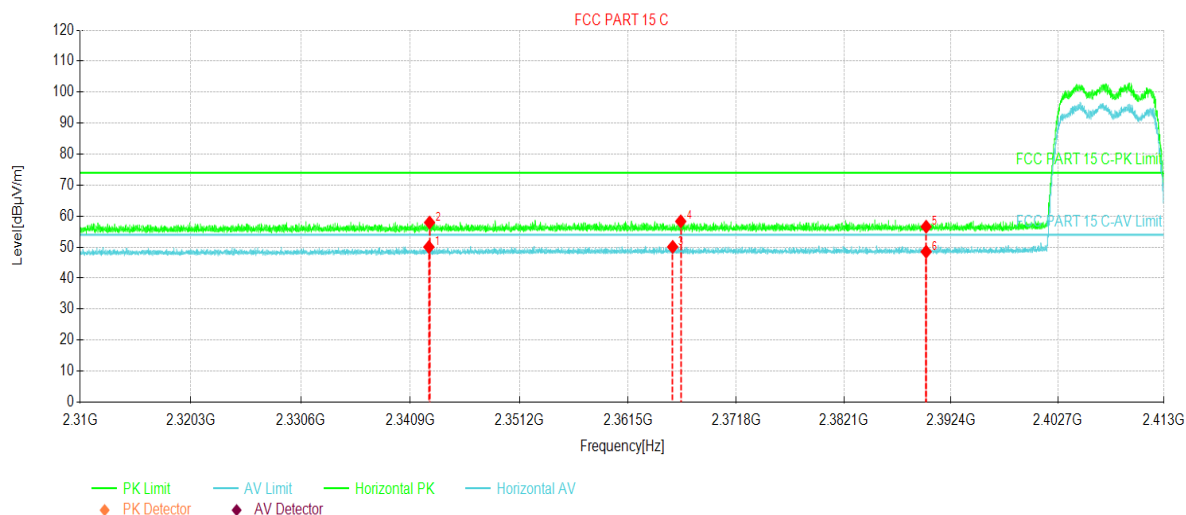


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2342.65	43.12	50.04	6.92	54.00	3.96	AV	Horizontal
2	2342.71	51.02	57.94	6.92	74.00	16.06	PK	Horizontal
3	2365.74	43.09	50.09	7.00	54.00	3.91	AV	Horizontal
4	2366.52	51.31	58.31	7.00	74.00	15.69	PK	Horizontal
5	2390.00	49.52	56.60	7.08	74.00	17.40	PK	Horizontal
6	2390.00	41.44	48.52	7.08	54.00	5.48	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

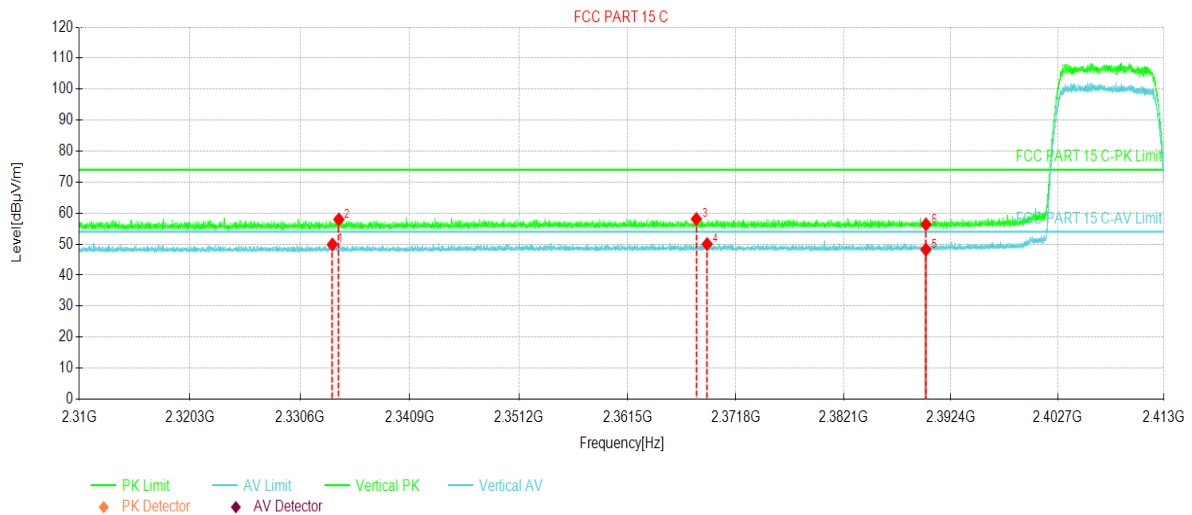


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2333.64	42.99	49.88	6.89	54.00	4.12	AV	Vertical
2	2334.23	51.07	57.96	6.89	74.00	16.04	PK	Vertical
3	2368.04	51.07	58.07	7.00	74.00	15.93	PK	Vertical
4	2369.07	43.01	50.02	7.01	54.00	3.98	AV	Vertical
5	2390.00	41.16	48.24	7.08	54.00	5.76	AV	Vertical
6	2390.00	49.29	56.37	7.08	74.00	17.63	PK	Vertical

Remark:

1. *Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).*
2. *The emission levels of other frequencies are lower than the limit 20dB and not show in test report.*

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

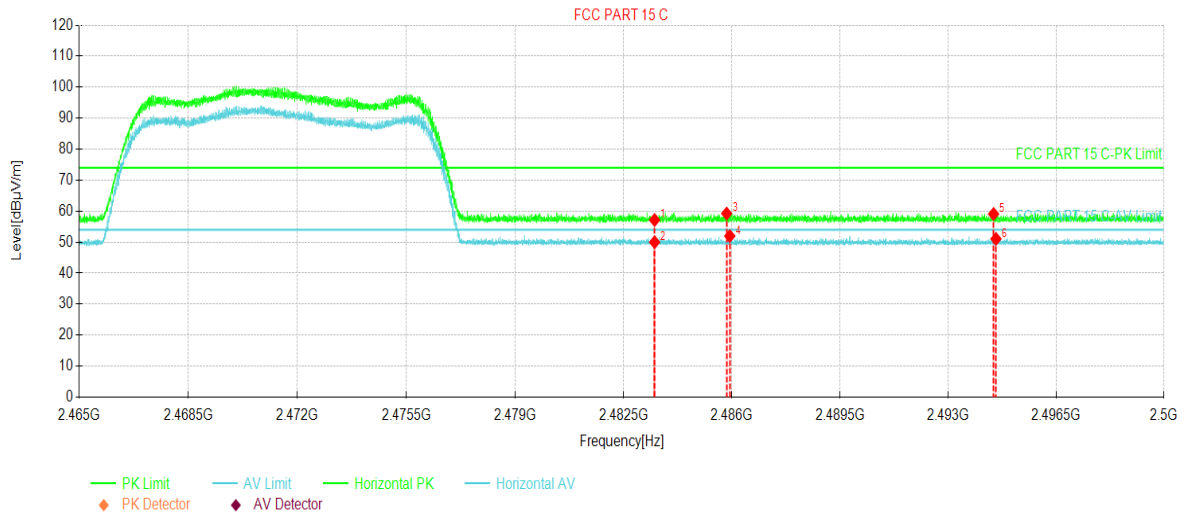


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.47	57.16	7.69	74.00	16.84	PK	Horizontal
2	2483.50	42.31	50.00	7.69	54.00	4.00	AV	Horizontal
3	2485.83	51.54	59.24	7.70	74.00	14.76	PK	Horizontal
4	2485.93	44.27	51.97	7.70	54.00	2.03	AV	Horizontal
5	2494.46	51.32	59.08	7.76	74.00	14.92	PK	Horizontal
6	2494.54	43.30	51.06	7.76	54.00	2.94	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

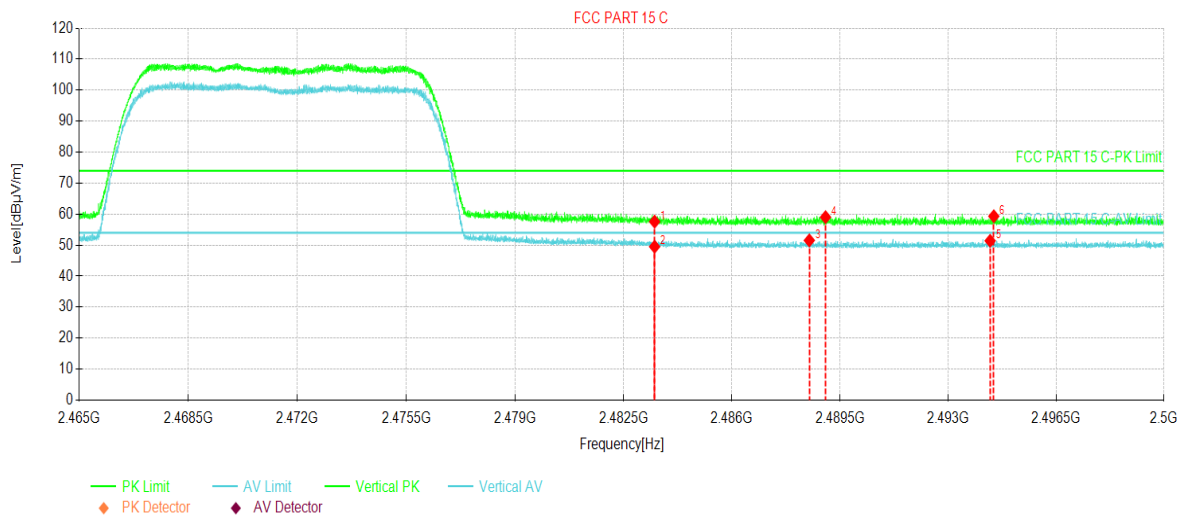


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.89	57.58	7.69	74.00	16.42	PK	Vertical
2	2483.50	41.82	49.51	7.69	54.00	4.49	AV	Vertical
3	2488.50	43.82	51.54	7.72	54.00	2.46	AV	Vertical
4	2489.02	51.31	59.03	7.72	74.00	14.97	PK	Vertical
5	2494.35	43.65	51.41	7.76	54.00	2.59	AV	Vertical
6	2494.47	51.58	59.34	7.76	74.00	14.66	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

BW: 20MHz

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

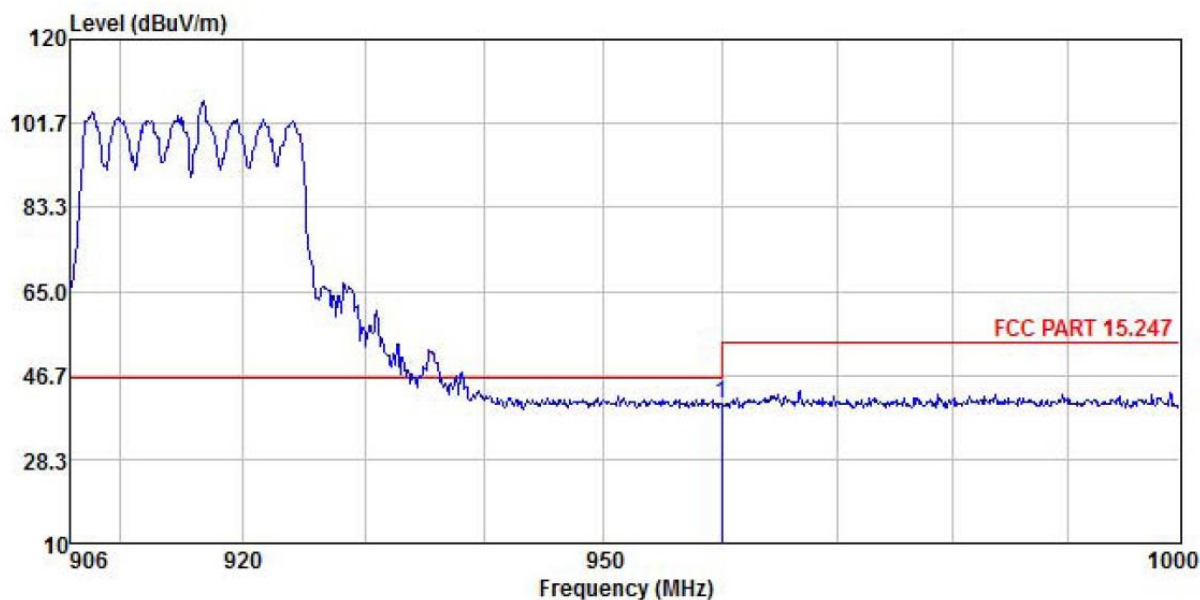


	Freq	ReadAntenna	Cable Preamp		Limit	Over	
	Level	Factor	Loss	Factor	Line	Limit	Remark
	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
	MHz	dBuV	dB/m	dB	dBuV/m	dBuV/m	dB
1	960.050	14.01	22.86	3.51	0.00	40.38	54.00 -13.62

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

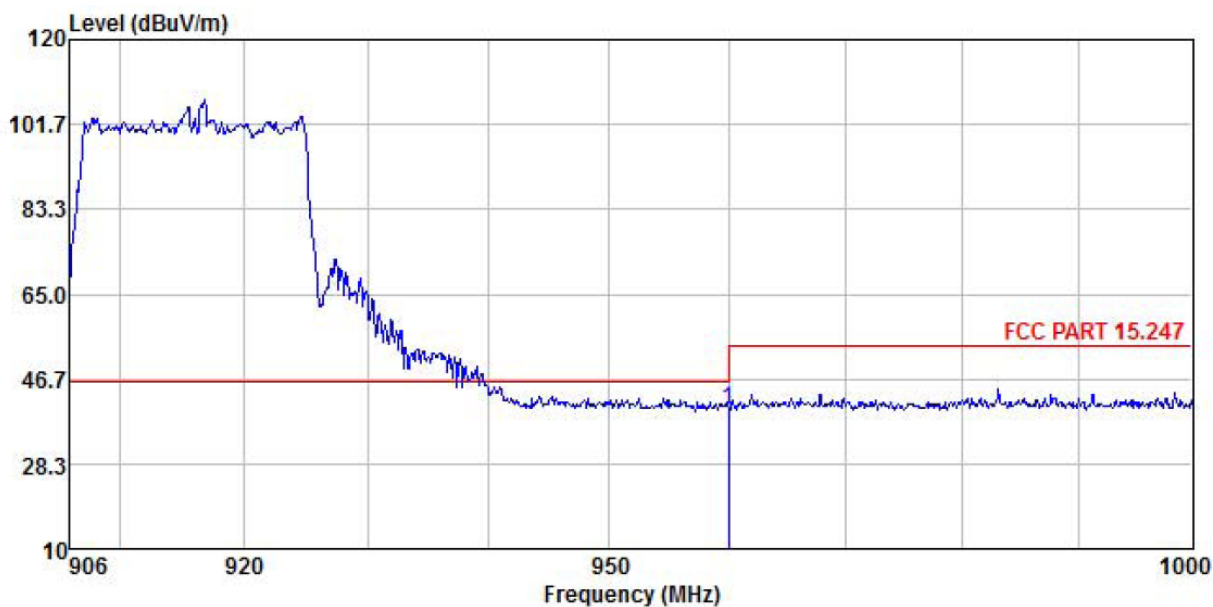


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	13.66	22.86	3.51	0.00	40.03	54.00	-13.97	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

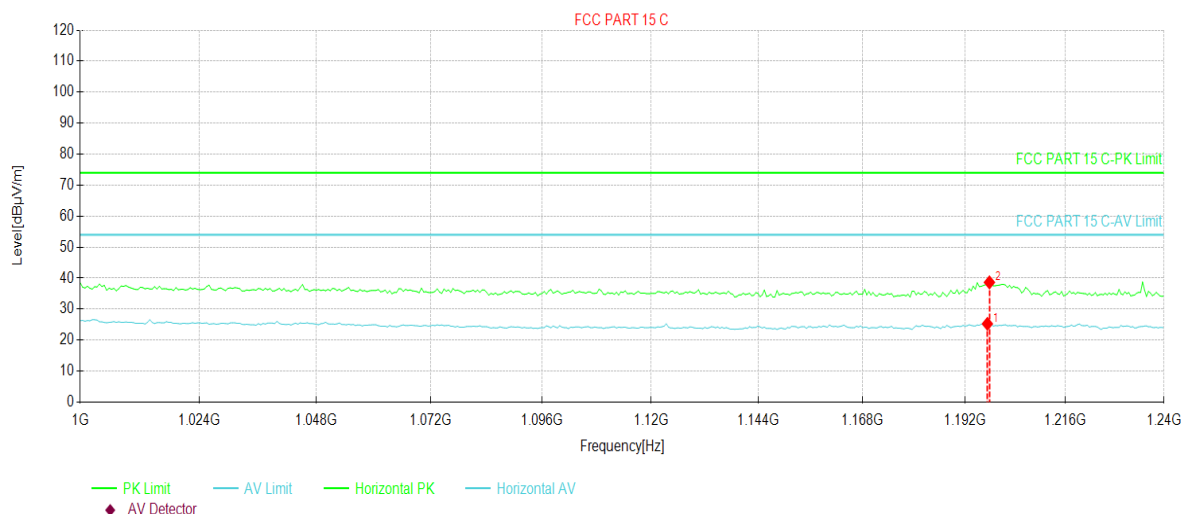


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1197.28	48.82	25.27	-23.55	54.00	28.73	AV	Horizontal
2	1197.76	62.19	38.64	-23.55	74.00	35.36	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

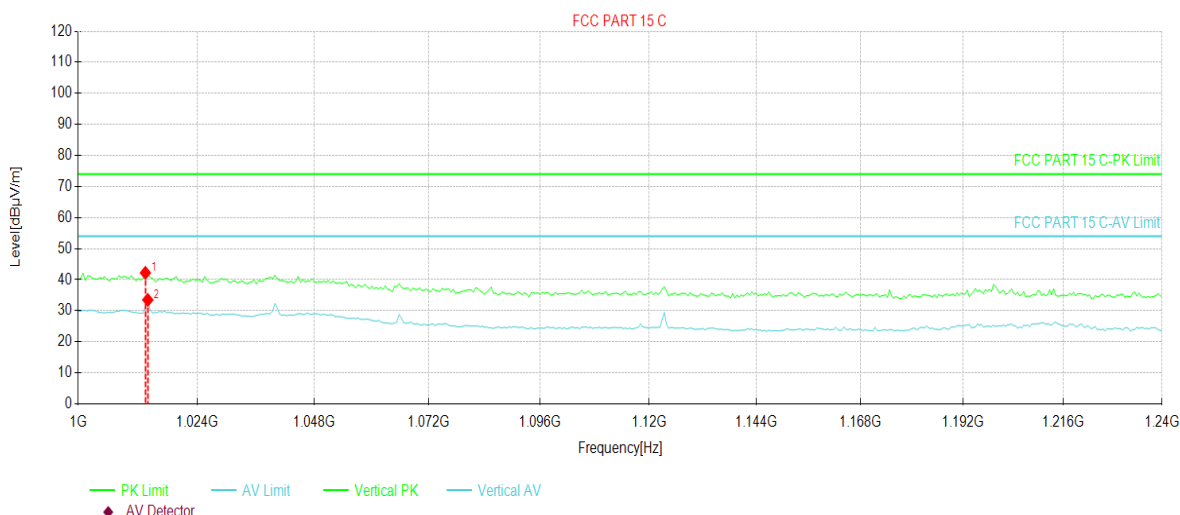


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1013.44	63.94	42.20	-21.74	74.00	31.80	PK	Vertical
2	1013.92	55.24	33.49	-21.75	54.00	20.51	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

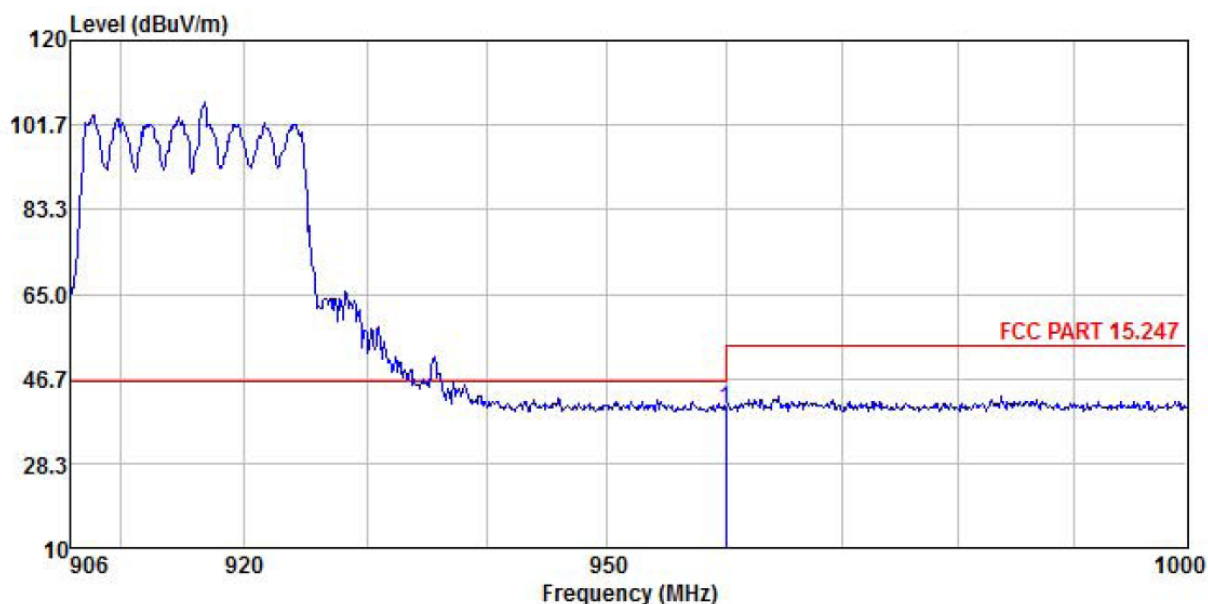


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	960.050	13.87	22.86	3.51	0.00	40.24	54.00	-13.76	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

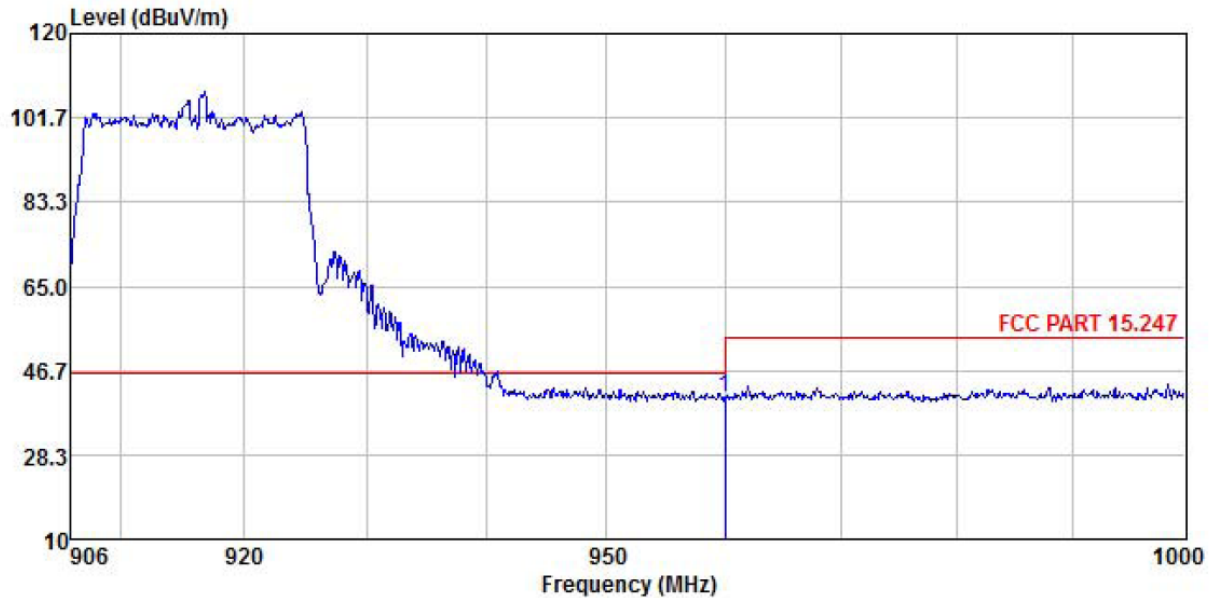


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	
	MHz	Level	Factor	Loss	Factor	Line	Limit	Remark
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	960.050	14.37	22.86	3.51	0.00	40.74	54.00	-13.26

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

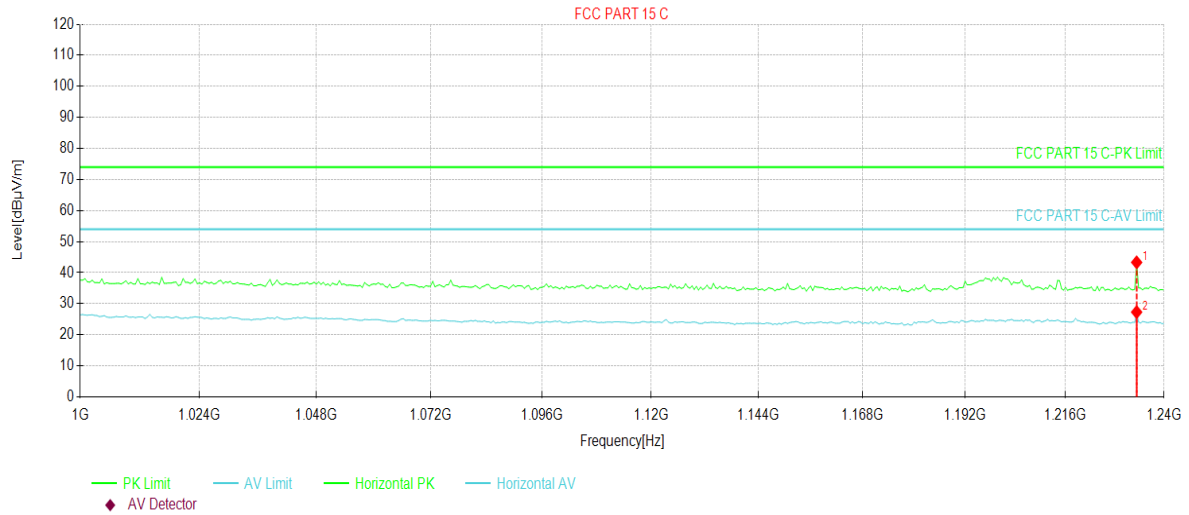


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1233.28	66.74	43.31	-23.43	74.00	30.69	PK	Horizontal
2	1233.28	50.73	27.30	-23.43	54.00	26.70	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

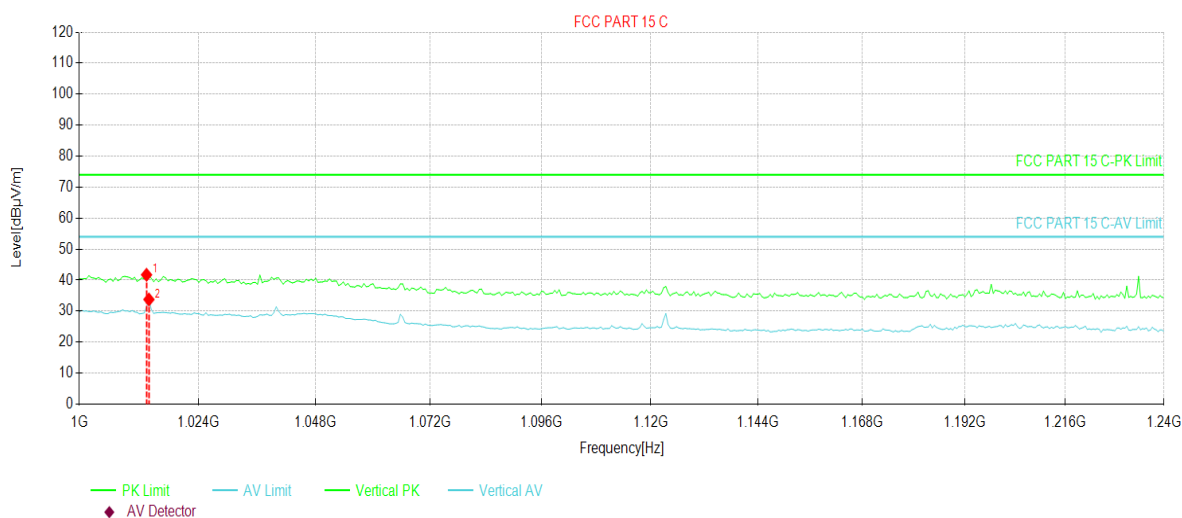


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	1013.44	63.47	41.73	-21.74	74.00	32.27	PK	Vertical
2	1013.92	55.52	33.77	-21.75	54.00	20.23	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

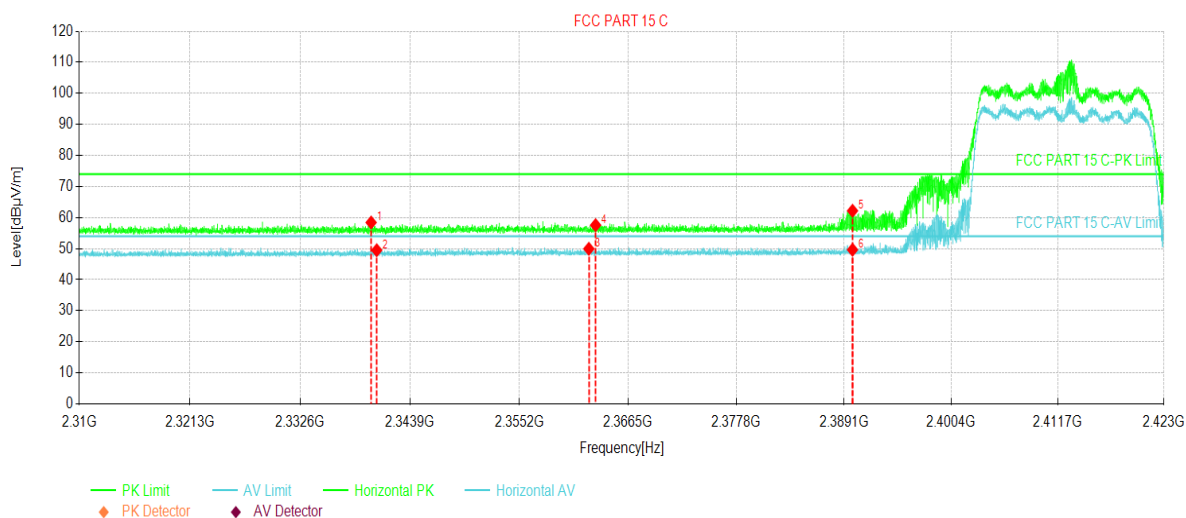


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2339.88	51.50	58.41	6.91	74.00	15.59	PK	Horizontal
2	2340.45	42.57	49.48	6.91	54.00	4.52	AV	Horizontal
3	2362.41	42.94	49.93	6.99	54.00	4.07	AV	Horizontal
4	2363.11	50.57	57.56	6.99	74.00	16.44	PK	Horizontal
5	2390.00	55.11	62.19	7.08	74.00	11.81	PK	Horizontal
6	2390.00	42.55	49.63	7.08	54.00	4.37	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

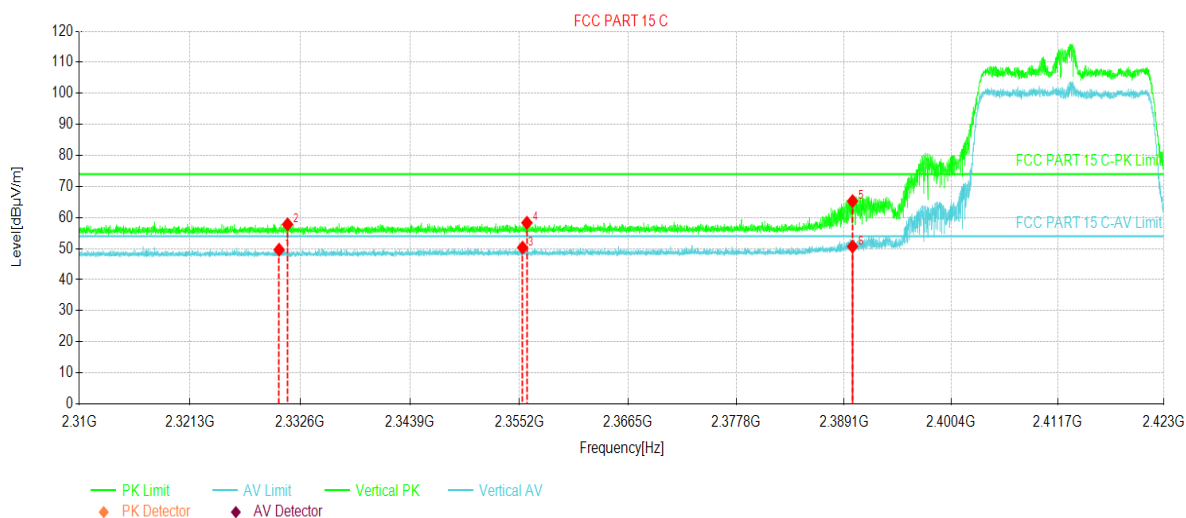


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2330.42	42.76	49.64	6.88	54.00	4.36	AV	Vertical
2	2331.29	50.92	57.80	6.88	74.00	16.20	PK	Vertical
3	2355.53	43.36	50.32	6.96	54.00	3.68	AV	Vertical
4	2355.98	51.36	58.32	6.96	74.00	15.68	PK	Vertical
5	2390.00	58.20	65.28	7.08	74.00	8.72	PK	Vertical
6	2390.00	43.61	50.69	7.08	54.00	3.31	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Huni: 57%

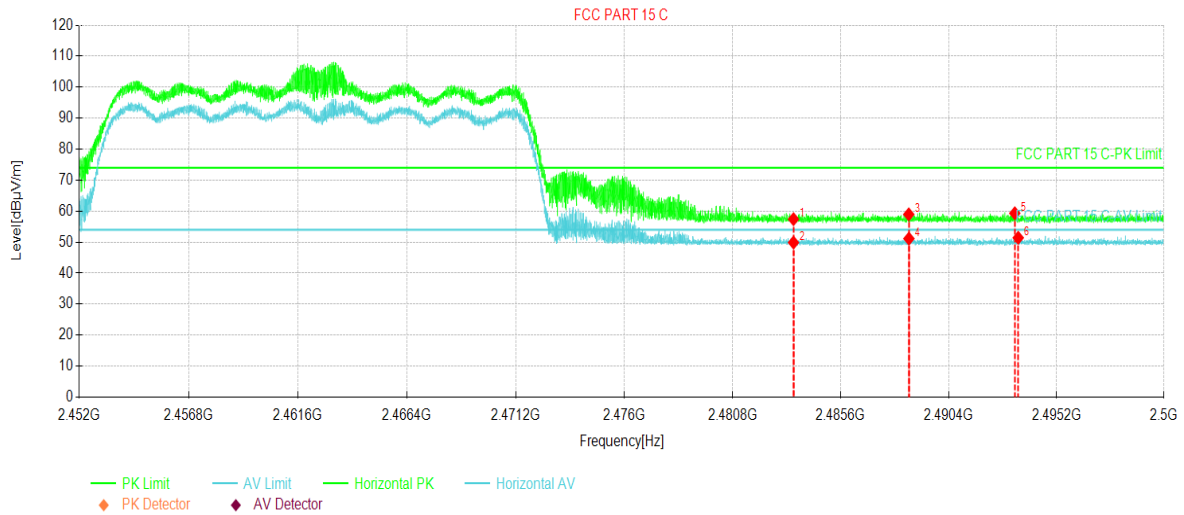


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.73	57.42	7.69	74.00	16.58	PK	Horizontal
2	2483.50	42.18	49.87	7.69	54.00	4.13	AV	Horizontal
3	2488.62	51.24	58.96	7.72	74.00	15.04	PK	Horizontal
4	2488.62	43.41	51.13	7.72	54.00	2.87	AV	Horizontal
5	2493.34	51.57	59.32	7.75	74.00	14.68	PK	Horizontal
6	2493.49	43.65	51.41	7.76	54.00	2.59	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-QPSK Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

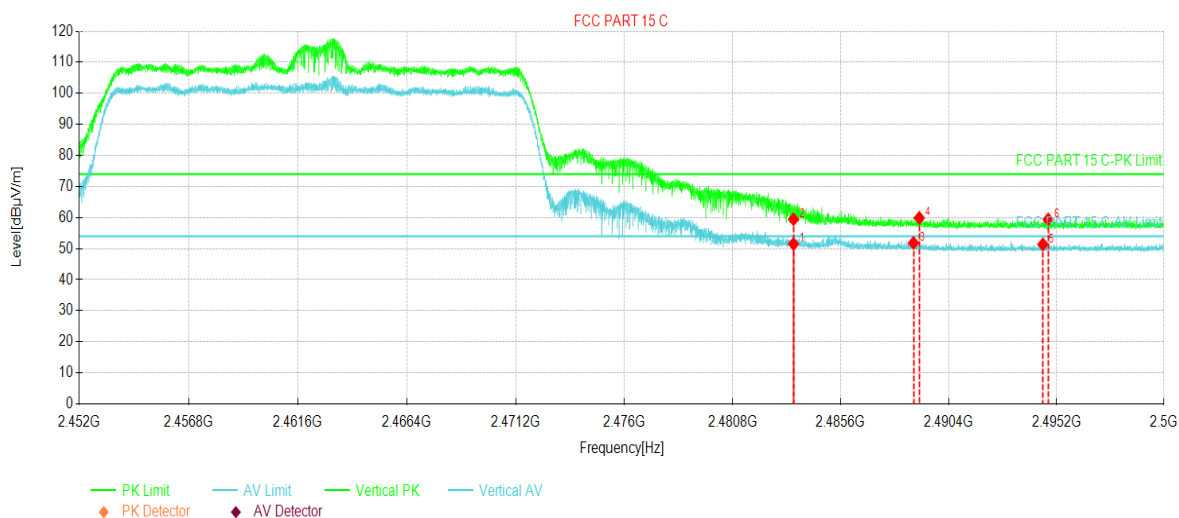


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	43.78	51.47	7.69	54.00	2.53	AV	Vertical
2	2483.50	51.75	59.44	7.69	74.00	14.56	PK	Vertical
3	2488.83	44.10	51.82	7.72	54.00	2.18	AV	Vertical
4	2489.08	52.17	59.89	7.72	74.00	14.11	PK	Vertical
5	2494.59	43.61	51.37	7.76	54.00	2.63	AV	Vertical
6	2494.82	51.65	59.41	7.76	74.00	14.59	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

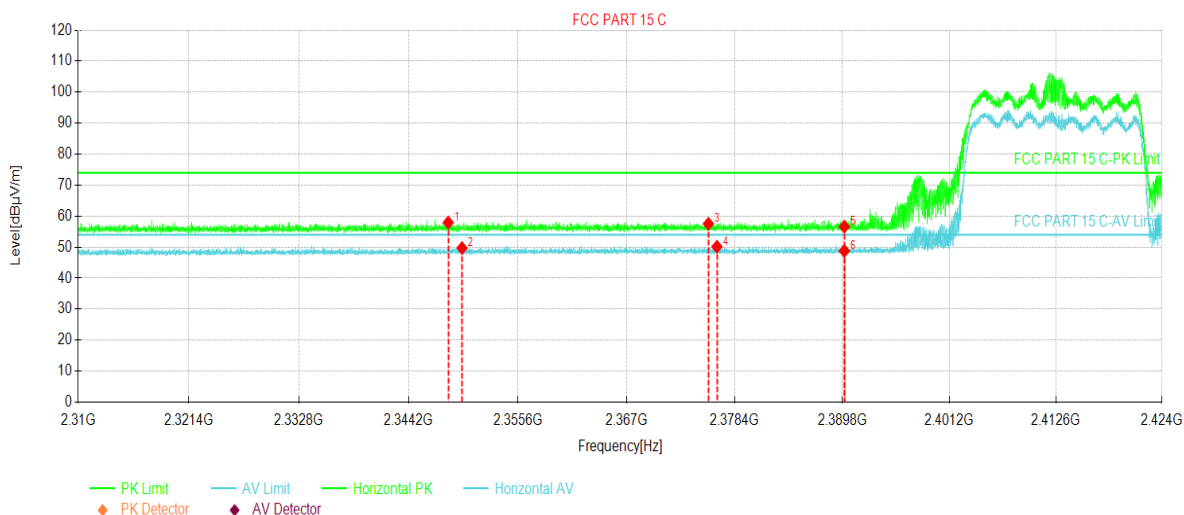


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2348.30	51.00	57.94	6.94	74.00	16.06	PK	Horizontal
2	2349.74	42.75	49.69	6.94	54.00	4.31	AV	Horizontal
3	2375.61	50.49	57.52	7.03	74.00	16.48	PK	Horizontal
4	2376.52	43.10	50.13	7.03	54.00	3.87	AV	Horizontal
5	2390.01	49.55	56.63	7.08	74.00	17.37	PK	Horizontal
6	2390.01	41.72	48.80	7.08	54.00	5.20	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

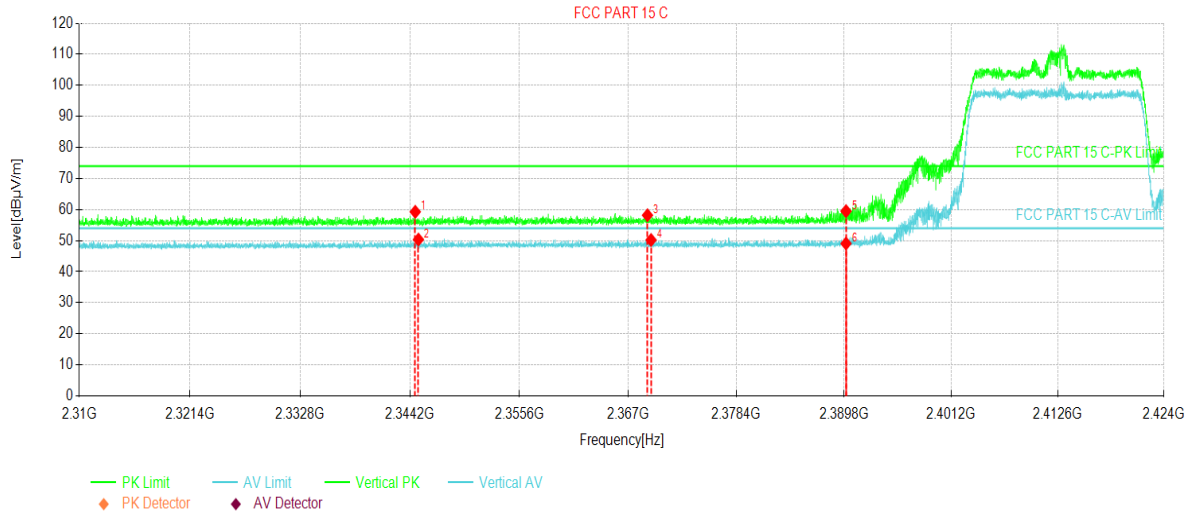


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2344.72	52.35	59.28	6.93	74.00	14.72	PK	Vertical
2	2345.05	43.41	50.34	6.93	54.00	3.66	AV	Vertical
3	2369.03	51.17	58.18	7.01	74.00	15.82	PK	Vertical
4	2369.41	43.18	50.19	7.01	54.00	3.81	AV	Vertical
5	2390.01	52.41	59.49	7.08	74.00	14.51	PK	Vertical
6	2390.01	41.99	49.07	7.08	54.00	4.93	AV	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

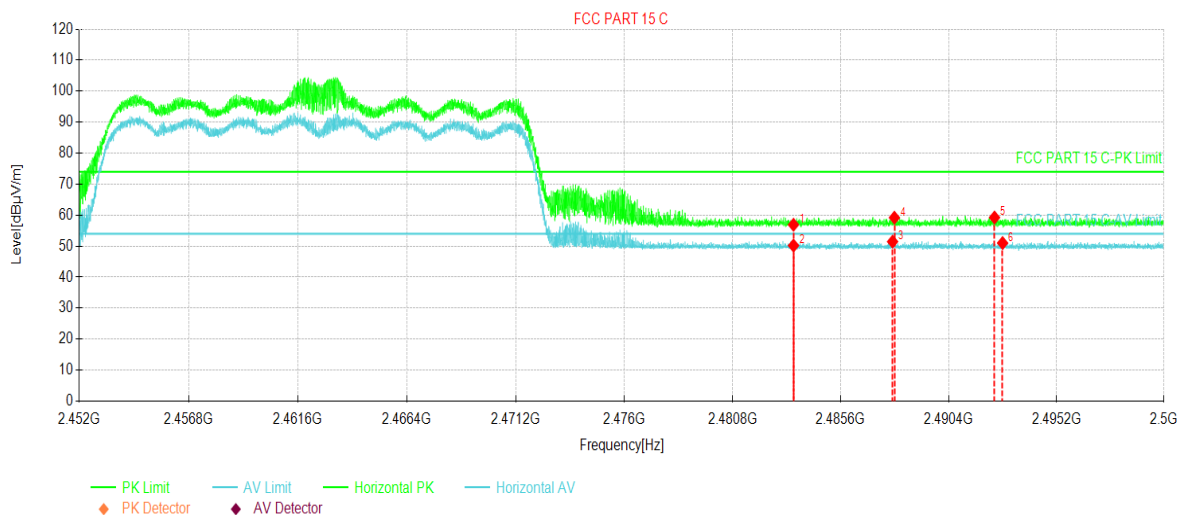


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2483.50	49.22	56.91	7.69	74.00	17.09	PK	Horizontal
2	2483.50	42.50	50.19	7.69	54.00	3.81	AV	Horizontal
3	2487.90	43.74	51.46	7.72	54.00	2.54	AV	Horizontal
4	2487.98	51.47	59.19	7.72	74.00	14.81	PK	Horizontal
5	2492.43	51.49	59.24	7.75	74.00	14.76	PK	Horizontal
6	2492.79	43.25	51.00	7.75	54.00	3.00	AV	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz-16QAM Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

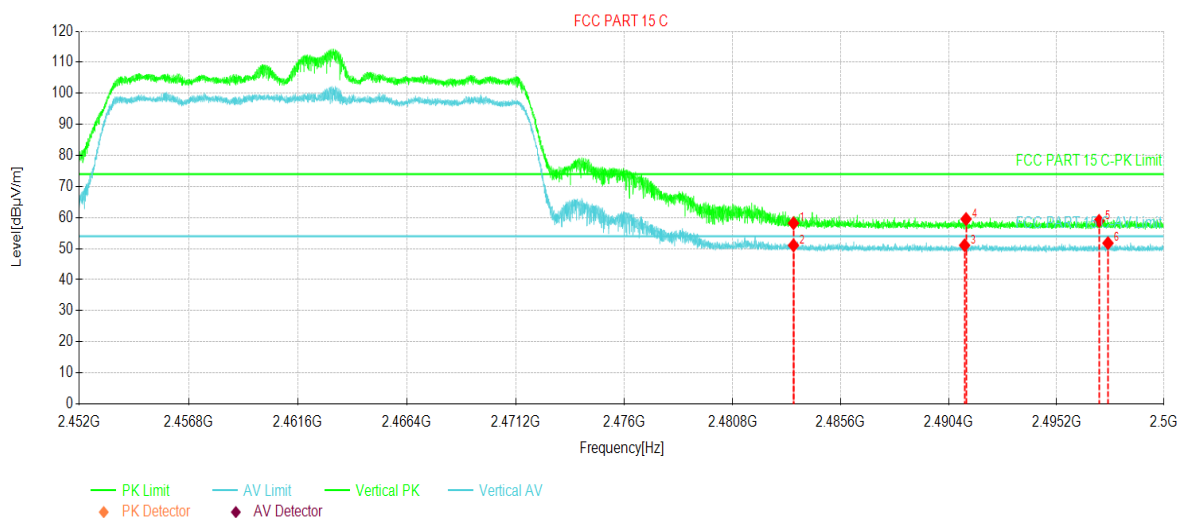


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	2483.50	50.50	58.19	7.69	74.00	15.81	PK	Vertical
2	2483.50	43.36	51.05	7.69	54.00	2.95	AV	Vertical
3	2491.10	43.32	51.06	7.74	54.00	2.94	AV	Vertical
4	2491.17	51.77	59.51	7.74	74.00	14.49	PK	Vertical
5	2497.10	51.13	58.91	7.78	74.00	15.09	PK	Vertical
6	2497.49	43.98	51.76	7.78	54.00	2.24	AV	Vertical

Remark:


- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.


6.7 Spurious Emission

6.7.1 Conducted Emission Method

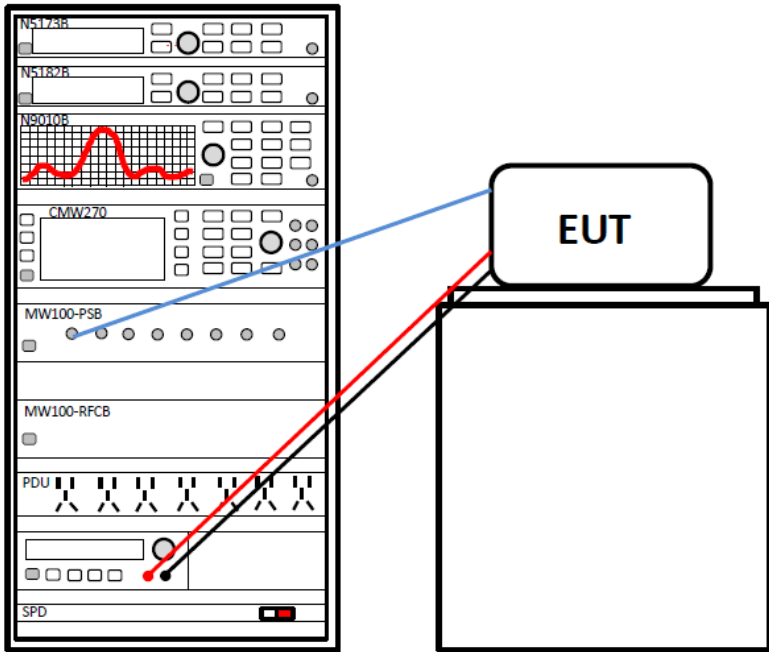Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Measurement Data:	Refer to Appendix A – 900MHz, Appendix B – 2.4GHz,

6.7.2 Radiated Emission Method

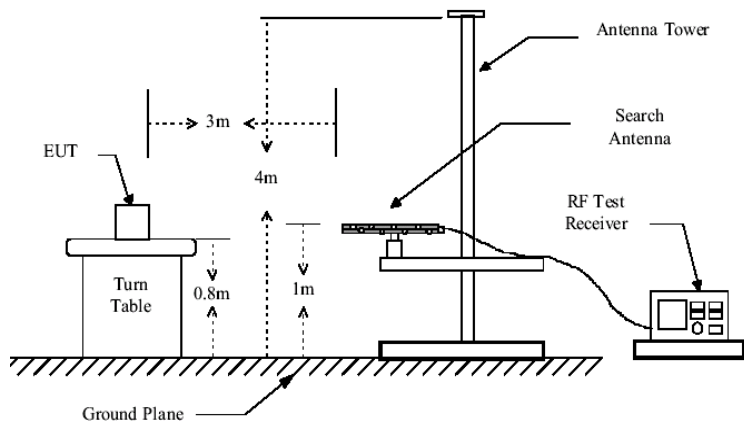Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
RMS		1MHz	3MHz	Average Value	
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	960MHz-1GHz	54.0			Quasi-peak Value
	Above 1GHz	54.0			Average Value
74.0			Peak Value		
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation.				
	2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.				
	3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.				
	4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.				
	5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.				
	6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz				
					
	Above 1GHz				

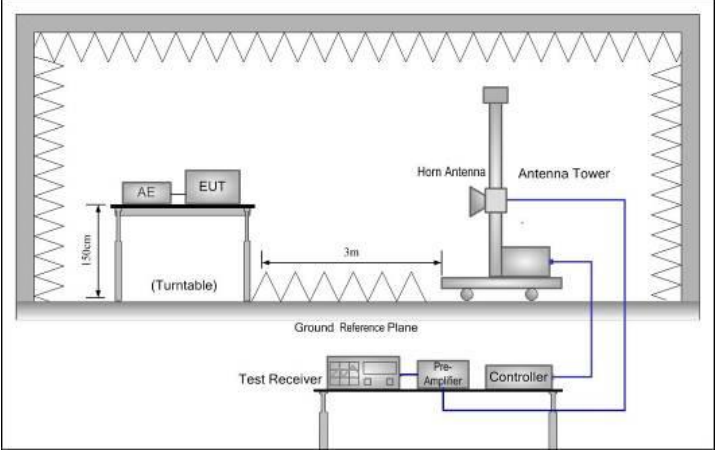
	
Test Instruments:	Refer to section 5.9 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is lower than the limit 20dB, so only shows the data of above 30MHz in this report. 3. Pre-scan all kind of Bandwidth and Modulation and found the 1.4MHz and QPSK is the worst case.

Measurement Data (worst case):

ANT Type 1:

Below 1GHz:

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

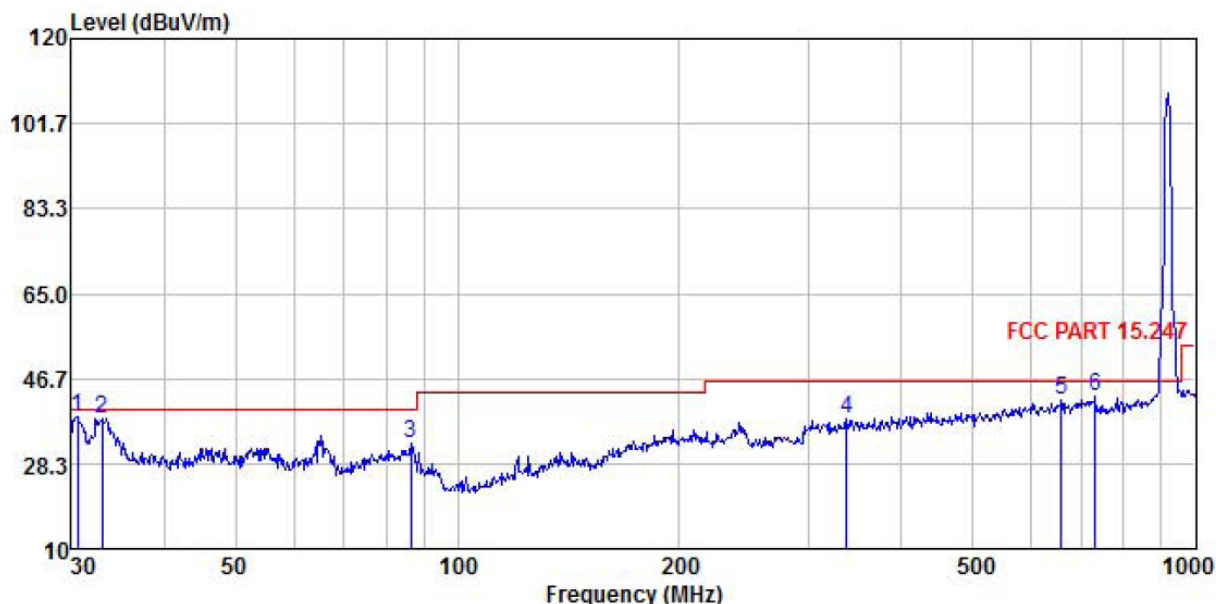


	Freq	Read	Antenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Level	Line	Limit	
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	30.531	26.14	11.89	0.36	0.00	38.39	40.00	-1.61	
2	32.979	25.45	12.29	0.38	0.00	38.12	40.00	-1.88	
3	86.503	20.95	10.94	0.71	0.00	32.60	40.00	-7.40	
4	337.216	17.28	18.77	1.86	0.00	37.91	46.00	-8.09	
5	658.836	19.20	20.18	2.72	0.00	42.10	46.00	-3.90	
6	731.920	19.33	20.57	2.93	0.00	42.83	46.00	-3.17	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

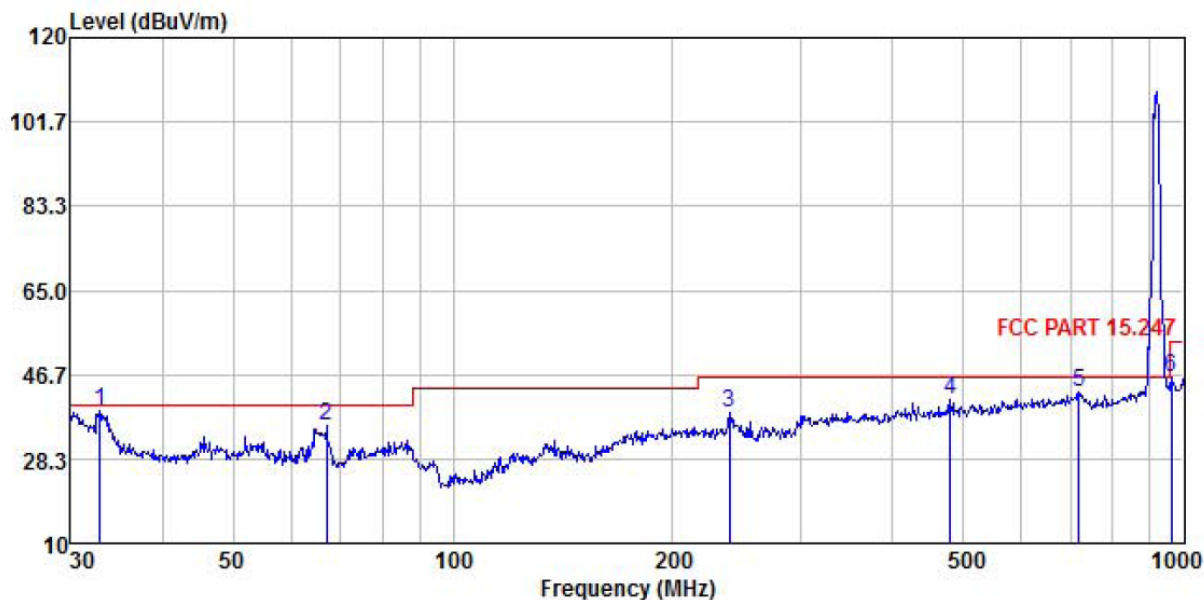


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	32.864	26.18	12.27	0.38	0.00	38.83	40.00	-1.17
2	67.202	25.07	9.94	0.63	0.00	35.64	40.00	-4.36
3	239.147	18.57	18.46	1.53	0.00	38.56	46.00	-7.44
4	478.846	19.64	19.32	2.30	0.00	41.26	46.00	-4.74
5	719.200	19.44	20.54	2.89	0.00	42.87	46.00	-3.13
6	962.162	19.73	22.88	3.53	0.00	46.14	54.00	-7.86

Remark:

1. Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24°C Humi: 57%

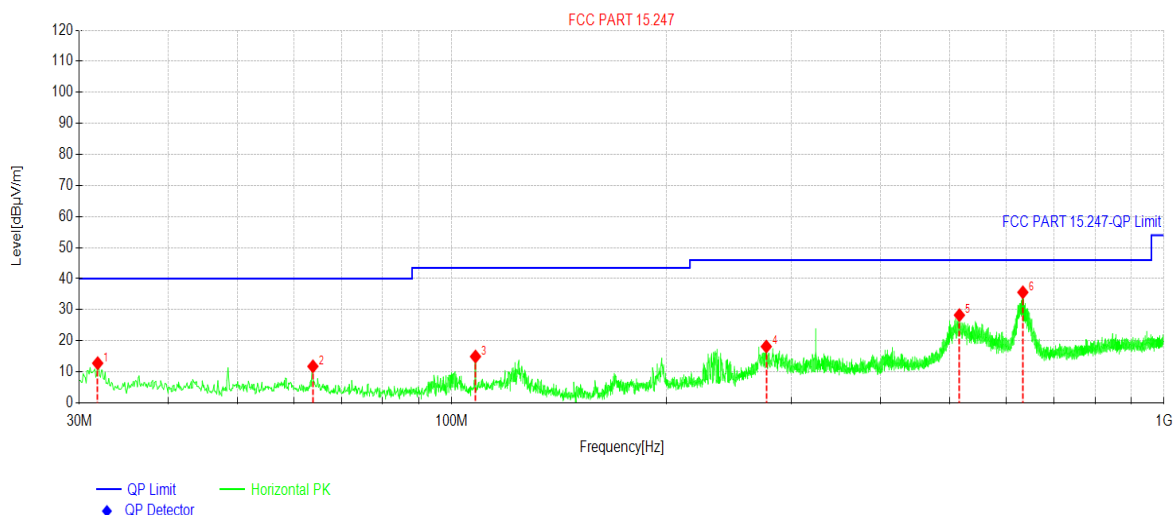


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	31.8432	30.80	12.76	-18.04	40.00	27.24	PK	Horizontal
2	63.8564	29.41	11.76	-17.65	40.00	28.24	PK	Horizontal
3	107.995	32.98	14.92	-18.06	43.50	28.58	PK	Horizontal
4	276.501	32.79	18.14	-14.65	46.00	27.86	PK	Horizontal
5	516.212	37.68	28.25	-9.43	46.00	17.75	PK	Horizontal
6	633.691	43.74	35.59	-8.15	46.00	10.41	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

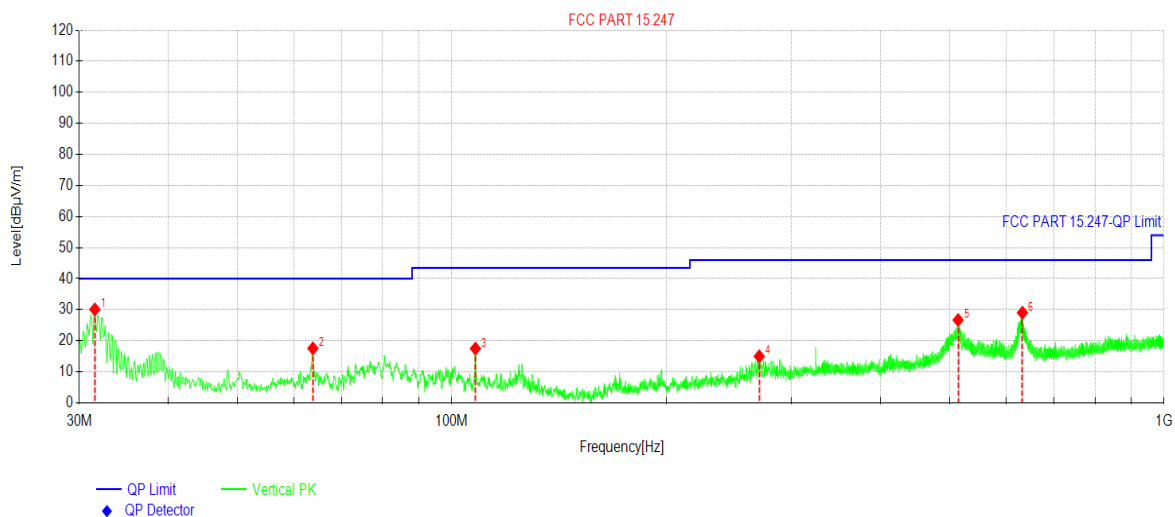

NO.	Freq. [MHz]	Reading[d BuV/m]	Level. [dBuV/m]	Factor. [dB]	Limit. [dBuV/m]	Margin. [dB]	Trace	Polarity
1	31.5522	48.19	30.08	-18.11	40.00	9.92	PK	Vertical
2	63.8564	35.20	17.55	-17.65	40.00	22.45	PK	Vertical
3	107.995	35.55	17.49	-18.06	43.50	26.01	PK	Vertical
4	270.293	29.72	14.99	-14.73	46.00	31.01	PK	Vertical
5	513.981	36.14	26.69	-9.45	46.00	19.31	PK	Vertical
6	632.818	37.20	29.04	-8.16	46.00	16.96	PK	Vertical


Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

ANT Type 2:

Below 1GHz:

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

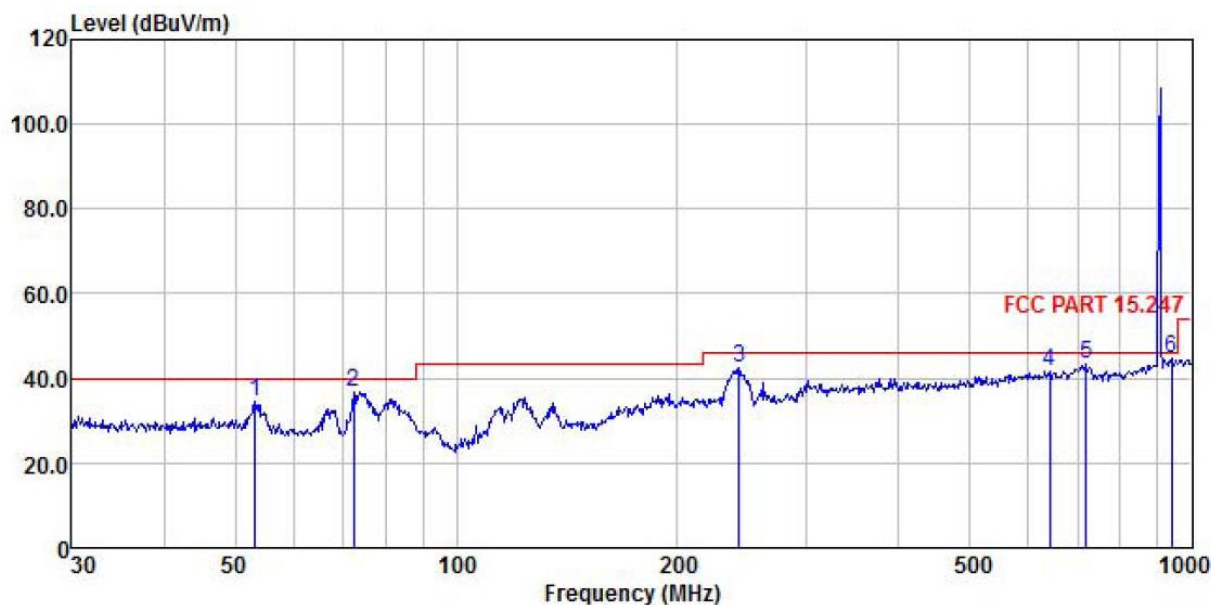


	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	53.318	22.29	11.93	0.50	0.00	34.72	40.00	-5.28	
2	72.592	25.38	10.84	0.66	0.00	36.88	40.00	-3.12	
3	242.525	22.72	18.47	1.53	0.00	42.72	46.00	-3.28	
4	640.611	19.05	20.07	2.68	0.00	41.80	46.00	-4.20	
5	719.200	19.86	20.54	2.89	0.00	43.29	46.00	-2.71	
6	938.833	18.40	22.76	3.45	0.00	44.61	46.00	-1.39	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	900MHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

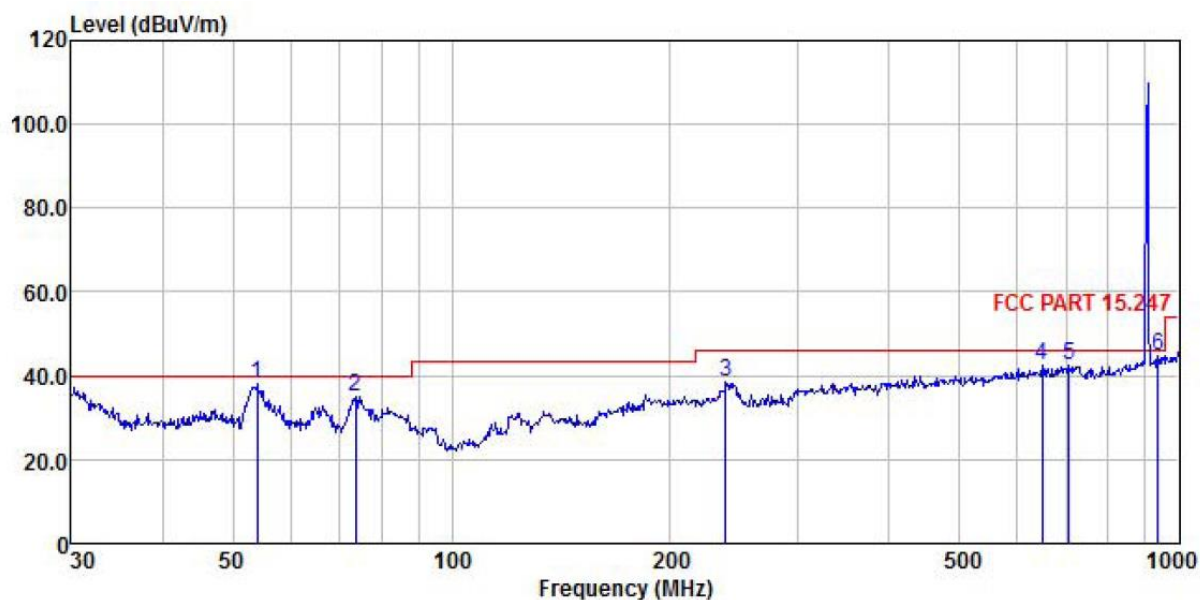


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	54.071	25.92	11.65	0.50	0.00	38.07	40.00	-1.93	
2	73.876	23.13	11.21	0.66	0.00	35.00	40.00	-5.00	
3	238.310	18.45	18.46	1.52	0.00	38.43	46.00	-7.57	
4	649.660	19.68	20.10	2.69	0.00	42.47	46.00	-3.53	
5	706.700	19.16	20.51	2.85	0.00	42.52	46.00	-3.48	
6	935.546	18.38	22.75	3.44	0.00	44.57	46.00	-1.43	

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Humi: 57%

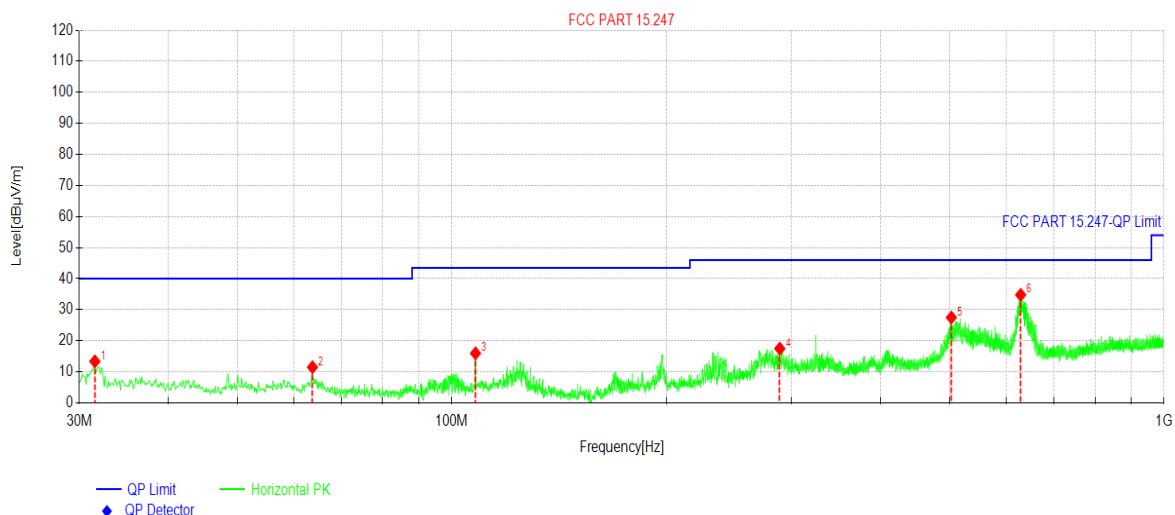


NO.	Freq. [MHz]	Reading [dBμV/m]	Level [dBμV/m]	Factor [dB]	Limit [dBμV/m]	Margin [dB]	Trace	Polarity
1	31.5522	31.49	13.38	-18.11	40.00	26.62	PK	Horizontal
2	63.7594	29.13	11.49	-17.64	40.00	28.51	PK	Horizontal
3	107.995	34.02	15.96	-18.06	43.50	27.54	PK	Horizontal
4	288.821	31.75	17.47	-14.28	46.00	28.53	PK	Horizontal
5	502.922	36.98	27.49	-9.49	46.00	18.51	PK	Horizontal
6	629.228	43.00	34.80	-8.20	46.00	11.20	PK	Horizontal

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Product Name:	Image transmission Module	Product Model:	M240958S
Test By:	Mike	Test mode:	2.4GHz Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	DC 20V	Environment:	Temp: 24℃ Huni: 57%

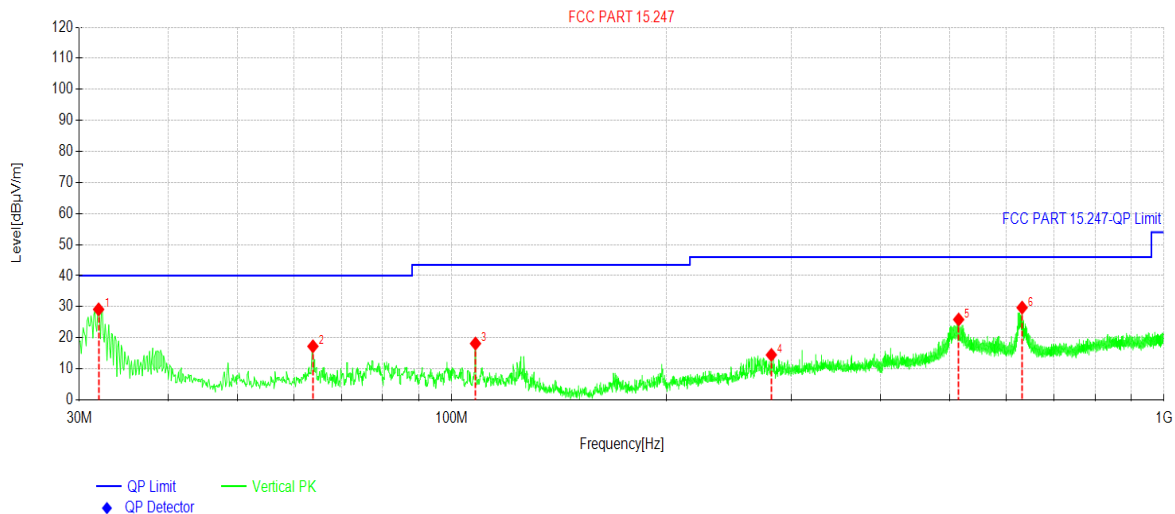

NO.	Freq. [MHz]	Reading[d BuV/m]	Level, [dBuV/m]	Factor, [dB]	Limit, [dBuV/m]	Margin, [dB]	Trace	Polarity
1	31.9402	47.16	29.14	-18.02	40.00	10.86	PK	Vertical
2	63.8564	34.90	17.25	-17.65	40.00	22.75	PK	Vertical
3	107.995	36.21	18.15	-18.06	43.50	25.35	PK	Vertical
4	281.061	29.05	14.49	-14.56	46.00	31.51	PK	Vertical
5	514.951	35.31	25.87	-9.44	46.00	20.13	PK	Vertical
6	632.139	37.88	29.71	-8.17	46.00	16.29	PK	Vertical

Remark:

- Final Level = Receiver Read level + Factor(Antenna Factor + Cable Loss – Preamplifier Factor).
- The emission levels of other frequencies are lower than the limit 20dB and not show in test report.

Above 1GHz

ANT Type 1:

900MHz:

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	74.39	-21.46	52.93	74.00	21.07	Vertical
1808.00	72.93	-21.46	51.47	74.00	22.53	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	62.10	-21.46	40.64	54.00	13.36	Vertical
1808.00	62.83	-21.46	41.37	54.00	12.63	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	74.49	-21.25	53.24	74.00	20.76	Vertical
1830.00	72.68	-21.25	51.43	74.00	22.57	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	61.64	-21.25	40.39	54.00	13.61	Vertical
1830.00	62.56	-21.25	41.31	54.00	12.69	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	74.51	-21.02	53.49	74.00	20.51	Vertical
1852.00	72.87	-21.02	51.85	74.00	22.15	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	61.79	-21.02	40.77	54.00	13.23	Vertical
1852.00	62.51	-21.02	41.49	54.00	12.51	Horizontal
Remark:						
1. Final Level = Receiver Read level + Factor.						
2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

2.4GHz:

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	72.79	-9.58	63.21	74.00	10.79	Vertical
4807.00	61.23	-9.58	51.65	74.00	22.35	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	60.29	-9.58	50.71	54.00	3.29	Vertical
4807.00	52.23	-9.58	42.65	54.00	11.35	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	72.84	-9.08	63.76	74.00	10.24	Vertical
4879.00	61.18	-9.08	52.10	74.00	21.90	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	59.84	-9.08	50.76	54.00	3.24	Vertical
4879.00	52.17	-9.08	43.09	54.00	10.91	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	72.56	-8.53	64.03	74.00	9.97	Vertical
4951.00	61.54	-8.53	53.01	74.00	20.99	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	59.46	-8.53	50.93	54.00	3.07	Vertical
4951.00	52.21	-8.53	43.68	54.00	10.32	Horizontal
Remark: 1. Final Level = Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

ANT Type 2:
900MHz:

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	73.97	-21.46	52.51	74.00	21.49	Vertical
1808.00	72.72	-21.46	51.26	74.00	22.74	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1808.00	61.66	-21.46	40.20	54.00	13.80	Vertical
1808.00	63.07	-21.46	41.61	54.00	12.39	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	74.20	-21.25	52.95	74.00	21.05	Vertical
1830.00	72.21	-21.25	50.96	74.00	23.04	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1830.00	61.19	-21.25	39.94	54.00	14.06	Vertical
1830.00	62.30	-21.25	41.05	54.00	12.95	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	74.47	-21.02	53.45	74.00	20.55	Vertical
1852.00	72.84	-21.02	51.82	74.00	22.18	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
1852.00	61.77	-21.02	40.75	54.00	13.25	Vertical
1852.00	62.52	-21.02	41.50	54.00	12.50	Horizontal
Remark: 1. Final Level = Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						

2.4GHz:

BW:1.4MHz,QPSK						
Test channel: Lowest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	70.90	-9.58	61.32	74.00	12.68	Vertical
4807.00	60.46	-9.58	50.88	74.00	23.12	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4807.00	58.38	-9.58	48.80	54.00	5.20	Vertical
4807.00	51.72	-9.58	42.14	54.00	11.86	Horizontal
Test channel: Middle channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	71.27	-9.08	62.19	74.00	11.81	Vertical
4879.00	60.85	-9.08	51.77	74.00	22.23	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4879.00	58.85	-9.08	49.77	54.00	4.23	Vertical
4879.00	51.59	-9.08	42.51	54.00	11.49	Horizontal
Test channel: Highest channel						
Detector: Peak Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	71.45	-8.53	62.92	74.00	11.08	Vertical
4951.00	61.02	-8.53	52.49	74.00	21.51	Horizontal
Detector: Average Value						
Frequency (MHz)	Read Level (dBuV)	Factor(dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin (dB)	Polarization
4951.00	58.40	-8.53	49.87	54.00	4.13	Vertical
4951.00	51.87	-8.53	43.34	54.00	10.66	Horizontal
Remark: 1. Final Level = Receiver Read level + Factor. 2. The emission levels of other frequencies are lower than the limit 20dB and not show in test report.						