



# FCC CO-LOCATION RADIO

## TEST REPORT

**FCC ID** : 2AGOZ-NU4  
**Equipment** : SMART GLASSES  
**Brand Name** :   
**Model Name** : NU4, Aria Gen 2  
**Applicant** : Meta Platforms Technologies, LLC.  
1 Hacker Way, Menlo Park, CA 94025, USA  
**Manufacturer** : Meta Platforms Technologies, LLC.  
1 Hacker Way, Menlo Park, CA 94025, USA  
**Standard** : FCC Part 15 Subpart C §15.247  
FCC Part 15 Subpart E §15.407

The product was received on Jan. 06, 2025 and testing was performed from Feb. 27, 2025 to Apr. 01, 2025. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sportun International Inc. Wensan Laboratory**  
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

<b>History of this test report</b> .....	<b>3</b>
<b>Summary of Test Result</b> .....	<b>4</b>
<b>1 General Description</b> .....	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT .....	6
1.3 Testing Location .....	7
1.4 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test</b> .....	<b>8</b>
2.1 Carrier Frequency and Channel .....	8
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system .....	9
2.4 EUT Operation Test Setup .....	9
<b>3 Test Result</b> .....	<b>10</b>
3.1 Unwanted Emissions Measurement.....	10
3.2 Antenna Requirements .....	16
<b>4 List of Measuring Equipment</b> .....	<b>17</b>
<b>5 Measurement Uncertainty</b> .....	<b>19</b>

**Appendix A. Radiated Spurious Emission Test Data****Appendix B. Duty Cycle Plots****Appendix C. Setup Photographs**



## History of this test report



## Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(d) 15.407(b)	Unwanted Emissions	Pass	-
3.2	15.203	Antenna Requirement	Pass	-

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Avis Chuang**

**Report Producer: Michelle Chen**



## 1 General Description

### 1.1 Product Feature of Equipment Under Test

Product Feature	
<b>General Specs</b> Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Sub 1GHz and GNSS.	
<b>Antenna Type</b> WLAN: <Ant. 0>: IFA Antenna <Ant. 1>: IFA Antenna Sub 1GHz: Dipole Antenna	
<b>Sample 1</b>	<b>L sku</b>
<b>Sample 2</b>	<b>S sku</b>



Antenna information (L sku)		
<b>902 MHz ~ 928 MHz</b>	Peak Gain (dBi)	2.8
<b>2400 MHz ~ 2483.5 MHz</b>	Peak Gain (dBi)	Ant. 0: -3.68 Ant. 1: -0.92
<b>5150 MHz ~ 5250 MHz</b>	Peak Gain (dBi)	Ant. 0: 1.08 Ant. 1: 0.11

Antenna information (S sku)		
<b>902 MHz ~ 928 MHz</b>	Peak Gain (dBi)	2.8
<b>2400 MHz ~ 2483.5 MHz</b>	Peak Gain (dBi)	Ant. 0: -3.6 Ant. 1: -1.9
<b>5150 MHz ~ 5250 MHz</b>	Peak Gain (dBi)	Ant. 0: 0.91 Ant. 1: 0.09

**Remark:**

1. The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.
2. There are six SKUs, mainly divided into two groups: L-SKU (LSL, LSH, and LLH) and S-SKU (SSL, SLL, and SLH). The difference between the two groups is in the design of the front frame, temple arms, and nose pad. The L-SKU groups share Antenna performance 1 while the S-SKU groups share Antenna performance 2.

For conducted testing, the highest gain condition in two antenna groups was used to ensure compliance in all SKUs.

For radiated testing, we fully tested the antenna configuration with the highest gain in both groups of antennas. We also spot-checked another antenna configuration to ensure compliance in both groups.

## 1.2 Modification of EUT

No modifications made to the EUT during the testing.



## 1.3 Testing Location

<b>Test Site</b>	Sportun International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sportun Site No.</b> 03CH11-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

## 1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

### Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.
3. The TAF code is not including all the FCC KDB listed without accreditation.

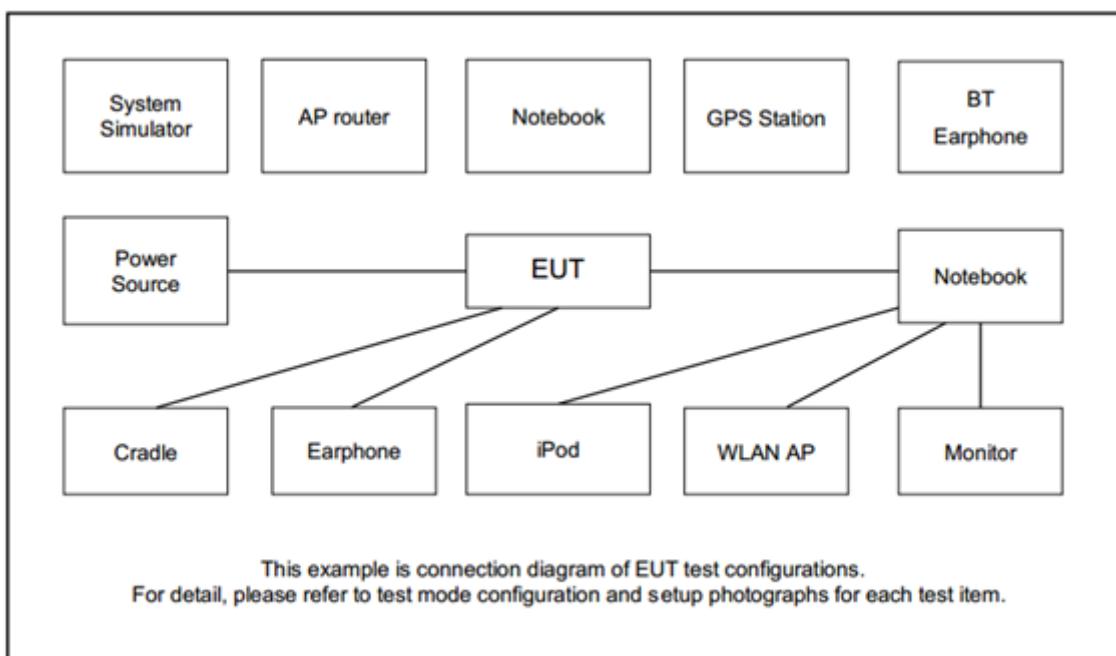
## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

### 2.1 Carrier Frequency and Channel

1. The detailed test modes are shown in Appendix A.
2. For Radiated Test Cases, the tests were performed with Sample 2.

### 2.2 Connection Diagram of Test System





## 2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Dell	Latitude 3400	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

## 2.4 EUT Operation Test Setup

The RF test items, utility “QRCT V4.0 Version 4.0.211.0” and “tera term v4.95” were installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

For Sub 1GHz, The EUT uses PuTTY program which is installed in Notebook to provide channel selection for continuous transmitting signals.



### 3 Test Result

#### 3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

##### 3.1.1 Limit of Unwanted Emissions

###### <For 2402 MHz ~ 2480 MHz, 902 MHz ~ 928 MHz>

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB.

###### <For 5150 MHz ~ 5250 MHz>

For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.



Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

**Note:** The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(2) KDB789033 D02 v02r01 G2)c)

- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
- (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.



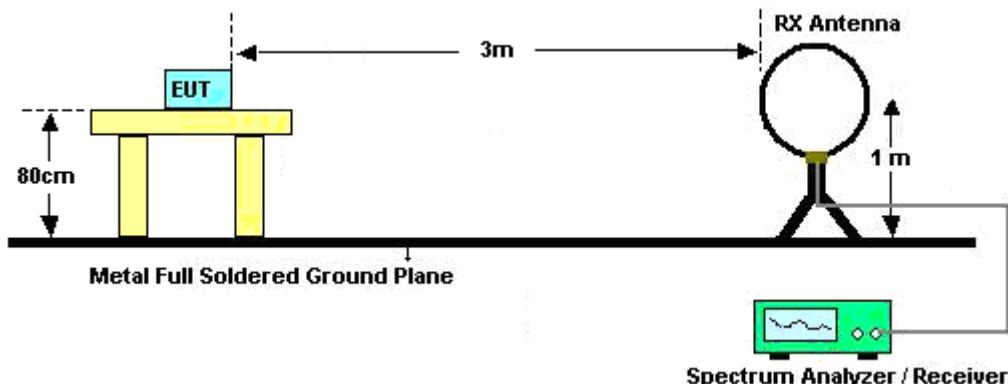
### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.  
Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.

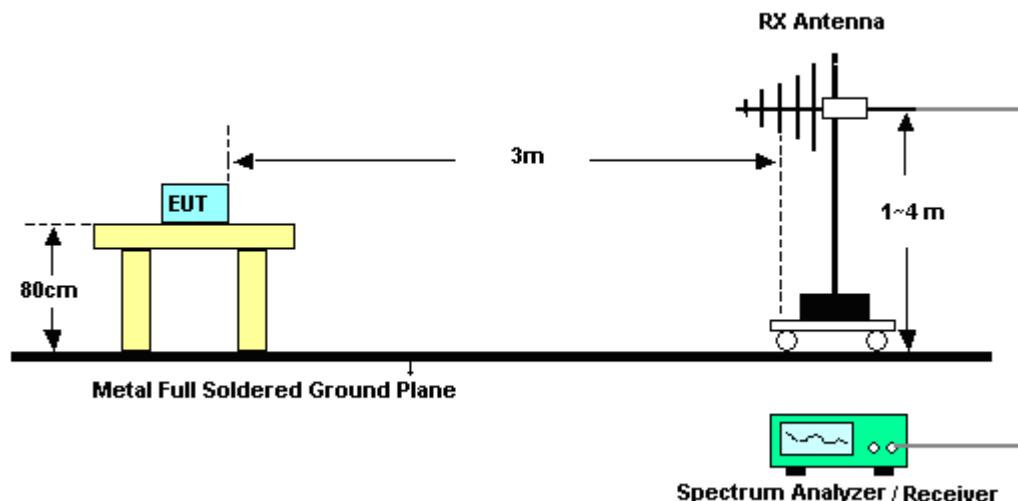
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

### 3.1.4 Test Setup

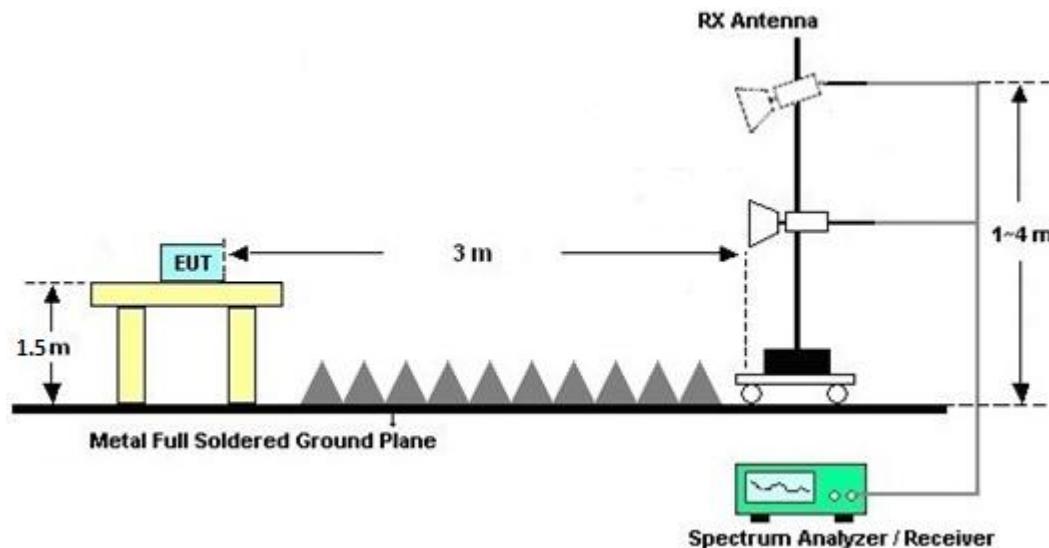
#### For radiated emissions below 30MHz



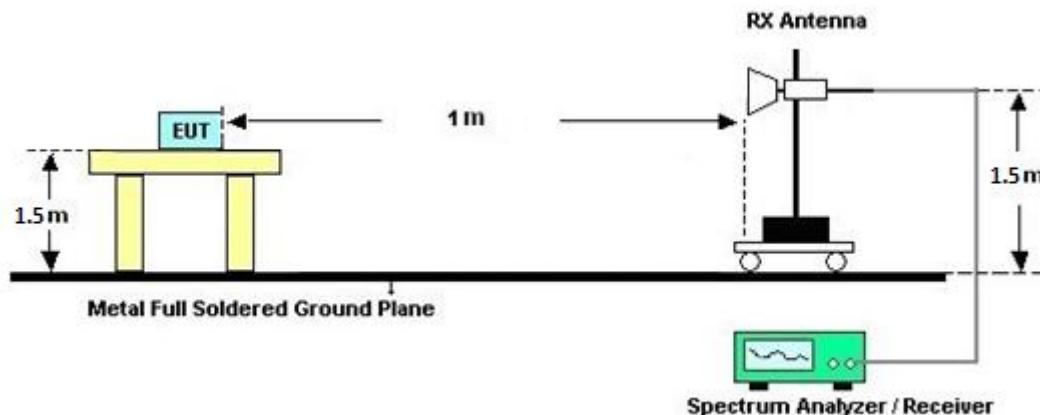
#### For radiated emissions from 30MHz to 1GHz



For radiated test from 1GHz to 18GHz



For radiated test above 18GHz



### 3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



### **3.1.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix A.

### **3.1.7 Duty Cycle**

Please refer to Appendix B.

### **3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)**

Please refer to Appendix A.



## 3.2 Antenna Requirements

### 3.2.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§ 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

### 3.2.2 Antenna Anti-Replacement Construction

Unique (non-standard) antenna connector.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	37059 & 01	30MHz~1GHz	Nov. 27, 2024	Feb. 27, 2025~Apr. 01, 2025	Nov. 26, 2025	Radiation (03CH11-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Aug. 29, 2024	Feb. 27, 2025~Apr. 01, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
Horn Antenna	SCHWARZBECK	BBHA 9120 D	9120D-01620	1GHz~18GHz	Aug. 28, 2024	Feb. 27, 2025~Apr. 01, 2025	Aug. 27, 2025	Radiation (03CH11-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1224	18GHz~40GHz	Jun. 24, 2024	Feb. 27, 2025~Apr. 01, 2025	Jun. 23, 2025	Radiation (03CH11-HY)
Amplifier	SONOMA	310N	187312	9kHz~1GHz	Dec. 07, 2024	Feb. 27, 2025~Apr. 01, 2025	Dec. 06, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 25, 2024	Feb. 27, 2025~Mar. 23, 2025	Mar. 24, 2025	Radiation (03CH11-HY)
Preamplifier	Keysight	83017A	MY53270080	1GHz~26.5GHz	Mar. 24, 2025	Mar. 24, 2025~Apr. 01, 2025	Mar. 23, 2026	Radiation (03CH11-HY)
Preamplifier	E-INSTRUMENT TECH LTD.	ERA-100M-18G-5 6-01-A70	EC1900249	1GHz~18GHz	Jan. 21, 2025	Feb. 27, 2025~Apr. 01, 2025	Jan. 20, 2026	Radiation (03CH11-HY)
Preamplifier	EMEC	EM18G40G	060873	18GHz~40GHz	Sep. 02, 2024	Feb. 27, 2025~Apr. 01, 2025	Sep. 01, 2025	Radiation (03CH11-HY)
Spectrum Analyzer	Keysight	N9010A	MY54200486	10Hz~44GHz	Oct. 14, 2024	Feb. 27, 2025~Apr. 01, 2025	Oct. 13, 2025	Radiation (03CH11-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY55420170	20MHz~8.4GHz	Jul. 19, 2024	Feb. 27, 2025~Apr. 01, 2025	Jul. 18, 2025	Radiation (03CH11-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Feb. 27, 2025~Apr. 01, 2025	N/A	Radiation (03CH11-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Feb. 27, 2025~Apr. 01, 2025	N/A	Radiation (03CH11-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Feb. 27, 2025~Apr. 01, 2025	N/A	Radiation (03CH11-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Feb. 27, 2025~Apr. 01, 2025	N/A	Radiation (03CH11-HY)
Hygrometer	TECPEL	DTM-303B	TP200880	N/A	Aug. 29, 2024	Feb. 27, 2025~Apr. 01, 2025	Aug. 28, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	May 23, 2024	Feb. 27, 2025~Mar. 04, 2025	May 22, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 06, 2024	Feb. 27, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 06, 2024	Feb. 27, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 06, 2024	Feb. 27, 2025~Mar. 04, 2025	Mar. 05, 2025	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804013/2	30M~40G	Mar. 05, 2025	Mar. 05, 2025~Apr. 01, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2859/2	30MHz~40GHz	Mar. 05, 2025	Mar. 05, 2025~Apr. 01, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9K~30M	Mar. 05, 2025	Mar. 05, 2025~Apr. 01, 2025	Mar. 04, 2026	Radiation (03CH11-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	30M~40G	Mar. 05, 2025	Mar. 05, 2025~Apr. 01, 2025	Mar. 04, 2026	Radiation (03CH11-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Filter	Wainwright	WHKX12-900-10 00-15000-60SS	SN12	1GHz High Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX12-2700-3 000-18000-60SS	SN3	3GHz High Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHKX8-5872.5-6 750-18000-40SS	SN3	6.75GHz High Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK4-1000-1530 -8000-40SS	SN11	1.53GHz Low Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WHK20/1000C7/4 OSS	SN2	20MHz High Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Attenuator	HONOVA	5910 SMA-50-005	0028	N/A	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)
Filter	Wainwright	WLK10-4630-509 3-11000-40SS	SN1	4.5GHz Low Pass Filter	Sep. 10, 2024	Feb. 27, 2025~ Apr. 01, 2025	Sep. 09, 2025	Radiation (03CH11-HY)



## 5 Measurement Uncertainty

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	6.4 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2U <sub>c</sub> (y))	5.3 dB
---	--------



## Appendix A. Radiated Spurious Emission Test Data

<b>Test Engineer :</b>	Rain Lee, Jacky Hong and White Hou	<b>Temperature :</b>	20~26°C
		<b>Relative Humidity :</b>	40~65%



## A1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	DTS	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
	U-NII-1	5.15-5.25	0	802.11a Tx	36	5180	6Mbps	-	-
	DTS	902-928	Sub-G	S2-LP Tx	25	915.4	250kbps	-	-
Mode 2	DTS	2400-2483.5	0	802.11b	11	2462	1Mbps	-	-
	U-NII-1	5.15-5.25	1	802.11a Tx	36	5180	6Mbps	-	-
	DTS	902-928	Sub-G	S2-LP Tx	25	915.4	250kbps	-	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 3	DTS	2400-2483.5	0	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
	U-NII-1	5.15-5.25	0	802.11a Tx	36	5180	6Mbps	-	-
Mode 4	DTS	2400-2483.5	1	Bluetooth-LE_GSFK	39	2480	1Mbps	-	-
	U-NII-1	5.15-5.25	1	802.11a Tx	36	5180	6Mbps	-	-
Mode 5	DTS	2400-2483.5	0+1	802.11b	11	2462	1Mbps	-	-
	DTS	902-928	Sub-G	S2-LP Tx	25	915.4	250kbps	-	-
Mode 6	U-NII-1	5.15-5.25	0+1	802.11a Tx	36	5180	6Mbps	-	-
	DTS	902-928	Sub-G	S2-LP Tx	25	915.4	250kbps	-	-



## A2. Summary of each worse mode

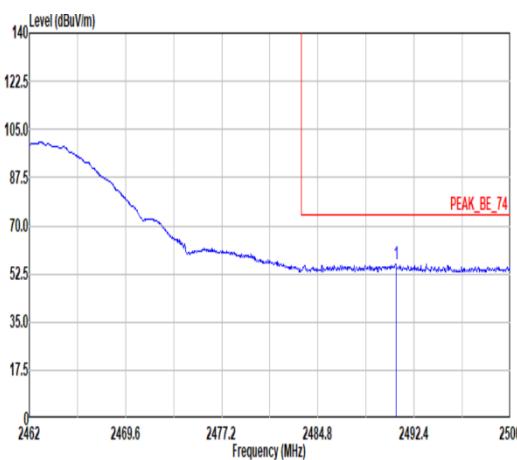
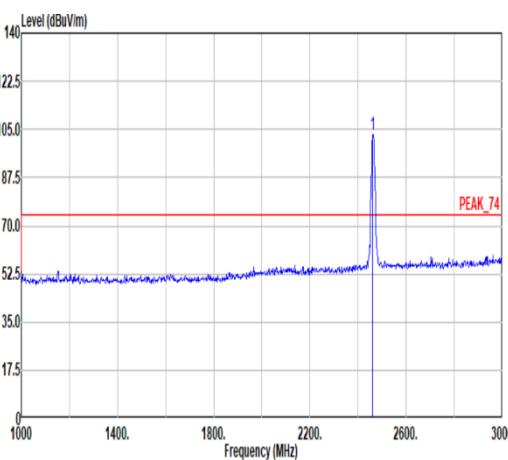
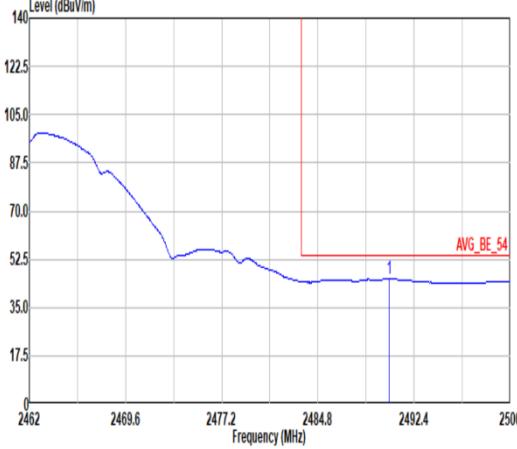
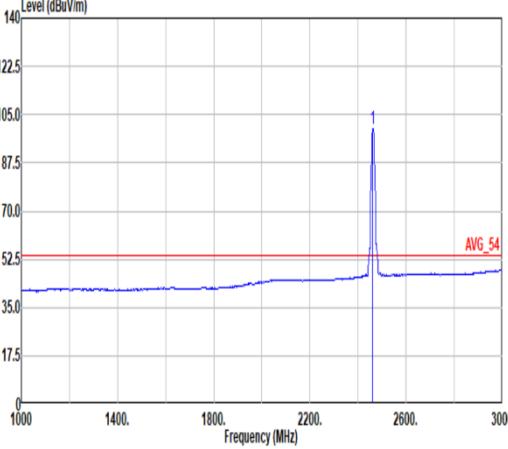
Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11b	11	2490.42	45.57	54.00	-8.43	H	Avg.	Pass	-	Band Edge
	802.11a Tx	36	5149.94	43.54	54.00	-10.46	H	Avg.	Pass	-	Band Edge
	S2-LP Tx	25	957.32	39.87	46.00	-6.13	V	Peak	Pass	-	LF
	Simultaneous	-	4924.00	45.29	54.00	-8.71	V	Avg.	Pass	-	Harmonic
2	802.11b	11	2490.39	44.70	54.00	-9.30	H	Avg.	Pass	-	Band Edge
	802.11a Tx	36	5149.94	44.82	54.00	-9.18	H	Avg.	Pass	-	Band Edge
	S2-LP Tx	25	663.41	39.58	46.00	-6.42	H	Peak	Pass	-	LF
	Simultaneous	-	4924.00	48.71	54.00	-5.29	V	Avg.	Pass	-	Harmonic

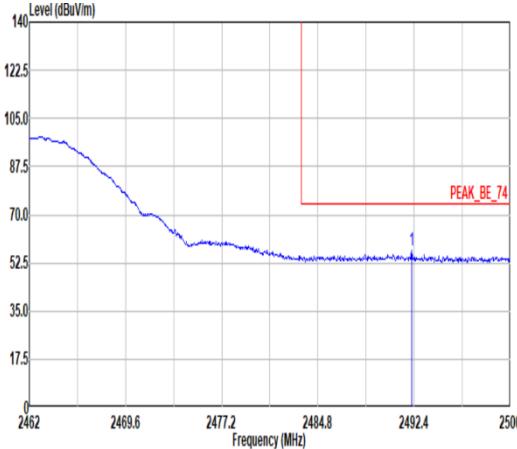
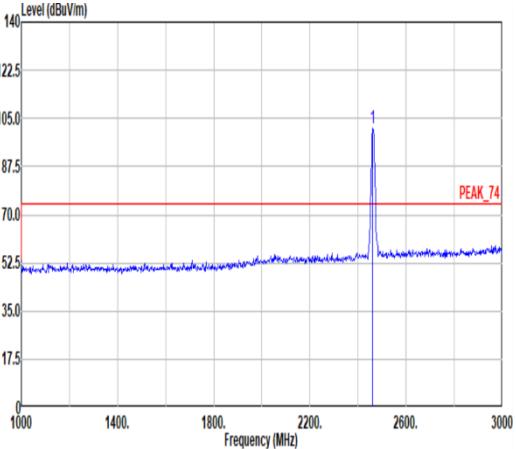
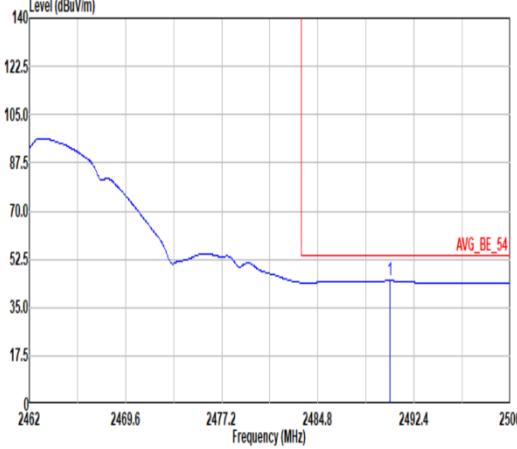
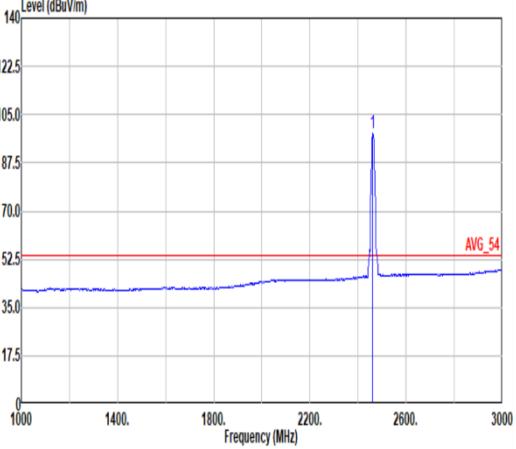


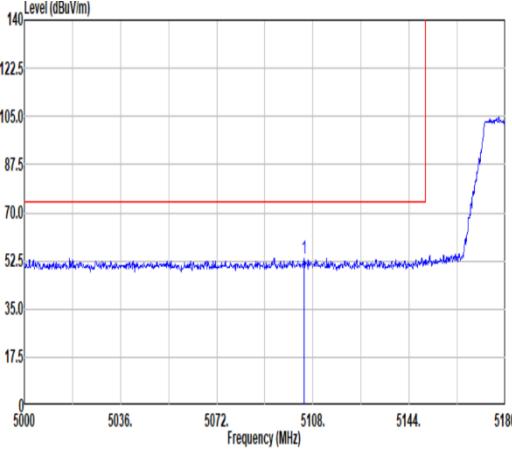
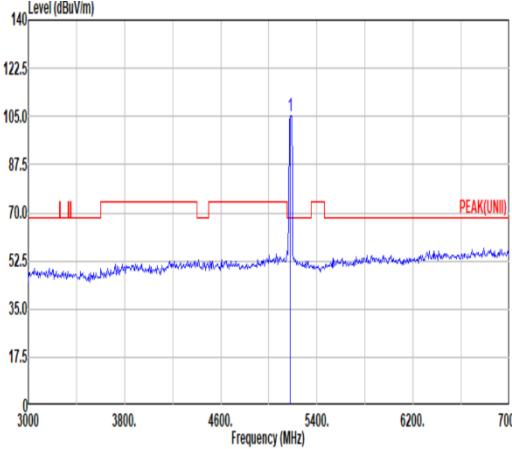
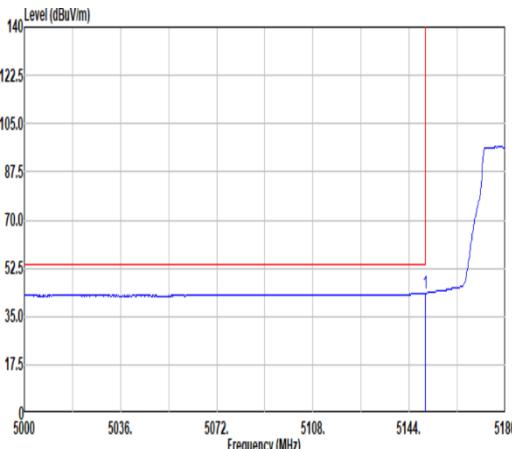
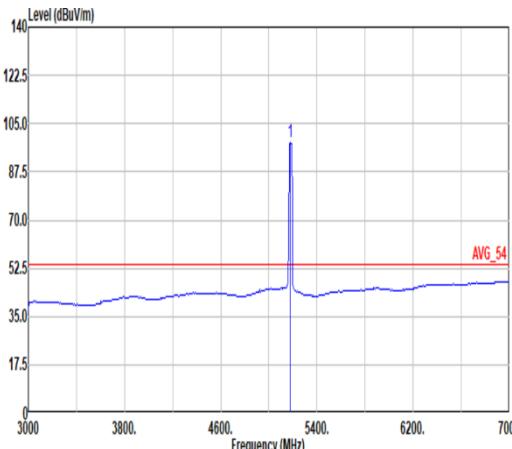
Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
3	Bluetooth- LE_GSFK	39	2499.58	43.58	54.00	-10.44	V	Avg.	Pass	-	Band Edge
	802.11a Tx	36	5149.76	44.48	54.00	-9.52	H	Avg.	Pass	-	Band Edge
	Simultaneous	-	4960.00	51.00	54.00	-3.00	H	Avg.	Pass	-	Harmonic
4	Bluetooth- LE_GSFK	39	2498.98	43.56	54.00	-10.44	V	Avg.	Pass	-	Band Edge
	802.11a Tx	36	5149.94	43.18	68.20	-10.82	H	Avg.	Pass	Full	Band Edge
	Simultaneous	-	4960.00	45.08	54.00	-8.92	V	Avg.	Pass	-	Harmonic

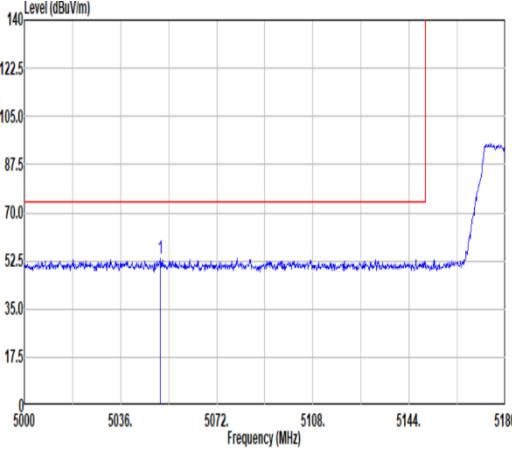
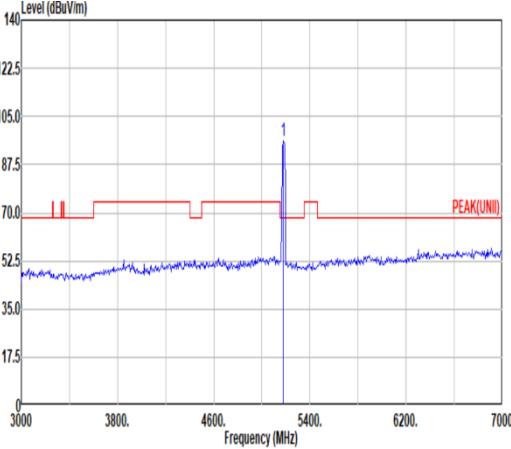
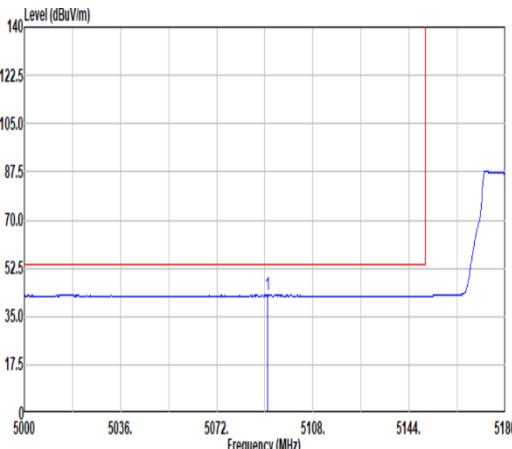
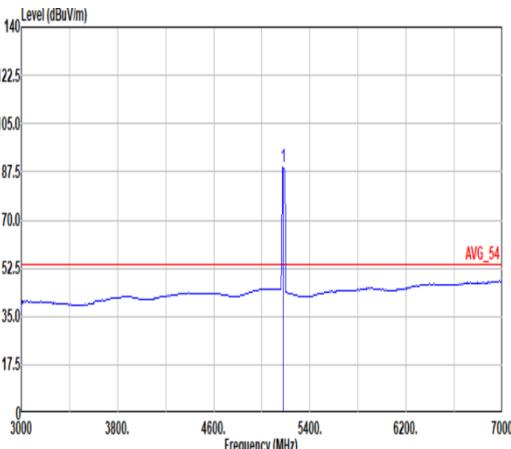


Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
5	802.11b	11	2490.39	45.38	54.00	-8.62	H	Avg.	Pass	-	Band Edge
	S2-LP Tx	25	663.41	39.79	46.00	-6.21	V	Peak	Pass	-	LF
	Simultaneous	-	4924.00	45.36	54.00	-8.64	H	Avg.	Pass	-	Harmonic
6	802.11a Tx	36	5148.32	44.52	54.00	-9.48	H	Avg.	Pass	-	Band Edge
	S2-LP Tx	25	36.79	33.25	40.00	-6.75	V	Peak	Pass	-	LF
	Simultaneous	-	39563.85	41.79	54.00	-12.21	V	Avg.	Pass	-	Harmonic

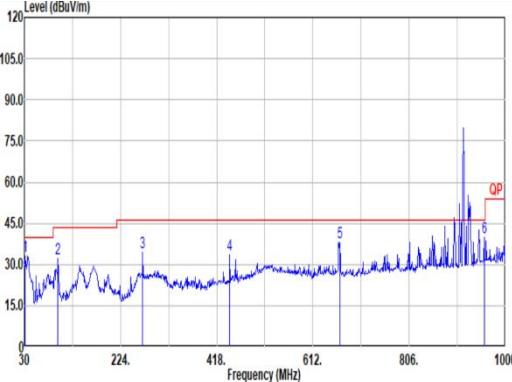
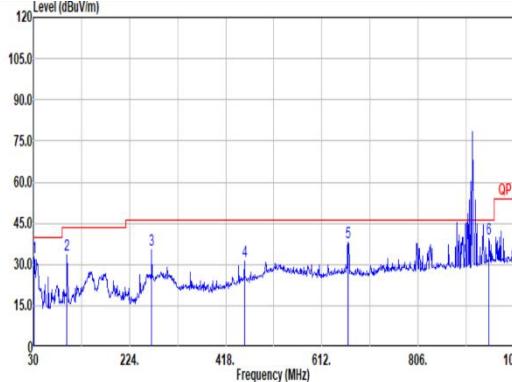
<b>Mode</b>	1																																																																																	
	<b>Band Edge</b>																																																																																	
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																																																	
<b>ANT</b>	1																																																																																	
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2490.96</td><td>55.93</td><td>74.00</td><td>-18.07</td><td>43.16</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>305 96 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.96	55.93	74.00	-18.07	43.16	27.90	7.33	33.28	10.03										305 96 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>103.12</td><td>-----</td><td>-----</td><td>90.68</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>305 96 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.12	-----	-----	90.68	27.62	7.29	33.29	10.03										305 96 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2490.96	55.93	74.00	-18.07	43.16	27.90	7.33	33.28	10.03																																																																									
									305 96 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	103.12	-----	-----	90.68	27.62	7.29	33.29	10.03																																																																									
									305 96 PEAK																																																																									
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2490.42</td><td>45.57</td><td>54.00</td><td>-8.43</td><td>32.80</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>305 96 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.42	45.57	54.00	-8.43	32.80	27.90	7.33	33.28	10.03										305 96 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>99.95</td><td>-----</td><td>-----</td><td>87.51</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>305 96 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.95	-----	-----	87.51	27.62	7.29	33.29	10.03										305 96 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2490.42	45.57	54.00	-8.43	32.80	27.90	7.33	33.28	10.03																																																																									
									305 96 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	99.95	-----	-----	87.51	27.62	7.29	33.29	10.03																																																																									
									305 96 AVERAGE																																																																									

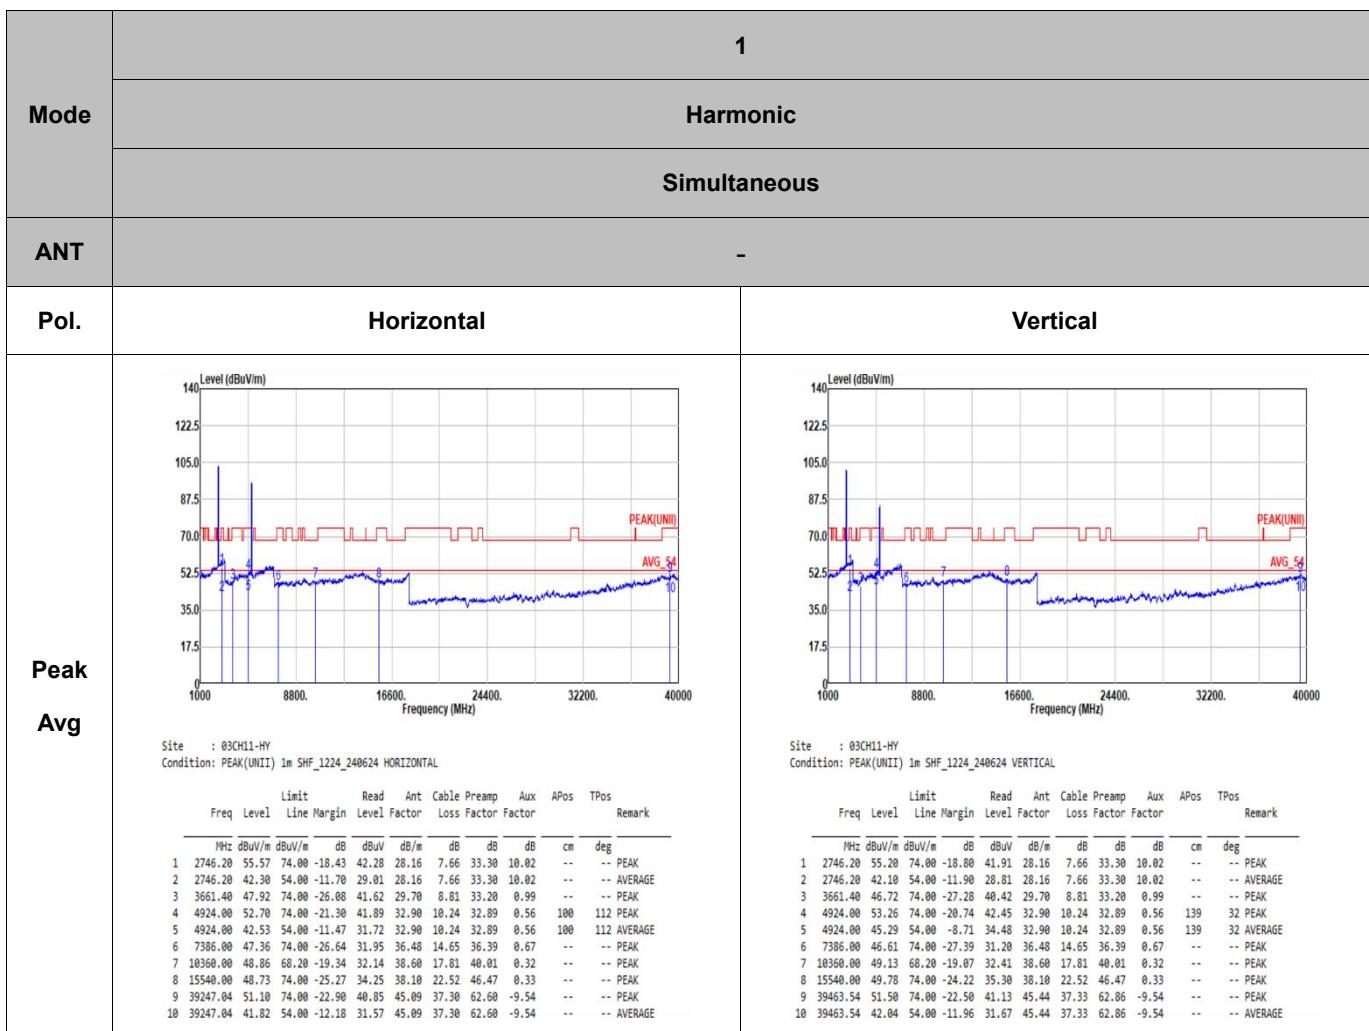
<b>Mode</b>	1																																																													
	<b>Band Edge</b>																																																													
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																													
<b>ANT</b>	1																																																													
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2492.21</td><td>57.07</td><td>74.00</td><td>-16.93</td><td>44.29</td><td>27.90</td><td>7.33</td><td>33.27</td><td>10.03 257 110 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2492.21	57.07	74.00	-16.93	44.29	27.90	7.33	33.27	10.03 257 110 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>101.20</td><td>-----</td><td>-----</td><td>88.76</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03 257 110 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2462.00	101.20	-----	-----	88.76	27.62	7.29	33.29	10.03 257 110 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																						
1	2492.21	57.07	74.00	-16.93	44.29	27.90	7.33	33.27	10.03 257 110 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																						
1	2462.00	101.20	-----	-----	88.76	27.62	7.29	33.29	10.03 257 110 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2490.46</td><td>44.78</td><td>54.00</td><td>-9.22</td><td>32.01</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03 257 110 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2490.46	44.78	54.00	-9.22	32.01	27.90	7.33	33.28	10.03 257 110 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>98.06</td><td>-----</td><td>-----</td><td>85.62</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03 257 110 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2462.00	98.06	-----	-----	85.62	27.62	7.29	33.29	10.03 257 110 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																						
1	2490.46	44.78	54.00	-9.22	32.01	27.90	7.33	33.28	10.03 257 110 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																						
1	2462.00	98.06	-----	-----	85.62	27.62	7.29	33.29	10.03 257 110 AVERAGE																																																					

<b>Mode</b>	1																																																													
	<b>Band Edge</b>																																																													
	<b>U-NII-1_5.15-5.25_802.11a Tx_CH36_5180MHz</b>																																																													
<b>ANT</b>	0																																																													
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>5104.76</td><td>53.57</td><td>74.00</td><td>-20.43</td><td>42.45</td><td>33.02</td><td>10.40</td><td>32.87</td><td>0.57 100 258 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB	dB	dB	cm	deg		1	5104.76	53.57	74.00	-20.43	42.45	33.02	10.40	32.87	0.57 100 258 PEAK	 <p>Site : 03CH11-HY Condition: PEAK(U-NII) 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>105.08</td><td>-----</td><td>-----</td><td>93.94</td><td>33.10</td><td>10.35</td><td>32.87</td><td>0.56 100 258 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB	dB	dB	cm	deg		1	5180.00	105.08	-----	-----	93.94	33.10	10.35	32.87	0.56 100 258 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB	dB	dB	cm	deg																																																						
1	5104.76	53.57	74.00	-20.43	42.45	33.02	10.40	32.87	0.57 100 258 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB	dB	dB	cm	deg																																																						
1	5180.00	105.08	-----	-----	93.94	33.10	10.35	32.87	0.56 100 258 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>5149.94</td><td>43.54</td><td>54.00</td><td>-10.46</td><td>32.27</td><td>33.28</td><td>10.37</td><td>32.87</td><td>0.57 100 258 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB	dB	dB	cm	deg		1	5149.94	43.54	54.00	-10.46	32.27	33.28	10.37	32.87	0.57 100 258 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBm</th><th>dBm</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>98.15</td><td>-----</td><td>-----</td><td>87.01</td><td>33.10</td><td>10.35</td><td>32.87</td><td>0.56 100 258 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB	dB	dB	cm	deg		1	5180.00	98.15	-----	-----	87.01	33.10	10.35	32.87	0.56 100 258 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB	dB	dB	cm	deg																																																						
1	5149.94	43.54	54.00	-10.46	32.27	33.28	10.37	32.87	0.57 100 258 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB	dB	dB	cm	deg																																																						
1	5180.00	98.15	-----	-----	87.01	33.10	10.35	32.87	0.56 100 258 AVERAGE																																																					

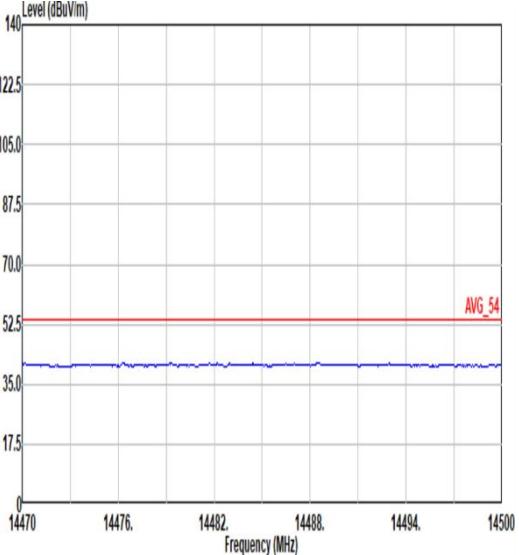
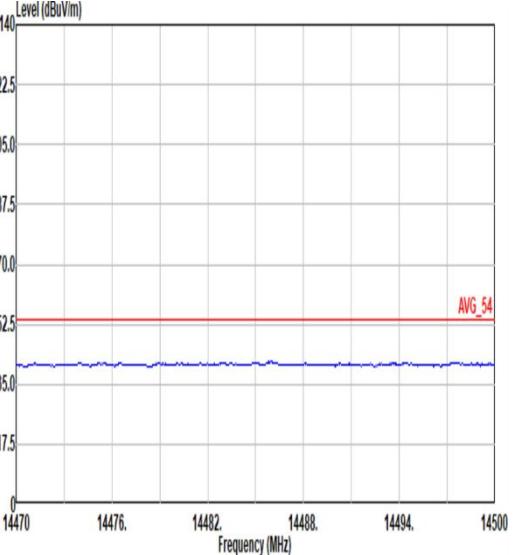
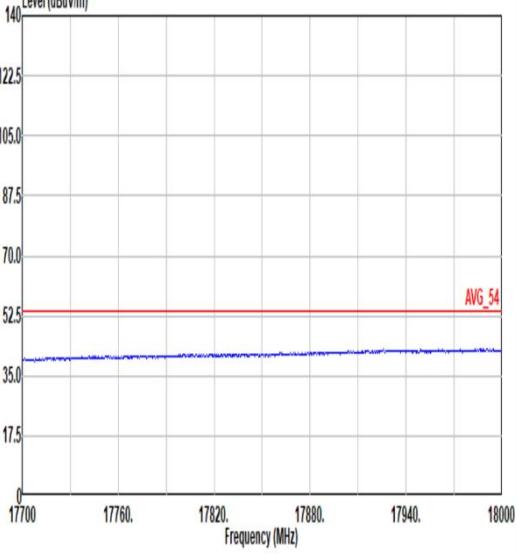
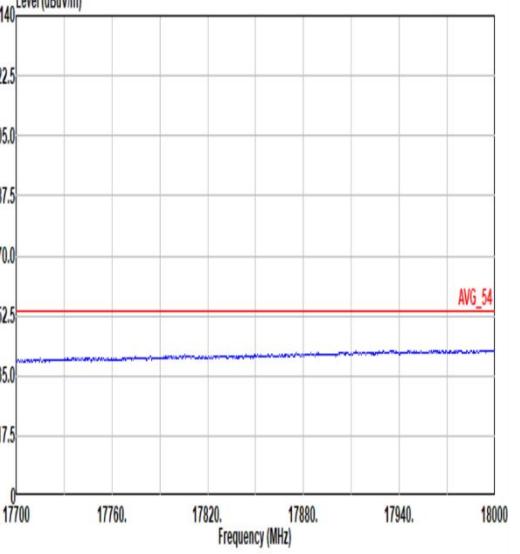
<b>Mode</b>	1																																																															
	<b>Band Edge</b>																																																															
	<b>U-NII-1_5.15-5.25_802.11a Tx_CH36_5180MHz</b>																																																															
<b>ANT</b>	0																																																															
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																														
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5850.94</td> <td>53.61</td> <td>74.00</td> <td>-20.39</td> <td>42.58</td> <td>32.90</td> <td>10.43</td> <td>32.88</td> <td>0.58</td> <td>300 159 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5850.94	53.61	74.00	-20.39	42.58	32.90	10.43	32.88	0.58	300 159 PEAK	 <p>Site : 03CH11-HY Condition: PEAK(U-NII) 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>95.97</td> <td>-----</td> <td>-----</td> <td>84.83</td> <td>33.10</td> <td>10.35</td> <td>32.87</td> <td>0.56</td> <td>300 159 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.97	-----	-----	84.83	33.10	10.35	32.87	0.56	300 159 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5850.94	53.61	74.00	-20.39	42.58	32.90	10.43	32.88	0.58	300 159 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5180.00	95.97	-----	-----	84.83	33.10	10.35	32.87	0.56	300 159 PEAK																																																						
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5890.90</td> <td>42.58</td> <td>54.00</td> <td>-11.42</td> <td>31.48</td> <td>32.98</td> <td>10.41</td> <td>32.87</td> <td>0.58</td> <td>300 159 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5890.90	42.58	54.00	-11.42	31.48	32.98	10.41	32.87	0.58	300 159 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>89.09</td> <td>-----</td> <td>-----</td> <td>77.93</td> <td>33.12</td> <td>10.35</td> <td>32.87</td> <td>0.56</td> <td>300 159 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	89.09	-----	-----	77.93	33.12	10.35	32.87	0.56	300 159 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5890.90	42.58	54.00	-11.42	31.48	32.98	10.41	32.87	0.58	300 159 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																							
1	5180.00	89.09	-----	-----	77.93	33.12	10.35	32.87	0.56	300 159 AVERAGE																																																						



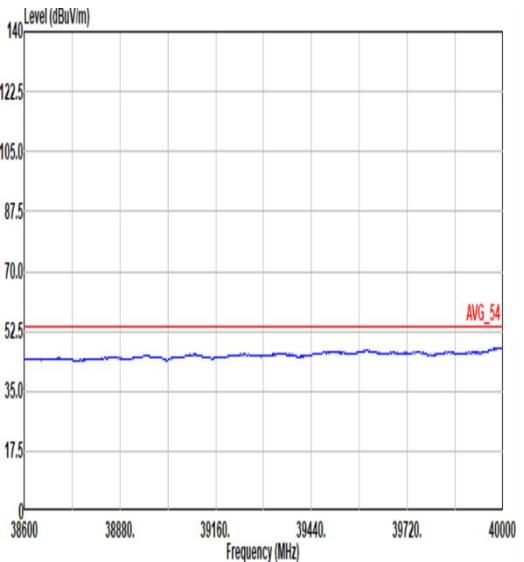
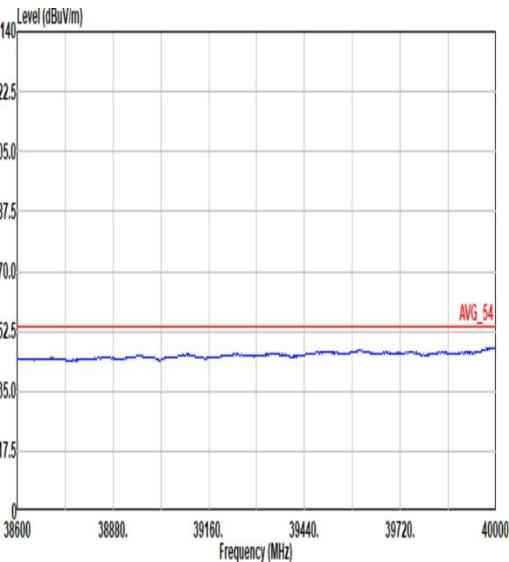
Mode	1																																																																																																																																																																
	LF																																																																																																																																																																
	902-928_ S2-LP_CH25_915.4MHz																																																																																																																																																																
ANT	Sub-G																																																																																																																																																																
Pol.	Horizontal																																																																																																																																																																
Peak																																																																																																																																																																	
	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059&amp;01_241127 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>33.22</td><td>40.00</td><td>-6.78</td><td>40.55</td><td>24.21</td><td>0.87</td><td>32.41</td><td>0.00</td></tr><tr><td>2</td><td>97.90</td><td>32.05</td><td>43.50</td><td>-11.45</td><td>46.91</td><td>15.96</td><td>1.49</td><td>32.31</td><td>0.00</td></tr><tr><td>3</td><td>268.62</td><td>34.55</td><td>46.00</td><td>-11.45</td><td>45.07</td><td>19.26</td><td>2.42</td><td>32.28</td><td>0.00</td></tr><tr><td>4</td><td>444.19</td><td>33.66</td><td>46.00</td><td>-12.34</td><td>39.51</td><td>23.22</td><td>3.11</td><td>32.18</td><td>0.00</td></tr><tr><td>5</td><td>666.32</td><td>37.88</td><td>46.00</td><td>-8.12</td><td>39.76</td><td>26.58</td><td>3.77</td><td>32.23</td><td>0.00</td></tr><tr><td>6</td><td>957.32</td><td>39.87</td><td>46.00</td><td>-6.13</td><td>34.98</td><td>31.17</td><td>4.54</td><td>30.82</td><td>0.00</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	30.97	33.22	40.00	-6.78	40.55	24.21	0.87	32.41	0.00	2	97.90	32.05	43.50	-11.45	46.91	15.96	1.49	32.31	0.00	3	268.62	34.55	46.00	-11.45	45.07	19.26	2.42	32.28	0.00	4	444.19	33.66	46.00	-12.34	39.51	23.22	3.11	32.18	0.00	5	666.32	37.88	46.00	-8.12	39.76	26.58	3.77	32.23	0.00	6	957.32	39.87	46.00	-6.13	34.98	31.17	4.54	30.82	0.00	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059&amp;01_241127 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>32.74</td><td>40.00</td><td>-7.26</td><td>40.07</td><td>24.21</td><td>0.87</td><td>32.41</td><td>0.00</td></tr><tr><td>2</td><td>97.90</td><td>33.34</td><td>43.50</td><td>-10.16</td><td>48.20</td><td>15.96</td><td>1.49</td><td>32.31</td><td>0.00</td></tr><tr><td>3</td><td>268.62</td><td>35.14</td><td>46.00</td><td>-10.86</td><td>45.66</td><td>19.26</td><td>2.42</td><td>32.28</td><td>0.00</td></tr><tr><td>4</td><td>455.83</td><td>31.36</td><td>46.00</td><td>-14.64</td><td>37.00</td><td>23.42</td><td>3.14</td><td>32.28</td><td>0.00</td></tr><tr><td>5</td><td>664.38</td><td>38.14</td><td>46.00</td><td>-7.86</td><td>40.04</td><td>26.58</td><td>3.76</td><td>32.24</td><td>0.00</td></tr><tr><td>6</td><td>948.59</td><td>39.53</td><td>46.00</td><td>-6.47</td><td>35.05</td><td>30.87</td><td>4.52</td><td>30.91</td><td>0.00</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg		1	30.97	32.74	40.00	-7.26	40.07	24.21	0.87	32.41	0.00	2	97.90	33.34	43.50	-10.16	48.20	15.96	1.49	32.31	0.00	3	268.62	35.14	46.00	-10.86	45.66	19.26	2.42	32.28	0.00	4	455.83	31.36	46.00	-14.64	37.00	23.42	3.14	32.28	0.00	5	664.38	38.14	46.00	-7.86	40.04	26.58	3.76	32.24	0.00	6	948.59	39.53	46.00	-6.47	35.05	30.87	4.52	30.91
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																																									
1	30.97	33.22	40.00	-6.78	40.55	24.21	0.87	32.41	0.00																																																																																																																																																								
2	97.90	32.05	43.50	-11.45	46.91	15.96	1.49	32.31	0.00																																																																																																																																																								
3	268.62	34.55	46.00	-11.45	45.07	19.26	2.42	32.28	0.00																																																																																																																																																								
4	444.19	33.66	46.00	-12.34	39.51	23.22	3.11	32.18	0.00																																																																																																																																																								
5	666.32	37.88	46.00	-8.12	39.76	26.58	3.77	32.23	0.00																																																																																																																																																								
6	957.32	39.87	46.00	-6.13	34.98	31.17	4.54	30.82	0.00																																																																																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																								
Freq	MHz	dBuV/m	dBuV/m	dB	dB	dB	cm	deg																																																																																																																																																									
1	30.97	32.74	40.00	-7.26	40.07	24.21	0.87	32.41	0.00																																																																																																																																																								
2	97.90	33.34	43.50	-10.16	48.20	15.96	1.49	32.31	0.00																																																																																																																																																								
3	268.62	35.14	46.00	-10.86	45.66	19.26	2.42	32.28	0.00																																																																																																																																																								
4	455.83	31.36	46.00	-14.64	37.00	23.42	3.14	32.28	0.00																																																																																																																																																								
5	664.38	38.14	46.00	-7.86	40.04	26.58	3.76	32.24	0.00																																																																																																																																																								
6	948.59	39.53	46.00	-6.47	35.05	30.87	4.52	30.91	0.00																																																																																																																																																								

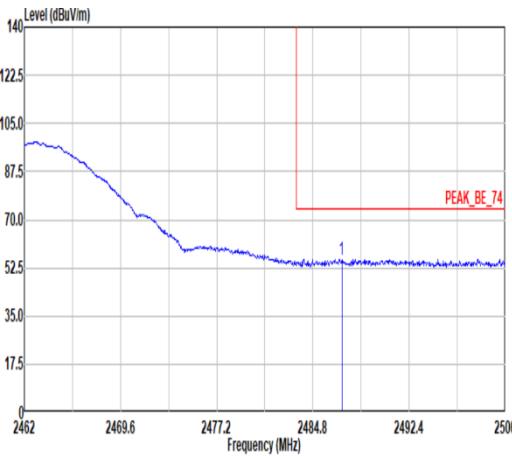
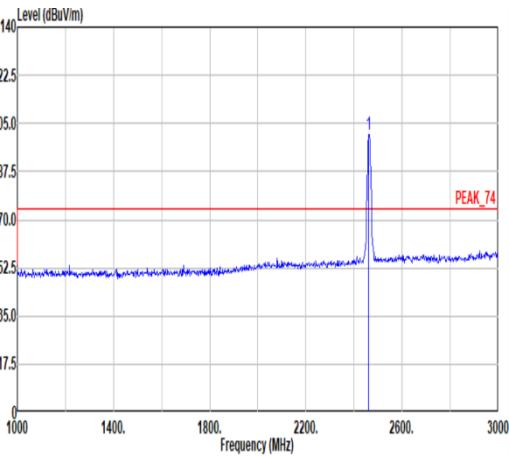
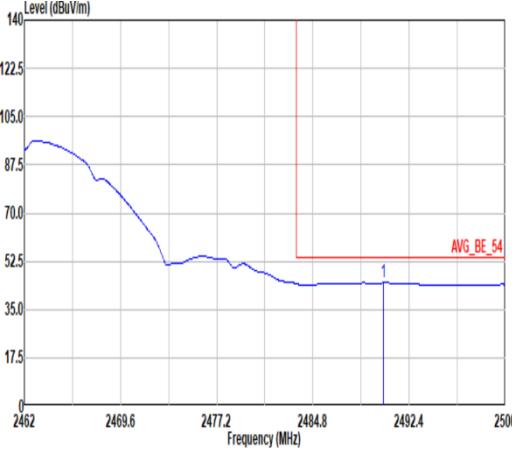
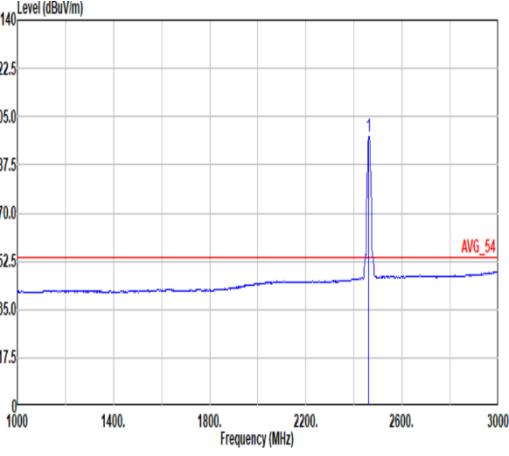


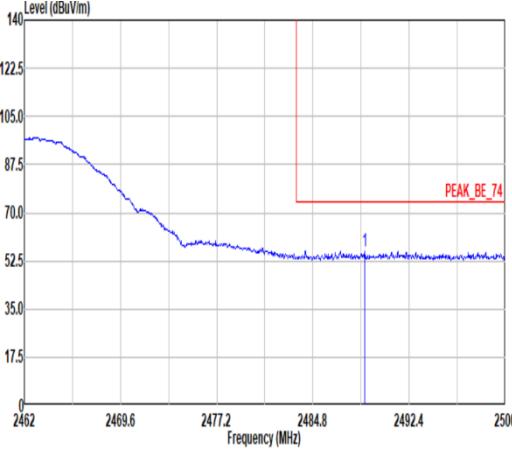
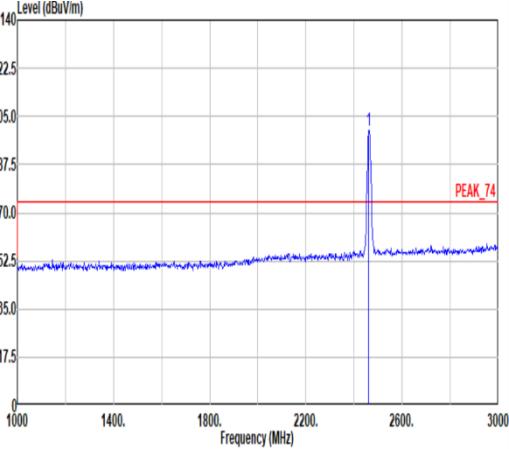
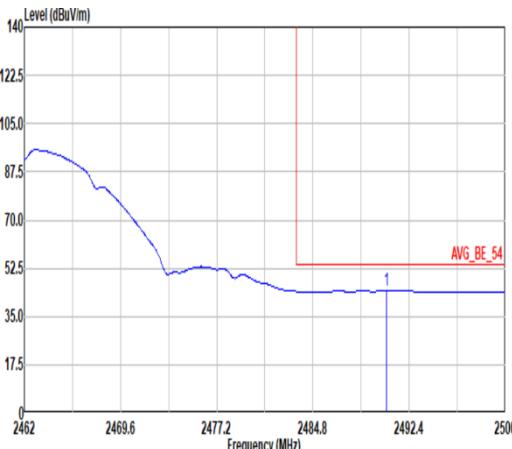
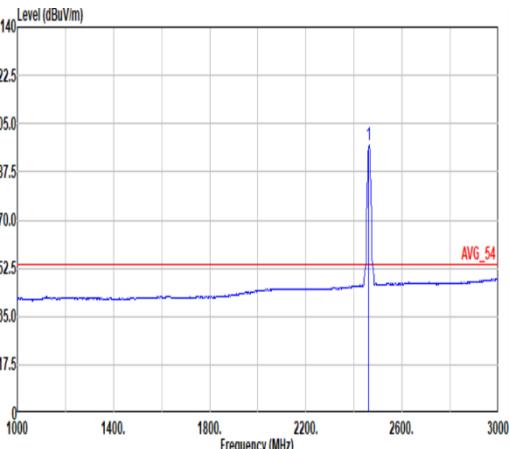


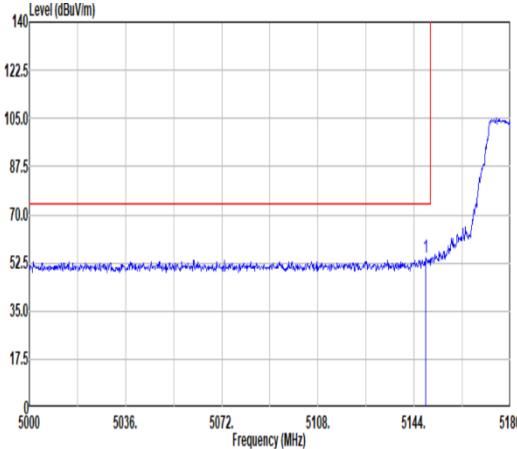
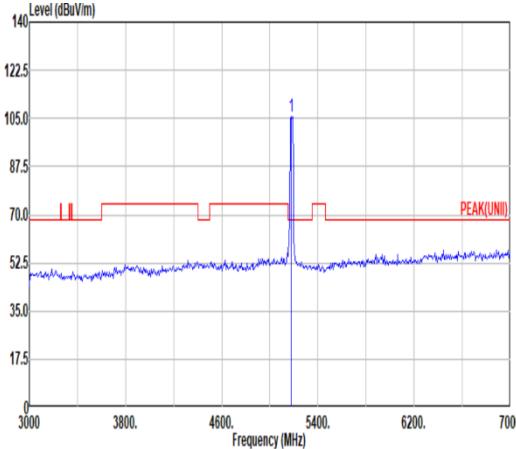
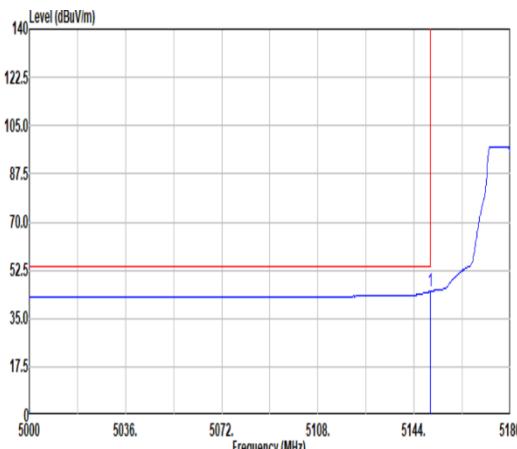
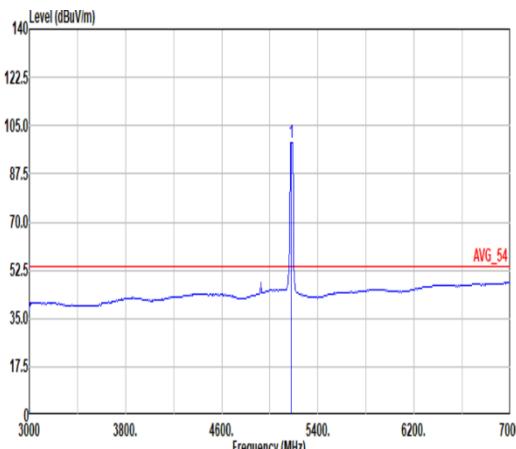
Mode	1	
Mode	Harmonic	
Mode	Simultaneous	
ANT	-	
Pol.	Horizontal	Vertical
14.47G		
~		
14.5G		
Avg.	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p>
17.7G		
~		
18G		
Avg.	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p>	<p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p>

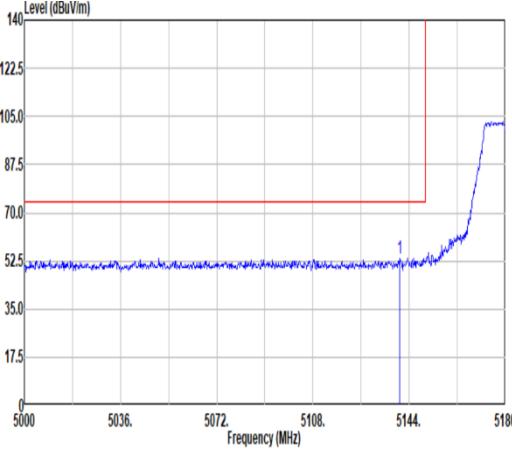
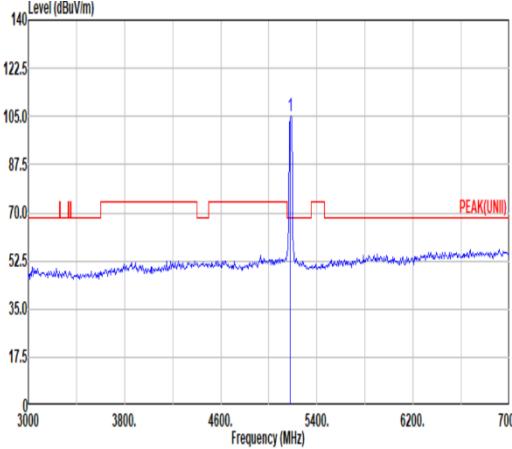
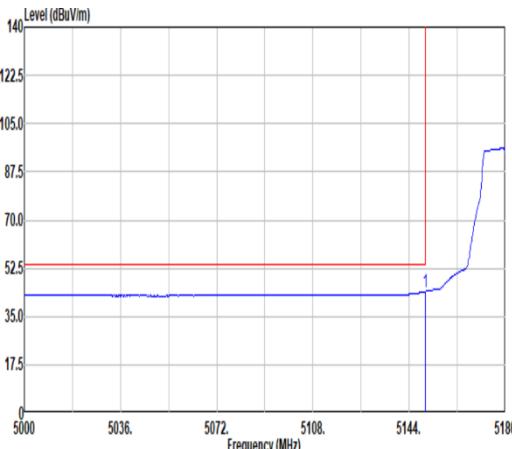
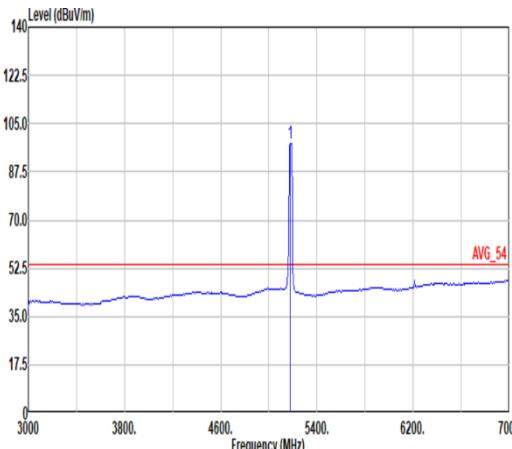


<b>Mode</b>	1	
<b>Mode</b>	Harmonic	
<b>Mode</b>	Simultaneous	
<b>ANT</b>	-	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>38.6G</b> ~ <b>40G</b> <b>Avg.</b>	 Site : 03CH11-HY Condition: AVG_54 1m SHF_1224_240624 Horizontal	 Site : 03CH11-HY Condition: AVG_54 1m SHF_1224_240624 Vertical

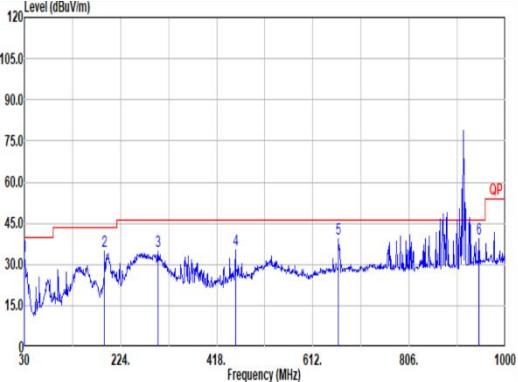
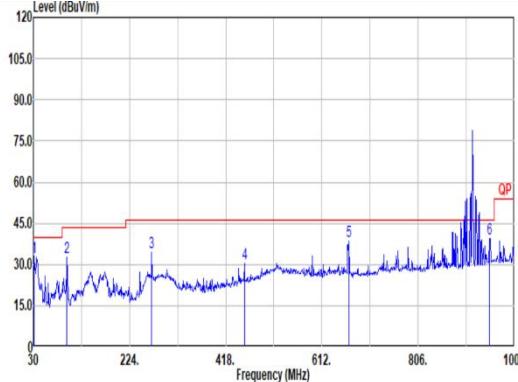
<b>Mode</b>	2																																																																																	
	<b>Band Edge</b>																																																																																	
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																																																	
<b>ANT</b>	0																																																																																	
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																																
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2487.08</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>42.88</td><td>27.87</td><td>7.32</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.08	55.61	74.00	-18.39	42.88	27.87	7.32	33.28	10.03										100 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>100.90</td><td>-----</td><td>-----</td><td>88.46</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.90	-----	-----	88.46	27.62	7.29	33.29	10.03										100 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2487.08	55.61	74.00	-18.39	42.88	27.87	7.32	33.28	10.03																																																																									
									100 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	100.90	-----	-----	88.46	27.62	7.29	33.29	10.03																																																																									
									100 PEAK																																																																									
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2490.39</td><td>44.70</td><td>54.00</td><td>-9.30</td><td>31.93</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.39	44.70	54.00	-9.30	31.93	27.90	7.33	33.28	10.03										100 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>97.77</td><td>-----</td><td>-----</td><td>85.33</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>100 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.77	-----	-----	85.33	27.62	7.29	33.29	10.03										100 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2490.39	44.70	54.00	-9.30	31.93	27.90	7.33	33.28	10.03																																																																									
									100 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2462.00	97.77	-----	-----	85.33	27.62	7.29	33.29	10.03																																																																									
									100 AVERAGE																																																																									

<b>Mode</b>	2																																																													
	<b>Band Edge</b>																																																													
	<b>2400-2483.5_802.11b_CH11_2462MHz</b>																																																													
<b>ANT</b>	0																																																													
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2488.87</td><td>56.16</td><td>74.00</td><td>-17.84</td><td>43.41</td><td>27.89</td><td>7.32</td><td>33.28</td><td>10.03 123 136 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2488.87	56.16	74.00	-17.84	43.41	27.89	7.32	33.28	10.03 123 136 PEAK	 <p>Site : 03CH11-HY Condition: PEAK_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>100.00</td><td>-----</td><td>-----</td><td>87.56</td><td>27.62</td><td>7.29</td><td>33.29</td><td>10.03 123 136 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2462.00	100.00	-----	-----	87.56	27.62	7.29	33.29	10.03 123 136 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	2488.87	56.16	74.00	-17.84	43.41	27.89	7.32	33.28	10.03 123 136 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	2462.00	100.00	-----	-----	87.56	27.62	7.29	33.29	10.03 123 136 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2490.61</td><td>44.38</td><td>54.00</td><td>-9.62</td><td>31.61</td><td>27.90</td><td>7.33</td><td>33.28</td><td>10.03 123 136 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2490.61	44.38	54.00	-9.62	31.61	27.90	7.33	33.28	10.03 123 136 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>2462.00</td><td>96.96</td><td>-----</td><td>-----</td><td>84.50</td><td>27.64</td><td>7.29</td><td>33.29</td><td>10.03 123 136 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	2462.00	96.96	-----	-----	84.50	27.64	7.29	33.29	10.03 123 136 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	2490.61	44.38	54.00	-9.62	31.61	27.90	7.33	33.28	10.03 123 136 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	2462.00	96.96	-----	-----	84.50	27.64	7.29	33.29	10.03 123 136 AVERAGE																																																					

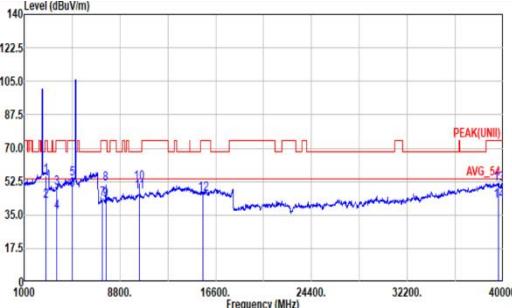
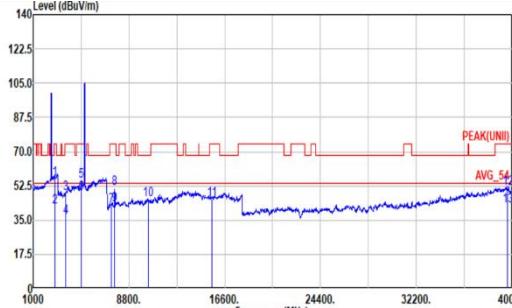
<b>Mode</b>	2																																																													
	<b>Band Edge</b>																																																													
	<b>U-NII-1_5.15-5.25_802.11a Tx_CH36_5180MHz</b>																																																													
<b>ANT</b>	1																																																													
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>5148.32</td><td>54.50</td><td>74.00</td><td>-19.50</td><td>43.24</td><td>33.19</td><td>10.37</td><td>32.87</td><td>0.57 300 70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5148.32	54.50	74.00	-19.50	43.24	33.19	10.37	32.87	0.57 300 70 PEAK	 <p>Site : 03CH11-HY Condition: PEAK(U-NII) 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>105.84</td><td>-----</td><td>-----</td><td>94.70</td><td>33.10</td><td>10.35</td><td>32.87</td><td>0.56 300 70 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5180.00	105.84	-----	-----	94.70	33.10	10.35	32.87	0.56 300 70 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5148.32	54.50	74.00	-19.50	43.24	33.19	10.37	32.87	0.57 300 70 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5180.00	105.84	-----	-----	94.70	33.10	10.35	32.87	0.56 300 70 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>5149.94</td><td>44.82</td><td>54.00</td><td>-9.18</td><td>33.55</td><td>33.20</td><td>10.37</td><td>32.87</td><td>0.57 300 70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5149.94	44.82	54.00	-9.18	33.55	33.20	10.37	32.87	0.57 300 70 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td><td>5180.00</td><td>98.83</td><td>-----</td><td>-----</td><td>87.69</td><td>33.10</td><td>10.35</td><td>32.87</td><td>0.56 300 70 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1	5180.00	98.83	-----	-----	87.69	33.10	10.35	32.87	0.56 300 70 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5149.94	44.82	54.00	-9.18	33.55	33.20	10.37	32.87	0.57 300 70 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																					
1	5180.00	98.83	-----	-----	87.69	33.10	10.35	32.87	0.56 300 70 AVERAGE																																																					

<b>Mode</b>	2																																																													
	<b>Band Edge</b>																																																													
	<b>U-NII-1_5.15-5.25_802.11a Tx_CH36_5180MHz</b>																																																													
<b>ANT</b>	1																																																													
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																												
<b>Peak</b>	 <p>Site : 03CH11-HY Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.40</td> <td>53.62</td> <td>74.00</td> <td>-20.38</td> <td>42.39</td> <td>33.16</td> <td>10.37</td> <td>32.87</td> <td>0.57 257 131 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg		1	5140.40	53.62	74.00	-20.38	42.39	33.16	10.37	32.87	0.57 257 131 PEAK	 <p>Site : 03CH11-HY Condition: PEAK(U-NII) 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.05</td> <td>-----</td> <td>-----</td> <td>93.95</td> <td>33.07</td> <td>10.34</td> <td>32.87</td> <td>0.56 257 131 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg		1	5180.00	105.05	-----	-----	93.95	33.07	10.34	32.87	0.56 257 131 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg																																																						
1	5140.40	53.62	74.00	-20.38	42.39	33.16	10.37	32.87	0.57 257 131 PEAK																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg																																																						
1	5180.00	105.05	-----	-----	93.95	33.07	10.34	32.87	0.56 257 131 PEAK																																																					
 <p>Site : 03CH11-HY Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>44.04</td> <td>54.00</td> <td>-9.96</td> <td>32.77</td> <td>33.28</td> <td>10.37</td> <td>32.87</td> <td>0.57 257 131 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg		1	5149.94	44.04	54.00	-9.96	32.77	33.28	10.37	32.87	0.57 257 131 AVERAGE	 <p>Site : 03CH11-HY Condition: AVG_54 3m 91200_01620_240828 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dBm</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.71</td> <td>-----</td> <td>-----</td> <td>86.62</td> <td>33.05</td> <td>10.34</td> <td>32.86</td> <td>0.56 257 131 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg		1	5180.00	97.71	-----	-----	86.62	33.05	10.34	32.86	0.56 257 131 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg																																																						
1	5149.94	44.04	54.00	-9.96	32.77	33.28	10.37	32.87	0.57 257 131 AVERAGE																																																					
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																					
MHz	dBm	dBm	dB	dB/m	dB	dB	cm	deg																																																						
1	5180.00	97.71	-----	-----	86.62	33.05	10.34	32.86	0.56 257 131 AVERAGE																																																					

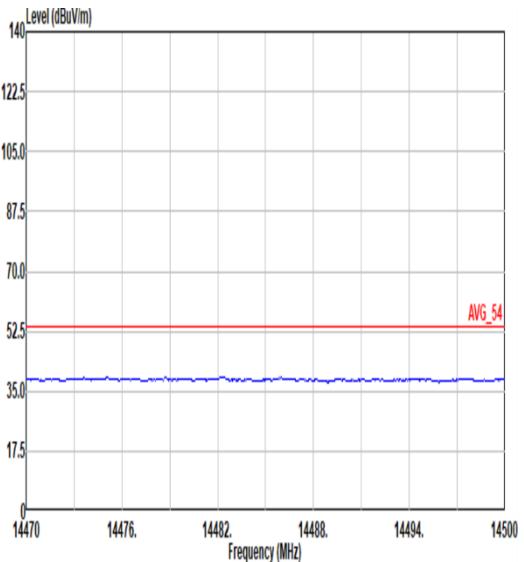
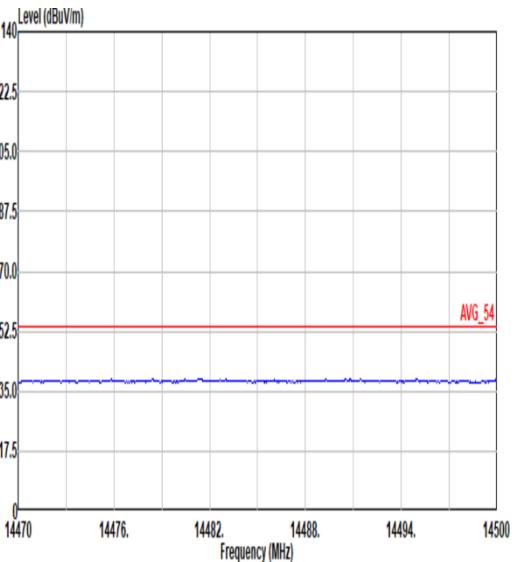
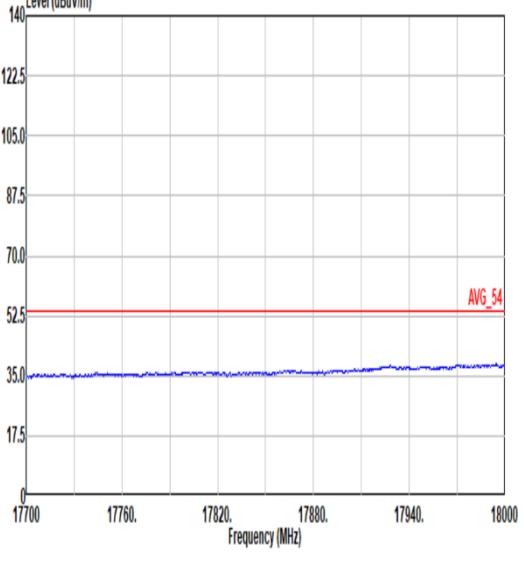
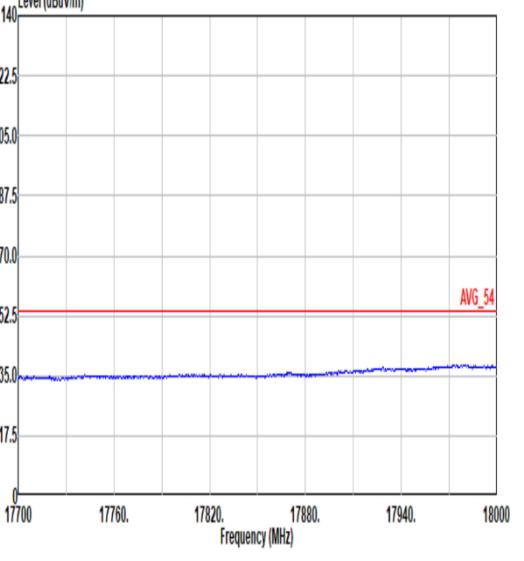


Mode	2																																																																																																																																																																	
	LF																																																																																																																																																																	
	902-928_ S2-LP_CH25_915.4MHz																																																																																																																																																																	
ANT	Sub-G																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																
Peak																																																																																																																																																																		
Qp	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059&amp;01_241127 HORIZONTAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>30.00</td><td>33.15</td><td>40.00</td><td>-6.85</td><td>40.21</td><td>24.51</td><td>0.86</td><td>32.43</td><td>0.00</td></tr><tr><td>2</td><td>191.99</td><td>34.79</td><td>43.50</td><td>-8.71</td><td>49.91</td><td>15.05</td><td>2.03</td><td>32.20</td><td>0.00</td></tr><tr><td>3</td><td>299.66</td><td>35.01</td><td>46.00</td><td>-10.99</td><td>45.26</td><td>19.41</td><td>2.55</td><td>32.21</td><td>0.00</td></tr><tr><td>4</td><td>455.83</td><td>35.16</td><td>46.00</td><td>-10.84</td><td>40.80</td><td>23.42</td><td>3.14</td><td>32.20</td><td>0.00</td></tr><tr><td>5</td><td>663.41</td><td>39.58</td><td>46.00</td><td>-6.42</td><td>41.40</td><td>26.58</td><td>3.76</td><td>32.24</td><td>0.00</td></tr><tr><td>6</td><td>946.65</td><td>39.33</td><td>46.00</td><td>-6.67</td><td>34.97</td><td>30.77</td><td>4.52</td><td>30.93</td><td>0.00</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	30.00	33.15	40.00	-6.85	40.21	24.51	0.86	32.43	0.00	2	191.99	34.79	43.50	-8.71	49.91	15.05	2.03	32.20	0.00	3	299.66	35.01	46.00	-10.99	45.26	19.41	2.55	32.21	0.00	4	455.83	35.16	46.00	-10.84	40.80	23.42	3.14	32.20	0.00	5	663.41	39.58	46.00	-6.42	41.40	26.58	3.76	32.24	0.00	6	946.65	39.33	46.00	-6.67	34.97	30.77	4.52	30.93	0.00	<p>Site : 03CH11-HY Condition: QP 3m BILOG_37059&amp;01_241127 VERTICAL</p> <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>30.97</td><td>32.59</td><td>40.00</td><td>-7.41</td><td>39.92</td><td>24.21</td><td>0.87</td><td>32.41</td><td>0.00</td></tr><tr><td>2</td><td>97.99</td><td>32.48</td><td>43.50</td><td>-11.02</td><td>47.34</td><td>15.96</td><td>1.49</td><td>32.31</td><td>0.00</td></tr><tr><td>3</td><td>268.62</td><td>34.20</td><td>46.00</td><td>-11.88</td><td>44.72</td><td>19.26</td><td>2.42</td><td>32.20</td><td>0.00</td></tr><tr><td>4</td><td>455.83</td><td>30.22</td><td>46.00</td><td>-15.78</td><td>35.86</td><td>23.42</td><td>3.14</td><td>32.20</td><td>0.00</td></tr><tr><td>5</td><td>666.32</td><td>38.69</td><td>46.00</td><td>-7.31</td><td>40.57</td><td>26.58</td><td>3.77</td><td>32.23</td><td>0.00</td></tr><tr><td>6</td><td>950.53</td><td>39.44</td><td>46.00</td><td>-6.56</td><td>34.82</td><td>30.98</td><td>4.53</td><td>30.89</td><td>0.00</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			1	30.97	32.59	40.00	-7.41	39.92	24.21	0.87	32.41	0.00	2	97.99	32.48	43.50	-11.02	47.34	15.96	1.49	32.31	0.00	3	268.62	34.20	46.00	-11.88	44.72	19.26	2.42	32.20	0.00	4	455.83	30.22	46.00	-15.78	35.86	23.42	3.14	32.20	0.00	5	666.32	38.69	46.00	-7.31	40.57	26.58	3.77	32.23	0.00	6	950.53	39.44	46.00	-6.56	34.82	30.98	4.53	30.89	0.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																											
1	30.00	33.15	40.00	-6.85	40.21	24.51	0.86	32.43	0.00																																																																																																																																																									
2	191.99	34.79	43.50	-8.71	49.91	15.05	2.03	32.20	0.00																																																																																																																																																									
3	299.66	35.01	46.00	-10.99	45.26	19.41	2.55	32.21	0.00																																																																																																																																																									
4	455.83	35.16	46.00	-10.84	40.80	23.42	3.14	32.20	0.00																																																																																																																																																									
5	663.41	39.58	46.00	-6.42	41.40	26.58	3.76	32.24	0.00																																																																																																																																																									
6	946.65	39.33	46.00	-6.67	34.97	30.77	4.52	30.93	0.00																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																											
1	30.97	32.59	40.00	-7.41	39.92	24.21	0.87	32.41	0.00																																																																																																																																																									
2	97.99	32.48	43.50	-11.02	47.34	15.96	1.49	32.31	0.00																																																																																																																																																									
3	268.62	34.20	46.00	-11.88	44.72	19.26	2.42	32.20	0.00																																																																																																																																																									
4	455.83	30.22	46.00	-15.78	35.86	23.42	3.14	32.20	0.00																																																																																																																																																									
5	666.32	38.69	46.00	-7.31	40.57	26.58	3.77	32.23	0.00																																																																																																																																																									
6	950.53	39.44	46.00	-6.56	34.82	30.98	4.53	30.89	0.00																																																																																																																																																									

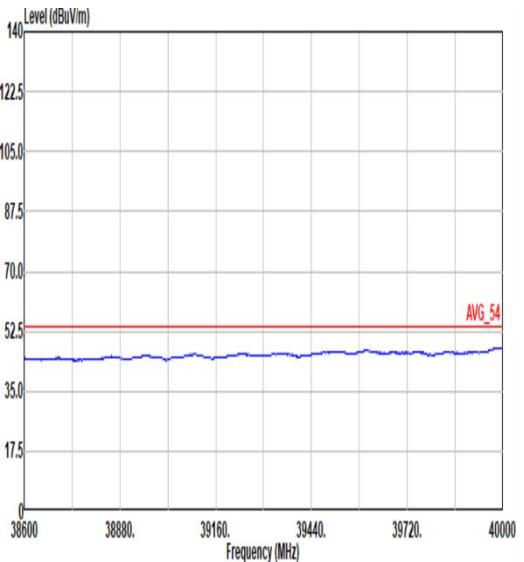
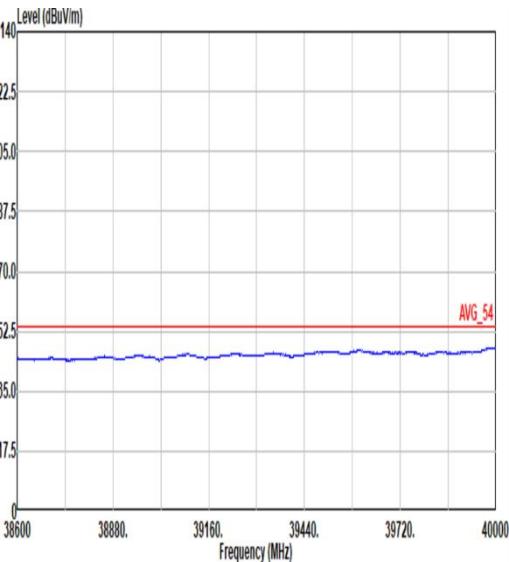


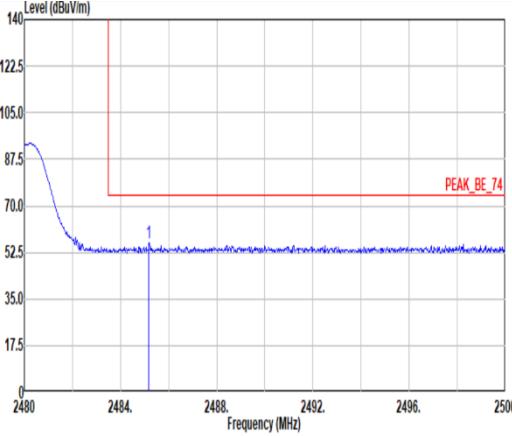
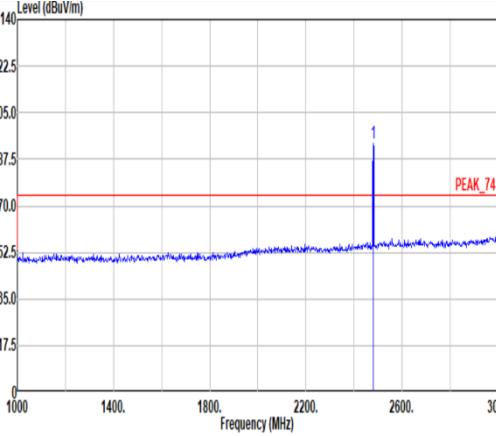
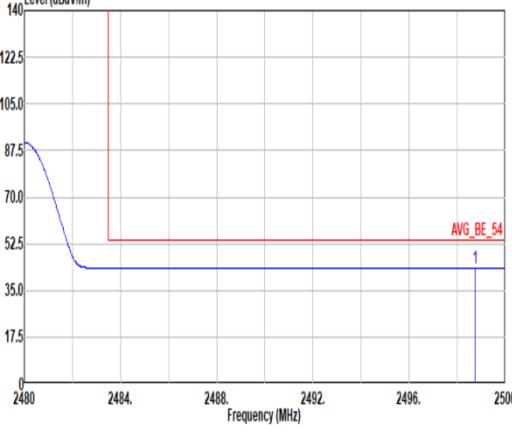
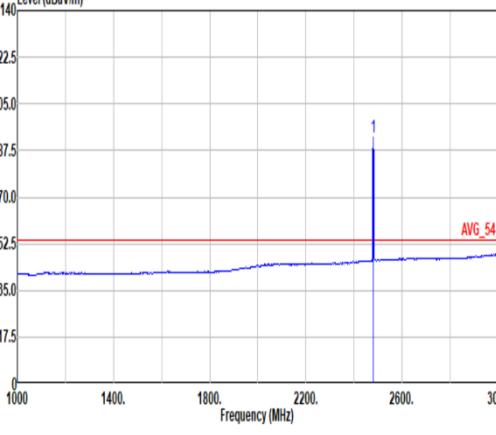
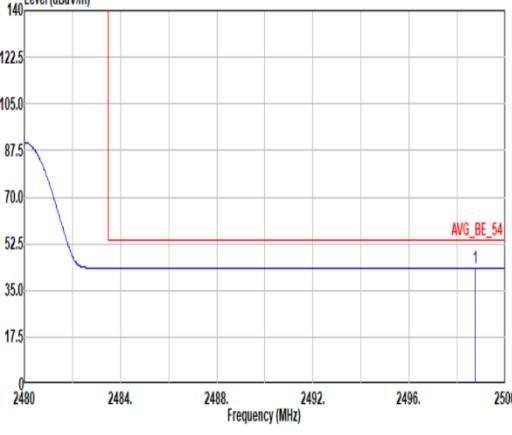
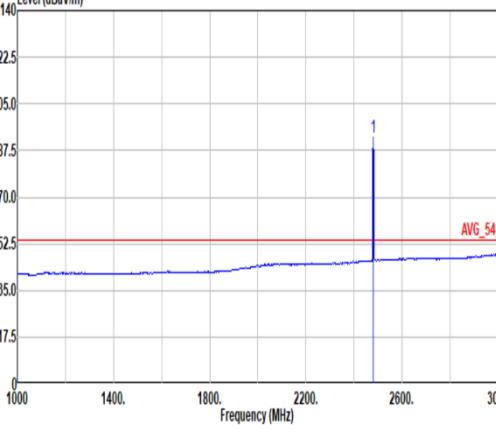
Mode	2																																																																																																																																																																																																																																																																																																																																																						
	Harmonic																																																																																																																																																																																																																																																																																																																																																						
	Simultaneous																																																																																																																																																																																																																																																																																																																																																						
ANT	-																																																																																																																																																																																																																																																																																																																																																						
Pol.	<b>Horizontal</b> 																																																																																																																																																																																																																																																																																																																																																						
Peak																																																																																																																																																																																																																																																																																																																																																							
Avg	<p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_1224_240624 HORIZONTAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>2746.20</td><td>55.71</td><td>74.00</td><td>-18.29</td><td>42.42</td><td>28.16</td><td>7.66</td><td>33.30</td><td>10.02</td><td>-- PEAK</td></tr> <tr><td>2</td><td>2746.20</td><td>42.06</td><td>54.00</td><td>-11.94</td><td>28.77</td><td>28.16</td><td>7.66</td><td>33.30</td><td>10.02</td><td>-- AVERAGE</td></tr> <tr><td>3</td><td>3661.40</td><td>48.89</td><td>74.00</td><td>-25.11</td><td>42.59</td><td>29.70</td><td>8.81</td><td>33.20</td><td>0.99</td><td>-- PEAK</td></tr> <tr><td>4</td><td>3661.40</td><td>36.50</td><td>54.00</td><td>-17.50</td><td>30.20</td><td>29.70</td><td>8.81</td><td>33.20</td><td>0.99</td><td>-- AVERAGE</td></tr> <tr><td>5</td><td>4924.00</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>43.24</td><td>32.90</td><td>10.24</td><td>32.89</td><td>0.56</td><td>218 337 PEAK</td></tr> <tr><td>6</td><td>4924.00</td><td>48.31</td><td>54.00</td><td>-5.69</td><td>37.50</td><td>32.90</td><td>10.24</td><td>32.89</td><td>0.56</td><td>218 337 AVERAGE</td></tr> <tr><td>7</td><td>7386.00</td><td>43.51</td><td>74.00</td><td>-30.49</td><td>59.46</td><td>36.48</td><td>12.76</td><td>65.80</td><td>0.67</td><td>-- Peak</td></tr> <tr><td>8</td><td>7649.00</td><td>51.33</td><td>74.00</td><td>-22.67</td><td>67.27</td><td>36.20</td><td>13.12</td><td>66.00</td><td>0.80</td><td>100 134 Peak</td></tr> <tr><td>9</td><td>7649.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>58.61</td><td>36.20</td><td>13.12</td><td>66.00</td><td>0.80</td><td>100 134 Average</td></tr> <tr><td>10</td><td>18360.00</td><td>51.60</td><td>68.20</td><td>-16.60</td><td>64.34</td><td>38.60</td><td>15.62</td><td>67.28</td><td>0.32</td><td>196 44 Peak</td></tr> <tr><td>11</td><td>18360.00</td><td>47.10</td><td>54.00</td><td>-6.90</td><td>59.84</td><td>38.60</td><td>15.62</td><td>67.28</td><td>0.32</td><td>196 44 Average</td></tr> <tr><td>12</td><td>15540.00</td><td>45.88</td><td>74.00</td><td>-28.12</td><td>55.03</td><td>38.10</td><td>19.71</td><td>67.29</td><td>0.33</td><td>-- Peak</td></tr> <tr><td>13</td><td>39607.72</td><td>51.17</td><td>74.00</td><td>-22.83</td><td>41.02</td><td>45.51</td><td>37.36</td><td>63.18</td><td>-9.54</td><td>-- PEAK</td></tr> <tr><td>14</td><td>39607.72</td><td>42.06</td><td>54.00</td><td>-11.92</td><td>31.93</td><td>45.51</td><td>37.36</td><td>63.18</td><td>-9.54</td><td>-- AVERAGE</td></tr> </tbody> </table> <p>Site : 03CH11-HY Condition: PEAK(UNII) 1m SHF_1224_240624 VERTICAL</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>2746.20</td><td>55.82</td><td>74.00</td><td>-18.18</td><td>42.53</td><td>28.16</td><td>7.66</td><td>33.30</td><td>10.02</td><td>-- PEAK</td></tr> <tr><td>2</td><td>2746.20</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>28.67</td><td>28.16</td><td>7.66</td><td>33.30</td><td>10.02</td><td>-- AVERAGE</td></tr> <tr><td>3</td><td>3661.40</td><td>48.61</td><td>74.00</td><td>-25.39</td><td>42.31</td><td>29.70</td><td>8.81</td><td>33.20</td><td>0.99</td><td>-- PEAK</td></tr> <tr><td>4</td><td>3661.40</td><td>36.40</td><td>54.00</td><td>-17.60</td><td>30.19</td><td>29.70</td><td>8.81</td><td>33.20</td><td>0.99</td><td>-- AVERAGE</td></tr> <tr><td>5</td><td>4924.00</td><td>54.72</td><td>74.00</td><td>-19.28</td><td>43.91</td><td>32.90</td><td>10.24</td><td>32.89</td><td>0.56</td><td>286 13 PEAK</td></tr> <tr><td>6</td><td>4924.00</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>37.90</td><td>32.90</td><td>10.24</td><td>32.89</td><td>0.56</td><td>286 13 AVERAGE</td></tr> <tr><td>7</td><td>7386.00</td><td>42.41</td><td>74.00</td><td>-31.59</td><td>58.36</td><td>36.48</td><td>12.76</td><td>65.86</td><td>0.67</td><td>-- Peak</td></tr> <tr><td>8</td><td>7638.00</td><td>51.11</td><td>74.00</td><td>-22.89</td><td>67.00</td><td>36.18</td><td>13.11</td><td>66.06</td><td>0.80</td><td>187 81 Peak</td></tr> <tr><td>9</td><td>7638.00</td><td>43.02</td><td>54.00</td><td>-10.50</td><td>58.99</td><td>36.18</td><td>13.11</td><td>66.06</td><td>0.80</td><td>187 81 Average</td></tr> <tr><td>10</td><td>18360.00</td><td>45.44</td><td>68.20</td><td>-22.76</td><td>58.18</td><td>38.60</td><td>15.62</td><td>67.28</td><td>0.32</td><td>-- Peak</td></tr> <tr><td>11</td><td>15540.00</td><td>45.43</td><td>74.00</td><td>-28.57</td><td>54.58</td><td>38.10</td><td>19.71</td><td>67.29</td><td>0.33</td><td>-- Peak</td></tr> <tr><td>12</td><td>39600.82</td><td>51.42</td><td>74.00</td><td>-22.58</td><td>41.17</td><td>45.59</td><td>37.36</td><td>63.16</td><td>-9.54</td><td>-- PEAK</td></tr> <tr><td>13</td><td>39600.82</td><td>42.31</td><td>54.00</td><td>-11.69</td><td>32.06</td><td>45.59</td><td>37.36</td><td>63.16</td><td>-9.54</td><td>-- AVERAGE</td></tr> </tbody> </table>		Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2746.20	55.71	74.00	-18.29	42.42	28.16	7.66	33.30	10.02	-- PEAK	2	2746.20	42.06	54.00	-11.94	28.77	28.16	7.66	33.30	10.02	-- AVERAGE	3	3661.40	48.89	74.00	-25.11	42.59	29.70	8.81	33.20	0.99	-- PEAK	4	3661.40	36.50	54.00	-17.50	30.20	29.70	8.81	33.20	0.99	-- AVERAGE	5	4924.00	54.05	74.00	-19.95	43.24	32.90	10.24	32.89	0.56	218 337 PEAK	6	4924.00	48.31	54.00	-5.69	37.50	32.90	10.24	32.89	0.56	218 337 AVERAGE	7	7386.00	43.51	74.00	-30.49	59.46	36.48	12.76	65.80	0.67	-- Peak	8	7649.00	51.33	74.00	-22.67	67.27	36.20	13.12	66.00	0.80	100 134 Peak	9	7649.00	42.67	54.00	-11.33	58.61	36.20	13.12	66.00	0.80	100 134 Average	10	18360.00	51.60	68.20	-16.60	64.34	38.60	15.62	67.28	0.32	196 44 Peak	11	18360.00	47.10	54.00	-6.90	59.84	38.60	15.62	67.28	0.32	196 44 Average	12	15540.00	45.88	74.00	-28.12	55.03	38.10	19.71	67.29	0.33	-- Peak	13	39607.72	51.17	74.00	-22.83	41.02	45.51	37.36	63.18	-9.54	-- PEAK	14	39607.72	42.06	54.00	-11.92	31.93	45.51	37.36	63.18	-9.54	-- AVERAGE	Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2746.20	55.82	74.00	-18.18	42.53	28.16	7.66	33.30	10.02	-- PEAK	2	2746.20	41.96	54.00	-12.04	28.67	28.16	7.66	33.30	10.02	-- AVERAGE	3	3661.40	48.61	74.00	-25.39	42.31	29.70	8.81	33.20	0.99	-- PEAK	4	3661.40	36.40	54.00	-17.60	30.19	29.70	8.81	33.20	0.99	-- AVERAGE	5	4924.00	54.72	74.00	-19.28	43.91	32.90	10.24	32.89	0.56	286 13 PEAK	6	4924.00	48.71	54.00	-5.29	37.90	32.90	10.24	32.89	0.56	286 13 AVERAGE	7	7386.00	42.41	74.00	-31.59	58.36	36.48	12.76	65.86	0.67	-- Peak	8	7638.00	51.11	74.00	-22.89	67.00	36.18	13.11	66.06	0.80	187 81 Peak	9	7638.00	43.02	54.00	-10.50	58.99	36.18	13.11	66.06	0.80	187 81 Average	10	18360.00	45.44	68.20	-22.76	58.18	38.60	15.62	67.28	0.32	-- Peak	11	15540.00	45.43	74.00	-28.57	54.58	38.10	19.71	67.29	0.33	-- Peak	12	39600.82	51.42	74.00	-22.58	41.17	45.59	37.36	63.16	-9.54	-- PEAK	13	39600.82	42.31	54.00	-11.69	32.06	45.59	37.36	63.16	-9.54	-- AVERAGE
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																													
1	2746.20	55.71	74.00	-18.29	42.42	28.16	7.66	33.30	10.02	-- PEAK																																																																																																																																																																																																																																																																																																																																													
2	2746.20	42.06	54.00	-11.94	28.77	28.16	7.66	33.30	10.02	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													
3	3661.40	48.89	74.00	-25.11	42.59	29.70	8.81	33.20	0.99	-- PEAK																																																																																																																																																																																																																																																																																																																																													
4	3661.40	36.50	54.00	-17.50	30.20	29.70	8.81	33.20	0.99	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													
5	4924.00	54.05	74.00	-19.95	43.24	32.90	10.24	32.89	0.56	218 337 PEAK																																																																																																																																																																																																																																																																																																																																													
6	4924.00	48.31	54.00	-5.69	37.50	32.90	10.24	32.89	0.56	218 337 AVERAGE																																																																																																																																																																																																																																																																																																																																													
7	7386.00	43.51	74.00	-30.49	59.46	36.48	12.76	65.80	0.67	-- Peak																																																																																																																																																																																																																																																																																																																																													
8	7649.00	51.33	74.00	-22.67	67.27	36.20	13.12	66.00	0.80	100 134 Peak																																																																																																																																																																																																																																																																																																																																													
9	7649.00	42.67	54.00	-11.33	58.61	36.20	13.12	66.00	0.80	100 134 Average																																																																																																																																																																																																																																																																																																																																													
10	18360.00	51.60	68.20	-16.60	64.34	38.60	15.62	67.28	0.32	196 44 Peak																																																																																																																																																																																																																																																																																																																																													
11	18360.00	47.10	54.00	-6.90	59.84	38.60	15.62	67.28	0.32	196 44 Average																																																																																																																																																																																																																																																																																																																																													
12	15540.00	45.88	74.00	-28.12	55.03	38.10	19.71	67.29	0.33	-- Peak																																																																																																																																																																																																																																																																																																																																													
13	39607.72	51.17	74.00	-22.83	41.02	45.51	37.36	63.18	-9.54	-- PEAK																																																																																																																																																																																																																																																																																																																																													
14	39607.72	42.06	54.00	-11.92	31.93	45.51	37.36	63.18	-9.54	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													
Freq	Level	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																													
1	2746.20	55.82	74.00	-18.18	42.53	28.16	7.66	33.30	10.02	-- PEAK																																																																																																																																																																																																																																																																																																																																													
2	2746.20	41.96	54.00	-12.04	28.67	28.16	7.66	33.30	10.02	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													
3	3661.40	48.61	74.00	-25.39	42.31	29.70	8.81	33.20	0.99	-- PEAK																																																																																																																																																																																																																																																																																																																																													
4	3661.40	36.40	54.00	-17.60	30.19	29.70	8.81	33.20	0.99	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													
5	4924.00	54.72	74.00	-19.28	43.91	32.90	10.24	32.89	0.56	286 13 PEAK																																																																																																																																																																																																																																																																																																																																													
6	4924.00	48.71	54.00	-5.29	37.90	32.90	10.24	32.89	0.56	286 13 AVERAGE																																																																																																																																																																																																																																																																																																																																													
7	7386.00	42.41	74.00	-31.59	58.36	36.48	12.76	65.86	0.67	-- Peak																																																																																																																																																																																																																																																																																																																																													
8	7638.00	51.11	74.00	-22.89	67.00	36.18	13.11	66.06	0.80	187 81 Peak																																																																																																																																																																																																																																																																																																																																													
9	7638.00	43.02	54.00	-10.50	58.99	36.18	13.11	66.06	0.80	187 81 Average																																																																																																																																																																																																																																																																																																																																													
10	18360.00	45.44	68.20	-22.76	58.18	38.60	15.62	67.28	0.32	-- Peak																																																																																																																																																																																																																																																																																																																																													
11	15540.00	45.43	74.00	-28.57	54.58	38.10	19.71	67.29	0.33	-- Peak																																																																																																																																																																																																																																																																																																																																													
12	39600.82	51.42	74.00	-22.58	41.17	45.59	37.36	63.16	-9.54	-- PEAK																																																																																																																																																																																																																																																																																																																																													
13	39600.82	42.31	54.00	-11.69	32.06	45.59	37.36	63.16	-9.54	-- AVERAGE																																																																																																																																																																																																																																																																																																																																													

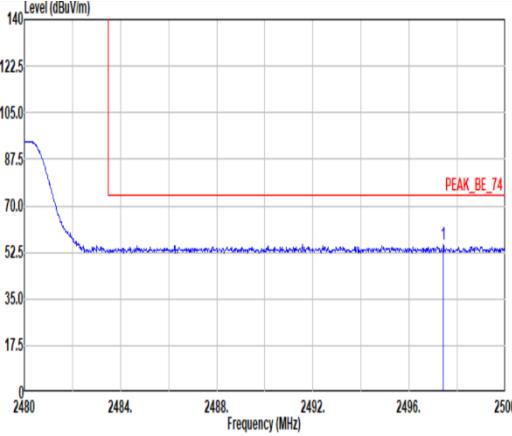
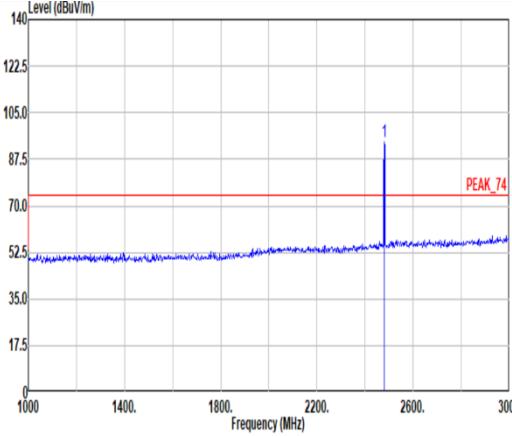
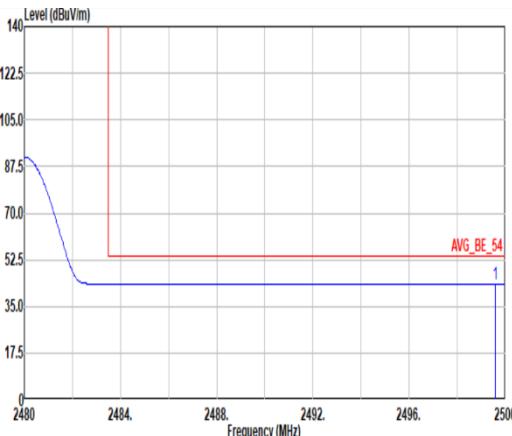
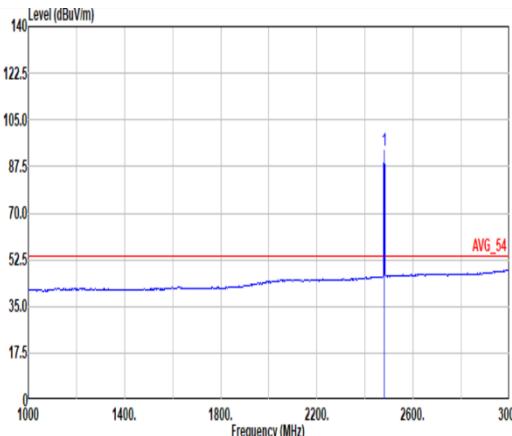


Mode	2	
Mode	Harmonic	
Mode	Simultaneous	
ANT	-	
Pol.	Horizontal	Vertical
14.47G ~ 14.5G Avg.	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL
17.7G ~ 18G Avg.	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 HORIZONTAL	 Site : 03CH11-HY Condition: AVG_54 3m 91280_01620_240828 VERTICAL



<b>Mode</b>	2	
<b>Mode</b>	Harmonic	
<b>Mode</b>	Simultaneous	
<b>ANT</b>	-	
<b>Pol.</b>	<b>Horizontal</b>	<b>Vertical</b>
<b>38.6G</b> ~ <b>40G</b> <b>Avg.</b>	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_1224_240624 Horizontal</p>	 <p>Site : 03CH11-HY Condition: AVG_54 1m SHF_1224_240624 Vertical</p>

<b>Mode</b>	3																																																															
	<b>Band Edge</b>																																																															
	<b>2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz</b>																																																															
<b>ANT</b>	0																																																															
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																														
<b>Peak</b>	 <p>Site : 03CH11-HY  Condition: PEAK_BE_74 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2485.18</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>43.20</td><td>27.85</td><td>7.32</td><td>33.28</td><td>10.03</td><td>400 146 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2485.18	55.91	74.00	-18.09	43.20	27.85	7.32	33.28	10.03	400 146 PEAK	 <p>Site : 03CH11-HY  Condition: PEAK_74 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>93.52</td><td>-----</td><td>-----</td><td>80.87</td><td>27.80</td><td>7.31</td><td>33.28</td><td>10.03</td><td>400 146 PEAK</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2480.00	93.52	-----	-----	80.87	27.80	7.31	33.28	10.03	400 146 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2485.18	55.91	74.00	-18.09	43.20	27.85	7.32	33.28	10.03	400 146 PEAK																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2480.00	93.52	-----	-----	80.87	27.80	7.31	33.28	10.03	400 146 PEAK																																																						
 <p>Site : 03CH11-HY  Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2498.74</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>30.76</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>400 146 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2498.74	43.55	54.00	-10.45	30.76	27.90	7.34	33.27	10.03	400 146 AVERAGE	 <p>Site : 03CH11-HY  Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>92.70</td><td>-----</td><td>-----</td><td>80.05</td><td>27.80</td><td>7.31</td><td>33.28</td><td>10.03</td><td>400 146 AVERAGE</td></tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2480.00	92.70	-----	-----	80.05	27.80	7.31	33.28	10.03	400 146 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2498.74	43.55	54.00	-10.45	30.76	27.90	7.34	33.27	10.03	400 146 AVERAGE																																																						
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2480.00	92.70	-----	-----	80.05	27.80	7.31	33.28	10.03	400 146 AVERAGE																																																						
<b>Avg</b>	 <p>Site : 03CH11-HY  Condition: AVG_BE_54 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2498.74</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>30.76</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td><td>400 146 AVERAGE</td></tr> </tbody> </table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2498.74	43.55	54.00	-10.45	30.76	27.90	7.34	33.27	10.03	400 146 AVERAGE																															
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2498.74	43.55	54.00	-10.45	30.76	27.90	7.34	33.27	10.03	400 146 AVERAGE																																																						
 <p>Site : 03CH11-HY  Condition: AVG_54 3m 91200_01620_240828 HORIZONTAL  : RBW:1000.000kHz VBW:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th></tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>92.70</td><td>-----</td><td>-----</td><td>80.05</td><td>27.80</td><td>7.31</td><td>33.28</td><td>10.03</td><td>400 146 AVERAGE</td></tr> </tbody> </table>		Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2480.00	92.70	-----	-----	80.05	27.80	7.31	33.28	10.03	400 146 AVERAGE																																
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																								
1	2480.00	92.70	-----	-----	80.05	27.80	7.31	33.28	10.03	400 146 AVERAGE																																																						

<b>Mode</b>	3																																																																																	
	<b>Band Edge</b>																																																																																	
	<b>2400-2483.5_Bluetooth-LE_GSFK_CH39_2480MHz</b>																																																																																	
<b>ANT</b>	0																																																																																	
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																																
<b>Peak</b>	 <p>Site : 03CH11-HY  Condition: PEAK_BE_74 3m 91200_01620_240828 VERTICAL  : RBW:1000.000kHz VBN:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2497.42</td><td>55.28</td><td>74.00</td><td>-18.72</td><td>42.49</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>396 157 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2497.42	55.28	74.00	-18.72	42.49	27.90	7.34	33.27	10.03										396 157 PEAK	 <p>Site : 03CH11-HY  Condition: PEAK_74 3m 91200_01620_240828 VERTICAL  : RBW:1000.000kHz VBN:3000.000kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>94.10</td><td>-----</td><td>-----</td><td>81.45</td><td>27.80</td><td>7.31</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>396 157 PEAK</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2480.00	94.10	-----	-----	81.45	27.80	7.31	33.28	10.03										396 157 PEAK
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2497.42	55.28	74.00	-18.72	42.49	27.90	7.34	33.27	10.03																																																																									
									396 157 PEAK																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2480.00	94.10	-----	-----	81.45	27.80	7.31	33.28	10.03																																																																									
									396 157 PEAK																																																																									
 <p>Site : 03CH11-HY  Condition: AVG_BE_54 3m 91200_01620_240828 VERTICAL  : RBW:1000.000kHz VBN:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2499.58</td><td>43.56</td><td>54.00</td><td>-10.44</td><td>30.77</td><td>27.90</td><td>7.34</td><td>33.27</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>396 157 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2499.58	43.56	54.00	-10.44	30.77	27.90	7.34	33.27	10.03										396 157 AVERAGE	 <p>Site : 03CH11-HY  Condition: AVG_54 3m 91200_01620_240828 VERTICAL  : RBW:1000.000kHz VBN:0.010kHz SW:Auto</p> <table border="1"> <thead> <tr> <th>Freq</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th> </tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th> </tr> </thead> <tbody> <tr> <td>1</td><td>2480.00</td><td>93.28</td><td>-----</td><td>-----</td><td>80.63</td><td>27.80</td><td>7.31</td><td>33.28</td><td>10.03</td> </tr> <tr> <td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>396 157 AVERAGE</td> </tr> </tbody> </table>	Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		1	2480.00	93.28	-----	-----	80.63	27.80	7.31	33.28	10.03										396 157 AVERAGE	
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2499.58	43.56	54.00	-10.44	30.77	27.90	7.34	33.27	10.03																																																																									
									396 157 AVERAGE																																																																									
Freq	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2480.00	93.28	-----	-----	80.63	27.80	7.31	33.28	10.03																																																																									
									396 157 AVERAGE																																																																									