

**RF-EXPOSURE REPORT**

FCC 47 CFR Part 2.1093

**RF-Exposure evaluation of portable equipment**

<b>Report Reference No</b>	G0M-2306-2102-TFC093PE-V03
<b>Testing Laboratory</b>	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	  A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Test Firm Designation Number: DE0008
<b>Applicant</b>	Bridgestone Mobility Solutions B.V.
<b>Address</b>	Beethovenstraat 503 1083 HK Amsterdam Netherlands
<b>Test Specification</b>	According to FCC rules
Standard	FCC 47 CFR 2.1093
Non-Standard Test Method	None
<b>Equipment under Test (EUT):</b>	
Product Description	Telematic Accessory with Display + RFID + Bluetooth
Model(s)	PROI
Additional Model(s)	None
Brand Name(s)	webfleet PRO i
Hardware Version(s)	46/2022
Software Version(s)	0.0.25
FCC ID	2AGPAPROI
<b>Test Result</b>	<b>PASSED</b>

<b>Possible test case verdicts:</b>	
required by standard but not tested	N/T
not required by standard	N/R
test object does meet the requirement	P(PASS)
test object does not meet the requirement	F(FAIL)
<b>Testing:</b>	
Test Lab Temperature	20 °C - 30 °C
Test Lab Humidity	25 % - 55 %
Date of performance	2023-11-15
Date of receipt of test item	2023-07-11
<b>Report:</b>	
Compiled by	Burkhard Pudell
Created by (+ signature)	Burkhard Pudell
	
Approved by (+ signature) (Test Lab Engineer)	Radwan Jaafar
	
Date of Issue	2023-11-28
Total number of pages	16
<b>General Remarks:</b>	
<p>The test results presented in this report relate only to the object tested.</p> <p>The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.</p> <p>This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.</p>	
<b>Additional Comments:</b>	
None	

**VERSION HISTORY**

Version History			
Version	Issue Date	Remarks	Revised By
01	2023-10-18	Initial Release	--
02	2023-11-15	Replaced document: G0M-2306-2102-TFC247BT-V01 Replaced by: G0M-2306-2102-TFC247BT-V02  Replaced document: G0M-2306-2102-TFCAUT-V01 Replaced by: G0M-2306-2102-TFCAUT-V02  Reason: Correction of antenna gain by antenna pattern measurement	B. Pudell
03	2023-11-28	Replaced document: G0M-2306-2102-TFC247BT-V02 Replaced by: G0M-2306-2102-TFC247BT-V03  Reason: Remove ISED part from document	B. Pudell

**ABBREVIATIONS AND ACRONYMS**

<b>Acronyms</b>	
Acronym	Description
EIRP	Equivalent Isotropic Radiated Power
ERP	Effective Radiated Power
EUT	Equipment Under Test
LPE	Low Power Exclusion

## REPORT INDEX

<b>1</b>	<b>Equipment (Test Item) Under Test.....</b>	<b>6</b>
1.1	Reference Documents.....	7
1.2	Standalone radiation sources.....	7
1.3	Concurrent Sources .....	7
<b>2</b>	<b>Radiated Field Measurement.....</b>	<b>8</b>
2.1	Test Conditions and Results – Electric and magnetic field strength .....	8
<b>3</b>	<b>Result Summary.....</b>	<b>10</b>
<b>4</b>	<b>RF-Exposure classification .....</b>	<b>11</b>
<b>5</b>	<b>RF-Exposure limits and exclusion thresholds .....</b>	<b>12</b>
5.1	SAR limits.....	12
5.2	SAR standalone test exclusion threshold .....	12
5.3	SAR concurrent test exclusion threshold.....	13
<b>6</b>	<b>RF-Exposure Evaluation .....</b>	<b>14</b>
<b>7</b>	<b>Single Source Evaluation Results - FCC .....</b>	<b>15</b>
<b>8</b>	<b>Concurrent Evaluation Results - FCC.....</b>	<b>16</b>

## 1 Equipment (Test Item) Under Test

Description	Telematic Accessory with Display + RFID + Bluetooth
Model	PROI
Additional Model(s)	None
Brand Name(s)	webfleet PRO i
Serial Number(s)	NZ1253W00059; NZ1253W00012
Hardware Version(s)	46/2022
Software Version(s)	0.0.25
FCC ID	2AGPAPROI
Contains FCC ID	None
Equipment type	End Product
Environment	General public
Use case	Body worn

## 1.1 Reference Documents

Document Type	Document No.	Issued by	Date
Testreport	G0M-2306-2102-TFC247BT-V02	Eurofins Product Service GmbH	2023-11-15
Testreport	G0M-2306-2102-TFCAUT-V02	Eurofins Product Service GmbH	2023-11-15
Testreport	G0M-2306-2102-TFC225RI-V01	Eurofins Product Service GmbH	2023-08-09

## 1.2 Standalone radiation sources

Standalone radiation sources					
Mode	Operating Frequency [MHz]	Maximum conducted power [dBm]	Maximum radiated power [dBm EIRP]	Maximum duty cycle [%]	Antenna distance to body [mm]
Bluetooth	2402	1.051	3.681	78	5.0
	2441	2.230	4.860	78	5.0
	2480	2.467	5.097	78	5.0
RFID 13.56 MHz	13.56	-44.5	-42.3	100	5.0
RFID 125 kHz	0.125	-28.9	-31.1	100	5.0
Comment: --					

## 1.3 Concurrent Sources

Concurrent operating conditions
Bluetooth + RFID 13.56 MHz
Comment: --


## 2 Radiated Field Measurement

### 2.1 Test Conditions and Results – Electric and magnetic field strength

#### 2.1.1 Information

Test Information	
Measurement Method	Radiated only
Operator	Azamat Ibraimov
Date	2023-09-10

#### 2.1.2 Setup

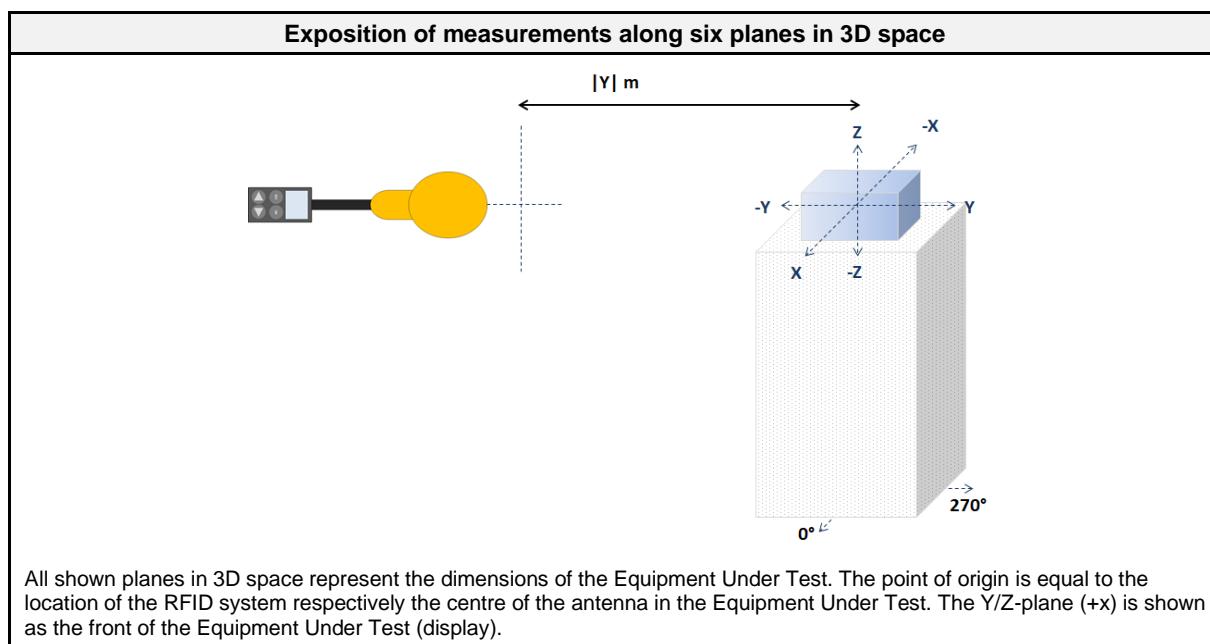

#### 2.1.3 Equipment

Test Equipment					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Anechoic chamber	Frankonia	AC2	EF01616	2022-10	2023-10
Compact field analyzer	Narda Safety Test Solutions	EHP-50F	EF01830	2022-11	2023-11
EM Radiation Monitor	Narda Safety Test Solutions	EMR-20	EF00058	2021-12	2023-12

## 2.1.4 Procedure

<b>Test Procedure</b>
1. EUT transmitter is activated in test mode under normal conditions.
2. The perimeter of the EUT is scanned with an electric and magnetic field probe at a fixed distance.
3. The electric and magnetic field strength is measured.
4. The maximum field strength values are recorded.

## 2.1.5 Results

<b>Test Results</b>				
Measurement position	Mode	Distance x or y or z [m]	Max. electric field strength [V/m]	Max. magnetic field strength [A/m]
X,Y,Z plane	RFID 125 kHz	0.005	1.24	0.0232

### 3 Result Summary

Standalone sources - FCC KDB 447498				
Product Standard Reference	Requirement	Reference Method	Mode	Verdict
KDB 447498	SAR Test Exclusion	KDB 447498 4.3.1	Bluetooth	PASS
KDB 447498	SAR Test Exclusion	KDB 447498 4.3.1	RFID 13.56 MHz	PASS
KDB 447498	SAR Test Exclusion	KDB 447498 4.3.1	RFID 125 kHz	PASS
Comment: --				

Concurrent operational modes - FCC KDB 447498				
Product Standard Reference	Requirement	Reference Method	Mode	Verdict
KDB 447498	SAR Test Exclusion	KDB 447498 4.3.2	Bluetooth + RFID 13.56 MHz	PASS
Comment: --				

#### 4 RF-Exposure classification

RF-Exposure Categories	
Fixed	A fixed device is defined as a device physically secured at one fixed location and cannot be easily re-located.
Mobile	A mobile device is defined as a transmitting device designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimeters is normally maintained between the transmitter's radiating structure(s) and the body of the user or nearby persons.
Portable	A portable device is defined as a transmitting device designed to be used so that the radiating structure(s) of the device is/are within 20 centimeters of the body of the user.

RF-Exposure Categories	
Occupational / Controlled	Limits apply in situations in which persons are exposed as a consequence of their employment provided those persons are fully aware of the potential for exposure and can exercise control over their exposure. Limits for occupational/controlled exposure also apply in situations when an individual is transient through a location where occupational/controlled limits apply provided he or she is made aware of the potential for exposure.
General population / Uncontrolled	Exposures apply in situations in which the general public may be exposed, or in which persons that are exposed as a consequence of their employment may not be fully aware of the potential for exposure or cannot exercise control over their exposure.

## 5 RF-Exposure limits and exclusion thresholds

### 5.1 SAR limits

SAR Limits		
Type	Occupational SAR values [W / kg]	General population SAR values [W / kg]
Whole-body SAR averaging mass = entire body	0.4	0.08
Partial-body Localized Head, Neck and Trunk SAR averaging mass = 1g	8.0	1.6
Hands, Wrists, Feet and Ankles Localized Limbs SAR averaging mass = 10g	20.0	4

### 5.2 SAR standalone test exclusion threshold

#### SAR test exclusion power acc. to FCC KDB 447498 D01 – Standalone operation

Unless specifically required by the published RF exposure KDB procedures, standalone 1-g head or body and 10-g extremity SAR evaluation for general population exposure conditions, by measurement or numerical simulation, is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied. These test exclusion conditions are based on source-based time-averaged maximum conducted output power of the RF channel requiring evaluation, adjusted for tune-up tolerance, and the minimum test separation distance required for the exposure conditions.

The minimum test separation distance is determined by the smallest distance from the antenna and radiating structures or outer surface of the device, according to the host form factor, exposure conditions and platform requirements, to any part of the body or extremity of a user or bystander

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

a) For 100 MHz to 6 GHz and test separation distances  $\leq 50$  mm

$$\frac{\text{max. power of channel [mW]}}{\text{min. test separation distance [mm]}} \cdot \sqrt{f[\text{GHz}]} \leq \begin{cases} 3.0 & 1g \text{ SAR} \\ 7.5 & 10g \text{ SAR} \end{cases}$$

b) For 100 MHz to 6 GHz and test separation distances  $> 50$  mm

1) For 100 to 1500 MHz

$$\left\{ \text{Power allowed at numeric threshold for } 50 \text{ mm in step a} + (\text{test separation distance} - 50\text{mm}) \cdot \frac{f(\text{MHz})}{150} \right\}, \text{mW}$$

2) for  $> 1500$  MHz and  $\leq 6$  GHz

$$\left\{ \text{Power allowed at numeric threshold for } 50 \text{ mm in step a} + (\text{test separation distance} - 50\text{mm}) \cdot 10 \right\}, \text{mW}$$

c) for frequencies below 100 MHz:

1) test separation distances  $> 50$  mm and  $< 200$  mm:

the power threshold at the corresponding test separation distance at 100 MHz in step b) is multiplied by

$$\left( 1 + \log \left( \frac{100}{f(\text{MHz})} \right) \right)$$

2) test separation distances  $\leq 50$  mm:

the power threshold determined by the equation in c) 1) for 50 mm and 100 MHz is multiplied by  $\frac{1}{2}$

### 5.3 SAR concurrent test exclusion threshold

#### SAR test exclusion acc. to FCC KDB 447498 D01 – Concurrent operation

When the sum of 1-g or 10-g SAR of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit, SAR test exclusion applies to that simultaneous transmission configuration.

For the test exclusion to apply, the maximum output power, duty factor, and other applicable parameters used in the standalone SAR tests, must be the same or more conservative than those required for simultaneous transmission.

When an antenna qualifies for the standalone SAR test exclusion of 4.3.1 and also transmits simultaneously with other antennas, the standalone SAR value must be estimated according to the following to determine the simultaneous transmission SAR test exclusion criteria:

$$1) \frac{\text{max.power of channel,including tune-up tolerance,mW}}{\text{min.test separation distance,mm}} \cdot \frac{\sqrt{f(\text{GHz})}}{x}, \text{ for test separation distances} \leq 50 \text{ mm}$$

where  $x = 7.5$  for 1-g SAR and  $x = 18.75$  for 10-g SAR

$$2) 0.4 \text{ W/kg for 1-g SAR and } 1.0 \text{ W/kg for 10-g SAR, when the test separation distance is} > 50 \text{ mm}$$

## 6 RF-Exposure Evaluation

### Evaluation procedure acc. to FCC KDB 447498

#### Standalone operational modes

- 1) For each standalone operational mode the associated frequencies, radiated output power values, duty cycles and antenna separation distances to the human body are specified
- 2) From the radiated power and the duty cycle the source-based time averaged radiated output power is calculated
- 3) The transmission frequency, average power and separation distance is used to determine the SAR test exclusion power threshold value acc. to FCC KDB 447498 D01
- 4) If the time averaged output power of the transmission mode is lower than the SAR test exclusion power threshold value, the mode clarifies for SAR test exclusion and no further SAR evaluation is needed

#### Concurrent operational modes

- 1) For each operational mode that participates in the concurrent operational mode, the estimated SAR is calculated from the source-based time average conducted output power and the separation distance to the human body for each transmission frequency of the operation mode
- 2) The maximum estimated SAR value for each operational mode is determined
- 3) The sum of SAR values of the maximum estimated SAR values for each operational mode is calculated
- 4) If the sum of SAR values is below the corresponding SAR limit, the concurrent operational mode clarifies for SAR test exclusion and no further evaluation is needed

## 7 Single Source Evaluation Results - FCC

Results – Standalone Operational Modes							
Mode	Frequency [MHz]	Power [mW]	Duty Cycle	Average Power [mW]	Distance [mm]	Power Limit [mW]	Verdict
Bluetooth	2402	1.27	0.78	0.99	5.0	10	PASS
	2441	1.67	0.78	1.30	5.0	10	PASS
	2480	1.76	0.78	1.38	5.0	10	PASS
RFID 13.56 MHz	13.56	0.00	1.00	0.00	5.0	443	PASS
RFID 125 kHz	0.125	0.00	1.00	0.00	5.0	926	PASS
Comment: --							

**8 Concurrent Evaluation Results - FCC**

<b>Bluetooth + RFID 13.56 MHz + RFID 125 kHz</b>				
Mode	Frequency [GHz]	Average Power [mW]	Distance [mm]	SAR Value [W/kg]
Bluetooth	2.480000	1.38	5	0.06
RFID 13.56 MHz	0.013560	0.00	5	0.00
Sum SAR [W/kg]				0.06
SAR Limit [W/kg]				1.6
Compliance				PASS
Comment:				

==== END OF TEST REPORT ====