




Tx. Spurious BLE (S=8) 2440MHz Ref

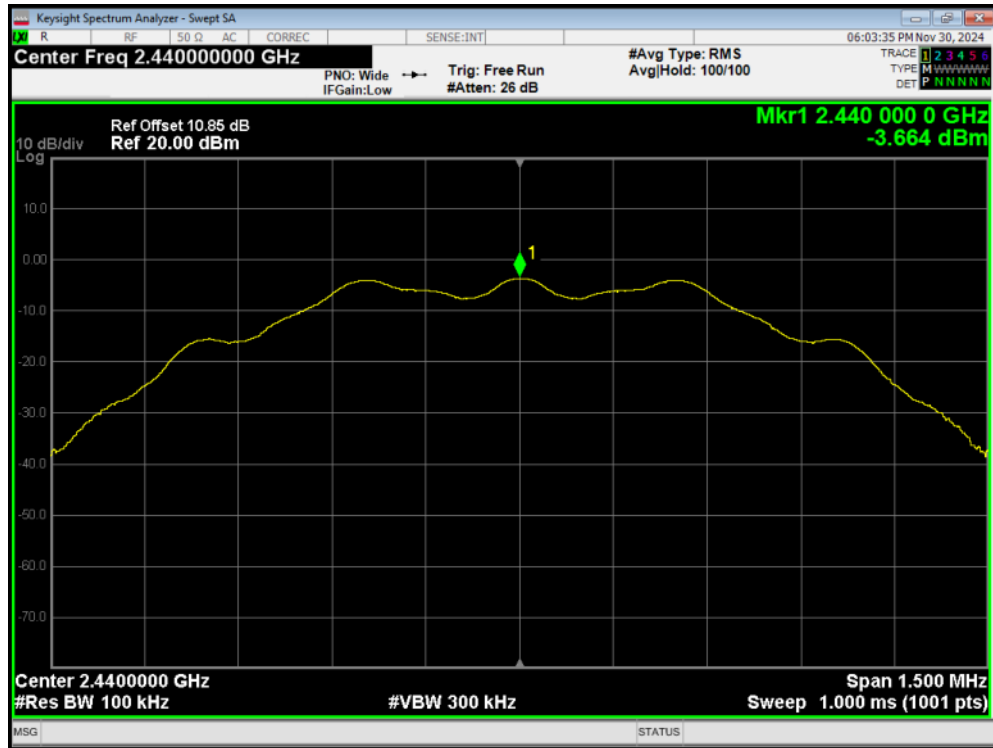


Tx. Spurious BLE (S=8) 2440MHz Emission

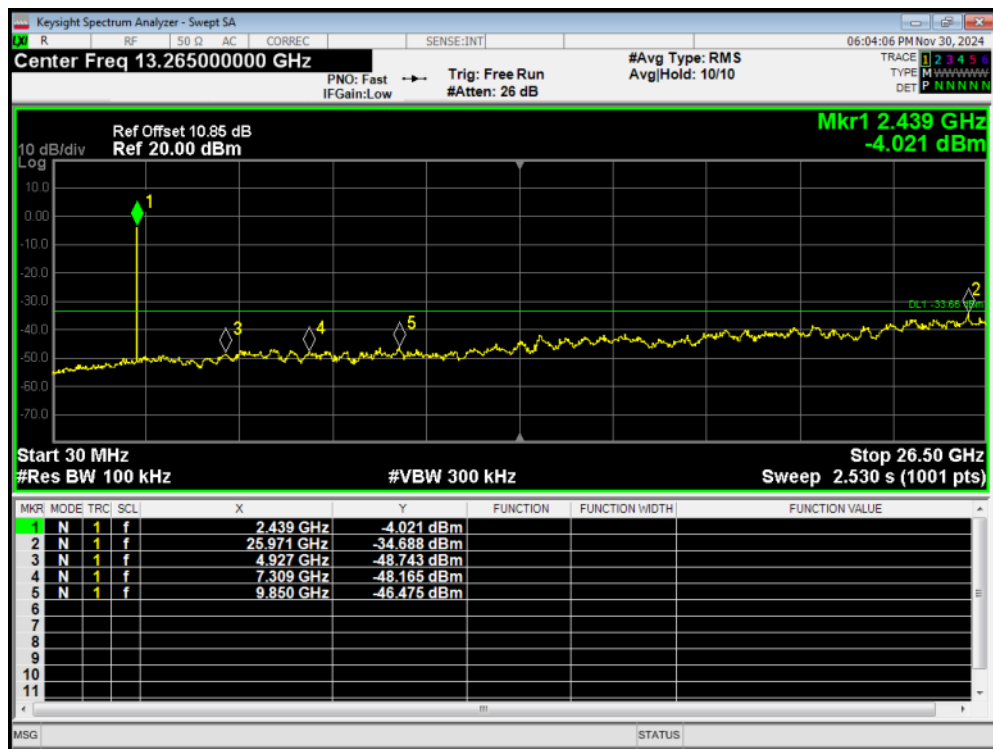


Tx. Spurious BLE (S=8) 2480MHz Ref

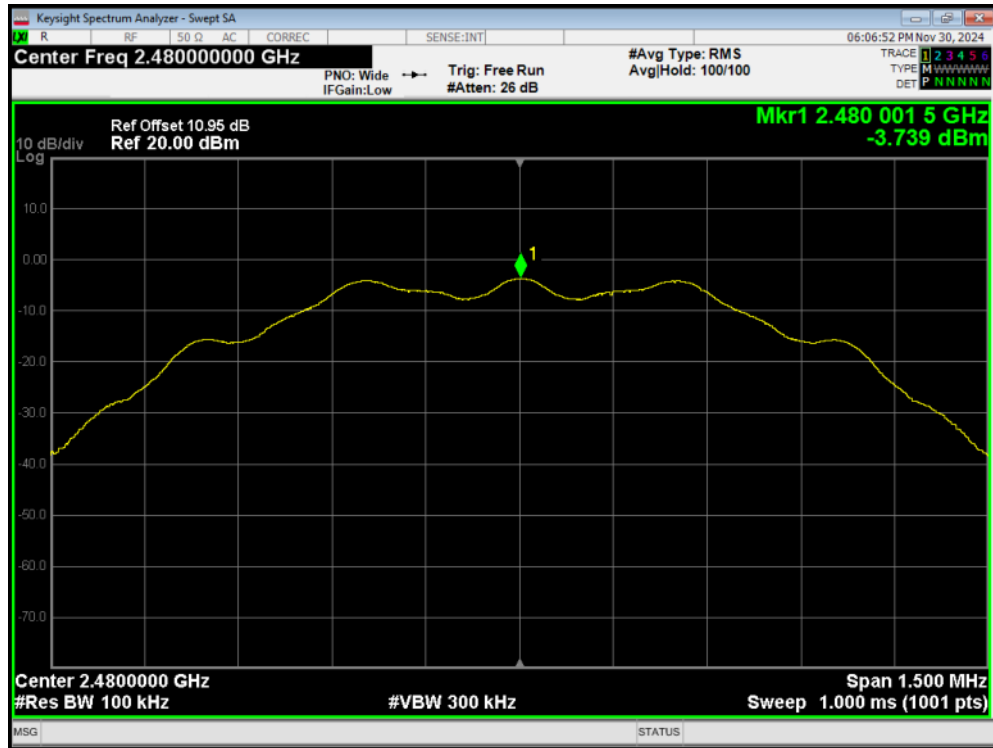


Tx. Spurious BLE (S=8) 2480MHz Emission

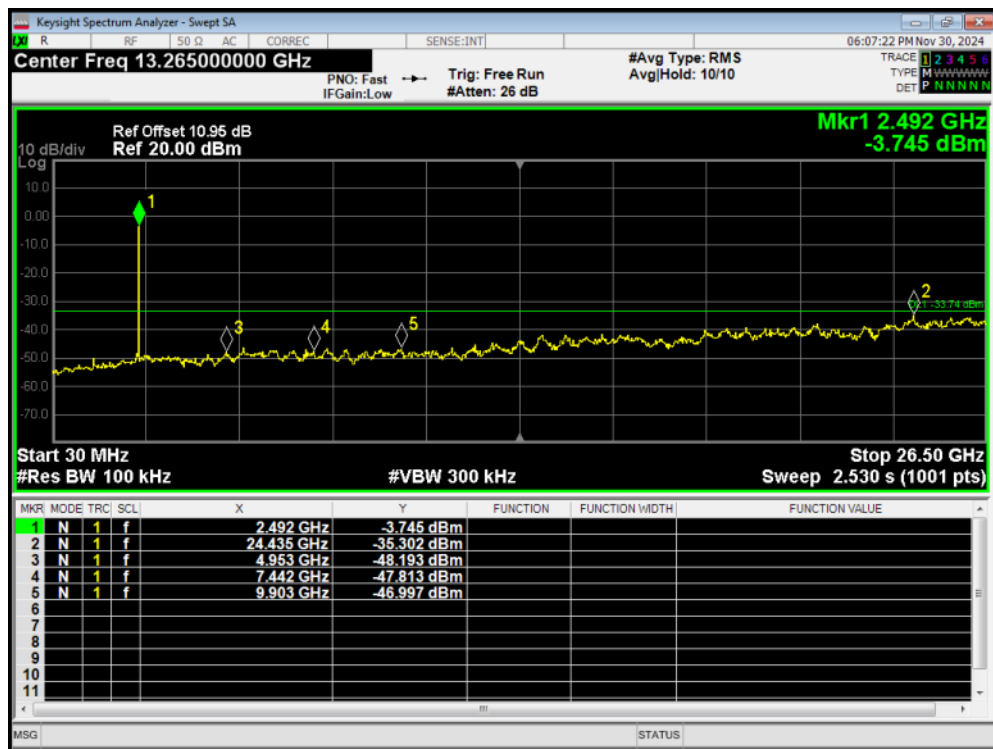


Tx. Spurious 802.11b 2412MHz Ref

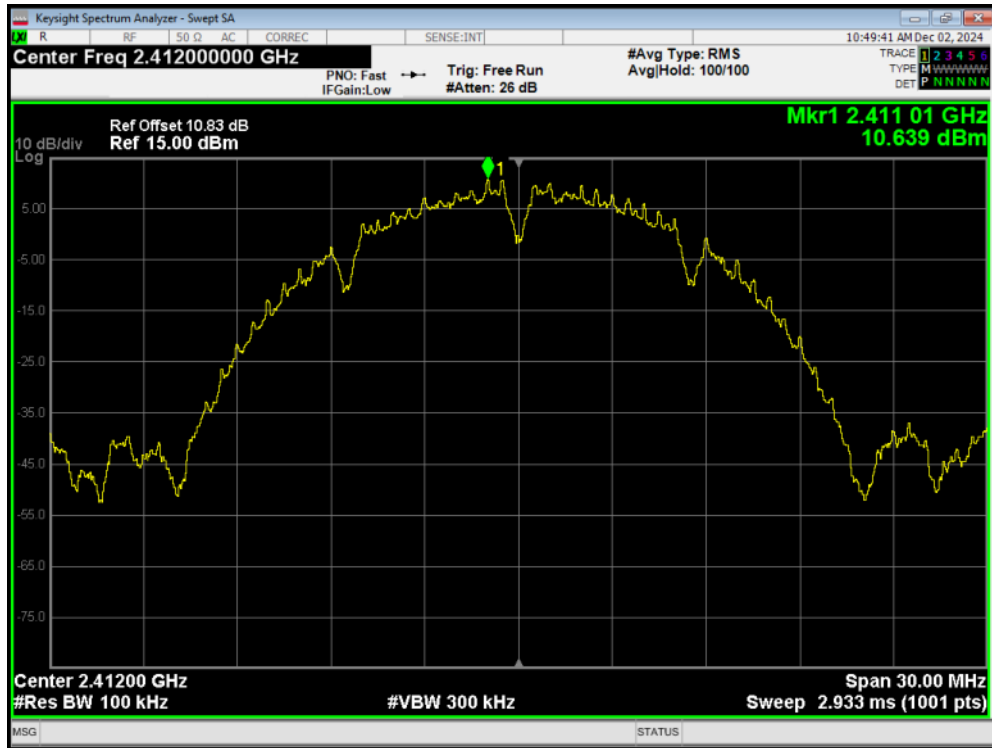


Tx. Spurious 802.11b 2412MHz Emission

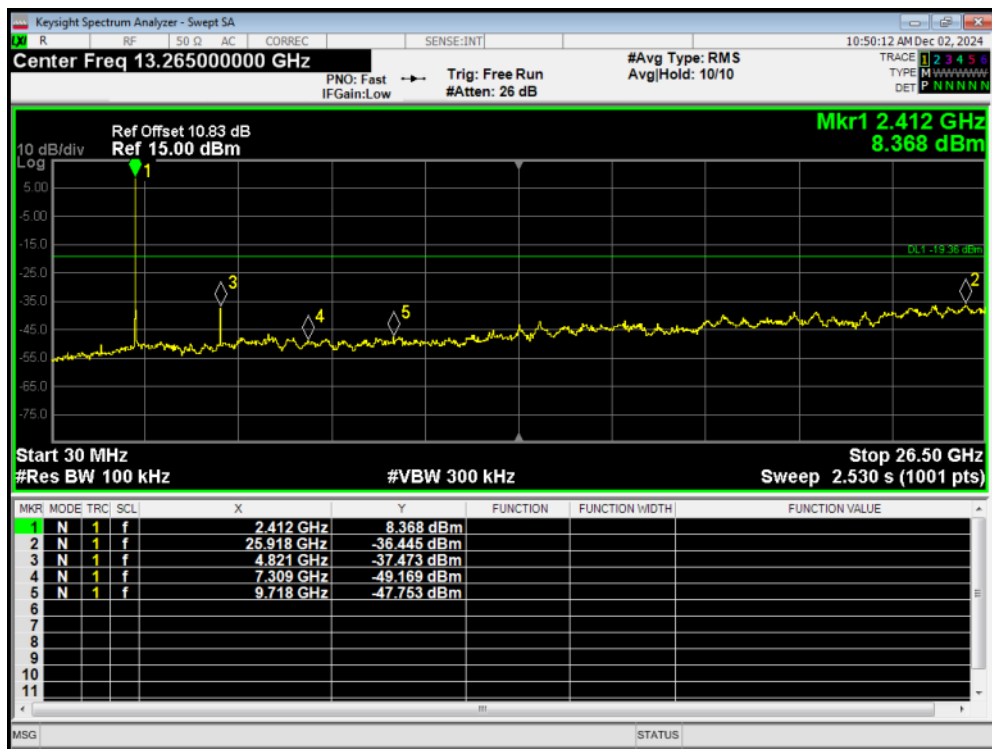


Tx. Spurious 802.11b 2437MHz Ref

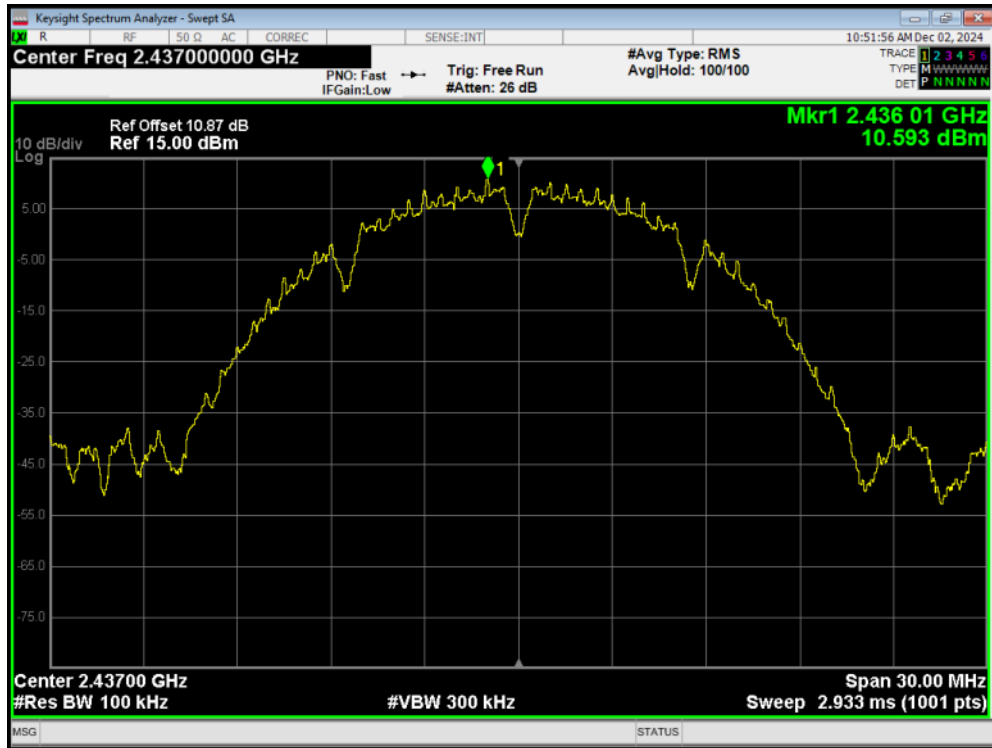


Tx. Spurious 802.11b 2437MHz Emission

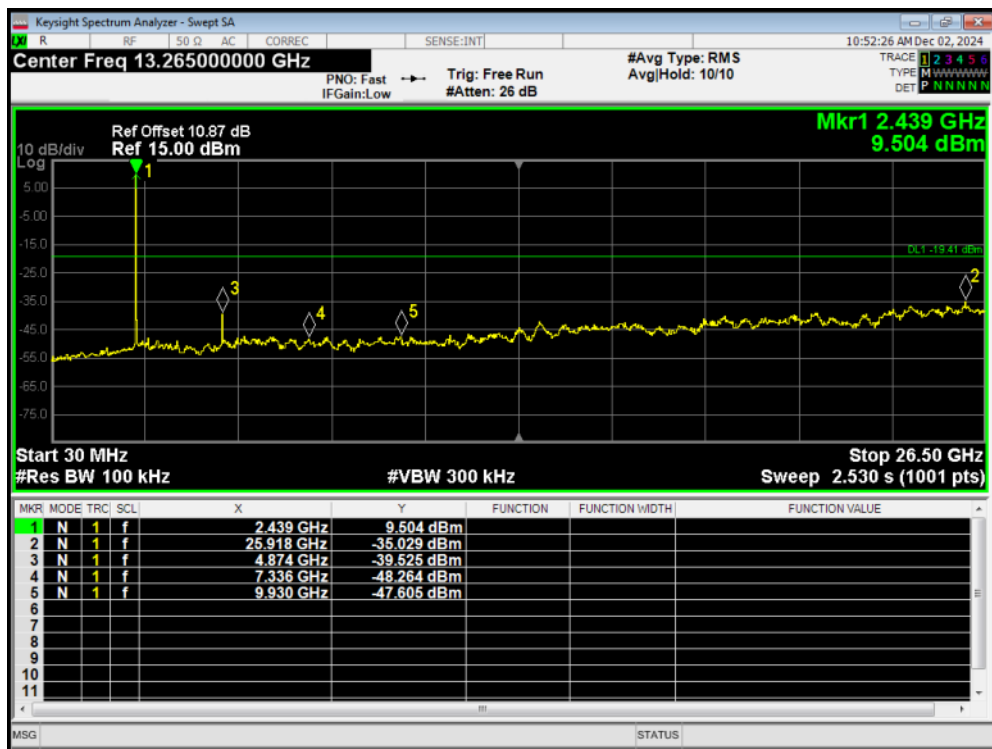


Tx. Spurious 802.11b 2462MHz Ref

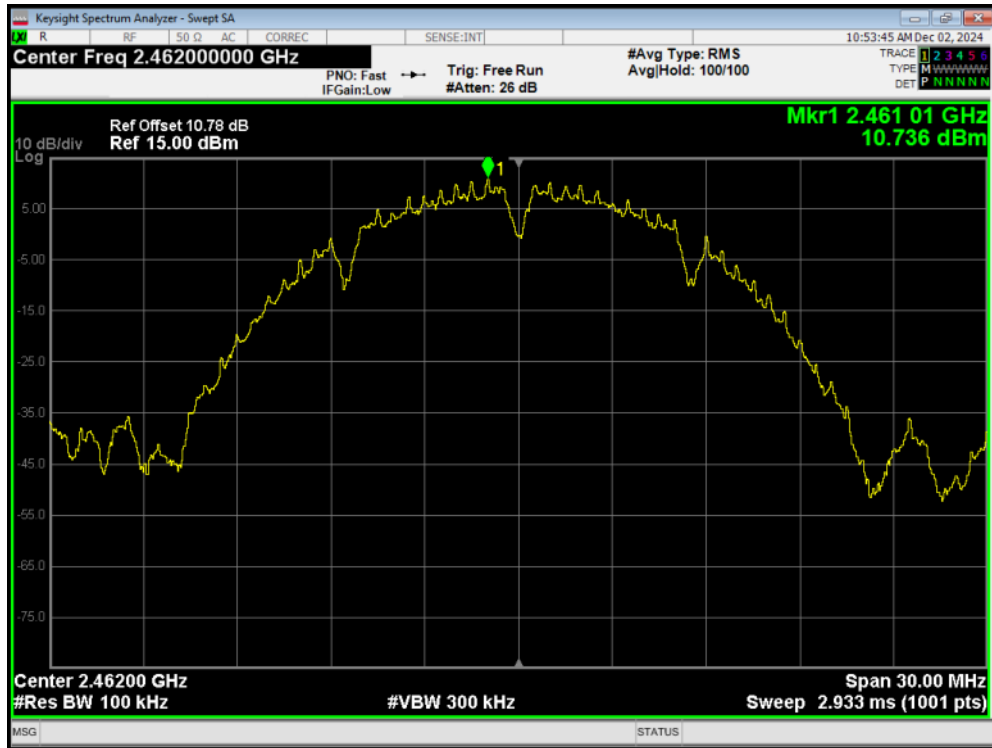


Tx. Spurious 802.11b 2462MHz Emission

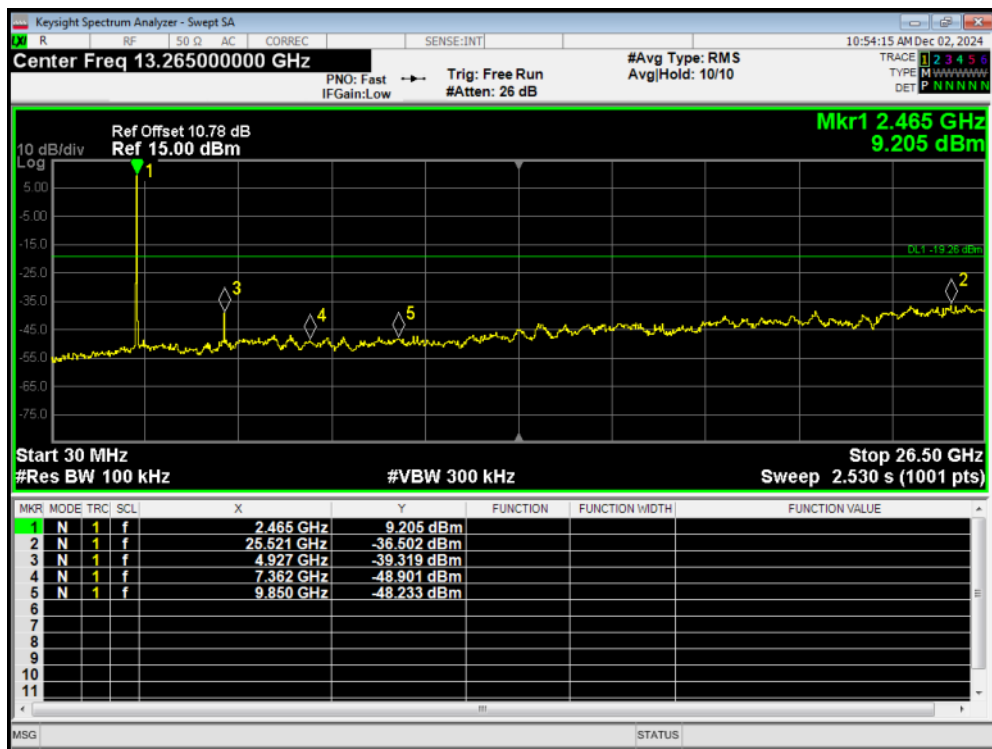


Tx. Spurious 802.11g 2412MHz Ref

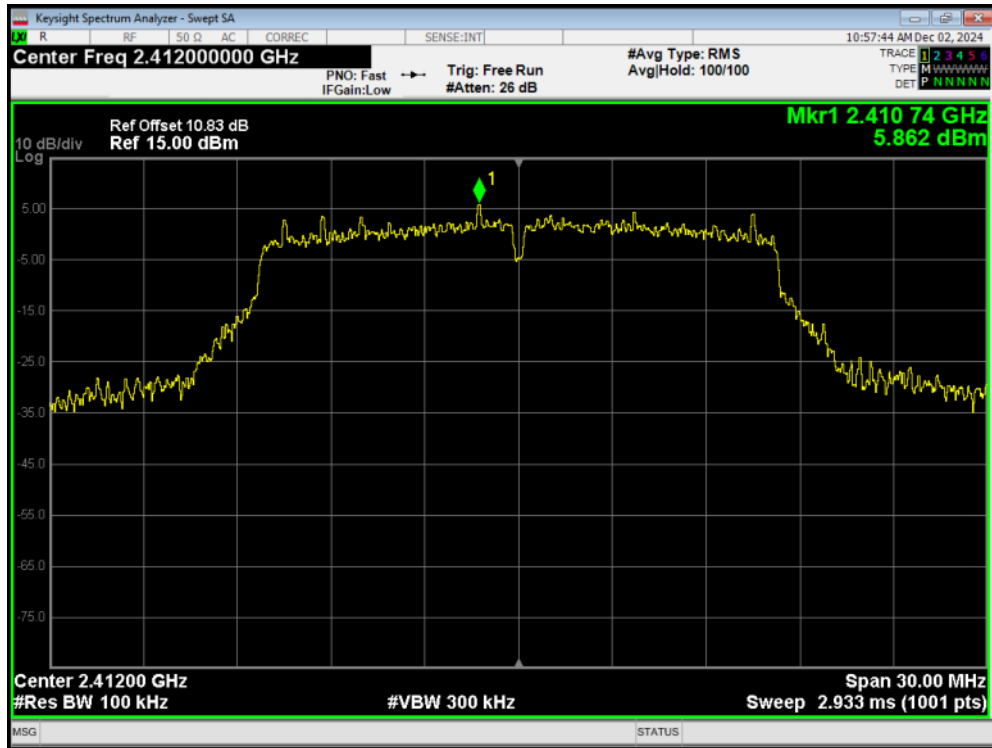


Tx. Spurious 802.11g 2412MHz Emission

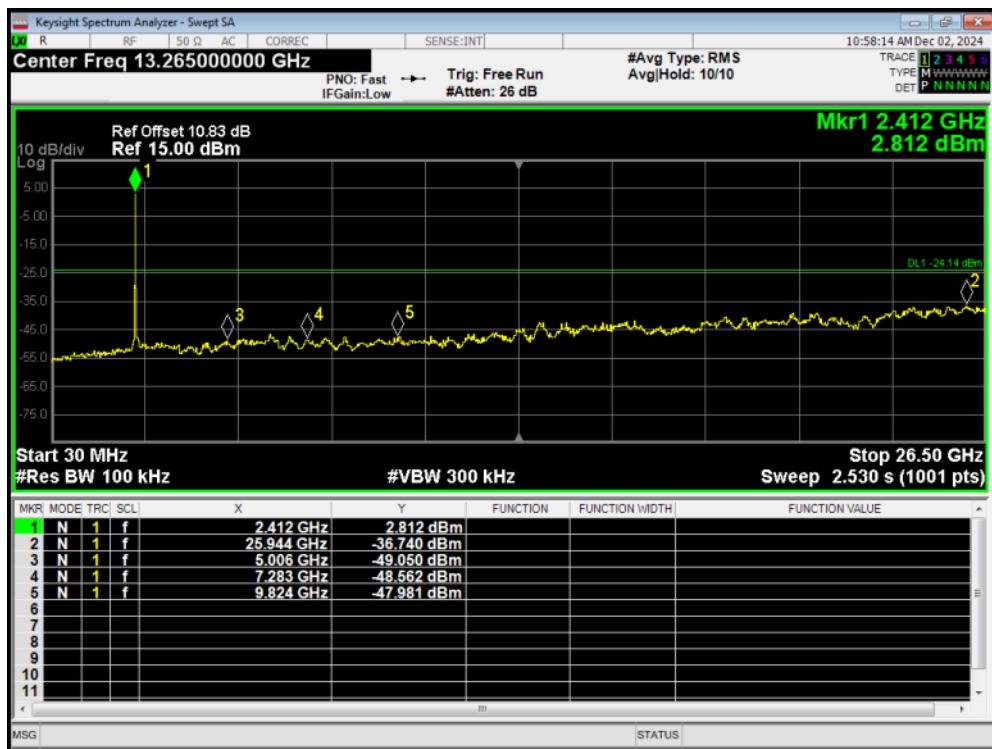


Tx. Spurious 802.11g 2437MHz Ref

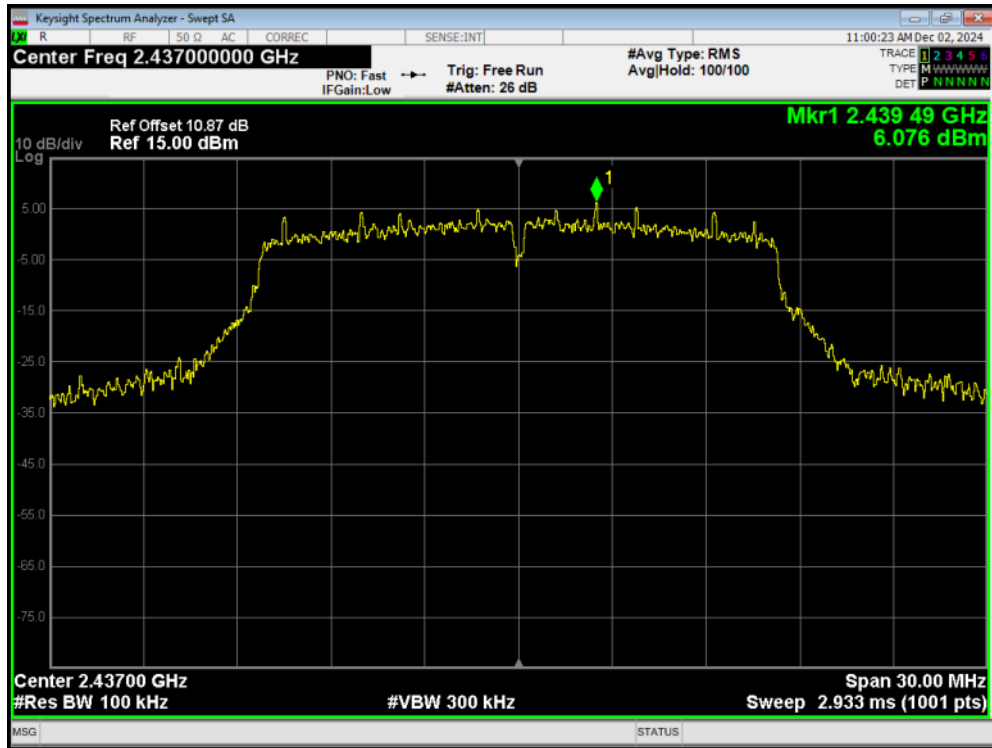


Tx. Spurious 802.11g 2437MHz Emission

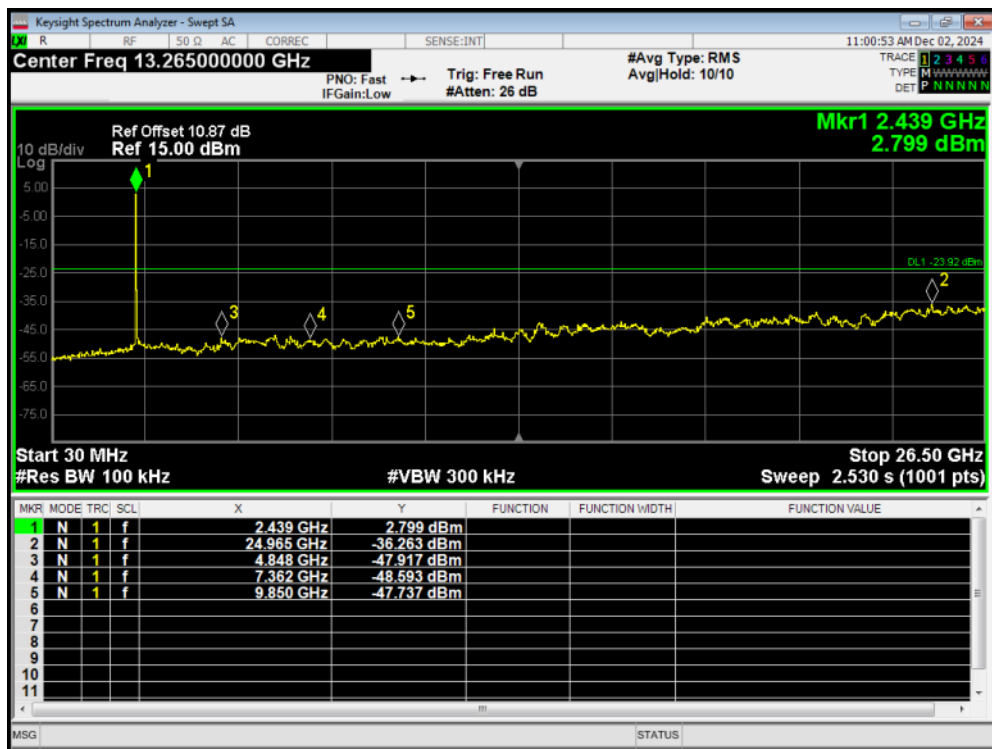


Tx. Spurious 802.11g 2462MHz Ref

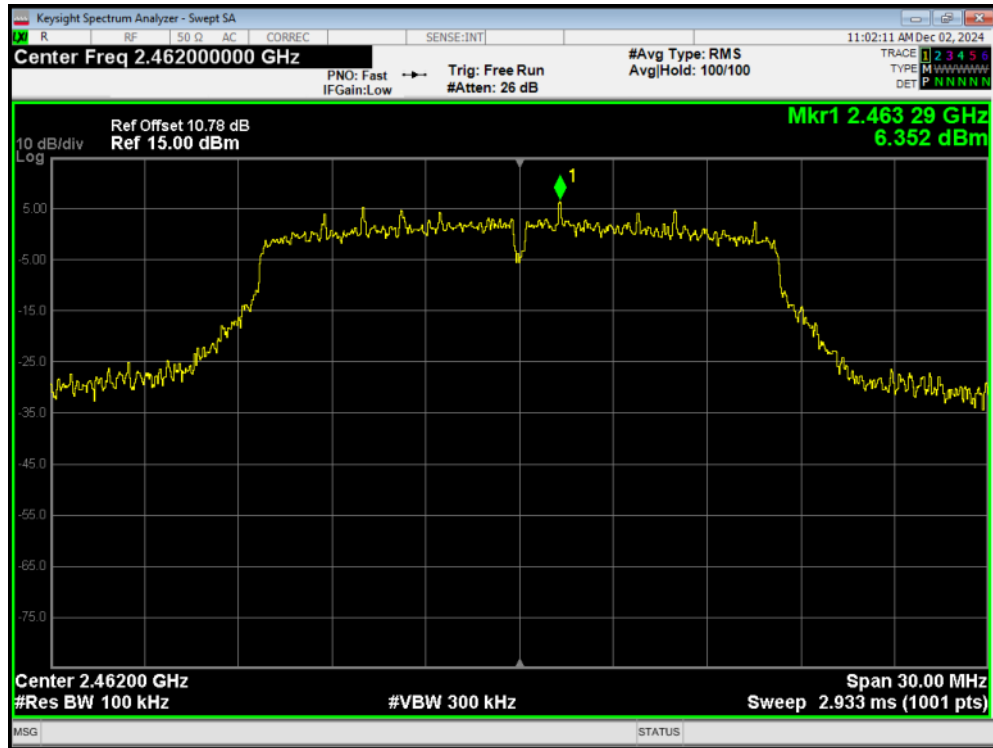


Tx. Spurious 802.11g 2462MHz Emission

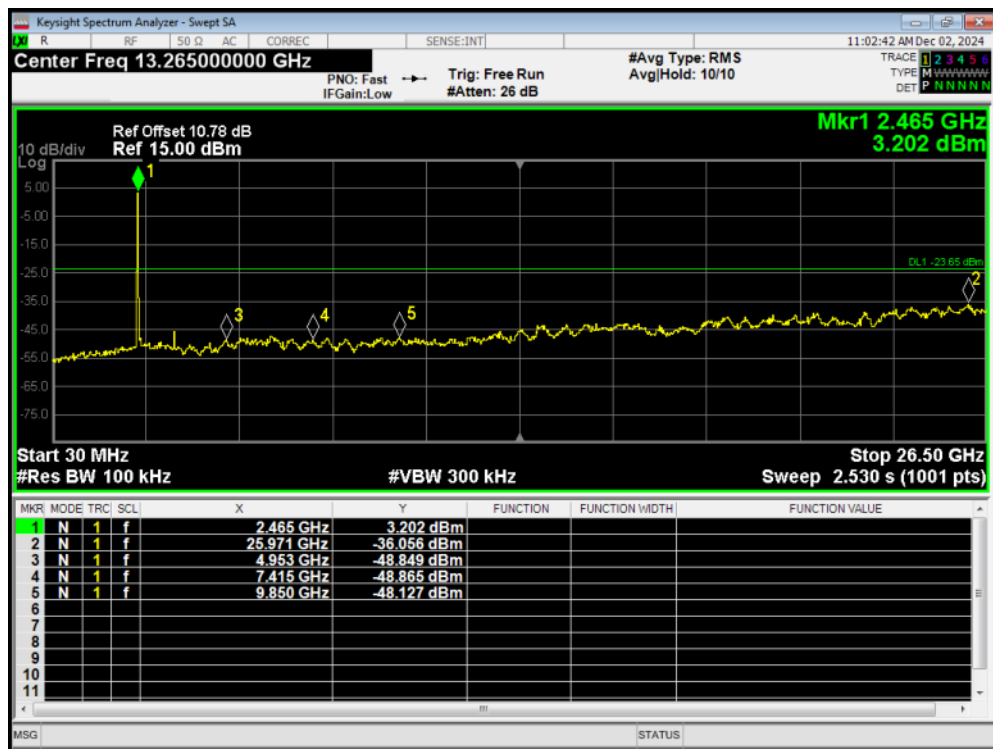


Tx. Spurious 802.11n(HT20) 2412MHz Ref

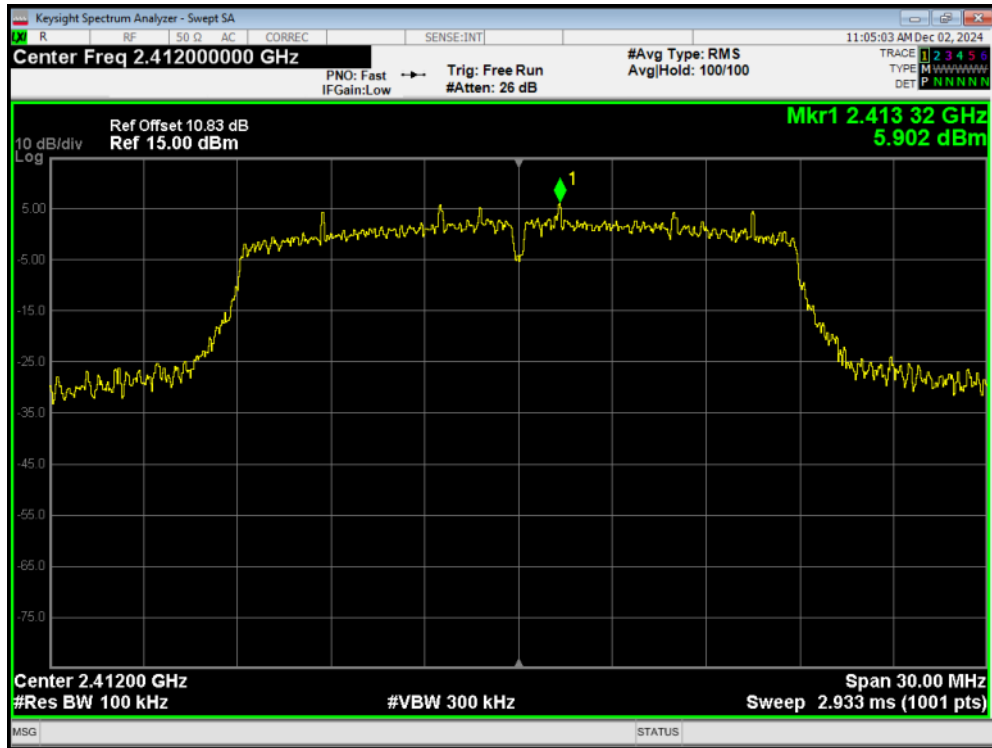


Tx. Spurious 802.11n(HT20) 2412MHz Emission

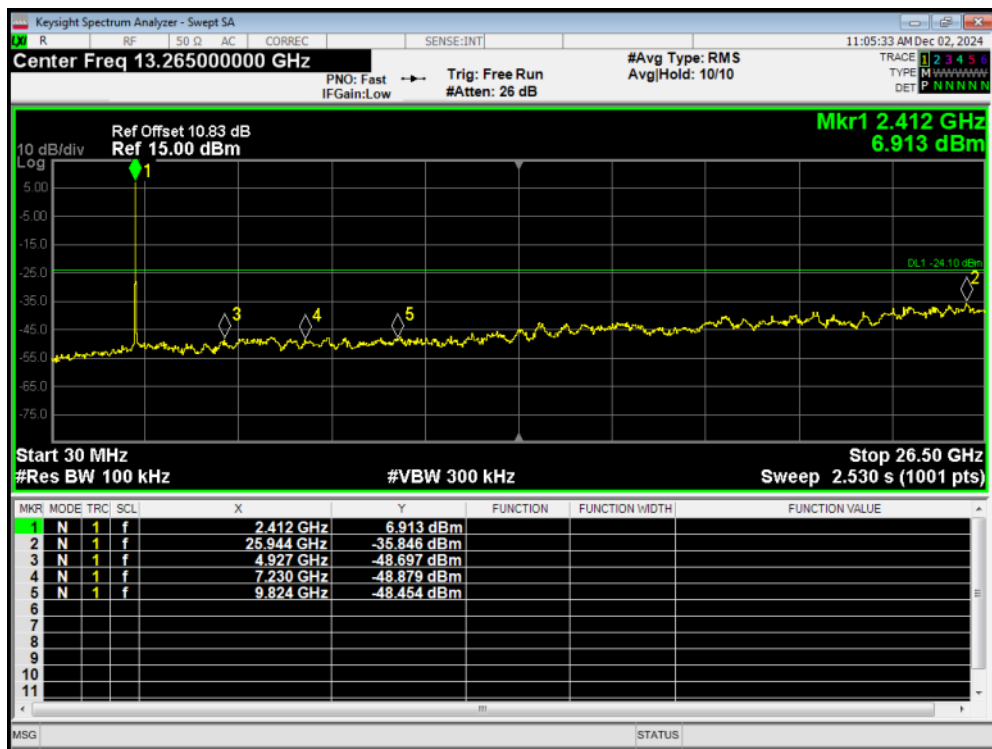


Tx. Spurious 802.11n(HT20) 2437MHz Ref

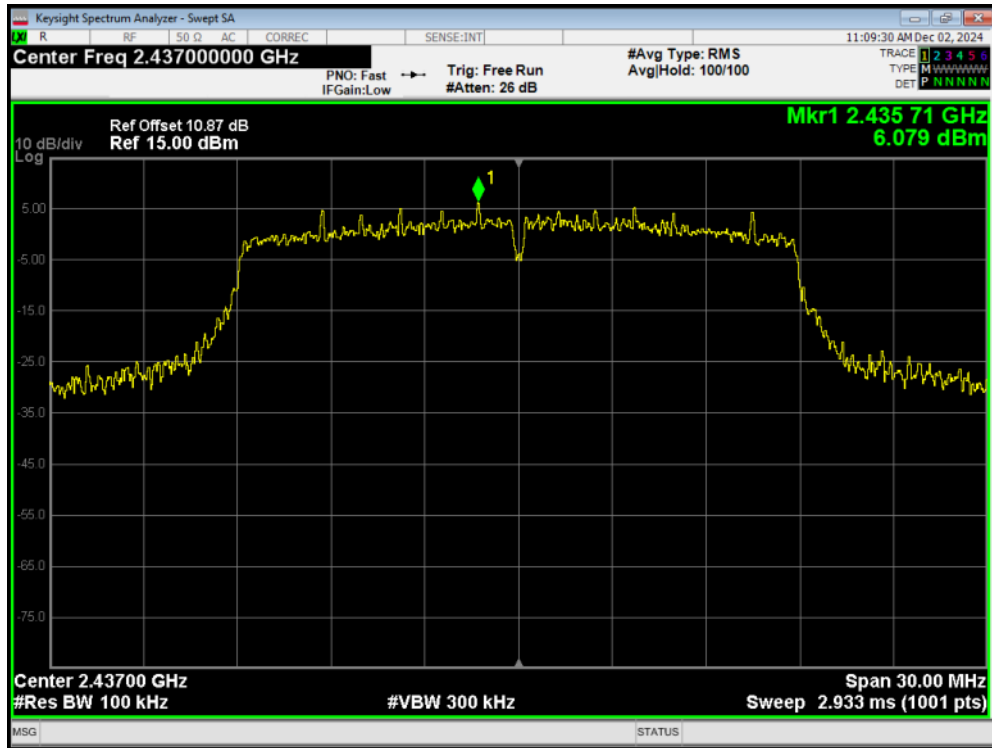


Tx. Spurious 802.11n(HT20) 2437MHz Emission

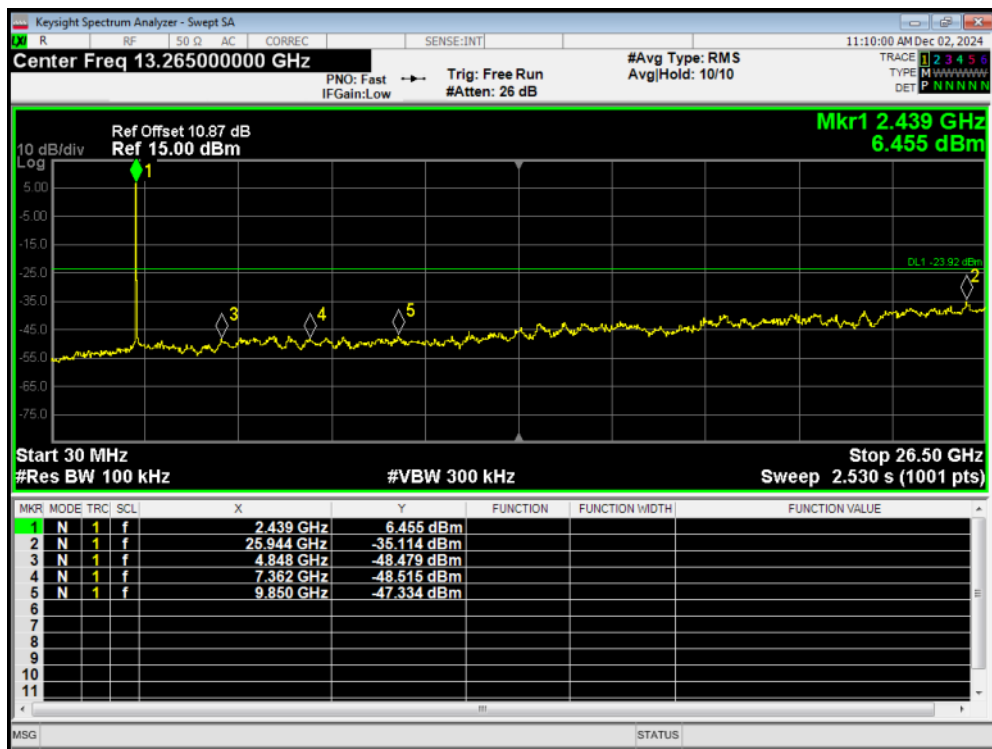


Tx. Spurious 802.11n(HT20) 2462MHz Ref

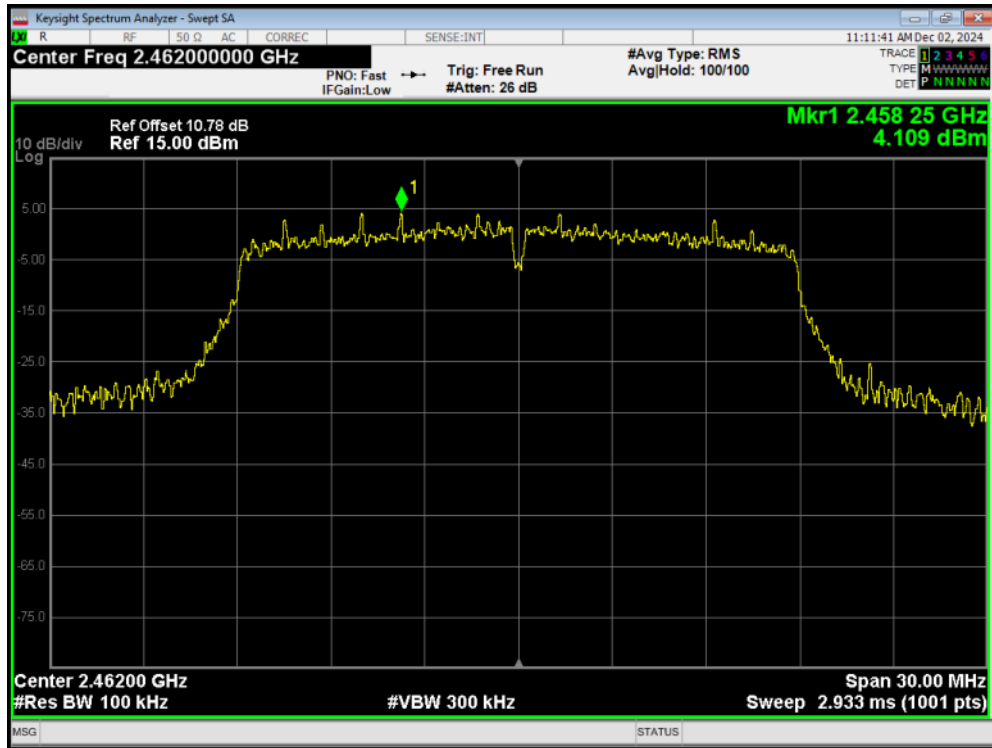


Tx. Spurious 802.11n(HT20) 2462MHz Emission

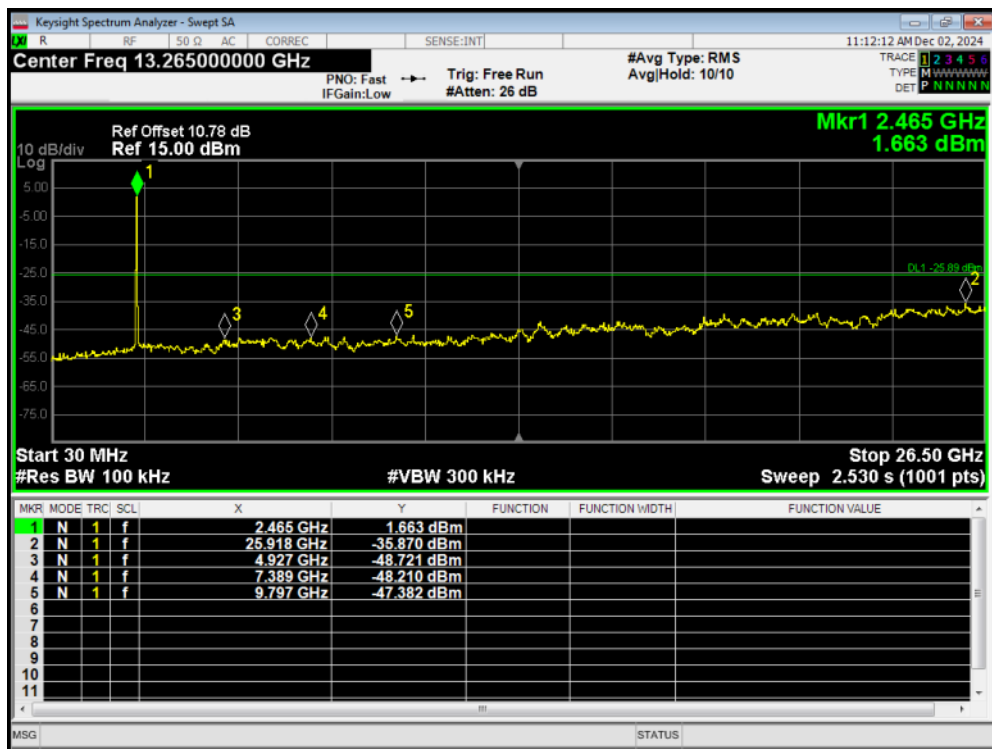


Tx. Spurious 802.11n(HT40) 2422MHz Ref

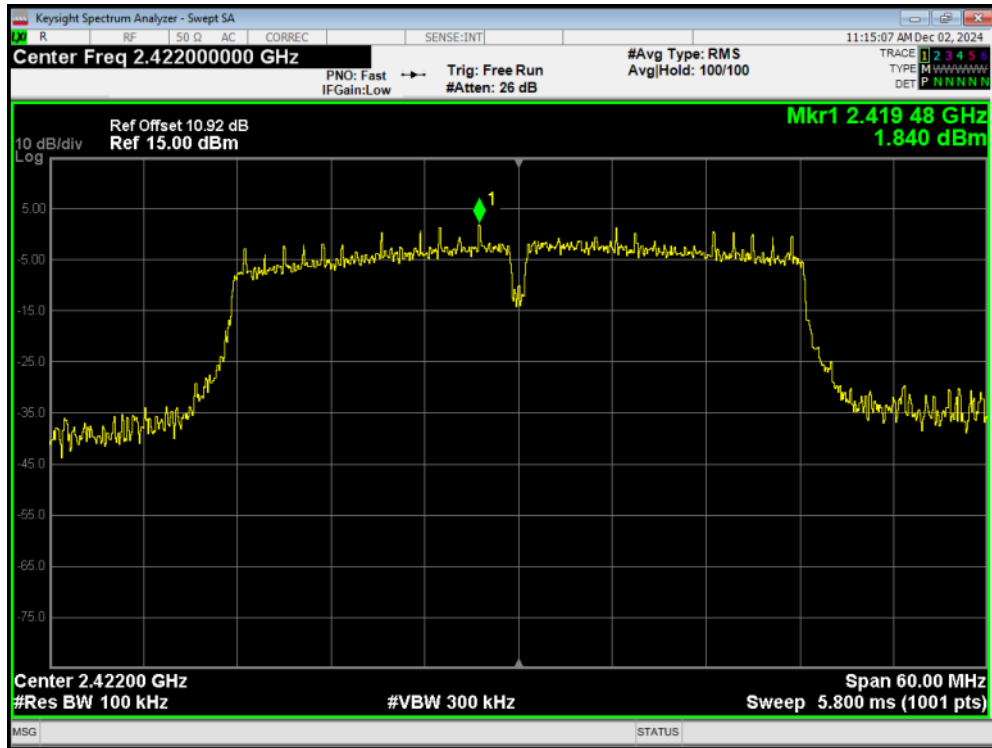


Tx. Spurious 802.11n(HT40) 2422MHz Emission

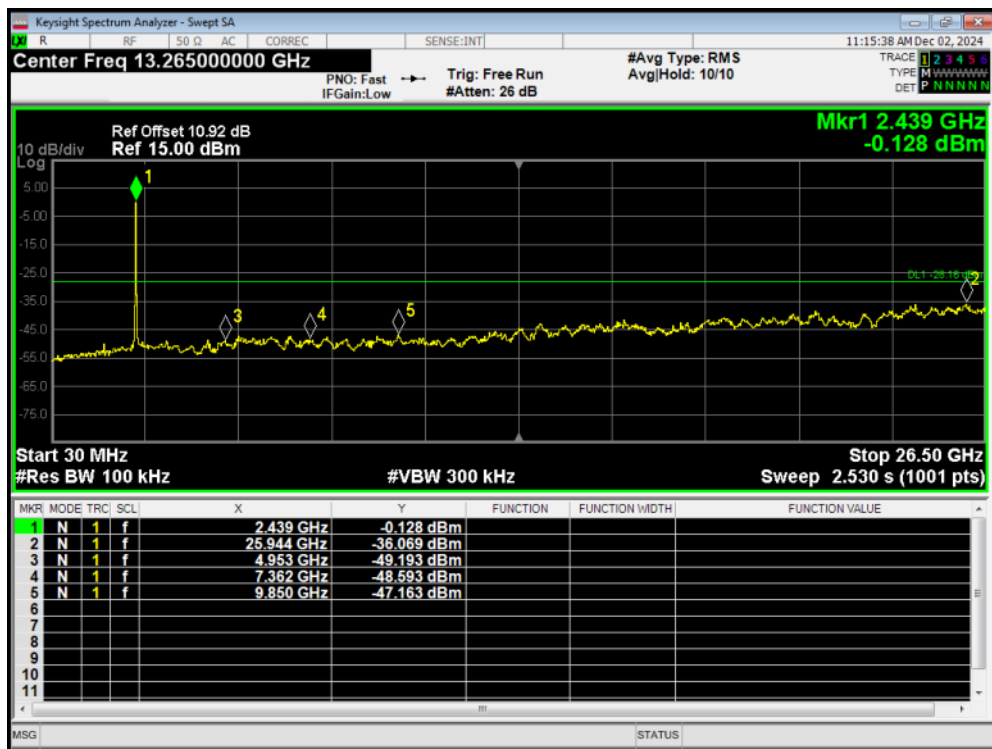


Tx. Spurious 802.11n(HT40) 2437MHz Ref

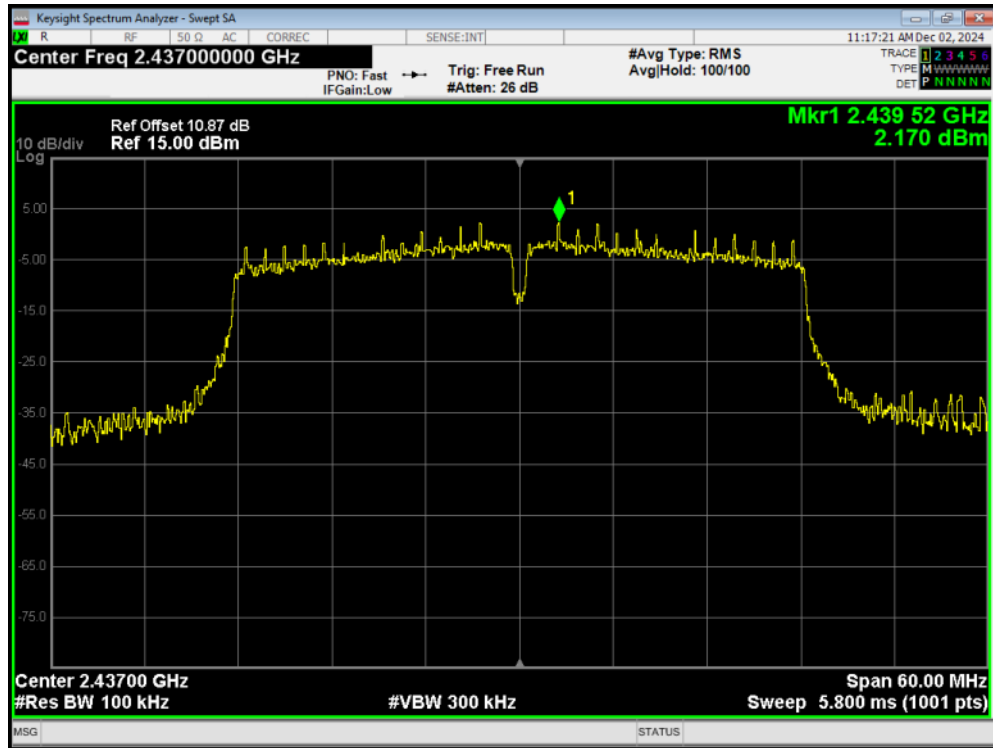


Tx. Spurious 802.11n(HT40) 2437MHz Emission

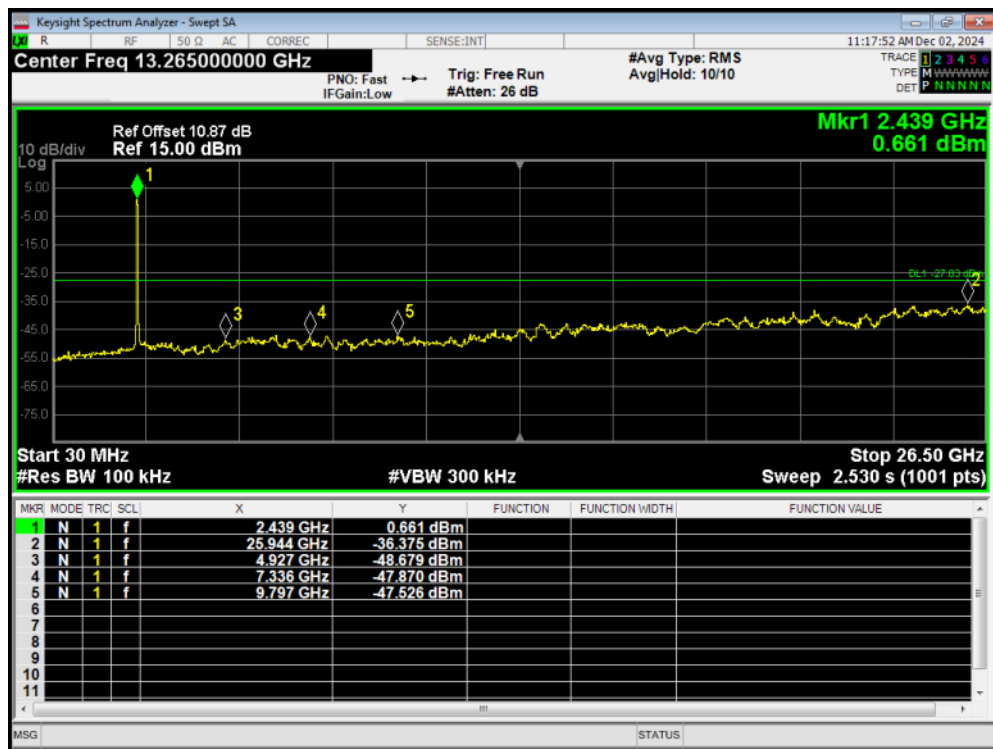

Tx. Spurious 802.11n(HT40) 2452MHz Ref

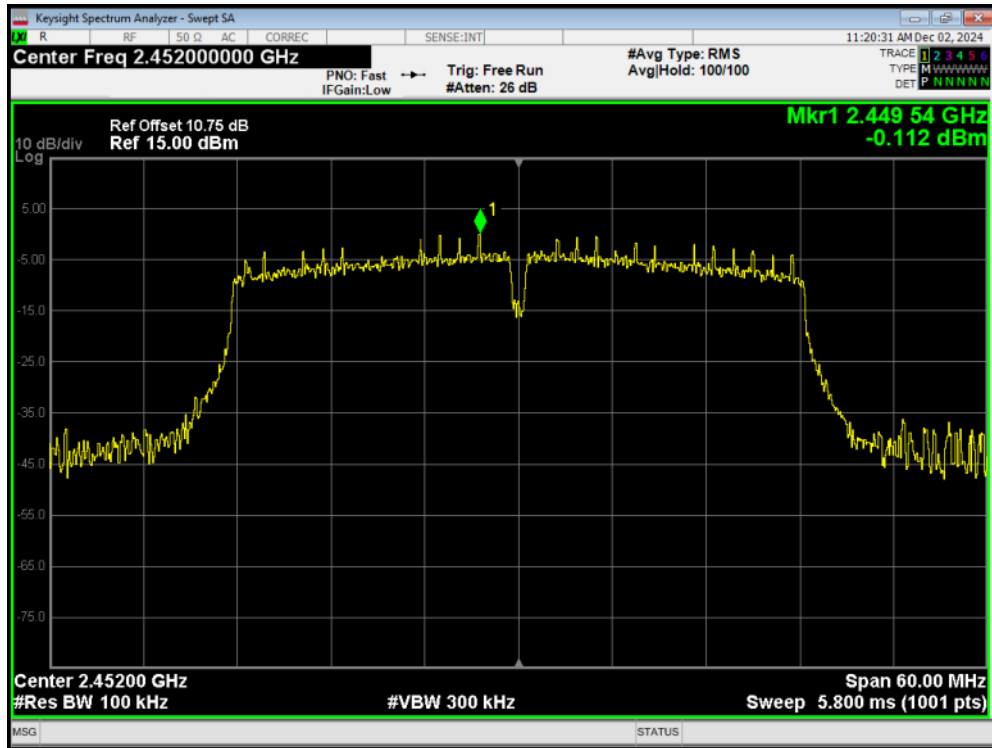

Tx. Spurious 802.11n(HT40) 2452MHz Emission

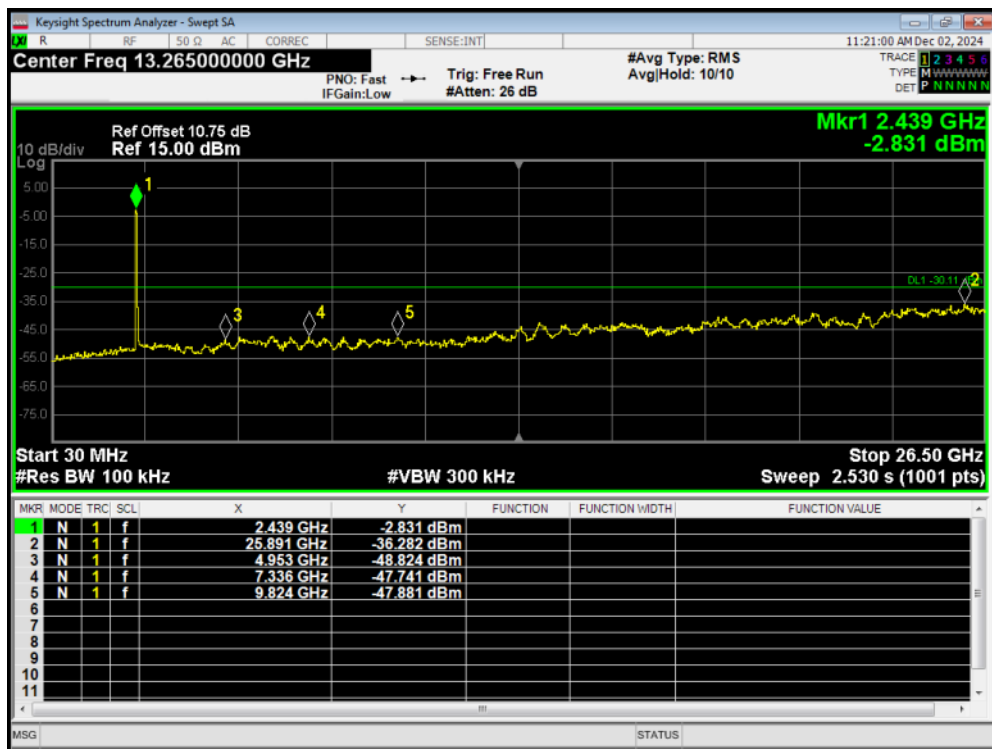

5.6. Unwanted Emission

Ambient Condition

Temperature	Relative humidity
15°C ~ 35°C	20% ~ 80%

Method of Measurement

The test set-up was made in accordance to the general provisions of ANSI C63.10.

The Equipment Under Test (EUT) was set up on a non-conductive table in the semi-anechoic chamber. The test was performed at the distance of 3 m between the EUT and the receiving antenna.

The turntable shall be rotated from 0 to 360 degrees for detecting the maximum of radiated spurious signal level. The measurements shall be repeated with orthogonal polarization of the test antenna. The data of cable loss and antenna factor has been calibrated in full testing frequency range before the testing. Sweep the Restricted Band and the emissions less than 20 dB below the permissible value are reported.

The radiated emissions measurements were made in a typical installation configuration.

Sweep the whole frequency band through the range from 9 kHz to the 10th harmonic of the carrier, and the emissions less than 20 dB below the permissible value are reported.

This method refer to ANSI C63.10.

The procedure for peak unwanted emissions measurements above 1000 MHz is as follows:

Set the spectrum analyzer in the following:

9kHz~150 kHz

RBW=200Hz, VBW=1kHz/ Sweep=AUTO

150 kHz~30MHz

RBW=9kHz, VBW=30kHz,/ Sweep=AUTO

Below 1GHz

RBW=100kHz / VBW=300kHz / Sweep=AUTO

a) Peak emission levels are measured by setting the instrument as follows:

Above 1GHz

PEAK: RBW=1MHz VBW=3MHz/ Sweep=AUTO

b) Average emission levels are measured by setting the instrument as follows:

Above 1GHz

AVERAGE: RBW=1MHz / VBW=3MHz / Sweep=AUTO

c) Detector: The measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

d) Averaging type = power (i.e., rms) (As an alternative, the detector and averaging type may be set for linear voltage averaging. Some instruments require linear display mode to use linear voltage

averaging. Log or dB averaging shall not be used.)

e) Sweep time = auto.

f) Perform a trace average of at least 100 traces if the transmission is continuous. If the transmission is not continuous, then the number of traces shall be increased by a factor of $1 / D$, where D is the duty cycle. For example, with 50% duty cycle, at least 200 traces shall be averaged. (If a specific emission is demonstrated to be continuous—i.e., 100% duty cycle—then rather than turning ON and OFF with the transmit cycle, at least 100 traces shall be averaged.)

g) If tests are performed with the EUT transmitting at a duty cycle less than 98%, then a correction factor shall be added to the measurement results prior to comparing with the emission limit, to compute the emission level that would have been measured had the test been performed at 100% duty cycle. The correction factor is computed as follows:

1) If power averaging (rms) mode was used in the preceding step e), then the correction factor is $[10 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 3 dB shall be added to the measured emission levels.


2) If linear voltage averaging mode was used in the preceding step e), then the correction factor is $[20 \log (1 / D)]$, where D is the duty cycle. For example, if the transmit duty cycle was 50%, then 6 dB shall be added to the measured emission levels.

3) If a specific emission is demonstrated to be continuous (100% duty cycle) rather than turning ON and OFF with the transmit cycle, then no duty cycle correction is required for that emission.


The test is in transmitting mode.

Test Setup


9kHz~ 30MHz

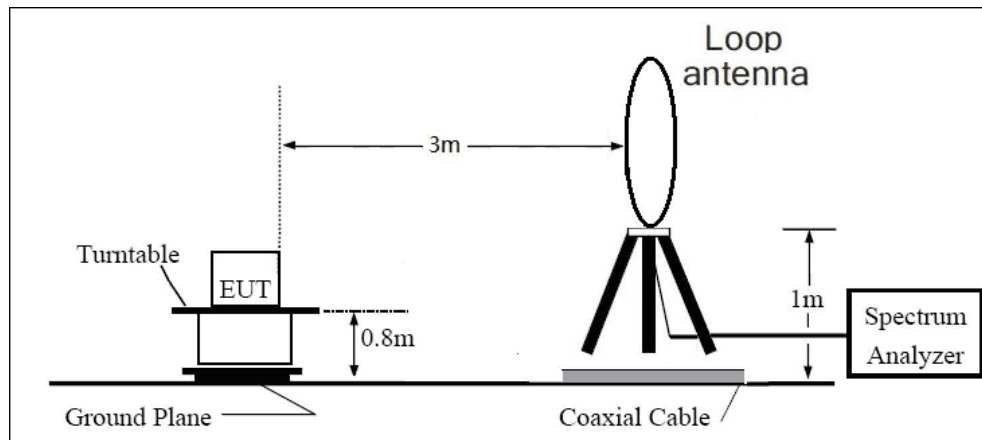

30MHz~ 1GHz

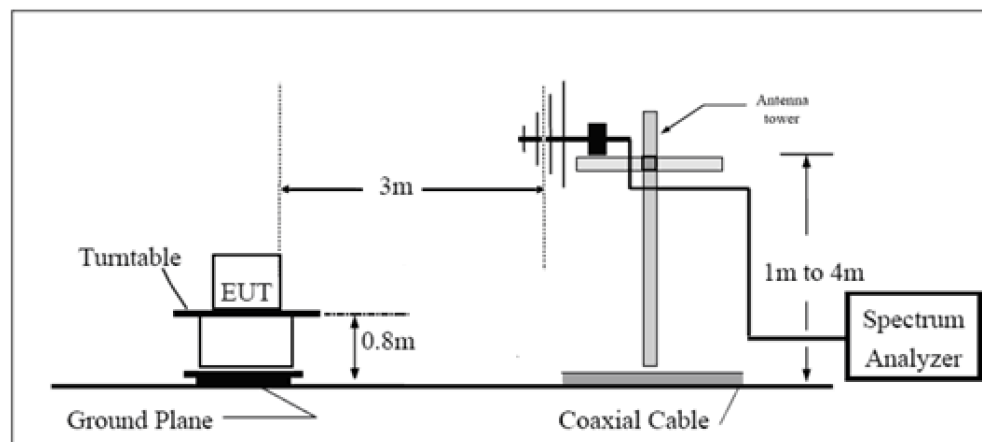

Above 1GHz

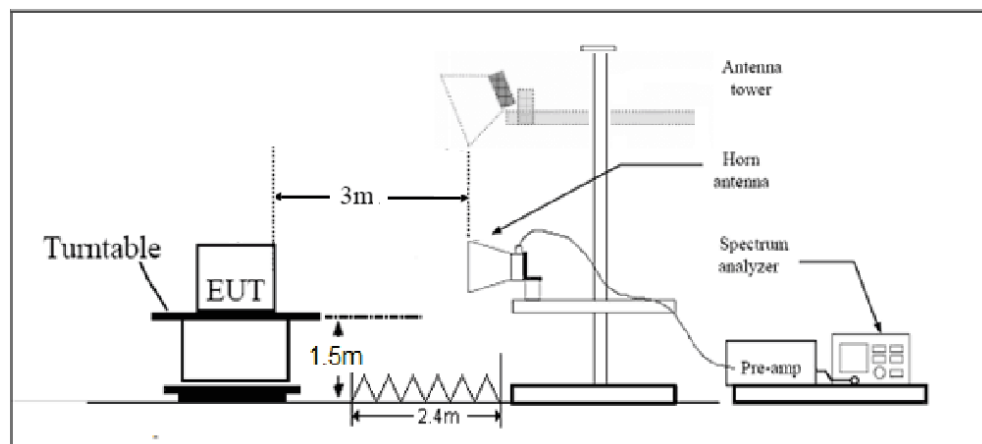

Note: Area side:2.4mX3.6m

Limits

Rule Part 15.247(d) specifies that “In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).”

Limit in restricted band

Frequency of emission (MHz)	Field strength(μ V/m)	Field strength(dB μ V/m)
0.009–0.490	2400/F(kHz)	/
0.490–1.705	24000/F(kHz)	/
1.705–30.0	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above960	500	54

§15.35(b)

There is also a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

Peak Limit=74 dB μ V/m

Average Limit=54 dB μ V/m

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41			

Measurement Uncertainty


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9kHz-30MHz	3.55 dB
30MHz-200MHz	4.17 dB
200MHz-1GHz	4.84 dB
1-18GHz	4.35 dB
18-26.5GHz	5.90 dB
26.5GHz~40GHz	5.92 dB


Test Results:

The following graphs display the maximum values of horizontal and vertical by software.
Blue trace uses the peak detection, Green trace uses the average detection.


A symbol ($\text{dB } \mu\text{V}$) in the test plot below means (dB $\mu\text{V/m}$)

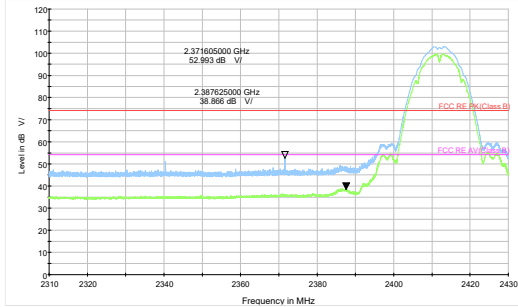


802.11b-Channel 1 Peak+ Average

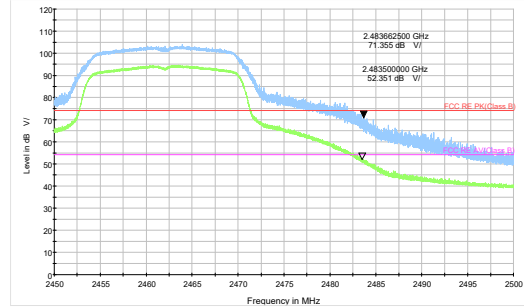


802.11b-Channel 11 Peak+ Average

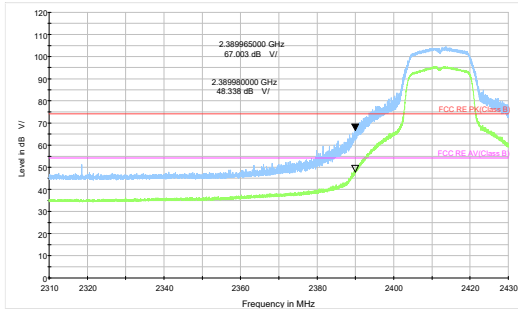


802.11g-Channel 1 Peak+ Average

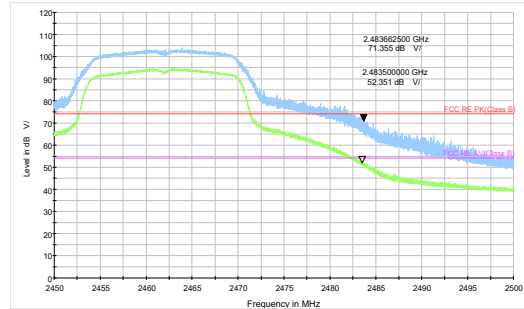


802.11g-Channel 11 Peak+ Average

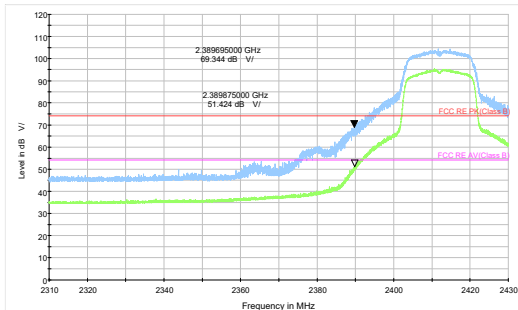


802.11n HT20-Channel 1 Peak+ Average

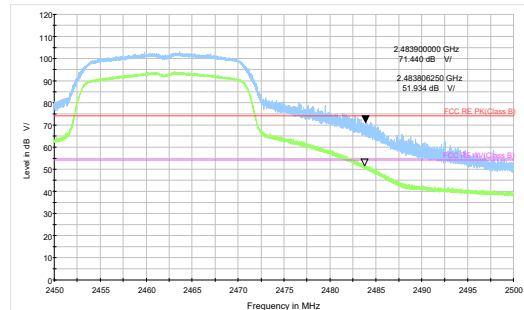

802.11n HT20-Channel 11 Peak+ Average

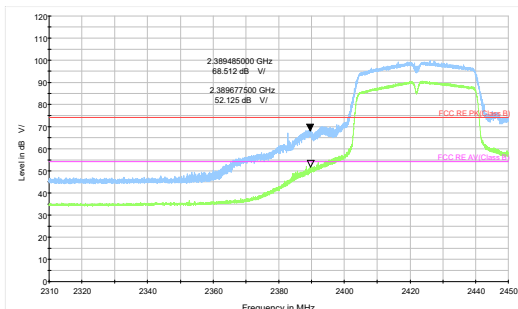


802.11n HT40-Channel 3 Peak+ Average

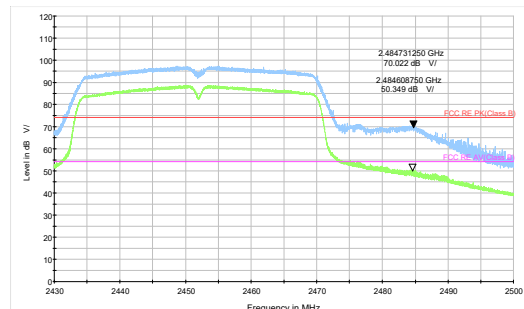


802.11n HT40-Channel 9 Peak+ Average

After the pretest, Bluetooth LE (1M) was selected as the worst Mode for Bluetooth LE.

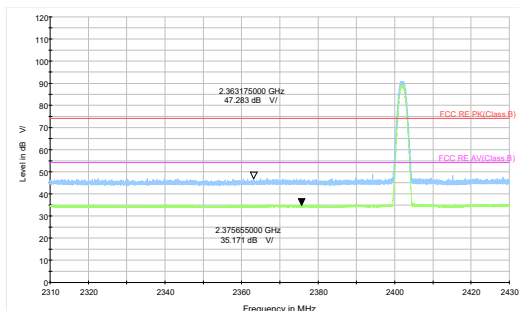

Bluetooth LE (1M) Channel 0 Peak+ Average

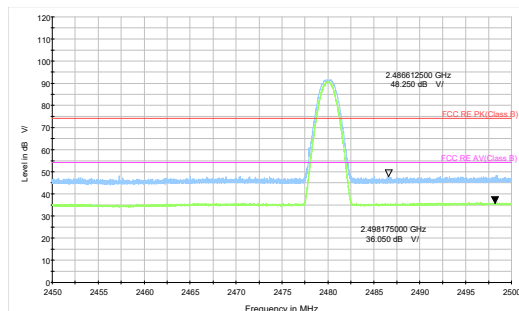

Bluetooth LE (1M) Channel 39 Peak+Average

Result of RE

Test result

Sweep the whole frequency band through the range from 9kHz to the 10th harmonic of the carrier, the Emissions in the frequency band 9kHz-30MHz are more than 20dB below the limit are not reported.

The following graphs display the maximum values of horizontal and vertical by software.
For above 1GHz, Blue trace uses the peak detection, Green trace uses the average detection.


Continuous TX mode:

Remark:

1. **Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)**
2. **Margin = Limit – Quasi-Peak/ MAX Peak/ Average**
3. **A symbol ($\text{dB } \mu\text{V/m}$) in the test plot below means (dB $\mu\text{V/m}$)**
4. **For below 1GHz**

QP Level @Spectrum Overview H	QP Level @Spectrum Overview V	QP Level @Final Results	QP Limit
For above 1GHz			
PK Level @Spectrum Overview H	PK Level @Spectrum Overview V	PK Level @Final Results	PK Limit
AVG Level @Spectrum Overview H	AVG Level @Spectrum Overview V	AVG Level @Final Results	AVG Limit

Wi-Fi 2.4G

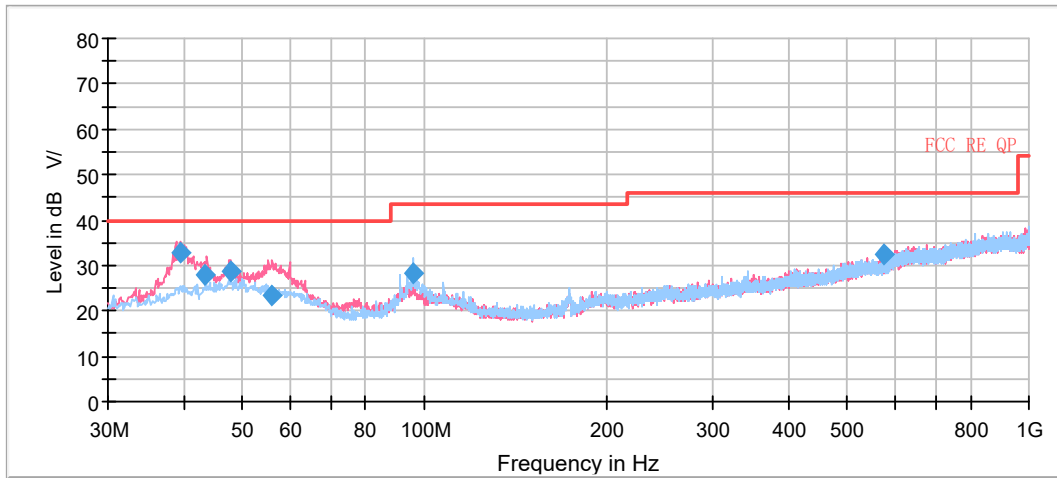


Radiates Emission from 30MHz to 1GHz

Frequency (MHz)	Quasi-Peak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Polarization	Azimuth (deg)	Correct Factor (dB)
39.457500	32.90	40.00	7.10	1000.0	109.0	V	323.0
43.502500	28.04	40.00	11.96	1000.0	100.0	V	330.0
47.823750	28.63	40.00	11.37	1000.0	100.0	V	237.0
55.868750	23.23	40.00	16.77	1000.0	100.0	V	195.0
95.960000	28.35	43.50	15.15	1000.0	225.0	H	221.0
575.90875	32.28	46.00	23.72	1000.0	109.0	V	8.0

Remark: 1. Correction Factor = Antenna factor + Insertion loss (cable loss + amplifier gain)


2. Margin = Limit – Quasi-Peak

802.11b CH1

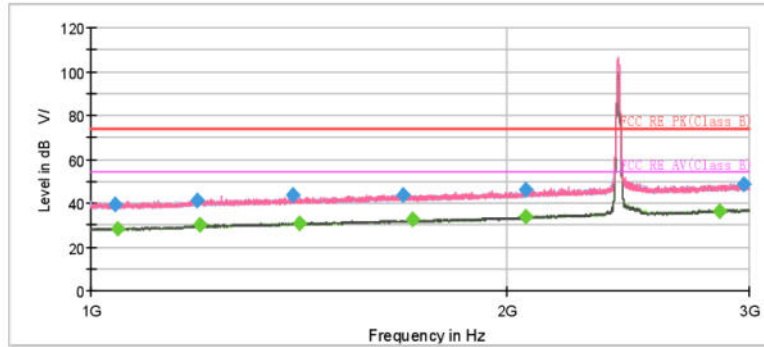

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1041.500000	39.09	---	74.00	34.91	500.0	200.0	H	212.0	-10.5
1045.500000	---	28.04	54.00	25.96	500.0	200.0	H	14.0	-10.5
1193.250000	41.53	---	74.00	32.47	500.0	100.0	H	120.0	-8.9
1200.000000	---	30.10	54.00	23.90	500.0	100.0	H	20.0	-8.8
1402.000000	43.94	---	74.00	30.06	500.0	200.0	V	344.0	-7.6
1415.500000	---	31.04	54.00	22.96	500.0	200.0	V	318.0	-7.5
1682.500000	43.99	---	74.00	30.01	500.0	200.0	V	0.0	-6.0
1709.250000	---	32.35	54.00	21.65	500.0	100.0	H	94.0	-5.9
2064.000000	45.91	---	74.00	28.09	500.0	200.0	H	204.0	-4.1
2068.250000	---	33.79	54.00	20.21	500.0	100.0	V	355.0	-4.0
2854.750000	---	36.53	54.00	17.47	500.0	200.0	H	165.0	-1.1
2975.000000	48.52	---	74.00	25.48	500.0	200.0	V	266.0	-0.7

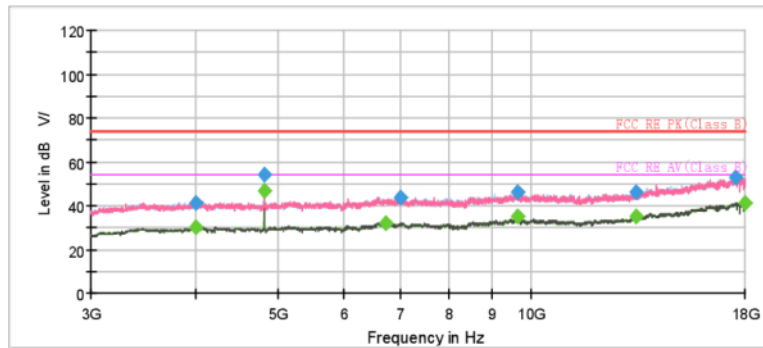

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3997.500000	41.38	---	74.00	32.62	500.0	200.0	H	318.0	-6.8
3999.375000	---	29.94	54.00	24.06	500.0	100.0	V	294.0	-6.8
4822.500000	---	46.94	54.00	7.06	500.0	200.0	H	121.0	-6.1
4822.500000	54.07	---	74.00	19.93	500.0	200.0	H	121.0	-6.1
6733.125000	---	31.93	54.00	22.07	500.0	100.0	V	232.0	-3.5
7010.625000	43.82	---	74.00	30.18	500.0	100.0	H	191.0	-3.0
9646.875000	---	34.93	54.00	19.07	500.0	200.0	V	0.0	-0.5
9648.750000	45.88	---	74.00	28.12	500.0	200.0	H	67.0	-0.5
13348.125000	---	35.13	54.00	18.87	500.0	100.0	V	0.0	2.4
13351.875000	46.06	---	74.00	27.94	500.0	200.0	H	273.0	2.4
17540.625000	52.69	---	74.00	21.31	500.0	200.0	H	294.0	9.9
18000.000000	---	41.49	54.00	12.51	500.0	200.0	H	264.0	11.2

802.11b CH6

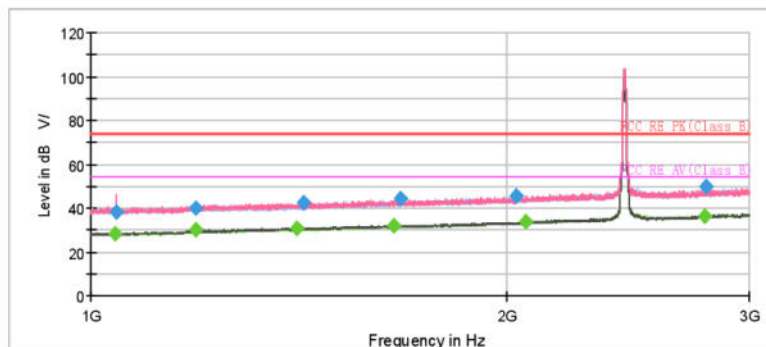

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1040.750000	---	28.18	54.00	25.82	500.0	200.0	H	283.0	-10.5
1043.250000	38.12	---	74.00	35.88	500.0	100.0	V	147.0	-10.5
1190.250000	---	30.45	54.00	23.55	500.0	100.0	H	250.0	-9.0
1190.750000	39.95	---	74.00	34.05	500.0	100.0	V	277.0	-9.0
1409.750000	---	30.91	54.00	23.09	500.0	200.0	V	327.0	-7.5
1425.750000	42.58	---	74.00	31.42	500.0	100.0	H	160.0	-7.4
1656.750000	---	32.21	54.00	21.79	500.0	100.0	H	319.0	-6.1
1676.750000	44.04	---	74.00	29.96	500.0	100.0	V	96.0	-6.1
2033.500000	45.32	---	74.00	28.68	500.0	100.0	V	151.0	-4.3
2065.000000	---	33.88	54.00	20.12	500.0	100.0	V	36.0	-4.1
2788.500000	---	36.05	54.00	17.95	500.0	200.0	H	287.0	-1.3
2789.250000	49.66	---	74.00	24.34	500.0	100.0	H	324.0	-1.3

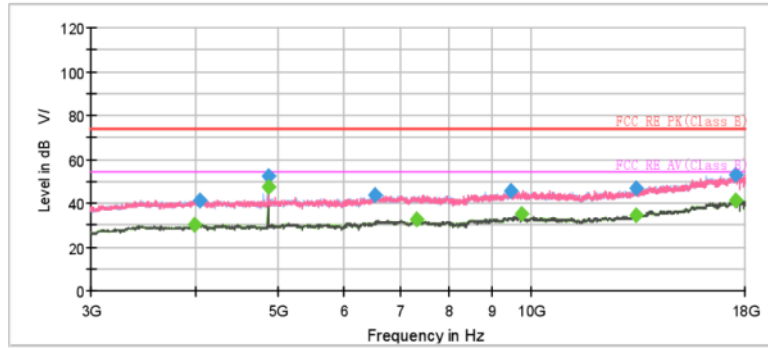

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3980.625000	---	29.87	54.00	24.13	500.0	100.0	V	325.0	-6.9
4038.750000	41.27	---	74.00	32.73	500.0	200.0	V	105.0	-6.7
4873.125000	---	47.41	54.00	6.59	500.0	200.0	H	121.0	-5.8
4873.125000	52.45	---	74.00	21.55	500.0	200.0	H	121.0	-5.8
6538.125000	43.46	---	74.00	30.54	500.0	200.0	H	154.0	-3.6
7308.750000	---	32.61	54.00	21.39	500.0	200.0	H	284.0	-3.0
9481.875000	45.42	---	74.00	28.58	500.0	100.0	V	263.0	0.0
9748.125000	---	35.06	54.00	18.94	500.0	100.0	V	0.0	-0.5
13333.125000	47.03	---	74.00	26.97	500.0	100.0	H	289.0	2.3
13350.000000	---	34.69	54.00	19.31	500.0	200.0	H	346.0	2.4
17514.375000	52.98	---	74.00	21.02	500.0	200.0	V	167.0	9.8
17535.000000	---	41.23	54.00	12.77	500.0	100.0	V	287.0	9.9

802.11b CH11

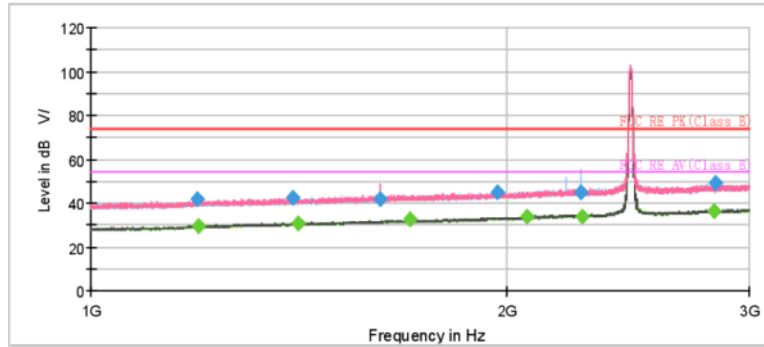

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1193.500000	41.87	---	74.00	32.13	500.0	100.0	H	91.0	-8.9
1197.000000	---	29.55	54.00	24.45	500.0	100.0	H	268.0	-8.9
1401.000000	42.51	---	74.00	31.49	500.0	100.0	H	99.0	-7.6
1412.750000	---	31.05	54.00	22.95	500.0	100.0	V	69.0	-7.5
1619.500000	41.58	---	74.00	32.42	500.0	200.0	H	99.0	-6.3
1701.500000	---	32.32	54.00	21.68	500.0	100.0	V	134.0	-6.0
1973.000000	45.02	---	74.00	28.98	500.0	100.0	V	99.0	-4.7
2071.750000	---	33.70	54.00	20.30	500.0	100.0	H	99.0	-4.0
2266.250000	44.91	---	74.00	29.09	500.0	100.0	V	4.0	-3.0
2269.750000	---	34.14	54.00	19.86	500.0	200.0	V	54.0	-3.0
2828.000000	---	36.39	54.00	17.61	500.0	200.0	H	283.0	-1.1
2834.250000	49.18	---	74.00	24.82	500.0	100.0	H	194.0	-1.1

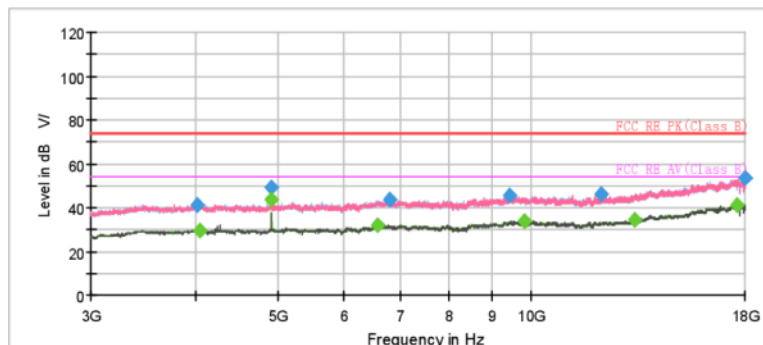

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4018.125000	41.40	---	74.00	32.60	500.0	100.0	H	78.0	-6.8
4036.875000	---	29.80	54.00	24.20	500.0	200.0	H	332.0	-6.7
4923.750000	---	43.83	54.00	10.17	500.0	200.0	H	120.0	-5.3
4923.750000	49.23	---	74.00	24.77	500.0	200.0	H	120.0	-5.3
6590.625000	---	32.09	54.00	21.91	500.0	200.0	H	0.0	-3.4
6795.000000	43.67	---	74.00	30.33	500.0	100.0	V	99.0	-3.2
9448.125000	45.48	---	74.00	28.52	500.0	100.0	V	319.0	-0.3
9847.500000	---	33.74	54.00	20.26	500.0	100.0	V	0.0	-0.4
12118.125000	46.46	---	74.00	27.54	500.0	200.0	V	145.0	0.2
13320.000000	---	34.75	54.00	19.25	500.0	100.0	H	149.0	2.3
17632.500000	---	41.14	54.00	12.86	500.0	100.0	V	281.0	10.2
18000.000000	53.66	---	74.00	20.34	500.0	100.0	V	36.0	11.2

802.11g CH1

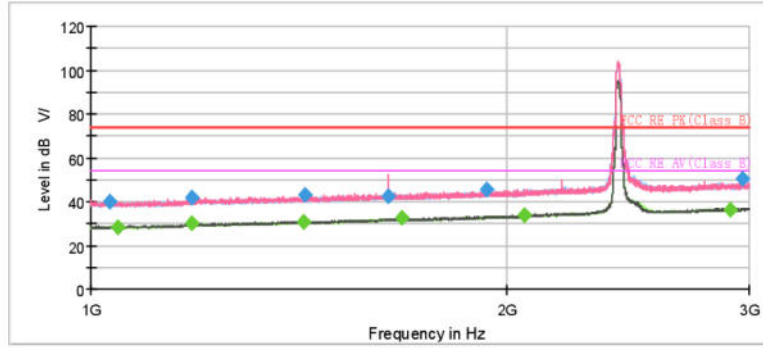

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.250000	39.94	---	74.00	34.06	500.0	100.0	H	235.0	-10.6
1045.500000	---	28.39	54.00	25.61	500.0	100.0	V	27.0	-10.5
1183.500000	---	29.88	54.00	24.12	500.0	100.0	V	70.0	-9.1
1184.250000	42.14	---	74.00	31.86	500.0	100.0	H	315.0	-9.1
1427.250000	---	30.96	54.00	23.04	500.0	200.0	V	191.0	-7.4
1429.500000	42.98	---	74.00	31.02	500.0	200.0	V	0.0	-7.4
1642.750000	42.23	---	74.00	31.77	500.0	100.0	H	248.0	-6.2
1680.750000	---	32.42	54.00	21.58	500.0	100.0	H	227.0	-6.0
1934.000000	45.82	---	74.00	28.18	500.0	100.0	H	214.0	-4.8
2063.750000	---	33.83	54.00	20.17	500.0	100.0	V	70.0	-4.1
2906.000000	---	36.50	54.00	17.50	500.0	200.0	H	124.0	-1.0
2966.000000	50.62	---	74.00	23.38	500.0	200.0	V	259.0	-0.8

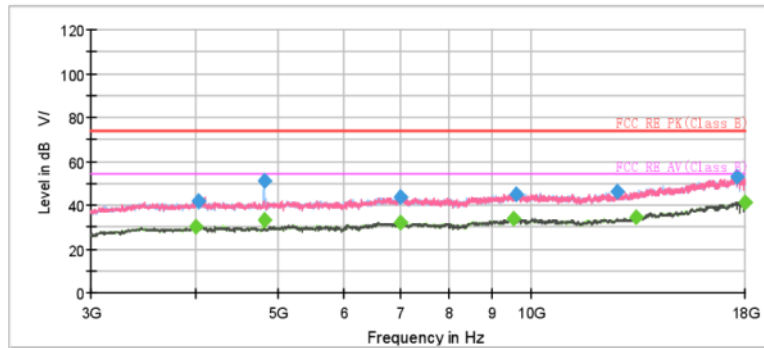

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4003.125000	---	30.04	54.00	23.96	500.0	100.0	V	298.0	-6.8
4029.375000	41.70	---	74.00	32.30	500.0	100.0	V	174.0	-6.8
4820.625000	---	33.41	54.00	20.59	500.0	200.0	H	227.0	-6.1
4820.625000	51.23	---	74.00	22.77	500.0	200.0	H	227.0	-6.1
7005.000000	43.64	---	74.00	30.36	500.0	200.0	H	135.0	-3.0
7008.750000	---	32.18	54.00	21.82	500.0	100.0	H	60.0	-3.0
9560.625000	---	33.86	54.00	20.14	500.0	100.0	H	7.0	-0.4
9603.750000	45.20	---	74.00	28.80	500.0	200.0	V	11.0	-0.7
12695.625000	45.88	---	74.00	28.12	500.0	200.0	H	270.0	0.6
13335.000000	---	34.67	54.00	19.33	500.0	100.0	H	31.0	2.3
17634.375000	52.72	---	74.00	21.28	500.0	200.0	V	207.0	10.2
17996.250000	---	41.40	54.00	12.60	500.0	200.0	H	21.0	11.1

802.11g CH6

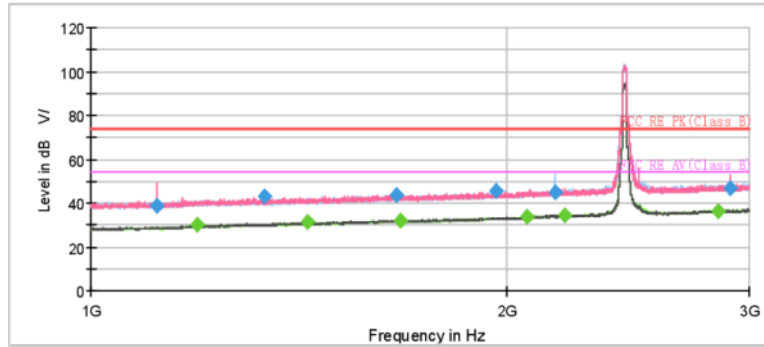

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1116.000000	38.86	---	74.00	35.14	500.0	100.0	H	186.0	-10.0
1195.500000	---	29.90	54.00	24.10	500.0	100.0	V	142.0	-8.9
1336.000000	43.33	---	74.00	30.67	500.0	200.0	V	103.0	-8.0
1436.000000	---	31.09	54.00	22.91	500.0	100.0	V	223.0	-7.4
1666.250000	43.87	---	74.00	30.13	500.0	100.0	V	75.0	-6.1
1677.250000	---	32.13	54.00	21.87	500.0	200.0	V	307.0	-6.1
1968.250000	45.55	---	74.00	28.45	500.0	100.0	V	23.0	-4.7
2071.000000	---	33.81	54.00	20.19	500.0	100.0	V	96.0	-4.0
2168.750000	44.71	---	74.00	29.29	500.0	100.0	V	45.0	-3.5
2203.000000	---	34.48	54.00	19.52	500.0	100.0	V	37.0	-3.3
2846.250000	---	36.33	54.00	17.67	500.0	200.0	H	27.0	-1.1
2906.750000	46.96	---	74.00	27.04	500.0	100.0	V	125.0	-1.0

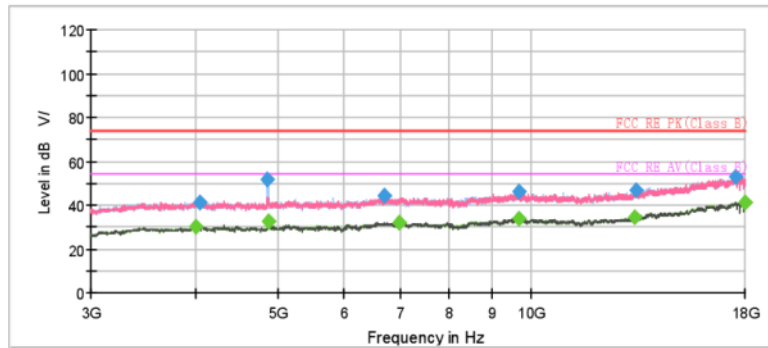

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3999.375000	---	29.98	54.00	24.02	500.0	100.0	V	224.0	-6.8
4042.500000	41.31	---	74.00	32.69	500.0	200.0	H	347.0	-6.7
4871.250000	52.00	---	74.00	22.00	500.0	200.0	H	238.0	-5.8
4875.000000	---	32.89	54.00	21.11	500.0	200.0	H	116.0	-5.8
6708.750000	44.48	---	74.00	29.52	500.0	100.0	H	334.0	-3.5
6978.750000	---	32.16	54.00	21.84	500.0	200.0	H	347.0	-2.9
9675.000000	---	33.59	54.00	20.41	500.0	100.0	H	123.0	-0.7
9686.250000	46.20	---	74.00	27.80	500.0	200.0	V	43.0	-0.7
13321.875000	---	34.76	54.00	19.24	500.0	100.0	H	61.0	2.3
13350.000000	46.68	---	74.00	27.32	500.0	100.0	V	257.0	2.4
17551.875000	52.84	---	74.00	21.16	500.0	100.0	H	147.0	10.0
18000.000000	---	41.29	54.00	12.71	500.0	100.0	H	90.0	11.2

802.11g CH11

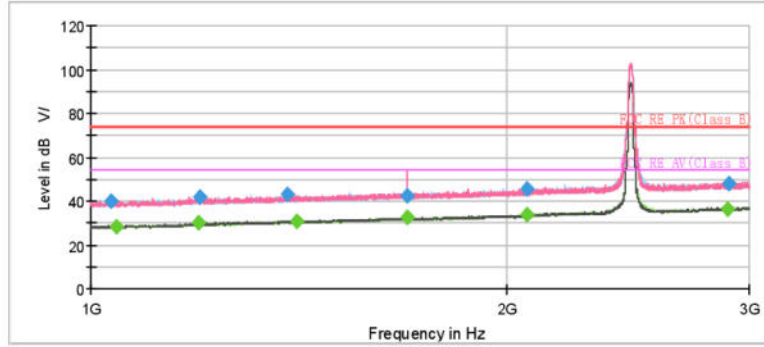

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1035.250000	40.12	---	74.00	33.88	500.0	200.0	H	358.0	-10.5
1042.750000	---	28.28	54.00	25.72	500.0	200.0	H	321.0	-10.5
1196.500000	---	29.86	54.00	24.14	500.0	100.0	V	323.0	-8.9
1198.250000	41.96	---	74.00	32.04	500.0	100.0	V	229.0	-8.8
1388.750000	42.78	---	74.00	31.22	500.0	100.0	V	327.0	-7.6
1411.750000	---	31.07	54.00	22.93	500.0	200.0	V	49.0	-7.5
1694.500000	42.20	---	74.00	31.80	500.0	200.0	H	115.0	-6.0
1694.750000	---	32.63	54.00	21.37	500.0	100.0	H	168.0	-6.0
2069.000000	45.55	---	74.00	28.45	500.0	100.0	V	208.0	-4.0
2069.250000	---	33.99	54.00	20.01	500.0	100.0	H	207.0	-4.0
2897.250000	---	36.31	54.00	17.69	500.0	200.0	H	230.0	-1.1
2900.000000	47.86	---	74.00	26.14	500.0	200.0	H	188.0	-1.0

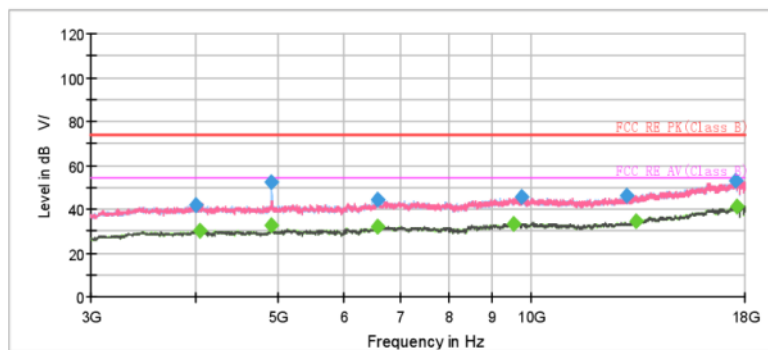

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3993.750000	41.65	---	74.00	32.35	500.0	100.0	H	74.0	-6.8
4040.625000	---	29.89	54.00	24.11	500.0	200.0	H	326.0	-6.7
4921.875000	---	32.46	54.00	21.54	500.0	200.0	H	340.0	-5.3
4923.750000	52.51	---	74.00	21.49	500.0	200.0	H	130.0	-5.3
6570.000000	44.03	---	74.00	29.97	500.0	200.0	V	18.0	-3.4
6588.750000	---	32.04	54.00	21.96	500.0	100.0	H	184.0	-3.4
9530.625000	---	33.51	54.00	20.49	500.0	200.0	H	212.0	-0.2
9759.375000	45.26	---	74.00	28.74	500.0	100.0	V	102.0	-0.5
12995.625000	45.87	---	74.00	28.13	500.0	100.0	V	350.0	1.4
13348.125000	---	34.62	54.00	19.38	500.0	200.0	H	74.0	2.4
17525.625000	53.10	---	74.00	20.90	500.0	200.0	H	240.0	9.9
17625.000000	---	41.45	54.00	12.55	500.0	200.0	V	0.0	10.2

802.11n (HT20) CH1

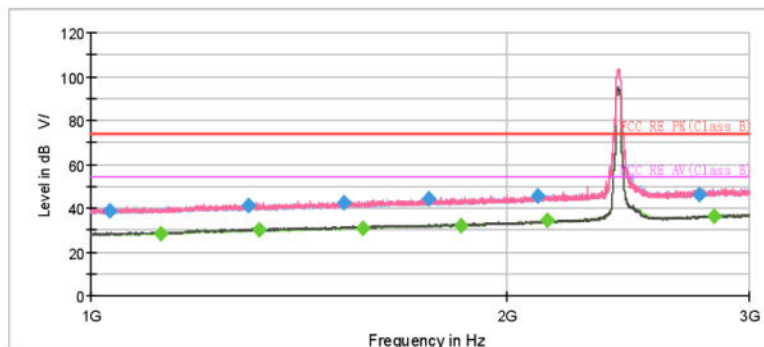

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1032.750000	38.91	---	74.00	35.09	500.0	100.0	V	5.0	-10.6
1122.750000	---	28.24	54.00	25.76	500.0	100.0	H	215.0	-9.9
1301.750000	41.03	---	74.00	32.97	500.0	200.0	V	297.0	-8.2
1323.250000	---	30.31	54.00	23.69	500.0	100.0	V	48.0	-8.0
1524.250000	42.22	---	74.00	31.78	500.0	100.0	H	294.0	-6.9
1574.000000	---	30.80	54.00	23.20	500.0	100.0	H	0.0	-6.6
1758.000000	44.09	---	74.00	29.91	500.0	200.0	H	105.0	-5.7
1854.750000	---	32.20	54.00	21.80	500.0	200.0	H	240.0	-5.2
2106.500000	45.27	---	74.00	28.73	500.0	200.0	H	158.0	-3.7
2142.250000	---	34.40	54.00	19.60	500.0	100.0	H	207.0	-3.5
2758.250000	46.02	---	74.00	27.98	500.0	200.0	H	202.0	-1.5
2826.750000	---	36.51	54.00	17.49	500.0	200.0	H	0.0	-1.1

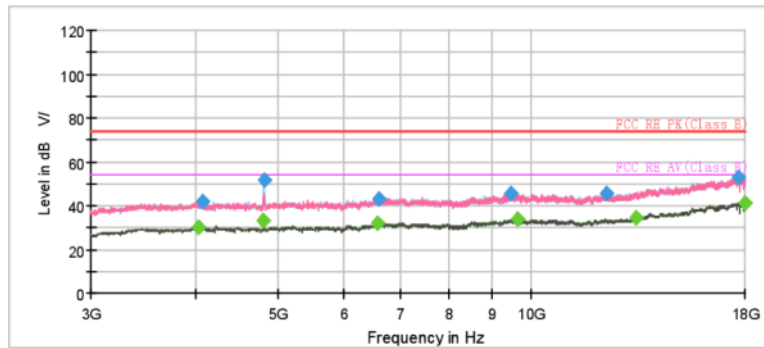

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4033.125000	---	29.86	54.00	24.15	500.0	100.0	V	206.0	-6.8
4078.125000	41.81	---	74.00	32.19	500.0	100.0	V	336.0	-6.6
4816.875000	---	33.44	54.00	20.56	500.0	200.0	H	135.0	-6.1
4826.250000	51.70	---	74.00	22.30	500.0	200.0	H	126.0	-6.1
6588.750000	---	32.05	54.00	21.95	500.0	200.0	V	144.0	-3.4
6607.500000	43.23	---	74.00	30.77	500.0	100.0	V	285.0	-3.3
9481.875000	45.30	---	74.00	28.70	500.0	100.0	V	0.0	0.0
9667.500000	---	33.61	54.00	20.39	500.0	100.0	V	77.0	-0.6
12298.125000	45.49	---	74.00	28.51	500.0	100.0	H	123.0	0.2
13350.000000	---	34.76	54.00	19.24	500.0	200.0	H	207.0	2.4
17668.125000	53.13	---	74.00	20.87	500.0	100.0	V	299.0	10.2
17998.125000	---	41.37	54.00	12.63	500.0	200.0	V	130.0	11.1

802.11n (HT20) CH6

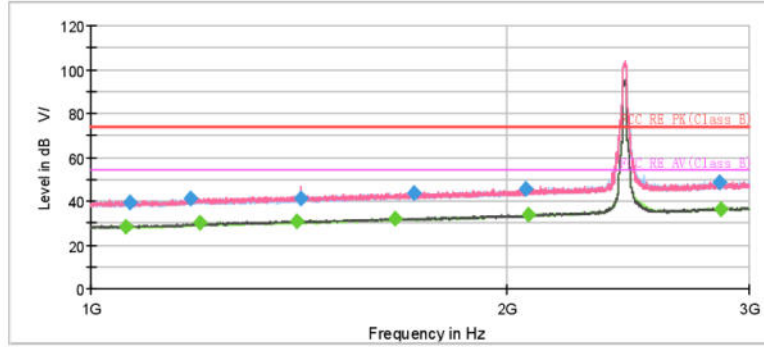

Final Result


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1061.250000	---	28.33	54.00	25.67	500.0	200.0	H	298.0	-10.4
1068.000000	39.43	---	74.00	34.57	500.0	200.0	H	102.0	-10.3
1180.250000	41.27	---	74.00	32.73	500.0	200.0	V	276.0	-9.2
1198.500000	---	30.01	54.00	23.99	500.0	100.0	V	29.0	-8.8
1410.000000	---	30.98	54.00	23.02	500.0	100.0	V	141.0	-7.5
1420.500000	40.98	---	74.00	33.02	500.0	100.0	H	243.0	-7.4
1660.500000	---	32.21	54.00	21.79	500.0	200.0	V	306.0	-6.1
1715.750000	43.72	---	74.00	30.28	500.0	100.0	V	59.0	-5.9
2064.000000	45.81	---	74.00	28.19	500.0	100.0	H	230.0	-4.1
2074.000000	---	33.99	54.00	20.01	500.0	100.0	V	0.0	-4.0
2857.750000	48.34	---	74.00	25.66	500.0	100.0	H	212.0	-1.1
2863.250000	---	36.38	54.00	17.62	500.0	200.0	H	46.0	-1.1

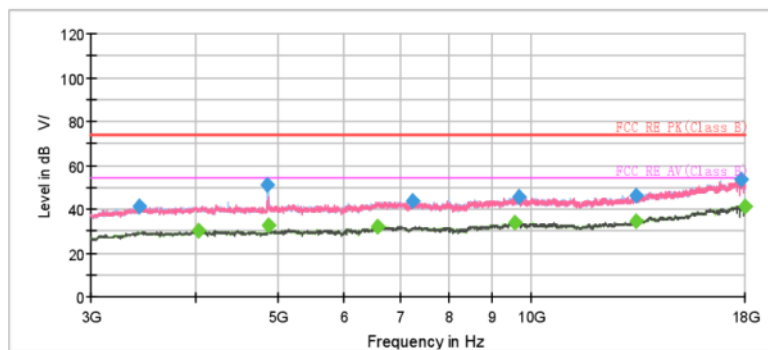

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3427.500000	41.33	---	74.00	32.67	500.0	200.0	H	333.0	-8.5
4035.000000	---	29.99	54.00	24.01	500.0	100.0	H	294.0	-6.7
4871.250000	50.84	---	74.00	23.16	500.0	200.0	H	120.0	-5.8
4873.125000	---	32.61	54.00	21.39	500.0	200.0	H	106.0	-5.8
6568.125000	---	31.99	54.00	22.01	500.0	200.0	V	177.0	-3.4
7235.625000	43.60	---	74.00	30.40	500.0	100.0	V	259.0	-2.9
9596.250000	---	33.73	54.00	20.27	500.0	200.0	V	144.0	-0.7
9678.750000	45.28	---	74.00	28.72	500.0	100.0	V	338.0	-0.7
13346.250000	---	34.70	54.00	19.30	500.0	200.0	V	186.0	2.4
13350.000000	46.06	---	74.00	27.94	500.0	200.0	H	300.0	2.4
17791.875000	53.40	---	74.00	20.60	500.0	100.0	H	27.0	10.2
17998.125000	---	41.21	54.00	12.79	500.0	200.0	V	191.0	11.1

802.11n (HT20) CH11

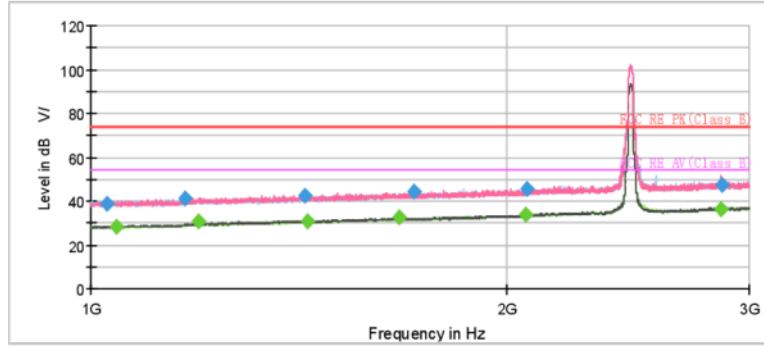

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1027.000000	38.50	---	74.00	35.50	500.0	200.0	H	287.0	-10.6
1044.750000	---	28.32	54.00	25.68	500.0	100.0	H	323.0	-10.5
1169.750000	41.04	---	74.00	32.96	500.0	100.0	H	176.0	-9.4
1197.250000	---	30.63	54.00	23.37	500.0	100.0	H	58.0	-8.9
1430.750000	42.43	---	74.00	31.57	500.0	100.0	V	318.0	-7.4
1435.750000	---	30.98	54.00	23.02	500.0	100.0	H	23.0	-7.4
1672.000000	---	32.34	54.00	21.66	500.0	100.0	H	0.0	-6.1
1715.500000	44.15	---	74.00	29.85	500.0	200.0	H	332.0	-5.9
2064.250000	---	33.87	54.00	20.13	500.0	200.0	V	16.0	-4.1
2072.750000	45.68	---	74.00	28.32	500.0	100.0	V	119.0	-4.0
2858.750000	---	36.48	54.00	17.52	500.0	200.0	H	230.0	-1.1
2866.750000	47.24	---	74.00	26.76	500.0	200.0	H	91.0	-1.1