

IOT3S Wi-Fi Module Specification

V1.0.1

Winner Micro

Beijing Winner Microelectronics Co., Ltd. (winner micro)

Address: 18th Floor, Yindu Building, No.67 Fucheng Road, Haidian District, Beijing, China

Tel: +86-10-62161900

Website: www.winnermicro.com/en

Document History

| Version | Complete Date | Revision Record | Autor | Auditor |
|---------|---------------|---------------------------------------------------------------------------|-------|---------|
| V1.0.0 | 2018-11-13 | Initial Release | Linda | Ray |
| V1.0.1 | 2019-02-28 | 1. Modify power consumption with new version SDK 2. Add IO description | Kevin | Ray |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Content

| | | |
|-----|-------------------------------|---|
| 1 | Introduction | 1 |
| 2 | Product Features | 1 |
| 2.1 | Interface..... | 1 |
| 2.2 | Wireless | 1 |
| 2.3 | Others | 2 |
| 3 | Product Specification..... | 2 |
| 4 | Interface | 3 |
| 5 | Reference Circuit Design..... | 4 |

1 Introduction

IOT3S is the Wi-Fi module based on IoT Wi-Fi SoC W600. It integrates stamp hole interface and PCB antenna. This Wi-Fi module can be used for smart appliance, smart home, smart toy and industry field.

2 Product Features

2.1 Interface

- Stamp hole interface with 2.0mm spacing
- 2 x UART ports, band rate range 1200bps~2Mbps
- 1 x High speed SPI with working frequency 0~50MHz
- Integrate PWM controller, max output frequency is 20MHz, max input frequency is 20MHz
- Integrate I²C
- Integrate GPIO
- Integrate I²S

2.2 Wireless

- Support GB15629.11-2006, IEEE802.11 b/g/n standard
- Frequency range: 2.4~2.4835 GHz
- Support Wi-Fi WMM/WMM-PS/WPA/WPA2/WPS
- Support Wi-Fi Direct
- Support EDCA channel access
- Support 20/40M bandwidth
- Support STBC, GreenField, Short-GI and reverse transmission
- Support RIFS interframe space
- Support AMPDU, AMSDU
- Support IEEE802.11n MCS 0~7, MCS32 transmission rate is up to 150Mbps
- Support Short Preamble in 2/5.5/11Mbps
- Support HT-immediate Compressed Block Ack, Normal Ack, No Ack
- Support CTS to self
- Support STA/AP/AP+STA function
- Support up to 32 multicast networks with different encryption methods in BSS
- As AP in BSS, the sum of sites and groups is up to 32 and in IBSS is up to 16

2.3 Others

- Support programmable GPIO control
- Support AT+command protocol based on ASCII code with UART interface
- Support multiple network protocols: TCP/UDP/ICMP/DHCP/DNS/HTTP
- Support DHCP Server, DNS Server
- Support extensible WEB server
- Support firmware online update

3 Product Specification

Table 3-1 Specification List

| | Item | Parameter | Note |
|----------|-----------------------|-------------------------------------------------------------------------------------------------------------------------------|------|
| Wi-Fi | Wi-Fi Mode | IEEE802.11b/g/n | |
| | RF Impedance | 50 Ω | |
| | SWR | <10dB | |
| | Frequency Range | 2.4~2.4835 GHz | |
| | Reception Sensitivity | 20MHz MCS7@-71dBm; 40MHz MCS7@-68dBm; 54Mbps@-73dBm; 11Mbps@-87dBm; 1Mbps@-95dBm; | |
| | Data Rate in PHY | 802.11n MCS 0~7 150Mbps | |
| | Modulation Mode | DSSS, OFDM, DBPSK, DQPSK, CCK, QAM16/64 | |
| | Output Power | IEEE802.11b, DSSS 1Mbps, POUT = +17dBm; IEEE802.11g, OFDM 54Mbps, POUT = +12dBm; IEEE802.11n, OFDM MCS7, POUT = +10dBm; | |
| Hardware | Interface | UART, SPI, GPIO, PWM, I ² C, I ² S | |
| | Data Rate | 2Mbps@UART (Max) | |
| | | 50Mbps@SPI (Max) | |
| | Working Voltage | 3.0V ~ 3.6V | |
| | Working Current | 20mA ~ 110mA | |
| | Working Humidity | 5%~90% (无凝结) | |
| | Storage Temperature | -40~+125 °C | |
| | Working Temperature | -40~+85 °C | |
| | Size | 16.0mm×24.0mm | |

| | | | |
|------|---------------------|--------------------------------|--|
| 软件部分 | Network Type | STA/AP/AP+STA/Wi-Fi Direct | |
| | Authentication | WEP/WPA-PSK/WPA2-PSK | |
| | Encryption | WEP64/WEP128/TKIP/CCMP (AES) | |
| | WPS | WPS | |
| | Energy Conservation | PS-POLL/Standby | |
| | Network Protocol | TCP/UDP/ARP/ICMP/DHCP/DNS/HTTP | |
| | Interface Protocol | AT+Command | |

4 Interface

IOT3S module is shown in Figure 4-1:

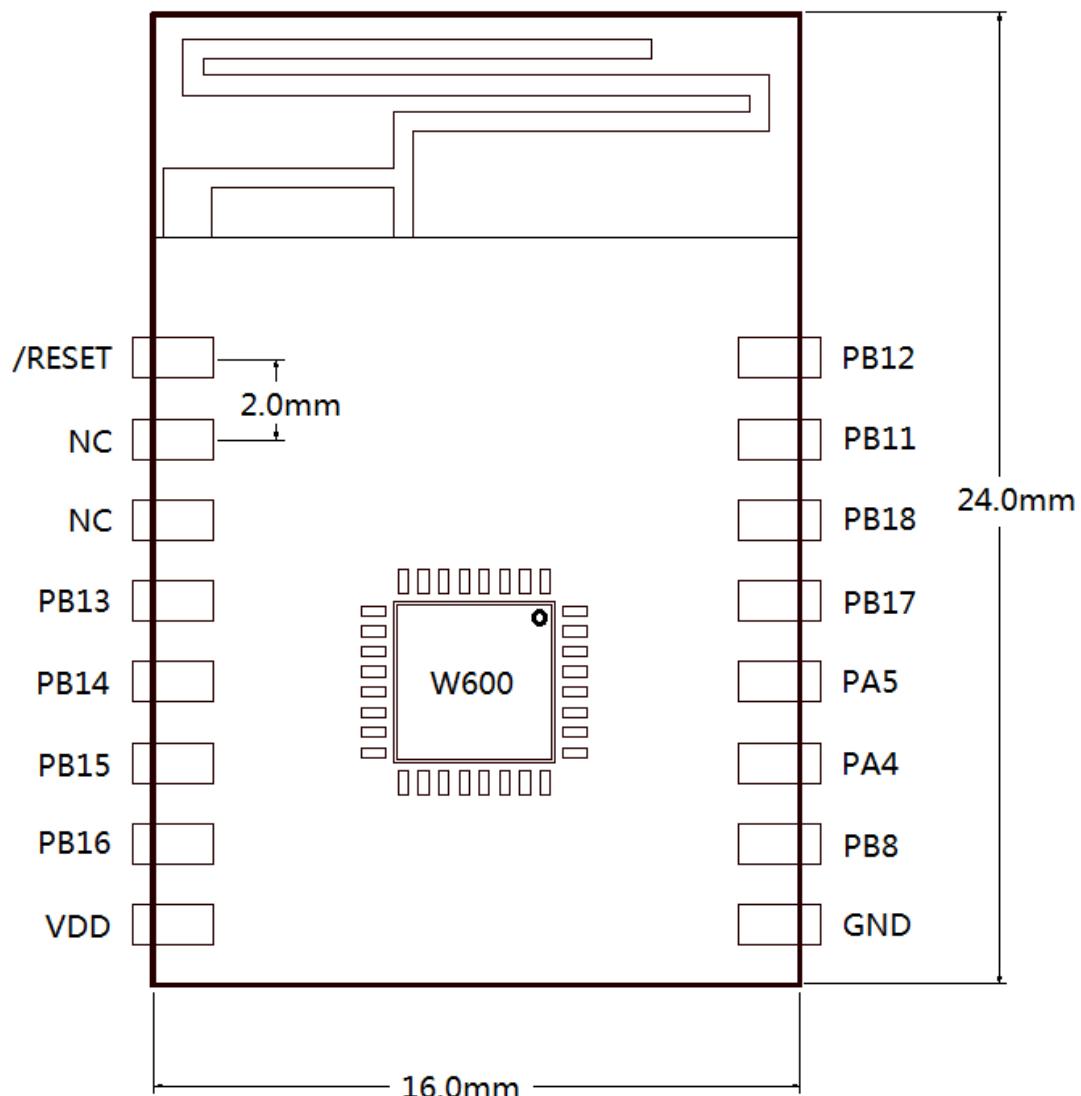


Figure 4-1 IOT3S

Table 4-1 PIN Description

| No. | Name | Type | Default Function | Reuse Function |
|-----|-------|------|------------------------|---------------------------------|
| 1 | RESET | I | RESET with low level | |
| 2 | NC | | | |
| 3 | NC | | | |
| 4 | PB_13 | I/O | PWM_2 | I ² C_SCL, GPIOPB_13 |
| 5 | PB_14 | I/O | H_SPI_INT | I ² C_DAT, GPIOPB_14 |
| 6 | PB_15 | I/O | H_SPI_CS | PWM_4, GPIOPB_15 |
| 7 | PB_16 | I/O | H_SPI_CK | PWM_3, GPIOPB_16 |
| 8 | VDD | P | Power supply with 3.3V | |
| 9 | GND | P | GND | |
| 10 | PB_8 | I/O | PWM_5 | GPIOPB_8 |
| 411 | PA_4 | I/O | UART0_TX | |
| 12 | PA_5 | I/O | UART0_RX | |
| 13 | PB_17 | I/O | H_SPI_DI | PWM_2, GPIOPB_17 |
| 14 | PB_18 | I/O | H_SPI_DO | PWM_1, GPIOPB_18 |
| 15 | PB_11 | I/O | UART1_RX | I ² C_SCL, GPIOPB_11 |
| 16 | PB_12 | I/O | UART1_TX | I ² C_DAT, GPIOPB_12 |

5 Reference Circuit Design

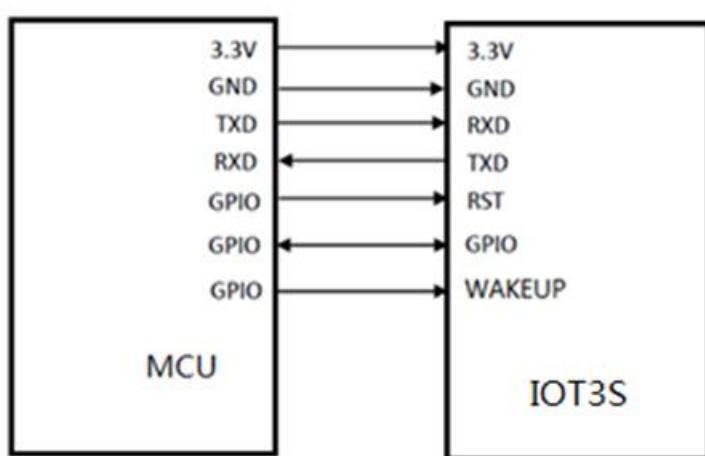


Figure 6-1 IOT3S Reference Design

FCC WARNING

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules.

Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:
"Contains Transmitter Module 2AGQ7-IOT3S"