


Edge Kiosk Specifications



Parameter	Specification
Mechanical	
Height	1950.1 mm
Depth	605 mm
Width	700 mm
Weight	Approx 180 kgs
Electrical	
Input Voltage	110/220V AC, IEC C14 Port available
Operating Power	335 W
Stand-by power	100 W
Maximum Power	450 W
Communications	Ethernet (RJ45) : Intel® Ethernet Controller i225-LM Bluetooth: 5.2 Wifi Supported: Intel® Wi-Fi 6 AX201 (Gig+)
Kiosk Hardware	
Supported Operating Systems	Windows 10
Processor	Intel Core i3 - 11th Generation
Memory and storage	8 GB RAM, 120GB SSD
Speakers	Dual speaker setup
MIC	Mono up to 3 ft Polar pattern: Omni-directional Frequency Range: 65Hz - 18kHz
LCD	32" LCD with touch screen Up to ten finger touch support Display Resolution: 1080*1920 28.3" Static LCD Display Resolution: 1920*470
Camera	Dual Lens Set up 5 MP B&W Camera 5 MP WDR Camera Liveness Detection Facial Detection

	Infrared LED Light
Cash Acceptor	Single note Acceptance Rate > 98% 4 way note insertion supported Note acceptance speed = 2.3 seconds
Sim Dispenser	Card issuing only, uses third party barcode scanner to read 2D or 3D codes ISO/IEC7810 Card supported Full size (86x54mm) Cards capacity = 175 pieces Up to 350 cards capacity Error Card bin capacity = 15 pieces
Receipt Printer	Direct thermal printer Print speed of up to 300 mm/sec Print resolution of 180 dpi Print width of 80 mm
Document Scanner	Reads ICAO compliant and not ICAO documents 5 MP Camera Resolution of 500 dpi OCR technology Milti Illuminations visible, IR, UV.
Barcode Scanner	1D and 2D Data capture support Image sensor = CMOS 1280*800 White LED illumination Laser diode or green LED aiming Scan rate of 60 frames per seconds
POS	Semi Embedded POS
UPS (Optional)	Up to 1kWh UPS provision available
Other features	Proximity Sensor x1 Door Sensors x4 LEDs for all hardwares Unique Locks for all doors Solenoid Lock protection for Vault

Outer Look:

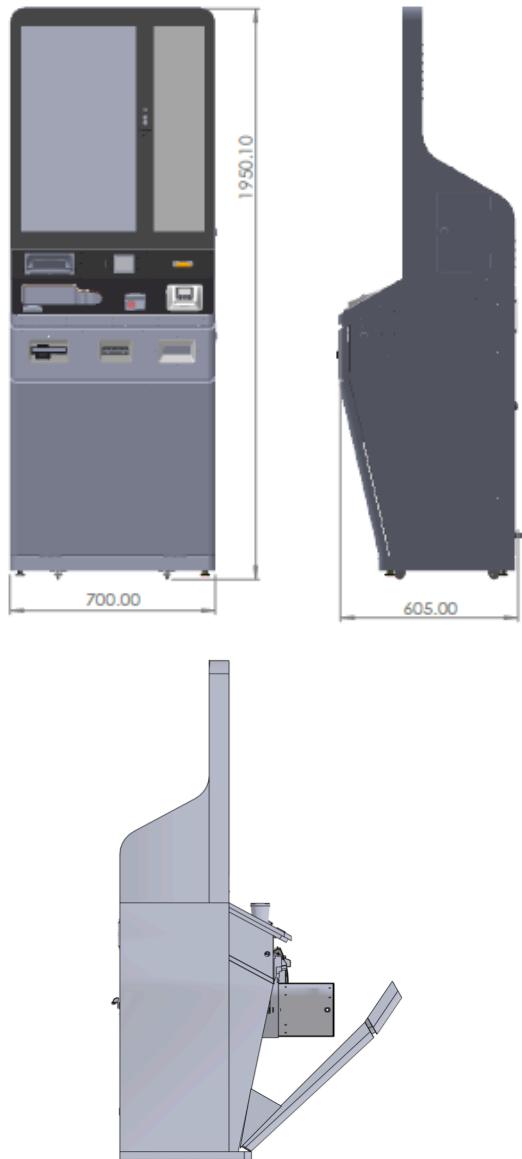

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

-Reorient or relocate the receiving antenna.

-Increase the separation between the equipment and receiver.

-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body