

TEST REPORT

For

EMV Android Validator

Model Number: FX925SF-ING-VWDC-PRE, 011P; FX925SF-ING-VPDC-PRE, 011P; FX925SF-ING-VWDC-PRE, 010P; FX925SF-ING-VPDC-PRE, 010P

FCC ID: 2AGQIFX925F

Report Number : WT218003684

Test Laboratory : Shenzhen Academy of Metrology and Quality Inspection
Site Location : NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China
Tel : 0086-755-86928965
Fax : 0086-755-86009898-31396
Web : www.smq.com.cn
E-mail : emcrf@smq.com.cn

Test report declaration

Applicant : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
Manufacturer : FAMOCO SAS
Address : 59 avenue Victor Hugo Paris, France
EUT Description : EMV Android Validator
Model No. : FX925SF-ING-VWDC-PRE, 011P;
FX925SF-ING-VPDC-PRE, 011P;
FX925SF-ING-VWDC-PRE, 010P;
FX925SF-ING-VPDC-PRE, 010P
Trade mark : Famoco
Serial Number : /
FCC ID : 2AGQIFX925F

Test Standards:

FCC Part 15 Subpart C 15.247 (2020)

The EUT described above is tested by Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory to determine the maximum emissions from the EUT. Shenzhen Academy of Metrology and Quality Inspection EMC Laboratory is assumed full responsibility for the accuracy of the test results.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.



Project Engineer:		Date:	Jan.12, 2022
	(Zhou Fangai 周芳媛)		
Checked by:		Date:	Jan.12, 2022
	(Shi Changda 施昌达)		
Approved by:		Date:	Jan.12, 2022
	(Lin Yixiang 林奕翔)		

TABLE OF CONTENTS

TEST REPORT DECLARATION.....	2
1. TEST RESULTS SUMMARY.....	5
2. GENERAL INFORMATION.....	6
2.1. Report Information	6
2.2. Laboratory Accreditation and Relationship to Customer	6
2.3. Measurement Uncertainty	7
3. PRODUCT DESCRIPTION	8
3.1. EUT Description	8
3.2. Related Submittal(s) / Grant (s).....	8
3.3. Block Diagram of EUT Configuration	8
3.4. Operating Condition of EUT	8
3.5. Support Equipment List.....	9
3.6. Test Conditions	9
3.7. Special Accessories	9
3.8. Equipment Modifications	9
4. TEST EQUIPMENT USED.....	10
5. CONDUCTED EMISSION TEST.....	11
5.1. Test Standard and Limit	11
5.2. Test Procedure.....	11
5.3. Test Arrangement	11
5.4. Test Data.....	11
6. RADIATED EMISSION TEST	14
6.1. Test Standard and Limit	14
6.2. Test Procedure.....	14
6.3. Test Arrangement	14
6.4. Test Data.....	14
7. 20DB BANDWIDTH MEASUREMENT	25
7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT.....	25
7.2. TEST PROCEDURE	25
7.3. TEST SETUP	25
7.4. Test Data.....	25
8. CARRIER FREQUENCY SEPARATION MEASUREMENT	28
8.1. LIMITS OF CARRIER FREQUENCY SEPARATION MEASUREMEN	28
8.2. TEST PROCEDURES.....	28
8.3. TEST SETUP	28
8.4. Test Data.....	28
9. NUMBER OF HOPPING CHANNEL.....	31
9.1. LIMITS OF NUMBER OF HOPPING CHANNEL.....	31
9.2. TEST PROCEDURE	31
9.3. TEST SETUP	31
9.4. Test Data.....	31
10. TIME OF OCCUPANCY.....	33
10.1. LIMITS OF TIME OF OCCUPANCY.....	33

10.2.	TEST PROCEDURE.....	33
10.3.	TEST RESULTS	33
11.	MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT.....	37
11.1.	LIMITS OF Peak Power.....	37
11.2.	TEST PROCEDURE.....	37
11.3.	TEST RESULTS	37
12.	BAND EDGES MEASUREMENT.....	40
12.1.	Limits of Band Edges Measurement.....	40
12.2.	TEST PROCEDURE.....	40
12.3.	Test Results.....	40
13.	CONDUCTED SPURIOUS EMISSIONS.....	49
13.1.	Limits of Band Edges Measurement.....	49
13.2.	Test Procedure	49
13.3.	TEST RESULTS	49
14.	ANTENNA REQUIREMENTS	54
14.1.	Antenna Connector.....	54
14.2.	Antenna Gain.....	54
15.	APPENDIX I PRODUCT EQUALITY DECLARATION.....	55

1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	FCC Rules	Test Results
20dB bandwidth measurement	15.247 (a) (1)	Pass
Carrier frequency separation measurement	15.247 (a) (1)	Pass
Number of hopping channel	15.247 (a) (1) III	Pass
Time of occupancy	15.247 (a) (1) III	Pass
Maximum conducted output power	15.247 (b) (1)	Pass
Band edge compliance measurement	15.247 (d)	Pass
Radiated spurious emission & Radiated restricted band measurement	15.247 (d) / 15.205 & 15.209	Pass
Conducted spurious emission	15.247 (d)	Pass
Conducted emission	15.207	Pass
Antenna requirements	15.203	Pass

Remark: "N/A" means "Not applicable."

2. GENERAL INFORMATION

2.1. Report Information

This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the time of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that SMQ approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that SMQ in any way guarantees the later performance of the product/equipment.

The sample/s mentioned in this report is/are supplied by Applicant, SMQ therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.

Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through SMQ, unless the applicant has authorized SMQ in writing to do so.

The lab will not be liable for any loss or damage resulting for false, inaccurate, inappropriate or incomplete product information provided by the applicant/manufacturer.

2.2. Laboratory Accreditation and Relationship to Customer

The testing report were performed by the Shenzhen Academy of Metrology and quality Inspection EMC Laboratory (Guangdong EMC compliance testing center), in their facilities located at NETC Building, No.4 Tongfa Rd., Xili, Nanshan, Shenzhen, China. At the time of testing, Laboratory is accredited by the following organizations:

China National Accreditation Service for Conformity Assessment (CNAS) accredits the Laboratory for conformance to FCC standards, EMC international standards and EN standards. The Registration Number is CNAS L0579.

The Laboratory is Accredited Testing Laboratory of FCC with Designation number CN1165 and Site registration number 582918.

The Laboratory is registered to perform emission tests with Innovation, Science and Economic Development (ISED), and the registration number is 11177A.

The Laboratory is registered to perform emission tests with VCCI, and the registration number are C-20048, G20076, R-20077, R-20078 and T-20047.

The Laboratory is Accredited Testing Laboratory of American Association for Laboratory Accreditation (A2LA) and certificate number is 3292.01.

2.3. Measurement Uncertainty

Conducted Emission

9 kHz~150 kHz U=3.7dB k=2

150 kHz~30MHz U=3.3dB k=2

Radiated Emission

30MHz~1000MHz U=4.3dB k=2

1GHz~6GHz U=4.6 dB k=2

6GHz~40GHz U=5.1dB k=2

3. PRODUCT DESCRIPTION

NOTE: The extreme test conditions for temperature and antenna gain were declared by the manufacturer.

3.1. EUT Description

Description : EMV Android Validator
Manufacturer : FAMOCO SAS
Model Number : FX925SF-ING-VWDC-PRE, 011P;
FX925SF-ING-VPDC-PRE, 011P;
FX925SF-ING-VWDC-PRE, 010P;
FX925SF-ING-VPDC-PRE, 010P
Operate Frequency : 2.402GHz~2.480GHz
Antenna Designation : BT: PIFA ANTENNA +1.3dBi
Operating voltage : 10.8V (Low)/12V (Nominal)/ 13.2V (Max)
Software Version : MOLY.LR12A.R2.MP.V44.1.P1
Hardware Version : FX925F-P


Remark: This is test report is for application of FCC ID: 2AGQIFX925F, which consists of reuse data of FCC ID: 2AGQIFX205. This report updates the standard FCC Part 15 15.209, 15.247(2018) to FCC Part 15 Subpart C 15.247 (2020). See the APPENDIX I Product Equality Declaration for the differences between the new model(FX925SF-ING-VWDC-PRE, 011P; FX925SF-ING-VPDC-PRE, 011P; FX925SF-ING-VWDC-PRE, 010P; FX925SF-ING-VPDC-PRE, 010P) and the original model (FX925F PM, FX925F WM).

Considering above changes, in this test report, only the worst case of Conducted emission, Radiated Bandedge and Radiated spurious emission was re-tested, the other test data were reused the original test report No.: WT198005839.

3.2. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for FCC ID: **2AGQIFX925F** filing to comply with Section 15.207, 15.209, 15.247 of the FCC Part 15, Subpart C .

3.3. Block Diagram of EUT Configuration



3.4. Operating Condition of EUT

The transmitter has a maximum peak conducted output power of Basic rate GFSK modulation and EDR mode 8DPSK modulation. Tests were performed with Basic rate GFSK modulation and EDR mode 8DPSK modulation.

3.5. Support Equipment List

Table 2 Support Equipment List

Name	Model No.	S/N	Manufacturer
Adapter for EUT	LST-S72U12-A	---	ShenZhen GoldLister Power Source Co.,Ltd
Rechargeable Li-ion Polymer Battery for EUT	FX205 Series	---	Zhuhai Greaton Electronic Technology Co., Ltd
DC Battery	---	---	---
Keyboard	SK-2015	---	HP
Mouse	MSU1465	---	HP

3.6. Test Conditions

Date of re-test : Dec.27, 2021- Dec.30, 2021

Date of EUT Receive : Dec.10, 2021

Temperature: 20°C-25 °C

Relative Humidity: 45%-52%

Date of re-test : Oct.30, 2019- Nov.05, 2019

Date of EUT Receive : Oct.15, 2019

Temperature: 21°C-26 °C

Relative Humidity: 37%-54%

Date of test : Jun.29, 2019- Jul.17, 2019

Date of EUT Receive : Jun.20, 2019

Temperature: 22°C-26 °C

Relative Humidity: 41%-53%

3.7. Special Accessories

Not available for this EUT intended for grant.

3.8. Equipment Modifications

Not available for this EUT intended for grant.

4. TEST EQUIPMENT USED

Table 3 Test Equipment

No.	Equipment	Manufacturer	Model No.	Last Cal.	Cal. Interval
SB9058/05	Test Receiver	R&S	ESCI 3	Sep.24,2021	1 Year
SB4357	AMN	R&S	ENN216	Aug.25,2021	1 Year
SB9549	Shielded Room	Albatross	SR	Sep.24,2021	1 Year
SB15044/01	Test Receiver	R&S	ESW8	Sep.14,2021	1 Year
SB12944	Broadband Antenna	R&S	VULB9163	Jan.08,2021	1 Year
SB18844	Semi Anechoic Chamber	Albatross	9x6x6(m)	Mar.23,2021	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Feb.05,2021	1 Year
SB3435	Horn Antenna	R&S	HF906	Dec.16,2020	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Feb.05,2021	1 Year
SB8501/10	Horn Antenna	R&S	3160-09	Mar.10,2020	3 Years
SB8501/11	Horn Antenna	R&S	3160-09	Mar.09,2020	3 Years
SB8501/12	Horn Antenna	R&S	3160-10	Mar.17,2020	3 Years
SB8501/13	Horn Antenna	R&S	3160-10	Mar.10,2020	3 Years
SB8501/14	Pre-Amplifier	R&S	SCU-03	Feb.05,2021	1 Year
SB8501/15	Pre-Amplifier	R&S	SCU-03	Feb.05,2021	1 Year
SB8501/16	Pre-Amplifier	R&S	SCU 26	Feb.05,2021	1 Year
SB8501/17	Pre-Amplifier	R&S	SCU-18	Feb.05,2021	1 Year
SB9059	Preamplifier	R&S	SCU-40	Aug.25,2021	1 Year
SB9555/02	Fully Anechoic Chamber	Albatross	10.0x5.2x5.4(m)	Aug.25,2021	1 Year
SB12943	Test Receiver	R&S	ESR7	Dec.06,2018	1 Year
SB5472/02	Broadband Antenna	Schwarzbeck	VULB9163	May.31,2019	1 Year
SB8501/09	Test Receiver	R&S	ESU40	Mar.11,2019	1 Year
SB3435	Horn Antenna	R&S	HF906	Jan.01,2019	1 Year
SB9058/03	Pre-Amplifier	R&S	SCU 18	Feb.18,2019	1 Year
SB8501/10	Horn Antenna	R&S	3160-09	Mar.21,2017	3 Years
SB8501/11	Horn Antenna	R&S	3160-09	Mar.21,2017	3 Years
SB8501/12	Horn Antenna	R&S	3160-10	Mar.21,2017	3 Years
SB8501/13	Horn Antenna	R&S	3160-10	Mar.21,2017	3 Years
SB3345	Loop Antenna	Schwarzbeck	FMZB1516-113	Feb.20,2019	1 Year
SB8501/14	Pre-Amplifier	R&S	SCU-03	Feb.20,2019	1 Year
SB8501/15	Pre-Amplifier	R&S	SCU-03	Feb.20,2019	1 Year
SB8501/16	Pre-Amplifier	R&S	SCU 26	Feb.18,2019	1 Year
SB8501/17	Pre-Amplifier	R&S	SCU-18	Feb.20,2019	1 Year
SB9059	Preamplifier	R&S	SCU-40	Aug.27,2019	1 Year
SB7941/02	Signal Analyzer	R&S	FSU26	May.29,2019	1 Year

Table 4 Test software

Name	Manufacturer	Version
Bluetooth and WiFi Test System	Shenzhen JS tonscrend co.,ltd	2.6.88.0330

5. CONDUCTED EMISSION TEST

5.1. Test Standard and Limit

5.1.1. Test Standard

FCC Part 15 15.207

5.1.2. Test Limit

Table 5 Conducted Emission Test Limit

Frequency	Maximum RF Line Voltage (dB μ V)	
	Quasi-peak Level	Average Level
150kHz~500kHz	66 ~ 56 *	56 ~ 46 *
500kHz~5MHz	56	46
5MHz~30MHz	60	50

* Decreasing linearly with logarithm of the frequency

* The lower limit shall apply at the transition frequency.

5.2. Test Procedure

The EUT is put on a table of non-conducting material that is 80cm high. The vertical conducting wall of shielding is located 40cm to the rear of the EUT. The power line of the EUT is connected to the AC mains through a Artificial Mains Network (A.M.N.). A EMI test receiver is used to test the emissions from both sides of AC line. According to the requirements of ANSI C63.10-2020. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-Peak and average detector mode.

The bandwidth of EMI test receiver is set at 9 kHz.

5.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

5.4. Test Data


The emissions don't show in below are too low against the limits. Refer to the test curves.

Table 6 Conducted Emission Test Data


Test mode: Charging and Transmitting								
	Frequency (MHz)	Correction Factor (dB)	Quasi-Peak			Average		
			Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)	Reading (dB μ V)	Emission Level (dB μ V)	Limit (dB μ V)
Line	0.150	9.7	33.9	43.6	66	18.1	27.8	56
	0.244	9.7	26.4	36.1	62.0	16.5	26.2	52.0
	0.343	9.7	29.7	39.4	59.1	23.2	32.9	49.1
	1.572	9.8	10.3	20.1	56	1.5	11.3	46
	3.228	9.9	12.1	22.0	56	1.0	10.9	46
	16.395	9.9	18.7	28.6	60	13.3	23.2	50
Neutral	0.150	9.7	34.3	44.0	66	18.4	28.1	56
	0.204	9.7	28.1	37.8	63.4	15.3	25.0	53.4
	0.262	9.7	26.4	36.1	61.4	17.4	27.1	51.4
	0.339	9.7	31.1	40.8	59.2	23.7	33.4	49.2
	2.980	9.9	11.8	21.7	56	3.1	13.0	46
	16.660	9.9	19.0	28.9	60	13.6	23.5	50

REMARKS: 1. Emission level (dB μ V) =Read Value (dB μ V) + Correction Factor (dB)
 2. Correction Factor (dB) =LISN Factor (dB) + Cable Factor (dB) +Limiter Factor (dB)
 3. The other emission levels were very low against the limit.

Line

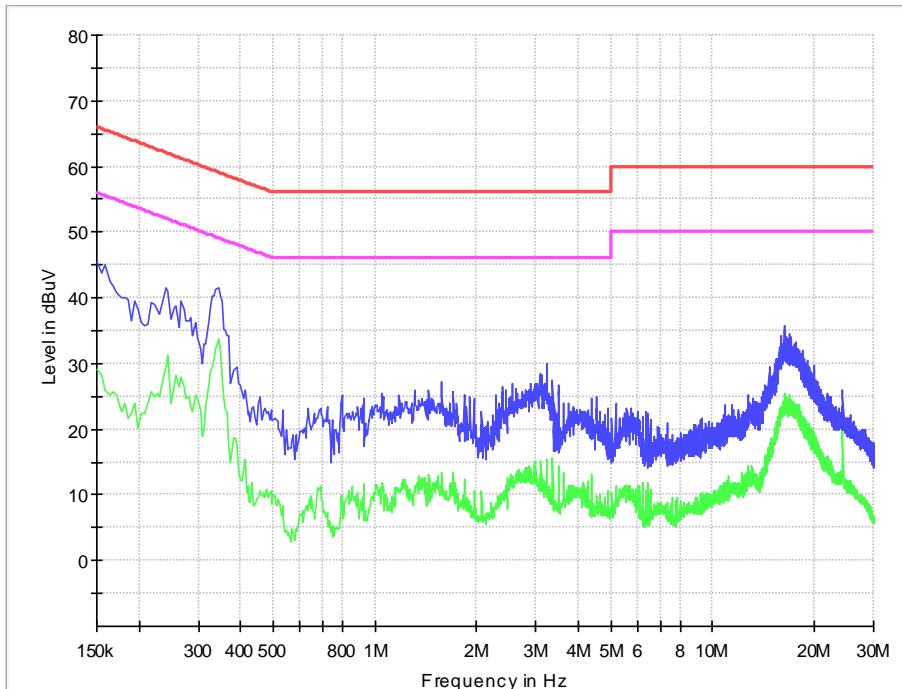

Neutral

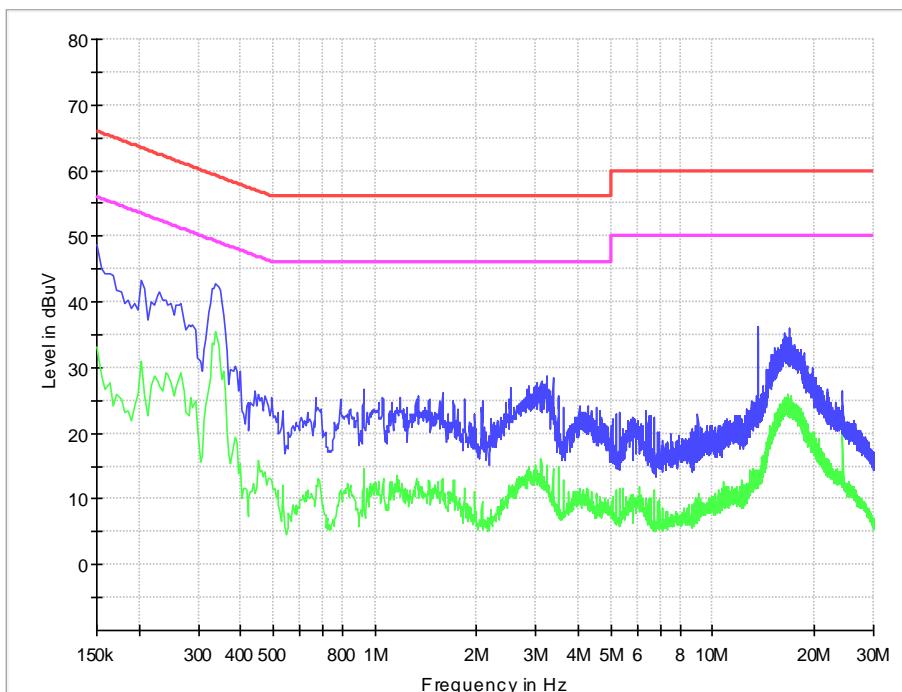

6. RADIATED EMISSION TEST

6.1. Test Standard and Limit

6.1.1. Test Standard

FCC Part 15 15.209

6.1.2. Test Limit

Table 7 Radiation Emission Test Limit for FCC (Class B) (9 kHz-1GHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

Table 8 Radiation Emission Test Limit for FCC (Class B) (Above 1G)

Frequency (MHz)	(dBuV/m) (at 3 meters)	
	PEAK	AVERAGE
Above 1000	74	54

* The lower limit shall apply at the transition frequency.

* The test distance is 3m.

6.2. Test Procedure

The EUT is placed on a non-conducting table 80 cm above the ground plane for measurement below 1GHz; 1.5 m above the ground plane for measurement above 1GHz. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.10-2020. The EUT is set to transmit in a continuous mode. Radiated measurements were performed on the frequency range from 30MHz to 25GHz. All readings from 30 MHz to 1 GHz are quasi-peak values with a resolution bandwidth of 120 kHz, $VBW \geq RBW$. All readings above 1 GHz are AV and PK values. $RBW = 1\text{MHz}$ and $1/T = (10\text{Hz})$ for AV value, $RBW = 1\text{MHz}$ and $VBW \geq RBW$ for peak value. Measurements were made at 3 meters

6.3. Test Arrangement

The arrangement of the equipment is installed to meet the standards and operating in a manner, which tends to maximize its emission characteristics in a normal application. The detailed information refers to test picture.

6.4. Test Data

The emissions don't show in following result tables are more than 20dB below the limits.

Bluetooth basic rate and Bluetooth EDR mode were tested, below only shows worst case result of Bluetooth basic rate.

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

9 kHz-30MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

Table 9 Radiated Emission Test Data 9k Hz-30MHz

Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Readings (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limits (dB μ V/m)	Margin (dB)	Note
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--
--	--	--	--	--	--	--	--	--

30MHz-1GHz

Worst case is shown below for 30MHz-1GHz only.

The emissions don't show in following result tables are more than 20dB below the limits.

Table 10 Radiated Emission Test Data 30MHz-1GHz


Frequency (MHz)	Cable Loss +preamp (dB)	Antenna Factor (dB)	Readings (dB μ V/m)	Level (dB μ V/m)	Polarity (H/V)	Limits (dB μ V/m)	Margin (dB)	Note
34.627	0.6	12.3	8.3	21.2	Vertical	40	18.8	QP
240.101	1.9	12.1	16.2	30.2	Vertical	46	15.8	QP
384.056	2.4	14.6	7.9	24.9	Vertical	46	21.1	QP
479.958	2.6	15.6	11.4	29.6	Vertical	46	16.4	QP
804.063	3.6	20.1	10.0	33.7	Vertical	46	12.3	QP
960.397	3.9	21.1	18.6	43.6	Vertical	54	10.4	QP
215.997	1.7	10.6	18.7	31.0	Horizontal	43.5	12.5	QP
240.126	1.9	12.1	22.0	36.0	Horizontal	46	10.0	QP
480.201	2.6	16.1	15.5	34.2	Horizontal	46	11.8	QP
720.397	3.4	18.8	-0.2	22.0	Horizontal	46	24.0	QP
749.982	3.5	18.8	11.0	33.3	Horizontal	46	12.7	QP
960.398	3.9	21.1	18.3	43.3	Horizontal	54	10.7	QP

Remark: Emission level (dB μ V)=Read Value(dB μ V/m) + Antenna Factor(dB)+ Cable Loss +preamp(dB)

30MHz-1GHz


Horizontal

ESW8 Field strength 30M-1GHz

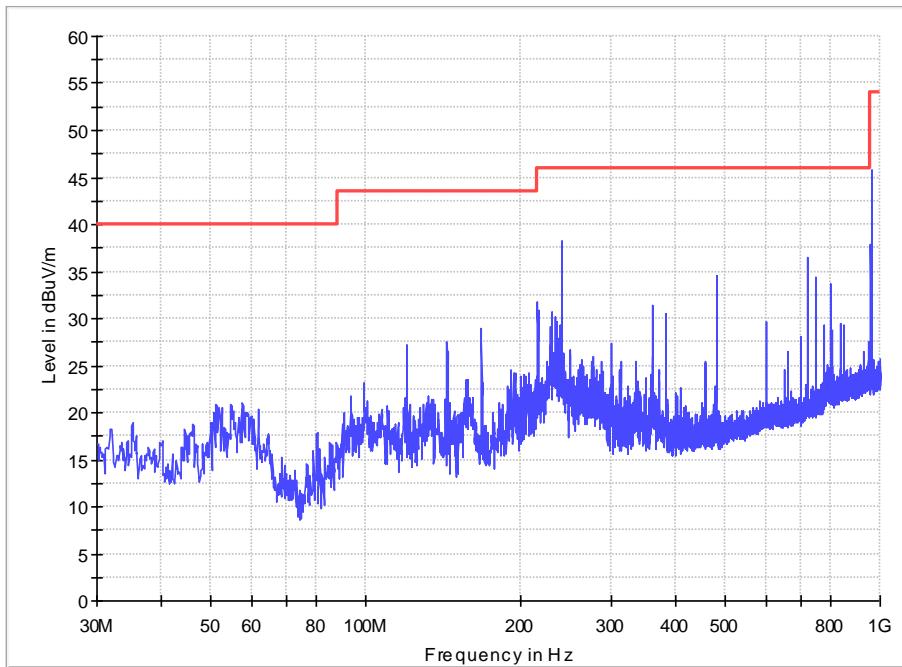

Vertical


ESW8 Field strength 30M-1GHz

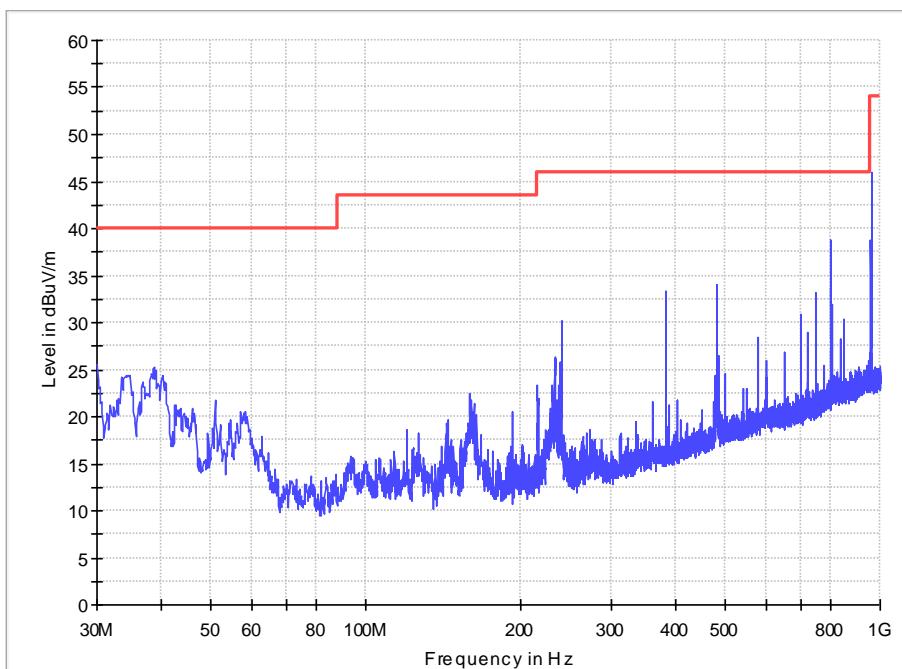


1GHz-18GHz

GFSK CH0

Horizontal

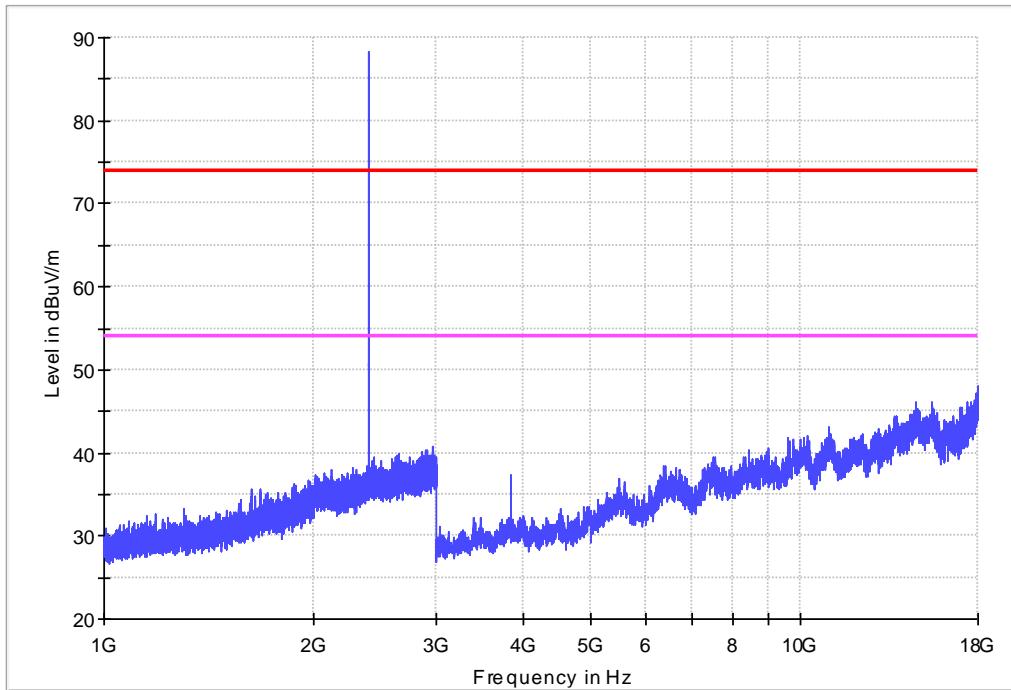


Vertical

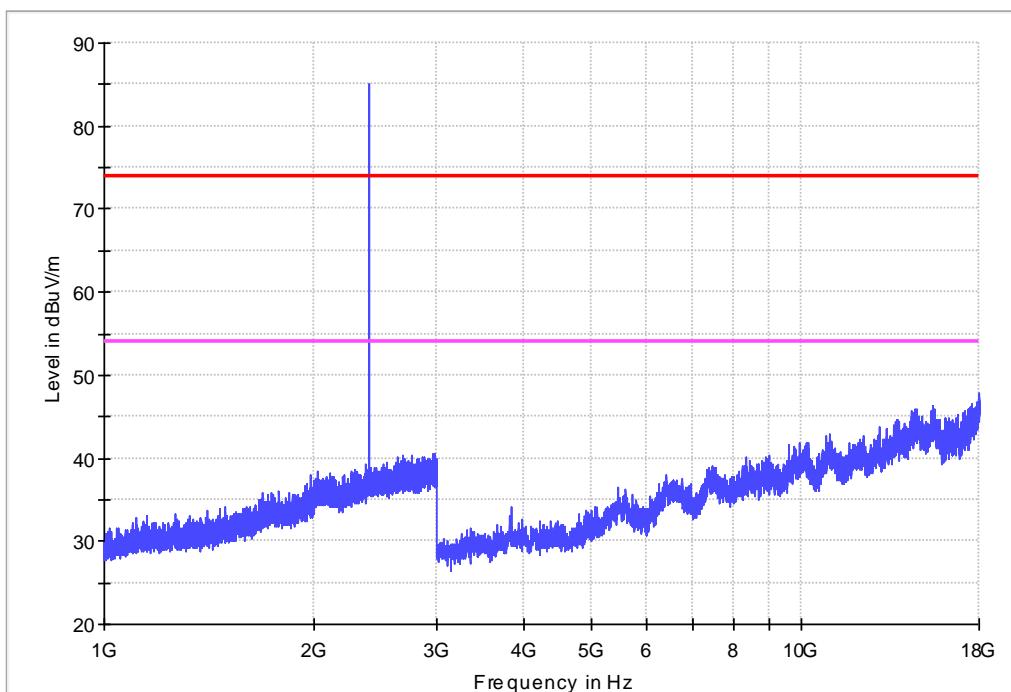


1GHz-18GHz

GFSK CH39

Horizontal

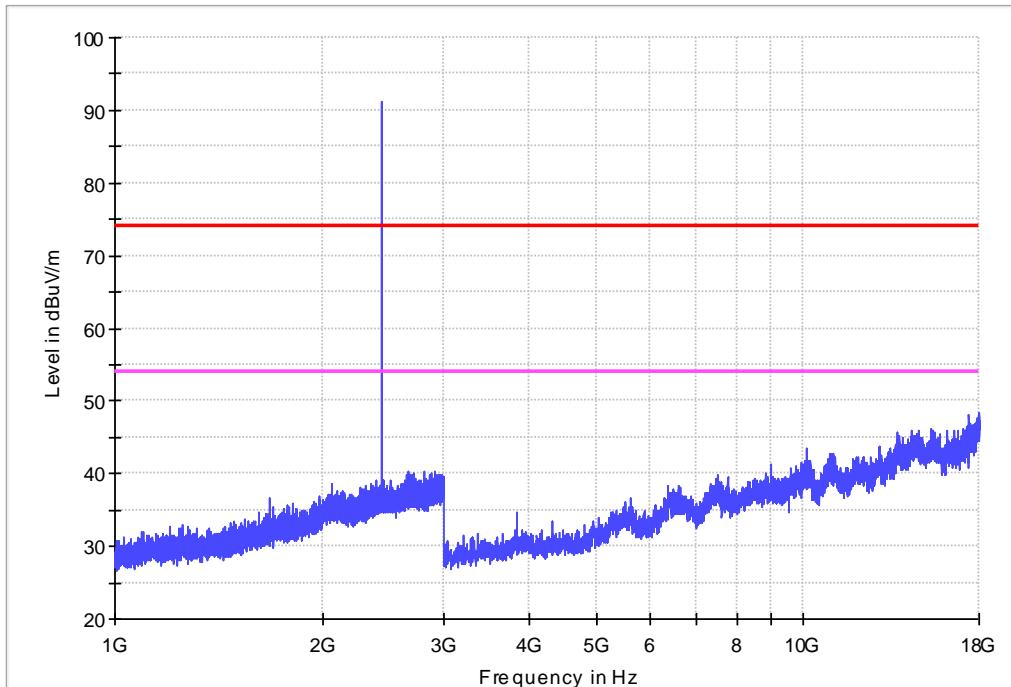


Vertical

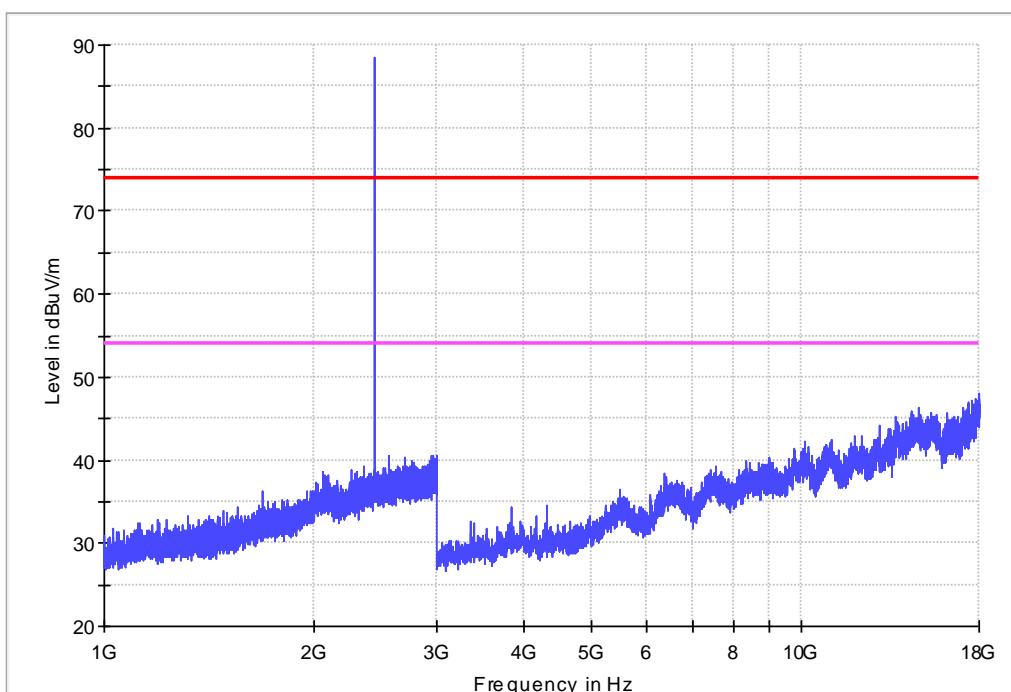


1GHz-18GHz

GFSK CH78

Horizontal

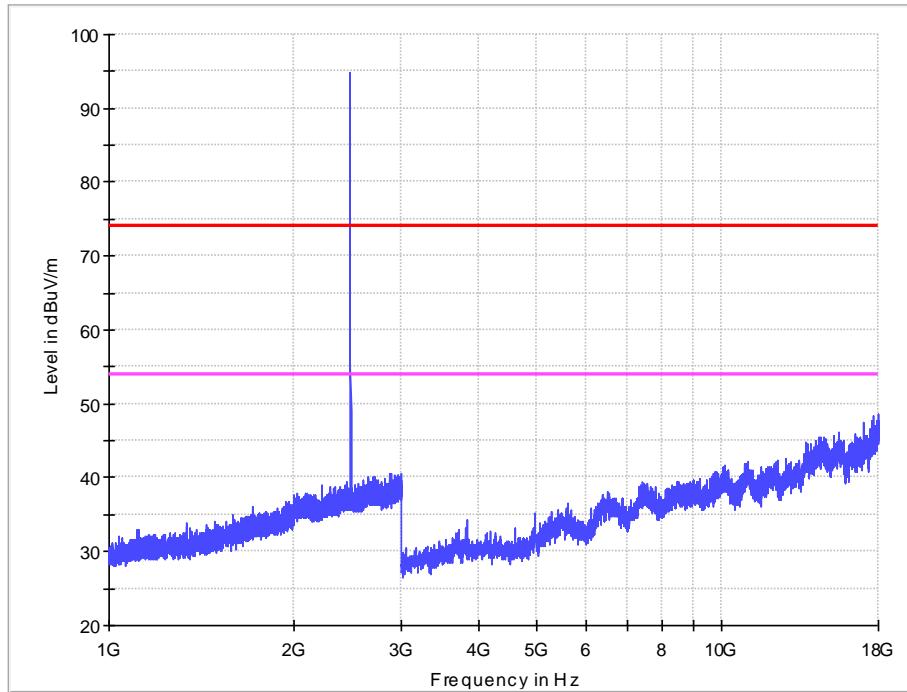


Vertical

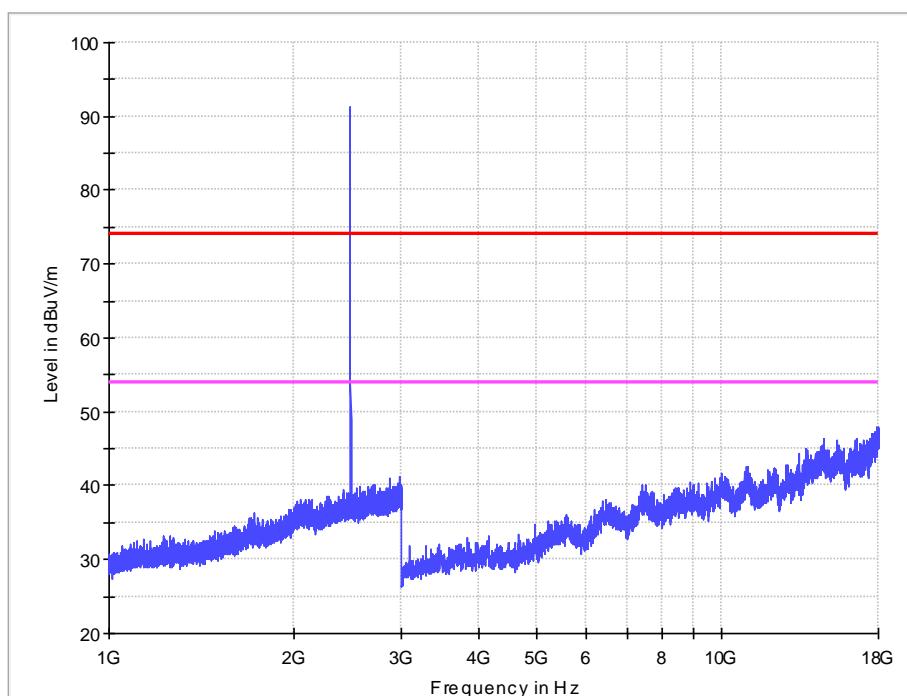


1GHz-18GHz

8PDSK CH0

Horizontal

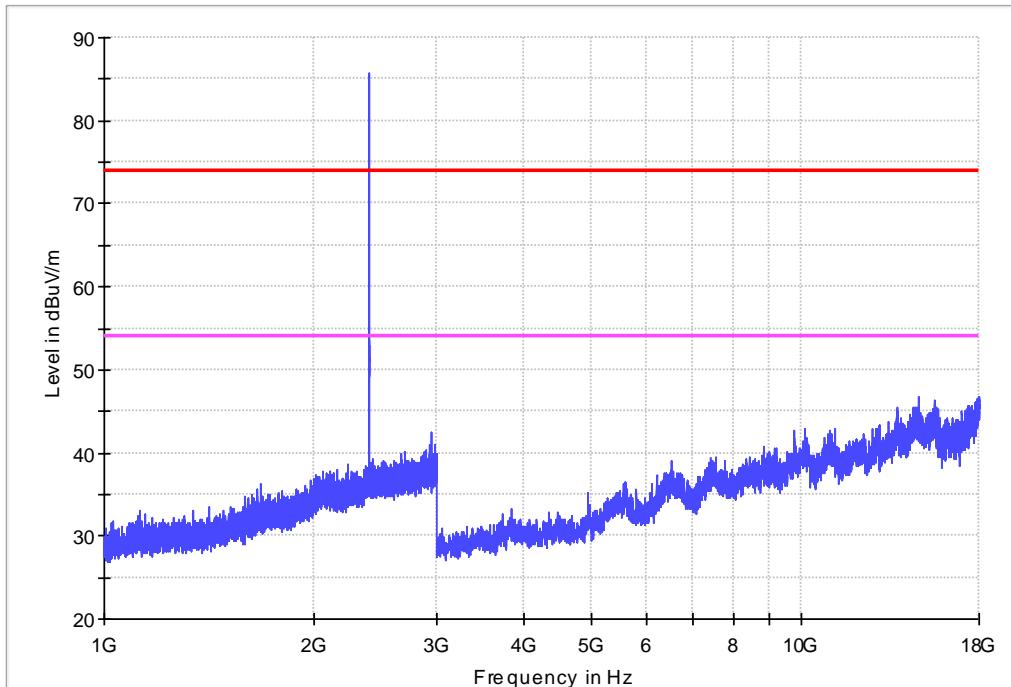


Vertical

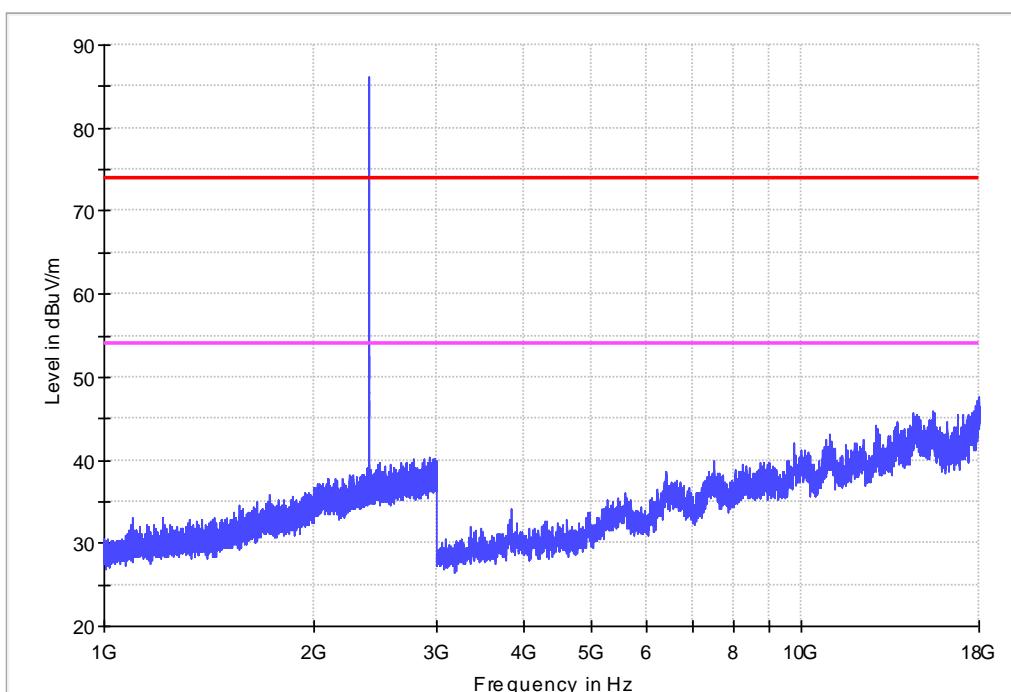


1GHz-18GHz

8PDSK CH39

Horizontal

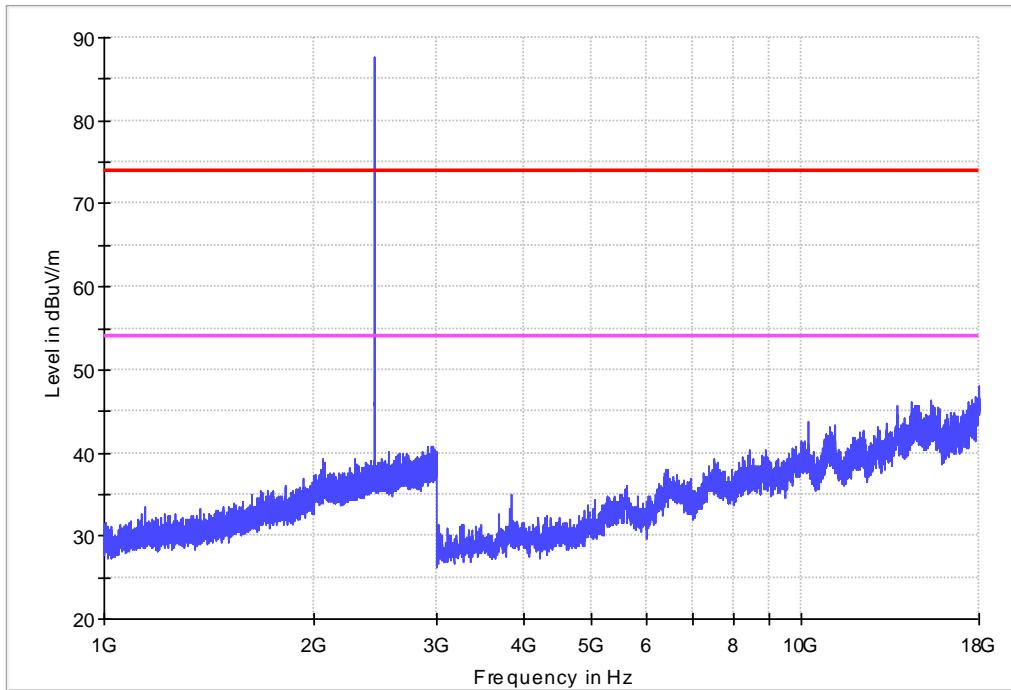


Vertical

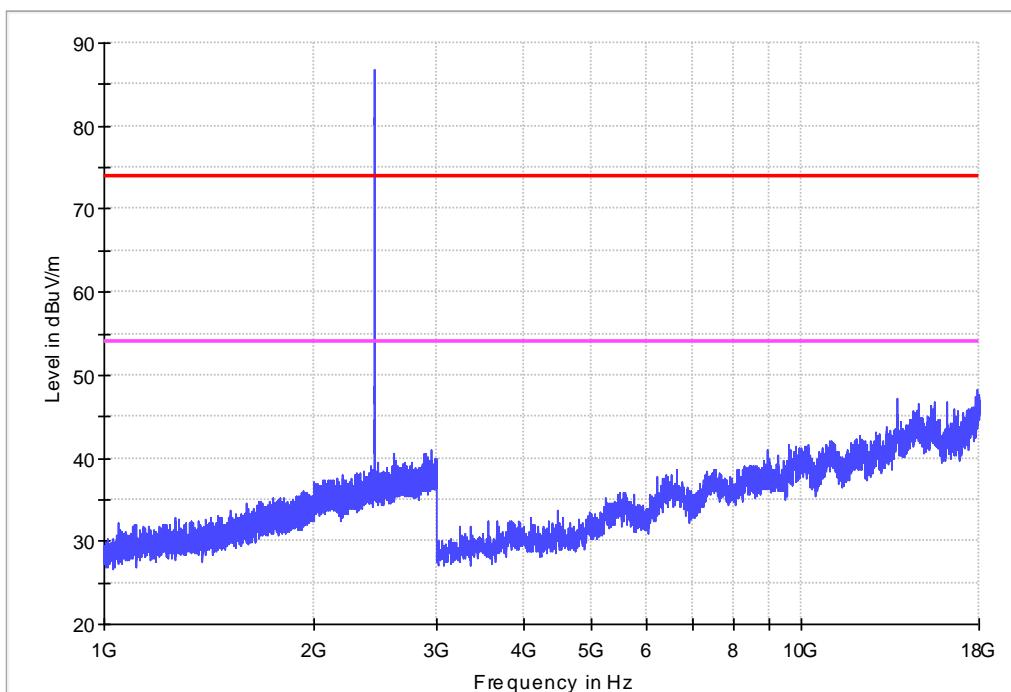


1GHz-18GHz

8PDSK CH78

Horizontal

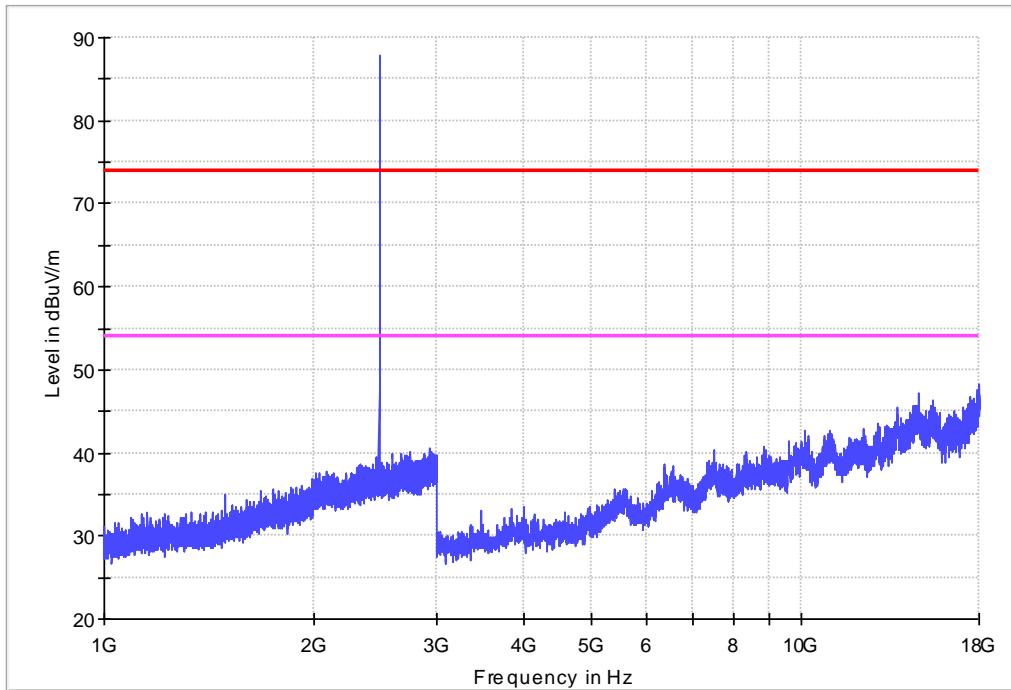


Vertical

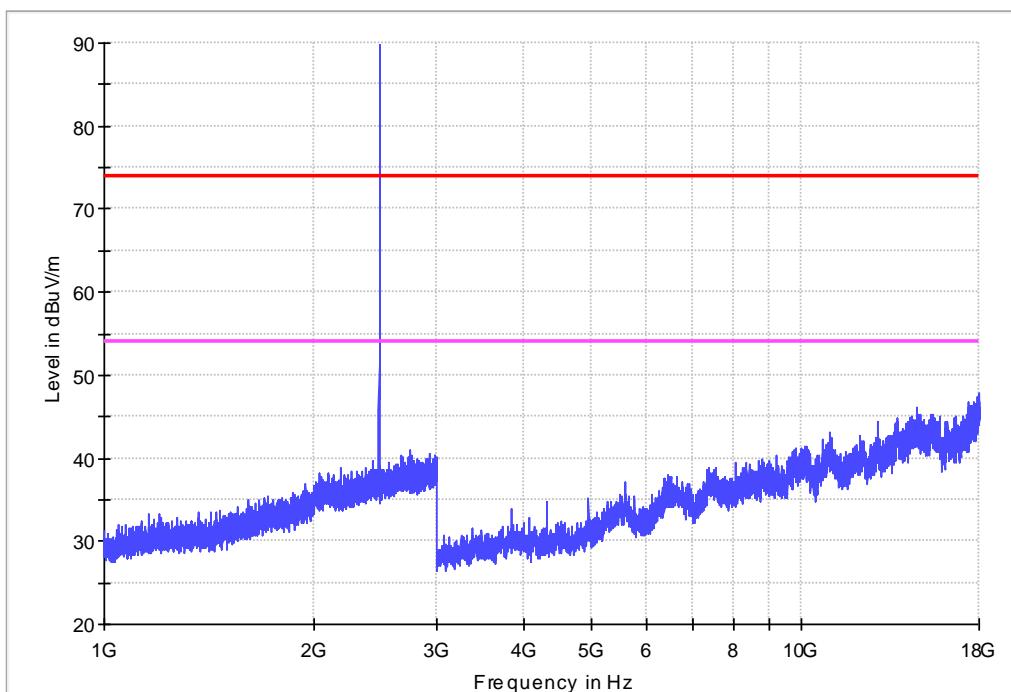

18-26.5GHz

No Peak found in pre-scan, only worst case result is listed in this report.

Horizontal

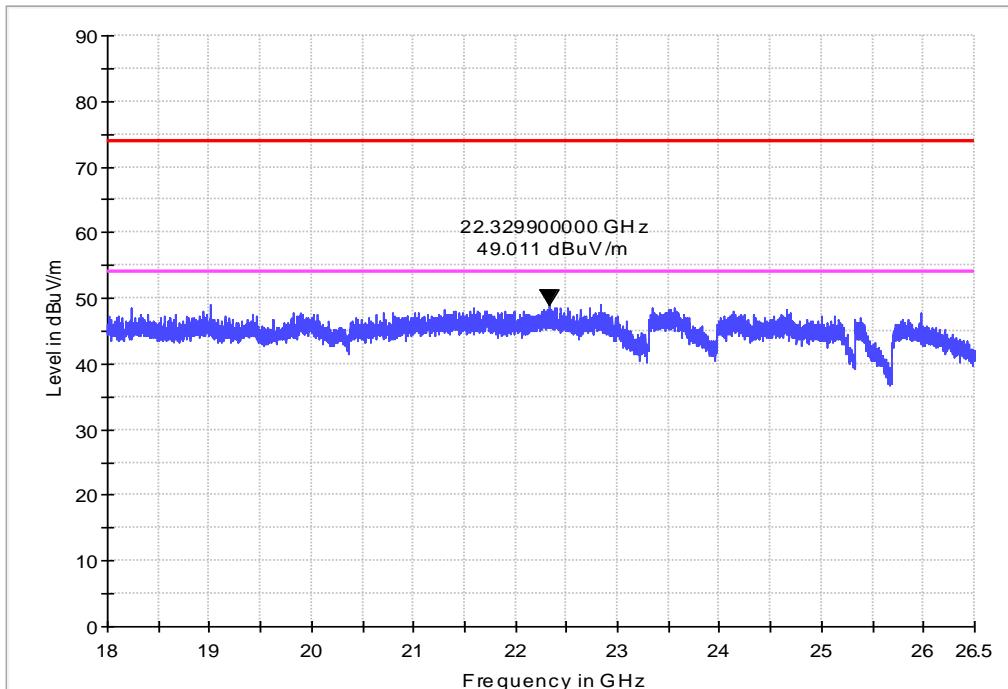

Vertical

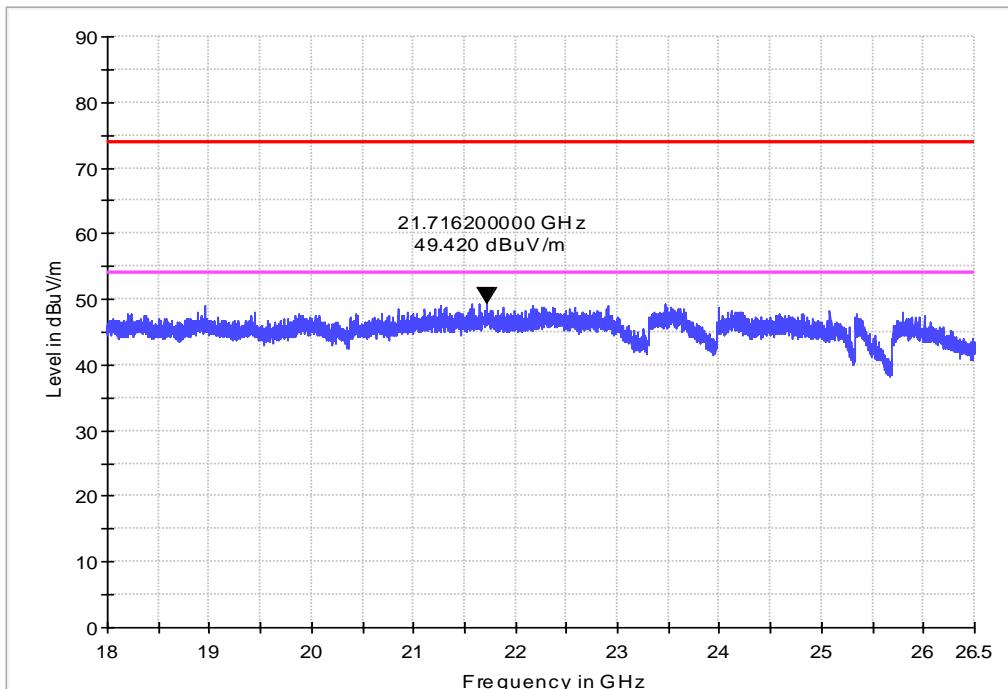


Table 11 Restricted Band Radiated Emission Data

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 -	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1646.5	
6.26775 - 6.26825	108 - 121.94	1660 - 1710	
6.31175 - 6.31225	123 - 138	1718.8 -	
8.291 - 8.294	149.9 - 150.05	1722.2	
8.362 - 8.366	156.52475 - 156.52525	2200 - 2300	
8.37625 - 8.38675	156.7 - 156.9	2310 - 2390	
8.41425 - 8.41475	162.0125 - 167.17	2483.5 - 2500	
12.29 - 12.293	167.72 - 173.2	2655 - 2900	
12.51975 -	240 - 285	3260 - 3267	
12.52025	322 - 335.4	3332 - 3339	
12.57675 -		3345.8 - 3358	
12.57725		3600 - 4400	
13.36 - 13.41			

Except as shown in table 9 to table 15, all other emission of the above band were less than the limit 20dB.

7. 20DB BANDWIDTH MEASUREMENT

7.1. LIMITS OF 20dB BANDWIDTH MEASUREMENT

CFR 47 (FCC) part 15.247 (a) (1) and DA 00-705

7.2. TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 30kHz RBW and $VBW \geq RBW$. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.




7.3. TEST SETUP



7.4. Test Data

Table 12 20dB Bandwidth Test Data Modulation: GFSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	0.9455	Pass
2441	0.9415	Pass
2480	0.9455	Pass

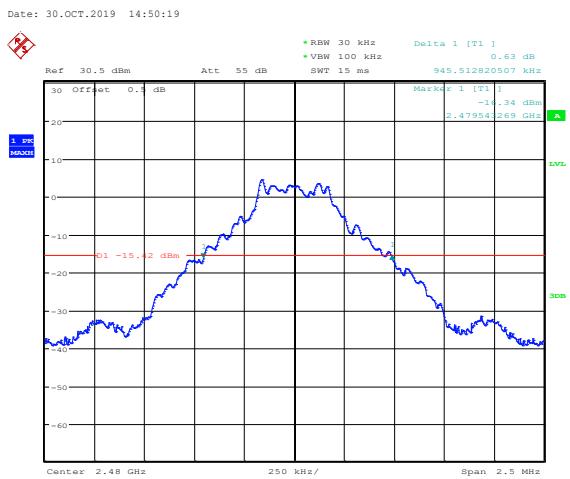
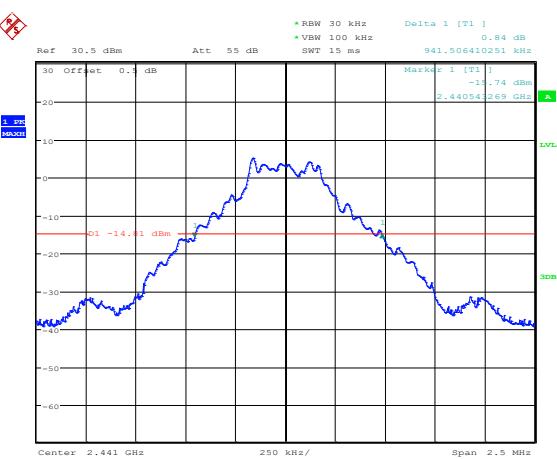
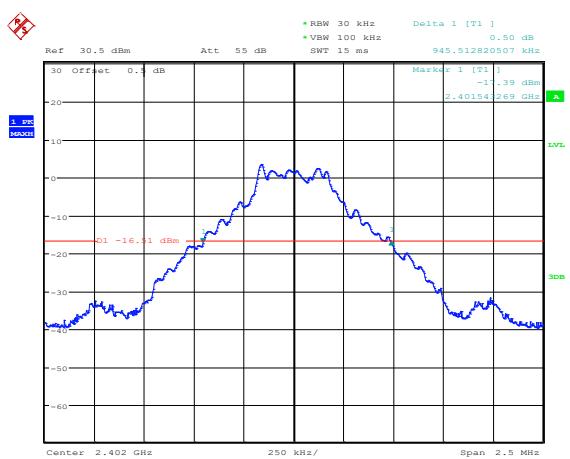


Date: 30.OCT.2019 14:50:19

Date: 30.OCT.2019 14:52:00

Table 13 20dB Bandwidth Test Data Modulation: 8DPSK

CHANNEL FREQUENCY (MHz)	20dB BANDWIDTH (MHz)	results
2402	1.2780	Pass
2441	1.2740	Pass
2480	1.2780	Pass

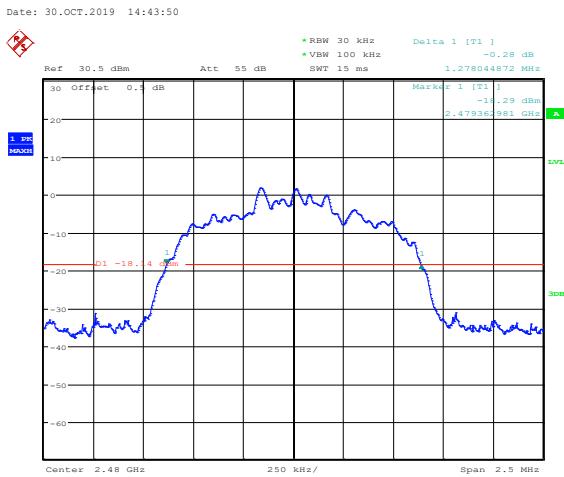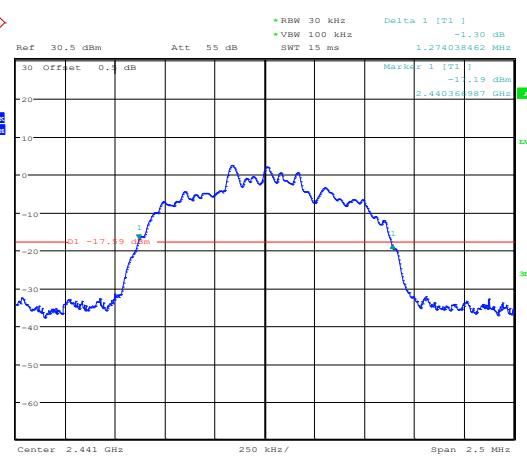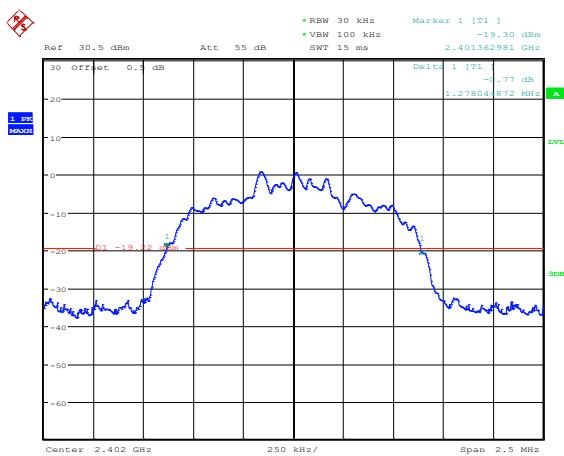

Date: 30.OCT.2019 14:46:07

Date: 30.OCT.2019 14:48:06

8. CARRIER FREQUENCY SEPARATION MEASUREMENT

8.1. LIMITS OF CARRIER FREQUENCY SEPARATION MEASUREMENT

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

8.2. TEST PROCEDURES

- (a) Connect test port of EUT to spectrum analyzer and universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function, then set the measured frequency number to two adjacent channels separately and test the carrier frequency separation with spectrum analyzer.

8.3. TEST SETUP






8.4. Test Data

GFSK

Table 13 Carrier Frequencies Separation

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.003	0.625	Pass
2.441	2.442	1.000	0.625	Pass
2.479	2.480	1.000	0.625	Pass

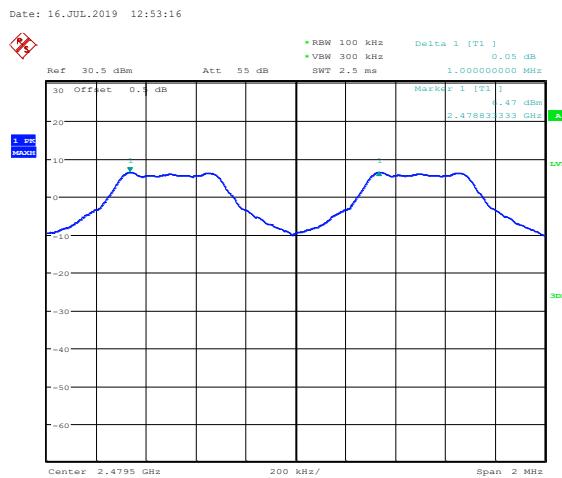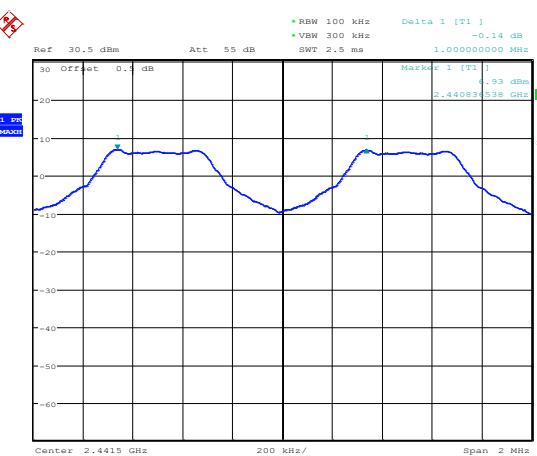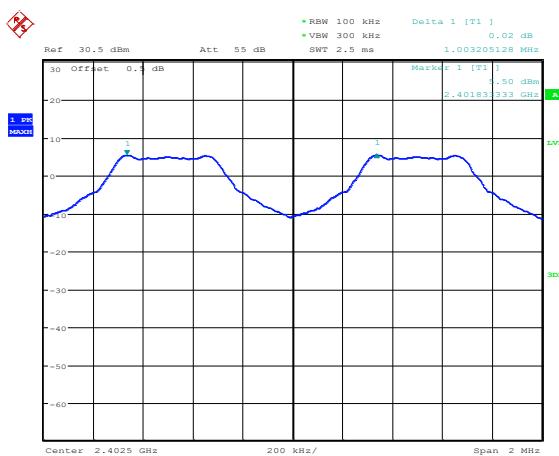

Date: 16.JUL.2019 12:53:16




Date: 16.JUL.2019 12:55:05

Date: 16.JUL.2019 12:56:24

8DPSK

Table 14 Carrier Frequencies Separation

Frequency [GHz]	Frequency [GHz]	frequency separation [MHz]	Limit [MHz]	Result
2.402	2.403	1.010	0.845	Pass
2.441	2.442	1.003	0.845	Pass
2.479	2.480	1.003	0.845	Pass

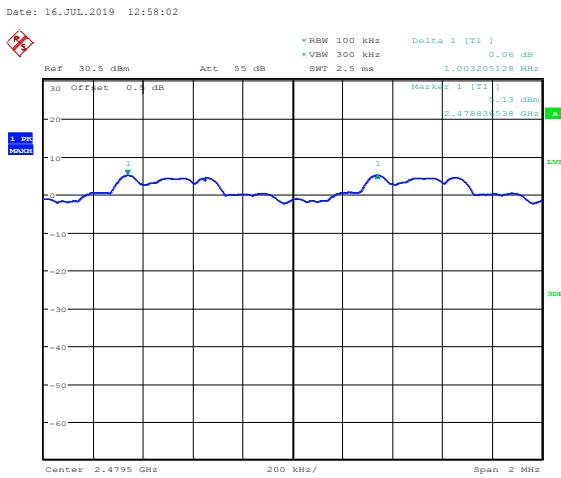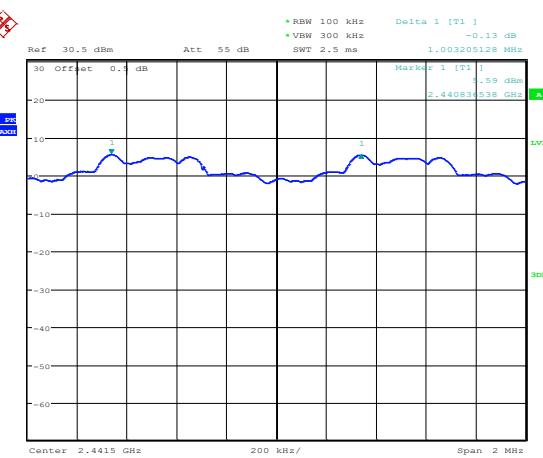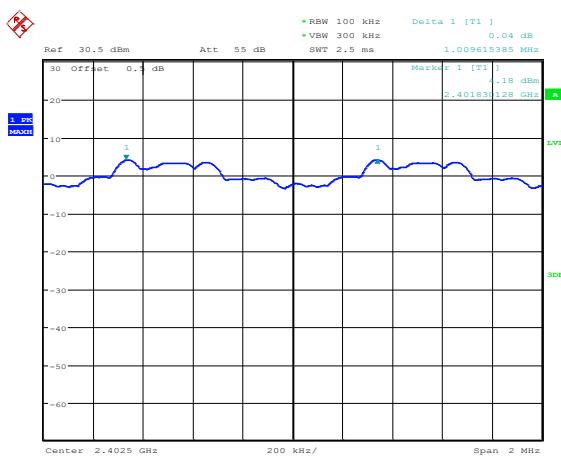

Date: 16.JUL.2019 12:59:11

Date: 16.JUL.2019 13:00:45

9. NUMBER OF HOPPING CHANNEL


9.1. LIMITS OF NUMBER OF HOPPING CHANNEL

Number of hopping channel should be compliance with the requirements in part15.247 (a) (1) III.

9.2. TEST PROCEDURE

- (a) Connect test port of EUT to spectrum analyzer
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch on Frequency hopping function, then set enough count time (larger than 5000 times) to get all the hopping frequency channel displayed on the screen of spectrum analyzer.
- (c) Count the quantity of peaks to get the number of hopping channels.

9.3. TEST SETUP

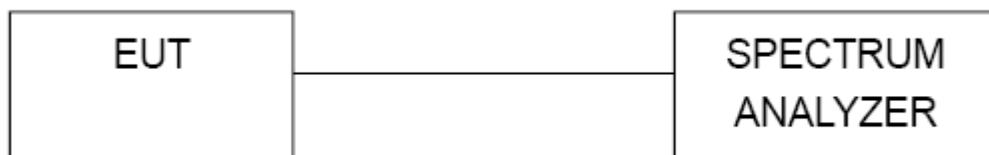


9.4. Test Data

Table 14 Hopping Channel Number Test Data


Hopping numbers	LIMIT	results
79	>15	Pass

GFSK

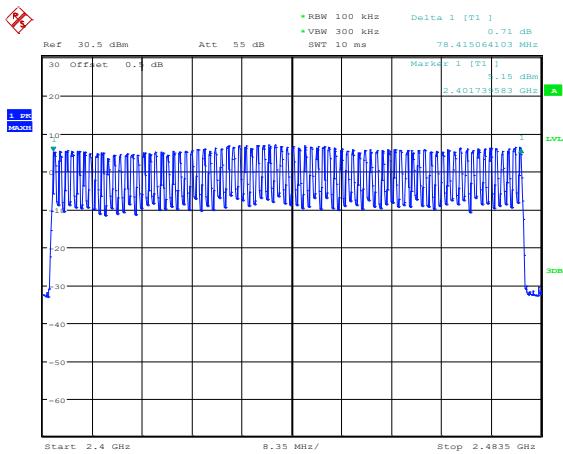

Date: 16.JUL.2019 15:59:01

8DPSK

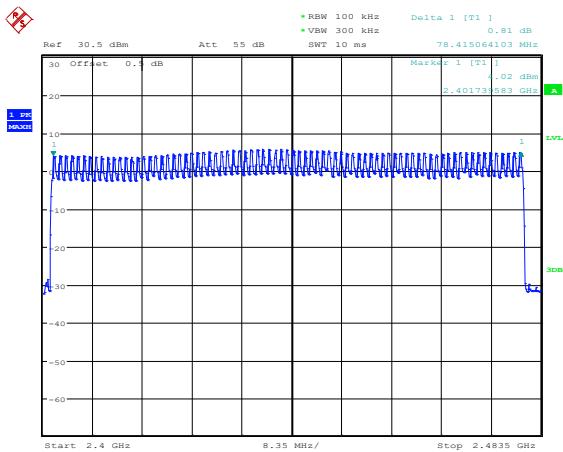

Date: 16.JUL.2019 15:56:06

10. TIME OF OCCUPANCY

10.1. LIMITS OF TIME OF OCCUPANCY

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

10.2. TEST PROCEDURE

- Connect test port of EUT to spectrum analyzer and universal communication tester.
- Set the EUT to transmit maximum output power at 2.4GHz and switch on frequency hopping function.
- Set the span of spectrum analyzer to 0 Hz, and set the resolution bandwidth to 1 MHz and the video bandwidth to 1 MHz, then get the time domain measured diagram. and set sweep time to 2 times of one burst occupancy time, and measure the time of occupancy of one burst.
- Set the resolution bandwidth to 1 MHz and the video bandwidth to 3 MHz ,and set the sweep time to a period (0.4 seconds multiplied by the number of hopping channels employed), and count the number of the bursts.
- Calculate the time of occupancy in a period with time occupancy of a burst and quantity of bursts.

DH1: Dwell time equal to Pulse time (ms)*(1600/2/79)*31.6ms

DH3: Dwell time equal to Pulse time (ms)*(1600/4/79)*31.6ms

DH5: Dwell time equal to Pulse time (ms)*(1600/6/79)*31.6ms

AFH Mode:

DH1: Dwell time equal to Pulse time (ms)*(800/2/20)* (0.4*20) ms

DH3: Dwell time equal to Pulse time (ms)*(800/4/20)* (0.4*20) ms

DH5: Dwell time equal to Pulse time (ms)*(800/6/20)* (0.4*20) ms


10.3. TEST RESULTS

GFSK


Table 15 Time of Occupancy

Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time of occupied in a period [s]	Limit [s]	Result
DH1	0.424	32	0.1357	0.0679	≤ 0.4	Pass
DH3	1.660	24	0.3984	0.1992	≤ 0.4	Pass
DH5	2.910	5	0.1455	0.0728	≤ 0.4	Pass


DH1

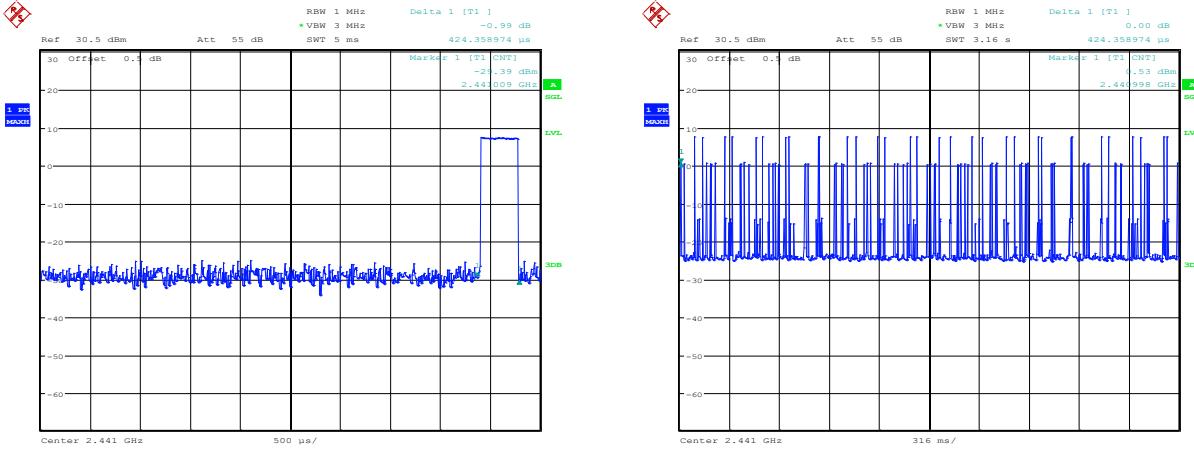

DH3

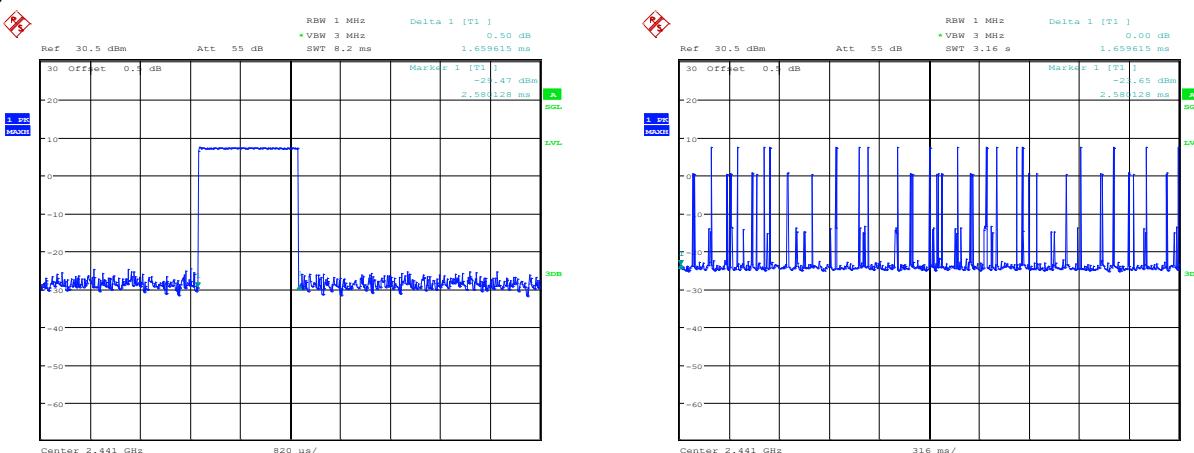

DH5

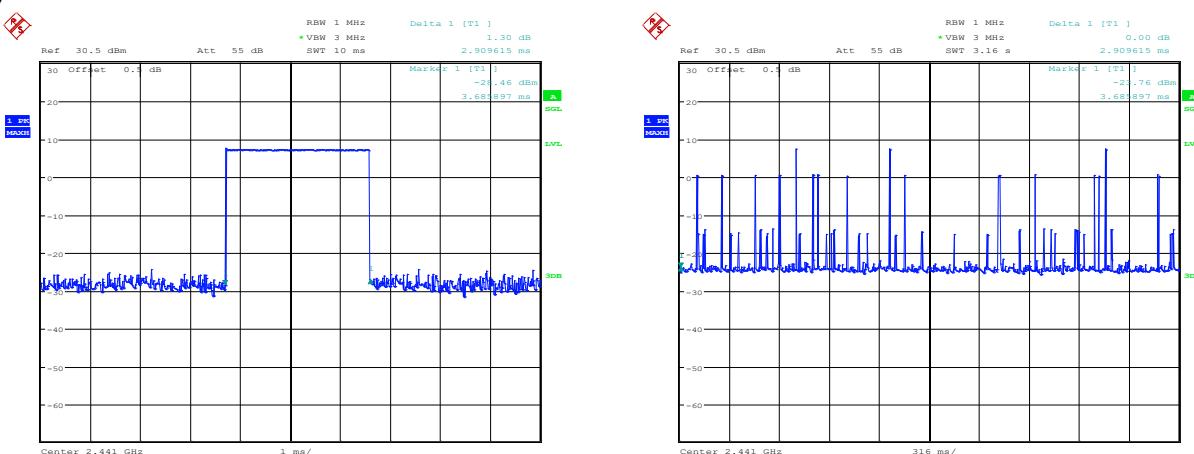


8DPSK


Table 16 Time of Occupancy

Data Packet	Time of Single Slot [ms]	Numbers of slots in a period	Time of occupied in a period [s]	AFH Mode Time of occupied in a period [s]	Limit [s]	Result
3-DH1	0.442	33	0.1459	0.0730	≤ 0.4	Pass
3-DH3	1.692	18	0.3046	0.1523	≤ 0.4	Pass
3-DH5	2.942	7	0.2059	0.1030	≤ 0.4	Pass

3-DH1

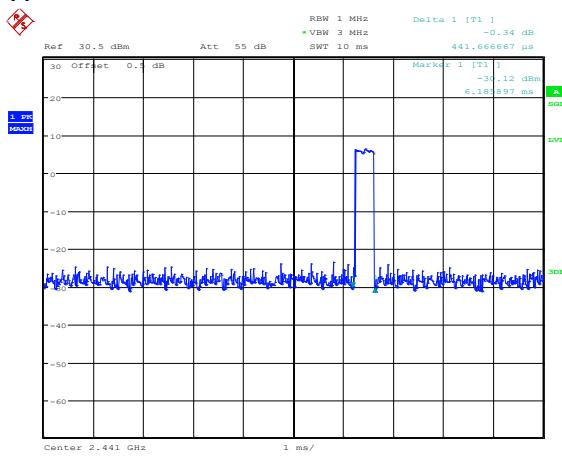


Date: 16.JUL.2019 16:15:55

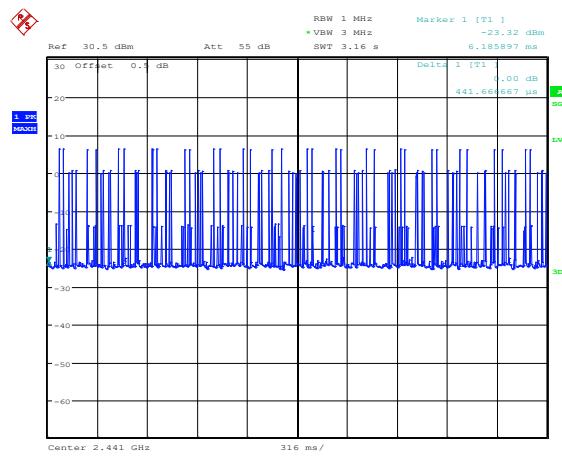


Date: 16.JUL.2019 16:16:36

3-DH3

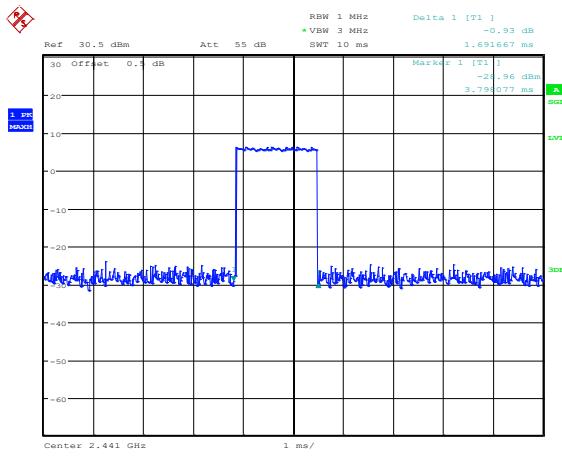


Date: 16.JUL.2019 16:17:45

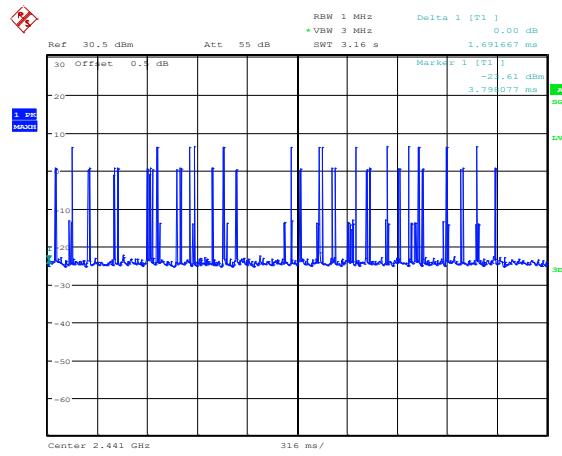

Date: 16.JUL.2019 16:18:20

3-DH5

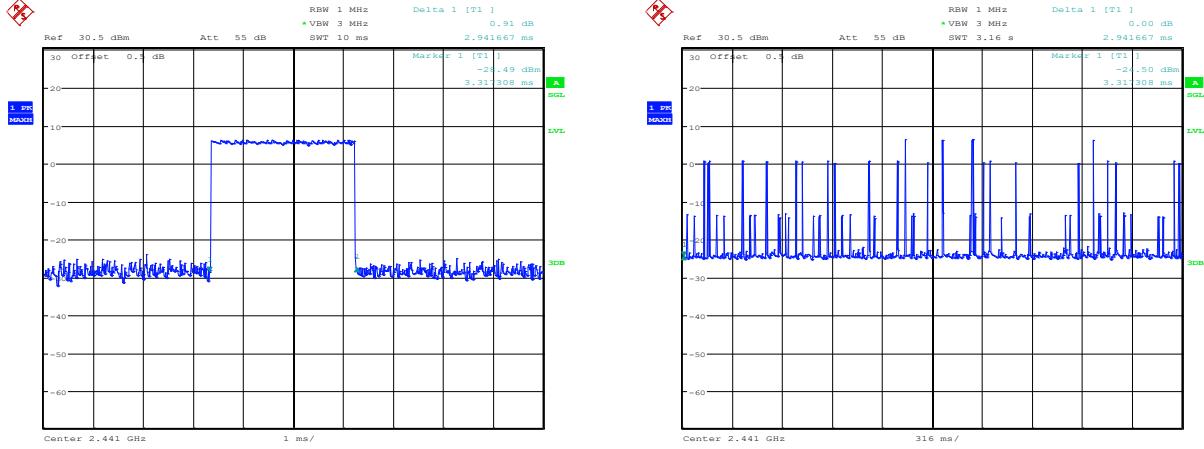

Date: 16.JUL.2019 16:20:31

Date: 16.JUL.2019 16:20:48

11. MAXIMUM CONDUCTED OUTPUT POWER MEASUREMENT

11.1. LIMITS OF Peak Power

Compliance with part 15.247 (b) (1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watt.

11.2. TEST PROCEDURE




- (a) Connect test port of EUT to universal communication tester.
- (b) Set the EUT to transmit maximum output power at 2.4GHz and switch off frequency hopping function.
- (c) Then set the EUT to transmit at high, middle and low frequency and measure the conducted output power separately.

11.3. TEST RESULTS

GFSK

Table 17 Maximum Conducted Output Power Test Data

Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	6.52	< 21	Pass
Middle	39	2441	7.99	< 21	Pass
Top	78	2480	7.58	< 21	Pass

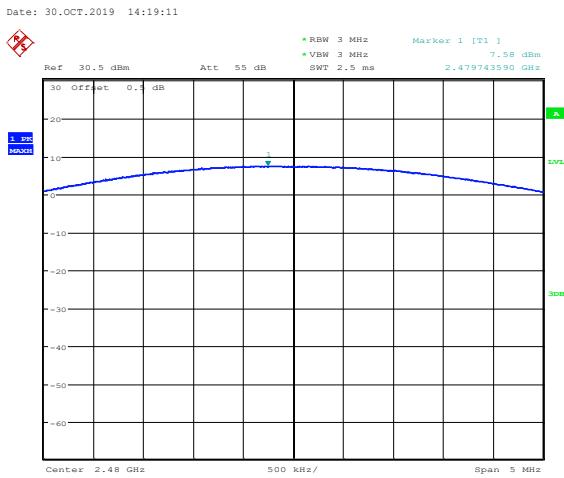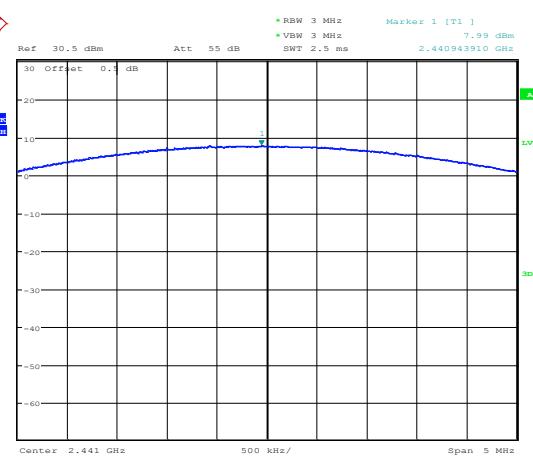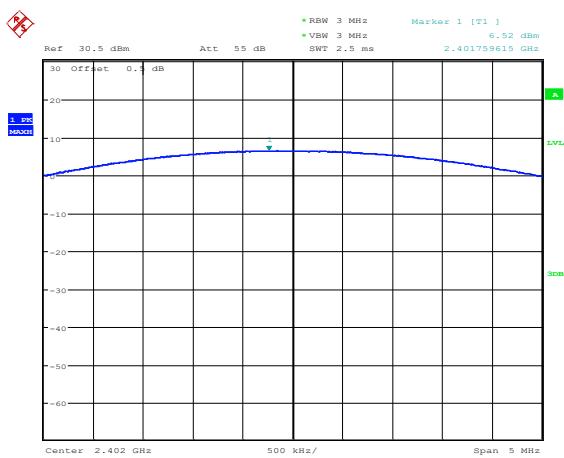




Date: 30.OCT.2019 14:19:11

Date: 30.OCT.2019 14:35:02

8DPSK

Table 18 Maximum Conducted Output Power Test Data

Channel	Channel No.	Center Freq.[MHz]	Meas. Level (Cond.) [dBm]	Limit [dBm]	Result
Bottom	0	2402	5.58	< 21	Pass
Middle	39	2441	7.00	< 21	Pass
Top	78	2480	6.64	< 21	Pass

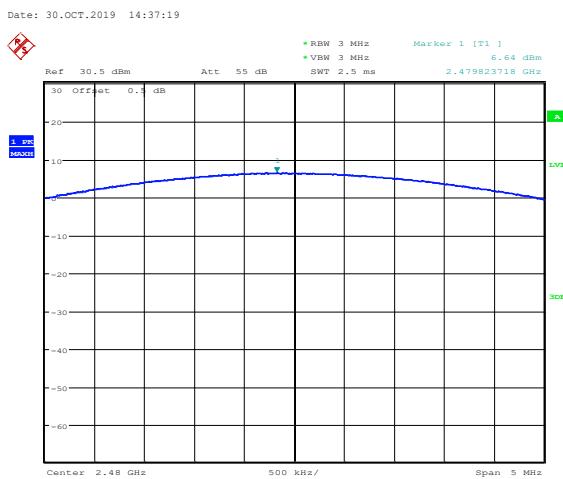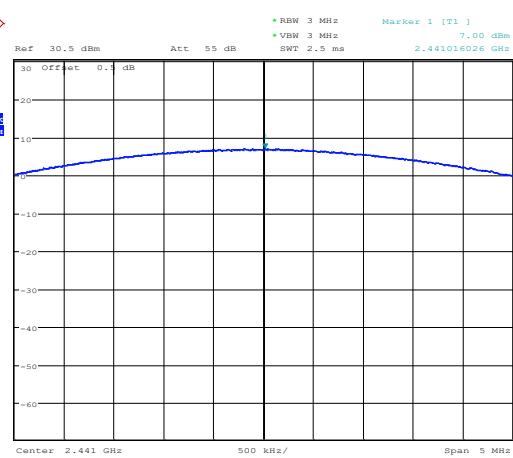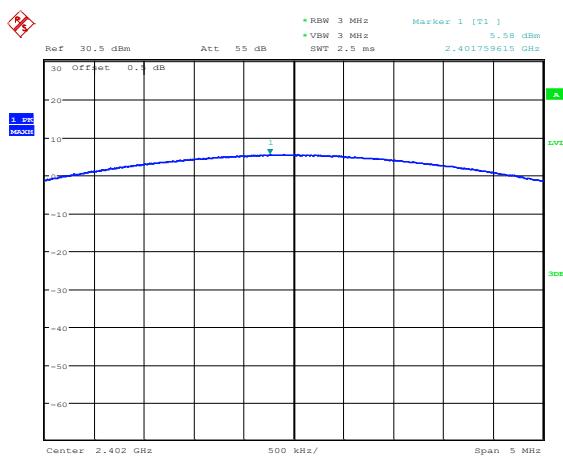

Date: 30.OCT.2019 14:39:15

12. BAND EDGES MEASUREMENT

12.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100kHz resolution bandwidth).

12.2. TEST PROCEDURE

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=VBW=1MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.



12.3. Test Results

The measured plots are attached on the following. Test data shows compliance with the band edge requirement in part 15.247(d).



Bluetooth Basic Rate

Low edge



Horizontal

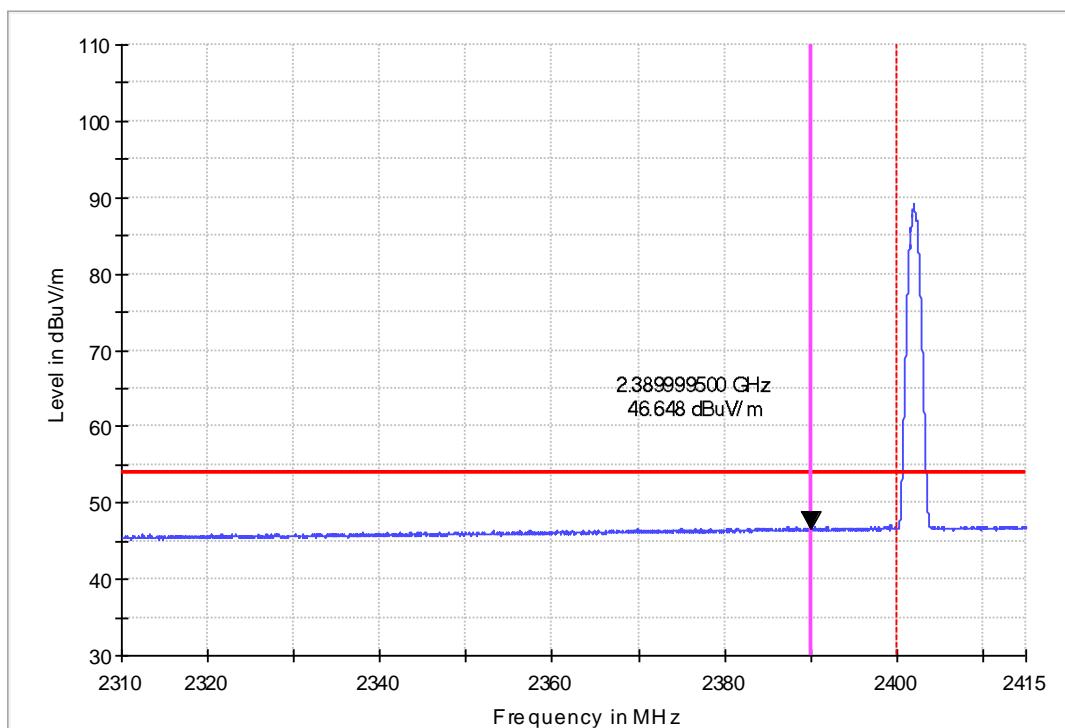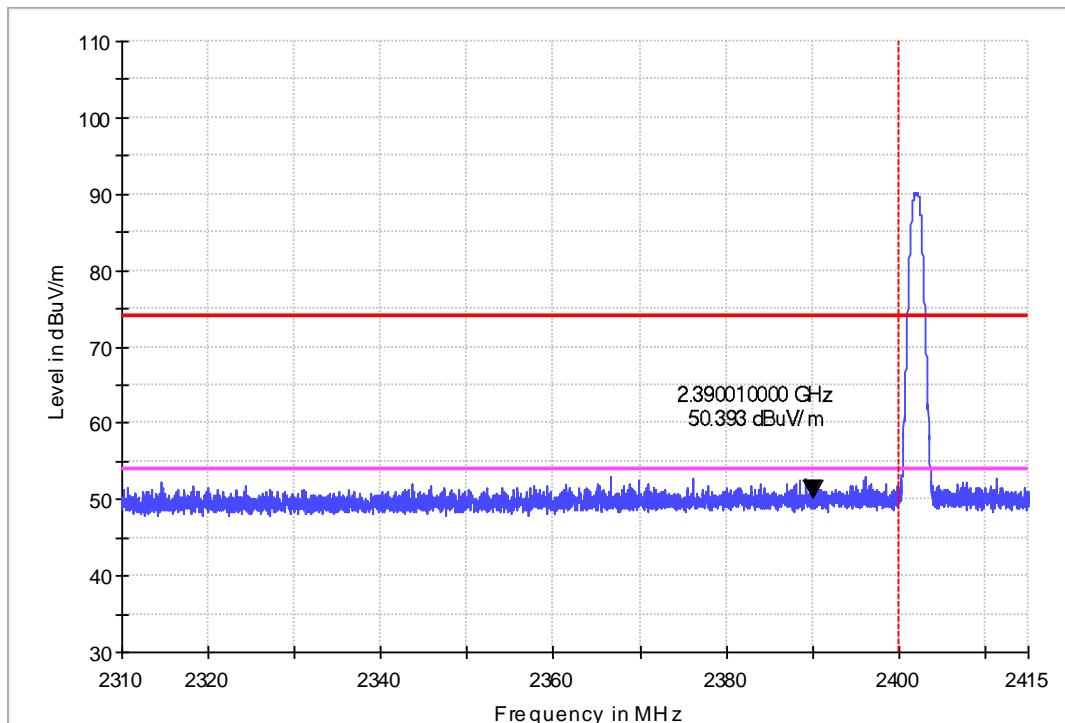



Vertical

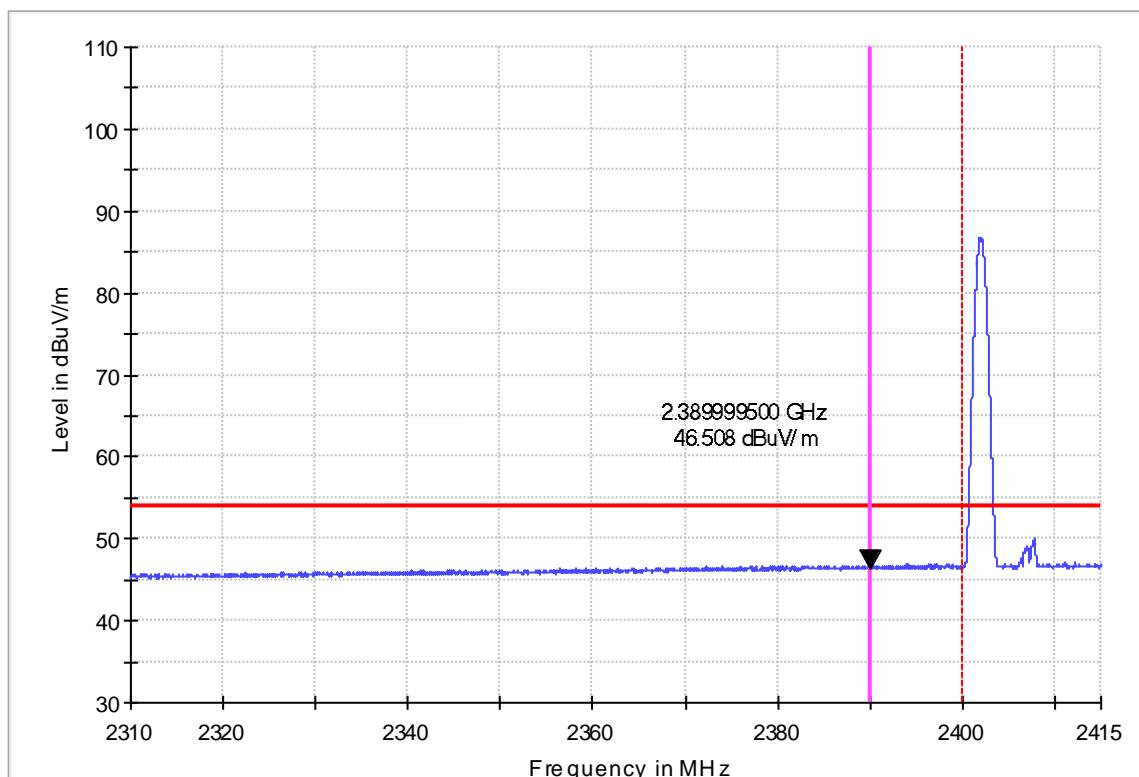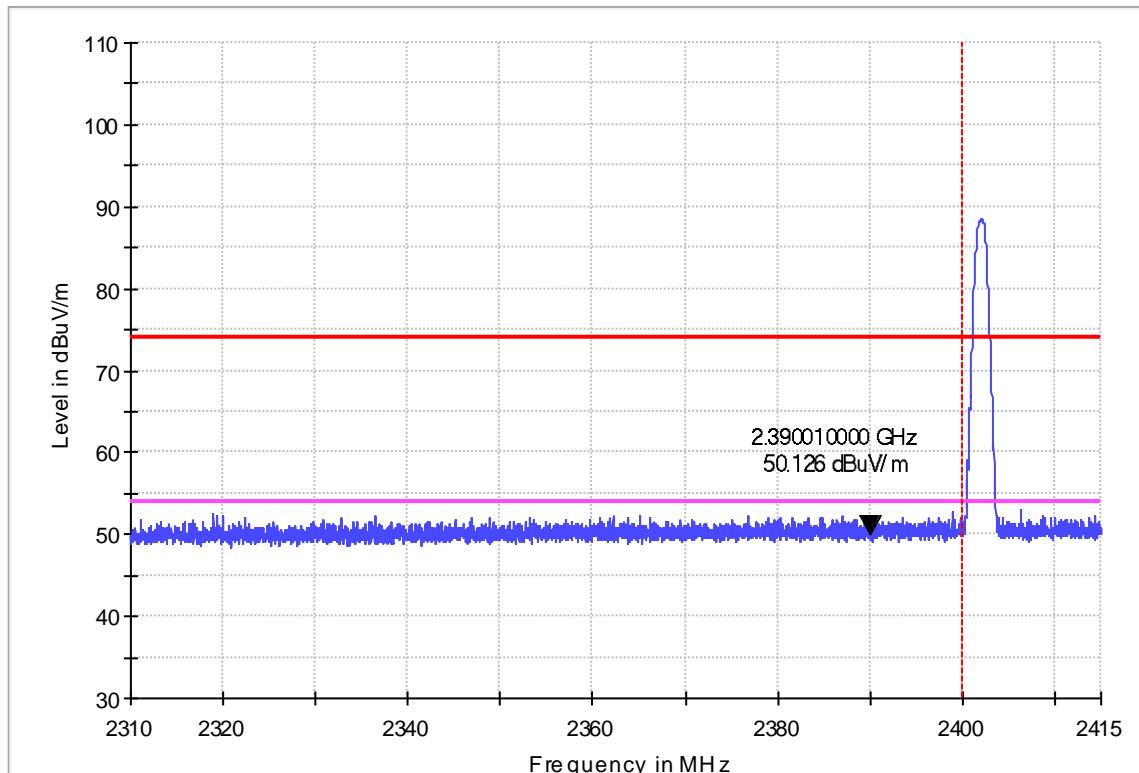

Bluetooth Basic Rate
Upper Edge
Horizontal

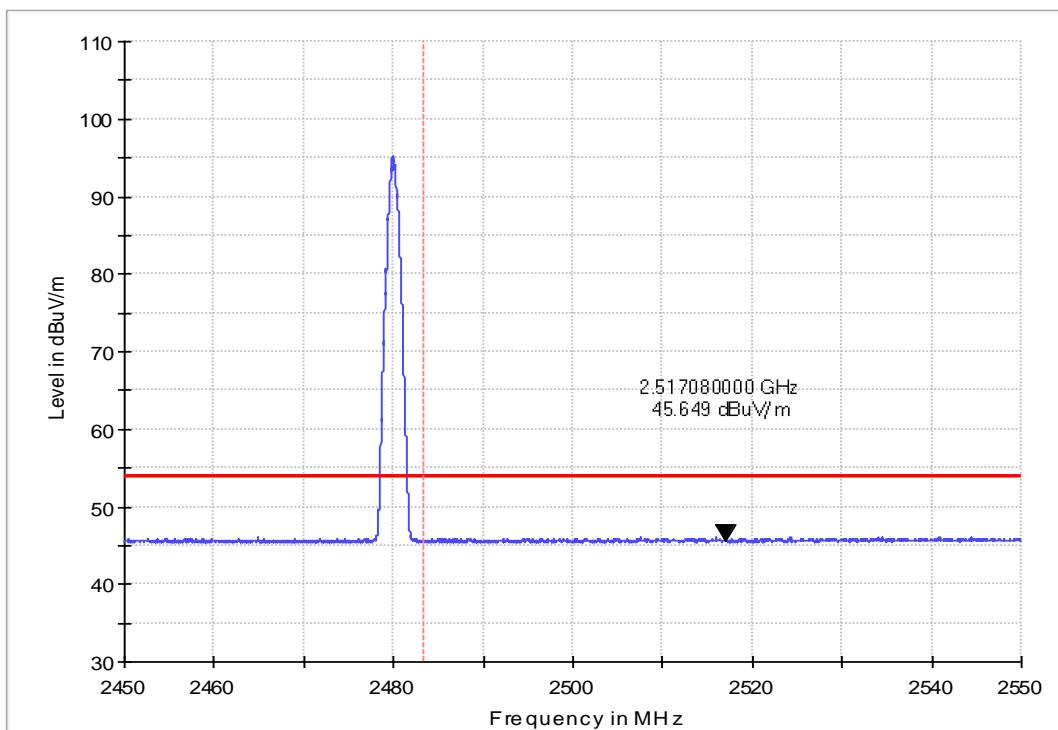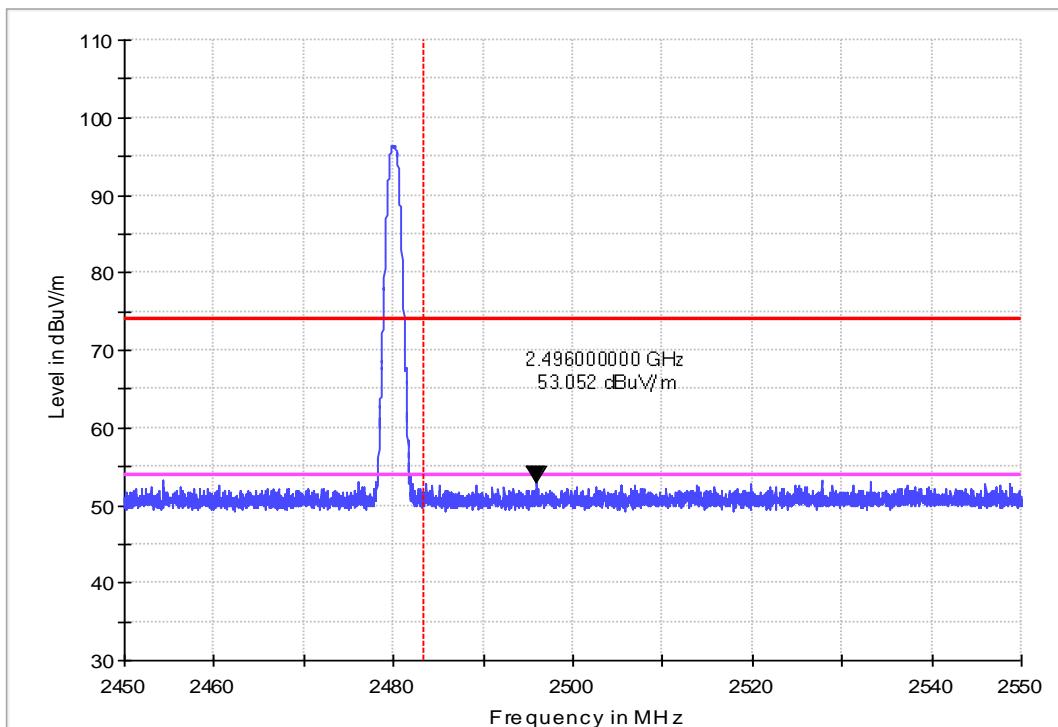



Vertical

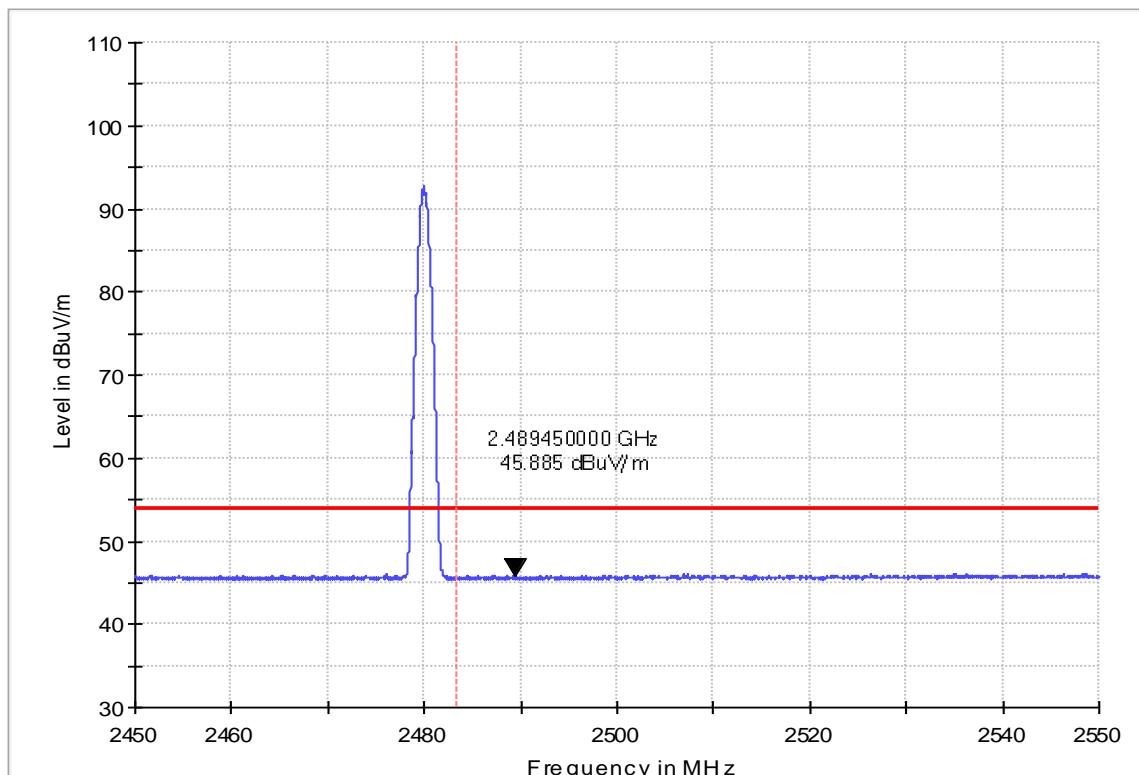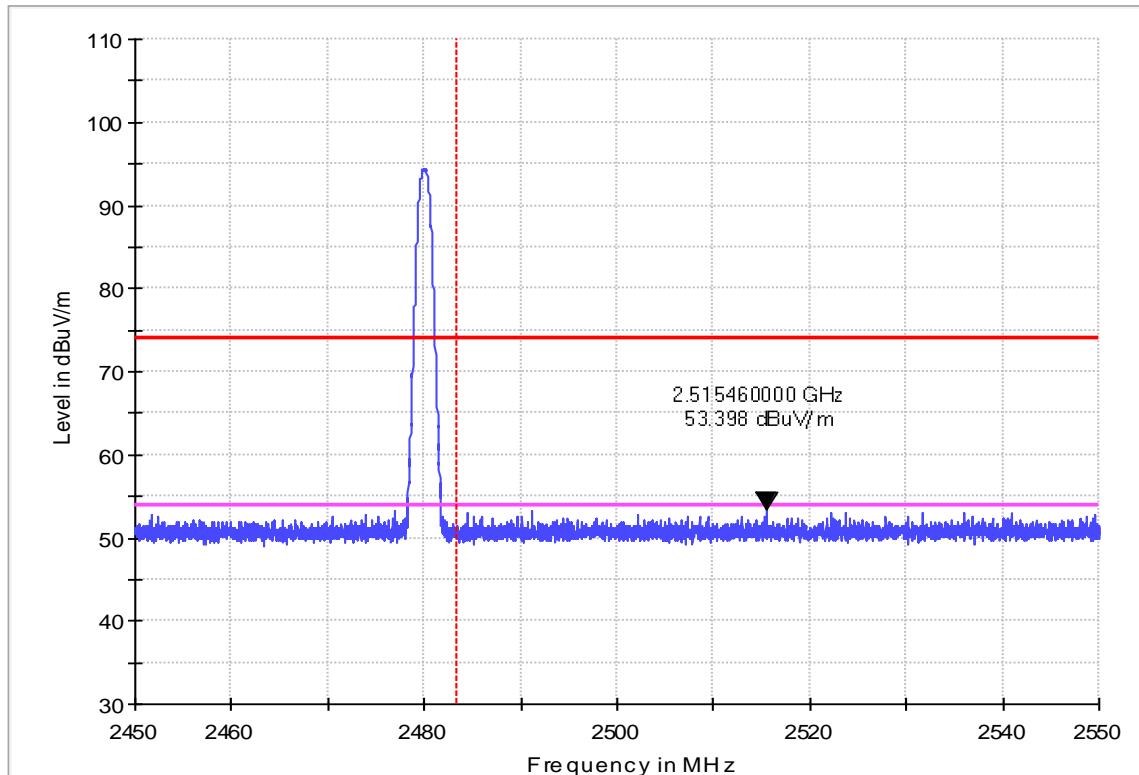



Bluetooth EDR

Low edge



Horizontal

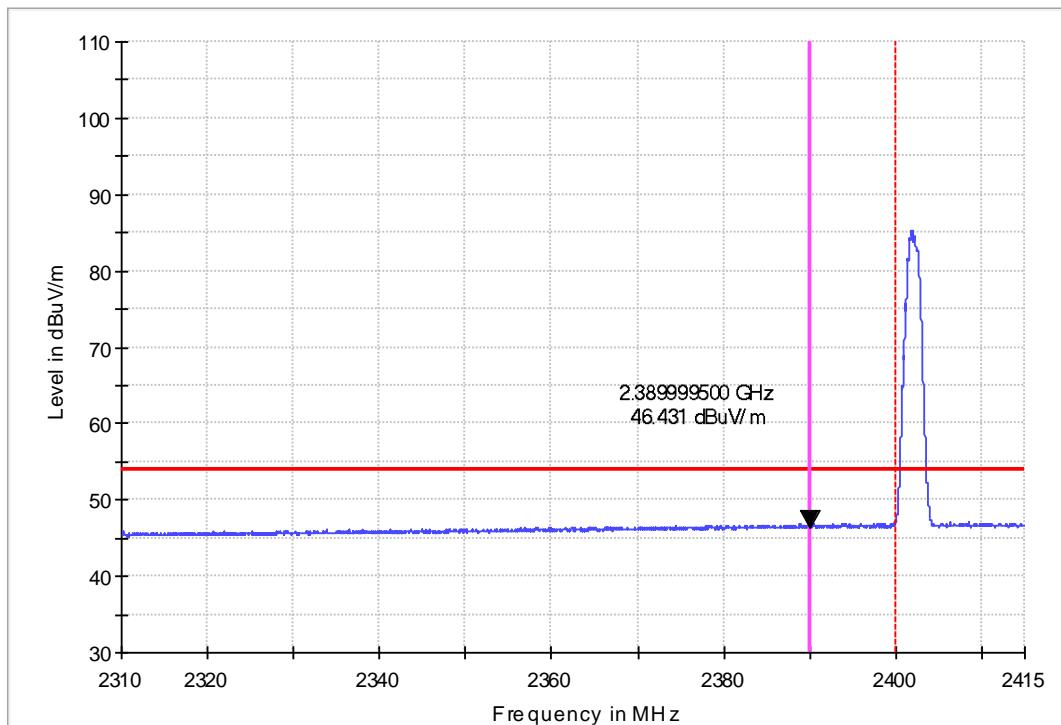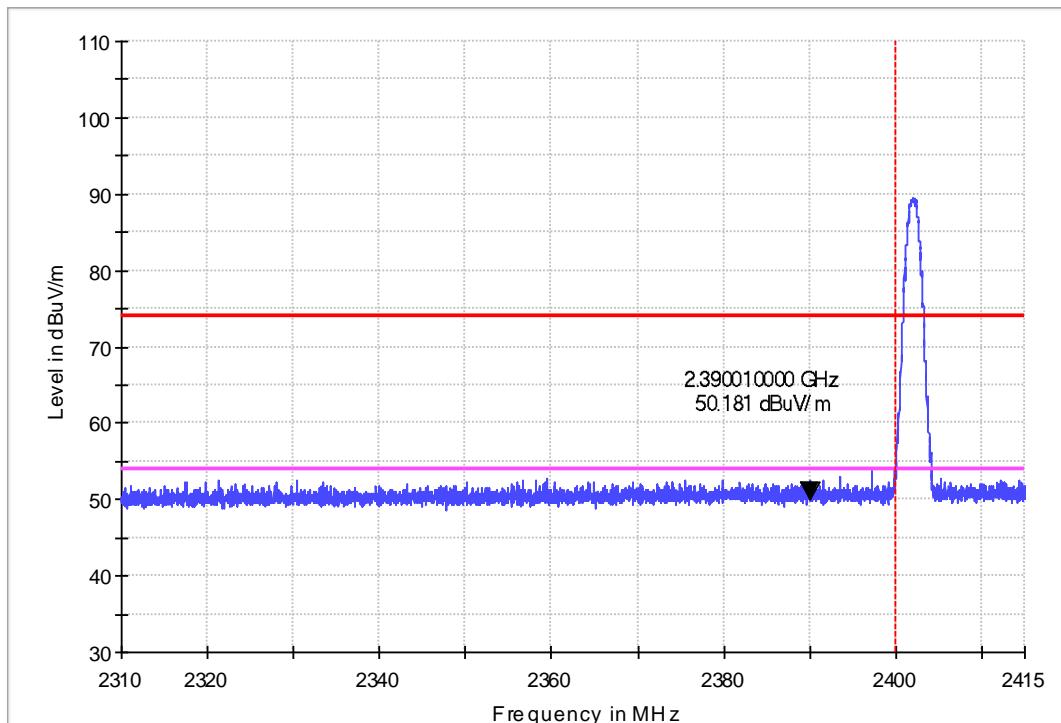



Vertical

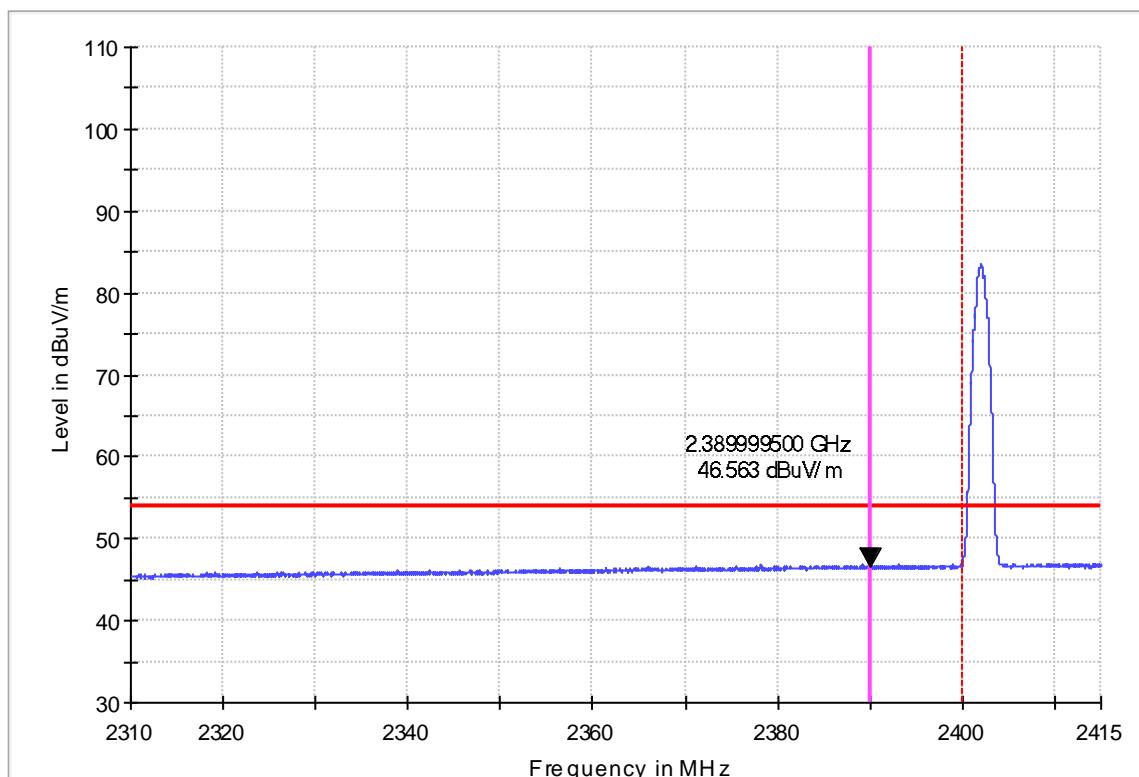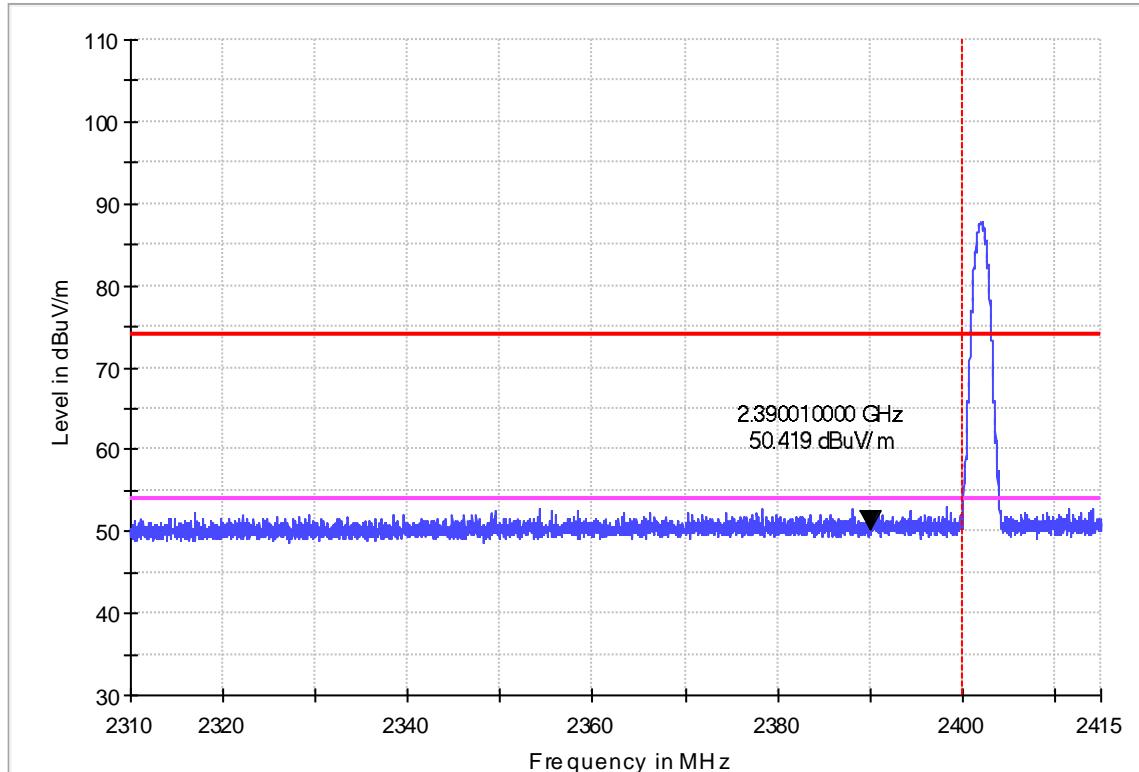

Bluetooth EDR
Upper edge
Horizontal

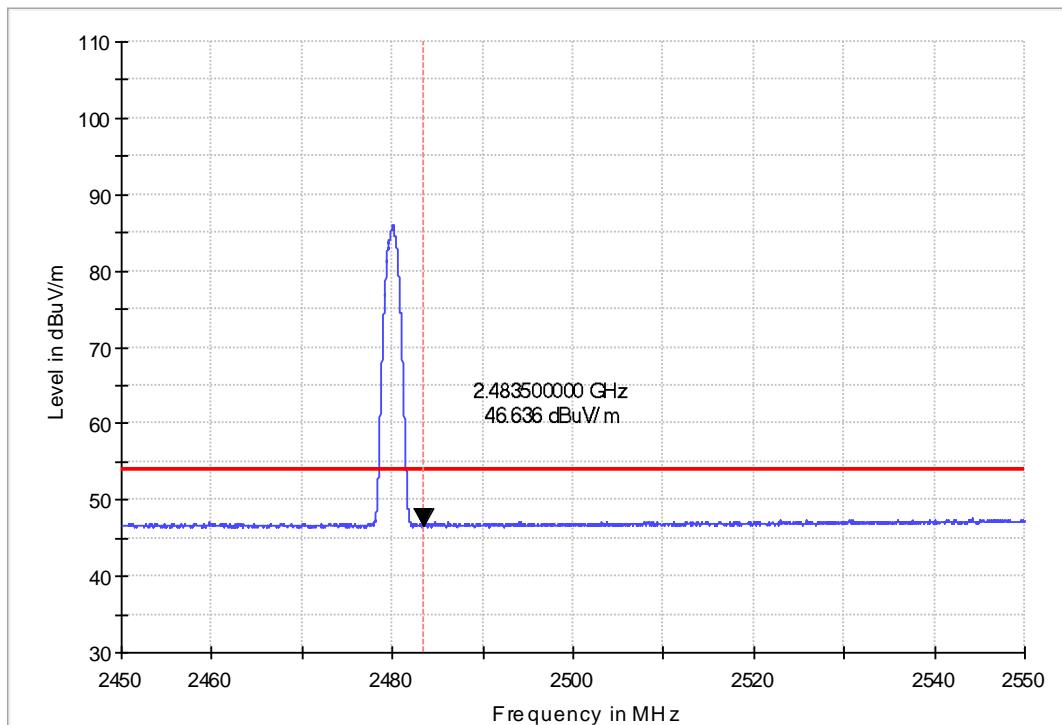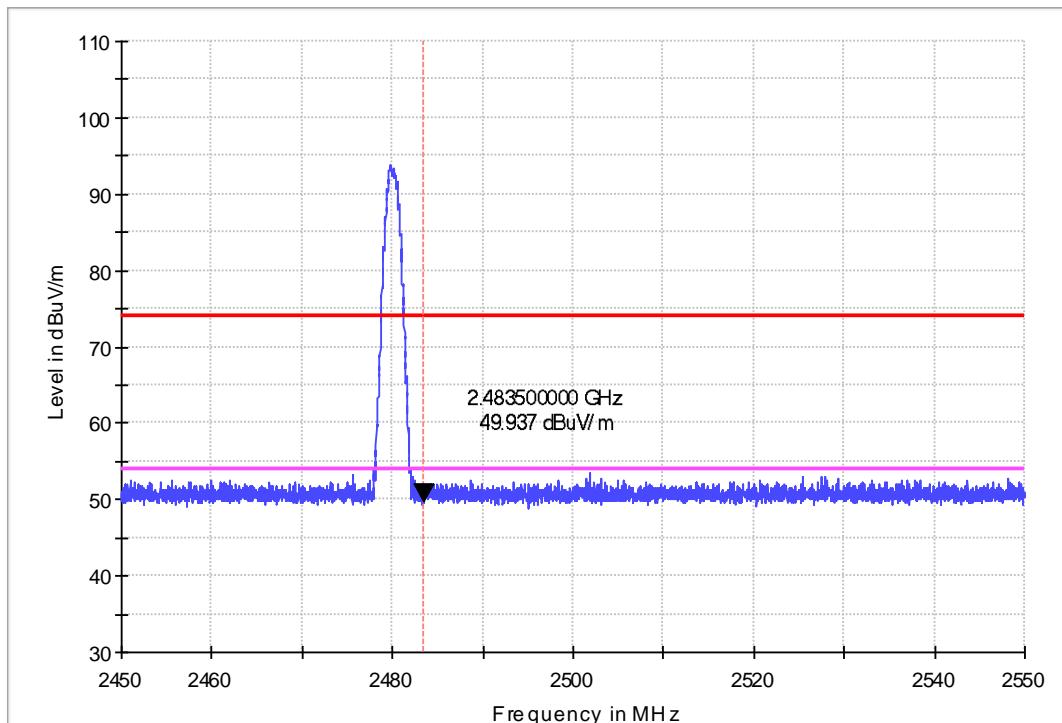

Vertical

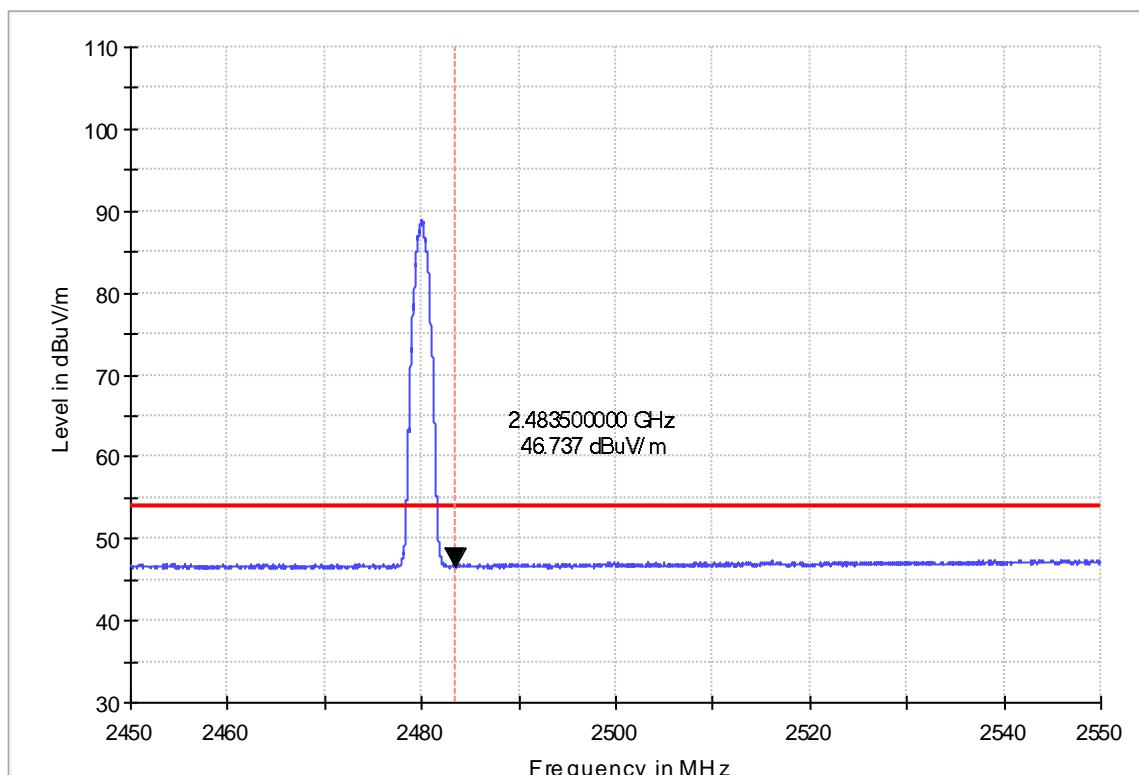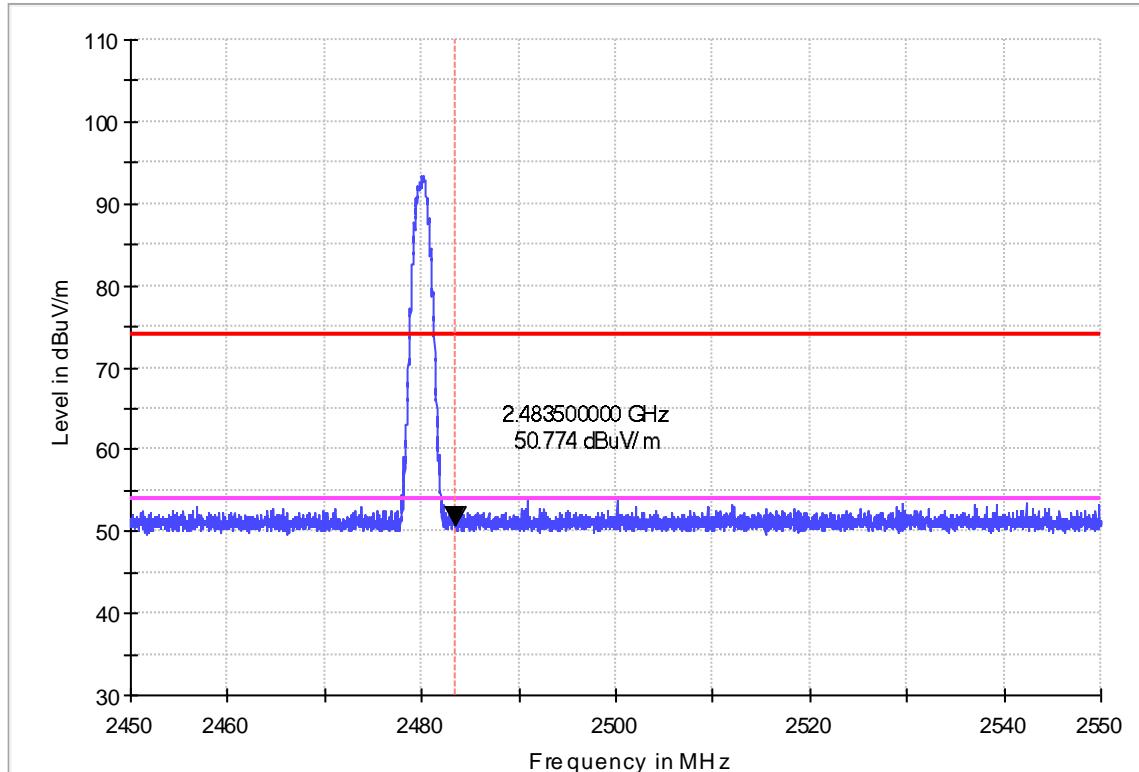

13. CONDUCTED SPURIOUS EMISSIONS

13.1. Limits of Band Edges Measurement

Below –20dB of the highest emission level of operating band (in 100 kHz resolution bandwidth).

13.2. Test Procedure

The transmitter output was connected to the spectrum analyzer.


The resolution bandwidth is set to 100 kHz. The video bandwidth is set to 300 kHz.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.


The bandedges at 2.4 and 2.4835 GHz are investigated with the transmitter set to the normal

13.3. TEST RESULTS


Bluetooth Basic Low channel

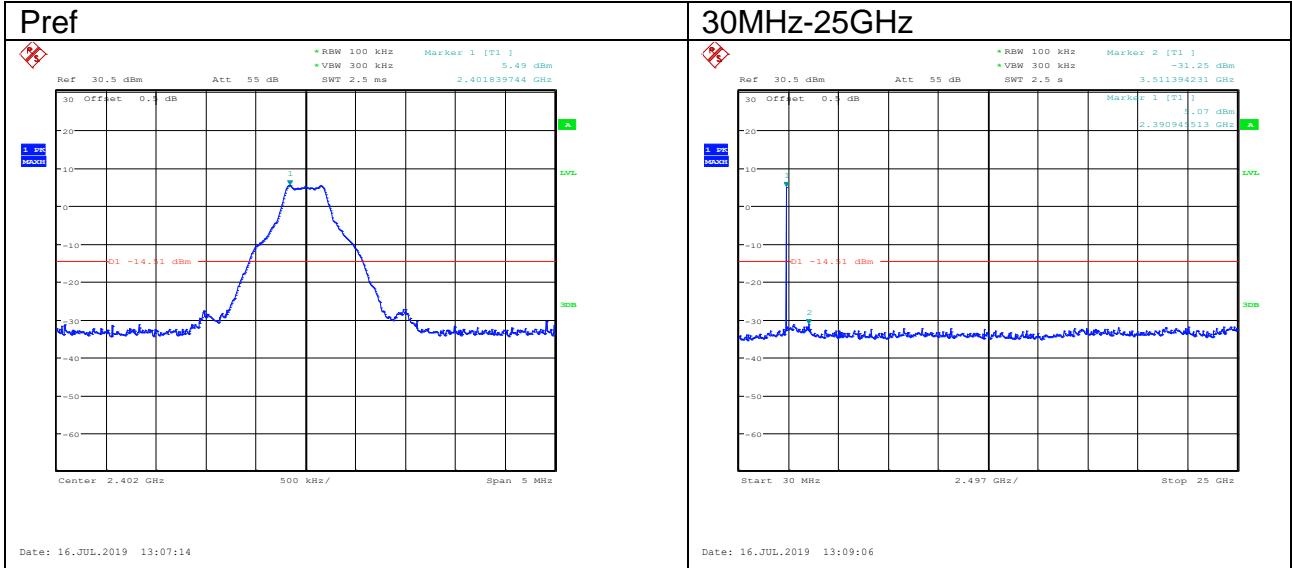


Bluetooth Basic Mid channel

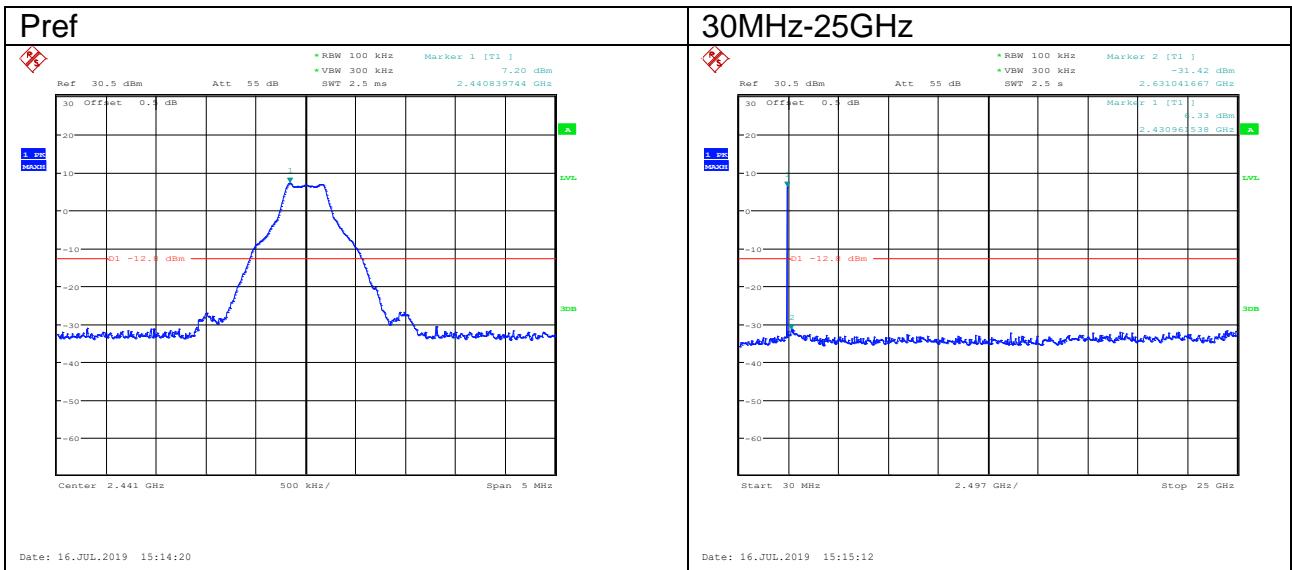


Bluetooth Basic High Channel

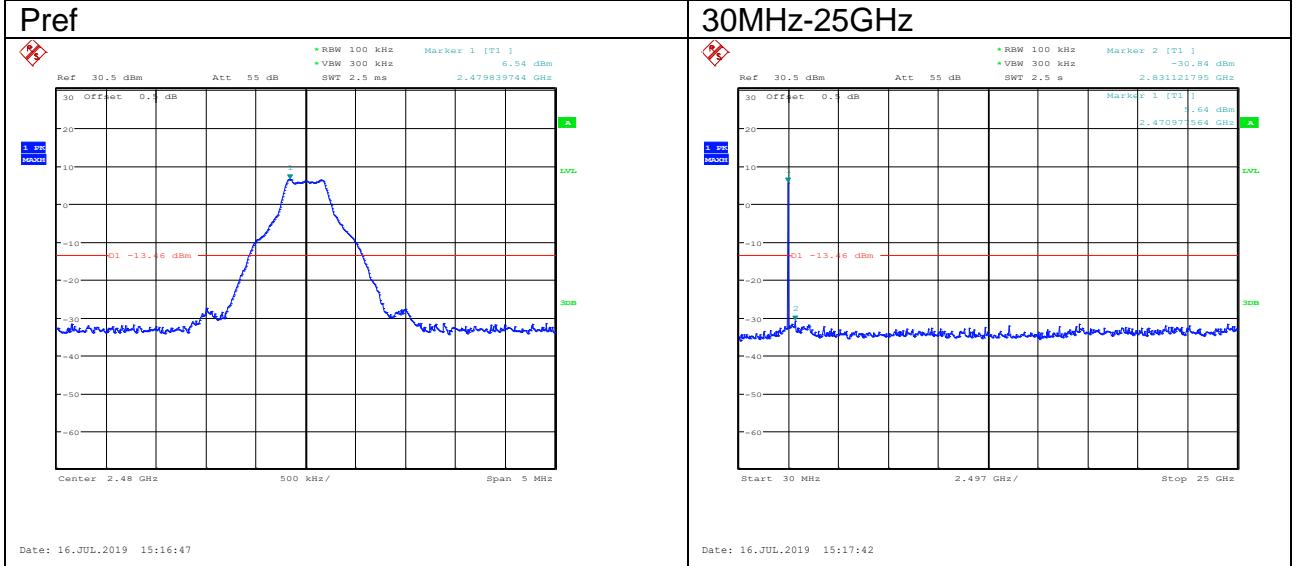


Bluetooth Basic Bandedge hopping On

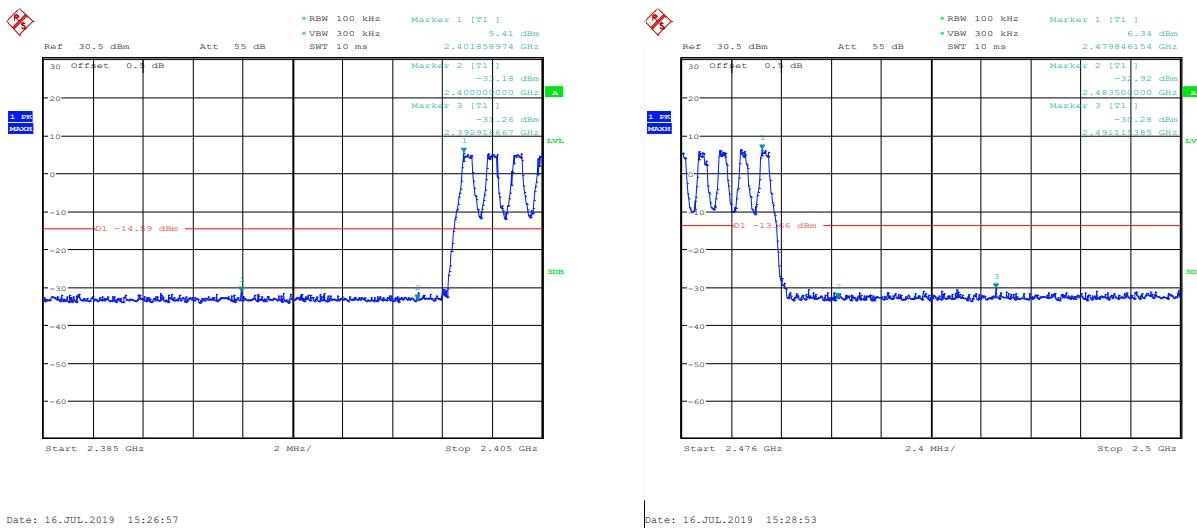


Bluetooth EDR Low Channel

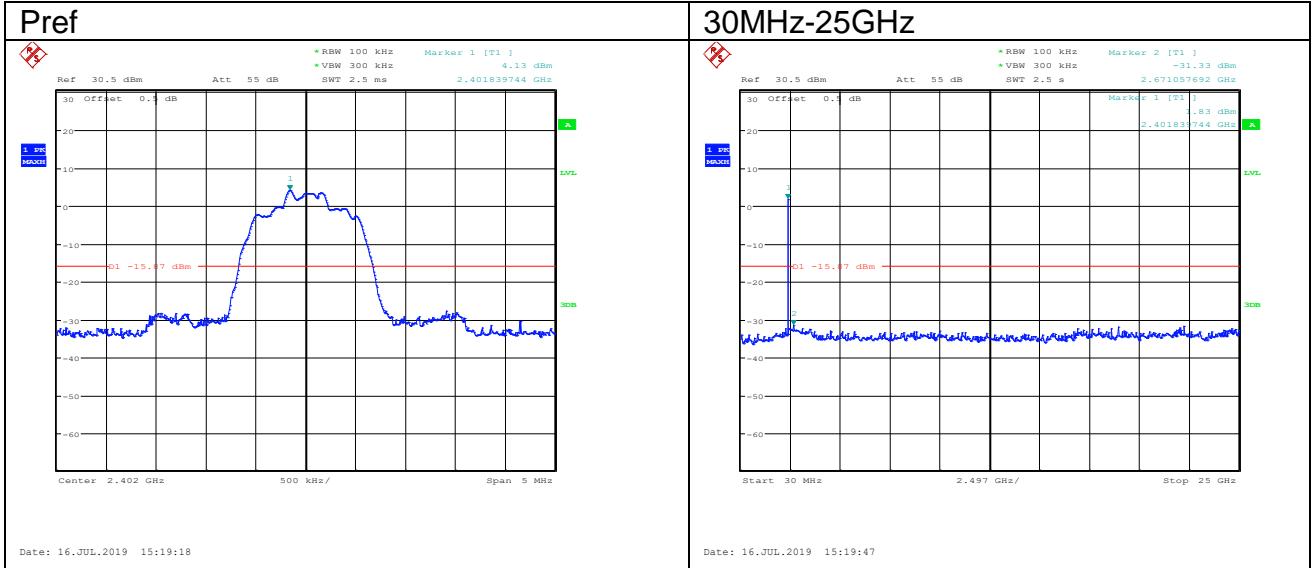


Bluetooth EDR Mid Channel

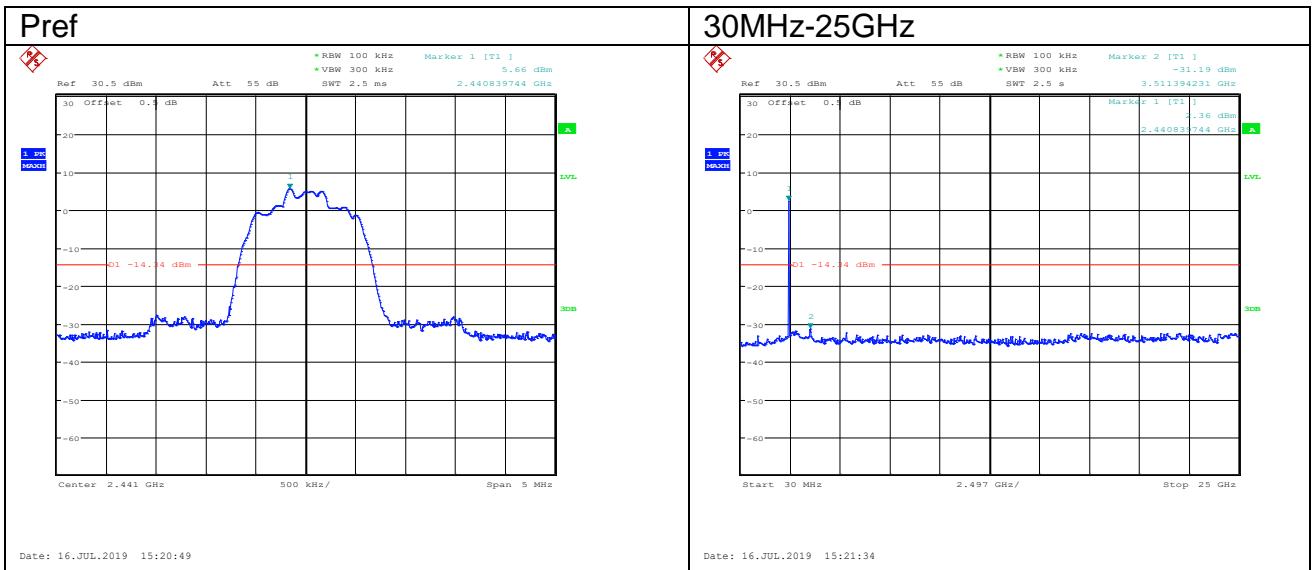

Bluetooth EDR High Channel

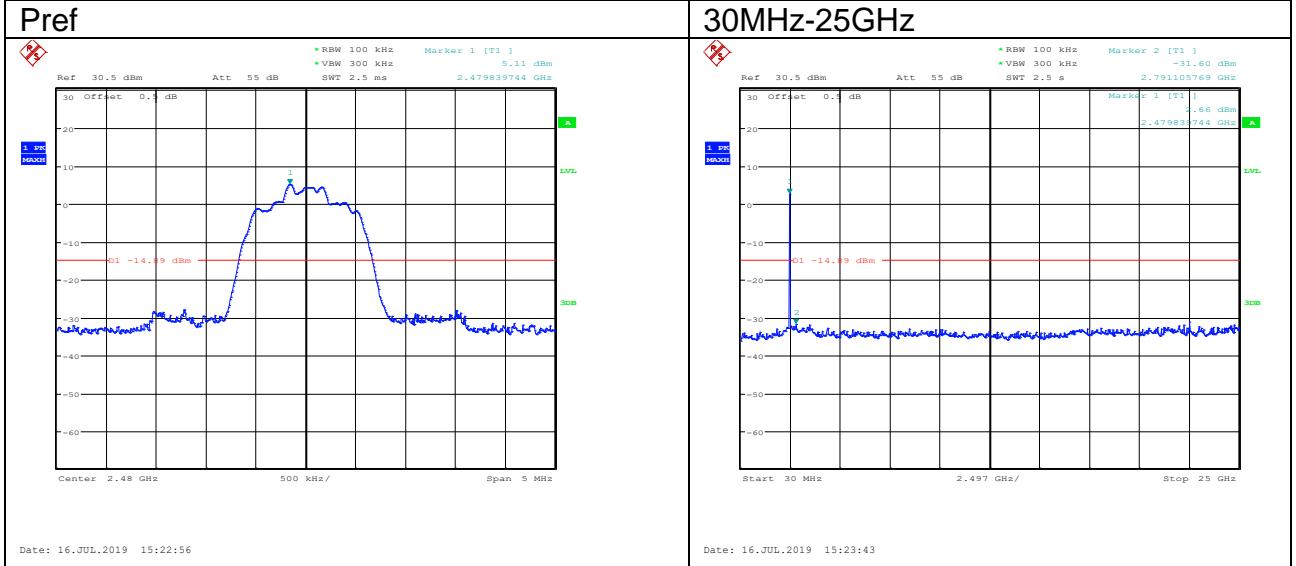

Bluetooth EDR Bandedge

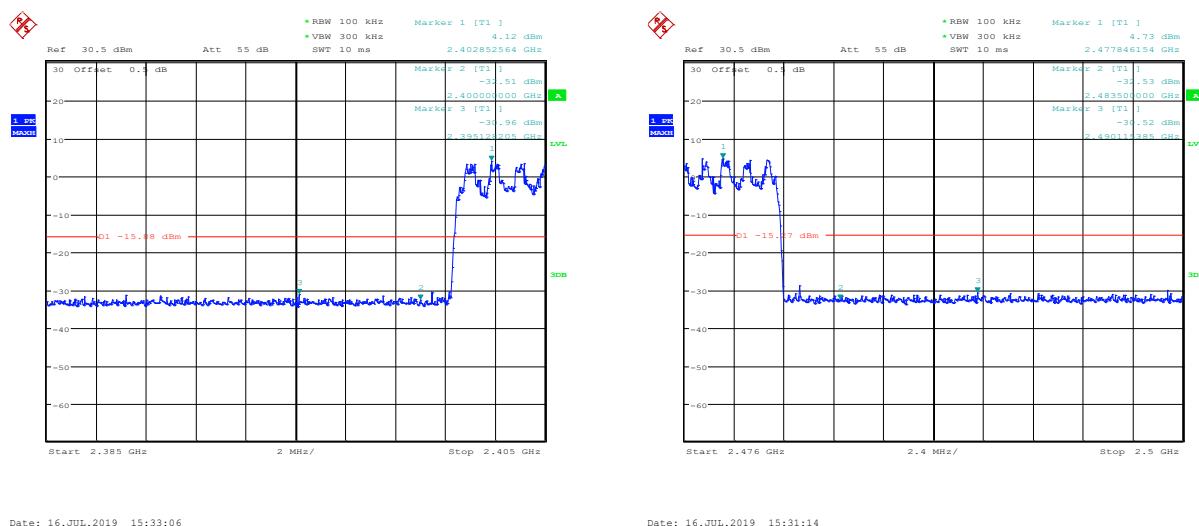

14. ANTENNA REQUIREMENTS

15.203 requirements:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirements:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

14.1. Antenna Connector

Antenna Connector is on the PCB within enclosure and not accessible to user.

14.2. Antenna Gain

The antenna gain of EUT is less than 6 dBi.

15. APPENDIX I PRODUCT EQUALITY DECLARATION

Product Equality Declaration

We: FAMOCO SAS, declare on our sole responsibility the differences between the hardware revision of **NFC Android Validator** products.

The new models of **NFC Android Validator** are:

- FX925SF-ING-VWDC-PRE,011P
- FX925SF-ING-VPDC-PRE,011P
- FX925SF-ING-VWDC-PRE,010P
- FX925SF-ING-VPDC-PRE,010P

All parts of hardware revision: FX925F-P.

NFC Android Validator models are made of two parts, a Front Casing, and a Back Casing. The composition of each model is described below.

Models	Front Casing Models	Back Casing Models
FX925SF-ING-VWDC-PRE,011P	FC-FX925SF-ING-PRE,0112	BC-VWDC-P366C,4
FX925SF-ING-VPDC-PRE,011P	FC-FX925SF-ING-PRE,0112	BC-VPDC-P366C,4
FX925SF-ING-VWDC-PRE,010P	FC-FX925SF-ING-PRE,0102	BC-VWDC-P366C,4
FX925SF-ING-VPDC-PRE,010P	FC-FX925SF-ING-PRE,0102	BC-VPDC-P366C,4

The original models of **NFC Android Validator** are:

- FX925F PM
- FX925F WM

All parts of hardware revision: FX925F,1

They are also made of two parts, a Front Casing and a Back Casing. The composition of each model is described below.

Models	Front Casing Models	Back Casing Models
FX925F WM	FC-FX925SF-ING-PRE,0112	BC-VWDC-P366C,2
FX925F PM	FC-FX925SF-ING-PRE,0112	BC-VPDC-P366C,2

Differences between **NFC Android Validator** hardware revisions FX925F,1 and FX925F-P are listed below.

To identify product pieces described below products exploded views are at the end of this document.

Table 1: List of differences between the two Front Casing versions of NFC Android Validators FC-FX925SF-ING-PRE,0112 and FC-FX925SF-ING-PRE,0102:

#	Differences	FC-FX925SF-ING-PRE,0112	FC-FX925SF-ING-PRE,0102
#1	Battery	<ul style="list-style-type: none"> • 1 Smartphone battery 	<ul style="list-style-type: none"> • No smartphone battery

Table 2: List of differences between the two Back Casing versions of NFC Android Validators BC-VWDC-P447C,4 and BC-VPDC-P447C,4:

#	Differences	BC-VWDC-P366C,4	BC-VPDC-P366C,4
#1	Mechanical parts	<ul style="list-style-type: none"> • Wall mount 	<ul style="list-style-type: none"> • Pole mount

Table 3: List of differences between the NFC Android Validator Back Casings Wall BC-VWDC-P366C,2 and BC-VWDC-P366C,4:

#	Differences	NFC Android Validator BC-VWDC-P366C,2	NFC Android Validator BC-VWDC-P366C,4
#1	PCBA POWER	<ul style="list-style-type: none"> • PCBA PWR V18 with ferrites on cables 	<ul style="list-style-type: none"> • PCBA PWR V07

Table 4: List of differences between the NFC Android Validator Back Casing Pole BC-VPDC-P366C,4 and BC-VPDC-P366C,4:

#	Differences	NFC Android Validator BC-VPDC-P366C,2	NFC Android Validator BC-VPDC-P366C,4
#1	PCBA PWR	<ul style="list-style-type: none"> • PCBA PWR V18 with ferrites on cables 	<ul style="list-style-type: none"> • PCBA PWR V07

Table 5: List of differences between the FX925SF-ING-VWDC-PRE,011P,FX925SF-ING-VWDC-PRE,010P, FX925SF-ING-VPDC-PRE,011P,FX925SF-ING-VPDC-PRE,010P, and FX925F WM,FX925F PM

Models	Software version
FX925SF-ING-VWDC-PRE,011P,FX925SF-ING-VWDC-PRE,010P	MOLY.LR12A.R2.MP.V44.1.P1
FX925SF-ING-VPDC-PRE,011P,FX925SF-ING-VPDC-PRE,010P	
FX925F WM,FX925F PM	MOLY.LR12A.R2.MP.V44.1

-----End of Report-----