

FCC 47 CFR PART 15 SUBPART C**TEST REPORT****For****Wearable Camera****Model: Narrative Clip 2****Trade Name: Narrative***Issued to***Narrative AB
Agatan 55A, 582 22 Linkoping, Sweden***Issued by***Compliance Certification Services Inc.
No.11, Wugong 6th Rd., Wugu Dist.,
New Taipei City 24891, Taiwan. (R.O.C.)
<http://www.ccsrf.com>
service@ccsrf.com
Issued Date: March 28, 2016**

Testing Laboratory
1309

Note: This report shall not be reproduced except in full, without the written approval of Compliance Certification Services Inc. This document may be altered or revised by Compliance Certification Services Inc. personnel only, and shall be noted in the revision section of the document.

Revision History

Rev.	Issue Date	Revisions	Effect Page	Revised By
00	March 28, 2016	Initial Issue	ALL	Becca Chen
01	May 9, 2016	1. Modify Band Edges data	P.28 ~ P.45	Becca Chen
02	May 27, 2016	1. Modify Band Edges data	P.32	Becca Chen

TABLE OF CONTENTS

1. TEST RESULT CERTIFICATION.....	4
2. EUT DESCRIPTION.....	5
3. TEST METHODOLOGY.....	6
3.1 EUT CONFIGURATION	6
3.2 EUT EXERCISE	6
3.3 GENERAL TEST PROCEDURES	6
3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS.....	7
3.5 DESCRIPTION OF TEST MODES.....	8
4. INSTRUMENT CALIBRATION.....	9
4.1 MEASURING INSTRUMENT CALIBRATION.....	9
4.2 MEASUREMENT EQUIPMENT USED.....	9
4.3 MEASUREMENT UNCERTAINTY	10
5. FACILITIES AND ACCREDITATIONS.....	11
5.1 FACILITIES.....	11
5.2 EQUIPMENT	11
5.3 LABORATORY ACCREDITATIONS AND LISTING	11
5.4 TABLE OF ACCREDITATIONS AND LISTINGS	12
6. SETUP OF EQUIPMENT UNDER TEST.....	13
6.1 SETUP CONFIGURATION OF EUT.....	13
6.2 SUPPORT EQUIPMENT	13
7. FCC PART 15.247 REQUIREMENTS.....	14
7.1 6DB BANDWIDTH.....	14
7.2 PEAK POWER	22
7.3 AVERAGE POWER	24
7.4 BAND EDGES MEASUREMENT	26
7.5 PEAK POWER SPECTRAL DENSITY	52
7.6 RADIATED EMISSIONS	60
7.7 POWERLINE CONDUCTED EMISSIONS.....	84
APPENDIX II PHOTOGRAPHS OF TEST SETUP	87

1. TEST RESULT CERTIFICATION

Applicant: Narrative AB
Agatan 55A, 582 22 Linkoping, Sweden

Equipment Under Test: Wearable Camera

Model Number: Narrative Clip 2

Trade Name: Narrative

Date of Test: February 26 ~ March 16, 2016

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 15 Subpart C	No non-compliance noted

We hereby certify that:

The above equipment was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10: 2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207, 15.209, 15.247.

The test results of this report relate only to the tested sample EUT identified in this report.

Approved by:



Miller Lee
Manager
Compliance Certification Services Inc.

Reviewed by:



Angel Cheng
Section Manager
Compliance Certification Services Inc.

2. EUT DESCRIPTION

Product	Wearable Camera		
Model Number	Narrative Clip 2		
Trade Name	Narrative		
Model Discrepancy	N/A		
Received Date	February 26, 2016		
EUT Power Rating	1. Power from host device via USB Cable 2. Power from Li-ion BATTERY: Rating: 315mAh, 1.20Wh		
Frequency Range	IEEE 802.11b/g/ IEEE 802.11n HT 20 MHz Mode: 2412 ~ 2462 MHz		
Transmit Power	Mode	Frequency Range	Output Power (dBm)
	IEEE 802.11b	2412 - 2462	21.56
	IEEE 802.11g	2412 - 2462	23.93
	IEEE 802.11n HT 20 MHz	2412 - 2462	23.81
Number of Channels	IEEE 802.11b/g mode: 11 Channels IEEE 802.11n HT 20 MHz mode: 11 Channels		
Antenna Specification	PCB Antenna / -1.3 dBi		

Remark:

1. The sample selected for test was engineering sample that approximated to production product and was provided by manufacturer.
2. This submittal(s) (test report) is intended for **FCC ID: 2AGQQNCLIPV2** filing to comply with FCC Part 15C, Section 15.207, 15.209.

3. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.10: 2013 and FCC CFR 47 Part 15.207, 15.209, 15.247, KDB 558074 D01 DTS Meas Guidance v03r03.

3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

3.2 EUT EXERCISE

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.207, 15.209 and 15.247 under the FCC Rules Part 15 Subpart C.

3.3 GENERAL TEST PROCEDURES

Conducted Emissions

According to the requirements in ANSI C63.10: 2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 1.5 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in ANSI C63.10: 2013.

3.4 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
¹ 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 -	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.52525	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.7 - 156.9	3260 - 3267	23.6 - 24.0
12.29 - 12.293	162.0125 - 167.17	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	167.72 - 173.2	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	240 - 285	3600 - 4400	(²)
13.36 - 13.41	322 - 335.4		

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

² Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

3.5 DESCRIPTION OF TEST MODES

The EUT (model: Narrative Clip 2) had been tested under operating condition.

Software used to control the EUT for staying in continuous transmitting and receiving mode was programmed.

After verification, all tests carried out are with the worst-case test modes as shown below except radiated spurious emission below 1GHz and power line conducted emissions below 30MHz, which worst case was in normal link mode and receiving radiated spurious emission above 1GHz, which worst case was in CH Mid mode only.

IEEE 802.11b mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 1Mbps data rate were chosen for full testing.

IEEE 802.11g mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6Mbps data rate were chosen for full testing.

IEEE 802.11n HT 20 MHz mode:

Channel Low (2412MHz), Channel Mid (2437MHz) and Channel High (2462MHz) with 6.5Mbps data rate were chosen for full testing.

The field strength of spurious emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

4. INSTRUMENT CALIBRATION

4.1 MEASURING INSTRUMENT CALIBRATION

The measuring equipment, which was utilized in performing the tests documented herein, has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment, which is traceable to recognized national standards.

4.2 MEASUREMENT EQUIPMENT USED

Equipment Used for Emissions Measurement

Remark: Each piece of equipment is scheduled for calibration once a year and Loop Antenna is scheduled for calibration once three years.

Conducted Emissions Test Site				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510252	12/07/2016
Thermostatic/Humidity Chamber	TAICHY	MHG-150LF	930619	10/07/2016
AC Power Source	EXTECH	6205	1140845	N.C.R
DC Power Supply	ABM	8301HD	D011531	N.C.R
Power Meter	Anritsu	ML2495A	1012009	07/07/2016
Power Sensor	Anritsu	MA2411A	0917072	07/07/2016
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101073	07/19/2016

Wugu 966 Chamber A				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum Analyzer	Agilent	E4446A	US42510268	01/24/2017
EMI Test Receiver	R&S	ESCI	100064	06/03/2016
Bilog Antenna	Sunol Sciences	JB3	A030105	08/05/2016
Horn Antenna	EMCO	3117	00055165	01/25/2017
Horn Antenna	EMCO	3116	26370	12/24/2016
Turn Table	CCS	CC-T-1F	N/A	N.C.R
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R
Pre-Amplifier	MITEQ	1652-3000	1490939	08/09/2016
Pre-Amplifier	EMC	EMC 012635	980151	06/04/2016
Pre-Amplifier	MITEQ	AMF-6F-260400-40-8P	985646	12/24/2016
Coaxial Cable	Huber+Suhner	102	29212/2	12/24/2016
Coaxial Cable	Huber+Suhner	102	29406/2	12/24/2016
Test S/W	EZ-EMC (CCS-3A1RE)			

Conducted Emission room # B				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCI	101073	09/08/2016
LISN	R&S	ENV216	101054	06/06/2016
LISN	SCHWARZBECK	NSLK 8127	8127-541	11/22/2016
Capacitive Voltage Probe	FCC	F-CVP-1	100185	03/08/2017
Test S/W	CCS-3A1-CE			

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R. = No Calibration Request.

4.3 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
Powerline Conducted Emission	+/- 1.2575
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683

Remark: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

5. FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

- No.199, Chunghsen Road, Hsintien City, Taipei Hsien, Taiwan, R.O.C.
Tel: 886-2-2217-0894 / Fax: 886-2-2217-1029
- No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)
Tel: 886-2-2299-9720 / Fax: 886-2-2298-4045
- No.81-1, Lane 210, Bade 2nd Rd., Lujhu Township, Taoyuan County 33841, TAIWAN, R.O.C.
Tel: 886-3-324-0332 / Fax: 886-3-324-5235

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10: 2013 and CISPR Publication 22.

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, horn and/or Loop. Spectrum analyzers with pre-selectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

5.3 LABORATORY ACCREDITATIONS AND LISTING

The test facilities used to perform radiated and conducted emissions tests are accredited by American Association for Laboratory Accreditation Program for the specific scope accreditation under Lab Code: 0824-01 to perform Electromagnetic Interference tests according to FCC Part 15 and CISPR 22 requirements. In addition, the test facilities are listed with Industry Canada, Certification and Engineering Bureau, IC 2324G-1 for 3M Semi Anechoic Chamber A, 2324G-2 for 3M Semi Anechoic Chamber B.

5.4 TABLE OF ACCREDITATIONS AND LISTINGS

Country	Agency	Scope of Accreditation	Logo
USA	FCC	3M Semi Anechoic Chamber (FCC MRA: TW1039) to perform FCC Part 15 measurements	 FCC MRA: TW1039
Taiwan	TAF	LP0002, RTTE01, FCC Method-47 CFR Part 15 Subpart C, D, E, RSS-210, RSS-310 IDA TS SRD, AS/NZS 4268, AS/NZS 4771, TS 12.1 & 12.2, ETSI EN 300 440-1, ETSI EN 300 440-2, ETSI EN 300 328, ETSI EN 300 220-1, ETSI EN 300 220-2, ETSI EN 301 893, ETSI EN 301 489-1/3/7/17 FCC OET Bulletin 65 + Supplement C, EN 50360, EN 50361, EN 50371, RSS 102, EN 50383, EN 50385, EN 50392, IEC 62209, CNS 14958-1, CNS 14959 FCC Method -47 CFR Part 15 Subpart B IEC / EN 61000-3-2, IEC / EN 61000-3-3, IEC / EN 61000-4-2/3/4/5/6/8/11	 Testing Laboratory 1309
Canada	Industry Canada	3M Semi Anechoic Chamber (IC 2324G-1 / IC 2324G-2) to perform	 IC 2324G-1 IC 2324G-2

** No part of this report may be used to claim or imply product endorsement by A2LA or any agency of the US Government.*

6. SETUP OF EQUIPMENT UNDER TEST

6.1 SETUP CONFIGURATION OF EUT

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

6.2 SUPPORT EQUIPMENT

No	Equipment	Brand	Model	Series No.	FCC ID	Data Cable	Power Cord
1	Notebook PC	IBM	7663 (T61)	L3E9812	N/A	N/A	AC I/P: Unshielded, 1.8m DC O/P: Unshielded, 1.8m with a core

Remark:

1. *All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
2. *Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*

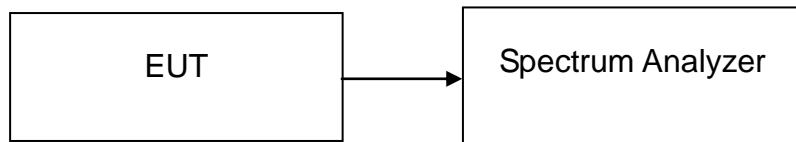
7. FCC PART 15.247 REQUIREMENTS

7.1 6DB BANDWIDTH

LIMIT

According to §15.247(a)(2), systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6dB bandwidth shall be at least 500 kHz.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in the transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
3. Set the spectrum analyzer as RBW = 100 kHz, VBW= 300kHz, Span = 50 MHz, Sweep = auto.
4. Mark the peak frequency and –6dB (upper and lower) frequency.
5. Repeat until all the rest channels are investigated.

TEST RESULTS

No non-compliance noted

Test Data**IEEE 802.11b mode**

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	8.0320	>500	PASS
Mid	2437	8.0320		PASS
High	2462	8.0320		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.1950	>500	PASS
Mid	2437	15.1950		PASS
High	2462	15.1950		PASS

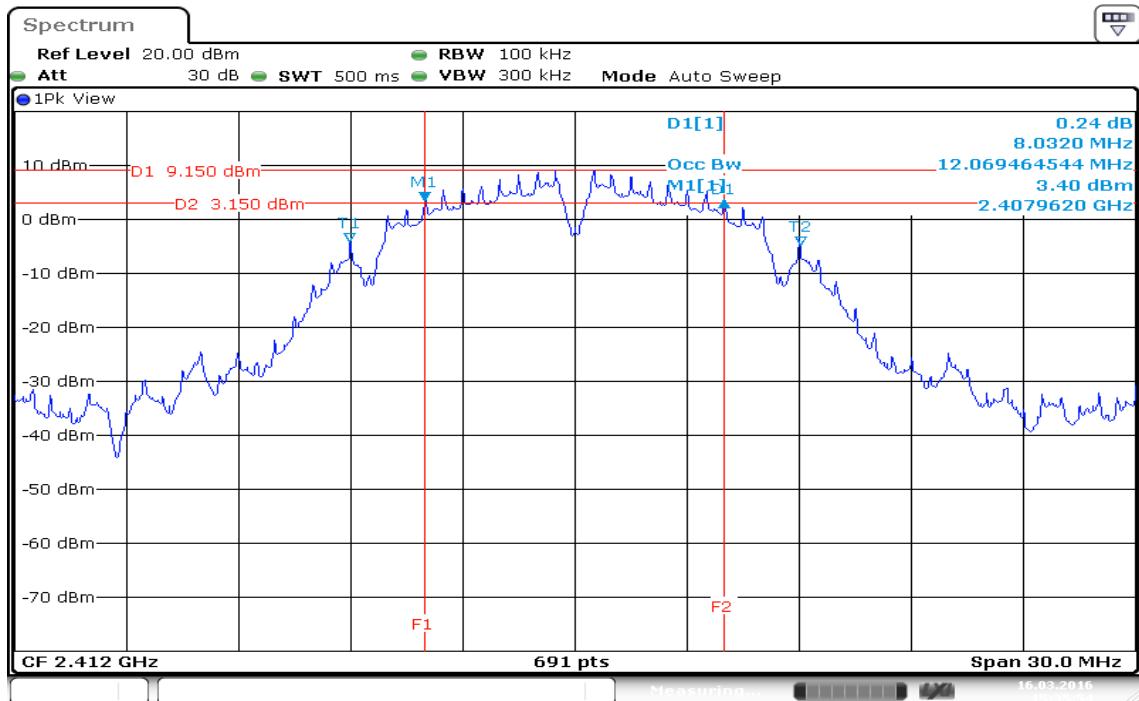
IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (kHz)	Result
Low	2412	15.1520	>500	PASS
Mid	2437	15.1950		PASS
High	2462	15.1950		PASS

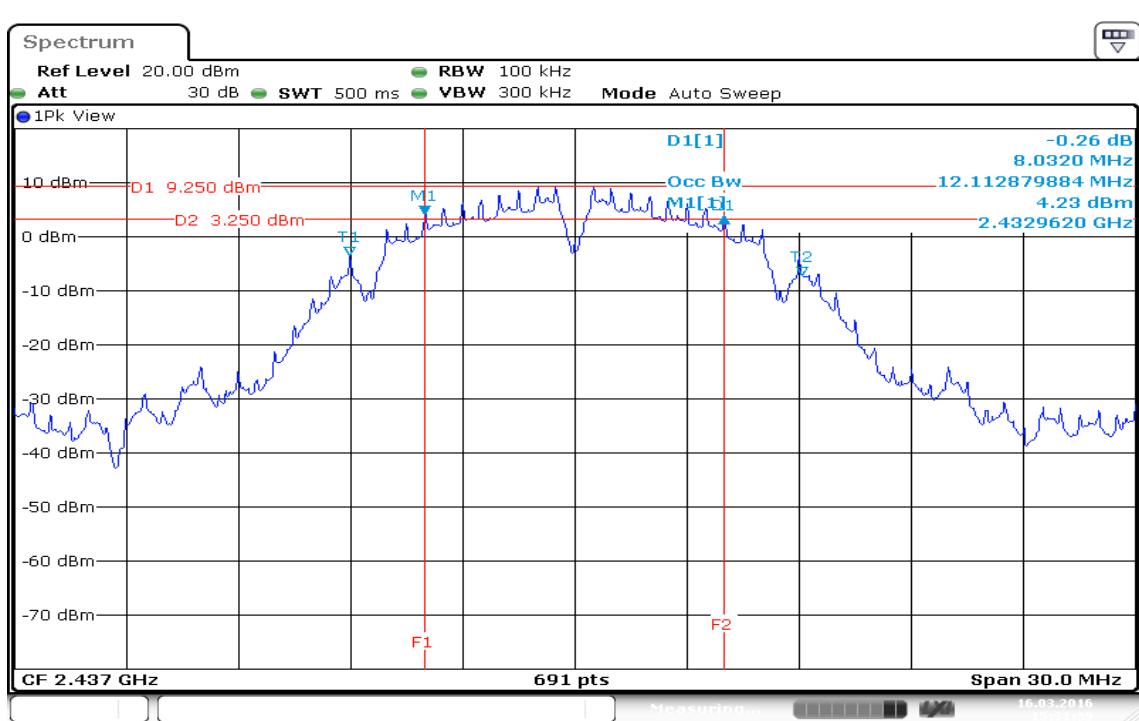
Test Plot

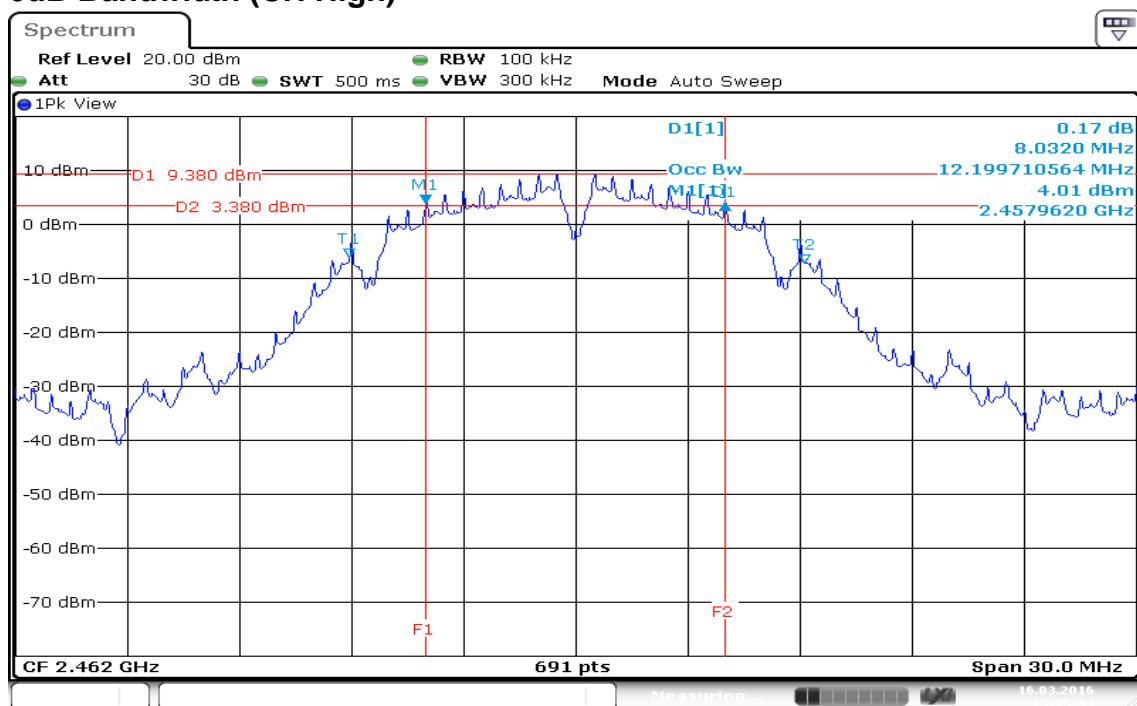
IEEE 802.11b mode

6dB Bandwidth (CH Low)

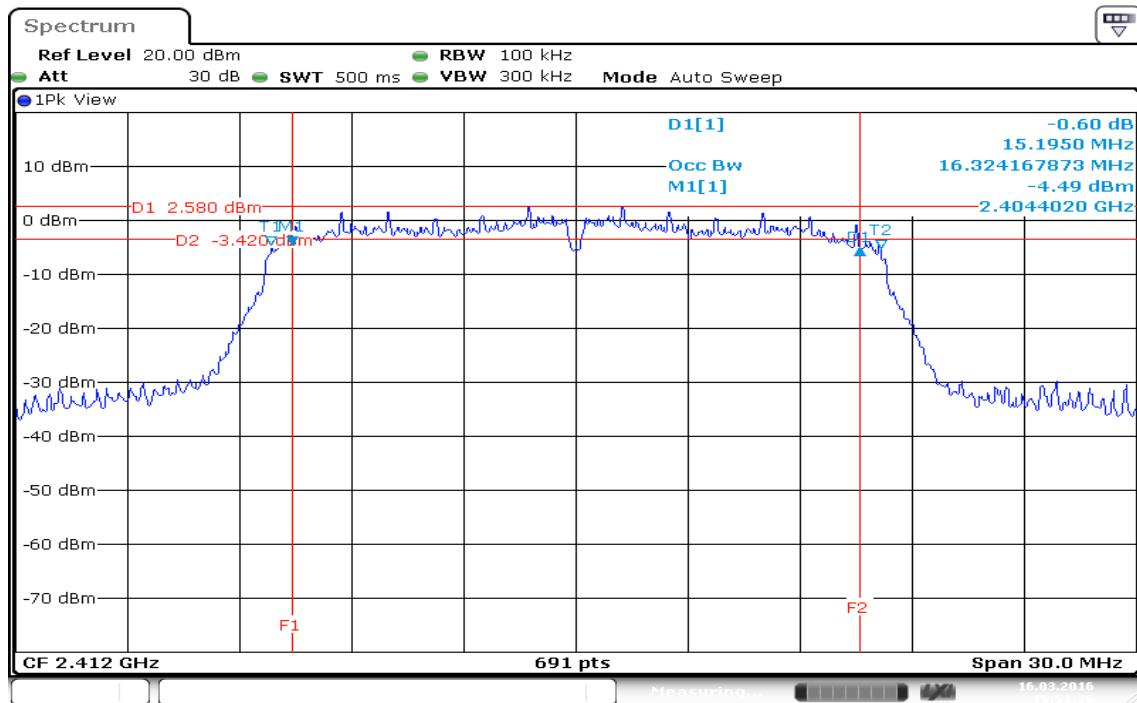


6dB Bandwidth (CH Mid)

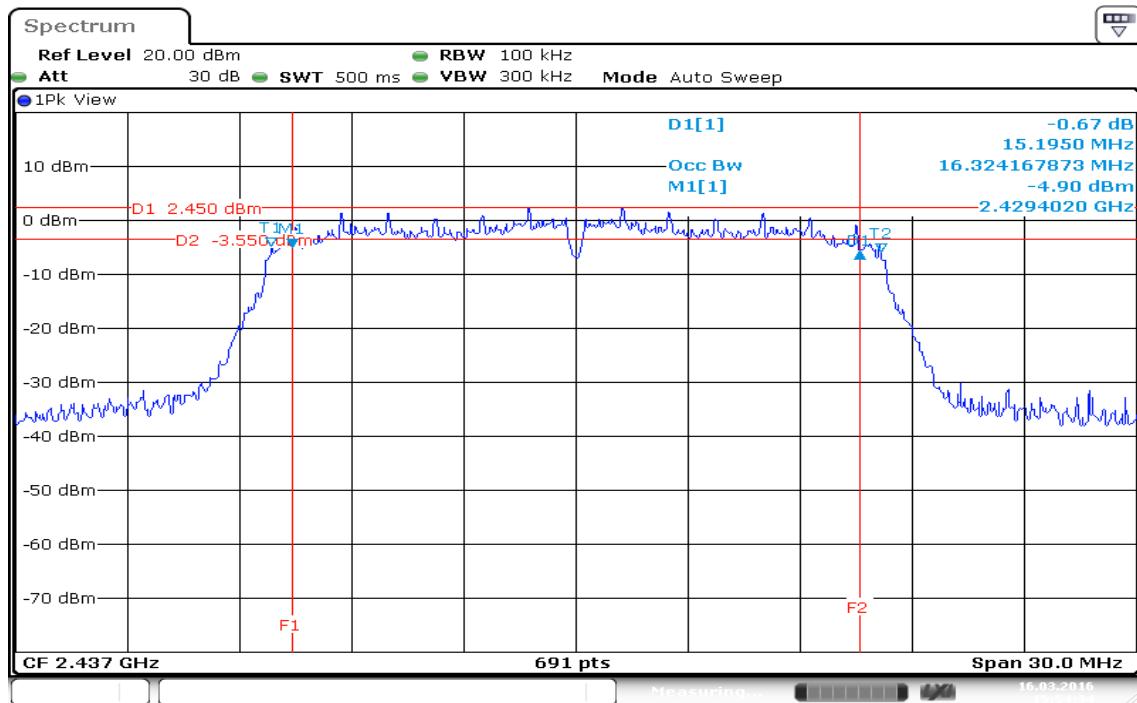


6dB Bandwidth (CH High)

Date: 16.MAR.2016 15:15:05

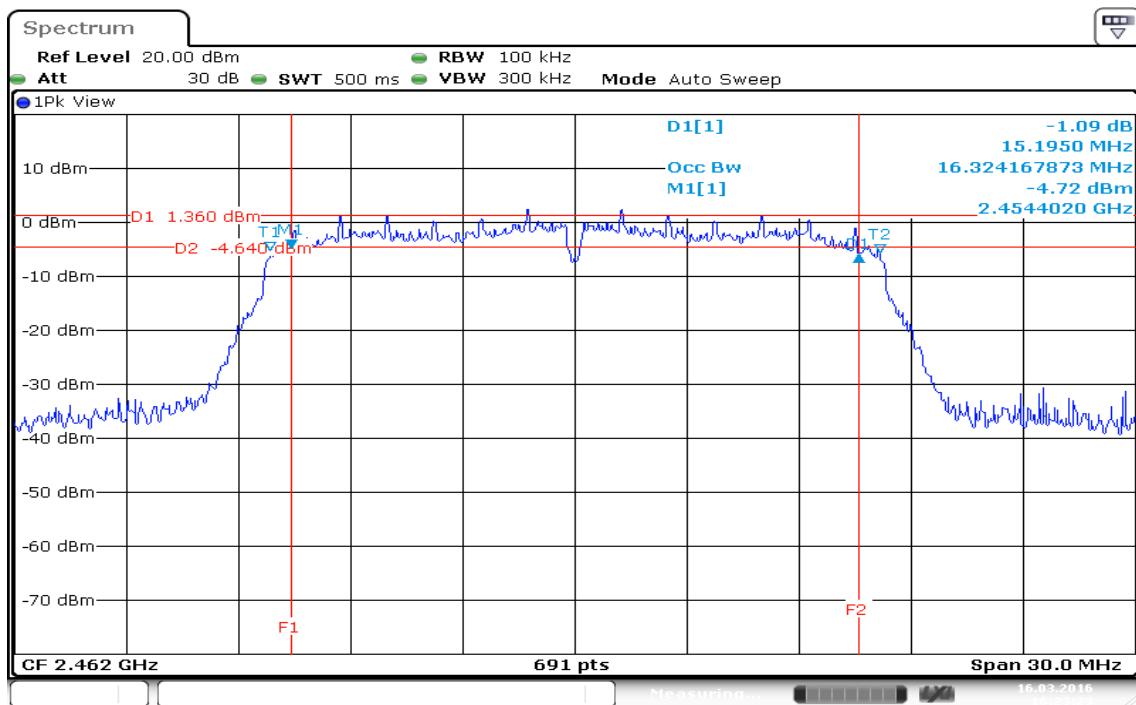
IEEE 802.11g mode**6dB Bandwidth (CH Low)**

Date: 16.MAR.2016 15:51:26

6dB Bandwidth (CH Mid)

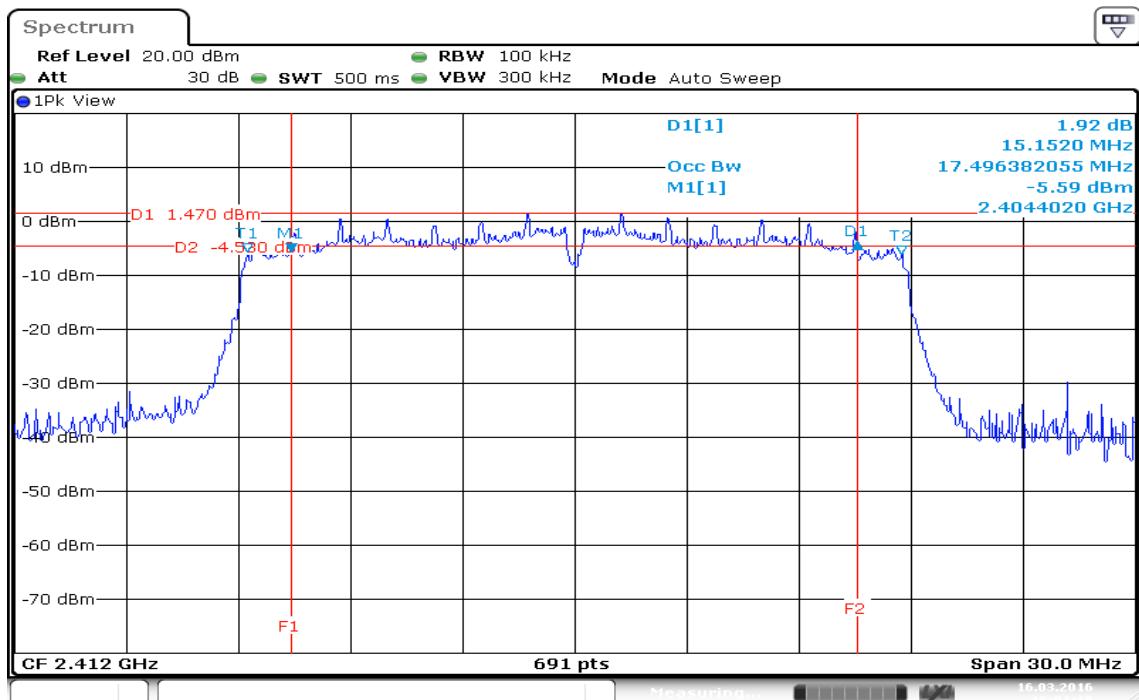
Date: 16.MAR.2016 15:54:34

6dB Bandwidth (CH High)



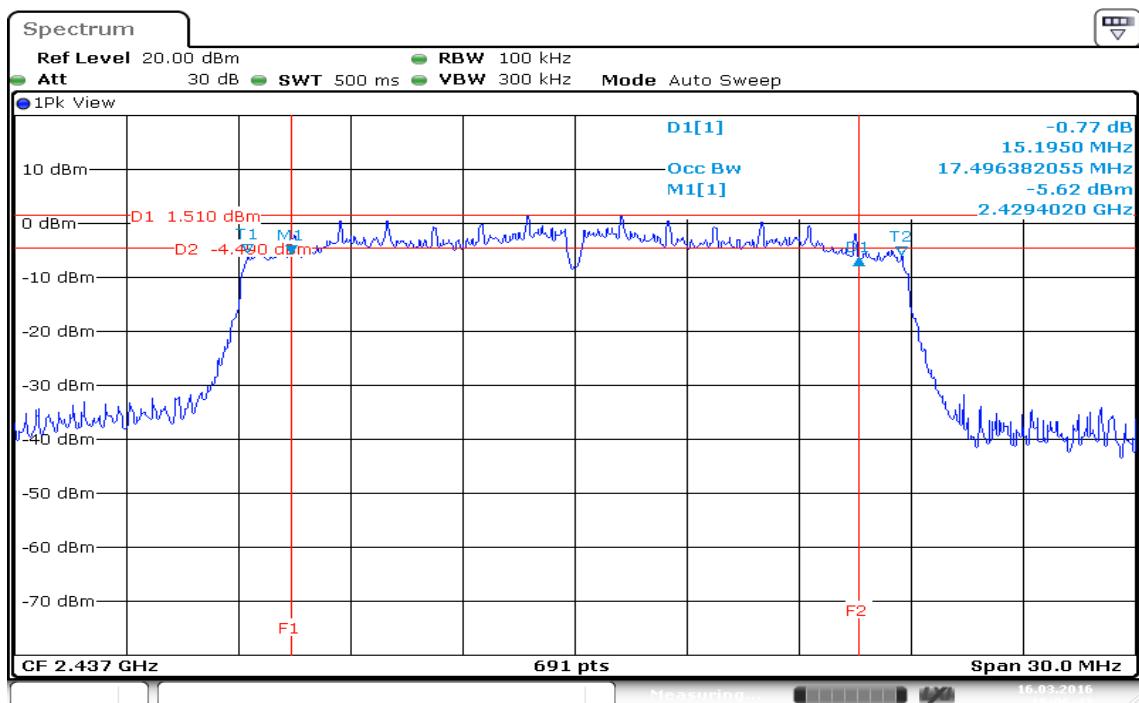
IEEE 802.11n HT 20 MHz mode

6dB Bandwidth (CH Low)

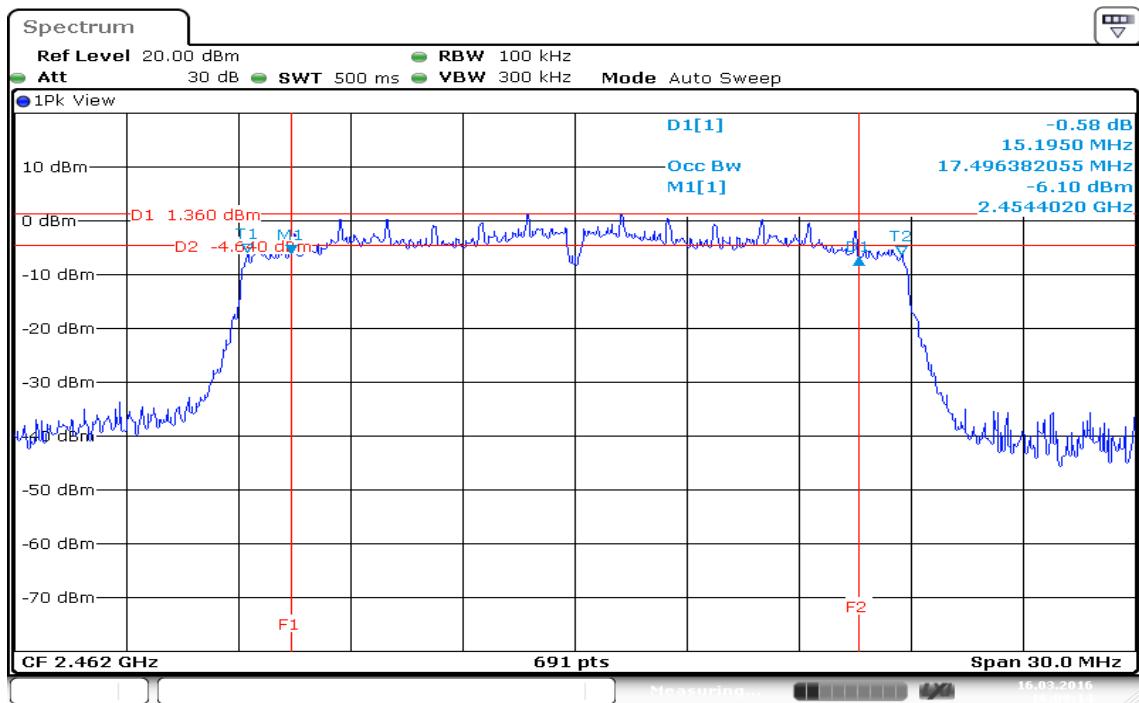


Date: 16.MAR.2016 16:01:10

6dB Bandwidth (CH Mid)



Date: 16.MAR.2016 16:06:43

6dB Bandwidth (CH High)

Date: 16.MAR.2016 16:09:15

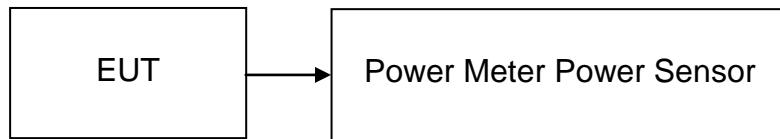
7.2 PEAK POWER

LIMIT

The maximum peak output power of the intentional radiator shall not exceed the following:

1. According to §15.247(b)(3), for systems using digital modulation in the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz: 1 Watt.
2. According to §15.247(b)(4), the conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	21.41	0.1384	30	PASS
Mid	2437	*21.56	0.1432		PASS
High	2462	21.13	0.1297		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	*23.93	0.2472	30	PASS
Mid	2437	23.82	0.2410		PASS
High	2462	23.56	0.2270		PASS

IEEE 802.11n HT 20 MHz mode

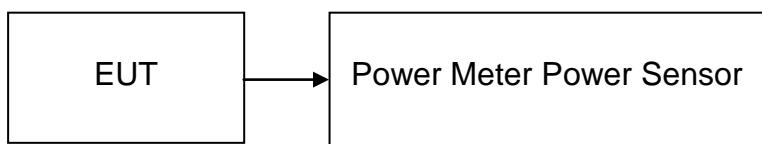
Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (dBm)	Result
Low	2412	*23.81	0.2404	30	PASS
Mid	2437	23.67	0.2328		PASS
High	2462	23.74	0.2366		PASS

7.3 AVERAGE POWER

LIMIT

None; for reporting purposes only.

Test Configuration



TEST PROCEDURE

The transmitter output is connected to the Power Meter. The Power Meter is set to the peak power detection.

TEST RESULTS

No non-compliance noted

Test Data**Test mode: IEEE 802.11b mode**

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	18.34	0.0682
Mid	2437	*18.40	0.0692
High	2462	18.03	0.0635

Test mode: IEEE 802.11g mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	13.60	0.0229
Mid	2437	*13.82	0.0241
High	2462	13.54	0.0226

Test mode: IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2412	12.53	0.0179
Mid	2437	*12.70	0.0186
High	2462	12.43	0.0175

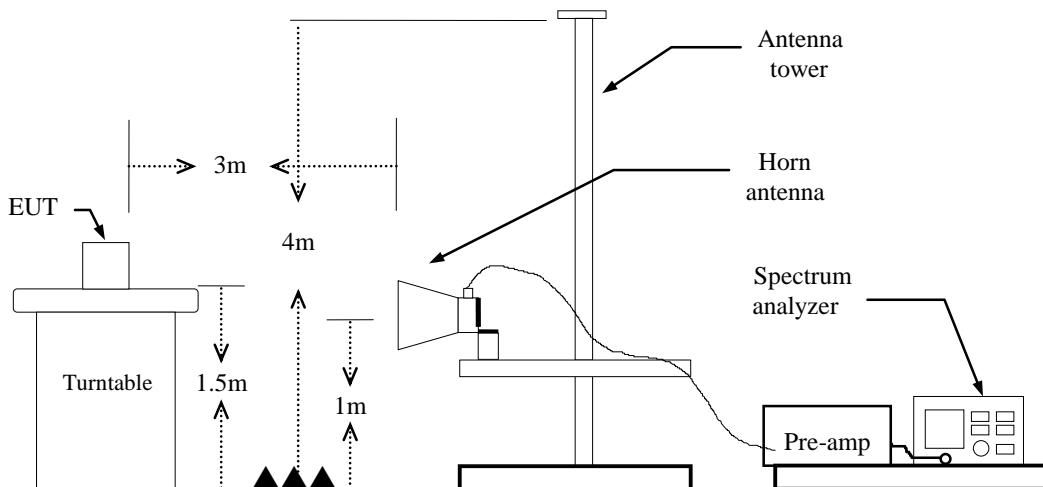
7.4 BAND EDGES MEASUREMENT

LIMIT

According to §15.247(d), in any 100 kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see Section 15.205(c)).

Test Configuration

For Radiated



TEST PROCEDURE

For Radiated

1. The EUT is placed on a turntable, which is 1.5m above the ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission.
4. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:
 - (a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO
 - (b) AVERAGE: RBW=1MHz,
 - if duty cycle \geq 98%, VBW=10Hz.
 - if duty cycle < 98% VBW=1/T.

IEEE 802.11b mode: \geq 98%, VBW=10Hz

IEEE 802.11g mode: =97%, VBW=1.5kHz

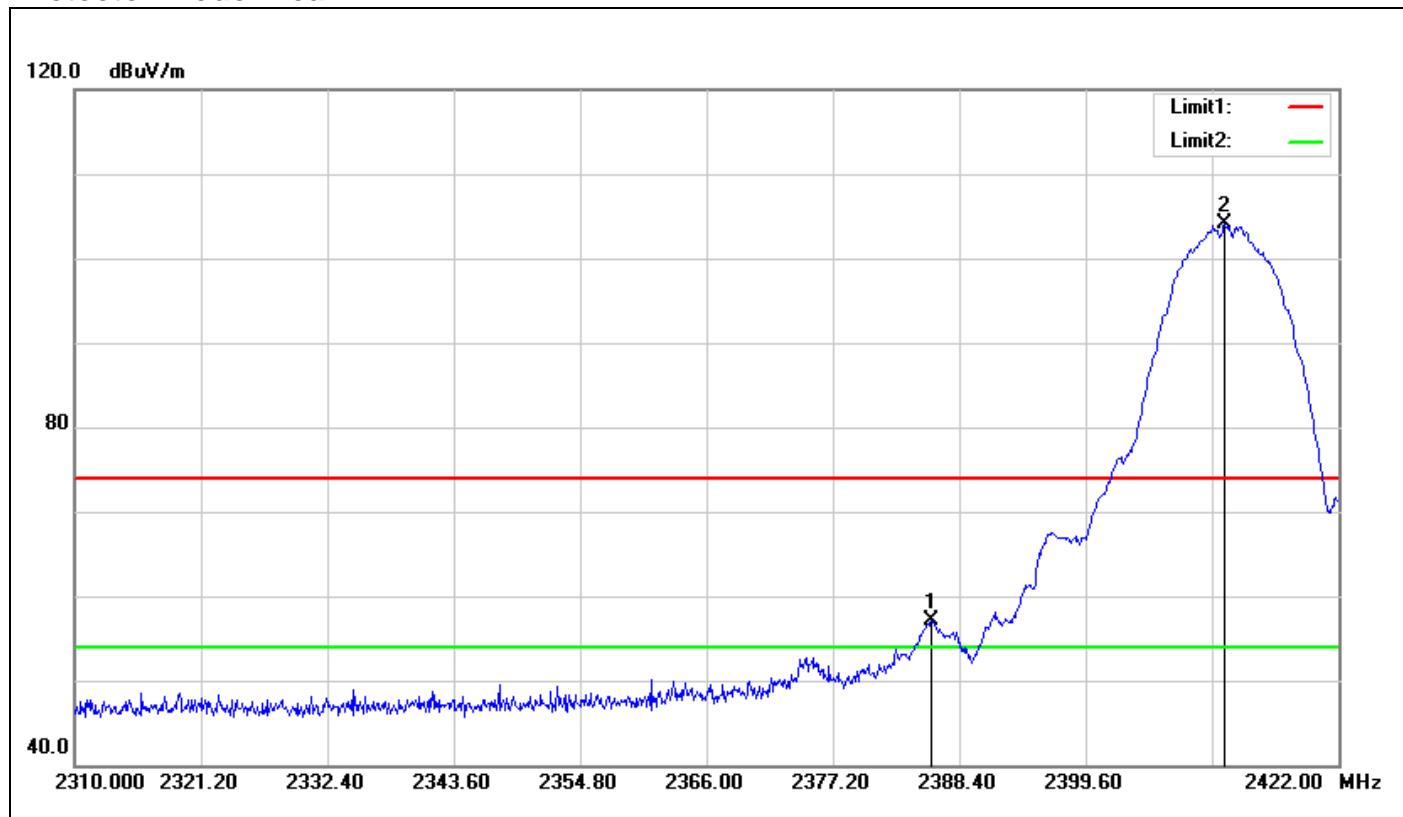
IEEE 802.11n HT 20 MHz mode: =96%, VBW=1.5kHz
5. Repeat the procedures until all the PEAK and AVERAGE versus POLARIZATION are measured.
6. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

For Un-restricted Band Emissions

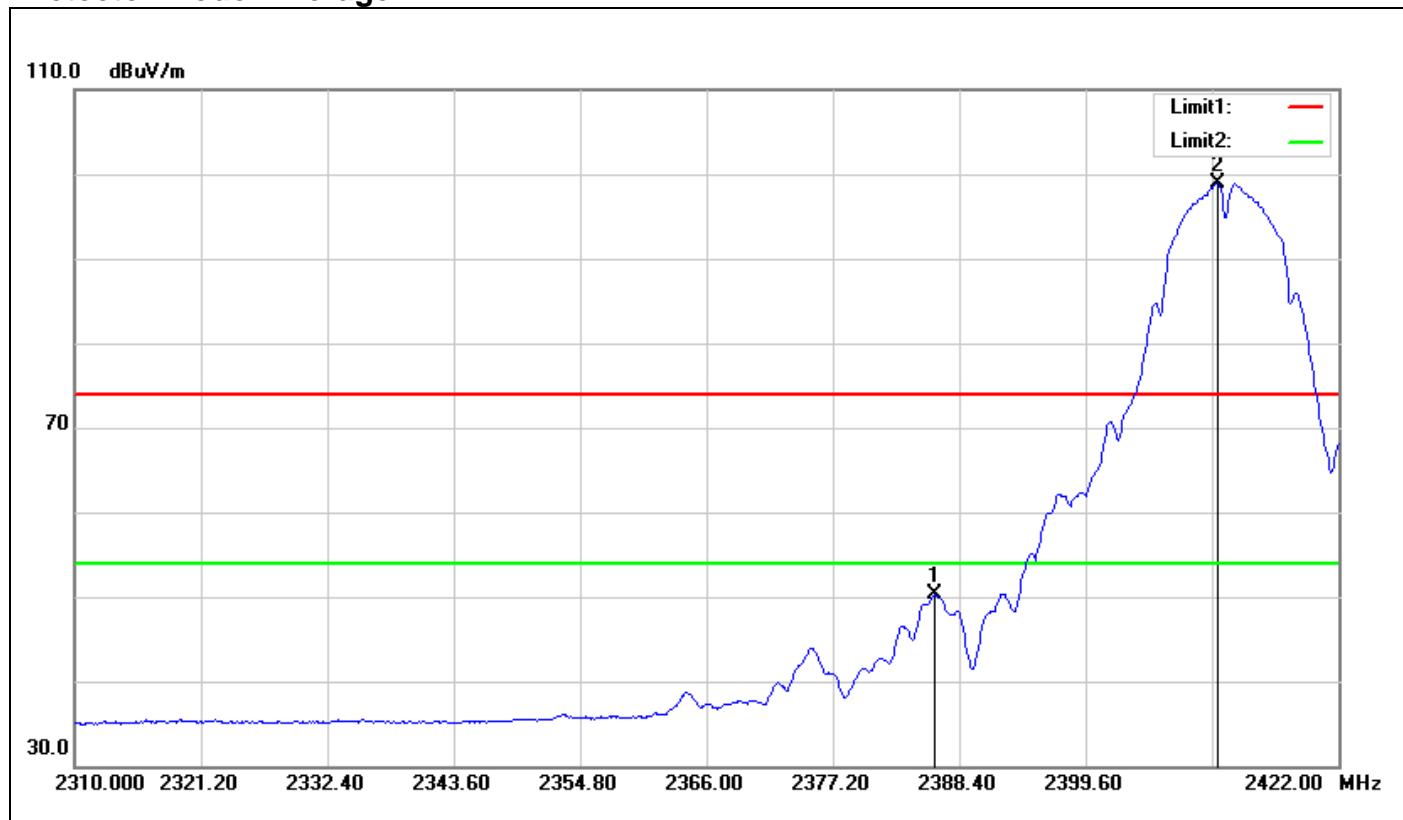
The peak output power procedure is used to measure the fundamental emission power to demonstrate compliance to requirements, then the peak conducted output power measured within any 100 kHz outside the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum measured in-band peak PSD level.

TEST RESULTS

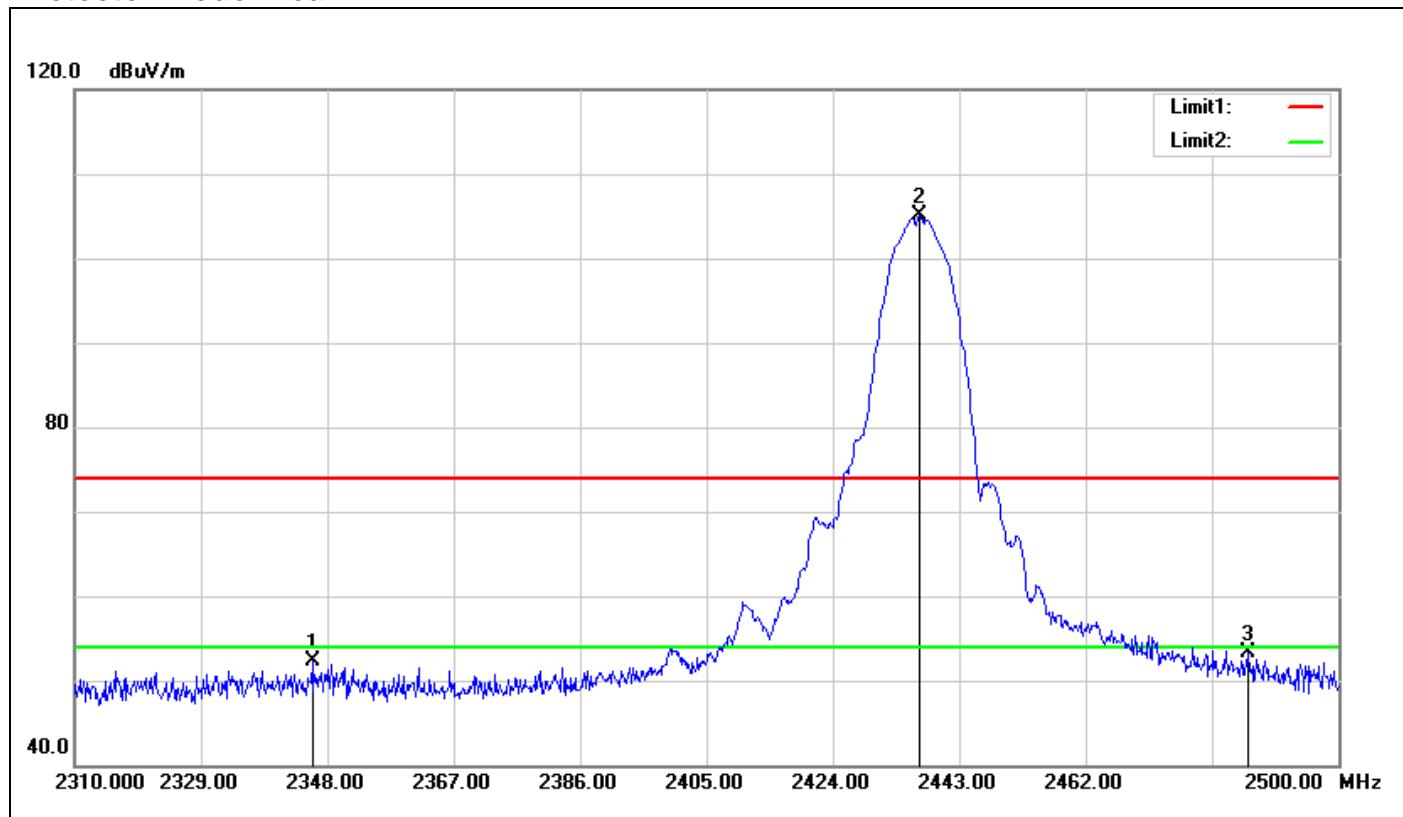
Refer to attach spectrum analyzer data chart.

Band Edges (IEEE 802.11b mode / CH Low)**Detector mode: Peak**

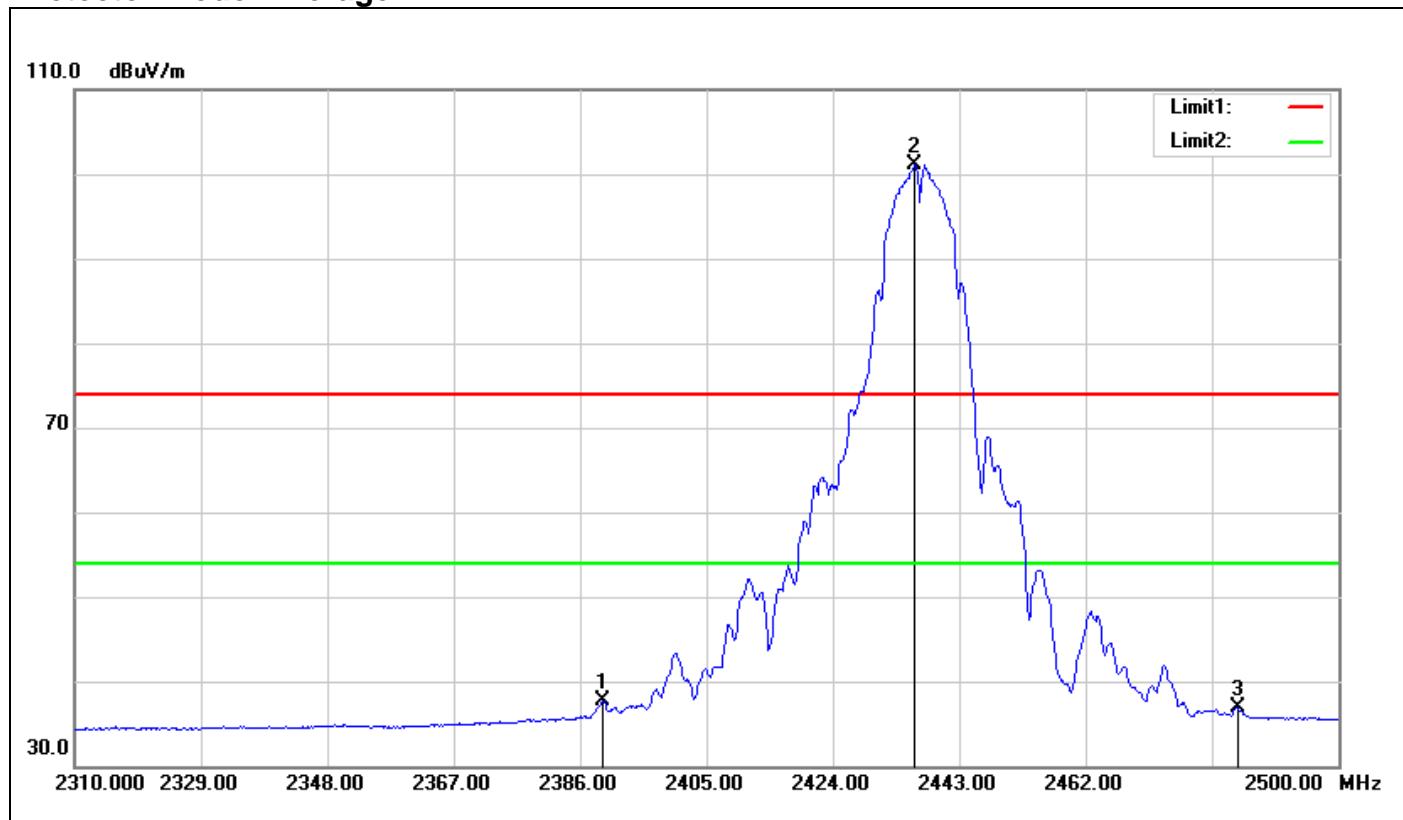
No.	Frequency (MHz)	Reading (dB _{uV})	Correct Factor(dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2385.936	59.72	-2.53	57.19	74.00	-16.81	peak
2	2411.920	106.48	-2.42	104.06	--	--	peak

Detector mode: Average

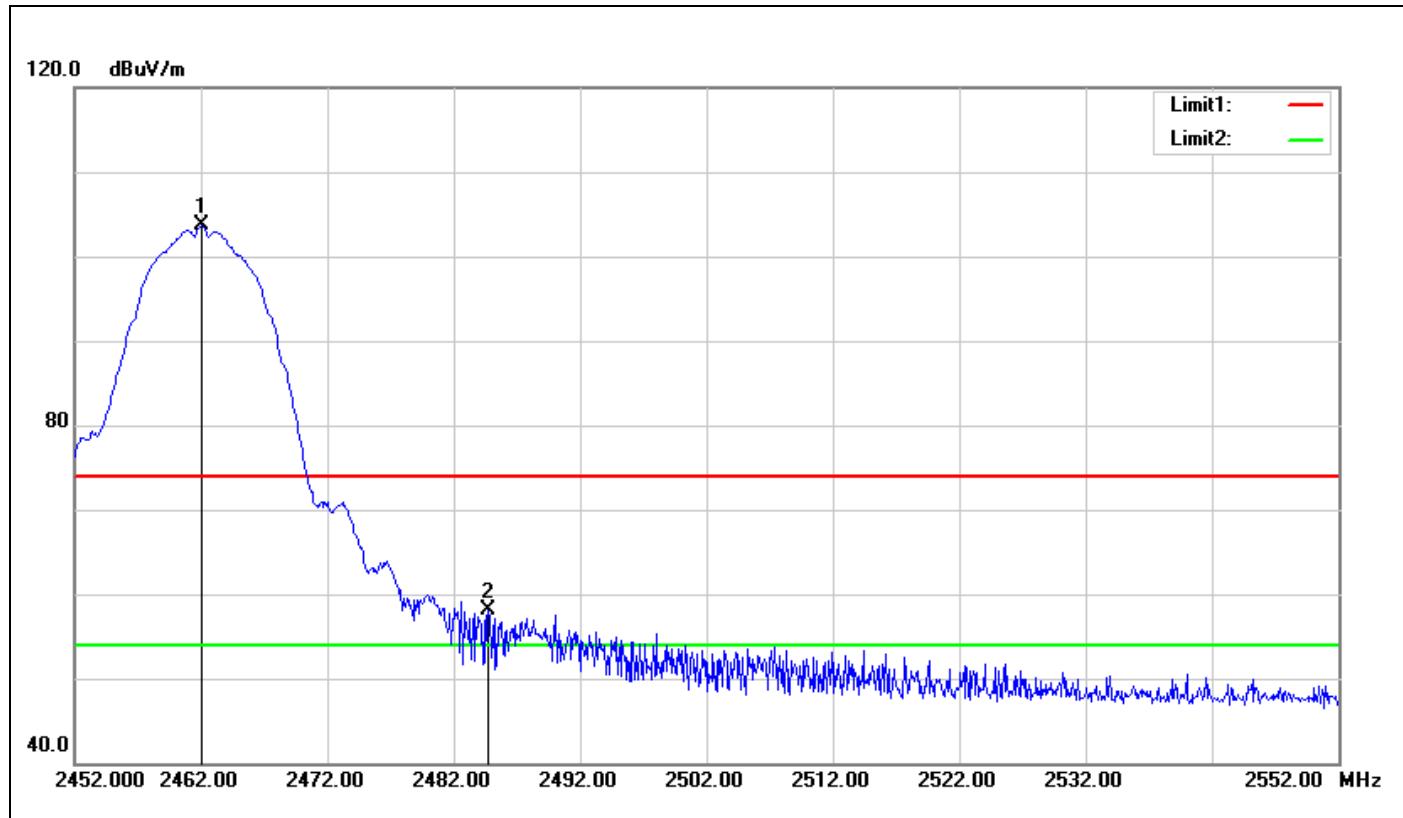
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2386.272	52.75	-2.52	50.23	54.00	-3.77	AVG
2	2411.248	101.39	-2.42	98.97	--	--	AVG

Band Edges (IEEE 802.11b mode / CH Mid)**Detector mode: Peak**

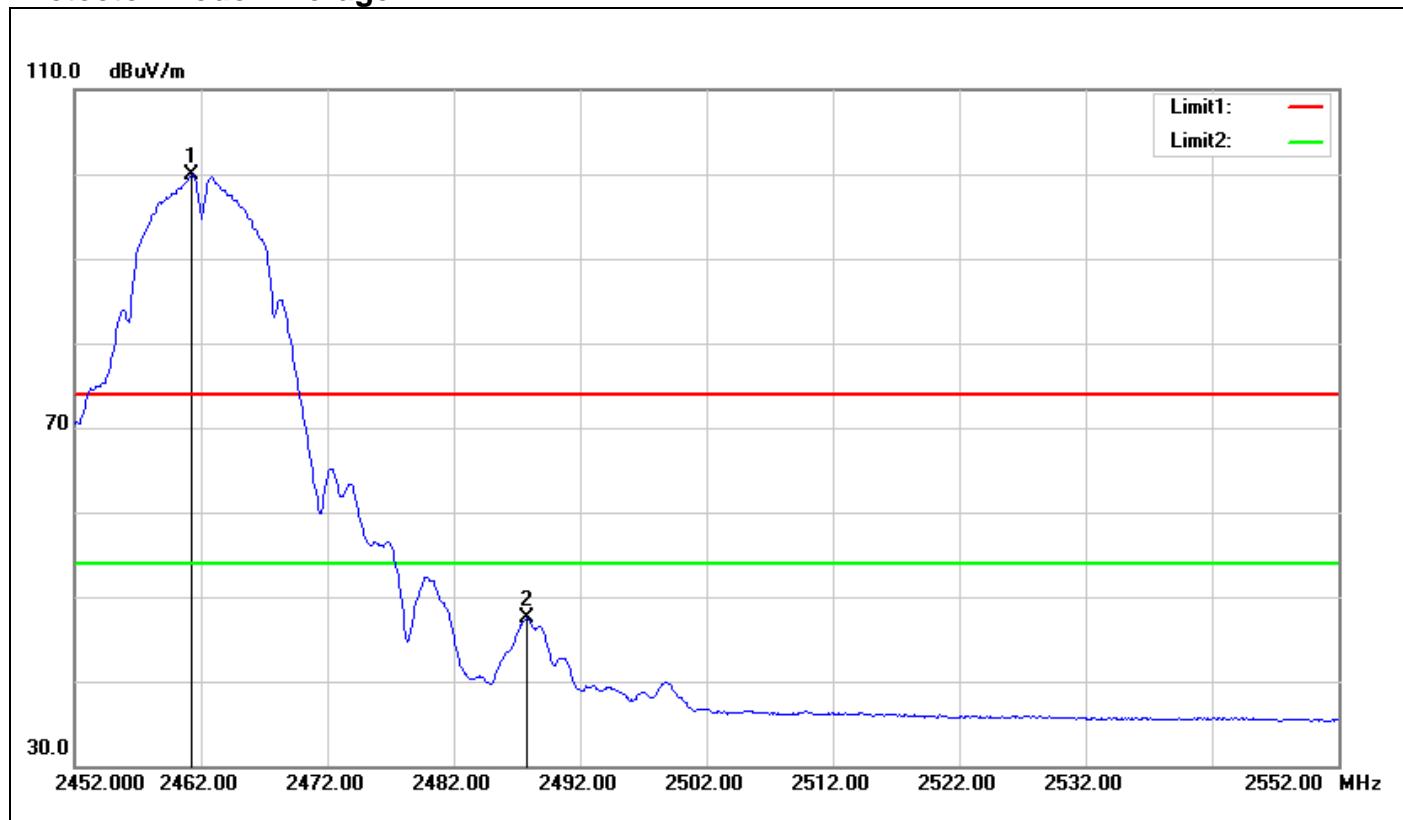
No.	Frequency (MHz)	Reading (dB _{uV})	Correct Factor(dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	ARemark
1	2345.720	55.14	-2.87	52.27	74.00	-21.73	peak
2	2437.110	107.30	-2.23	105.07	--	--	peak
3	2486.510	55.31	-1.96	53.35	74.00	-20.65	peak

Detector mode: Average

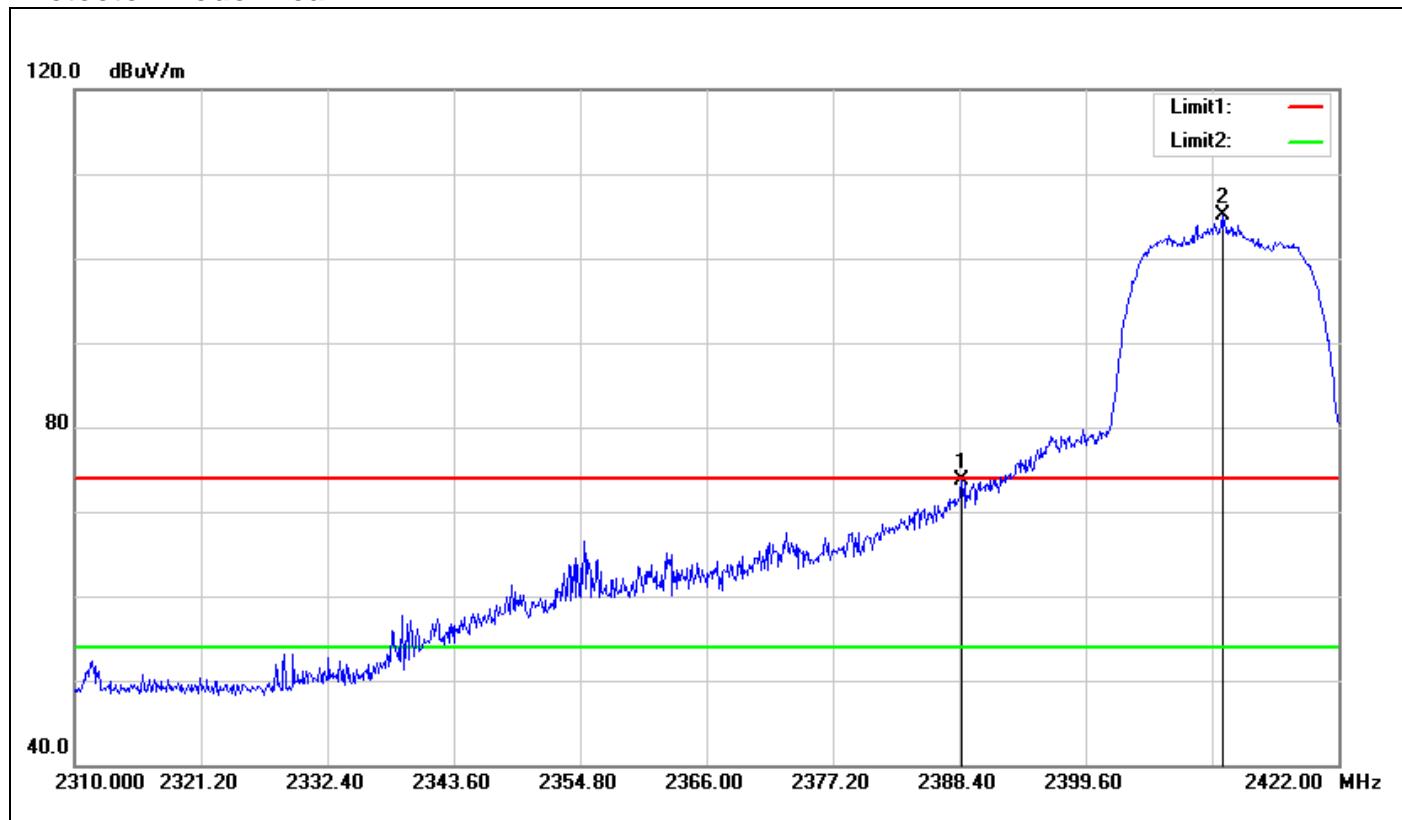
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.420	40.24	-2.50	37.74	54.00	-16.26	AVG
2	2436.350	103.34	-2.24	101.10	--	--	AVG
3	2484.800	38.87	-1.98	36.89	54.00	-17.11	AVG

Band Edges (IEEE 802.11b mode / CH High)**Detector mode: Peak**

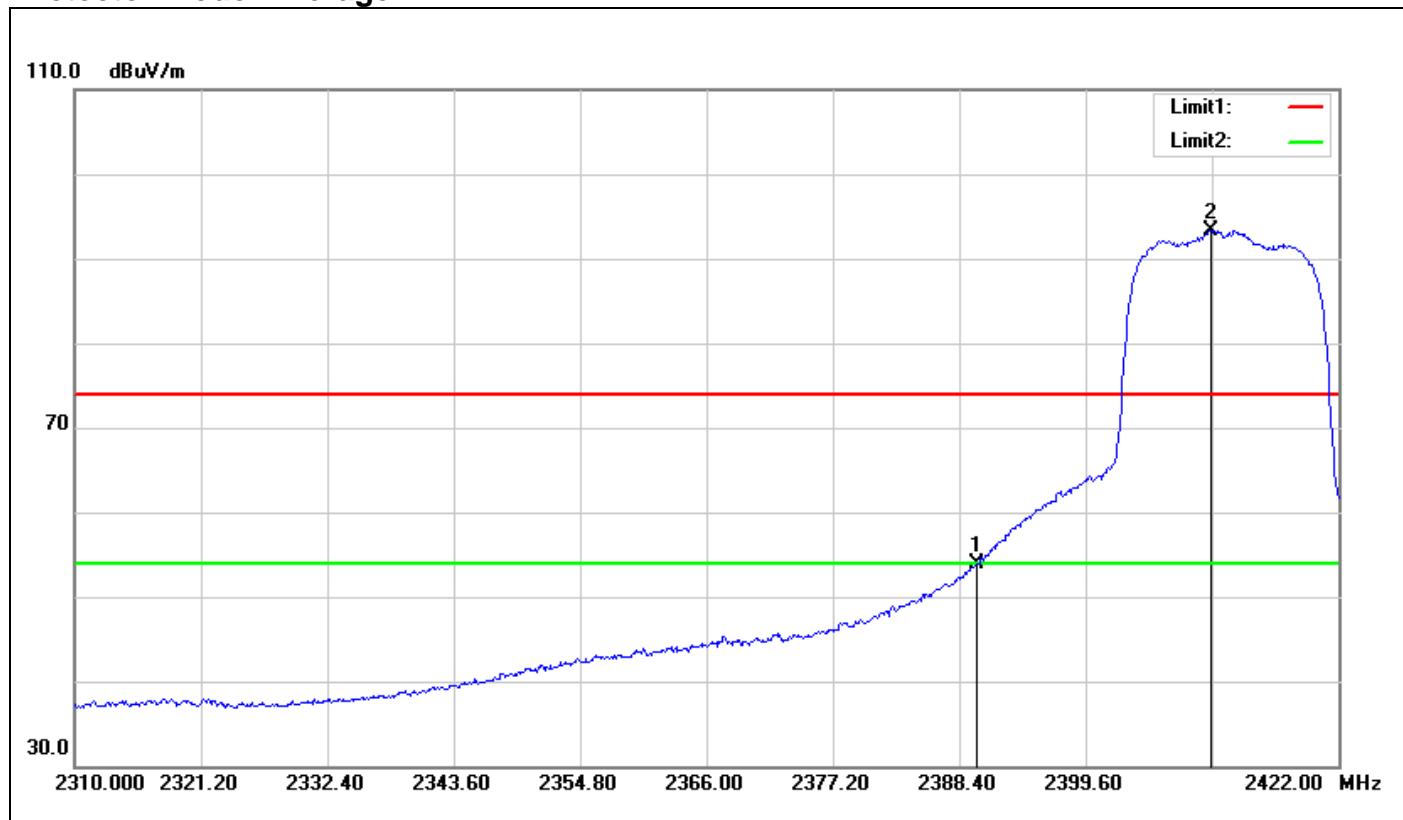
No.	Frequency (MHz)	Reading (dB _{uV})	Correct Factor(dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2462.100	105.74	-2.10	103.64	--	--	peak
2	2484.700	60.09	-1.98	58.11	74.00	15.89	peak

Detector mode: Average

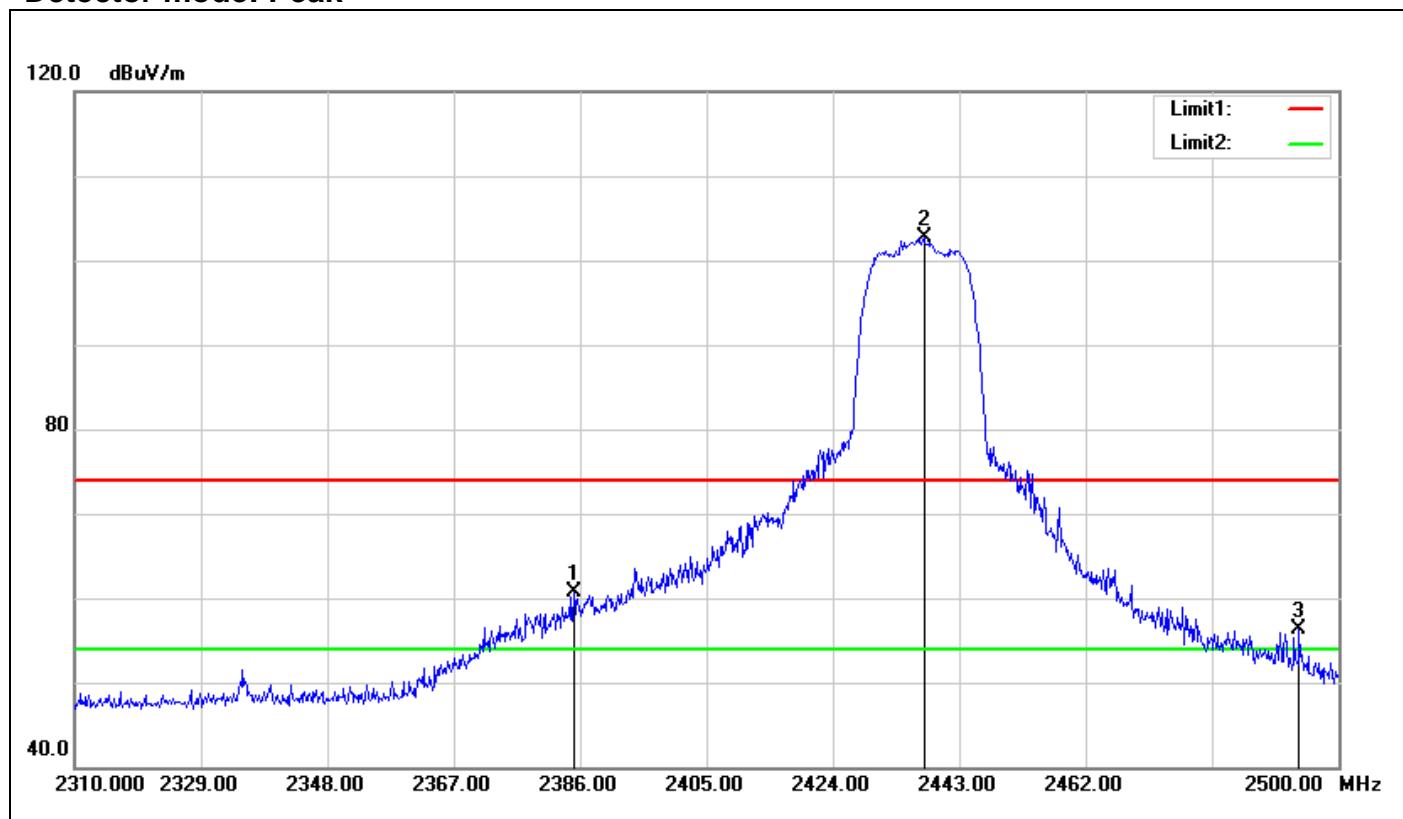
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.300	101.98	-2.10	99.88	--	--	AVG
2	2487.800	49.42	-1.95	47.47	54.00	-6.53	AVG

Band Edges (IEEE 802.11g mode / CH Low)**Detector mode: Peak**

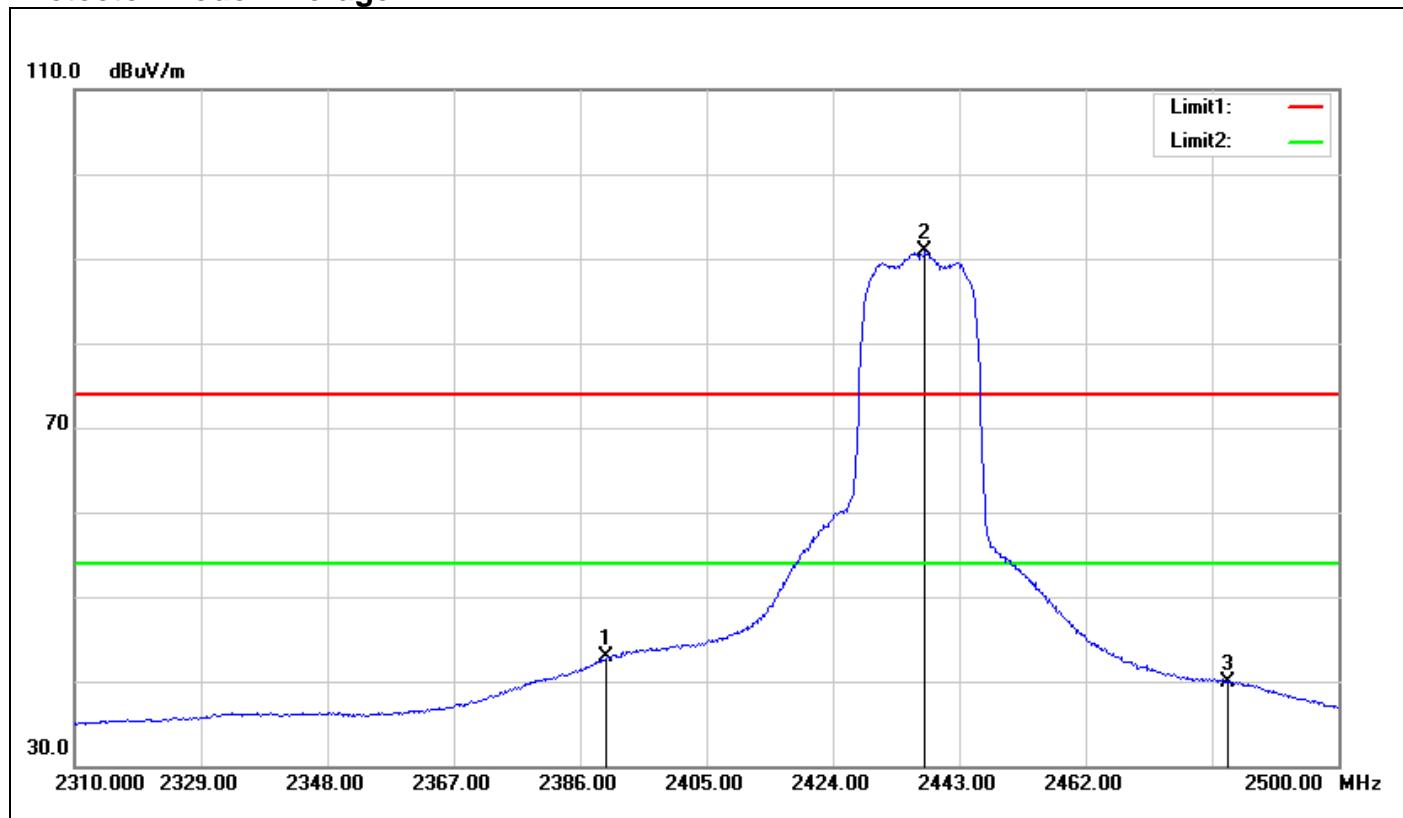
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.624	76.21	-2.50	73.71	74.00	-0.29	peak
2	2411.696	107.44	-2.42	105.02	--	--	peak

Detector mode: Average

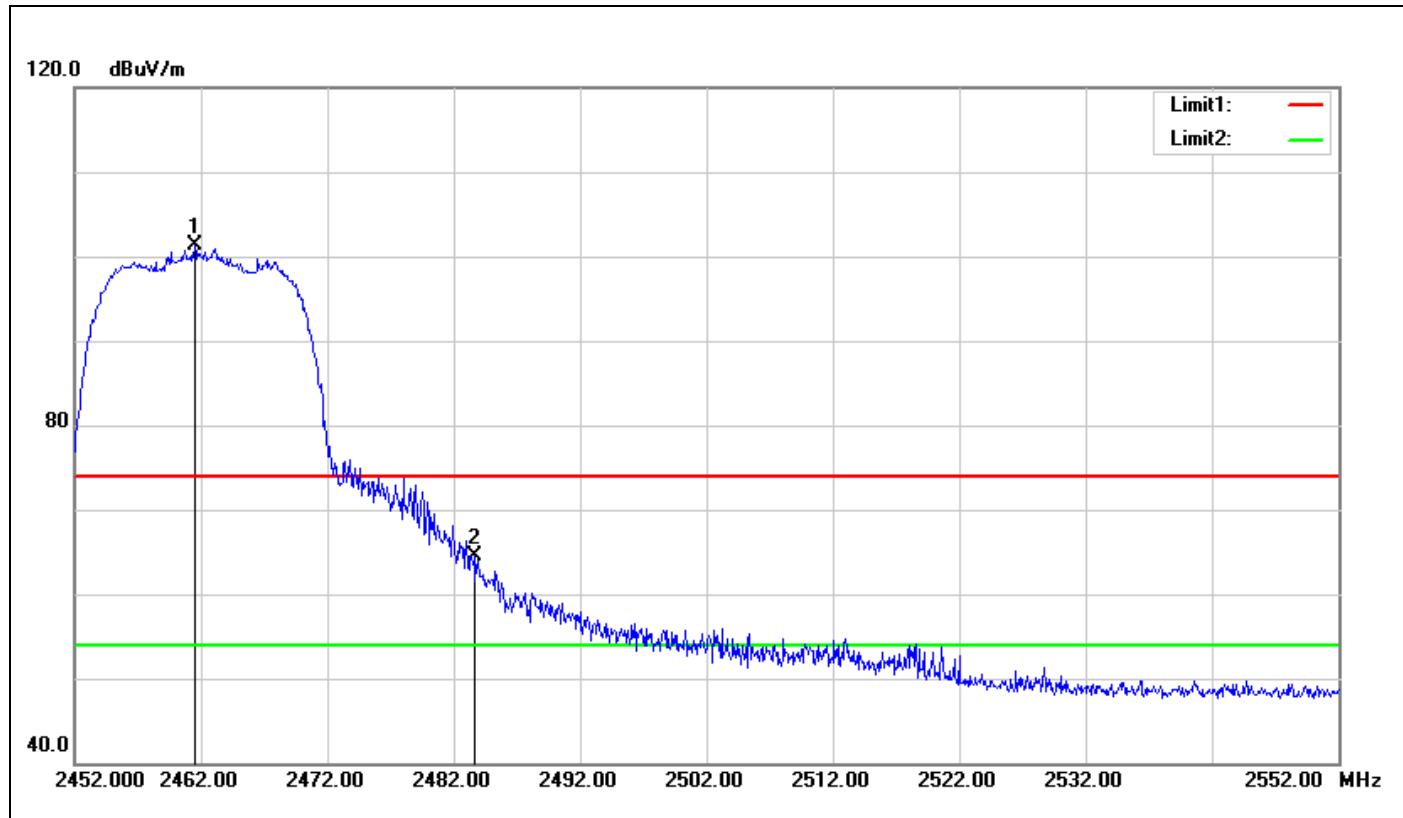
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	56.31	-2.49	53.82	54.00	-0.18	AVG
2	2410.688	95.76	-2.43	93.33	--	--	AVG

Band Edges (IEEE 802.11g mode / CH Mid)**Detector mode: Peak**

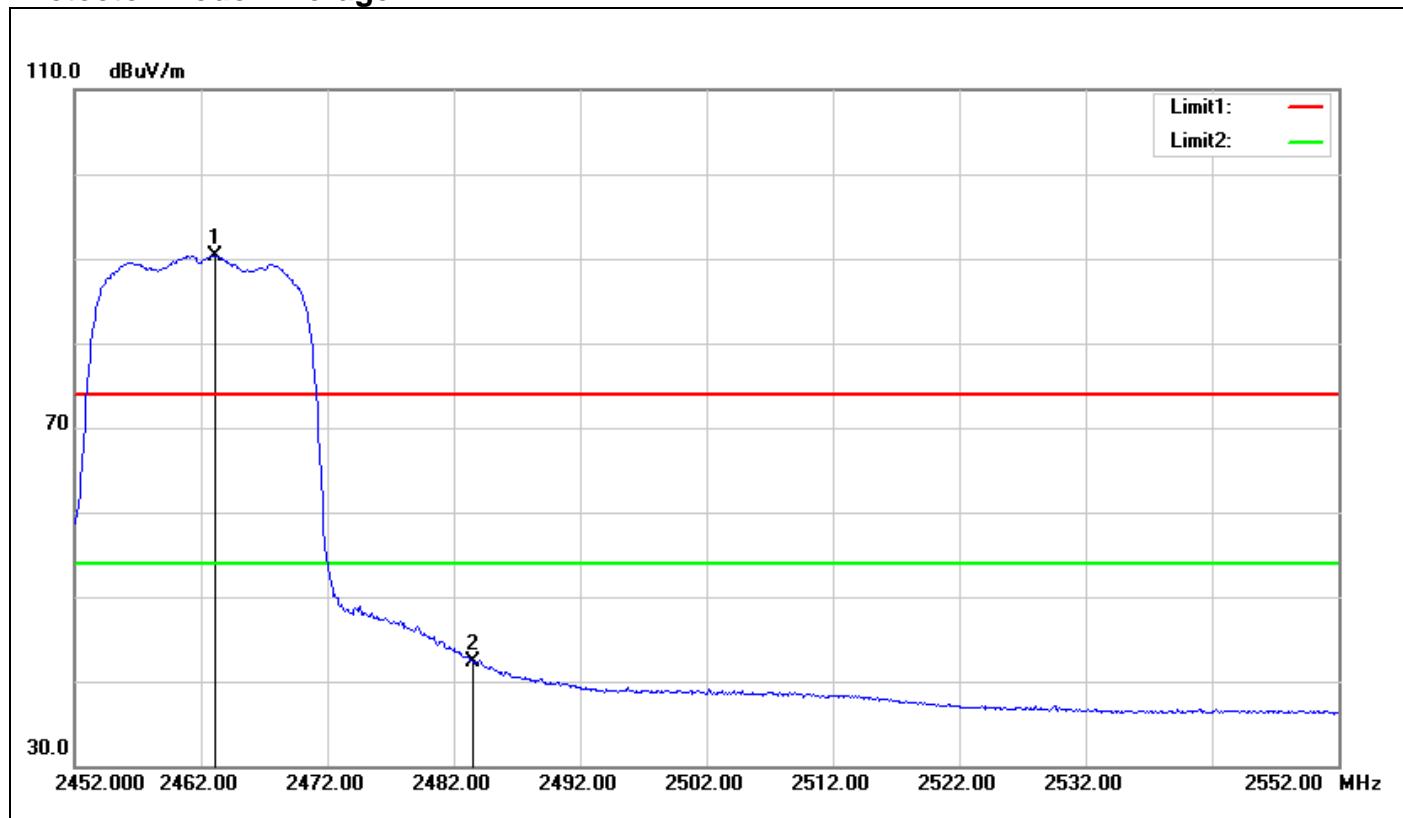
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2385.050	63.30	-2.53	60.77	74.00	-13.23	peak
2	2437.680	104.92	-2.23	102.69	--	--	peak
3	2494.110	58.29	-1.90	56.39	74.00	-17.61	peak

Detector mode: Average

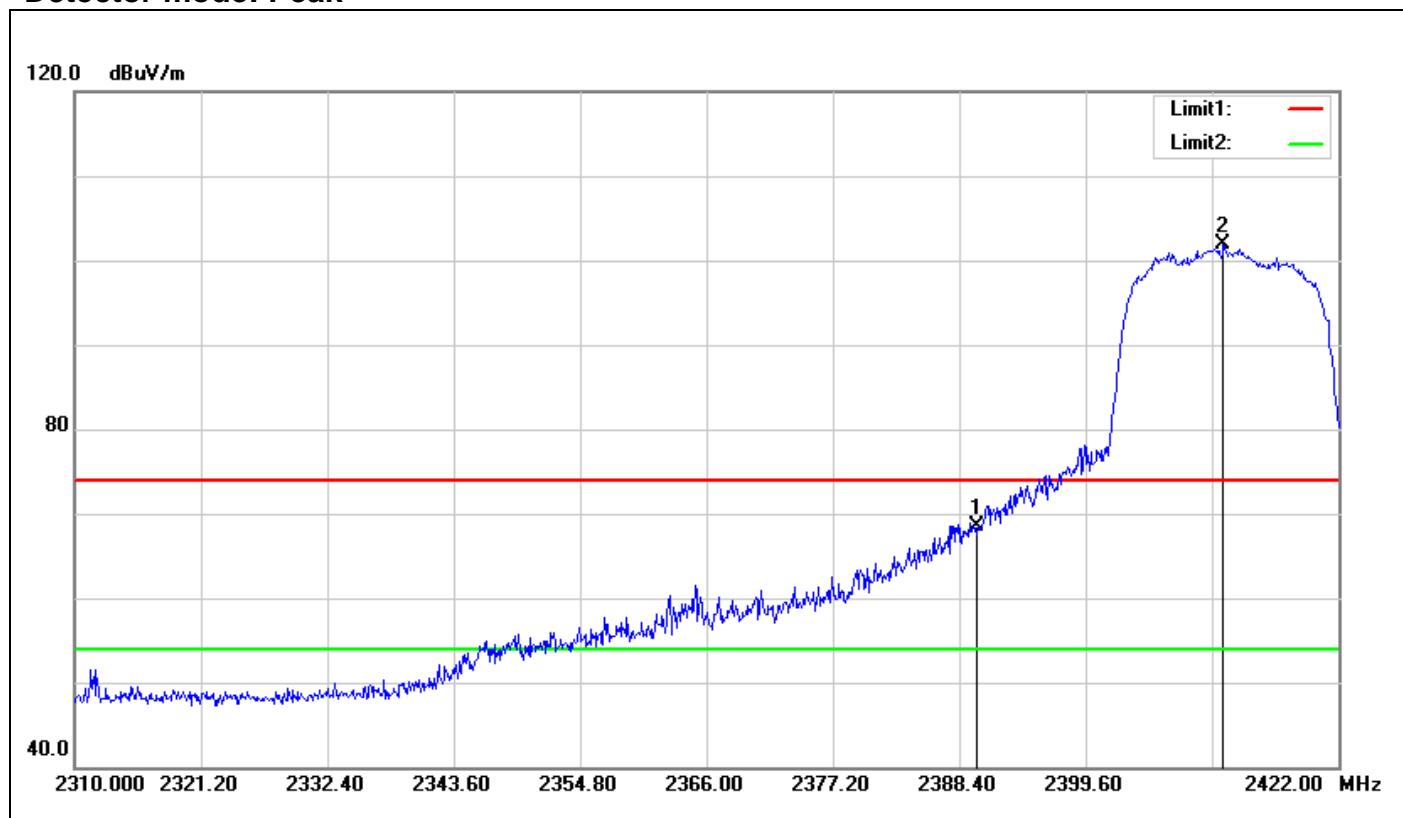
No.	Frequency	Reading	Correct	Result	Limit	Margin	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
1	2390.000	45.31	-2.49	42.82	54.00	-11.18	AVG
2	2437.870	93.04	-2.23	90.81	--	--	AVG
3	2483.500	41.84	-1.99	39.85	54.00	-14.15	AVG

Band Edges (IEEE 802.11g mode / CH High)**Detector mode: Peak**

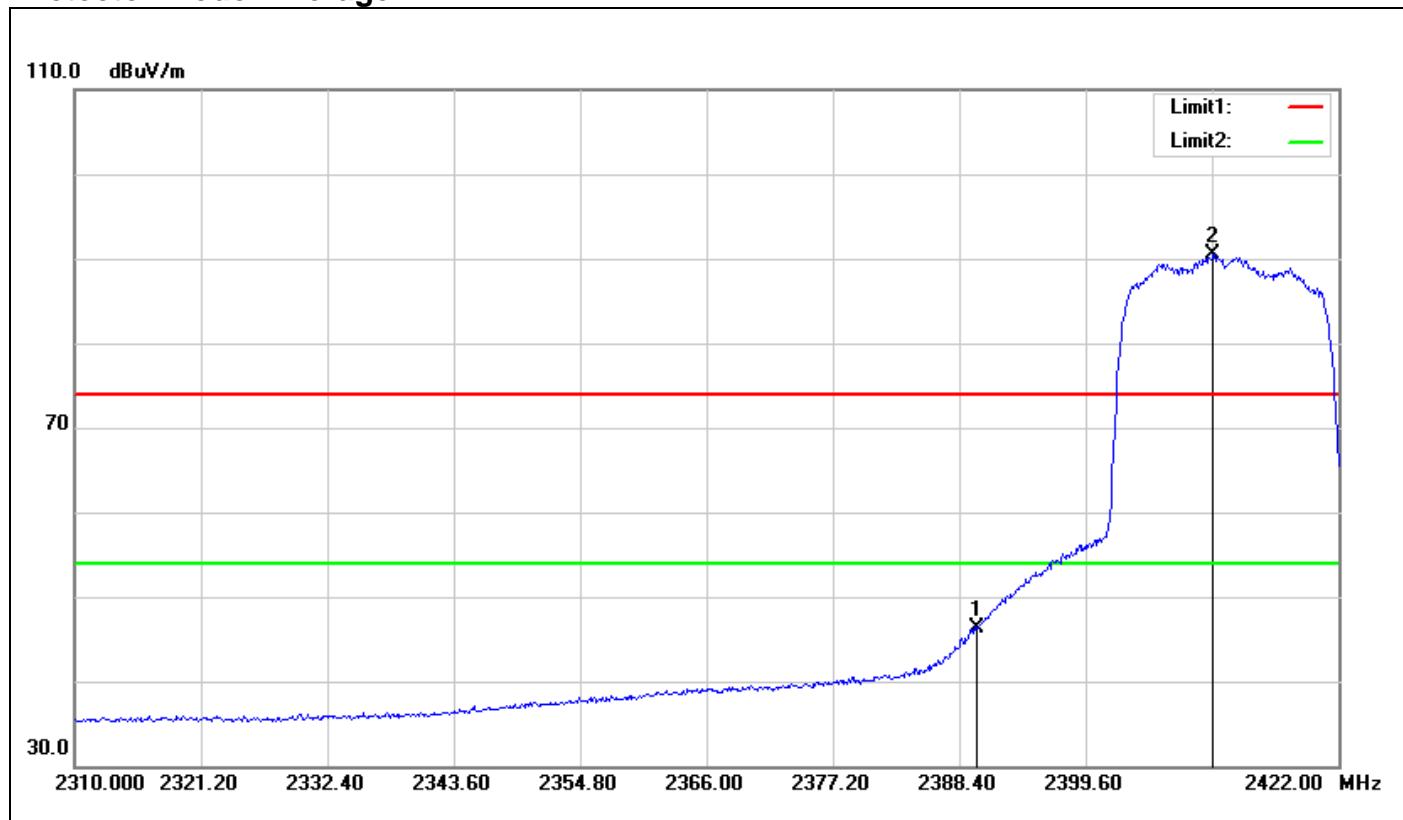
No.	Frequency (MHz)	Reading (dB _{uV})	Correct Factor(dB/m)	Result (dB _{uV/m})	Limit (dB _{uV/m})	Margin (dB)	Remark
1	2461.500	103.47	-2.10	101.37	--	--	peak
2	2483.600	66.55	-1.99	64.56	74.00	-9.44	peak

Detector mode: Average

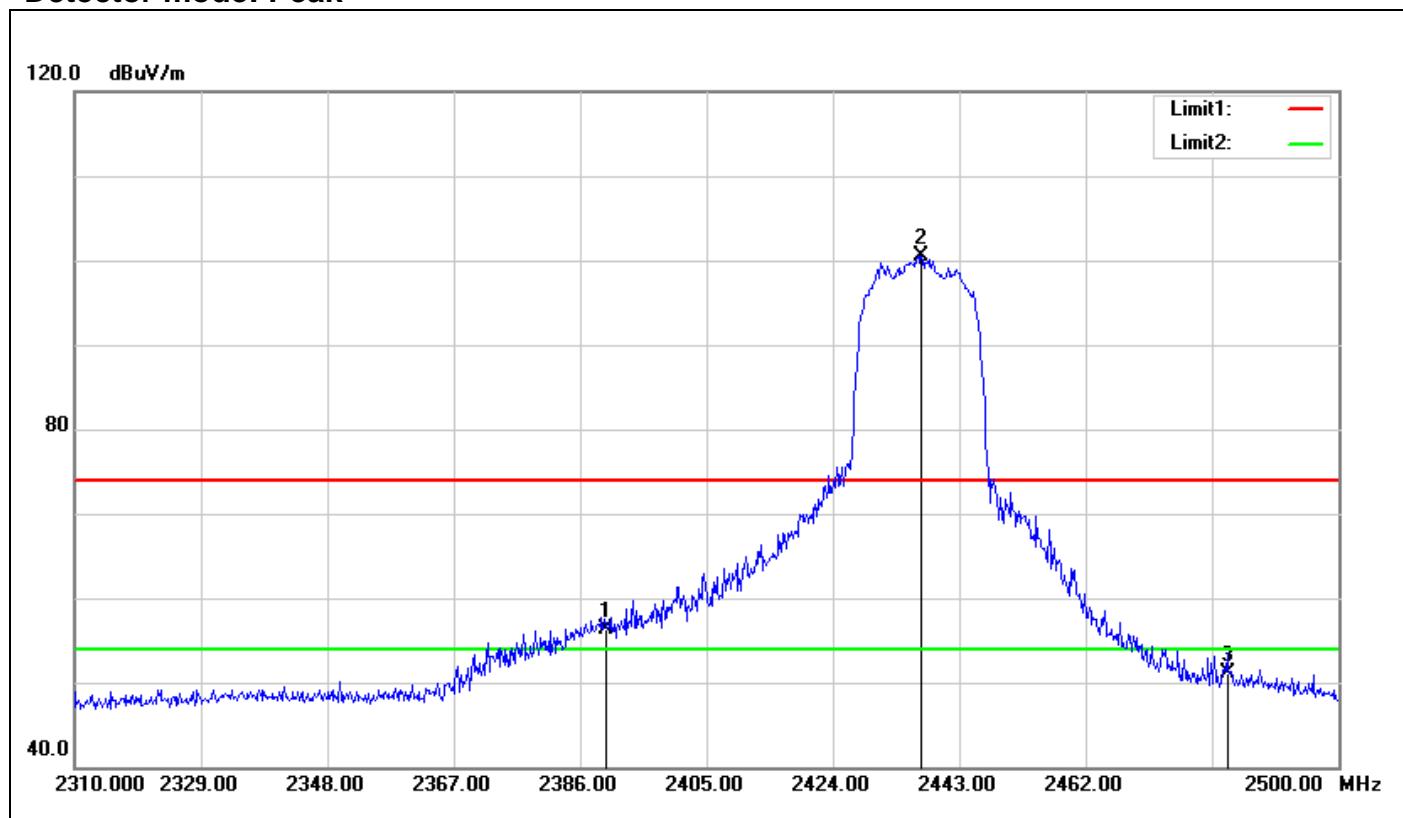
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2463.100	92.46	-2.09	90.37	--	--	AVG
2	2483.500	44.33	-1.99	42.34	54.00	-11.66	AVG

Band Edges (IEEE 802.11n HT 20 MHz mode / CH Low)**Detector mode: Peak**

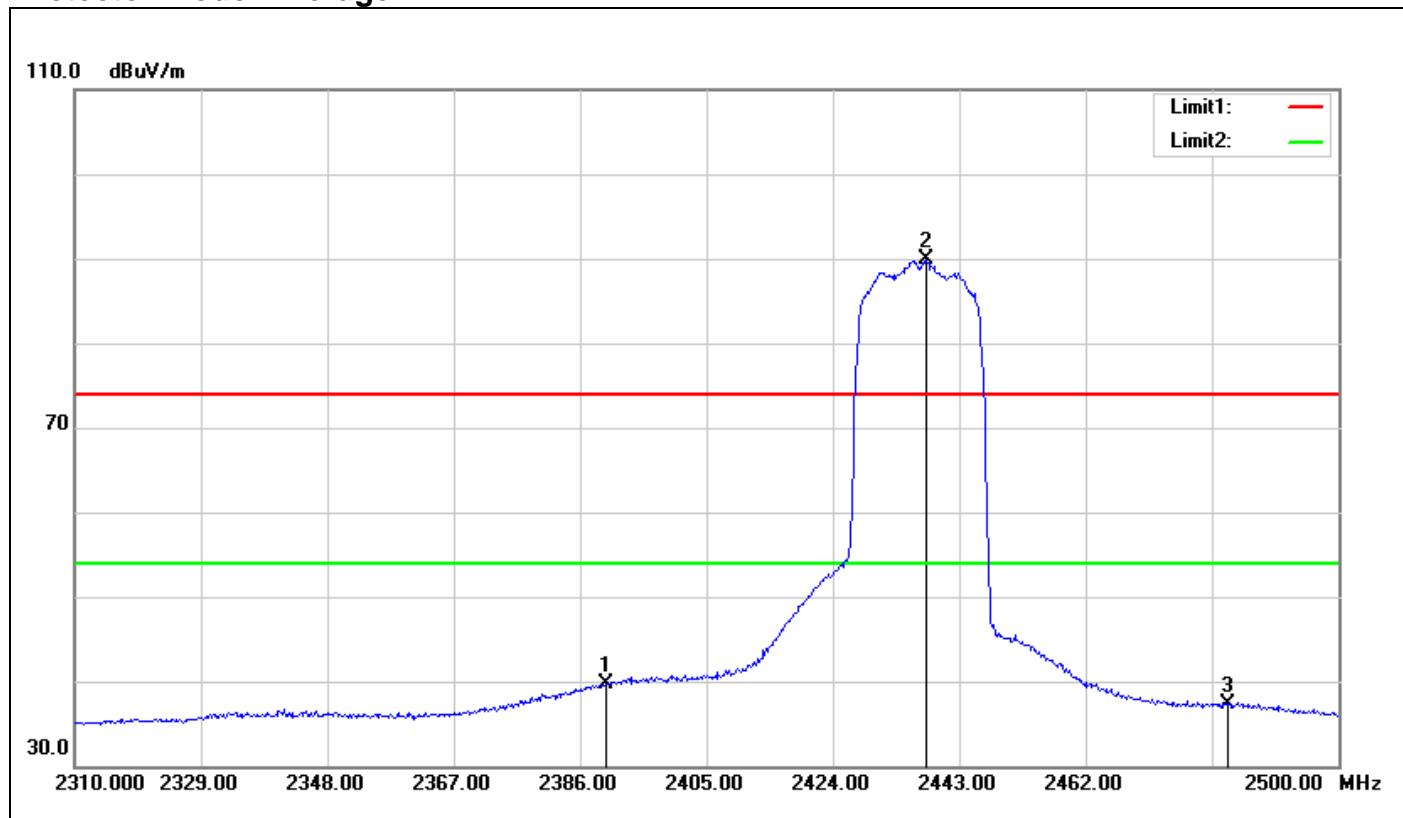
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	70.90	-2.49	68.41	74.00	-5.59	peak
2	2411.808	104.37	-2.42	101.95	--	--	peak

Detector mode: Average

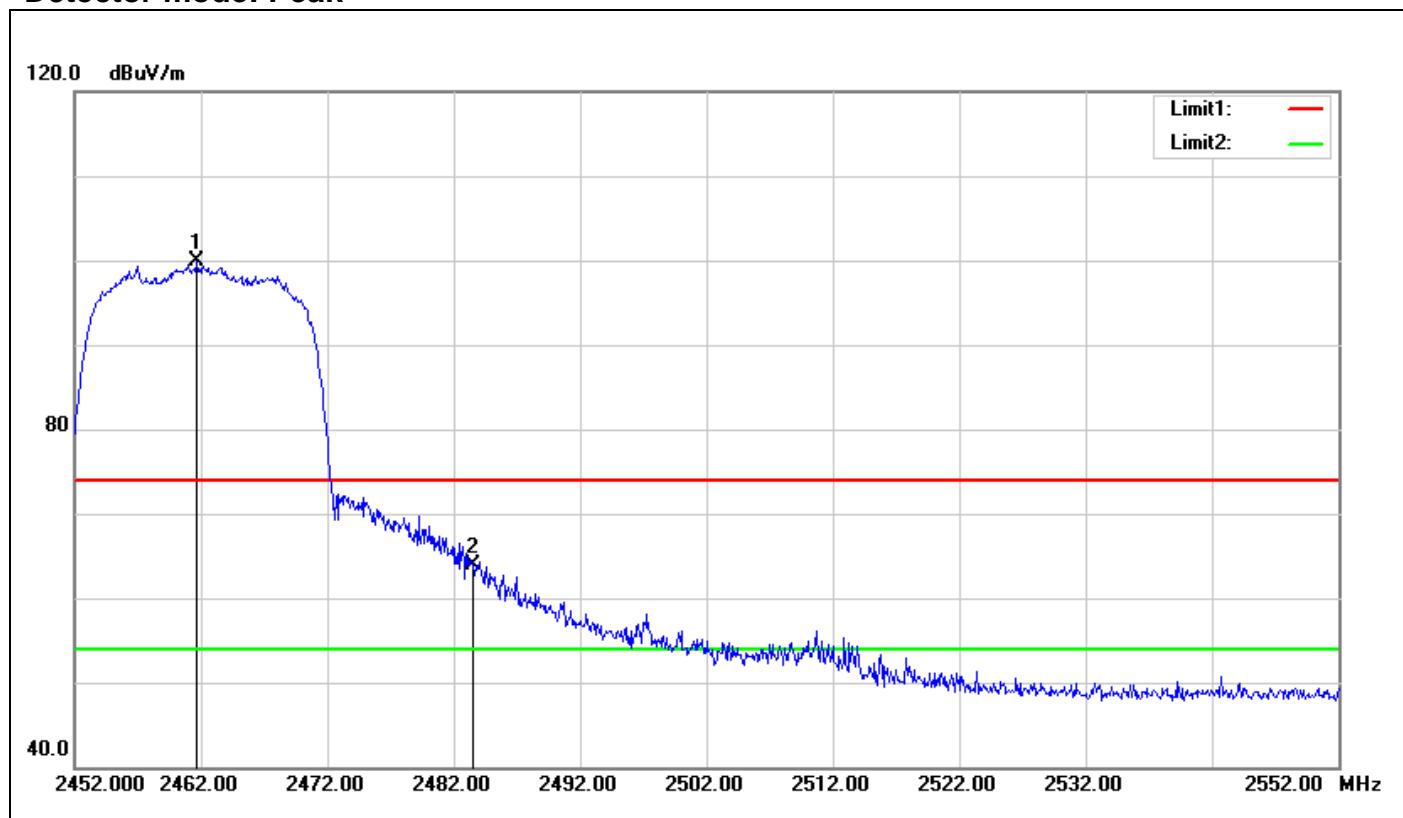
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	48.89	-2.49	46.40	54.00	-7.60	AVG
2	2410.912	93.01	-2.42	90.59	--	--	AVG

Band Edges (IEEE 802.11n HT 20 MHz mode / CH Mid)**Detector mode: Peak**

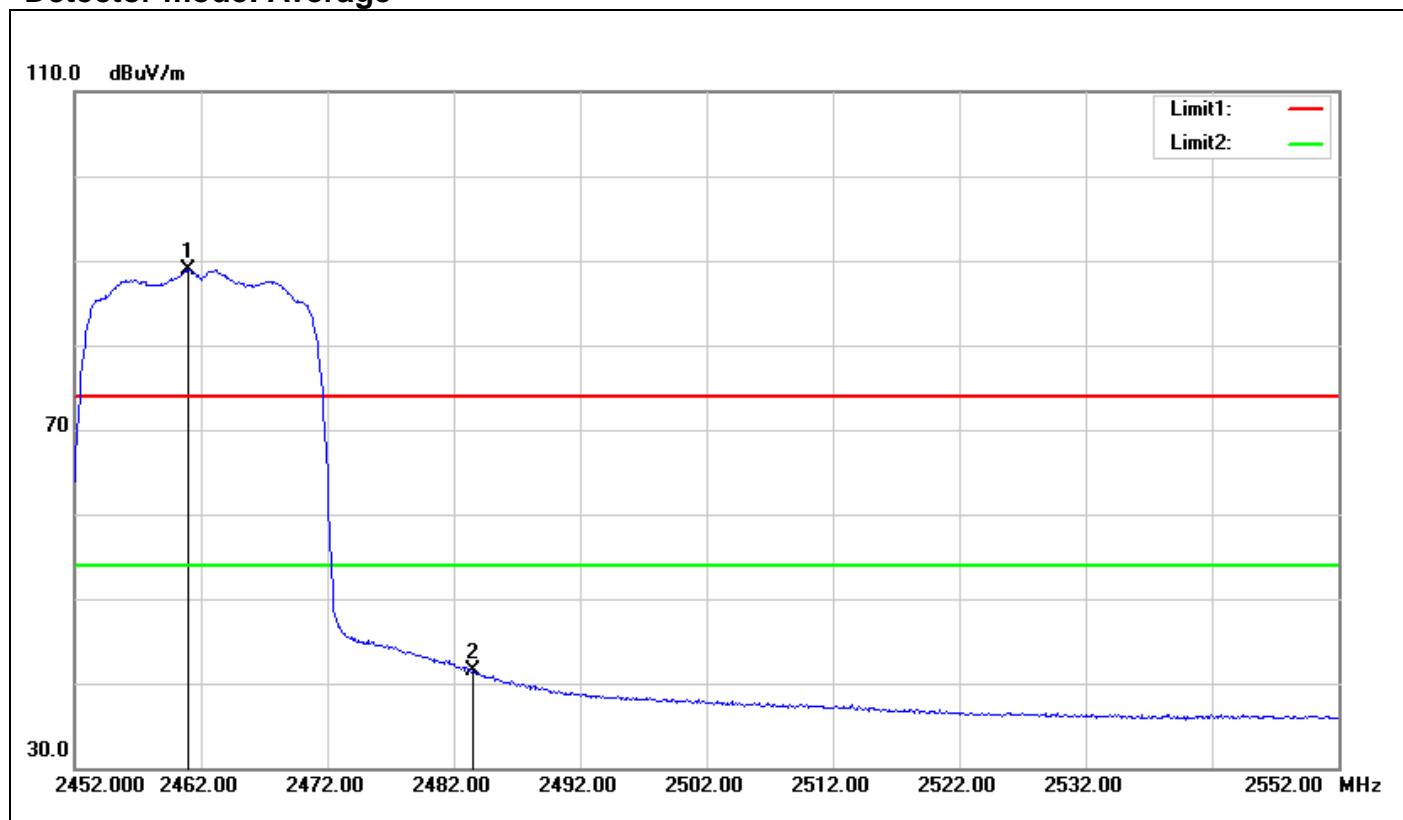
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	58.73	-2.49	56.24	74.00	-17.76	peak
2	2437.300	102.69	-2.23	100.46	--	--	peak
3	2483.500	53.02	-1.99	51.03	74.00	-22.97	peak

Detector mode: Average

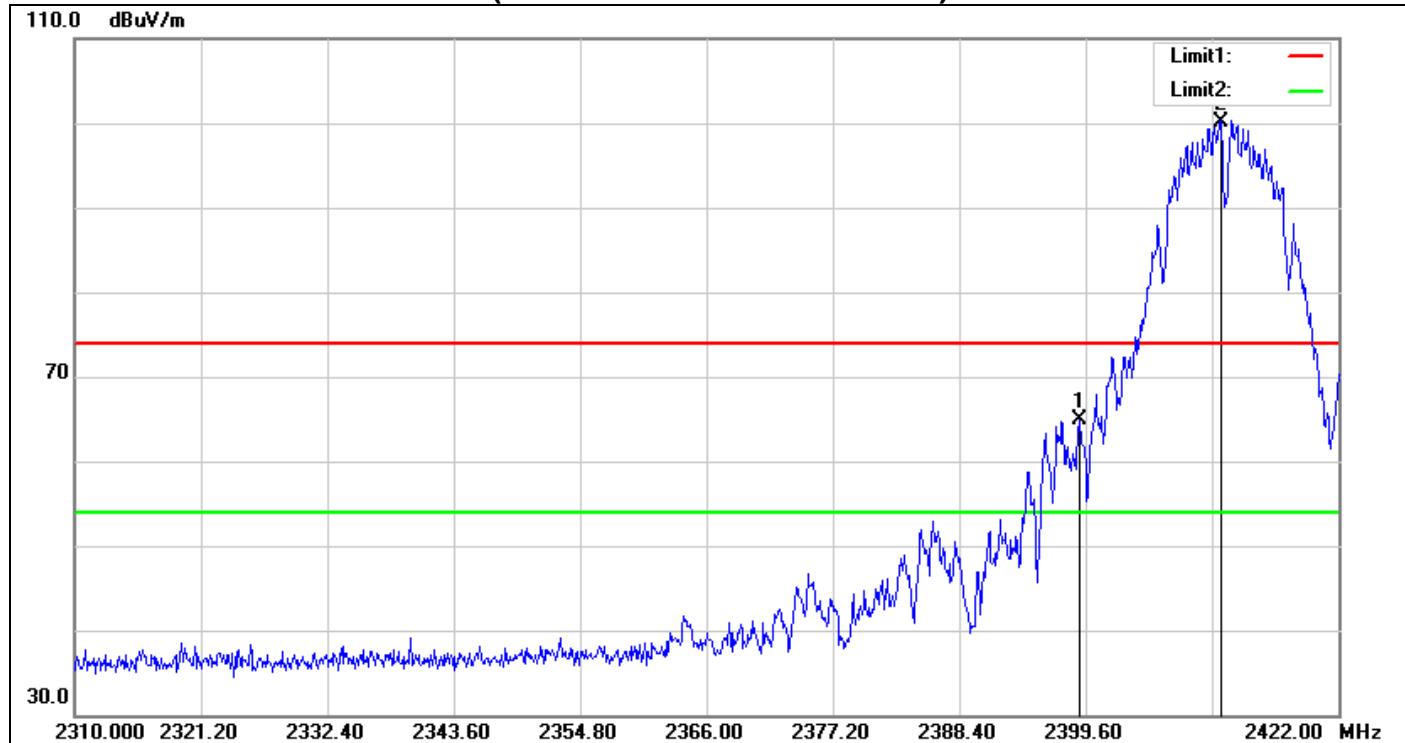
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2390.000	42.19	-2.49	39.70	54.00	-14.30	AVG
2	2438.060	92.08	-2.23	89.85	--	--	AVG
3	2483.500	39.38	-1.99	37.39	54.00	-16.61	AVG

Band Edges (IEEE 802.11n HT 20 MHz mode / CH High)**Detector mode: Peak**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.700	101.91	-2.10	99.81	--	--	peak
2	2483.500	65.94	-1.99	63.95	74.00	-10.05	peak

Detector mode: Average

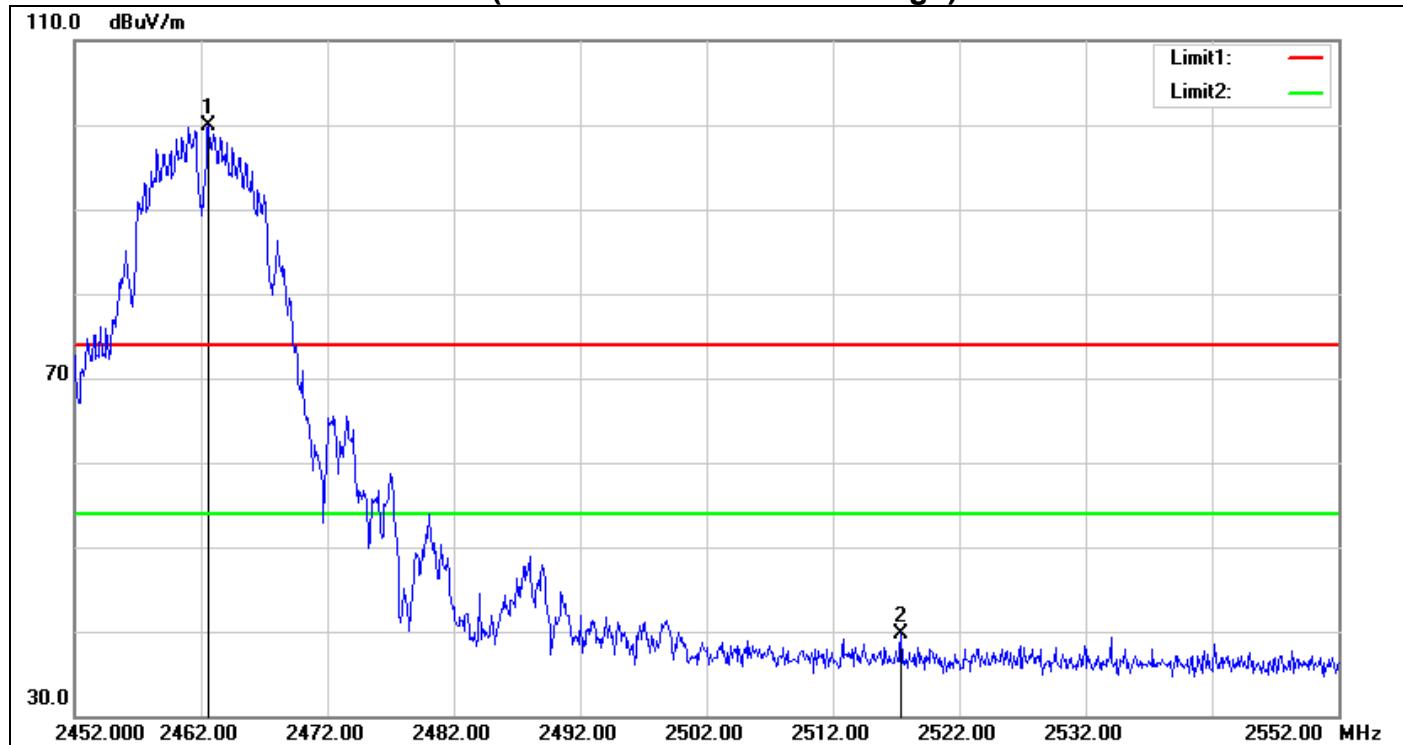
No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2461.000	91.07	-2.10	88.97	--	--	AVG
2	2483.500	43.52	-1.99	41.53	54.00	-12.47	AVG

Test Plot**Un-restricted Band Emissions (IEEE 802.11b mode / CH Low)**

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Remark
1	2399.040	67.36	-2.42	64.94	peak
2	2411.584	102.62	-2.42	100.20	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

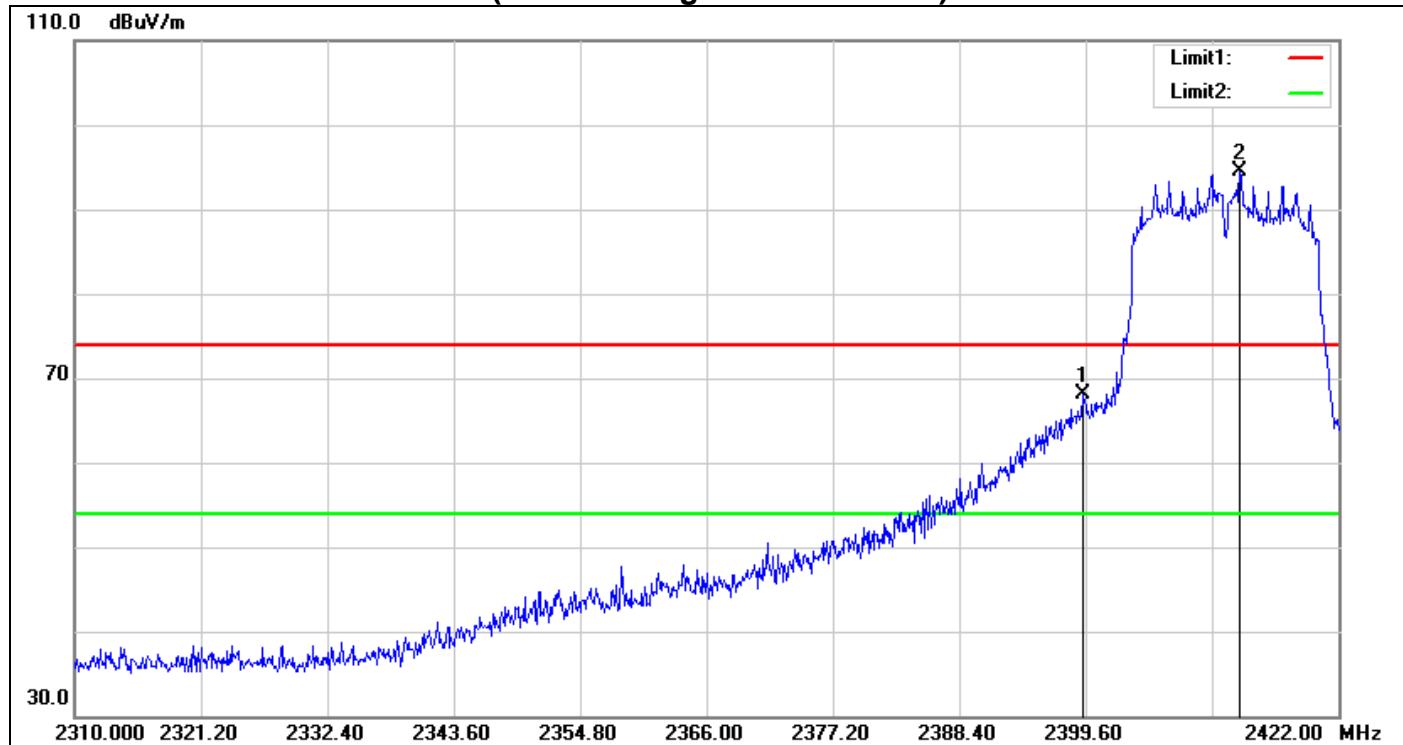
Un-restricted Band Emissions (IEEE 802.11b mode / CH High)



No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2462.600	102.00	-2.09	99.91	peak
2	2517.400	41.62	-1.82	39.80	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

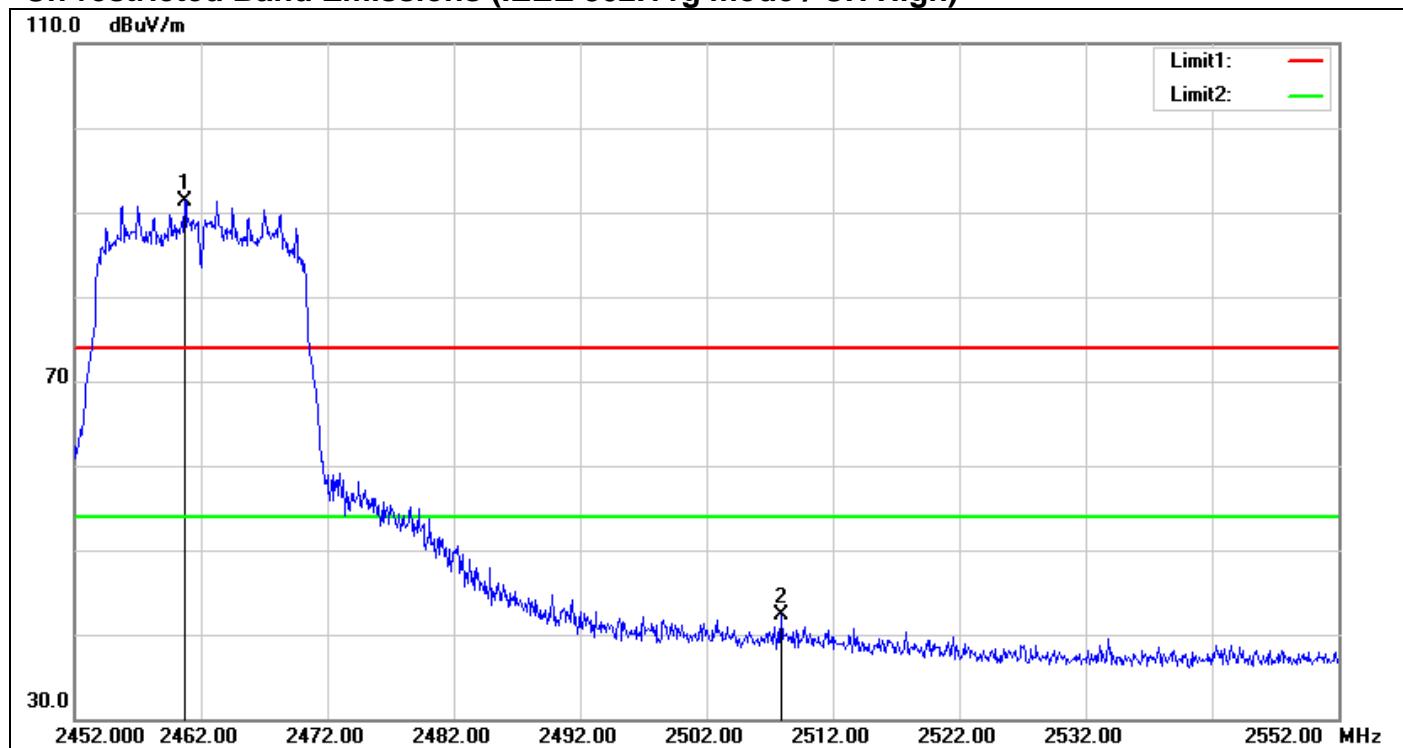
Un-restricted Band Emissions (IEEE 802.11g mode / CH Low)



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Remark
1	2399.376	70.60	-2.41	68.19	peak
2	2413.264	96.93	-2.41	94.52	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

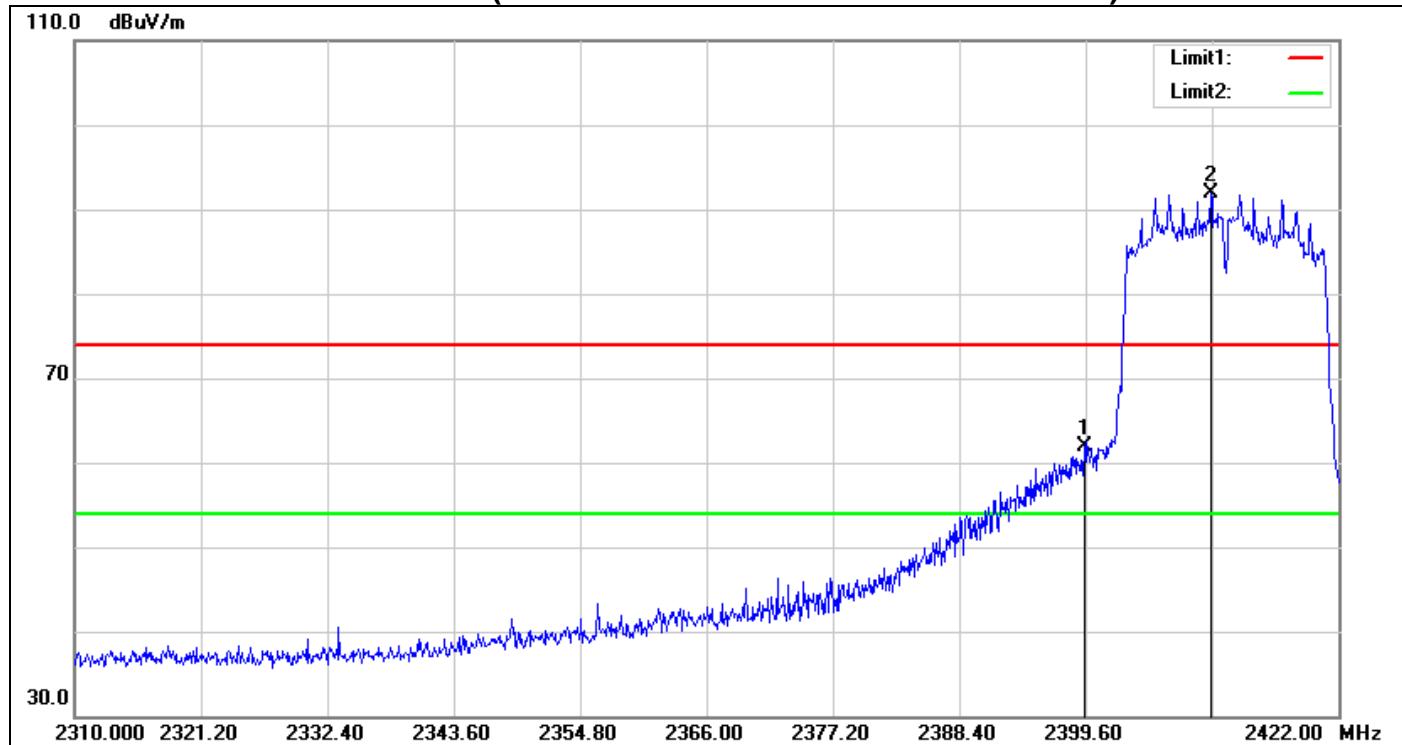
Un-restricted Band Emissions (IEEE 802.11g mode / CH High)



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Remark
1	2460.700	93.48	-2.10	91.38	peak
2	2507.900	44.20	-1.84	42.36	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

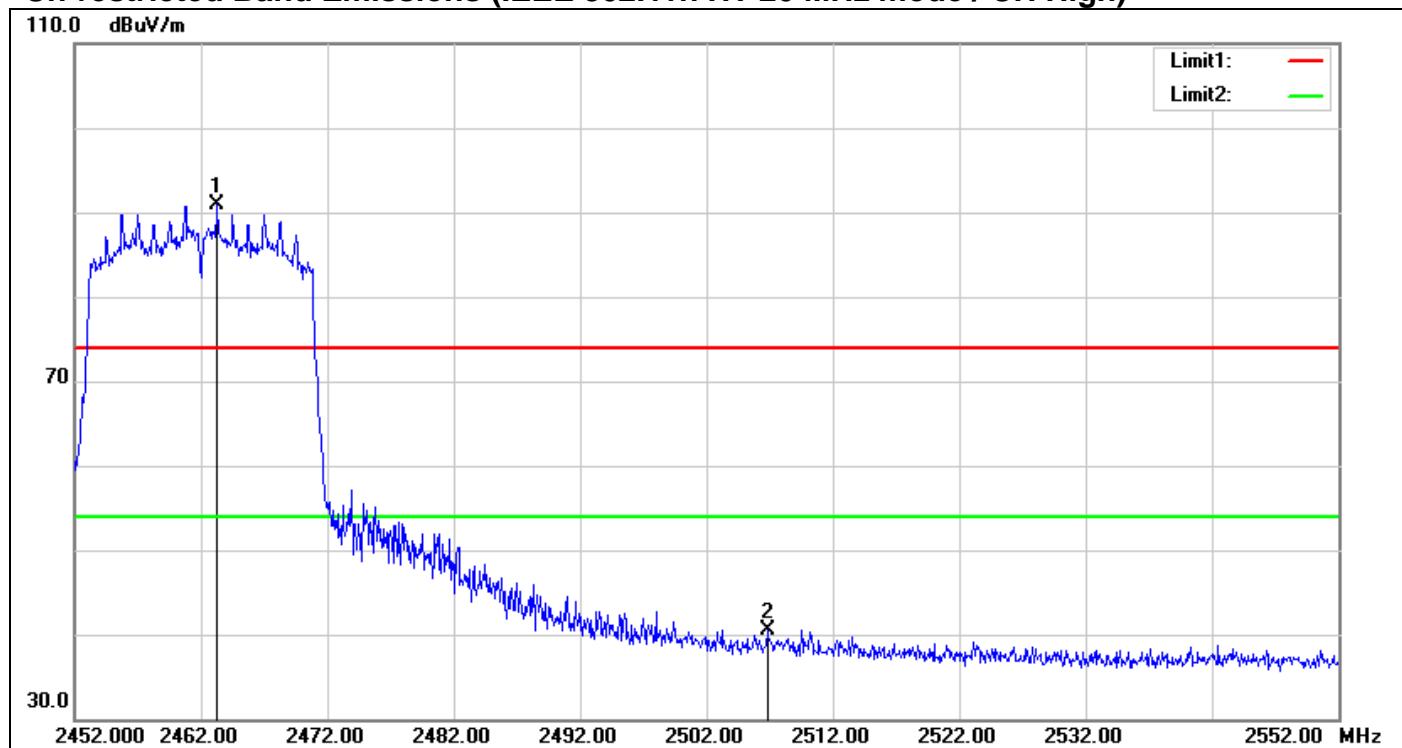
Un-restricted Band Emissions (IEEE 802.11n HT 20 MHz mode / CH Low)



No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Remark
1	2399.488	64.31	-2.41	61.90	peak
2	2410.688	94.42	-2.43	91.99	peak

Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

Un-restricted Band Emissions (IEEE 802.11n HT 20 MHz mode / CH High)



No.	Frequency	Reading	Correct	Result	Remark
	(MHz)	(dBuV)	Factor(dB/m)	(dBuV/m)	
1	2463.300	93.02	-2.09	90.93	peak
2	2506.800	42.32	-1.84	40.48	peak


Note: Spurious emission levels that exceed the level of 20 dB below the applicable limit.

7.5 PEAK POWER SPECTRAL DENSITY

LIMIT

1. According to §15.247(e), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.
2. According to §15.247(f), the digital modulation operation of the hybrid system, with the frequency hopping turned off, shall comply with the power density requirements of paragraph (d) of this section.

Test Configuration



TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
2. Set the spectrum analyzer as RBW = 3 kHz, VBW = 30 kHz, Span = 300 kHz, Sweep time = 100 s
3. Record the max reading.
4. Repeat the above procedure until the measurements for all frequencies are completed.

TEST RESULTS

No non-compliance noted

Test Data

IEEE 802.11b mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-4.68	8.00	PASS
Mid	2437	-4.66		PASS
High	2462	-5.38		PASS

IEEE 802.11g mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-10.89	8.00	PASS
Mid	2437	-10.23		PASS
High	2462	-10.76		PASS

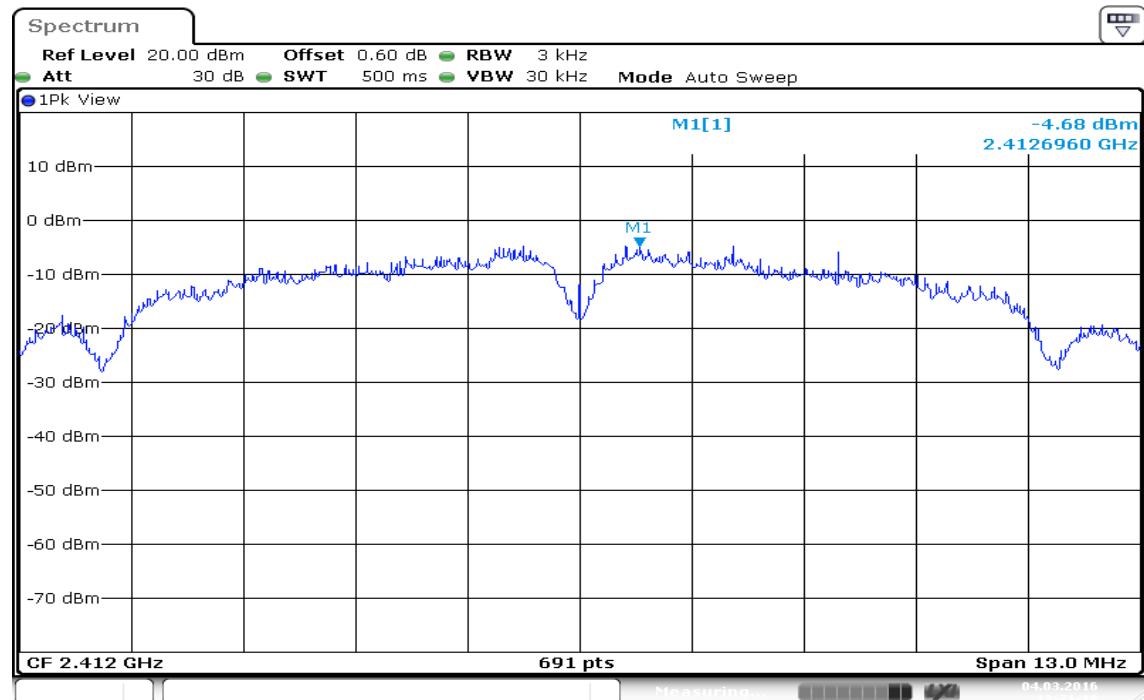
IEEE 802.11n HT 20 MHz mode

Channel	Frequency (MHz)	PPSD (dBm)	Limit (dBm)	Result
Low	2412	-11.00	8.00	PASS
Mid	2437	-11.04		PASS
High	2462	-10.68		PASS

Test Plot

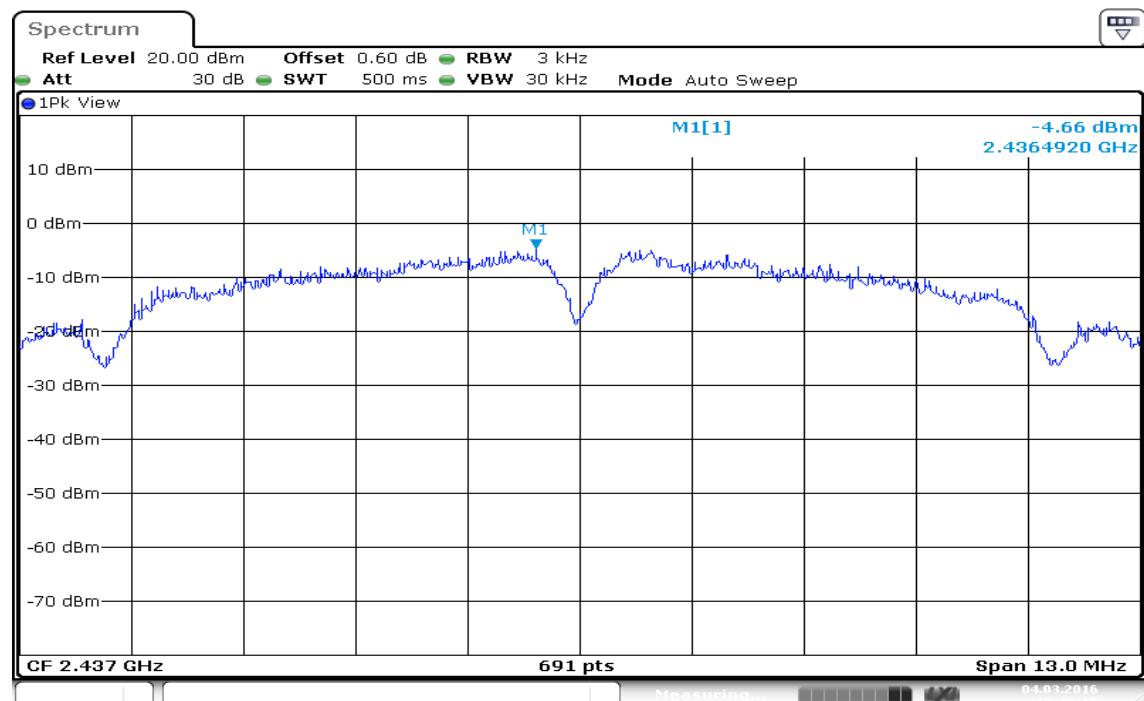
IEEE 802.11b mode

PPSD (CH Low)

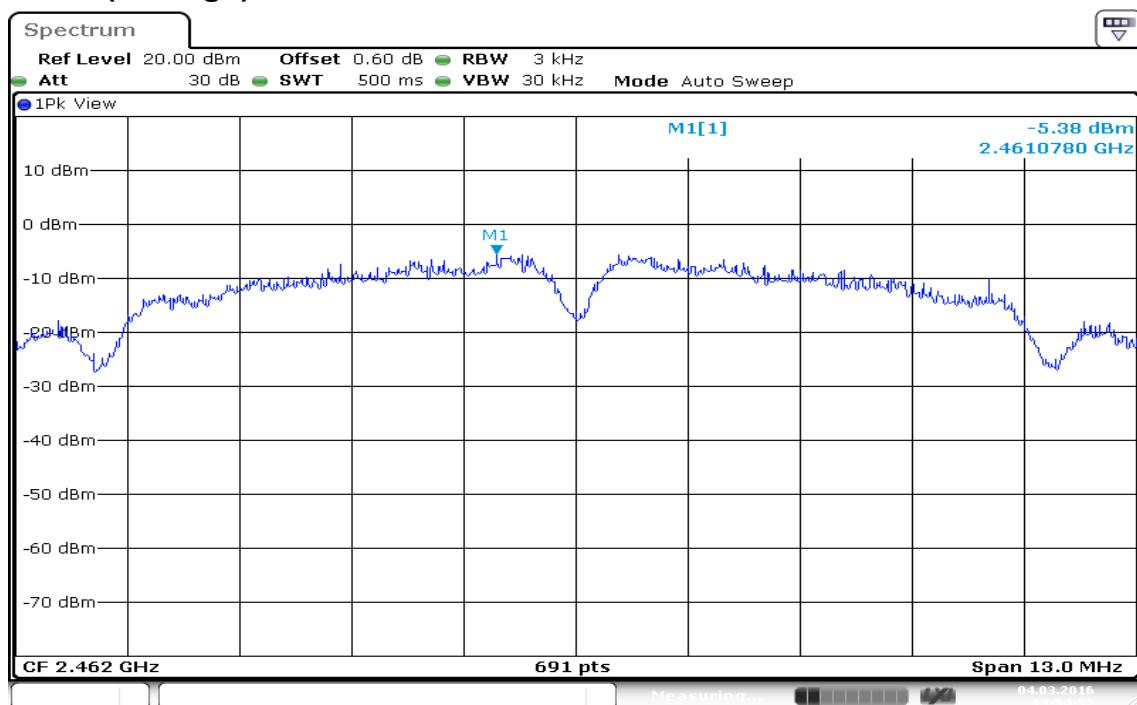


Date: 4.MAR.2016 13:31:18

PPSD (CH Mid)



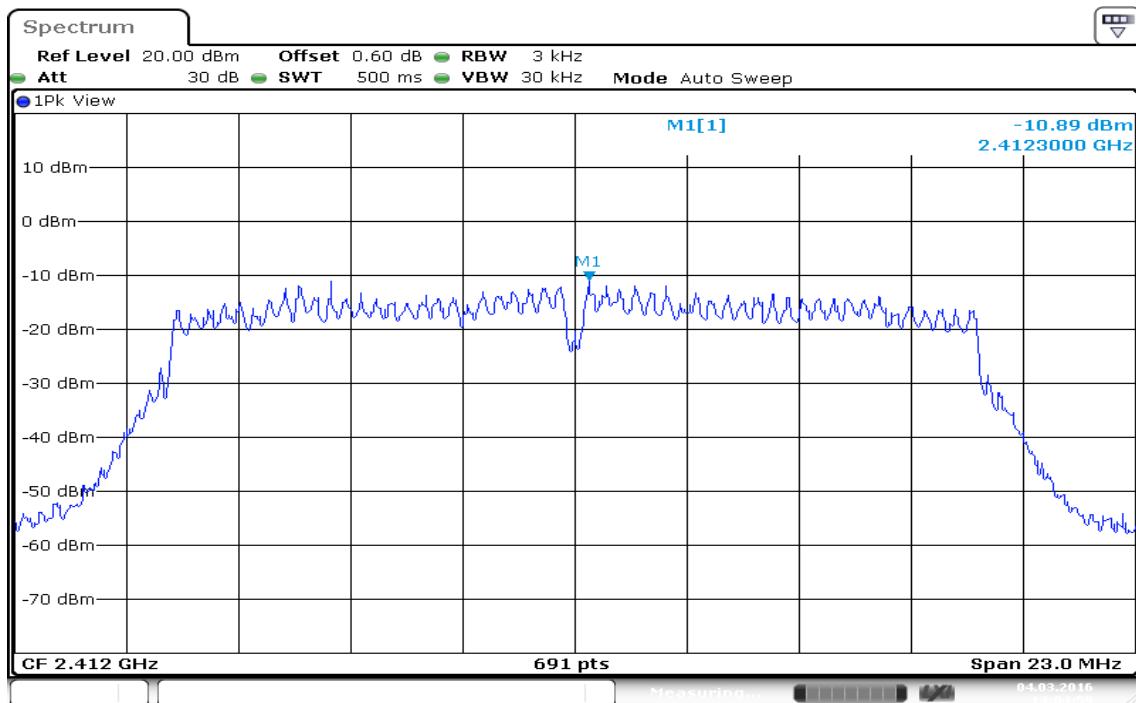
Date: 4.MAR.2016 13:39:10

PPSD (CH High)

Date: 4.MAR.2016 13:54:52

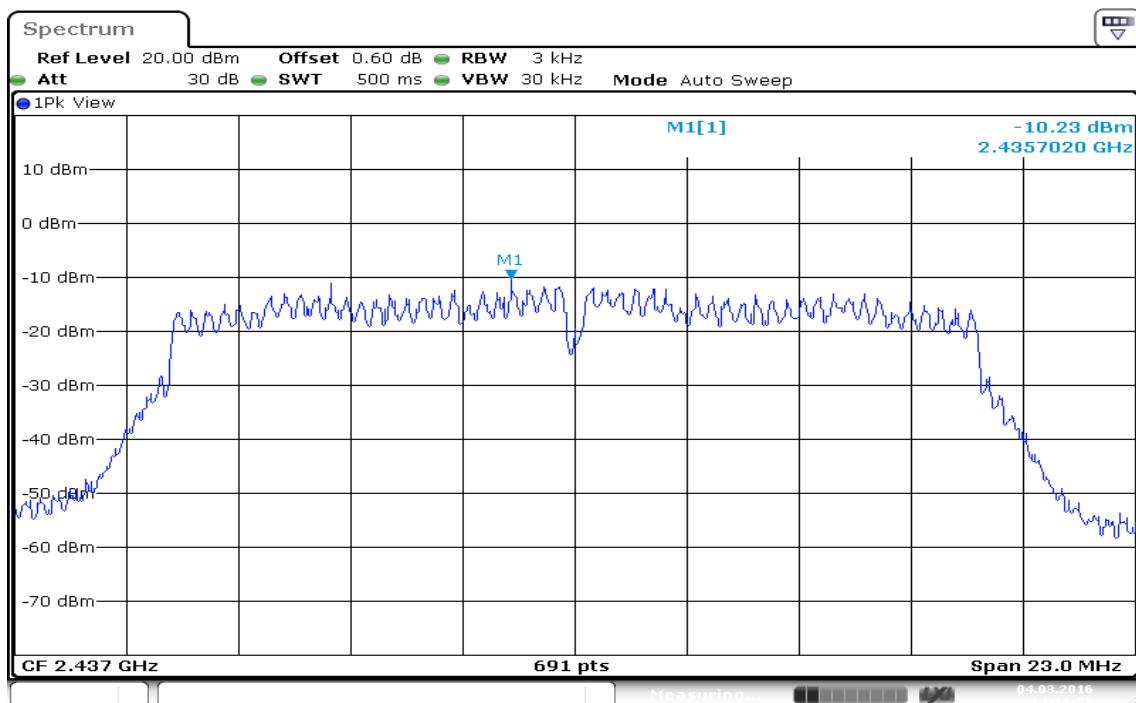
IEEE 802.11g mode

PPSD (CH Low)

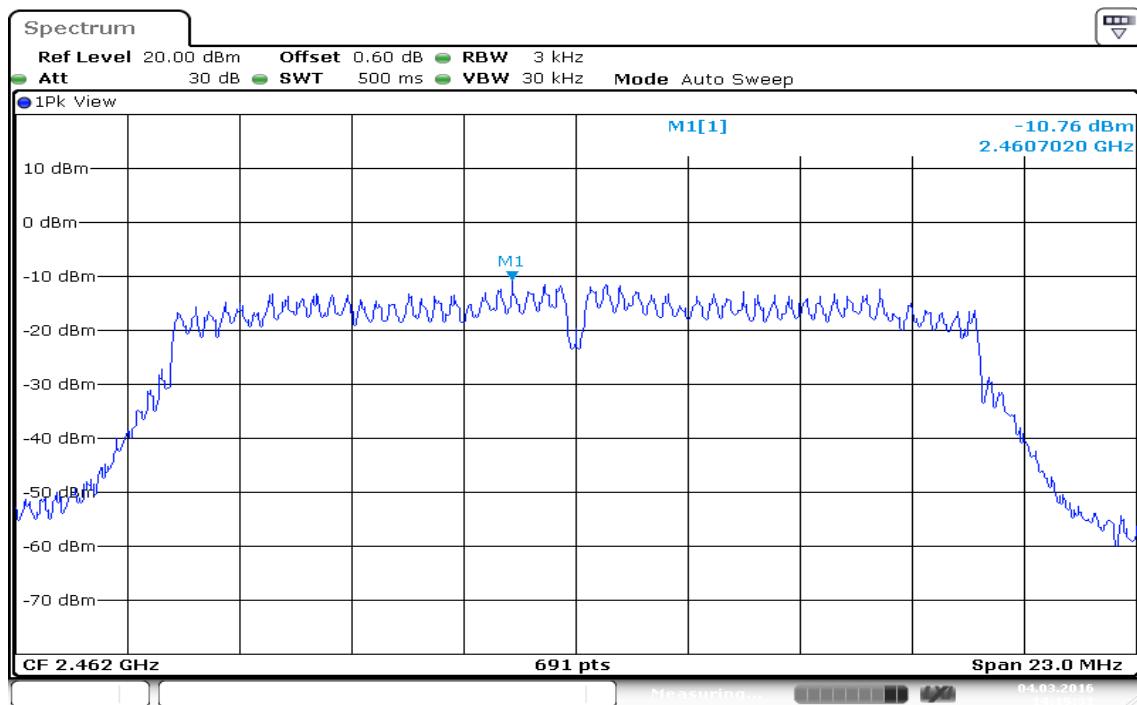


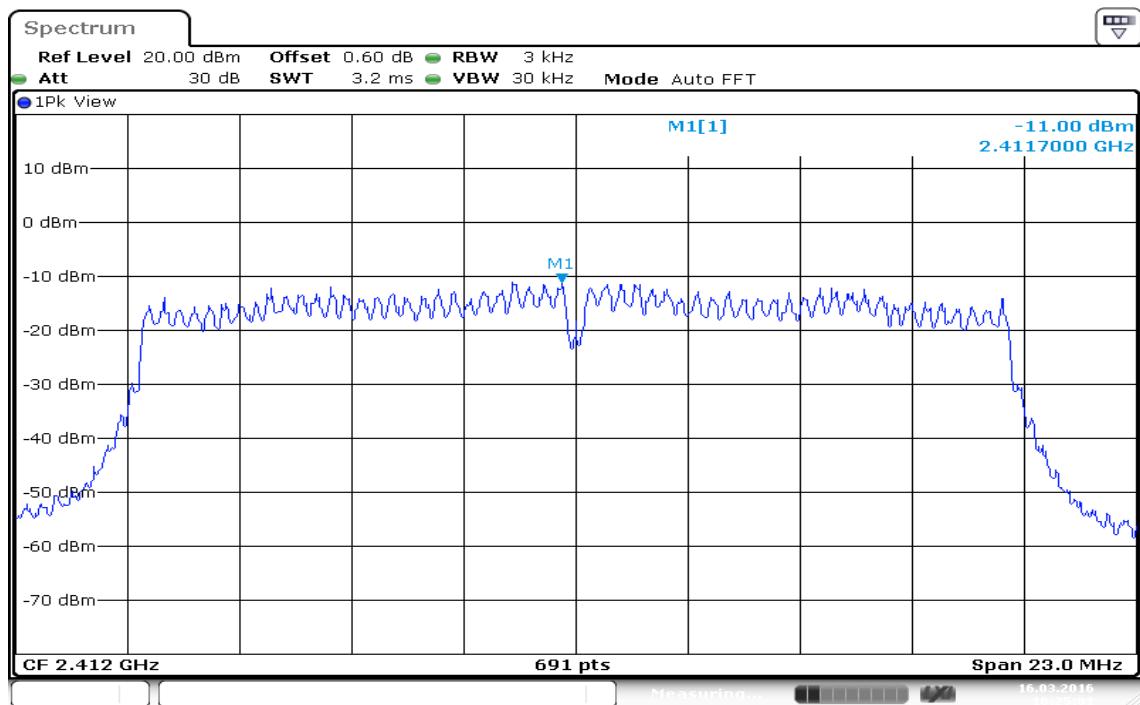
Date: 4.MAR.2016 14:04:59

PPSD (CH Mid)

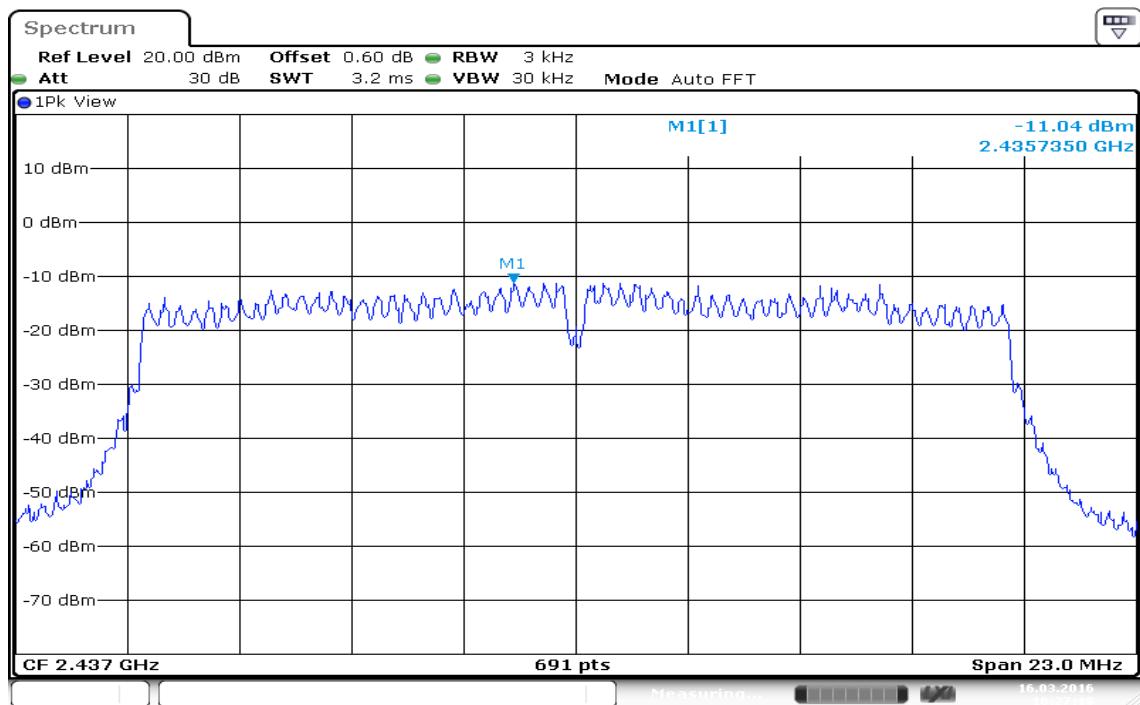


Date: 4.MAR.2016 14:11:58

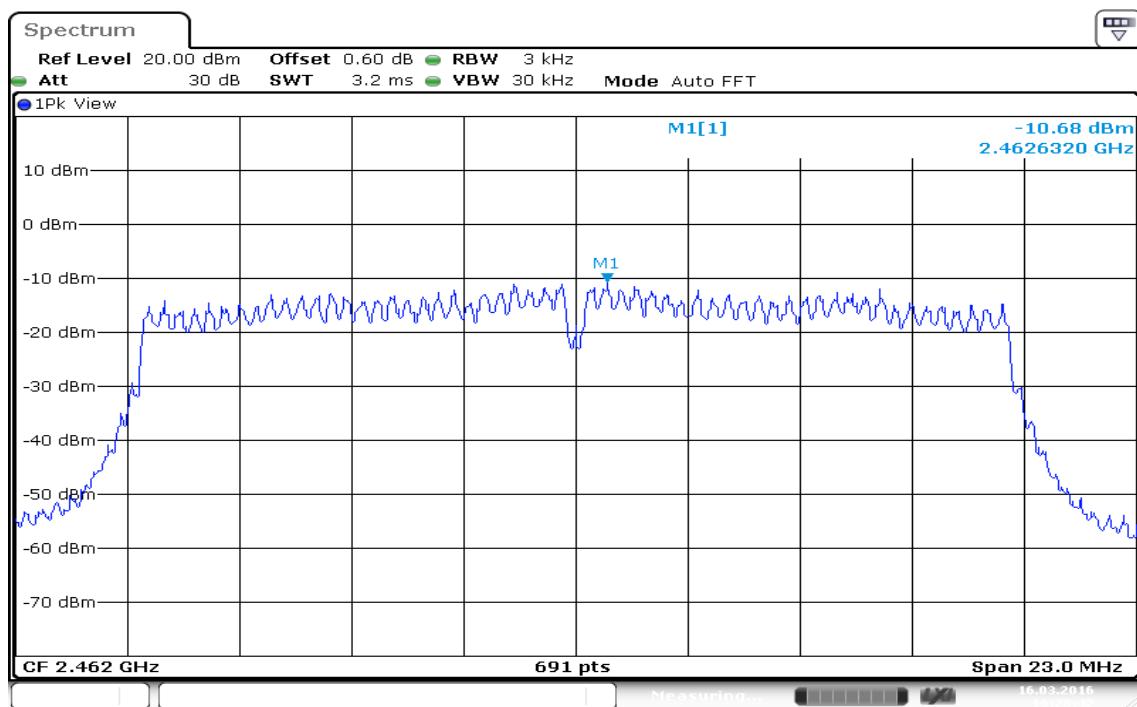
PPSD (CH High)

IEEE 802.11n HT 20 MHz mode**PPSD (CH Low)**

Date: 16.MAR.2016 16:25:02

PPSD (CH Mid)

Date: 16.MAR.2016 16:27:19

PPSD (CH High)

7.6 RADIATED EMISSIONS

LIMIT

- According to §15.209(a), except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μ V/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

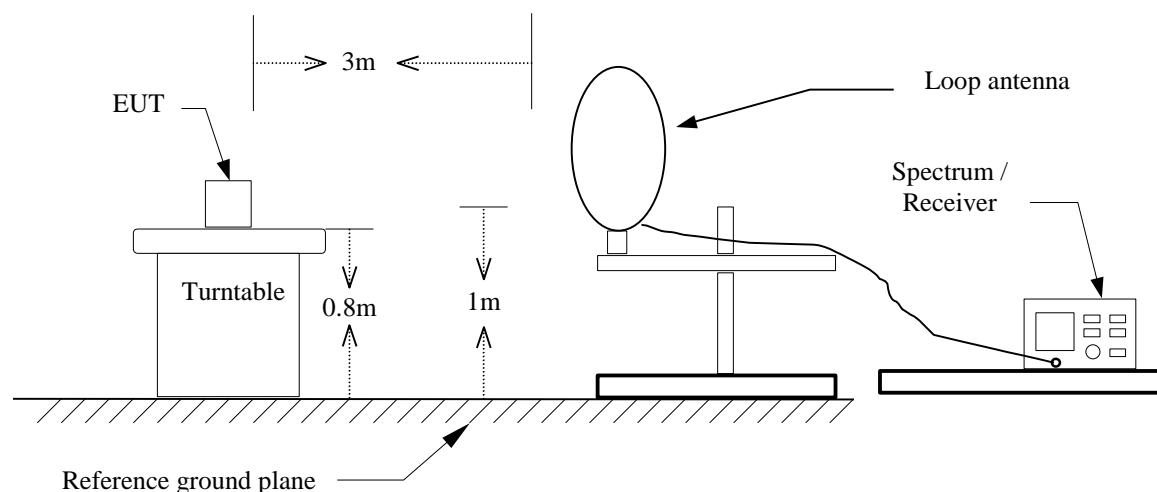
Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

- In the emission table above, the tighter limit applies at the band edges.

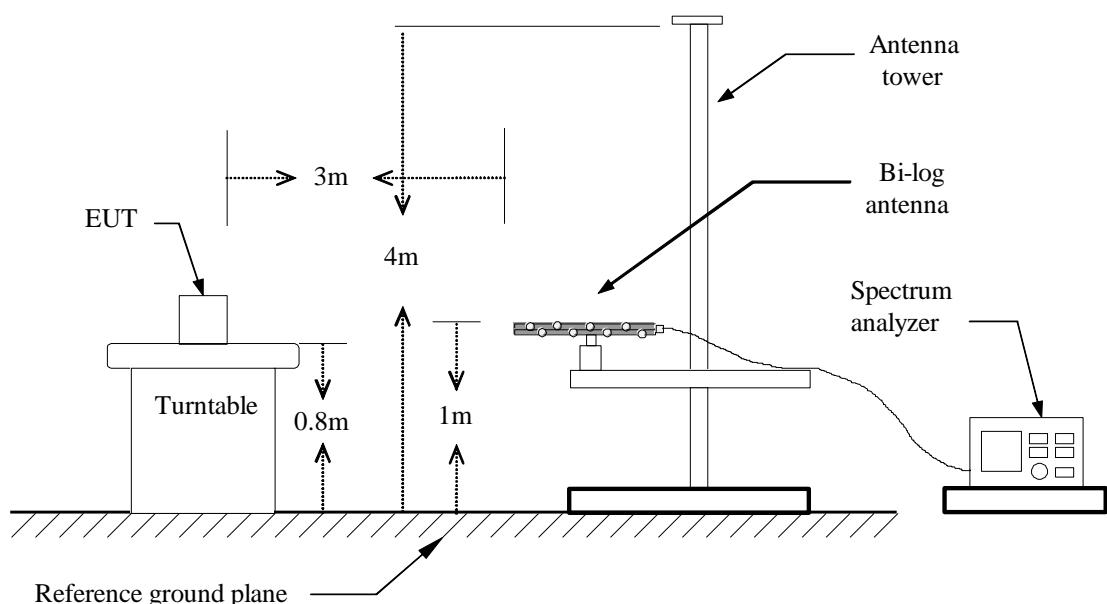
Frequency (MHz)	Field Strength (μ V/m at 3-meter)	Field Strength (dB μ V/m at 3-meter)
0.009 - 0.490	2400/F(kHz) +80	20LOG((2400/F(kHz))+80)
0.490 - 1.705	24000/F(kHz) +40	20LOG((24000/F(kHz))+40)
1.705 – 30.0	30	69.54
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

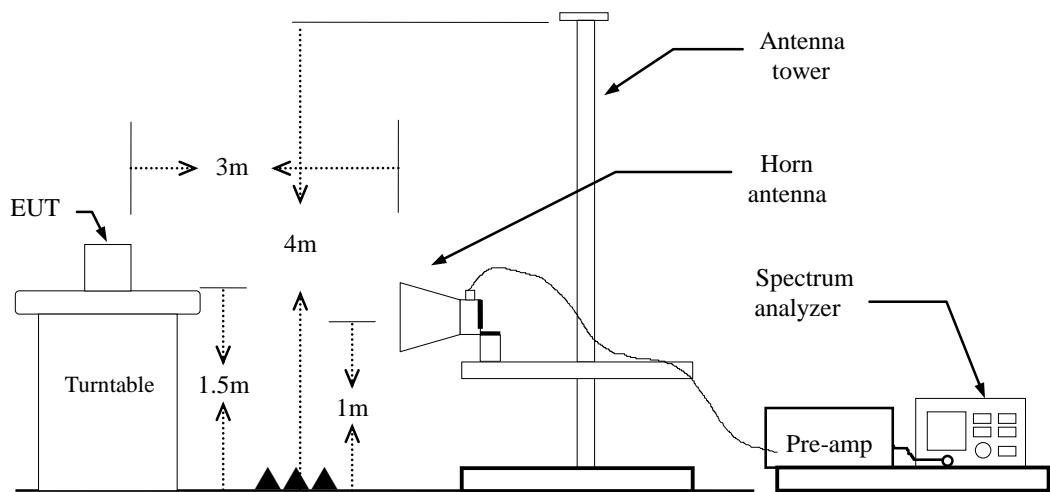
Test Configuration

9kHz ~ 30MHz



30MHz ~ 1GHz



Above 1 GHz

TEST PROCEDURE

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m high and below 1 GHz is 0.8m high above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Set the spectrum analyzer in the following setting as:

Below 1GHz:

RBW=100kHz / VBW=300kHz / Sweep=AUTO

Above 1GHz:

(a) PEAK: RBW=1MHz / VBW=3MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz,
if duty cycle $\geq 98\%$, VBW=10Hz.

if duty cycle $< 98\%$ VBW=1/T.

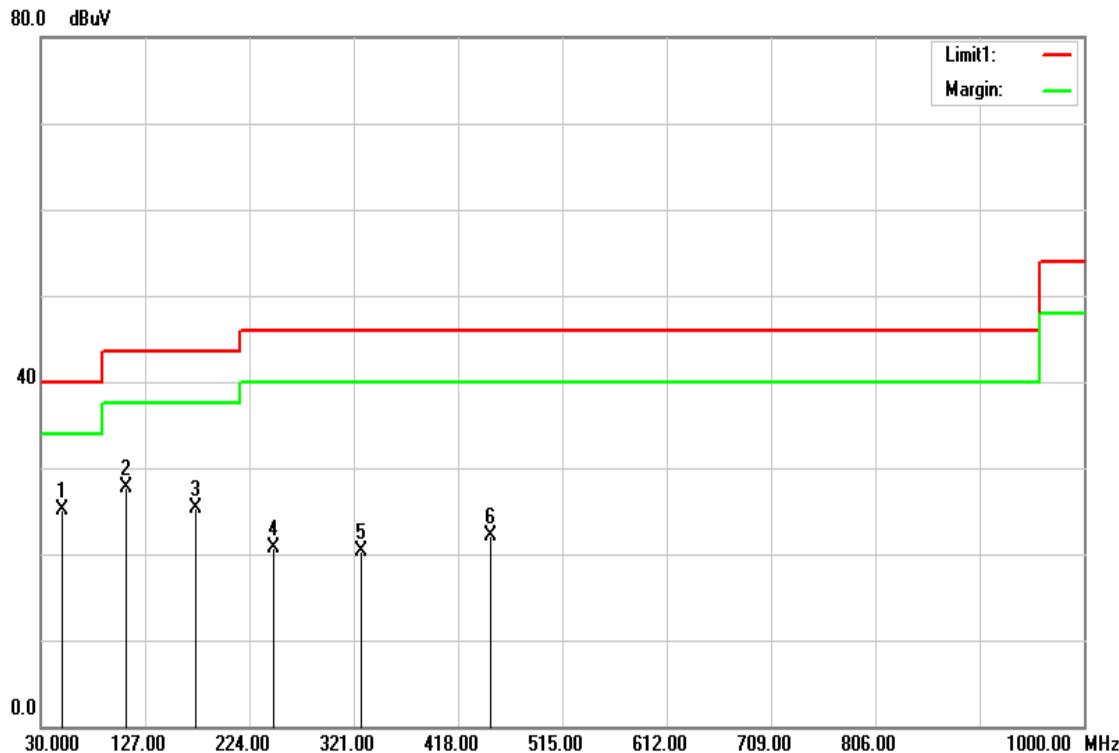
IEEE 802.11b mode: $\geq 98\%$, VBW=10Hz

IEEE 802.11g mode: $\geq 97\%$, VBW=1.5kHz

IEEE 802.11n HT 20 MHz mode: $\geq 96\%$, VBW=1.5kHz

7. Repeat above procedures until the measurements for all frequencies are complete.
8. Result = Spectrum Reading + cable loss(spectrum to Amp) - Amp Gain + Cable loss(Amp to receive Ant)+ Receive Ant

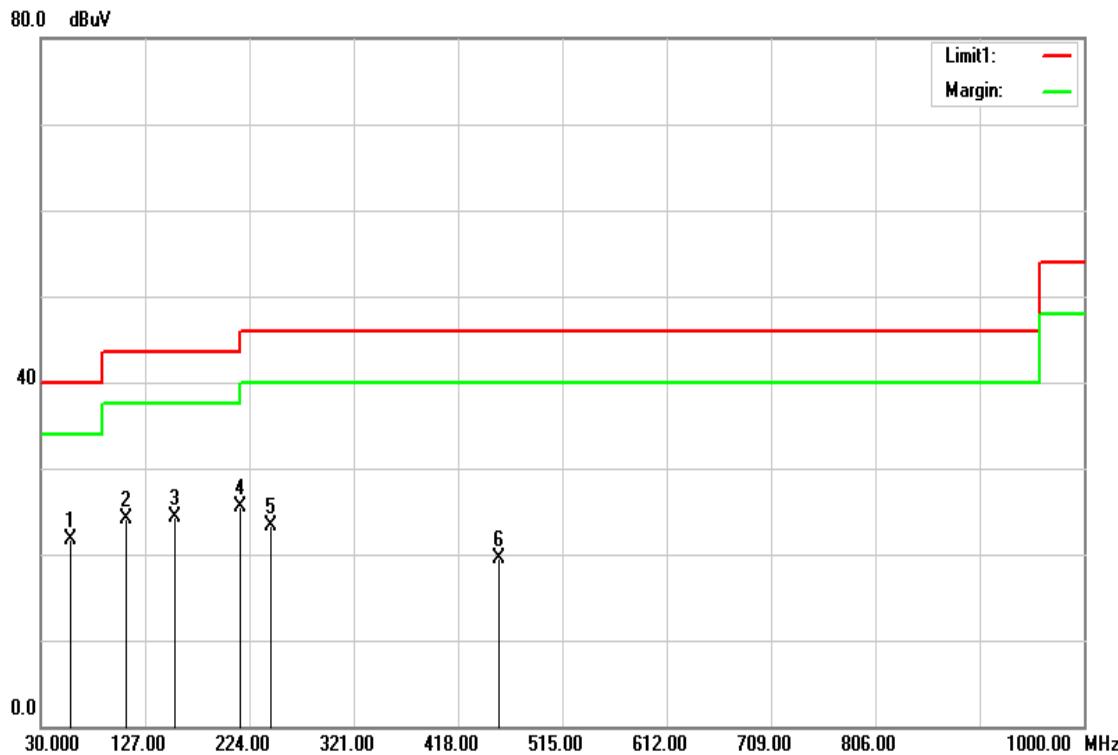
Note: We checked every harmonics frequencies from Fundamental frequencies with reduced VBW, and we mark a point to prove pass or not if we find any emission. For this case, there are no emissions hidden in the noise floor.

Below 1GHz**Operation Mode:** Normal Link**Test Date:** March 16, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
50.3700	46.27	-21.11	25.16	40.00	-14.84	peak	V
109.5400	45.15	-17.35	27.80	43.50	-15.70	peak	V
173.5600	42.24	-17.02	25.22	43.50	-18.28	peak	V
246.3100	36.97	-16.36	20.61	46.00	-25.39	peak	V
327.7900	33.71	-13.49	20.22	46.00	-25.78	peak	V
448.0700	32.38	-10.25	22.13	46.00	-23.87	peak	V

Remark:

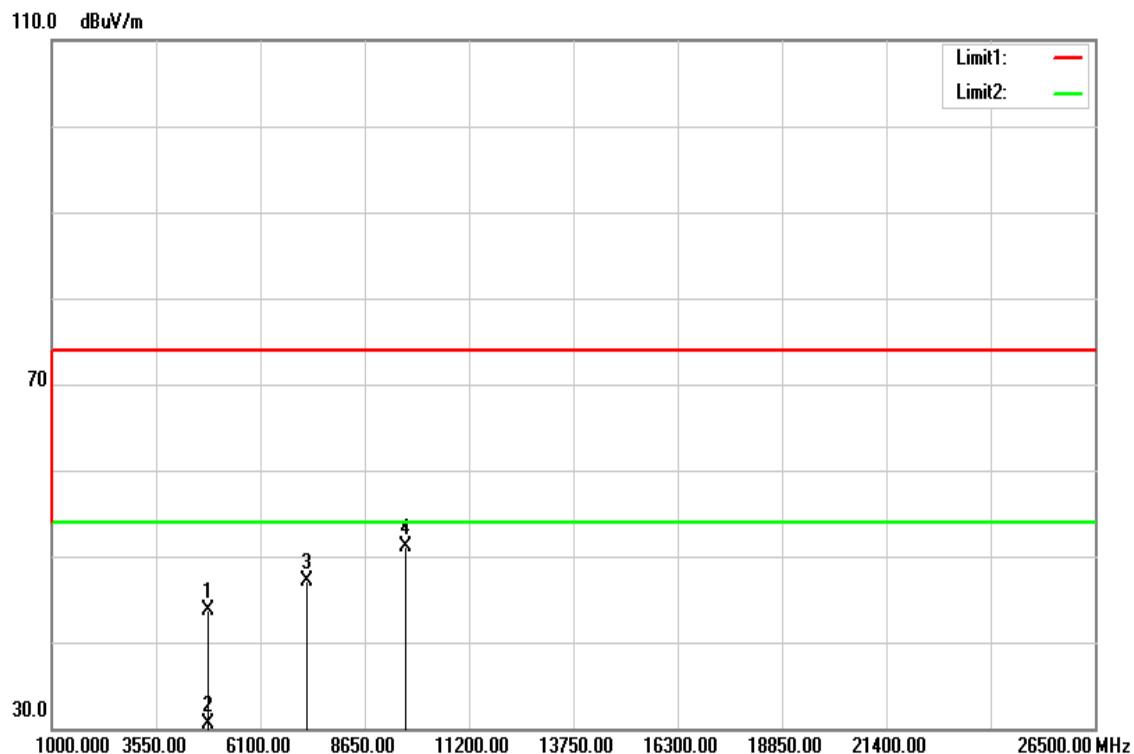
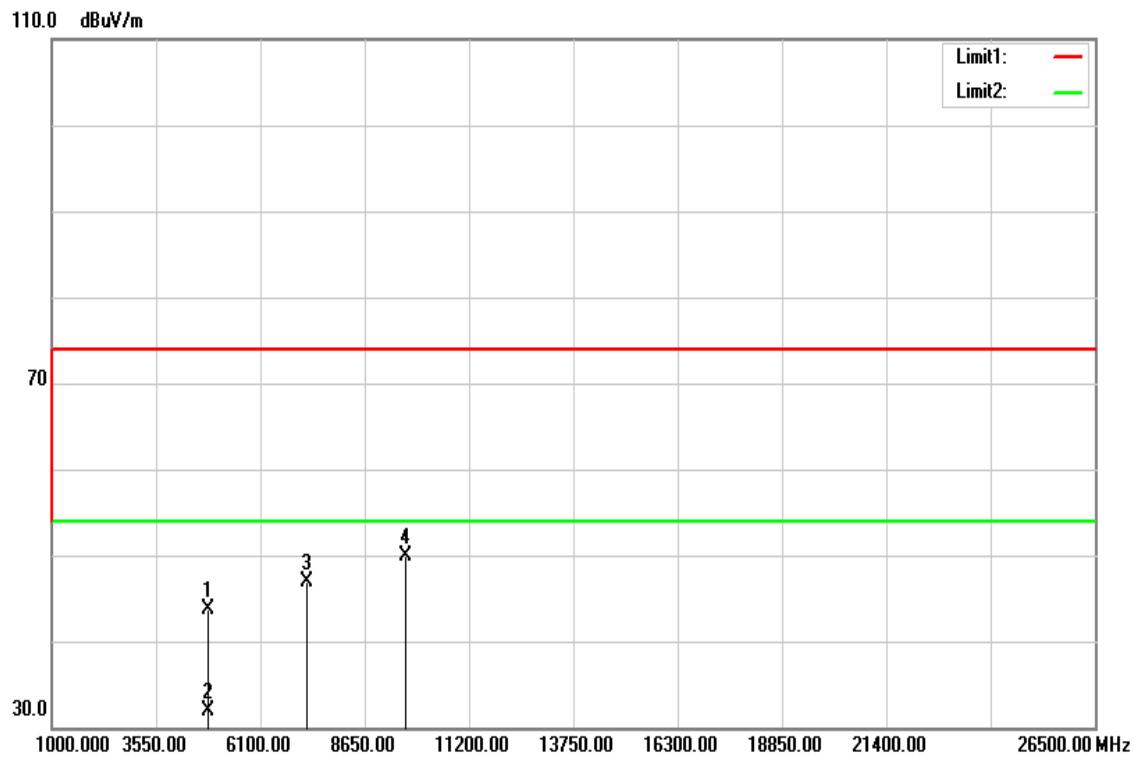
1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

Operation Mode: Normal Link**Test Date:** March 16, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
57.1600	43.50	-21.81	21.69	40.00	-18.31	peak	H
109.5400	41.41	-17.35	24.06	43.50	-19.44	peak	H
155.1300	40.52	-16.22	24.30	43.50	-19.20	peak	H
215.2700	42.14	-16.63	25.51	43.50	-17.99	peak	H
243.4000	39.68	-16.43	23.25	46.00	-22.75	peak	H
455.8300	29.52	-10.08	19.44	46.00	-26.56	peak	H

Remark:

1. Measuring frequencies from 30 MHz to the 1GHz.
2. Radiated emissions measured in frequency range from 30 MHz to 1000MHz were made with an instrument using peak/quasi-peak detector mode.
3. Quasi-peak test would be performed if the peak result were greater than the quasi-peak limit or as required by the applicant.
4. Measurements above show only up to 6 maximum emissions noted, or would be lesser, with "N/A" remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
5. Margin (dB) = Result (dBuV/m) – Limit (dBuV/m).

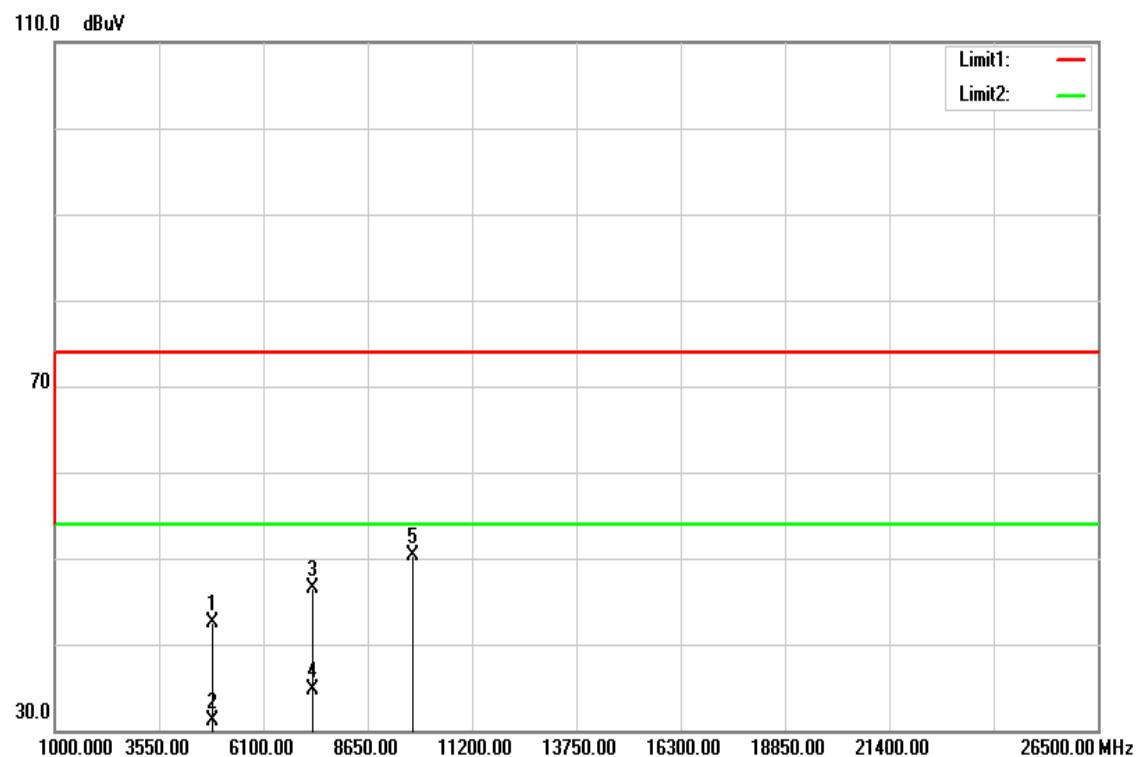
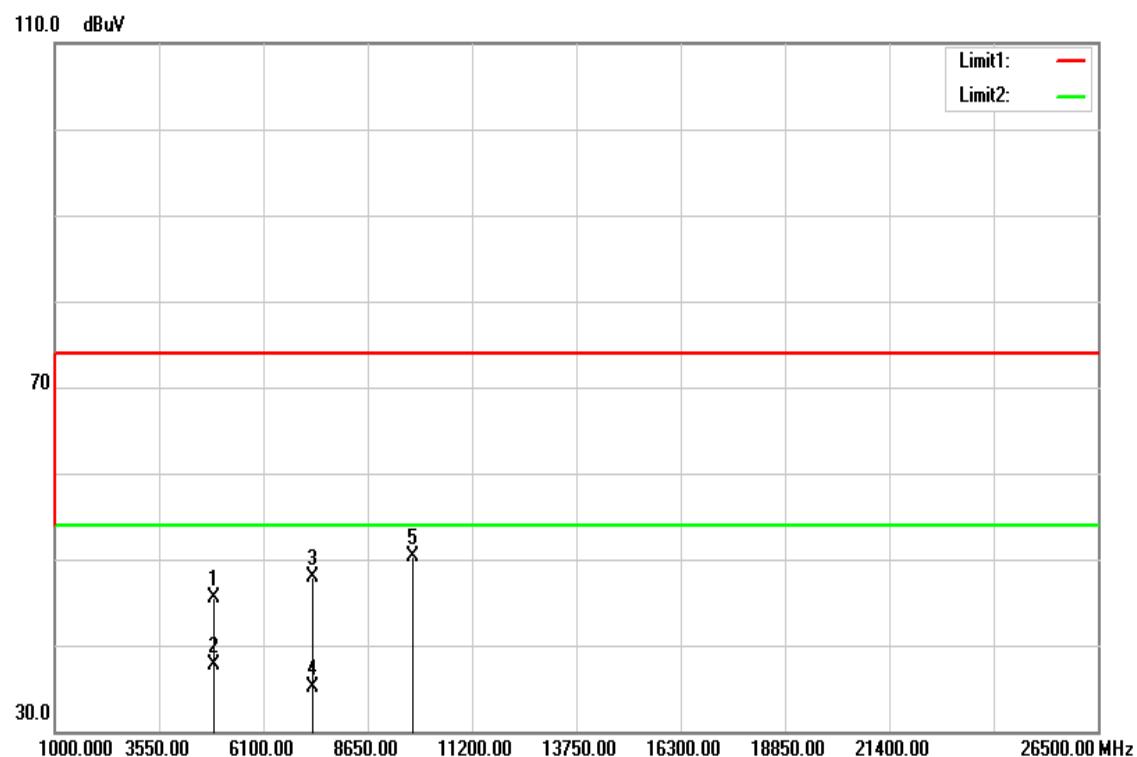
Above 1 GHz**TX / IEEE 802.11b / CH Low****Polarity: Vertical****Polarity: Horizontal**

Above 1 GHz**Operation Mode:** TX / IEEE 802.11b / CH Low**Test Date:** February 26, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	39.60	4.01	43.61	74.00	-30.39	peak	V
4824.000	26.48	4.01	30.49	54.00	-23.51	AVG	V
7236.000	36.51	10.64	47.15	74.00	-26.85	peak	V
9648.000	36.93	14.22	51.15	74.00	-22.85	peak	V
N/A							
4824.000	39.75	4.01	43.76	74.00	-30.24	peak	H
4824.000	27.87	4.01	31.88	54.00	-22.12	AVG	H
7236.000	36.22	10.64	46.86	74.00	-27.14	peak	H
9648.000	35.64	14.22	49.86	74.00	-24.14	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

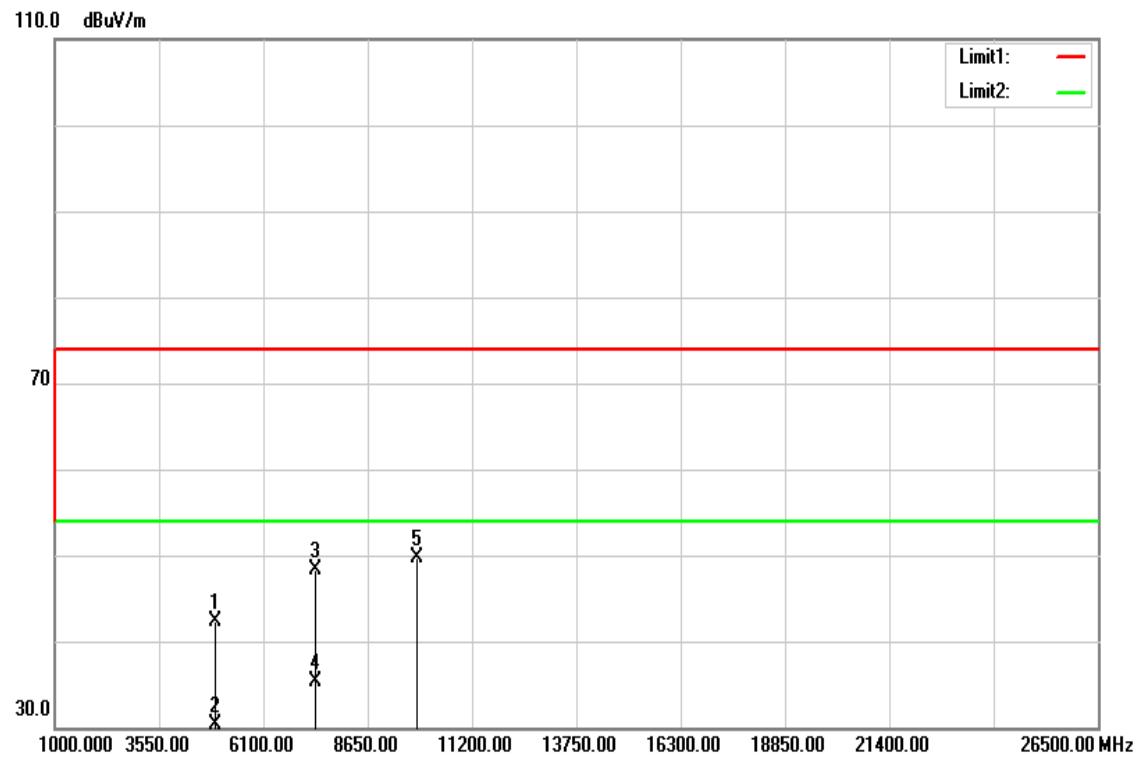
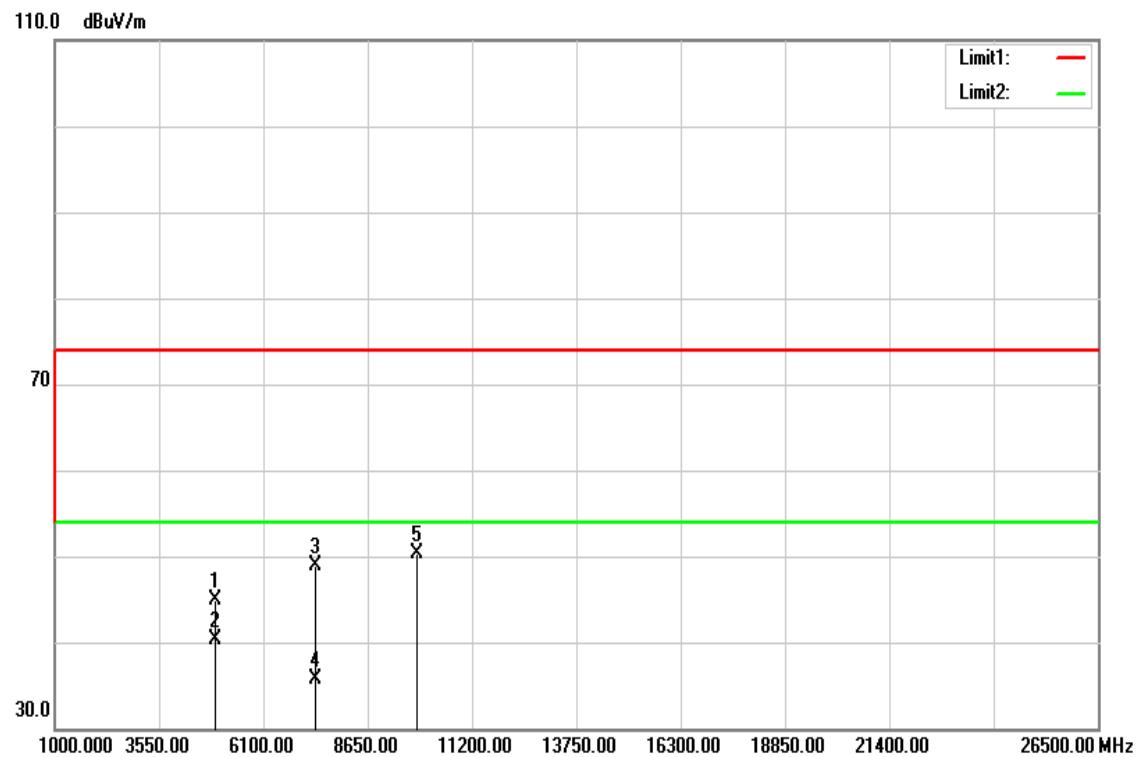
TX / IEEE 802.11b / CH Mid**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11b / CH Mid**Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	37.27	5.23	42.50	74.00	-31.50	peak	V
4874.000	25.93	5.23	31.16	54.00	-22.84	AVG	V
7311.000	33.60	12.94	46.54	74.00	-27.46	peak	V
7311.000	21.79	12.94	34.73	54.00	-19.27	AVG	V
9748.000	32.79	17.60	50.39	74.00	-23.61	peak	V
N/A							
4876.000	40.26	5.24	45.50	74.00	-28.50	peak	H
4876.000	32.46	5.24	37.70	54.00	-16.30	AVG	H
7311.000	34.92	12.94	47.86	74.00	-26.14	peak	H
7311.000	22.21	12.94	35.15	54.00	-18.85	AVG	H
9748.000	32.79	17.60	50.39	74.00	-23.61	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

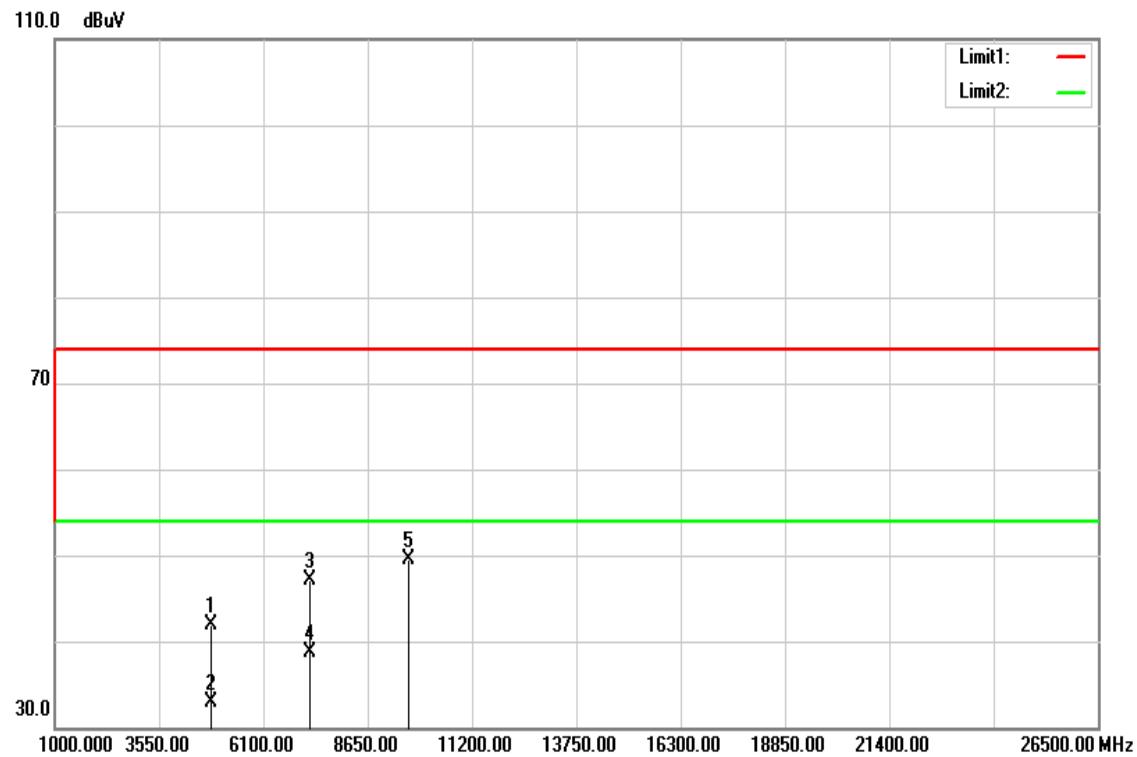
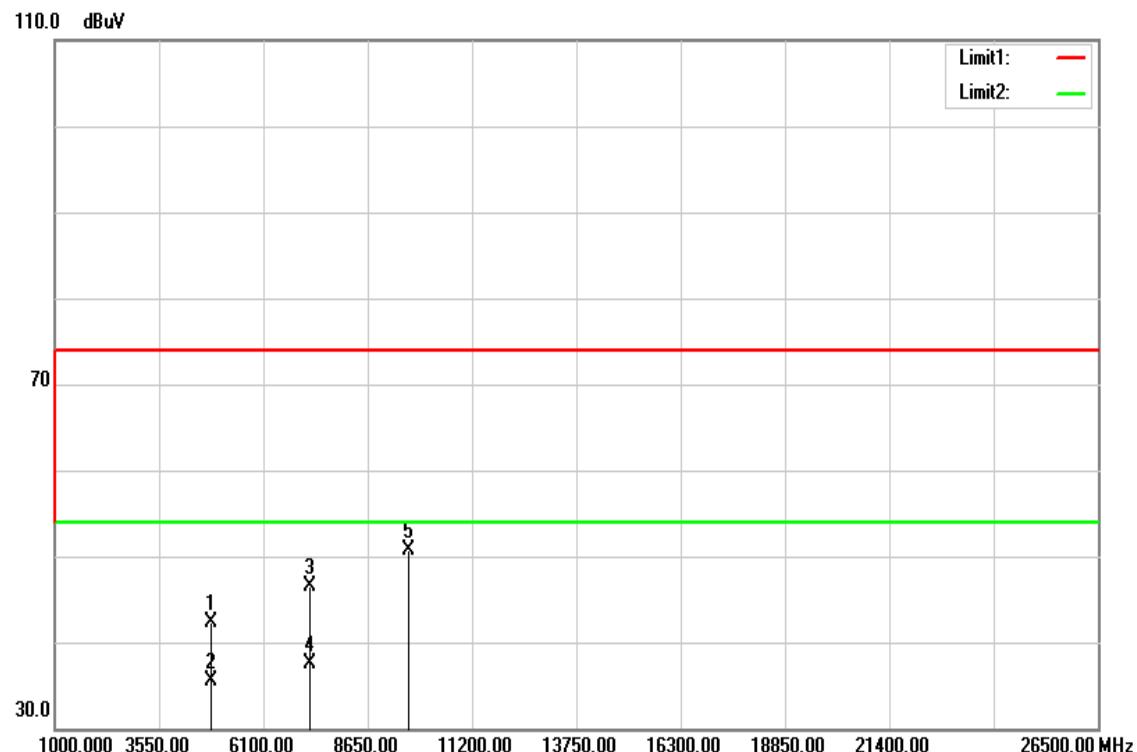
TX / IEEE 802.11b / CH High**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11b / CH High**Test Date:** February 26, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	38.33	3.90	42.23	74.00	-31.77	peak	V
4924.000	26.35	3.90	30.25	54.00	-23.75	AVG	V
7386.000	37.58	10.79	48.37	74.00	-25.63	peak	V
7386.000	24.59	10.79	35.38	54.00	-18.62	AVG	V
9848.000	35.06	14.60	49.66	74.00	-24.34	peak	V
N/A							
4924.000	41.06	3.90	44.96	74.00	-29.04	peak	H
4924.000	36.33	3.90	40.23	54.00	-13.77	AVG	H
7386.000	38.18	10.79	48.97	74.00	-25.03	peak	H
7386.000	24.85	10.79	35.64	54.00	-18.36	AVG	H
9848.000	35.60	14.60	50.20	74.00	-23.80	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

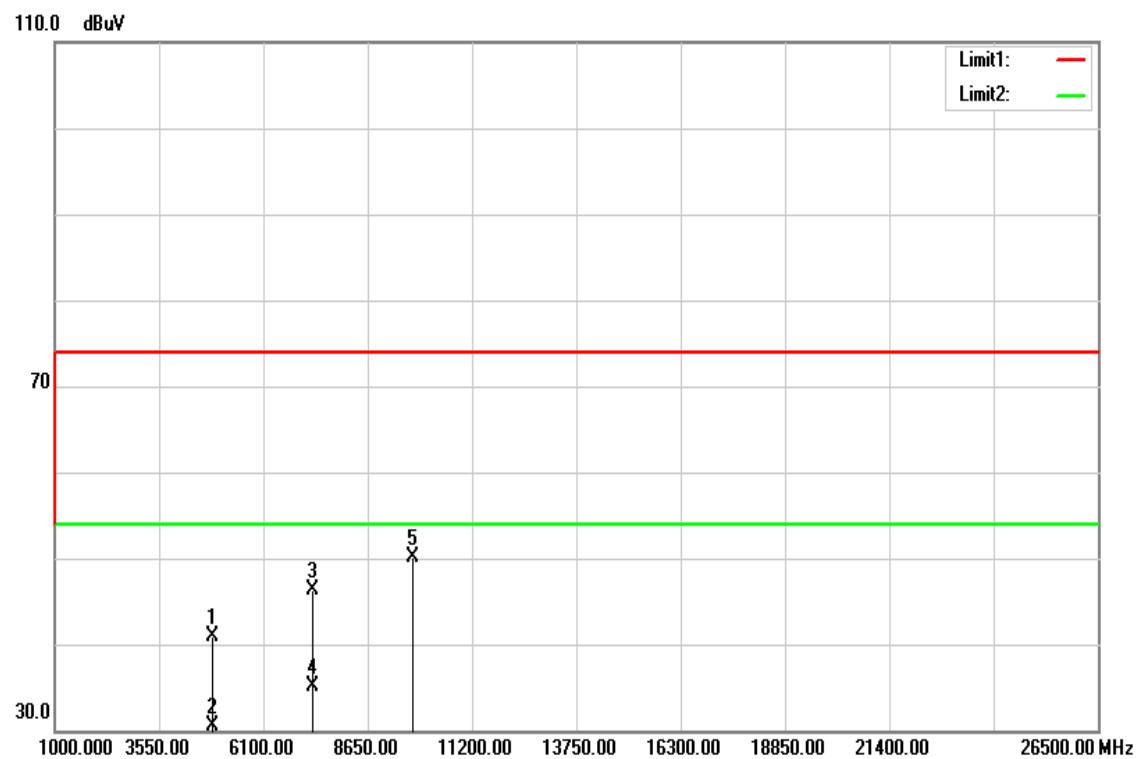
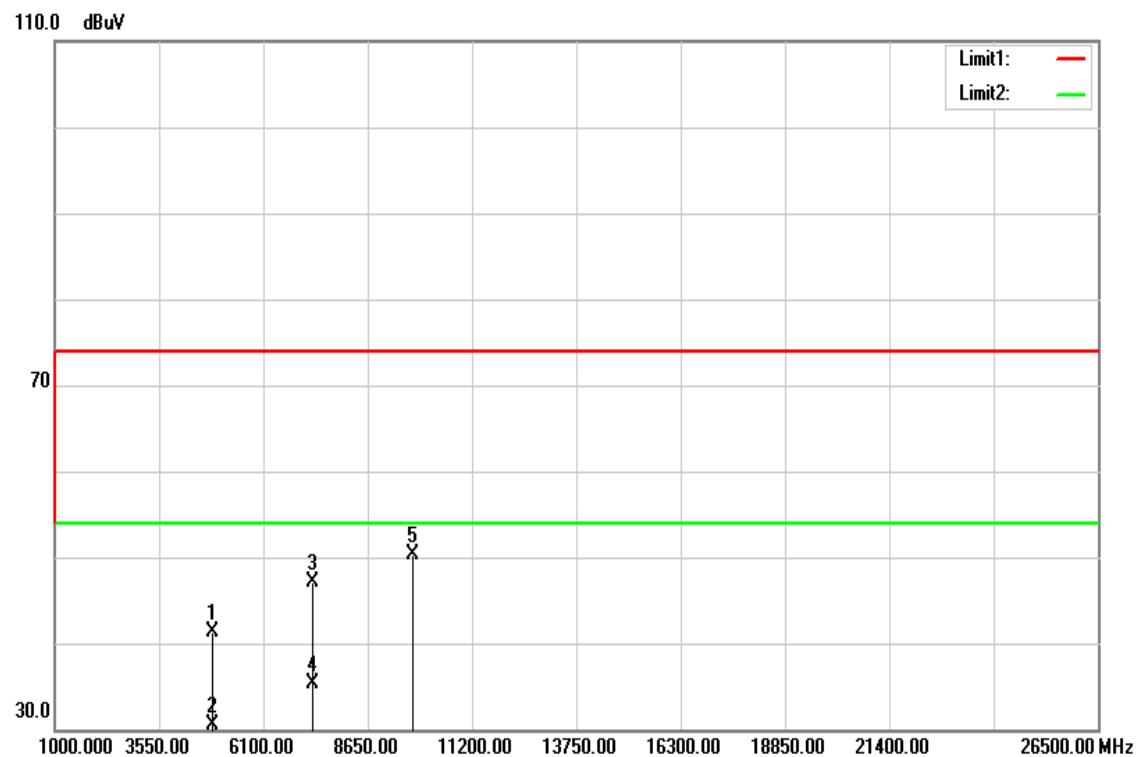
TX / IEEE 802.11g / CH Low**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11g / CH Low**Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	36.75	5.10	41.85	74.00	-32.15	peak	V
4824.000	27.75	5.10	32.85	54.00	-21.15	AVG	V
7236.000	34.41	12.71	47.12	74.00	-26.88	peak	V
7236.000	25.95	12.71	38.66	54.00	-15.34	AVG	V
9648.000	31.82	17.60	49.42	74.00	-24.58	peak	V
N/A							
4824.000	37.16	5.10	42.26	74.00	-31.74	peak	H
4824.000	30.38	5.10	35.48	54.00	-18.52	AVG	H
7236.000	33.80	12.71	46.51	74.00	-27.49	peak	H
7236.000	24.75	12.71	37.46	54.00	-16.54	AVG	H
9648.000	33.03	17.60	50.63	74.00	-23.37	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

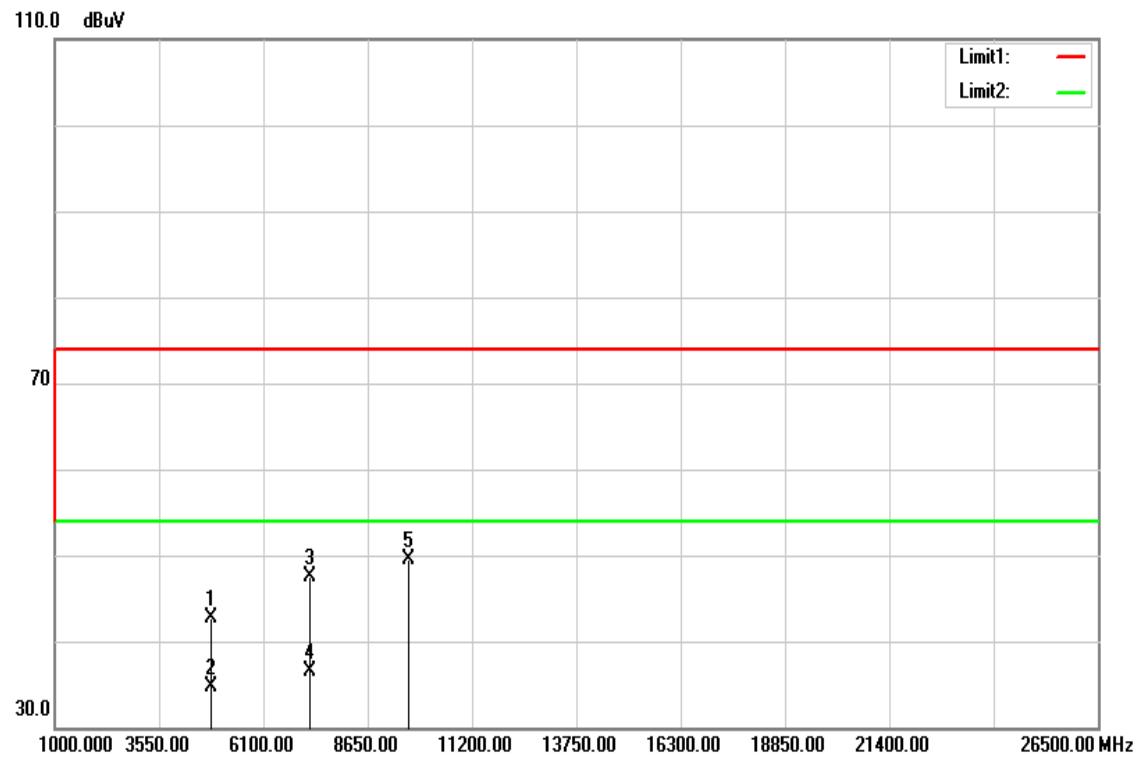
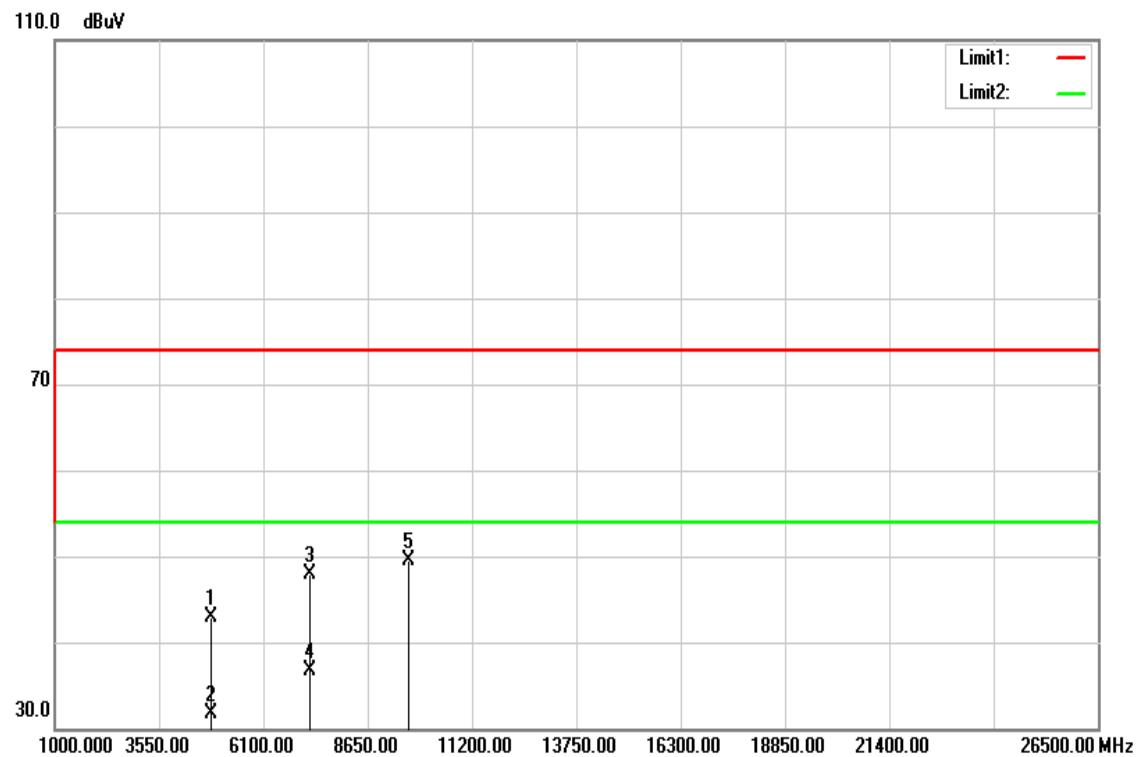
TX / IEEE 802.11g / CH Mid**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11g / CH Mid**Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	35.74	5.23	40.97	74.00	-33.03	peak	V
4874.000	25.29	5.23	30.52	54.00	-23.48	AVG	V
7311.000	33.41	12.94	46.35	74.00	-27.65	peak	V
7311.000	22.20	12.94	35.14	54.00	-18.86	AVG	V
9748.000	32.48	17.60	50.08	74.00	-23.92	peak	V
N/A							
4874.000	36.07	5.23	41.30	74.00	-32.70	peak	H
4874.000	25.28	5.23	30.51	54.00	-23.49	AVG	H
7311.000	34.09	12.94	47.03	74.00	-26.97	peak	H
7311.000	22.28	12.94	35.22	54.00	-18.78	AVG	H
9748.000	32.64	17.60	50.24	74.00	-23.76	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

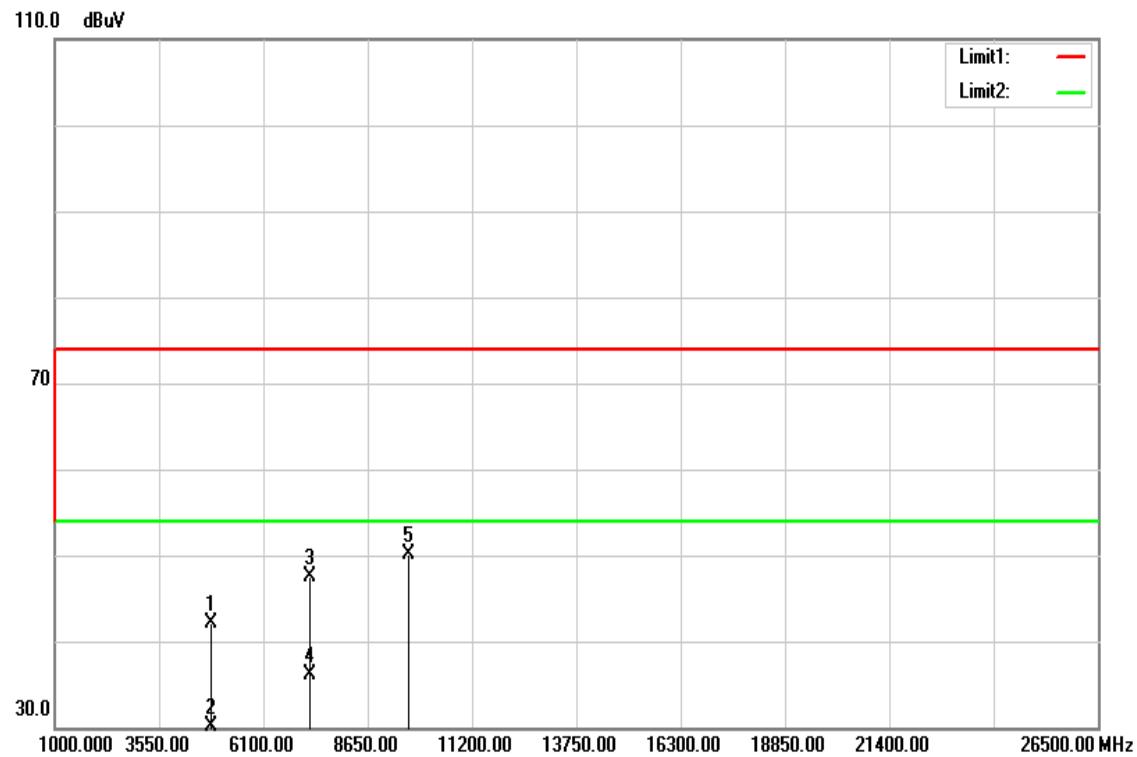
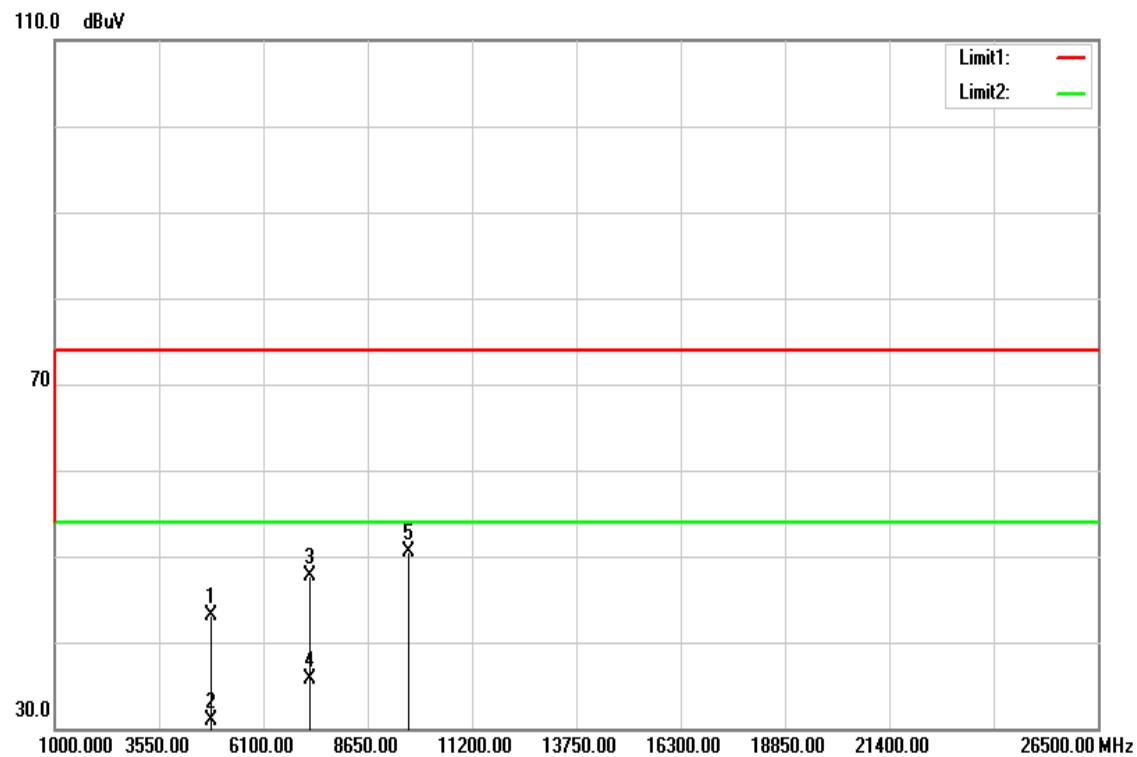
TX / IEEE 802.11g / CH High**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11g / CH High**Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	37.56	5.10	42.66	74.00	-31.34	peak	V
4824.000	29.53	5.10	34.63	54.00	-19.37	AVG	V
7236.000	34.85	12.71	47.56	74.00	-26.44	peak	V
7236.000	23.81	12.71	36.52	54.00	-17.48	AVG	V
9648.000	31.85	17.60	49.45	74.00	-24.55	peak	V
N/A							
4824.000	37.87	5.10	42.97	74.00	-31.03	peak	H
4824.000	26.60	5.10	31.70	54.00	-22.30	AVG	H
7236.000	35.23	12.71	47.94	74.00	-26.06	peak	H
7236.000	23.95	12.71	36.66	54.00	-17.34	AVG	H
9648.000	31.82	17.60	49.42	74.00	-24.58	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11n HT 20 MHz mode / CH Low**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Low **Test Date:** March 25, 2016

Temperature: 27°C

Tested by: Jason Lu

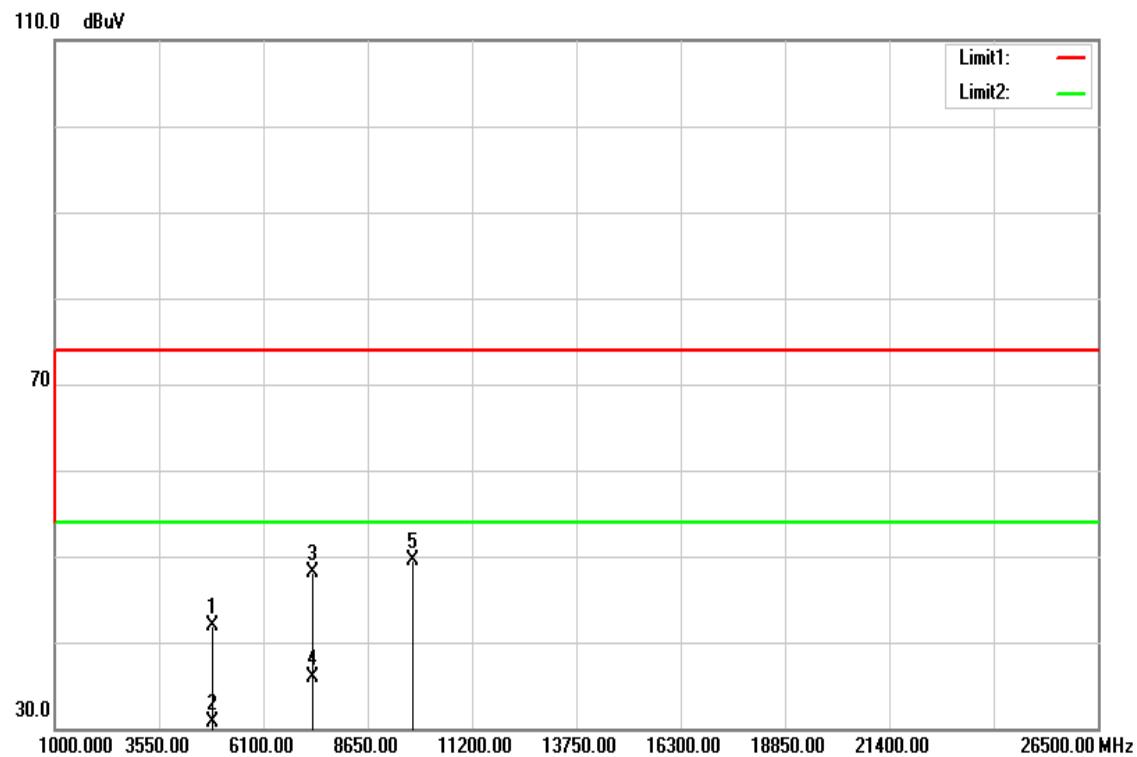
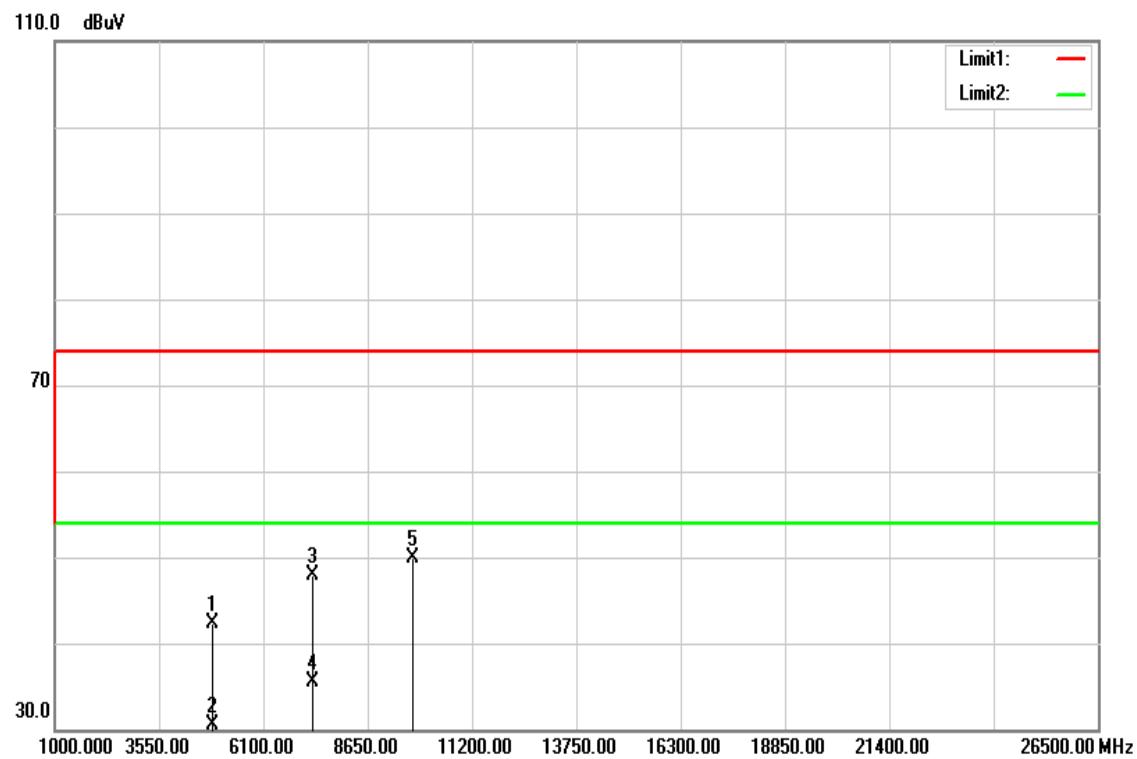
Humidity: 53% RH

Polarity: Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4824.000	36.95	5.10	42.05	74.00	-31.95	peak	V
4824.000	25.00	5.10	30.10	54.00	-23.90	AVG	V
7236.000	34.78	12.71	47.49	74.00	-26.51	peak	V
7236.000	23.41	12.71	36.12	54.00	-17.88	AVG	V
9648.000	32.59	17.60	50.19	74.00	-23.81	peak	V
N/A							
4824.000	38.09	5.10	43.19	74.00	-30.81	peak	H
4824.000	25.74	5.10	30.84	54.00	-23.16	AVG	H
7236.000	35.08	12.71	47.79	74.00	-26.21	peak	H
7236.000	22.98	12.71	35.69	54.00	-18.31	AVG	H
9648.000	32.96	17.60	50.56	74.00	-23.44	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

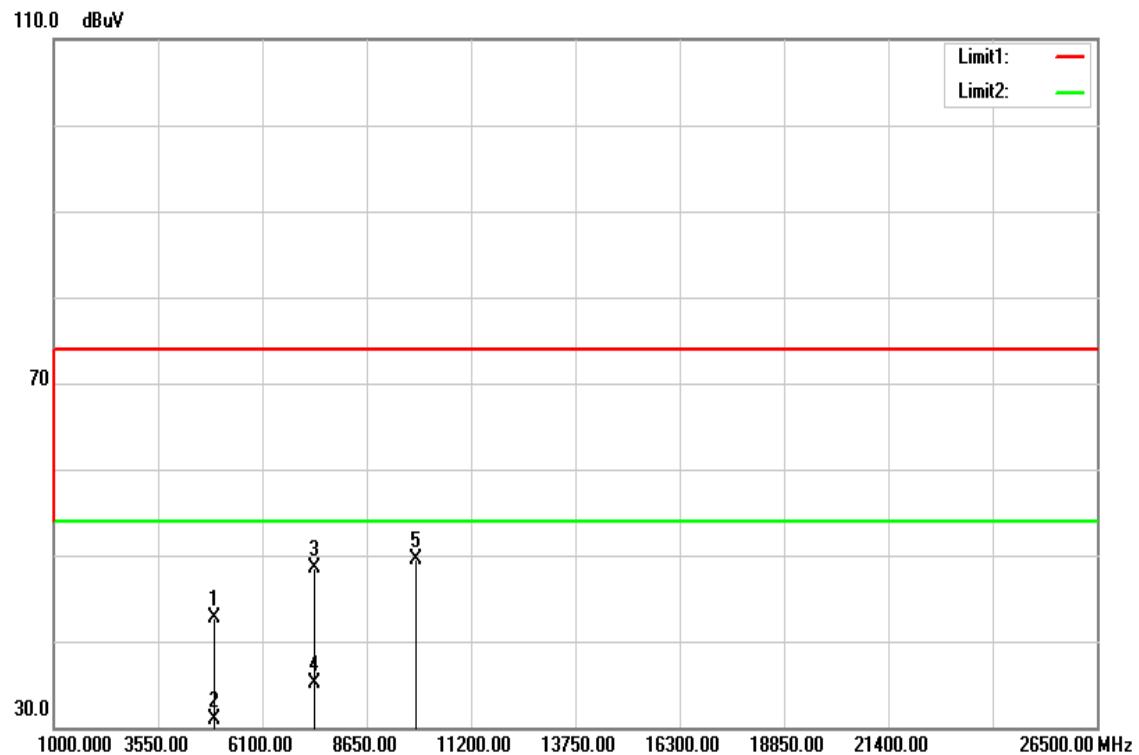
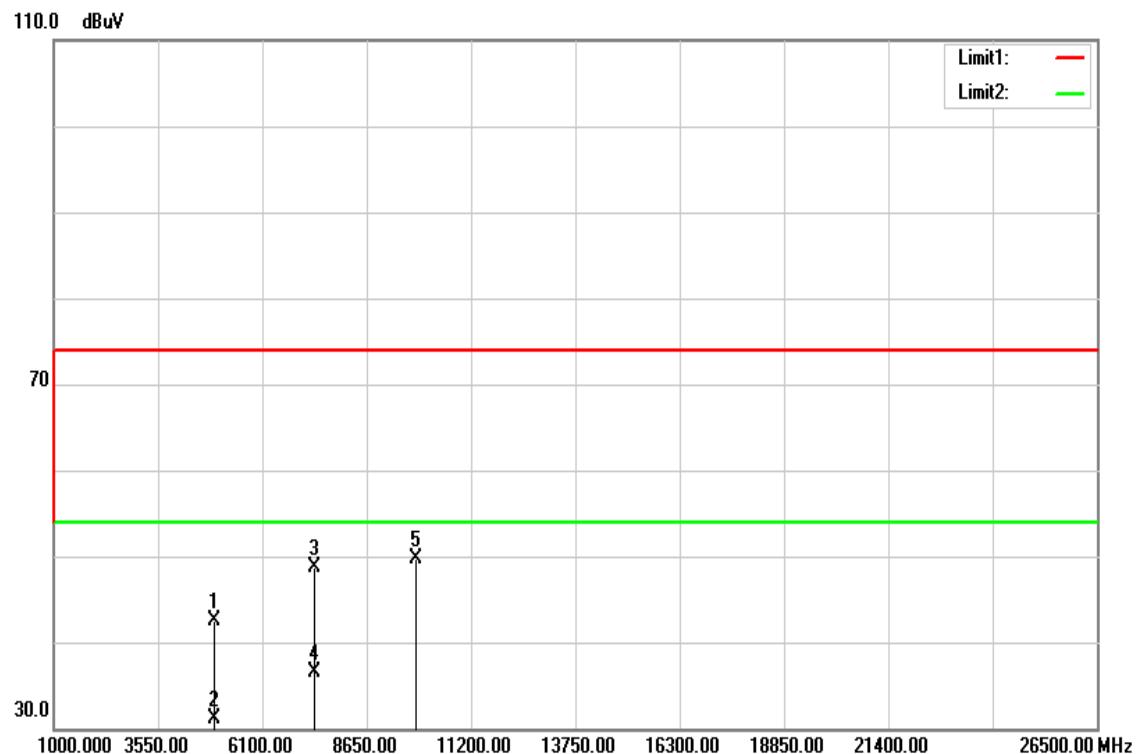
TX / IEEE 802.11n HT 20 MHz mode / CH Mid**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH Mid **Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4874.000	36.61	5.23	41.84	74.00	-32.16	peak	V
4874.000	25.56	5.23	30.79	54.00	-23.21	AVG	V
7311.000	35.23	12.94	48.17	74.00	-25.83	peak	V
7311.000	22.89	12.94	35.83	54.00	-18.17	AVG	V
9748.000	31.88	17.60	49.48	74.00	-24.52	peak	V
N/A							
4874.000	37.03	5.23	42.26	74.00	-31.74	peak	H
4874.000	25.19	5.23	30.42	54.00	-23.58	AVG	H
7311.000	34.96	12.94	47.90	74.00	-26.10	peak	H
7311.000	22.65	12.94	35.59	54.00	-18.41	AVG	H
9748.000	32.21	17.60	49.81	74.00	-24.19	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

TX / IEEE 802.11n HT 20 MHz mode / CH High**Polarity: Vertical****Polarity: Horizontal**

Operation Mode: TX / IEEE 802.11n HT 20 MHz mode / CH High **Test Date:** March 25, 2016**Temperature:** 27°C**Tested by:** Jason Lu**Humidity:** 53% RH**Polarity:** Ver. / Hor.

Frequency (MHz)	Reading (dBuV)	Correction Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark	Ant. Pol. (H/V)
4924.000	37.31	5.37	42.68	74.00	-31.32	peak	V
4924.000	25.51	5.37	30.88	54.00	-23.12	AVG	V
7386.000	35.38	13.17	48.55	74.00	-25.45	peak	V
7386.000	21.95	13.17	35.12	54.00	-18.88	AVG	V
9848.000	31.81	17.60	49.41	74.00	-24.59	peak	V
N/A							
4924.000	37.14	5.37	42.51	74.00	-31.49	peak	H
4924.000	25.65	5.37	31.02	54.00	-22.98	AVG	H
7386.000	35.54	13.17	48.71	74.00	-25.29	peak	H
7386.000	23.25	13.17	36.42	54.00	-17.58	AVG	H
9848.000	32.04	17.60	49.64	74.00	-24.36	peak	H
N/A							

Remark:

1. *Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.*
2. *Radiated emissions measured in frequency above 1000MHz were made with an instrument using peak/average detector mode.*
3. *Average test would be performed if the peak result were greater than the average limit or as required by the applicant.*
4. *Data of measurement within this frequency range shown “ --- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*
5. *Measurements above show only up to 6 maximum emissions noted, or would be lesser, with “ N/A ” remark, if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.*
6. *Margin (dB) = Remark result (dBuV/m) – Average limit (dBuV/m).*

7.7 POWERLINE CONDUCTED EMISSIONS

LIMIT

According to §15.207(a), except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50

* Decreases with the logarithm of the frequency.

Test Configuration

See test photographs attached in Appendix II for the actual connections between EUT and support equipment.

TEST PROCEDURE

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured were complete.

TEST RESULTS

The initial step in collecting conducted data is a spectrum analyzer peak scan of the measurement range. Significant peaks are then marked as shown on the following data page, and these signals are then quasi-peaked.

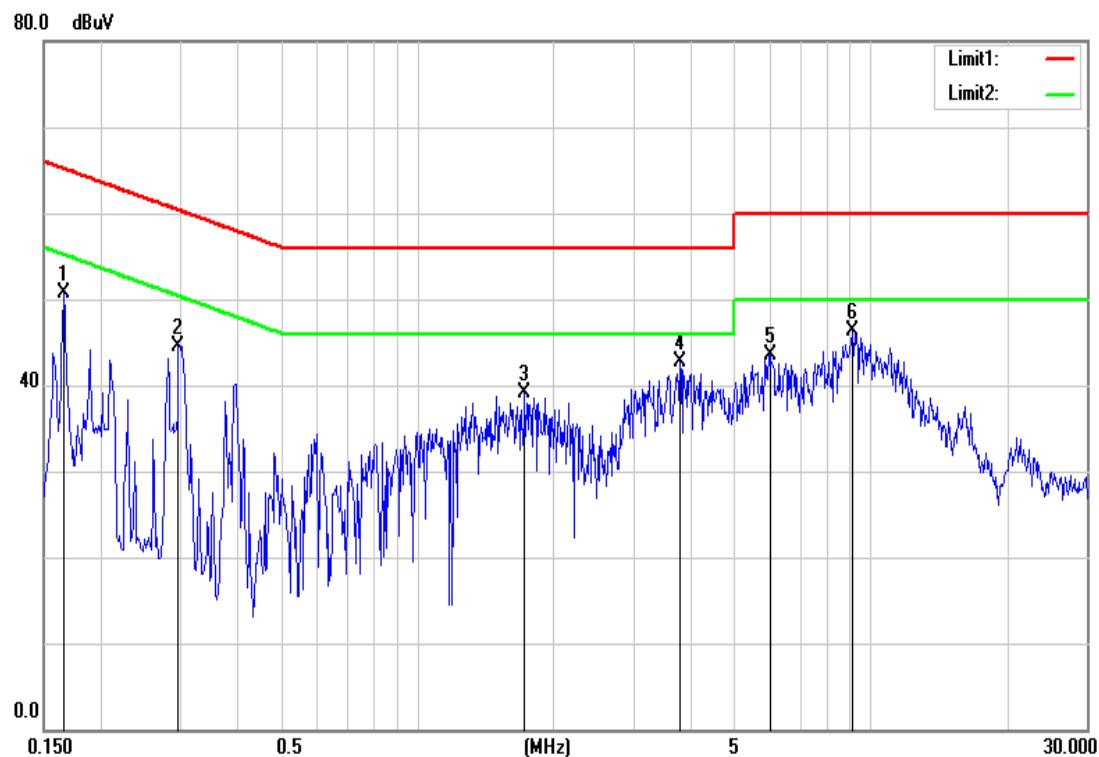
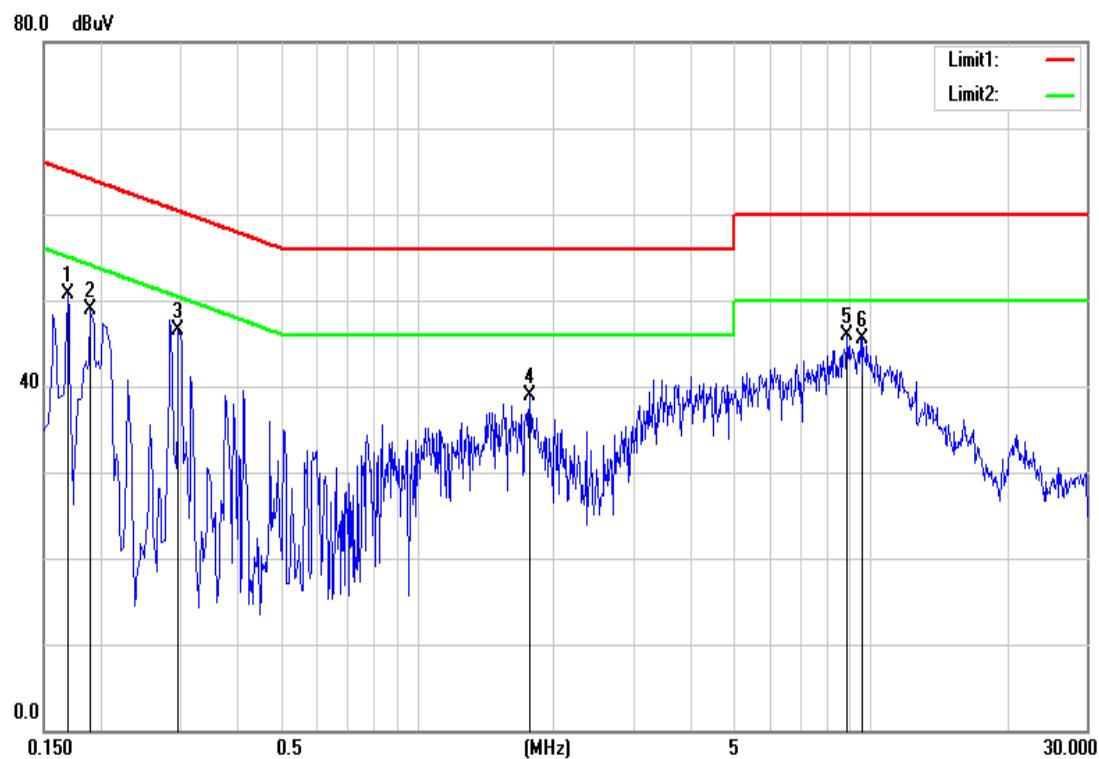
Test Data

Operation Mode: Normal Link **Test Date:** March 25, 2016
Temperature: 24°C **Tested by:** Dennis Li
Humidity: 56% RH

Freq. (MHz)	QP Reading (dBuV)	AV Reading (dBuV)	Corr. factor (dB/m)	QP Result (dBuV/m)	AV Result (dBuV/m)	QP Limit (dBuV)	AV Limit (dBuV)	QP Margin (dB)	AV Margin (dB)	Note
0.1660	41.08	41.08	9.69	50.77	50.77	65.15	55.16	-14.38	-4.39	L1
0.2980	34.85	34.85	9.68	44.53	44.53	60.30	50.30	-15.77	-5.77	L1
1.7340	29.09	29.09	9.96	39.05	39.05	56.00	46.00	-16.95	-6.95	L1
3.8140	32.88	32.88	9.82	42.70	42.70	56.00	46.00	-13.30	-3.30	L1
6.0140	33.71	33.71	9.86	43.57	43.57	60.00	50.00	-16.43	-6.43	L1
9.1340	36.41	36.41	9.92	46.33	46.33	60.00	50.00	-13.67	-3.67	L1
0.1700	40.98	40.98	9.64	50.62	50.62	64.96	54.96	-14.34	-4.34	L2
0.1900	39.24	39.24	9.64	48.88	48.88	64.03	54.04	-15.15	-5.16	L2
0.2980	36.91	36.91	9.64	46.55	46.55	60.30	50.30	-13.75	-3.75	L2
1.7780	29.02	29.02	9.89	38.91	38.91	56.00	46.00	-17.09	-7.09	L2
8.9020	35.95	35.95	9.89	45.84	45.84	60.00	50.00	-14.16	-4.16	L2
9.6500	35.69	35.69	9.91	45.60	45.60	60.00	50.00	-14.40	-4.40	L2

Remark:

1. Measuring frequencies from 0.15 MHz to 30MHz.
2. The emissions measured in frequency range from 0.15 MHz to 30MHz were made with an instrument using Quasi-peak detector and average detector.
3. The IF bandwidth of SPA between 0.15MHz and 30MHz was 10 kHz; the IF bandwidth of Test Receiver between 0.15MHz and 30MHz was 9 kHz;
4. L1 = Line One (Live Line) / L2 = Line Two (Neutral Line)

Test Plots***Conducted emissions (Line 1)******Conducted emissions (Line 2)***

APPENDIX II

PHOTOGRAPHS OF TEST SETUP

Conducted Emissions Setup Photos

