



TEST REPORT

Report No.: HK1811081525E

FCC PART 15 SUBPART C 15.247 RSS-247 ISSUE 2

Test report
On Behalf of
The Gem Group, Inc.
For
Paxton Bluetooth® Pairing Speakers

Model No.: 100164-001B

FCC ID: 2AGR4-100164 IC: 21530-100164

Prepared for: The Gem Group, Inc.

9 International Way, Lawrence MA 01843, USA

Prepared By: Shenzhen HUAK Testing Technology Co., Ltd.

1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,

Bao'an District, Shenzhen City, China

Date of Test: Nov. 01, 2018 ~ Nov. 09, 2018

Date of Report: Nov. 09, 2018
Report Number: HK1811081525E



Page 2 of 62 Report No.: HK1811081525E

TEST RESULT CERTIFICATION

Applicant's name:	The Gem	Group, Inc.	
Address:	9 International Way, Lawrence MA 01843, USA		
Manufacture's Name:	Shenzhen Shenboya Electronic Technology Co., Ltd		
Address:	6th floor, A Bldg, NanKeng second industrial zone, Bantian, Longgang District, Shenzhen, China		
Product description			
Trade Mark:	Gemline		
Product name:	Paxton Blu	uetooth® Pairing Speakers	
Model and/or type reference:	100164-00)1B	
Standards:	47 CFR F0 RSS-247 i	CC Part 15 Subpart C 15.247 ssue 2	
material. Shenzhen HUAK Testin	g Technolog n the reade :	d. is acknowledged as copyright owner argy Co., Ltd. takes no responsibility for and r's interpretation of the reproduced mater Nov. 01, 2018 ~ Nov. 09, 2018 Nov. 09, 2018 Pass	d will not assume
Testing Engine Technical Mana	-	Gary Qian) Edan Mu (Eden Hu)	
Authorized Sign	natory :	Jason Zhuri	

(Jason Zhou)



TABLE OF CONTENTS

Report No.: HK1811081525E

OF CONTENTS	3
JMMARY	5
TEST STANDARDS	5
TEST DESCRIPTION	5
TEST FACILITY	6
STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
ENERAL INFORMATION	7
ENVIRONMENTAL CONDITIONS	7
GENERAL DESCRIPTION OF EUT	7
DESCRIPTION OF TEST MODES AND TEST FREQUENCY	7
RELATED SUBMITTAL(S) / GRANT (S)	9
MODIFICATIONS	9
RECEIVER INPUT BANDWIDTH	9
EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE	9
EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	9
EQUIPMENT USED	10
EAK OUTPUT POWER	11
MEASUREMENT PROCEDURE	11
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	11
LIMITS AND MEASUREMENT RESULT	12
DB BANDWIDTH	16
MEASUREMENT PROCEDURE	16
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	16
LIMITS AND MEASUREMENT RESULTS	17
ONDUCTED SPURIOUS EMISSION	21
MEASUREMENT PROCEDURE	21
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	21
LIMITS AND MEASUREMENT RESULT	21
ADIATED EMISSION	29
MEASUREMENT PROCEDURE	29
TEST SETUP	31
LIMITS AND MEASUREMENT RESULT	32
CC LINE CONDUCTED EMISSION TEST	42
LIMITS OF LINE CONDUCTED EMISSION TEST	42
BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	42
	TEST STANDARDS TEST DESCRIPTION. TEST FACILITY STATEMENT OF THE MEASUREMENT UNCERTAINTY ENERAL INFORMATION ENVIRONMENTAL CONDITIONS GENERAL DESCRIPTION OF EUT DESCRIPTION OF TEST MODES AND TEST FREQUENCY RELATED SUBMITTAL(S) / GRANT (S) MODIFICATIONS RECEIVER INPUT BANDWIDTH EXAMPLE OF A HOPPING SEQUENCE IN DATA MODE EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR EQUIPMENT USED EAK OUTPUT POWER MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT DDB BANDWIDTH MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULTS DNDUCTED SPURIOUS EMISSION MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT DNDUCTED SPURIOUS EMISSION MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT ADIATED EMISSION MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT ADIATED EMISSION MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT ADIATED EMISSION MEASUREMENT PROCEDURE TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) LIMITS AND MEASUREMENT RESULT

Page 4 of 62

Report No.: HK1811081525E

PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST.......43 7.4. 7.5. NUMBER OF HOPPING FREQUENCY46 8.1. 8.2. 8.3. TIME OF OCCUPANCY (DWELL TIME) 47 9.1. 9.2. 9.3. 10. FREQUENCY SEPARATION.......51 10.1. MEASUREMENT PROCEDURE.......51 10.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)......51 10.3. LIMITS AND MEASUREMENT RESULT 51 11. PHOTOGRAPHS OF EUT......54 12.



1. SUMMARY

1.1. TEST STANDARDS

The tests were performed according to following standards:

FCC Rules Part 15.247: Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

RSS-247-Issue 2: Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

RSS-Gen Issue 5: General Requirements for Compliance of Radio Apparatus

ANSI C63.10:2013: American National Standard for Testing Unlicensed Wireless Devices

1.2. Test Description

FCC PART 15.247 & RSS 247			
FCC Part 15.207 RSS-Gen 8.8	AC Power Conducted Emission	PASS	
FCC Part 15.247(a)(1)(i) RSS 247 5.1 (1) RSS-Gen 4.6	20dB Bandwidth	PASS	
FCC Part 15.247(d) RSS 247 5.5	Spurious RF Conducted Emission	PASS	
FCC Part 15.247(b) RSS 247 5.4 (2)	Maximum Peak Output Power	PASS	
FCC Part 15.247(b) RSS 247 5.1 (1)	Pseudorandom Frequency Hopping Sequence	PASS	
FCC Part 15.247(a)(1)(iii) RSS 247 5.1 (4)	Number of hopping frequency& Time of Occupancy	PASS	
FCC Part 15.247(a)(1) RSS 247 5.1 (2)	Frequency Separation	PASS	
FCC Part 15.205/15.209 RSS-Gen 8.9	Radiated Emissions	PASS	
FCC Part 15.247(d) RSS-Gen 8.10	Band Edge Compliance of RF Emission	PASS	



Page 6 of 62 Report No.: HK1811081525E

1.3. Test Facility

1.3.1 Address of the test laboratory

Shenzhen HUAK Testing Technology Co., Ltd.

Add.:1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China

There is one 3m semi-anechoic chamber and two line conducted labs for final test. The Test Sites meet the requirements in documents ANSI C63.4 and CISPR 32/EN 55032 requirements.

1.3.2 Laboratory accreditation

The test facility is recognized, certified, or accredited by the following organizations:

IC Registration No.: 21210

The 3m alternate test site of Shenzhen HUAK Testing Technology Co., Ltd. EMC Laboratory has been registered by Certification and Engineer Bureau of Industry Canada for the performance of with Registration No.: 21210 on May 24, 2016.

FCC Registration No.: CN1229
Test Firm Registration Number: 616276

1.4. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 "Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements" and is documented in the Shenzhen HUAK Testing Technology Co., Ltd. quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for HUAK laboratory is reported:

Test	Measurement Uncertainty	Notes
Transmitter power conducted	±0.57 dB	(1)
Transmitter power Radiated	±2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	±2.20 dB	(1)
Occupied Bandwidth	±0.01ppm	(1)
Radiated Emission 30~1000MHz	±4.10dB	(1)
Radiated Emission Above 1GHz	±4.32dB	(1)
Conducted Disturbance0.15~30MHz	±3.20dB	(1)

⁽¹⁾ This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2. GENERAL INFORMATION

2.1. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

•	_
Normal Temperature:	25°C
Relative Humidity:	55 %
Air Pressure:	101 kPa

2.2. General Description of EUT

Product Name:	Paxton Bluetooth® Pairing Speakers
Model/Type reference:	100164-001B
Power supply:	DC 3.7V
Version:	Supported BT4.2
Modulation:	GFSK, π/4DQPSK
Operation frequency:	2402MHz~2480MHz
Channel number:	79
Channel separation:	1MHz
Antenna type:	PCB Antenna
Antenna gain:	0dBi
Hardware Version:	V3
Software Version:	V1.0

Note: For more details, refer to the user's manual of the EUT.

2.3. Description of Test Modes and Test Frequency

The Applicant provides communication tools software to control the EUT for staying in continuous transmitting and receiving mode for testing.

There are 79 channels provided to the EUT and Channel 00/39/78 was selected for testing.

Operation Frequency:

Channel	Frequency (MHz)
00	2402
01	2403
i	:
38	2440
39	2441
40	2442
i	:
77	2479
78	2480

Note: The line display in grey were the channel selected for testing




Page 8 of 62 Report No.: HK1811081525E

NO.	TEST MODE DESCRIPTION	
1	Low channel TX	
2	Middle channel TX	
3	High channel TX	
4	Normal Operating (BT)	

Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

Configure:



Item	Equipment	Model No.	ID or Specification	Remark
1	Adapter	NTR-S01	DC 5V	Support
2	Charging base	N/A	DC 5V	Support
3	USB cable	N/A	1m Unshielded	Support



2.4. Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended to comply with Section 15.247 of the FCC Part 15, Subpart C Rules and RSS-247.

2.5. Modifications

No modifications were implemented to meet testing criteria.

2.6. Receiver Input Bandwidth

The input bandwidth of the receiver is 1.3MHZ,In every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally the type of connection(e.g. single of multislot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also the slave of the connection will use these settings.

Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

2.7. Example of a Hopping Sequence in Data Mode

Example of a 79 hopping sequence in data mode: 40,21,44,23,42,53,46,55,48,33,52,35,50,65,54,67 56,37,60,39,58,69,62,71,64,25,68,27,66,57,70,59 72,29,76,31,74,61,78,63,01,41,05,43,03,73,07,75 09,45,13,47,11,77,15,00,64,49,66,53,68,02,70,06 01, 51, 03, 55, 05, 04

2.8. Equally Average Use of Frequencies and Behaviour

The generation of the hopping sequence in connection mode depends essentially on two input values:

- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock

The LAP(lower address part) are the 24 LSB's of the 48 BD_ADDRESS. The BD_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP(upper address part) are the 24MSB's of the 48BD_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For ehavior zation with other units only offset are used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bit counter. For the deriving of the hopping sequence the entire. LAP(24 bits), 4LSB's (4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate te Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following9ehavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended. The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer(and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always



Differ from the first one.

2.9. Equipment Used

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schewarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC051845 SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year

The calibration interval was one year



3. Peak Output Power


3.1. Measurement Procedure

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

3.2. Test Set-Up (Block Diagram of Configuration)

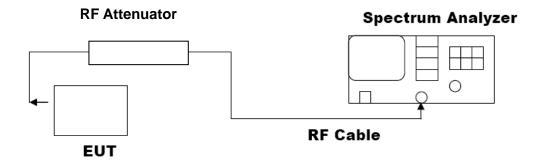






3.3. Limits and Measurement Result

	PEAK OUTPUT POWER MEASUREMENT RESULT FOR GFSK MOUDULATION				
Frequency (GHz)	Frequency Peak Power Applicable Limits				
2.402	-4.114	30	Pass		
2.441	-4.046	30	Pass		
2.480	-4.680	30	Pass		

Report No.: HK1811081525E

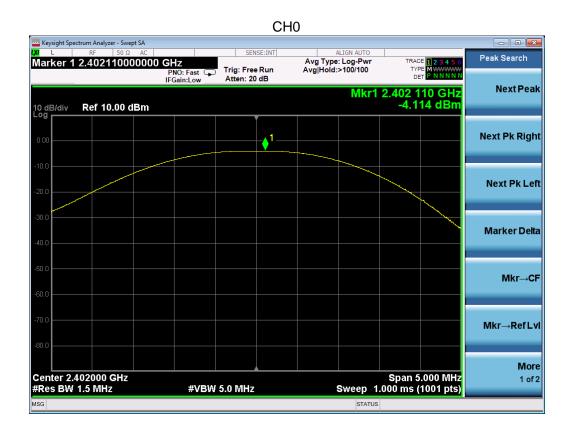







CH78





Page 14 of 62 Report No.: HK1811081525E

PEAK OUTPUT POWER MEASUREMENT RESULT FOR Π /4-DQPSK MODULATION				
Frequency Peak Power Applicable Limits (GHz) (dBm) Pass or Fail				
2.402	-3.012	30	Pass	
2.441	-2.879	30	Pass	
2.480	-3.519	30	Pass	










CH39

Report No.: HK1811081525E

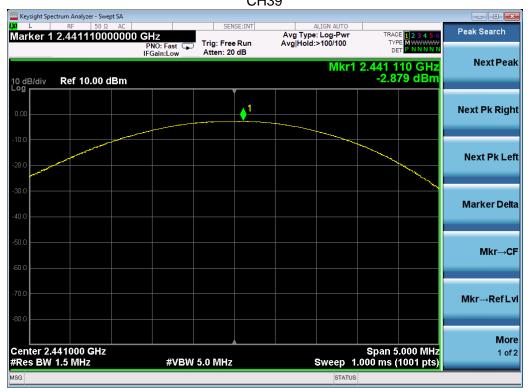





4. 20dB Bandwidth


4.1. Measurement Procedure

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
 The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
 bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak

Report No.: HK1811081525E

4. Set SPA Trace 1 Max hold, then View.

4.2. Test Set-Up (Block Diagram of Configuration)

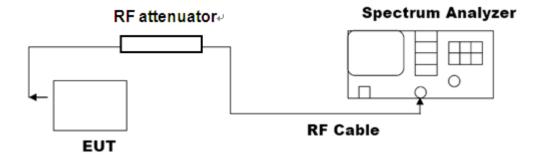



4.3. Limits and Measurement Results

MEASUREMENT RESULT FOR GFSK MOUDULATION							
Appliachle Limite	ılt						
Applicable Limits	Test Da	ta (MHz)	Criteria				
	Low Channel	0.9139	PASS				
N/A	Middle Channel	0.9913	PASS				
	High Channel	0.8554	PASS				

Report No.: HK1811081525E

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

Report No.: HK1811081525E



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





 MEASUREMENT RESULT FORΠ /4-DQPSK MODULATION

 Measurement Result

 Test Data (MHz)
 Criteria

 N/A
 Low Channel
 1.218
 PASS

 Middle Channel
 1.222
 PASS

 High Channel
 1.220
 PASS

Report No.: HK1811081525E

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL





TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

Report No.: HK1811081525E



TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL





5. Conducted Spurious Emission

5.1. Measurement Procedure

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic. RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

5.2. Test Set-Up (Block Diagram of Configuration)

The same as described in section 4.2

5.3. Limits and Measurement Result

LIMITS AND MEASUREMENT RESULT							
Applicable Limite	Measurement Result						
Applicable Limits	Test Data	Criteria					
In any 100 KHz Bandwidth Outside the	At least -20dBc than the limit						
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS					
intentional radiator is operating, the radio	Channel						
frequency power that is produce by the intentional							
radiator shall be at least 20 dB below that in							
100KHz bandwidth within the band that contains							
the highest level of the desired power.	At least -20dBc than the limit	D4.00					
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS					
restricted bands, as defined in §15.205(a), must							
also comply with the radiated emission limits							
specified in§15.209(a))							



TEST RESULT FOR ENTIRE FREQUENCY RANGE

Report No.: HK1811081525E


TEST PLOT OF OUT OF BAND EMISSIONS WITH THE WORST CASE OF GFSK MODULATION IN LOW CHANNEL





TEST PLOT OF OUT OF BAND EMISSIONS OF GFSK MODULATION IN MIDDLE CHANNEL

Report No.: HK1811081525E

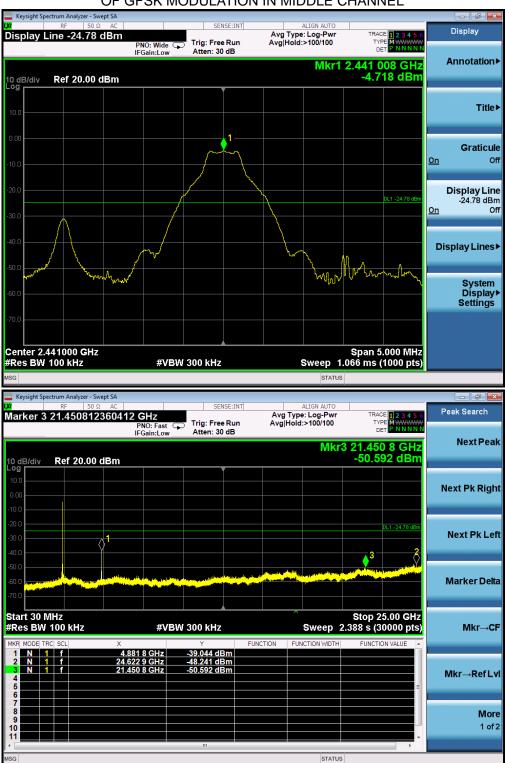






TEST PLOT OF OUT OF BAND EMISSIONS

Report No.: HK1811081525E

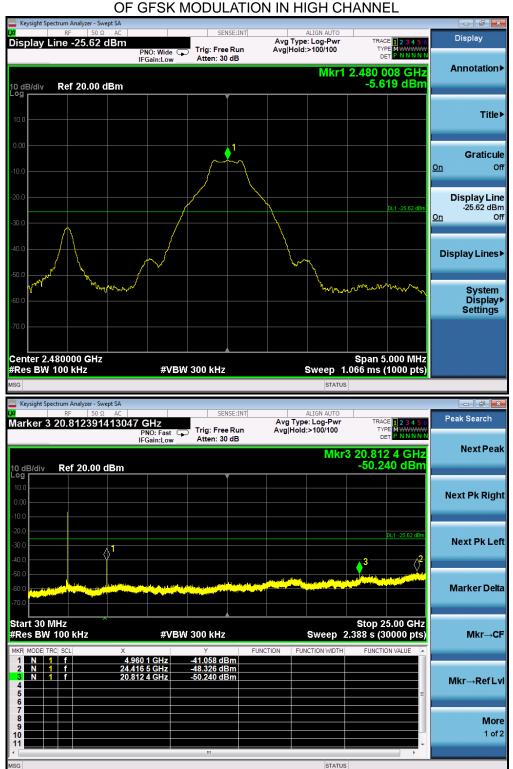

Note: The peak emissions without marker on the above plots are fundamental wave and need not to compare with the limit. The GFSK modulation is the worst case and only those data recorded in the report.




TEST RESULT FOR BAND EDGE


Report No.: HK1811081525E

GFSK MODULATION IN LOW CHANNEL

Hopping off

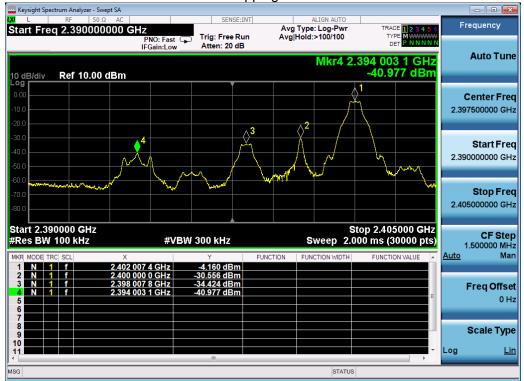




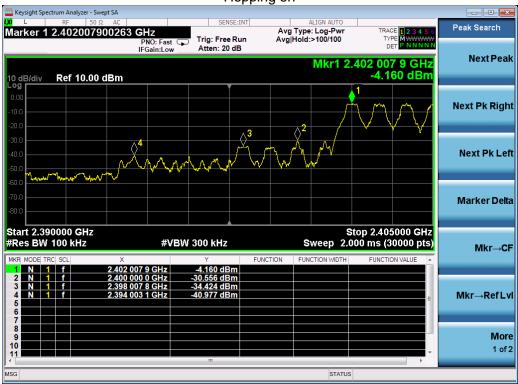




GFSK MODULATION IN HIGH CHANNEL

Hopping off

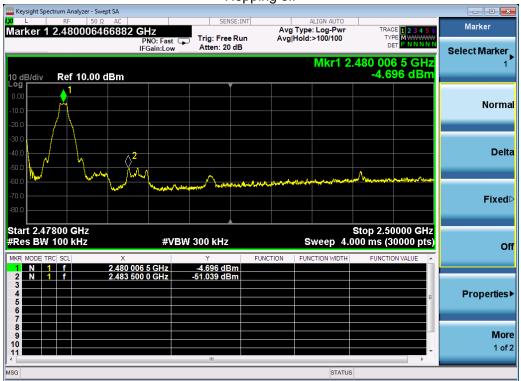

Hopping on

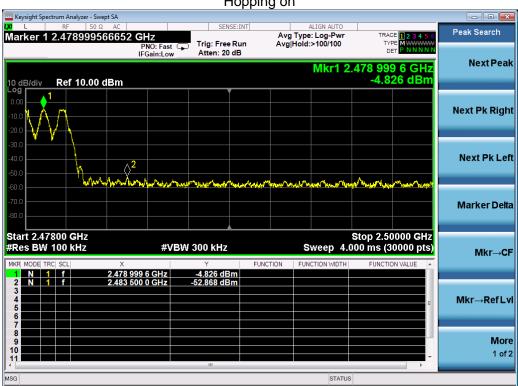



Mkr→RefLvl

More 1 of 2

π /4-DQPSK MODULATION IN LOW CHANNEL



Hopping on







Page 28 of 62 Report No.: HK1811081525E

π /4-DQPSK MODULATION IN HIGH CHANNEL



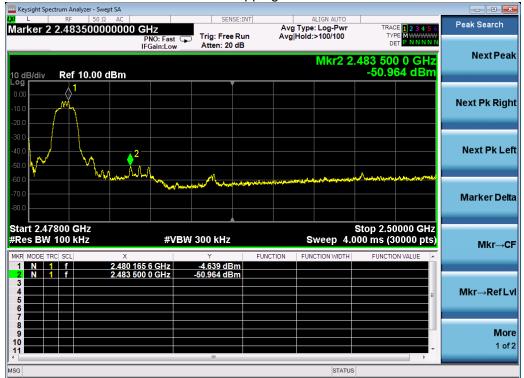

Hopping on

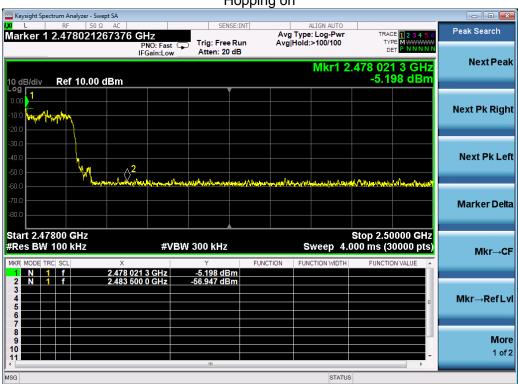



6. Radiated Emission

6.1. Measurement Procedure

1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.

Report No.: HK1811081525E

- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.




Page 30 of 62 Report No.: HK1811081525E

The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start ~Stop Frequency	1GHz~26.5GHz 1MHz/3MHz for Peak, 1MHz/10Hz for Average		

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP







6.2. Test Setup

Radiated Emission Test-Setup Frequency Below 30MHz


Report No.: HK1811081525E

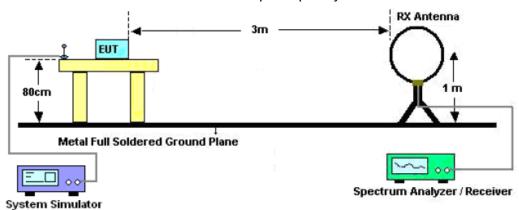


RADIATED EMISSION TEST SETUP 30MHz-1000MHz

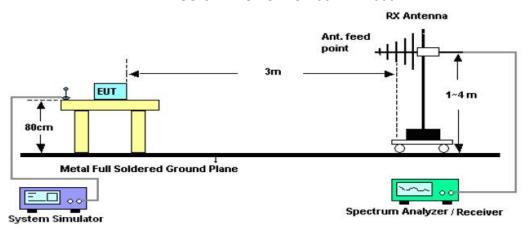

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

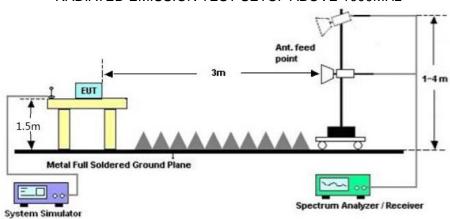





6.3. Limits and Measurement Result

15.209&RSS-GEN Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested For restricted band radiated emission,

the test records reported below are the worst result compared to other modes.

Page 33 of 62 Report No.: HK1811081525E

RADIATED EMISSION BELOW 30MHZ

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal




No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		143.1667	0.15	14.43	14.58	43.50	-28.92	QP			
2		468.1167	-0.02	20.79	20.77	46.00	-25.23	QP			
3		639.4833	0.87	23.82	24.69	46.00	-21.31	QP			
4		780.1333	1.33	27.05	28.38	46.00	-17.62	QP			
5	*	843.1833	1.48	27.31	28.79	46.00	-17.21	QP			
6		962.8167	1.25	29.88	31.13	54.00	-22.87	QP			



Page 34 of 62 Report No.: HK1811081525E

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

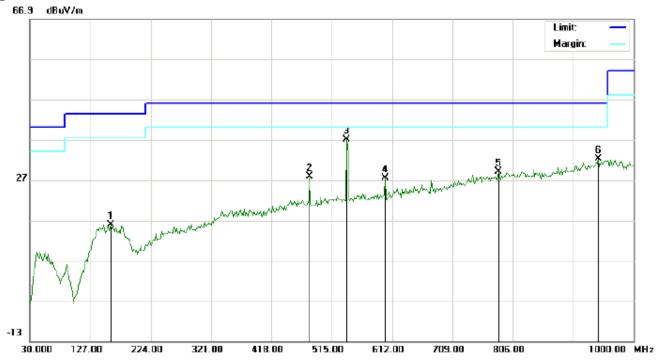

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height		Comment
	-	MHz	dBu∀	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		159.3333	0.55	15.33	15.88	43.50	-27.62	QP			
2		479.4333	6.88	20.91	27.79	46.00	-18.21	QP			
3	*	539.2500	14.78	22.19	36.97	46.00	-9.03	QP			
4		600.6833	4.75	22.75	27.50	46.00	-18.50	QP			
5		783.3667	1.93	27.09	29.02	46.00	-16.98	QP			
6		943.4167	2.39	29.82	32.21	46.00	-13.79	QP			

RESULT: PASS

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 4 is the worst case and recorded in the report.



Page 35 of 62 Report No.: HK1811081525E

RADIATED EMISSION ABOVE 1GHZ

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type			
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)				
4804.042	48.48	3.76	52.24	74.00	-21.76	peak			
4804.042	45.58	3.76	49.34	54.00	-4.66	AVG			
7206.063	40.25	8.17	48.42	74.00	-25.58	peak			
7206.063	36.37	8.17	44.54	54.00	-9.46	AVG			
Remark:									
Factor = Ar	Factor = Antenna Factor + Cable Loss – Pre-amplifier.								

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
4804.042	47.71	3.76	51.47	74.00	-22.53	peak	
4804.042	44.86	3.76	48.62	54.00	-5.38	AVG	
7206.063	39.65	8.17	47.82	74.00	-26.18	peak	
7206.063	35.48	8.17	43.65	54.00	-10.35	AVG	
Remark:							
Factor = A	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						





Paxton Bluetooth® Pairing EUT **Model Name** 100164-001B Speakers **Temperature** 25°C **Relative Humidity** 55.4% 960hPa **Test Voltage** Normal Voltage **Pressure Test Mode** Mode 2 **Antenna** Horizontal

Report No.: HK1811081525E

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)		
4882.042	48.69	3.78	52.47	74.00	-21.53	peak	
4882.042	44.73	3.78	48.51	54.00	-5.49	AVG	
7323.063	43.04	8.23	51.27	74.00	-22.73	peak	
7323.063	39.02	8.23	47.25	54.00	-6.75	AVG	
Remark:							
Factor = Ar	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type		
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)			
4882.042	47.84	3.78	51.62	74.00	-22.38	peak		
4882.042	43.88	3.78	47.66	54.00	-6.34	AVG		
7323.063	42.09	8.23	50.32	74.00	-23.68	peak		
7323.063 38.58 8.23 46.81 54.00 -7.19 AVG								
Remark:								
Factor = Ar	ntenna Factor +	Factor = Antenna Factor + Cable Loss – Pre-amplifier.						

Page 37 of 62 Report No.: HK1811081525E

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	
4960.042	48.61	3.81	52.42	74.00	-21.58	peak
4960.042	44.70	3.81	48.51	54.00	-5.49	AVG
7440.063	42.47	8.27	50.74	74.00	-23.26	peak
7440.063 38.81 8.27 47.08 54.00 -6.92 AVG						
Remark:						
Factor = Ar	ntenna Factor +	Cable Loss -	Pre-amplifier.			

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	, , ,
4960.042	48.08	3.81	51.89	74.00	-22.11	peak
4960.042	43.81	3.81	47.62	54.00	-6.38	AVG
7440.063	40.97	8.27	49.24	74.00	-24.76	peak
7440.063 38.25 8.27 46.52 54.00 -7.48 AVG						
Remark:						
Factor = Ar	ntenna Factor +	Cable Loss -	Pre-amplifier.			

RESULT: PASS

Note:

Other emissions from 1G to 25 GHz are considered as ambient noise. No recording in the test report.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The GFSK modulation is the worst case and recorded in the report.




Page 38 of 62 Report No.: HK1811081525E

TEST RESULT FOR RESTRICTED BANDS REQUIREMENTS

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal



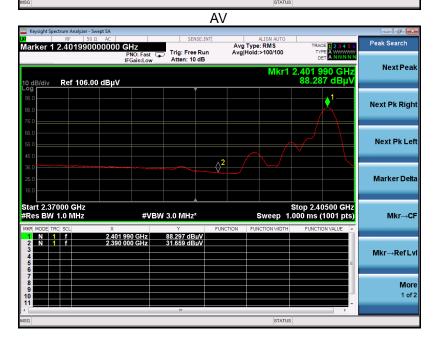




Page 39 of 62 Report No.: HK1811081525E

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical





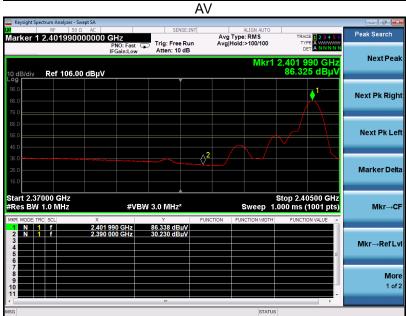



Page 40 of 62 Report No.: HK1811081525E

EUT	Paxton Bluetooth® Pairing Speakers	Model Name	100164-001B
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal





