

ANLEON S2


UHF Wireless IN-EAR Monitor System

INTRODUCTION

Thank you for your purchase of the ANLEON S2 Wireless IN-EAR Monitor System.

ANLEON S2 is an IEM system designed for stage performance and broadcasting. High S/N ratio and dynamic range ensures optimal audio quality. The dual XLR inputs allow 2-channel, mono or stereo operation with a convenient mix function which allows you to run two sources into the S2.

S2T UHF Stereo Transmitter

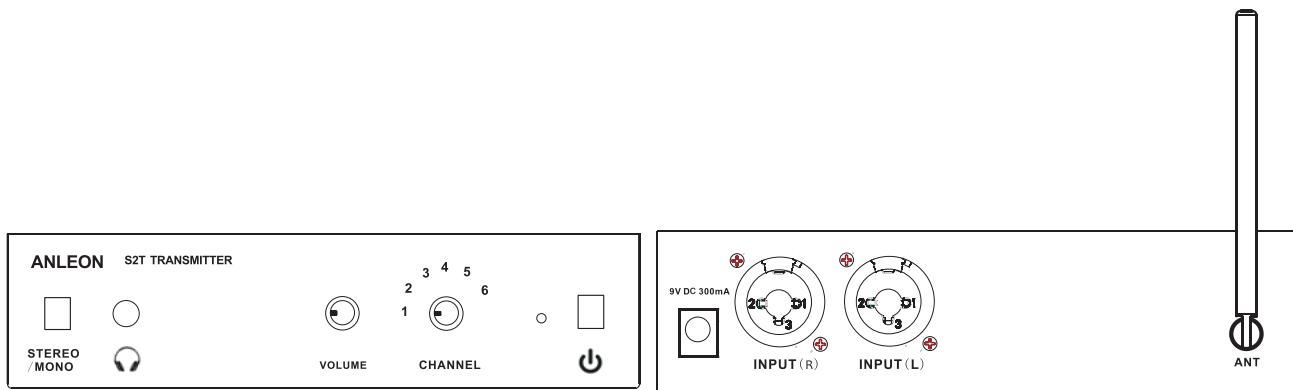

Stereo/Mono switch: Stereo mode (the device outputs the signal fed into the left input to the left headphone and the right signal to the right headphone). Mono mode (Channel L and channel R are mixed and output to both headphones.)

Power Switch: Switches the unit on and off.

XLR INPUTS (L) and (R): Dual XLR balanced jacks connect to the input signal source.

9V DC socket: Please use the included 9V 300mA adapter.

Headphone out: 3.5mm jack socket, monitoring the audio signal.

Headphone volume control (VOLUME): Adjusts level of monitor headphones; affects 3.5mm headphone jack only. Does not affect transmitter audio output.

S2R UHF Stereo Receiver

1, LCD screen: Displays frequency, channel and battery level.

2, Antenna: Receives RF signal from the transmitter.

3, Power indicator: Yellow indicates functioning battery and channel matched.

4, Earphone socket


5, Power and volume knob

6, Frequency adjustment button

7, Battery compartment

ANLEON S2

UHF Wireless IN-EAR Monitor System

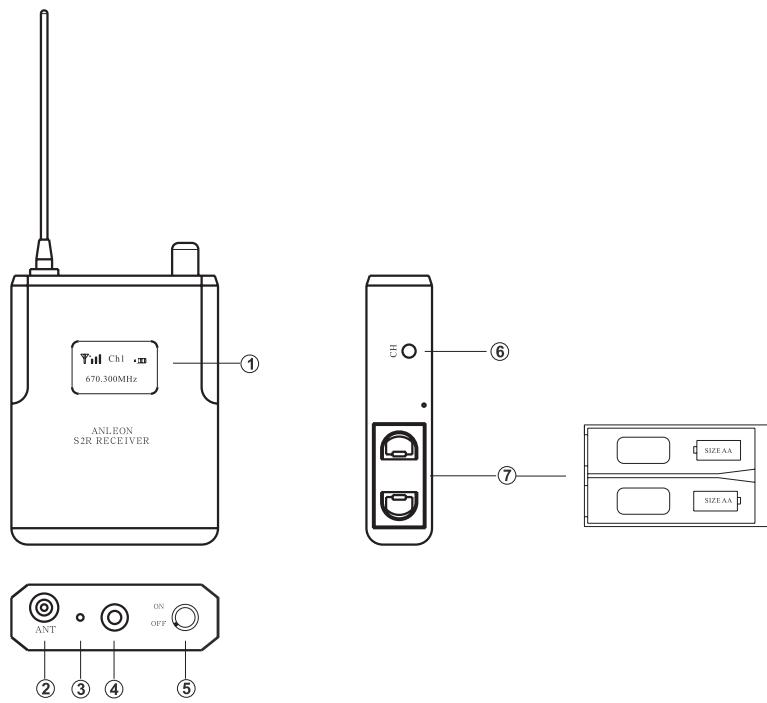

Specifications

RF frequency Range: 526-535MHz

Channel: 6

Headphone output: 3.5mm jack socket

Transmitter Power Supply: DC 9V/300mA

Receiver operating time: up to 12 hours, 2 x 1.5V AA (not included)

Operating Range: 80m(environment dependent)

RF Output Power: <10mW

Signal-to-noise ratio(1mv,peak deviation) typ.70 db(A)

Frequency Response: 20Hz~18KHz

Cautions

1. Using this system at excessive volumes can cause permanent hearing damage. Use as low volume as possible.
2. When not using this system for a long time, please take out the batteries.

Product Content

S2T Transmitter 1 pc

S2R Receiver 1 pc

Earphone 1 pc

DC 9V/300mA power adapter 1 pc

Application

Recording studio monitoring, on stage monitoring.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment