

Global United Technology Services Co., Ltd.

Report No.: GTS16000002E05

FCC Report

Distribuidora Sinn, S.A. de C.V. Applicant:

Lago Zurich No.219 Piso 12, Colonia Ampliacion Granada, Del. **Address of Applicant:**

Miguel Hidalgo, Mexico City, Mexico

Equipment Under Test (EUT)

3G Smartphone **Product Name:**

Model No.: R355 Trade mark: RINNO

FCC ID: 2AGTF-R355

Applicable standards: FCC CFR Title 47 Part 15 Subpart B:2014

January 05, 2016 Date of sample receipt:

Date of Test: January 06-11 2016

January 12, 2016 Date of report issue:

PASS * **Test Result:**

Authorized Signature:



Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

^{*} In the configuration tested, the EUT complied with the standards specified above.



2 Version

Version No.	Date	Description
00	January 12, 2016	Original

Prepared By:	Edward.pan	Date:	January 12, 2016
	Project Engineer		
Check By:	hank. yan	Date:	January 12, 2016
	Reviewer		



3 Contents

			Page
1	COV	/ER PAGE	1
2	VER	SION	2
3	CON	NTENTS	3
4	TES	T SUMMARY	4
5	GEN	IERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST MODE	
	5.4	TEST FACILITY	
	5.5	TEST LOCATION	
	5.6	DESCRIPTION OF SUPPORT UNITS	
	5.7	DEVIATION FROM STANDARDS	
	5.8 5.9	ABNORMALITIES FROM STANDARD CONDITIONS	
6	TES	T INSTRUMENTS LIST	7
7	TES	T RESULTS AND MEASUREMENT DATA	8
	7.1	CONDUCTED EMISSIONS	8
	7.2	RADIATED EMISSION	11
8	TES	T SETUP PHOTO	17
9	FUT	CONSTRUCTIONAL DETAILS	18



4 Test Summary

Test Item	Section in CFR 47	Result	
Conducted Emission	Part15.107	PASS	
Radiated Emissions	Part15.109	PASS	

PASS: The EUT complies with the essential requirements in the standard.

Remark: Test according to ANSI C63.4:2014

Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.



5 General Information

5.1 Client Information

Applicant:	Distribuidora Sinn, S.A. de C.V.
Address of Applicant:	Lago Zurich No.219 Piso 12, Colonia Ampliacion Granada, Del. Miguel Hidalgo, Mexico City, Mexico
Manufacturer:	New Explorer Telecom Co.Ltd
Address of Manufacturer:	Room 5B, 5 Floor, BLDG.1, Financial Base, No.8 Kefa Rd., Nanshan, Shenzhen, China

5.2 General Description of EUT

Product Name:	3G Smartphone
Model No.:	R355
Power supply:	Adapter Model No.: U0B2E0A050100 Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 1.0A or DC 3.7V Li-ion Battery

5.3 Test mode

Test mode:	
PC mode	Keep the EUT in exchanging data mode.
Video Playing mode	Keep the EUT in video plyaing mode.
REC mode	Keep the EUT in video recording mode.



5.4 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• FCC —Registration No.: 600491

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

• Industry Canada (IC) —Registration No.: 9079A-2

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.5 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480 Fax: 0755-27798960

5.6 Description of Support Units

Manufacturer	Description	Model	Serial Number
Apple	PC	A1278	C1MN99ERDTY3
DELL	KEYBOARD	SK-8115	N/A
DELL	MOUSE	MOC5UO	N/A
Emerson Network Power	USB Charger	A1299	N/A

5.7 Deviation from Standards

Biconical, log.per. antenna and horn antenna were used instead of dipole antenna. Semi-anechoic Chamber was used as alternation of open air test sites, and all test suites were performed with radiated method in it.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.

Global United Technology Services Co., Ltd.

No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



6 Test Instruments list

Radia	Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.0(L)*6.0(W)* 6.0(H)	GTS250	July. 03 2015	July. 02 2020	
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A	
3	ESU EMI Test Receiver	R&S	ESU26	GTS203	July. 03 2015	July. 02 2016	
4	BiConiLog Antenna	SCHWARZBECK	VULB9163	GTS214	July. 06 2015	July. 05 2016	
5	RF Amplifier	HP	8347A	GTS204	July. 03 2015	July. 02 2016	
6	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
7	Coaxial cable	GTS	N/A	GTS210	Jul. 05 2015	Jul. 04 2016	
8	Thermo meter	N/A	N/A	GTS256	July. 07 2015	July. 06 2016	
9	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016	

Con	Conducted Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Shielding Room	ZhongYu Electron	7.3(L)x3.1(W)x2.9(H)	GTS252	May. 16 2014	May. 15 2019	
2	EMI Test Receiver	R&S	ESCI 7	GTS552	April. 29 2015	April. 29 2016	
3	Pulse Limiter	R&S	ESH3-Z2	GTS224	July. 03 2015	July. 02 2016	
4	Coaxial Switch	ANRITSU CORP	MP59B	GTS225	July. 03 2015	July. 02 2016	
5	Artificial Mains Network	SCHWARZBECK MESS	NSLK8127	GTS226	July. 03 2015	July. 02 2016	
6	Coaxial Cable	GTS	N/A	GTS227	Jul. 05 2015	Jul. 04 2016	
7	EMI Test Software	AUDIX	E3	N/A	N/A	N/A	
8	Thermo meter	KTJ	TA328	GTS233	July. 07 2015	July. 06 2016	

Gen	General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)	
1	Barometer	ChangChun	DYM3	GTS257	July 07 2015	July 06 2016	



7 Test Results and Measurement Data

7.1 Conducted Emissions

Test Requirement:	FCC Part15 B Section 15.107						
Test Method:	ANSI C63.4:2014						
Test Frequency Range:	150KHz to 30MHz						
Class / Severity:	Class B						
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto						
Limit:	[[[] [] [] [] [] [] [] [] []	Limit (c	dBuV)				
	Frequency range (MHz)	Quasi-peak	Average				
	0.15-0.5	66 to 56*	56 to 46*				
	0.5-5 5-30	56	46				
	* Decreases with the logarithm	60	50				
Test setup:	Reference Plane	Tor the frequency.					
, and the second	AUX Equipment E.U.T EMI Receiver						
	Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Network Test table height=0.8m						
Test procedure:	The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.						
	 The peripheral devices are LISN that provides a 50ohn termination. (Please refer to photographs). 	n/50uH coupling imped	dance with 50ohm				
	3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4:2014 on conducted measurement.						
Test Instruments:	Refer to section 6 for details						
Test mode:	Pre-scan all modes in section 5.3, and found the PC mode which is the worst mode, so only the data of worst mode was show on the test report.						
Test results:	Pass						


Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960

Page 8 of 18



Measurement Data

Line:

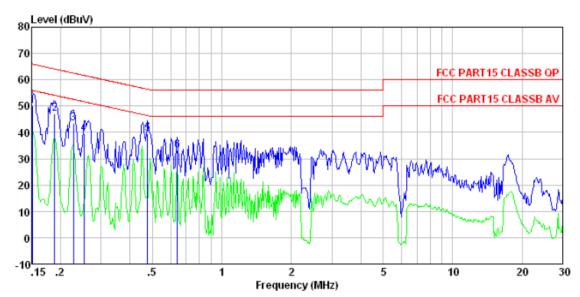


Condition : FCC PART15 CLASSB QP LISN-2013 LINE

Job No. : 0002 Test mode : PC mode Test Engineer: Arslan

	Freq	Read Level		LISN Factor				Remark
	MHz	dBu₹	dBu₹	dB	dB	dBuV	dB	
1 2 3 4 5 6	0. 188 0. 228 0. 253 0. 476	46. 74 43. 35 39. 31	47. 01 43. 59 39. 54 39. 35	0.12 0.12	0.13 0.12 0.11	64.11 62.52 61.64 56.41	-17.10 -18.93 -22.10 -17.06	QP QP QP QP



Neutral:

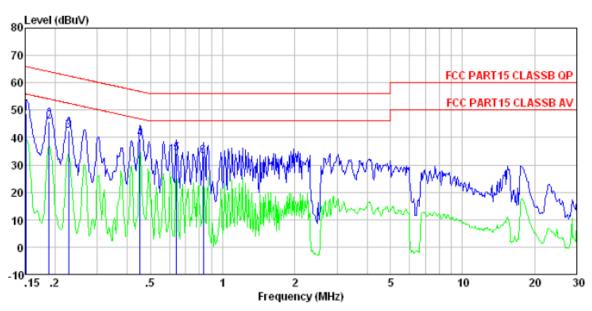

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 0002 Test mode : PC mode Test Engineer: Arslan

CSC	Freq	Read Level		LISN Factor				Remark
	MHz	dBu₹	dBu₹	dB	dB	dBuV	-dB	
1 2 3 4 5 6	0.152 0.188 0.228 0.452 0.641 0.830	45. 46 42. 33 39. 28 34. 09	42. 51 39. 45 34. 29	0.07 0.06 0.06 0.07	0.12 0.11	64.11 62.52 56.85 56.00	-18.45 -20.01 -17.40 -21.71	QP QP QP QP

Notes:

- 1. An initial pre-scan was performed on the line and neutral lines with peak detector.
- 2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
- 3. Final Level =Receiver Read level + LISN Factor + Cable Loss
- 4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.




7.2 Radiated Emission

 Naulateu Liilissioii							
Test Requirement:	FCC Part15 B Section 15.109						
Test Method:	ANSI C63.4:2014						
Test Frequency Range:	30MHz to 6GHz						
Test site:	Measurement D	istance: 3m	(Semi-Anecho	ic Chambe	r)		
Receiver setup:				1			
	Frequency	Detector	RBW k 120kHz	VBW	Remark		
	30MHz- 1GHz	Quasi-peal	300kHz	Quasi-peak Value			
	Above 1GHz	Peak Peak	1MHz 1MHz	3MHz 10Hz	Peak Value Average Value		
		reak	IIVIIIZ	ΙΟΠΖ	Average value		
Limit:	Frague	no./	Limit (dDu\/	/m @2m)	Remark		
	Freque	-	Limit (dBuV				
	30MHz-8		40.0		Quasi-peak Value		
	88MHz-216MHz 43.50				Quasi-peak Value		
	216MHz-9		46.0		Quasi-peak Value		
	960MHz-	-1GHz	54.0	0	Quasi-peak Value		
	Above 1	IGH ₇	54.0	0	Average Value		
	Above	TOTIZ	74.0	0	Peak Value		
Test Procedure:	 The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specific Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the 						
	limit specified EUT would b 10dB margin	d, then testing e reported. C would be re-	g could be sto Otherwise the	pped and the missions tl one using	ne peak values of the nat did not have peak, quasi-peak or		
Test setup:	Below 1GHz						
	-						

Page 11 of 18



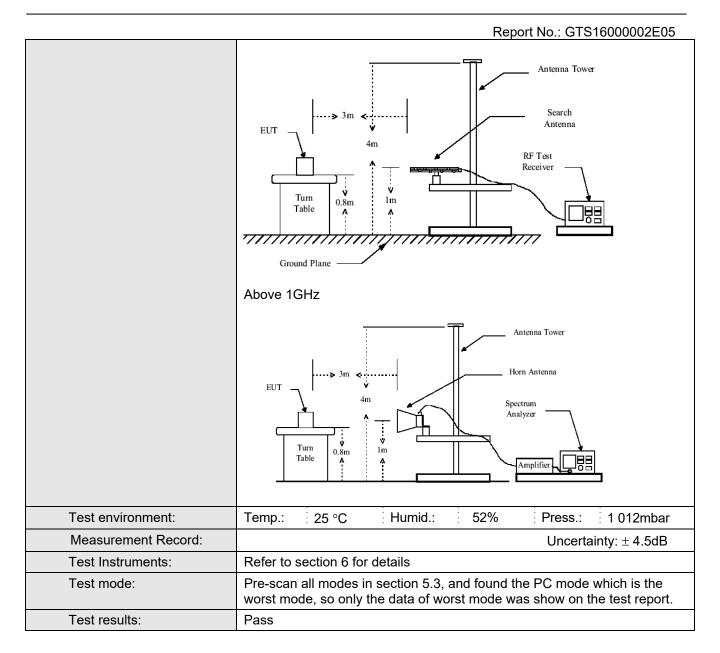

Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:


Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Measurement Data

Below 1GHz

Horizontal:

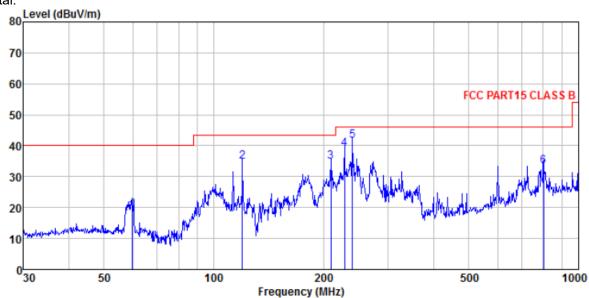


Condition : FCC PART15 CLASS B VULB9163-2013M HORIZONTAL

Job No. : 0002 Test Mode : PC mode Test Engineer: He

	ming allows.	110							
	Freq		Antenna Factor						Remark
	MHz	dBu∜	dB/m	dB	<u>dB</u>	dBuV/m	dBuV/m	dB	
1	59.649	33.34	14.73	0.86	29.92	19.01	40.00	-20.99	QP
2	119.856	50.54	12.48	1.36	29.57	34.81	43.50	-8.69	QP
3	209.313	49.47	12.87	1.89	29.29	34.94	43.50	-8.56	QP
4	228.490	52.95	13.57	2.01	29.47	39.06	46.00	-6.94	QP
5	239.987	54.98	14.09	2.07	29.56	41.58	46.00	-4.42	QP
6	801.786	36.07	22.06	4.46	29, 20	33, 39	46.00	-12.61	QΡ



Vertical:

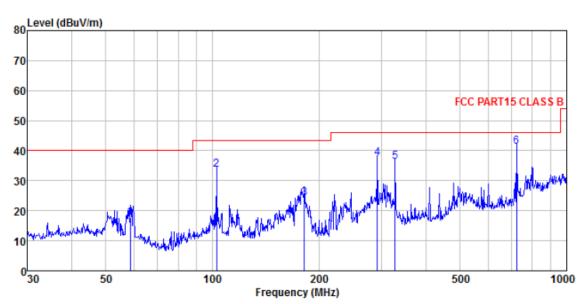

Condition : FCC PART15 CLASS B VULB9163-2013M VERTICAL

Job No. : 0002 Test Mode : PC mode Test Engineer: He


	Freq	Read	Antenna Factor						Remark
	MHz	dBu∜	<u>dB</u> /m	dB	<u>d</u> B	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3 4 5	58.613 102.719 181.920 292.058 327.887	47.11 39.79 50.18	11.84 14.89	1.22 1.75 2.32	29.27 29.95	33.57 24.11 37.44	43.50 43.50 46.00	-9.93 -19.39 -8.56	QP QP QP
6	721.726								

Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



Above 1GHz

Horizontal:

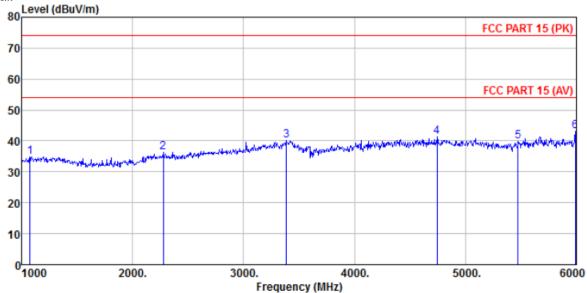

Condition : FCC PART 15 (PK) BBHA9120D ANT(>1GHZ) HORIZONTAL


Condition : FCC PAR Job No. : 0002 Test Mode : PC mode Test Engineer: He

	Freq		intenna Factor						Remark
	MHz	dBu∜	dB/m	dB	dB	dBuV/m	dBuV/m	<u>dB</u>	
1 2 3	1075.000 2275.000 3385.000	37.32	27.99	5.26	32.87 34.15 32.89	36.42	74.00	-37.58	Peak
4 5 6	4745.000 5475.000 5990.000	30.88		9.47	32.06 32.41 32.13	39.89	74.00	-34.11	Peak

Page 15 of 18



Vertical:

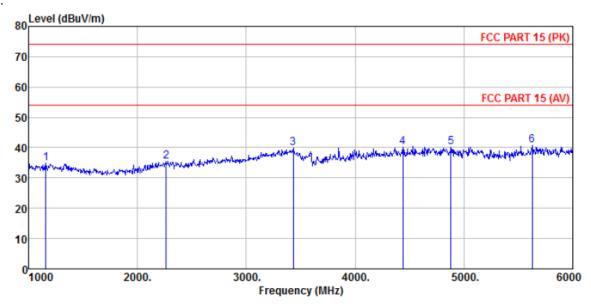

Condition : FCC PART 15 (PK) BBHA9120D ANT (>1GHZ) VERTICAL

Job No. : 0002 Test Mode : PC mode Test Engineer: He

MHz dBuV dB/m dB dBuV/m 1 1160.000 38.47 25.08 4.43 33.01 34.97 2 2265.000 36.31 28.01 5.25 34.17 35.40		
	m dBuV/m dB	
3 3430.000 37.02 28.72 6.82 32.83 39.73 4 4440.000 32.50 31.20 8.29 31.91 40.08 5 4880.000 31.85 31.85 8.66 32.12 40.24 6 5625.000 31.09 32.32 9.70 32.36 40.75	10 74.00 -38.60 73 74.00 -34.27 88 74.00 -33.92 24 74.00 -33.76	Peak Peak Peak Peak

Telephone: +86 (0) 755 2779 8480 Fax: +86 (0) 755 2779 8960



8 Test Setup Photo

Radiated Emission







Conducted Emission



9 EUT Constructional Details

Reference to the test report No. GTS16000002E01

----- end-----