

TEST REPORT

FCC ID: 2AGTFR455LTE

Product: MOBILE PHONE

Model No.: R455

Trade mark: RINNO

Report No.: TCT171019E006

Issued Date: Oct. 19, 2017

Issued for:

Distribuidora Sinn, S.A. de C.V.

Lago Zurich No.219 Piso 12 Colonia Ampliacion Granada, Del.Miguel
Hidalgo, Mexico City 11529

Issued By:

Shenzhen Tongce Testing Lab

1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China

TEL: +86-755-27673339 FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab This document may be altered or revised by Shenzhen Tongce Testing Lab personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1.	Test Certification	 	3
2.	Test Result Summary		4
3.	EUT Description		
4.	Test Methodology		6
	4.1. Decision of Final Test Mode	<u> </u>	6
	4.2. EUT System Operation	 	е
5.	Setup of Equipment under Test		7
	5.1. Description of Support Units	 <u>(C)</u>	7
	5.2. Configuration of System Under Test	 	7
6.	Facilities and Accreditations	 	8
	6.1. Facilities		
	6.2. Measurement Uncertainty	 	8
7.	Emission Test		
	7.1. Conducted Emission at Mains Terminals		
	7.2. Radiated Emission		13
8.	Photographs of Test Configuration	 	19
9.	Photographs of EUT		21



1. Test Certification

Product:	MOBILE PHONE
Model No.:	R455
Applicant:	Distribuidora Sinn, S.A. de C.V.
Address:	Lago Zurich No.219 Piso 12 Colonia Ampliacion Granada, Del.Miguel Hidalgo, Mexico City 11529
Manufacturer/ Factory:	Z-TECH COMMUNICATION(SZ)CO.,LTD
Address:	7/F BLK D BAO'AN ZHI'GU YIN'TIAN RD. NO.4 XI'XIANG ST' BAO'AN Shenzhen China
Test Voltage:	AC 120 V/ 60 Hz
Date of Test:	Jul. 04, 2017 ~ Jul. 06, 2017
Applicable Standards:	47 CFR FCC Part 15 Subpart B: 2016 ANSI C63.4: 2014

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:

Rleo

Check By:

Date: Jul. 06, 2017

Rleo

Date: Oct. 19, 2017

Joe Zhou

Tomsin

Date: Oct. 19, 2017

Page 3 of 30



2. Test Result Summary

Emission					
Test Method	Item	Result			
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass			
	Radiated Emission	Pass			

Note:

- 1. Pass: Test item meets the requirement.
- 2. Fail: Test item does not meet the requirement.
- 3. N/A: Test case does not apply to the test object.
- 4. The test result judgment is decided by the limit of test standard.
- 5. The information of measurement uncertainty is available upon the customer's request.



Page 4 of 30



3. EUT Description

Product Name:	MOBILE PHONE			
Model No.:	R455			
Power supply: Adaptador ca/cc Modelo: R455-A Entrada: AC 110-240V 50/60Hz 150mA Salida: DC 5V 800mA Or DC 3.7V 1700mAh 6.29Watt Ion de Litio				
AC Mains: Shielded Unshielded, Detachable Un-detachab Not applicable Length:				
DC Line: Shielded ☐Unshielded, ☐Detachable ☐Un-detaction ☐Not applicable ☐Length:				
Control Line:	☐Shielded ☐Unshielded, ☐Detachable ☐Un-detachable ☐Not applicable ☐Length:			



Page 5 of 30



4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereinafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode

Mode 1: Exchanging Data mode

Mode 2: Video Playing mode

Mode 3: Video Recording mode.

4.2. EUT System Operation

- 1. Set up EUT with the support equipments.
- 2. Make sure the EUT work normally during the test.



Page 6 of 30



5. Setup of Equipment under Test

5.1. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
PC	A1278	C1MN99ERDT Y3	1	Apple
KEYBOARD	SK-8115	N/A		DELL
MOUSE	MOC5UO	N/A	1	DELL
Notebook PC	2374	L3-G0686) 1	IBM Thinkpad

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

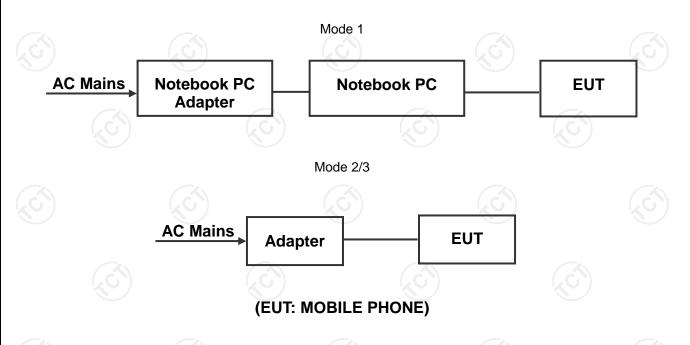



6. Facilities and Accreditations

6.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations: Test Firm Registration Number: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.


The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 32. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	±0.1℃
2.	Humidity	±1.0 %
3.	Spurious Emissions, Conducted	±2.56 dB
4.	All Emissions, Radiated	±4.28 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

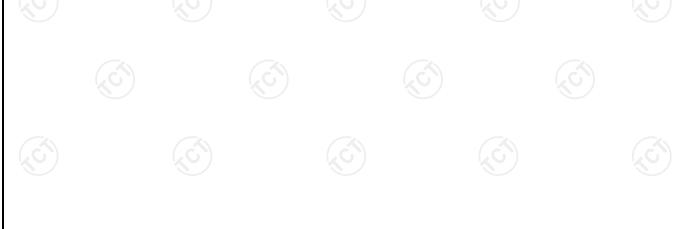



7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	ent: FCC 47 CFR Part 15 Subpart B	
Test Method:	ANSI C63.4: 2014	
Frequency Range:	150 kHz to 30 MHz	

7.1.2. Limits

Frequency	Class A	dB(uV)	Class	Class B dB(uV)		
(MHz)	Quasi-peak	Average	Quasi-peak	Average		
0.15 - 0.5	79	66	66 – 56 ^a	56 – 46ª		
0.50 - 5.0	73	60	56	46		
5.0 - 30.0	73	60	60	50		

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments

Conducted Emission Shielding Room Test Site (843)							
Equipment Manufacturer Model Serial Number Calibra							
EMI Test Receiver	R&S	ESCS30	100139	Sep. 27, 2018			
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018			

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN

Page 9 of 30



7.1.5. Block Diagram of Test Setup

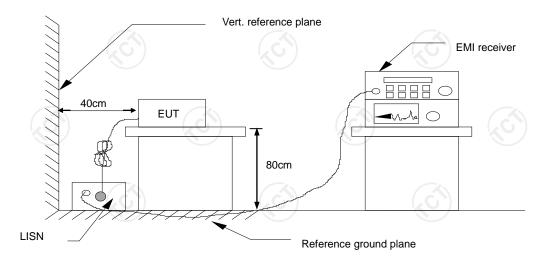

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 25 ℃ Humi	d.: 52 % Press.:	1012kPa
Test Mode:	Mode 1, Mode 2, Mode 3(tl	ne worst case show in th	is report)
Test Voltage:	AC 120 V/ 60 Hz		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level $(dB\mu V)$ = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement ($dB\mu V$) = Reading level ($dB\mu V$) + Corr. Factor (dB)

Limit ($dB\mu V$) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak AVG =average


* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.

Page 10 of 30



Please refer to following diagram for individual


Line

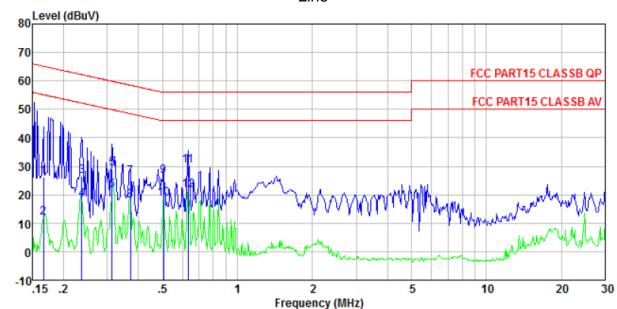

Freq MHz	Reading level dBuV	lISN/ISN factor dB	Cable loss dB	level dBuV	Limit level dBuV	Over limit dB	Remark
0. 166 0. 166 0. 237 0. 237 0. 313 0. 313 0. 371 0. 505 0. 505 0. 634 0. 634	25. 80 11. 22 25. 93 17. 75 28. 76 20. 96 25. 61 17. 54 26. 11 17. 99 29. 89 21. 12	0.42 0.42 0.44 0.44 0.44 0.42 0.42 0.38 0.38 0.30	0. 12 0. 12 0. 12 0. 12 0. 10 0. 10 0. 10 0. 10 0. 11 0. 11 0. 13 0. 13	26. 34 11. 76 26. 49 18. 31 29. 30 21. 50 26. 13 18. 06 26. 60 18. 48 30. 32 21. 55	65. 16 55. 16 62. 22 52. 22 59. 88 49. 88 58. 47 48. 47 56. 00 46. 00	-38.82 -43.40 -35.73 -33.91 -30.58 -28.38 -32.34 -30.41 -29.40 -27.52 -25.68 -24.45	QP Average





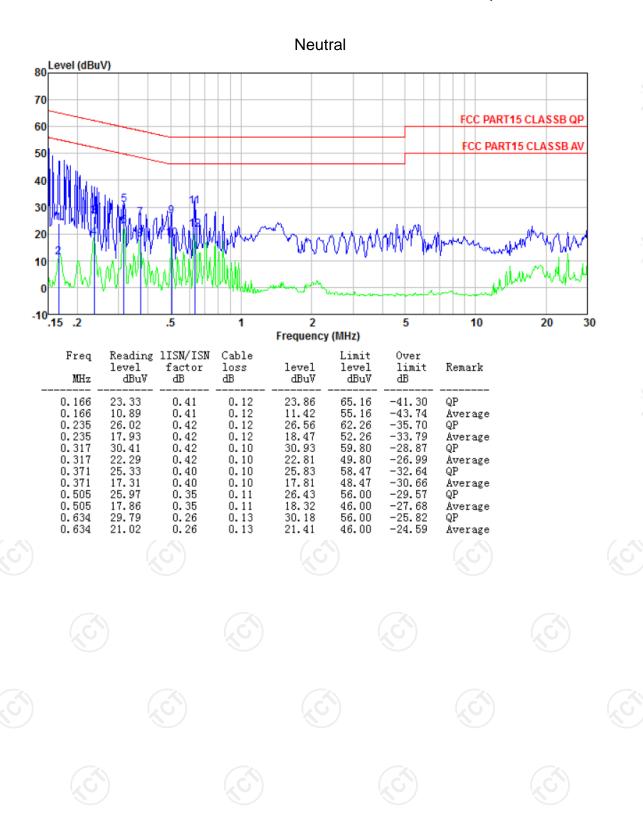



7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B		
Test Method:	ANSI C63.4: 2014		
Frequency Range:	30 MHz to 6000 MHz	(0)	
Measurement Distance:	3 m		
Antenna Polarization:	Horizontal & Vertical		

7.2.2. Limits

Fragues en (MILI-)	Class A (at 3m)	Class B (at 3m)		
Frequency (MHz)	dBuV/m	dBuV/m		
30 ~ 88	49.0	40.0		
88 ~ 216	53.5	43.5		
216 ~ 960	56.4	46.0		
960 ~ 1000	59.5	54.0		

Note:

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $dB(\mu V/m) = 20 \log Emission level (\mu V/m)$.

7.2.3. Test Instruments


Radiated Emission Test Site (966)								
Name of Equipment	Manufacturer	lanufacturer Model N		Calibration Due				
EMI Test Receiver	R&S	ESVD	100008	Sep. 27, 2018				
Spectrum Analyzer R&S		FSEM	848597-001	Sep. 27, 2018				
Amplifier	HP	8447D	2727A05017	Sep. 27, 2018				
Amplifier	EM	EM30265	07032613	Sep. 27, 2018				
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018				
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018				

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



7.2.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

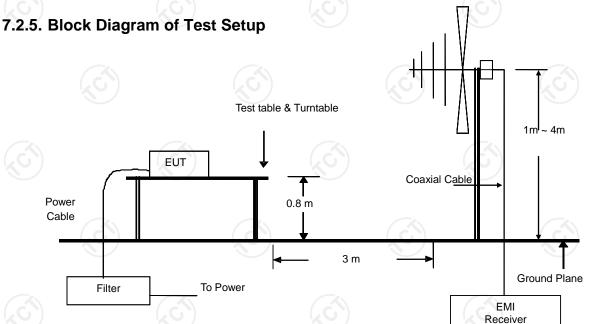

For the actual test configuration, please refer to the related item - Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.: 25 ℃ Humid.: 52 % Press.: 1012 kPa
Test Mode:	Mode 1, Mode 2, Mode 3(the worst case show in this report)
Test Voltage:	AC 120 V/ 60 Hz
Test Result:	Pass

Freq. = Emission frequency in MHz

Reading level (dBµV) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss-AMP factor

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dBµV) = Limit stated in standard

Margin (dB) = Measurement (dB μ V) – Limits (dB μ V))

Page 14 of 30


^{*} is meaning the worst frequency has been tested in the test frequency range



Please refer to following diagram for individual

Below 1GHz

Horizontal:

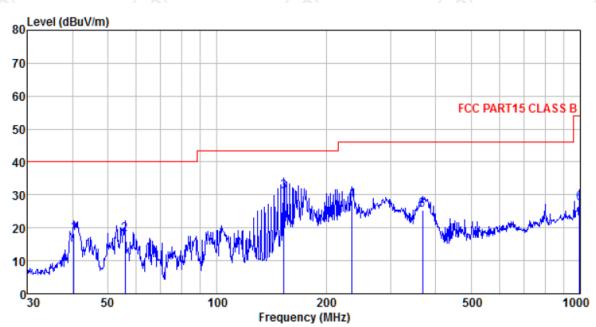


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
40.417	35.39	12.27	0.66	30.04	18.28	40.00	-21.72	QP
55.805	35.55	11.67	0.82	29.95	18.09	40.00	-21.91	QP
152.664	51.11	7.68	1.59	29.39	30.99	43.50	-12.51	QΡ
234.991	44.59	11.36	2.05	29.52	28.48	46.00	-17.52	QP
368.112	37.57	14.85	2.71	29.65	25.48	46.00	-20.52	QP
996.500	28.63	22.76	5.20	29.10	27.49	54.00	-26.51	QP





Vertical

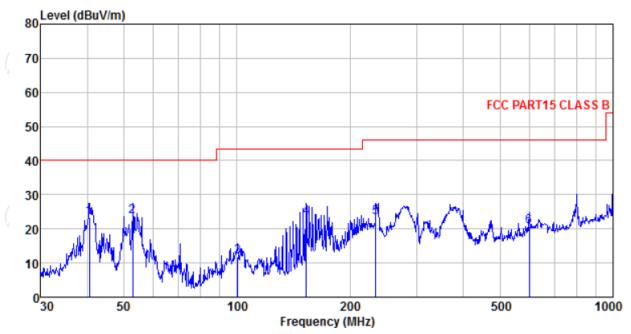


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
40.559	40.51	12.27	0.67	30.04	23.41	40.00	-16.59	QP
52.760	40.76	11.93	0.80	29.98	23.51	40.00	-16.49	QP
100.581	28.11	12.10	1.19	29.70	11.70	43.50	-31.80	QP
152.664	43.56	7.68	1.59	29.39	23.44	43.50	-20.06	QP
234.168	39.58	11.36	2.04	29.52	23.46	46.00	-22.54	QP
599.321	27.08	19.30	3.72	29.30	20.80	46.00	-25.20	QP





Above 1GHz

Horizontal

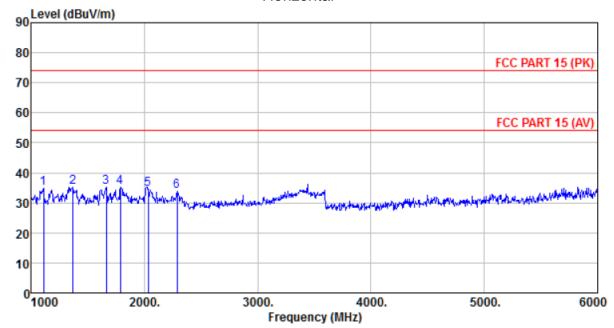


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1110.000	41.38	24.80	4.39	35. 86	34.71	74.00	-39. 29	Peak
1370.000	41.02	25.66	4.59	36. 02	35.25	74.00	-38. 75	Peak
1665.000	41.64	24.89	4.78	36. 20	35.11	74.00	-38. 89	Peak
1790.000	41.34	25.25	4.85	36. 27	35.17	74.00	-38. 83	Peak
2035.000	39.69	26.38	5.00	36. 43	34.64	74.00	-39. 36	Peak
2290.000	37.35	27.98	5.28	36. 63	33.98	74.00	-40. 02	Peak







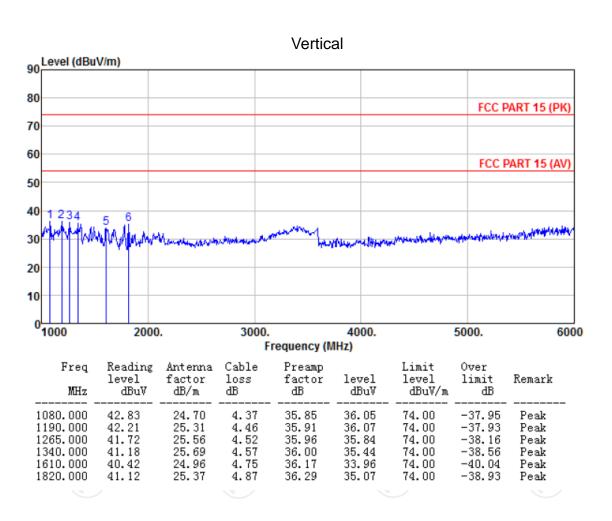






8. Photographs of Test Configuration








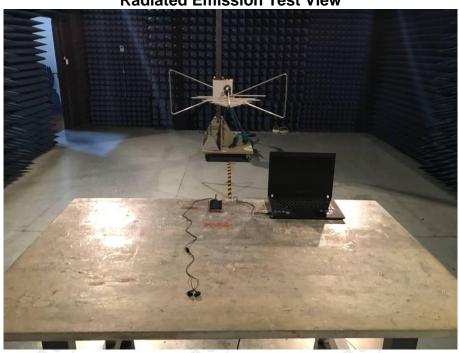

Page 19 of 30




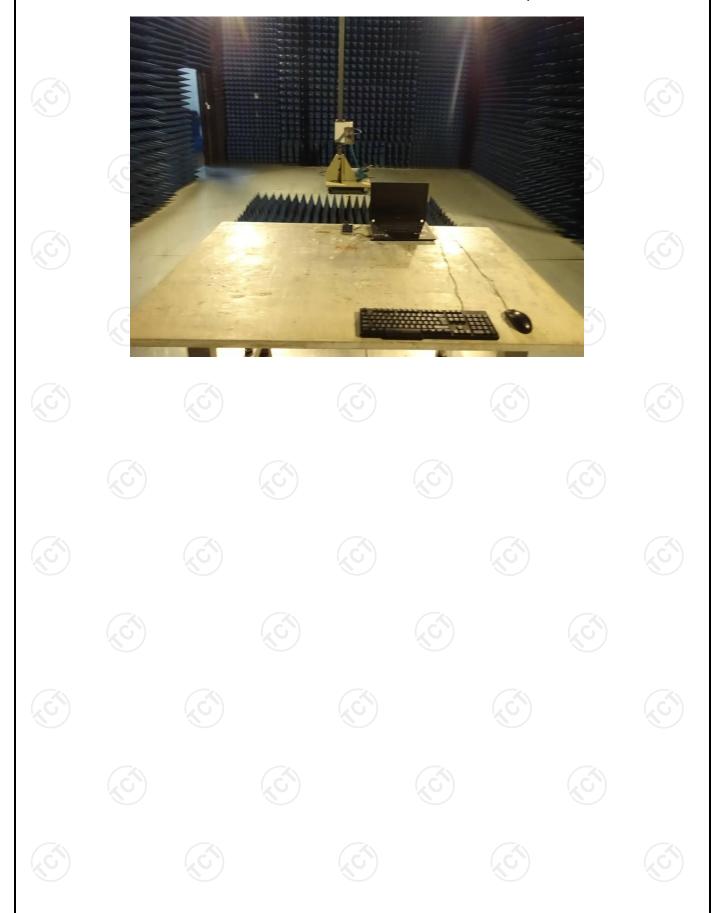



9. Photographs of EUT




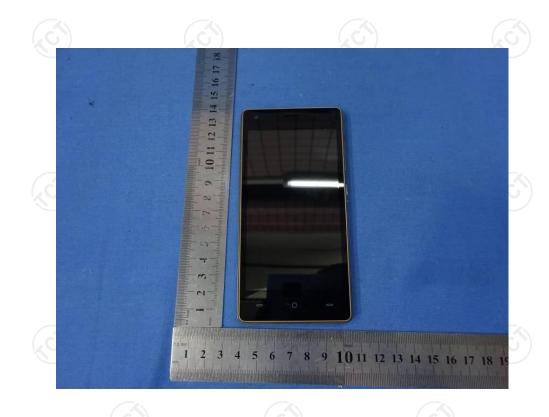

Page 21 of 30

TCT通测检测 TESTING CENTRE TECHNOLOGY



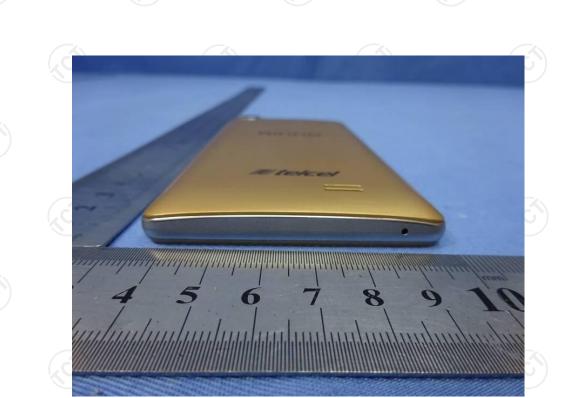

TCT通测检测 TESTING CENTRE TECHNOLOGY















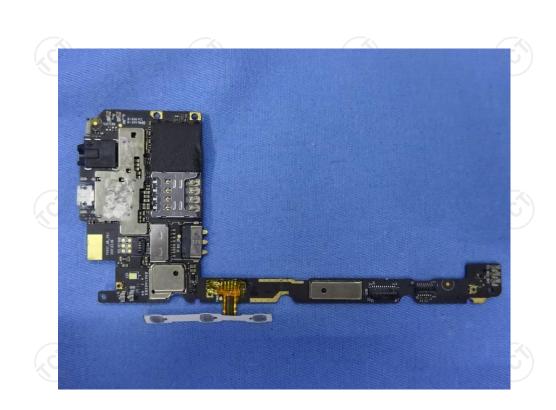

Page 25 of 30




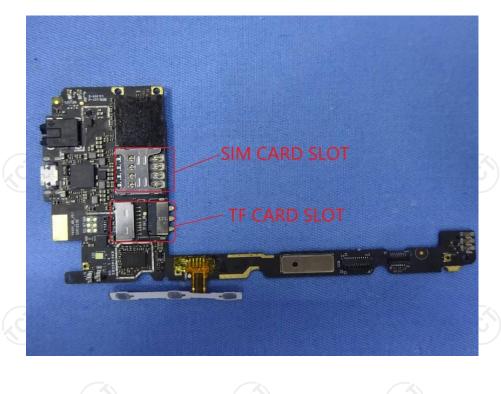









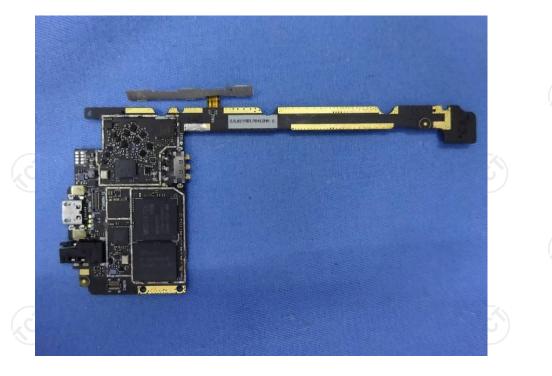

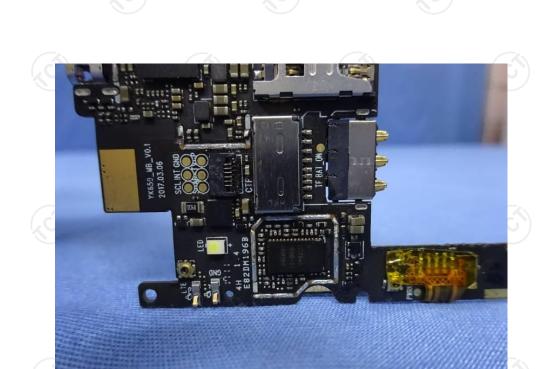


TCT通测检测 TESTING CENTRE TECHNOLOGY

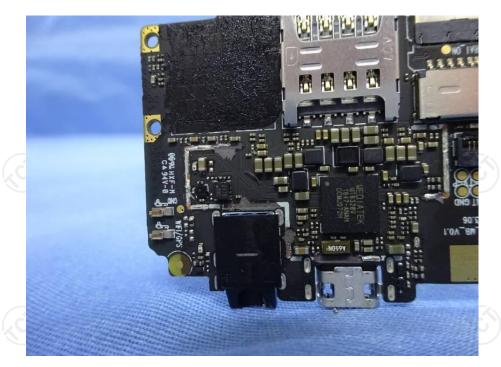



TCT通测检测 TESTING CENTRE TECHNOLOGY

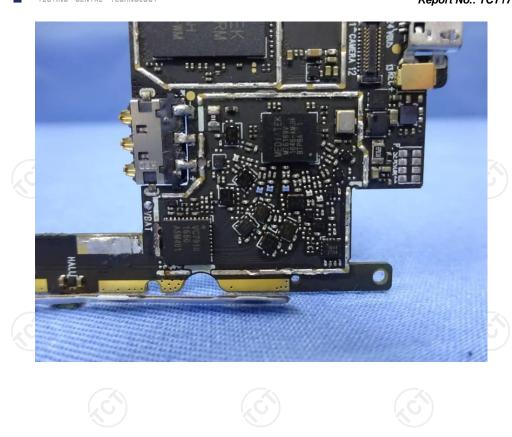









*****END OF REPORT****