

TEST REPORT

FCC ID: 2AGTFR550

Product: MOBILE PHONE

Model No.: R550

Trade mark: RINNO

Report No.: TCT171211E015

Issued Date: Dec. 05, 2017

Issued for:

Distribuidora Sinn, S.A. de C.V.

**Lago Zurich No.219 Piso 12 Colonia Ampliacion Granada, Del.Miguel
Hidalgo, Mexico City 11529**

Issued By:

Shenzhen Tongce Testing Lab.

**1B/F., Building 1, Yibaolai Industrial Park, Qiaotou, Fuyong, Baoan District,
Shenzhen, Guangdong, China**

TEL: +86-755-27673339

FAX: +86-755-27673332

Note: This report shall not be reproduced except in full, without the written approval of Shenzhen Tongce Testing Lab. This document may be altered or revised by Shenzhen Tongce Testing Lab. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.

TABLE OF CONTENTS

1. Test Certification	3
2. Test Result Summary.....	4
3. EUT Description.....	5
4. Test Methodology.....	6
4.1. Decision of Final Test Mode	6
4.2. EUT System Operation.....	6
5. Setup of Equipment under Test.....	7
5.1. Description of Support Units	7
5.2. Configuration of System Under Test	7
6. Facilities and Accreditations	8
6.1. Facilities.....	8
6.2. Measurement Uncertainty	8
7. Emission Test	9
7.1. Conducted Emission at Mains Terminals	9
7.2. Radiated Emission.....	13
8. Photographs of Test Configuration.....	20
9. Photographs of EUT.....	22

1. Test Certification

Product:	MOBILE PHONE
Model No.:	R550
Applicant:	Distribuidora Sinn, S.A. de C.V.
Address:	Lago Zurich No.219 Piso 12 Colonia Ampliacion Granada, Del.Miguel Hidalgo, Mexico City 11529
Manufacturer /Factory:	Z-TECH COMMUNICATION(SZ)CO.,LTD
Address:	7/F BLK D BAO'AN ZHI'GU YIN'TIAN RD. NO.4 XI'XIANG ST' BAO'AN Shenzhen China
Test Voltage:	DC 5V From Notebook PC
Date of Test:	Nov. 30, 2017-Dec. 04, 2017
Applicable Standards:	47 CFR FCC Part 15 Subpart B ANSI C63.4: 2014

The above equipment has been tested by Shenzhen Tongce Testing Lab and found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By:



Hanley

Date: Dec. 04, 2017

Check By:



Date: Dec. 05, 2017

Approved By:



Date: Dec. 05, 2017

2. Test Result Summary

Emission		
Test Method	Item	Result
FCC 47 CFR Part 15 Subpart B	Conducted Emission at Mains Terminals	Pass
	Radiated Emission	Pass

Note:

1. Pass: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.
5. The information of measurement uncertainty is available upon the customer's request.

3. EUT Description

Product Name:	MOBILE PHONE
Model No.:	R550
Power supply:	Adaptador ca/cc Modelo: R550-A Entrada: AC 100-260V , 50/60Hz, 200mA Salida: DC 5V, 1A Or DC 3.7V, 2500mAh, 9.25Watt Ion de Litio
AC Mains:	<input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded, <input type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> Length:
DC Line:	<input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded, <input type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> Length:
Control Line:	<input type="checkbox"/> Shielded <input type="checkbox"/> Unshielded, <input type="checkbox"/> Detachable <input type="checkbox"/> Un-detachable <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> Length:

4. Test Methodology

4.1. Decision of Final Test Mode

The EUT was tested together with the thereinafter additional components, and a configuration, which produced the worst emission levels, was selected and recorded in this report.

The following test mode(s) were assessed:

Test Mode
Mode 1: Exchanging data mode
Mode 2: Video Playing mode
Mode 3: Video recording mode.

4.2. EUT System Operation

1. Set up EUT with the support equipments.
2. Make sure the EUT work normally during the test.

5. Setup of Equipment under Test

5.1. Description of Support Units


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
KEYBOARD	SK-8115	N/A	/	DELL
MOUSE	MOC5UO	N/A	/	DELL
Notebook PC	2374	L3-G0686	/	IBM Thinkpad

Note:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

5.2. Configuration of System Under Test

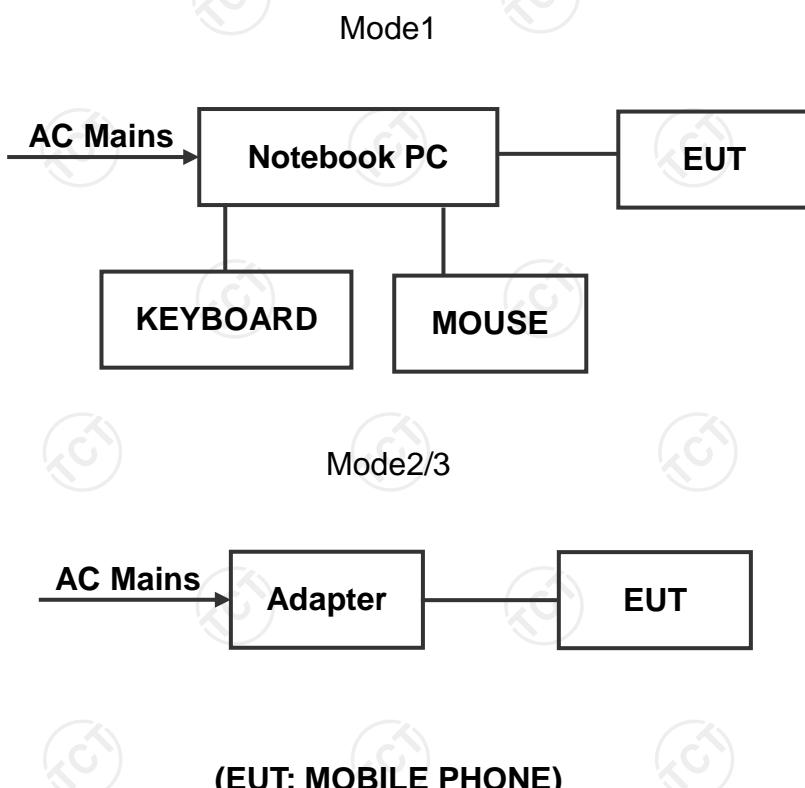

6. Facilities and Accreditations

6.1. Facilities

The test facility is recognized, certified, or accredited by the following organizations:

- FCC - Registration No.: 645098

Shenzhen Tongce Testing Lab

The 3m Semi-anechoic chamber has been registered and fully described in a report with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

- IC - Registration No.: 10668A-1

The 3m Semi-anechoic chamber of Shenzhen TCT Testing Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing

6.2. Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

No.	Item	MU
1.	Temperature	±0.1 °C
2.	Humidity	±1.0 %
3.	Spurious Emissions, Conducted	±2.56 dB
4.	All Emissions, Radiated	±4.28 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.

7. Emission Test

7.1. Conducted Emission at Mains Terminals

7.1.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	150 kHz to 30 MHz

7.1.2. Limits

Frequency (MHz)	Class B dB(uV)	
	Quasi-peak	Average
0.15 - 0.5	66 – 56 ^a	56 – 46 ^a
0.50 - 5.0	56	46
5.0 - 30.0	60	50

a. Decreases with the logarithm of the frequency

7.1.3. Test Instruments


Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESCS30	100139	Sep. 27, 2018
LISN	Schwarzbeck	NSLK 8126	8126453	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.1.4. Test Method

The AMN was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane. This distance was between the closest points of the AMN and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the AMN. All power was connected to the system through Artificial Mains Network (AMN). Conducted voltage measurements on mains lines were made at the output of the AMN

7.1.5. Block Diagram of Test Setup

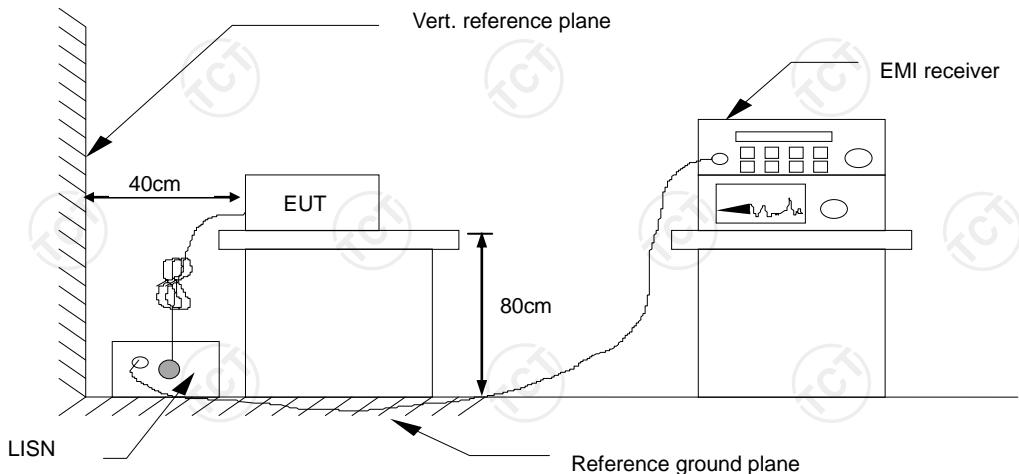

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7.1.6. Test Results

Test Environment:	Temp.: 25 °C	Humid.: 52 %	Press.: 1012mbar
Test Mode:	Mode 1		
Test Voltage:	DC 5V From Notebook PC		
Test Result:	Pass		

Note:

L1 = Live Line / N = Neutral Line

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Correct Factor (dB) = LISN factor + Cable loss

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

Q.P. =Quasi-Peak AVG =average

* is meaning the worst frequency has been tested in the frequency range 150 kHz to 30MHz.


Please refer to following diagram for individual

Line:

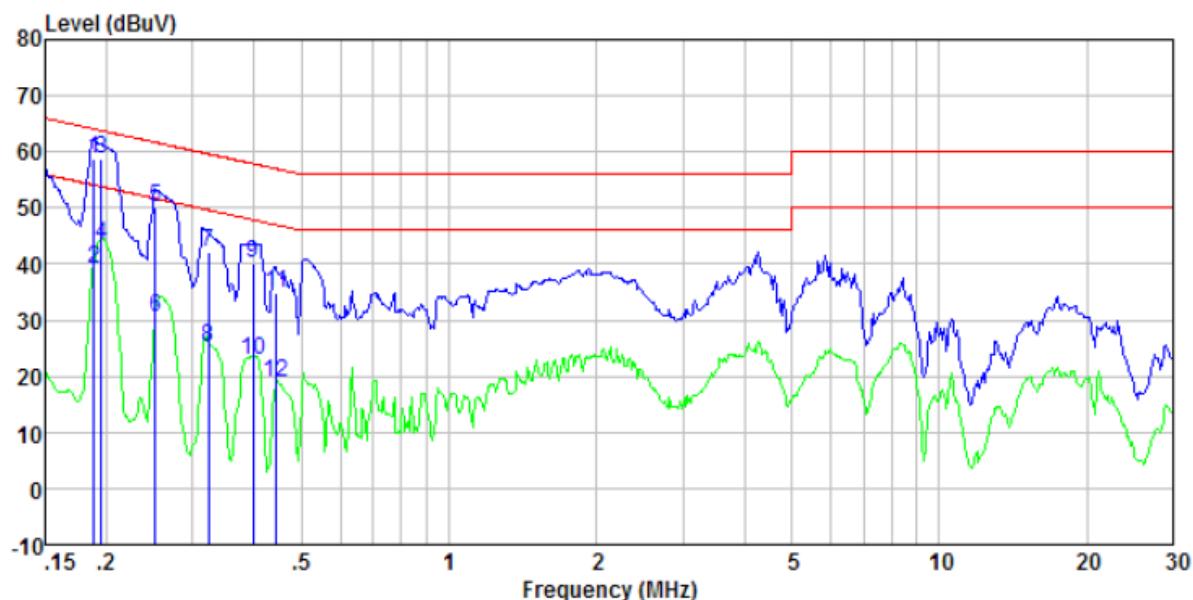

Freq MHz	Reading level dBuV	11SN/ISN factor dB	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.188	58.34	0.42	0.13	58.89	64.11	-5.22	QP
0.188	38.70	0.42	0.13	39.25	54.11	-14.86	Average
0.195	58.18	0.43	0.13	58.74	63.80	-5.06	QP
0.195	43.07	0.43	0.13	43.63	53.80	-10.17	Average
0.252	49.47	0.44	0.11	50.02	61.69	-11.67	QP
0.252	30.13	0.44	0.11	30.68	51.69	-21.01	Average
0.323	41.46	0.43	0.10	41.99	59.62	-17.63	QP
0.323	24.69	0.43	0.10	25.22	49.62	-24.40	Average
0.398	39.53	0.42	0.11	40.06	57.90	-17.84	QP
0.398	22.37	0.42	0.11	22.90	47.90	-25.00	Average
0.444	34.29	0.40	0.11	34.80	56.98	-22.18	QP
0.444	18.35	0.40	0.11	18.86	46.98	-28.12	Average

Neutral:

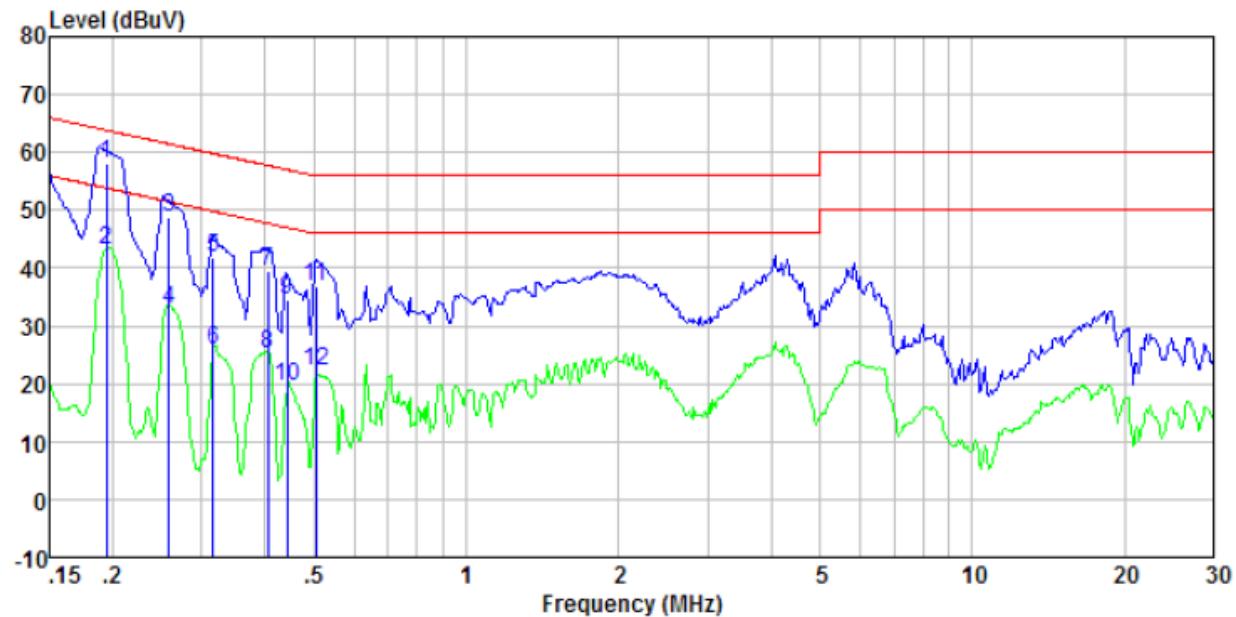

Freq MHz	Reading level dBuV	IISN/ISN factor dB	Cable loss dB	Level dBuV	Limit level dBuV	Over limit dB	Remark
0.194	57.56	0.43	0.13	58.12	63.84	-5.72	QP
0.194	42.49	0.43	0.13	43.05	53.84	-10.79	Average
0.259	48.20	0.44	0.11	48.75	61.47	-12.72	QP
0.259	32.39	0.44	0.11	32.94	51.47	-18.53	Average
0.317	41.16	0.44	0.10	41.70	59.80	-18.10	QP
0.317	25.32	0.44	0.10	25.86	49.80	-23.94	Average
0.406	38.88	0.41	0.11	39.40	57.73	-18.33	QP
0.406	24.72	0.41	0.11	25.24	47.73	-22.49	Average
0.442	33.89	0.40	0.11	34.40	57.02	-22.62	QP
0.442	18.97	0.40	0.11	19.48	47.02	-27.54	Average
0.505	36.18	0.38	0.11	36.67	56.00	-19.33	QP
0.505	21.58	0.38	0.11	22.07	46.00	-23.93	Average

7.2. Radiated Emission

7.2.1. Test Specification

Test Requirement:	FCC 47 CFR Part 15 Subpart B
Test Method:	ANSI C63.4: 2014
Frequency Range:	30 MHz to 6000 MHz
Measurement Distance:	3 m
Antenna Polarization:	Horizontal & Vertical

7.2.2. Limits

Below 1 GHz

Frequency (MHz)	Class B (at 3m)
	dBuV/m
30 ~ 88	40.0
88 ~ 216	43.5
216 ~ 960	46.0
960 ~ 1000	54.0

Above 1 GHz

Frequency (MHz)	Peak Value (at 3m)	Average (at 3m)
	dBuV/m	dBuV/m
Above 1GHz	74.0	54.0

Note:

1. The lower limit shall apply at the transition frequencies.
2. Emission level $\text{dB}(\mu\text{V}/\text{m}) = 20 \log \text{Emission level } (\mu\text{V}/\text{m})$.

7.2.3. Test Instruments


Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
EMI Test Receiver	R&S	ESVD	100008	Sep. 27, 2018
Spectrum Analyzer	R&S	FSEM	848597-001	Sep. 27, 2018
Amplifier	HP	8447D	2727A05017	Sep. 27, 2018
Amplifier	EM	EM30265	07032613	Sep. 27, 2018
Broadband Antenna	Schwarzbeck	VULB9163	340	Sep. 27, 2018
Horn Antenna	Schwarzbeck	BBHA 9120D	631	Sep. 27, 2018

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

7.2.4. Test Method

Measurements were made in a 3-meter semi-anechoic chamber or Open Area Test Site that complies to CISPR 16. Preliminary (peak) measurements were performed at an antenna to EUT separation distance of 3 meter. The EUT was rotated 360° about its azimuth with the receive antenna located at various heights in horizontal and vertical polarities. Final measurements (quasi-peak) were then performed by rotating the EUT 360° and adjusting the receive antenna height from 1 to 4 m. All frequencies were investigated in both horizontal and vertical antenna polarity, where applicable. Block Diagram of Test Setup.

7.2.5. Block Diagram of Test Setup

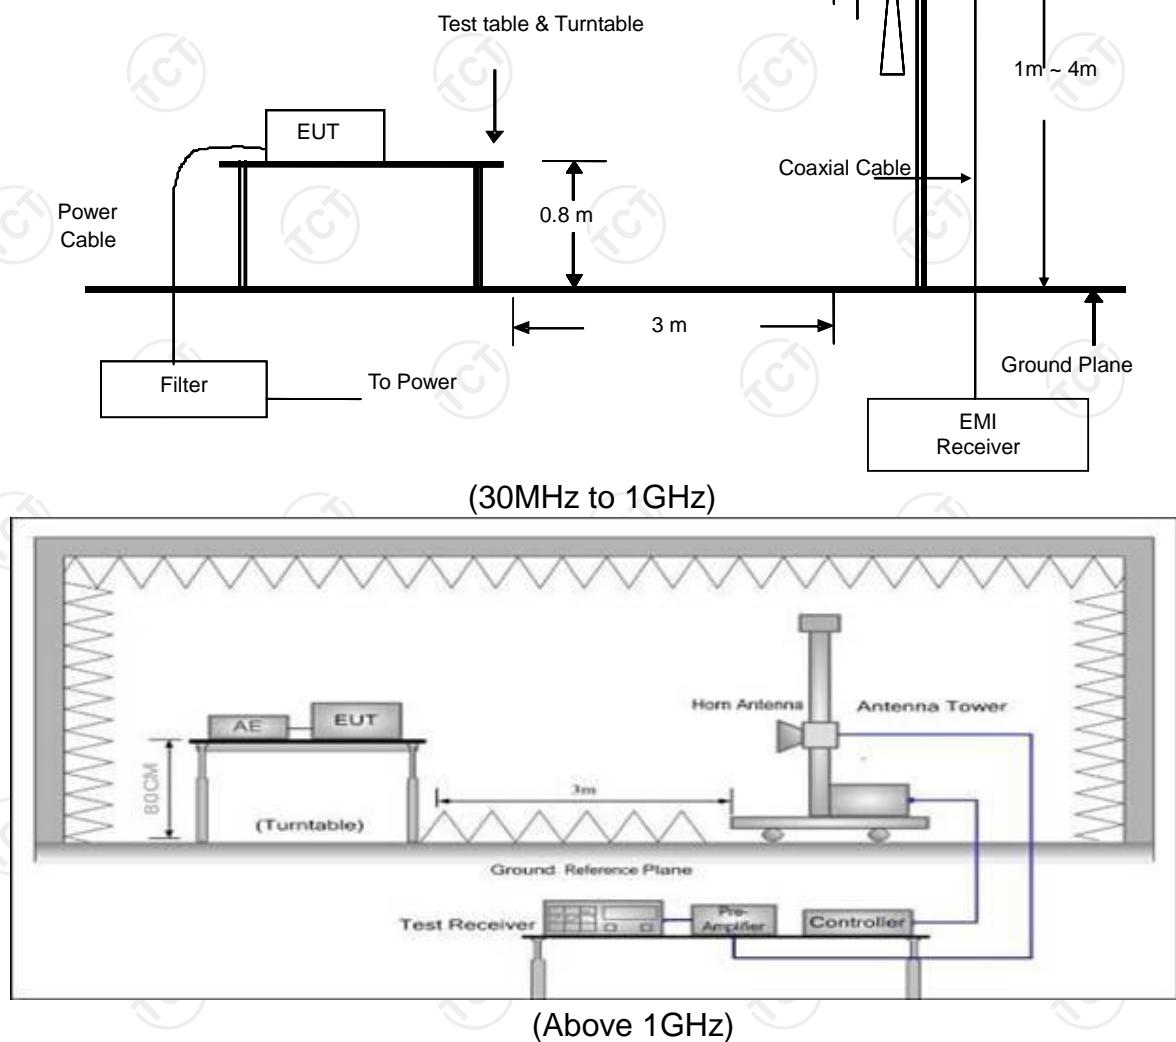

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration

7.2.6. Test Results

Test Environment:	Temp.:	25 °C	Humid.:	52 %	Press.:	1012 mbar
Test Mode:	Mode 1					
Test Voltage:	DC 5V From Notebook PC					
Test Result:	Pass					

Freq. = Emission frequency in MHz

Reading level (dB μ V) = Receiver reading

Corr. Factor (dB) = Antenna factor + Cable loss-AMP factor

Measurement (dB μ V) = Reading level (dB μ V) + Corr. Factor (dB)

Limit (dB μ V) = Limit stated in standard


Margin (dB) = Measurement (dB μ V) – Limits (dB μ V)

* is meaning the worst frequency has been tested in the test frequency range

Please refer to following diagram for individual


Below 1GHz

Horizontal:

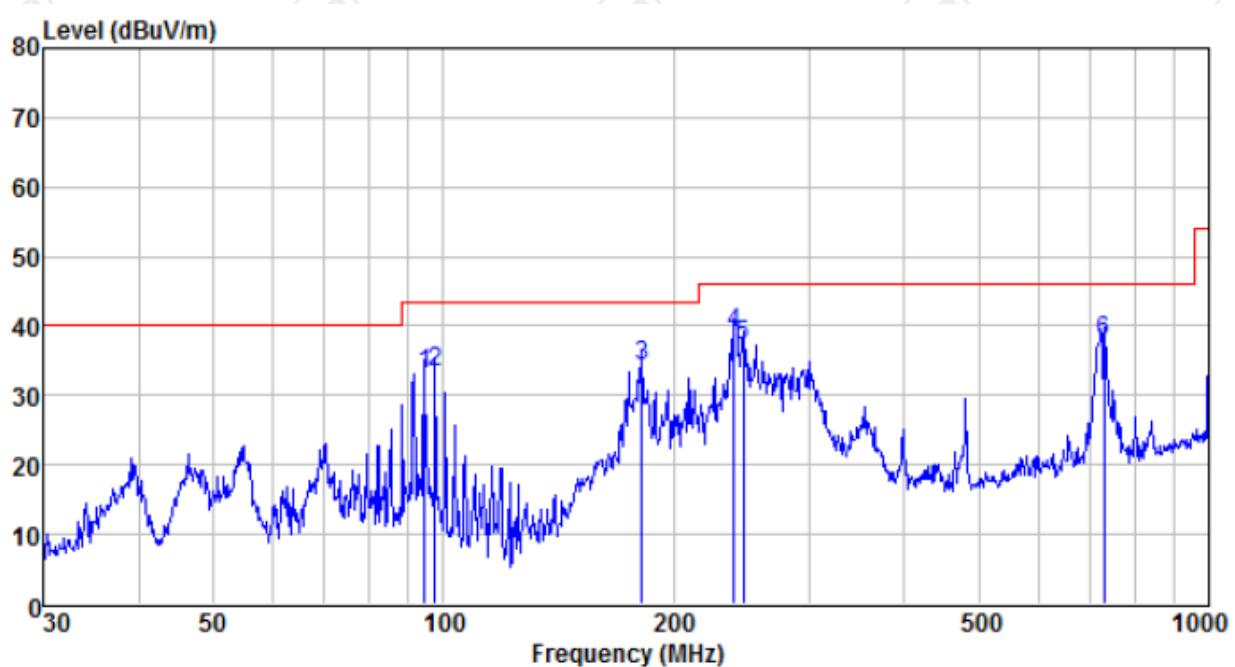


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
94.428	50.34	11.35	1.15	29.72	33.12	43.50	-10.38	QP
97.456	50.30	11.73	1.17	29.71	33.49	43.50	-10.01	QP
181.920	52.95	8.80	1.75	29.27	34.23	43.50	-9.27	QP
239.987	54.93	11.56	2.07	29.56	39.00	46.00	-7.00	QP
246.815	53.03	11.75	2.11	29.62	37.27	46.00	-8.73	QP
729.358	42.60	20.21	4.19	29.20	37.80	46.00	-8.20	QP

Vertical:

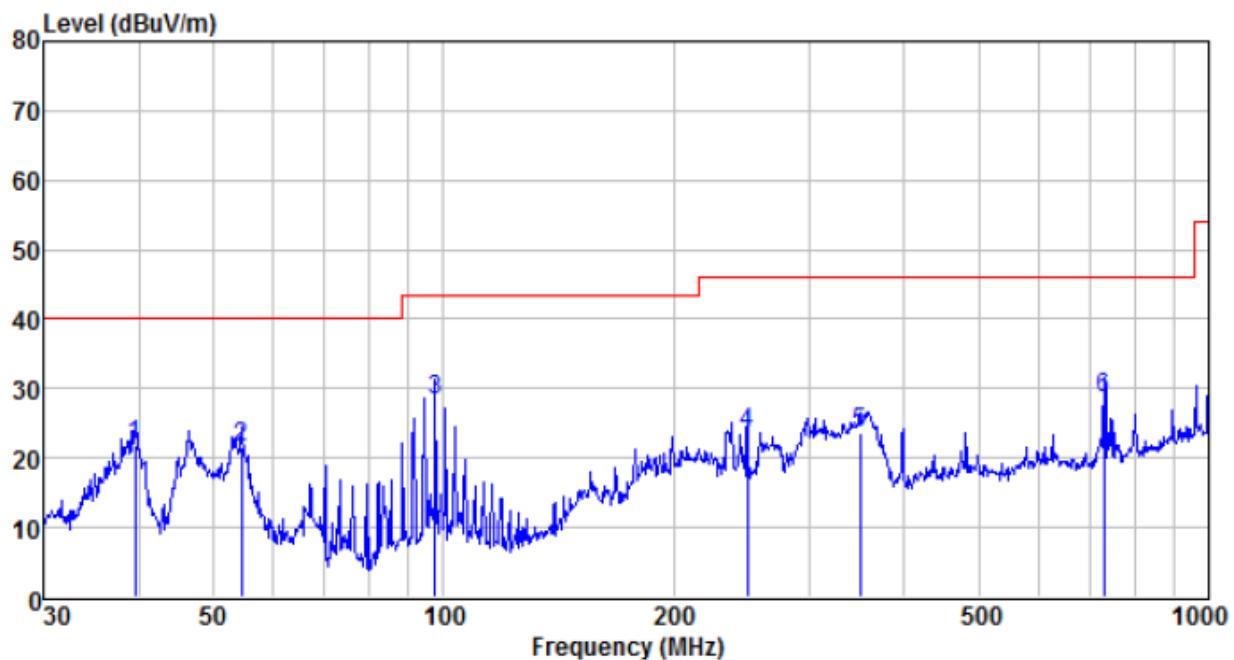


Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
39.576	38.87	12.30	0.66	30.05	21.78	40.00	-18.22	QP
54.452	38.73	11.93	0.81	29.96	21.51	40.00	-18.49	QP
97.456	45.07	11.73	1.17	29.71	28.26	43.50	-15.24	QP
249.425	39.18	11.85	2.12	29.64	23.51	46.00	-22.49	QP
350.477	36.26	14.50	2.62	29.73	23.65	46.00	-22.35	QP
729.358	33.35	20.21	4.19	29.20	28.55	46.00	-17.45	QP

Above 1GHz
Horizontal:

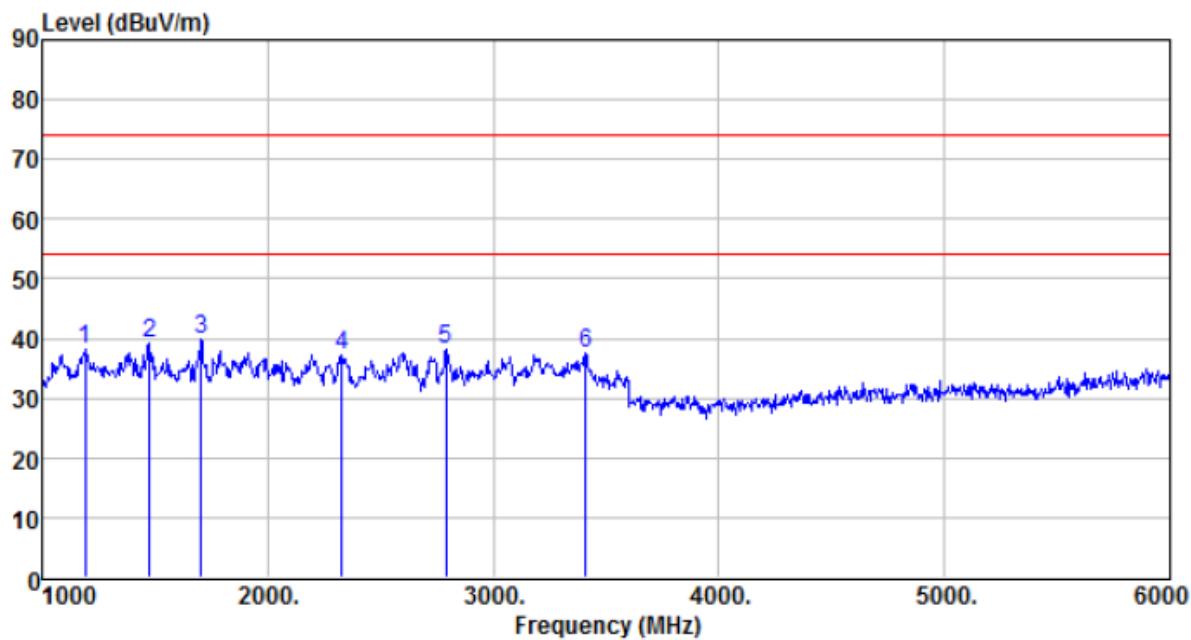

Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1190.000	44.38	25.31	4.46	35.91	38.24	74.00	-35.76	Peak
1475.000	45.32	25.28	4.66	36.08	39.18	74.00	-34.82	Peak
1705.000	46.28	24.99	4.81	36.22	39.86	74.00	-34.14	Peak
2330.000	40.65	27.80	5.32	36.66	37.11	74.00	-36.89	Peak
2790.000	41.16	28.40	5.75	37.02	38.29	74.00	-35.71	Peak
3410.000	39.33	28.64	6.78	37.32	37.43	74.00	-36.57	Peak

Vertical:

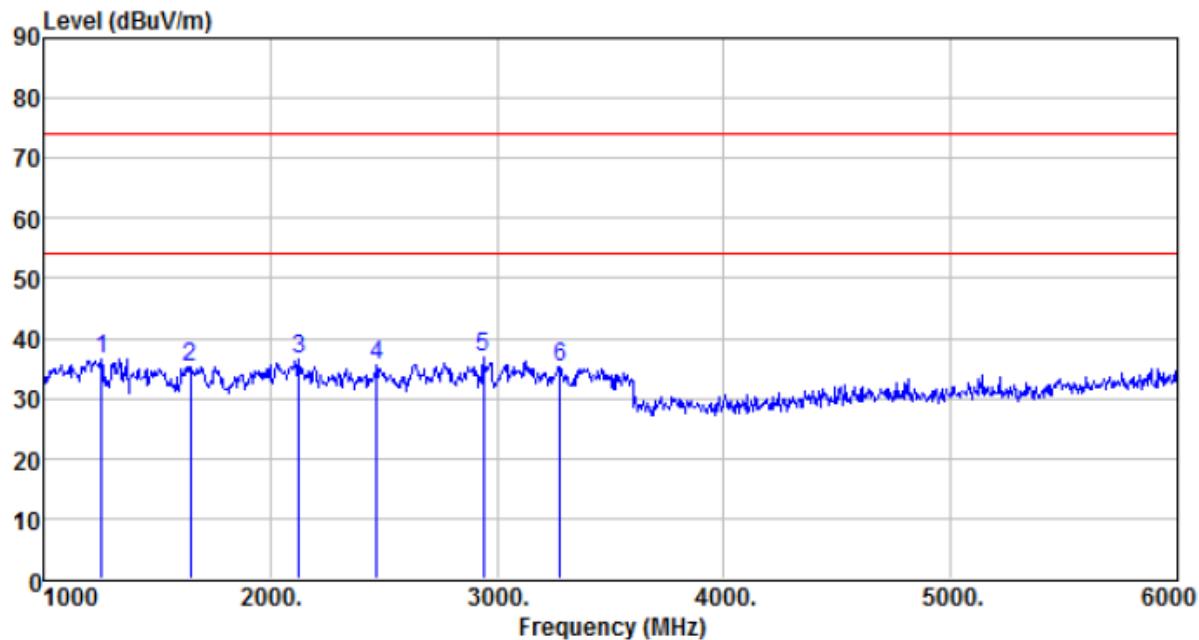



Freq MHz	Reading level dBuV	Antenna factor dB/m	Cable loss dB	Preamp factor dB	level dBuV	Limit level dBuV/m	Over limit dB	Remark
1255.000	42.29	25.54	4.51	35.95	36.39	74.00	-37.61	Peak
1650.000	41.73	24.86	4.77	36.19	35.17	74.00	-38.83	Peak
2125.000	40.57	27.24	5.10	36.49	36.42	74.00	-37.58	Peak
2470.000	39.35	27.50	5.46	36.77	35.54	74.00	-38.46	Peak
2940.000	39.70	28.43	5.87	37.15	36.85	74.00	-37.15	Peak
3280.000	37.48	28.41	6.52	37.28	35.13	74.00	-38.87	Peak

8. Photographs of Test Configuration

Conducted Emission Test View




Radiated Emission Test View

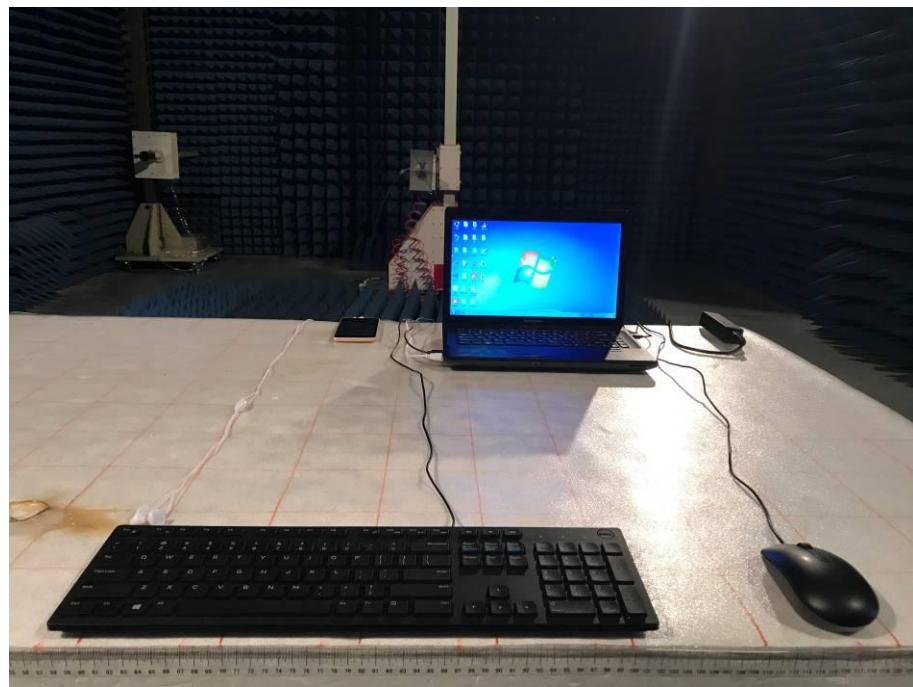
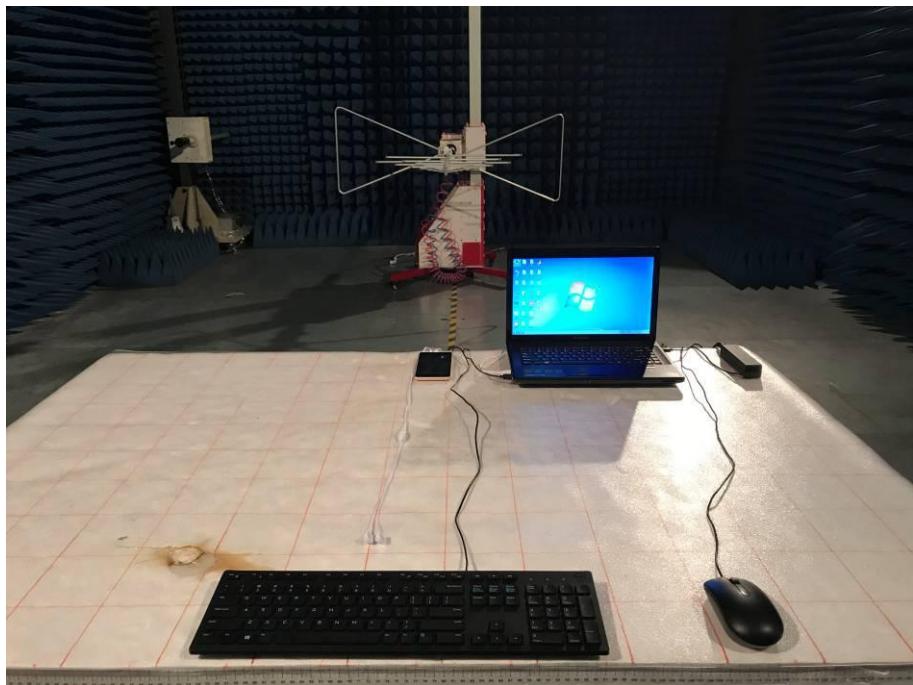




9. Photographs of EUT








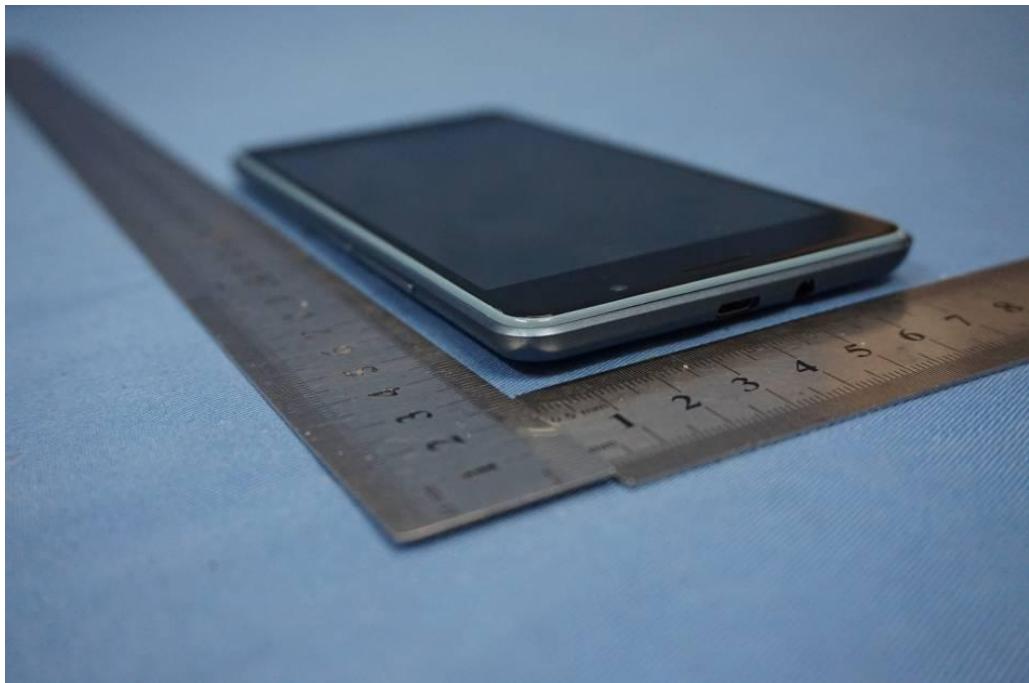

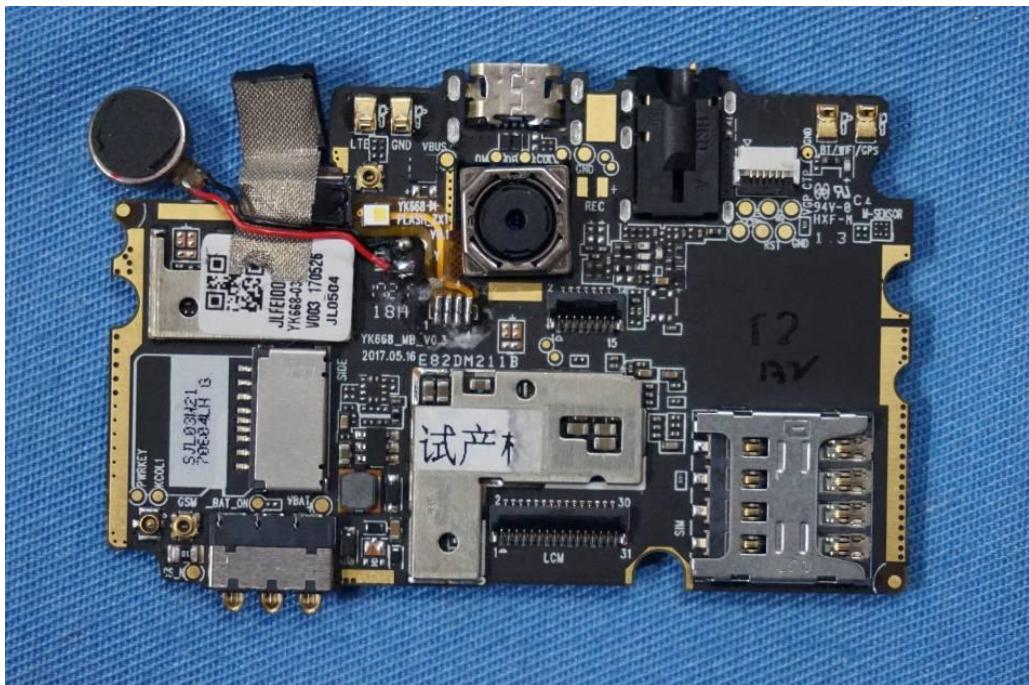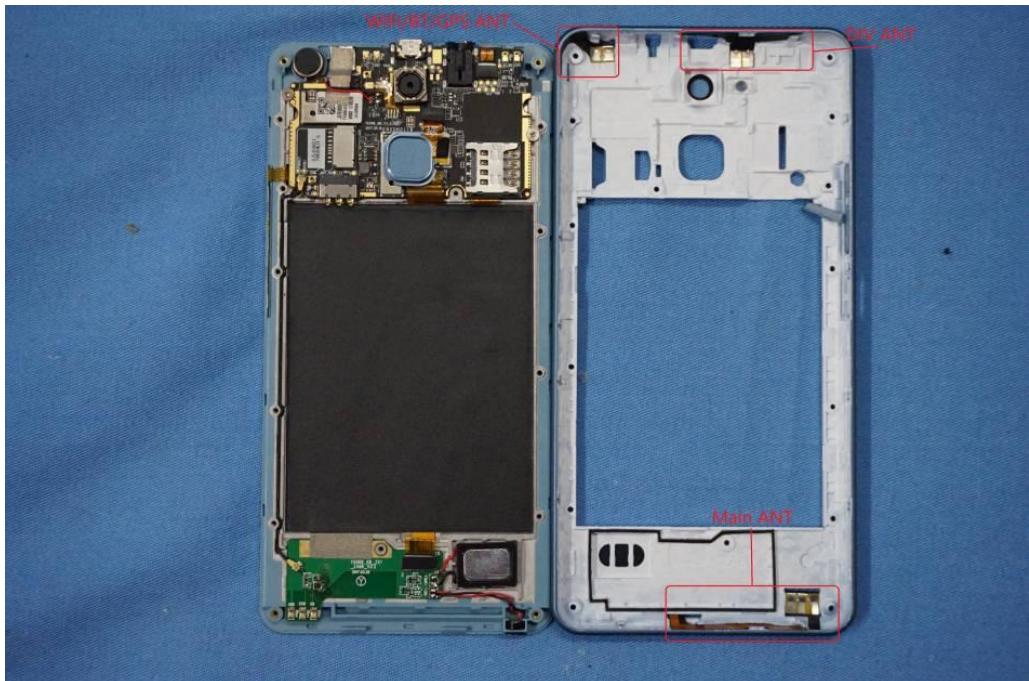

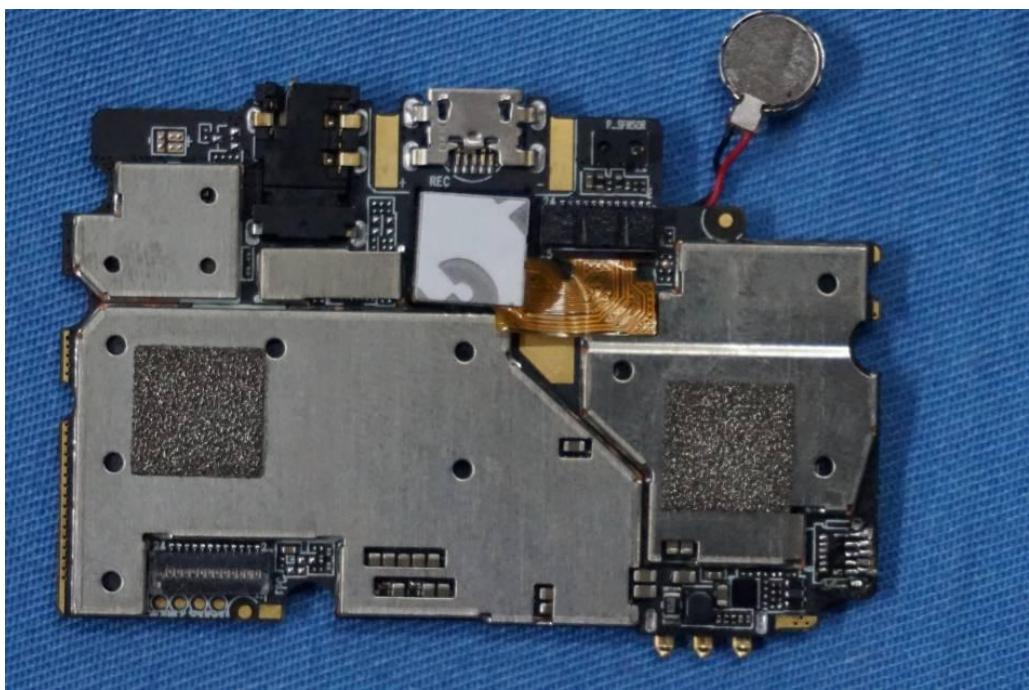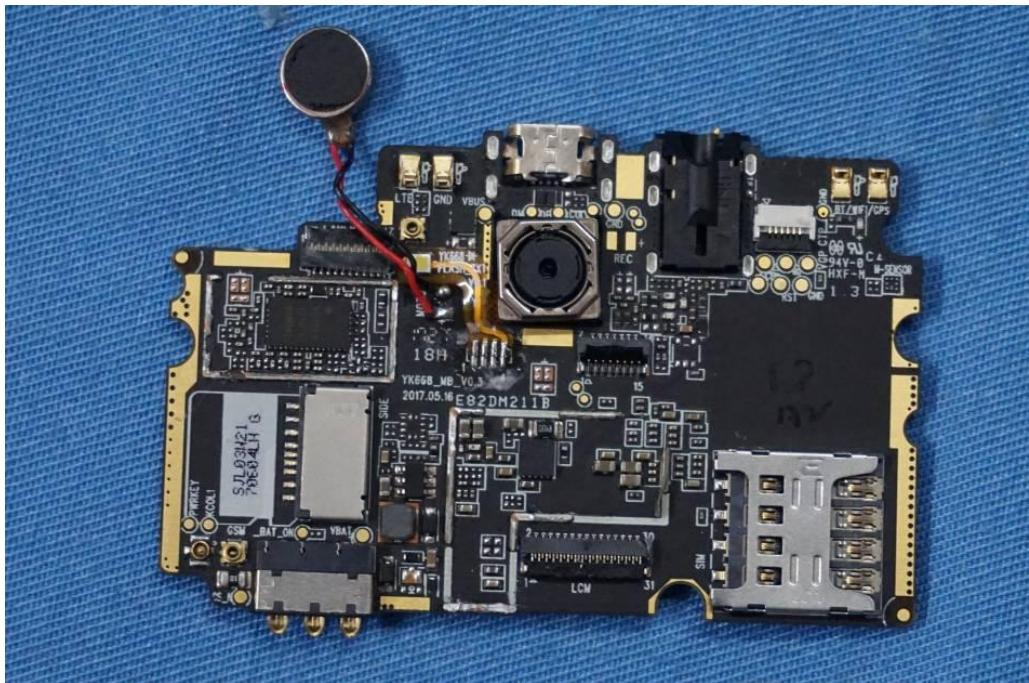

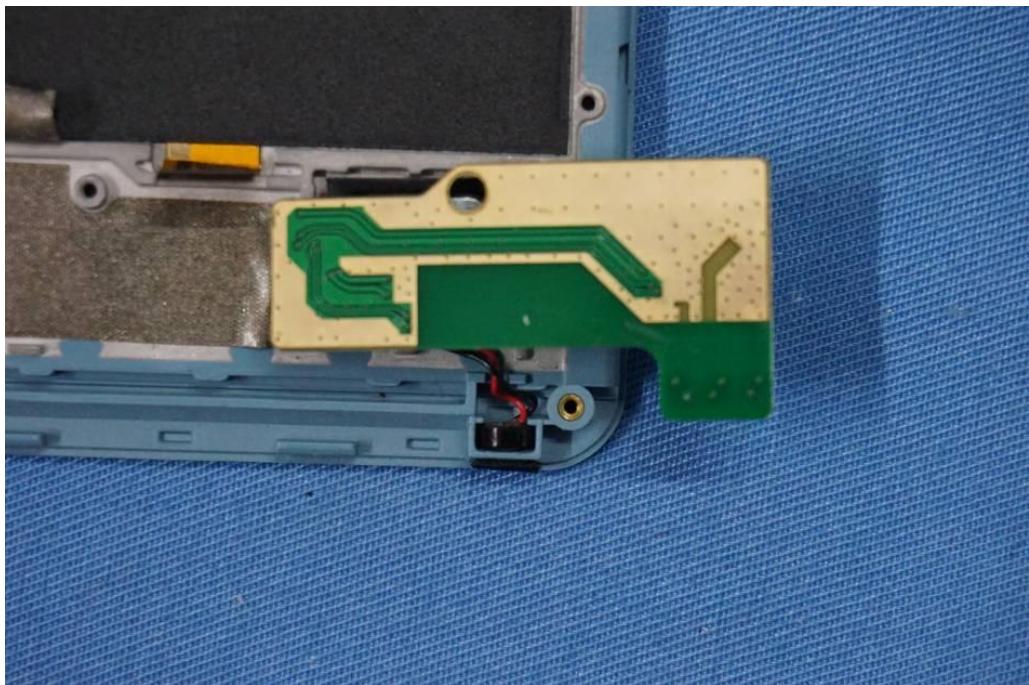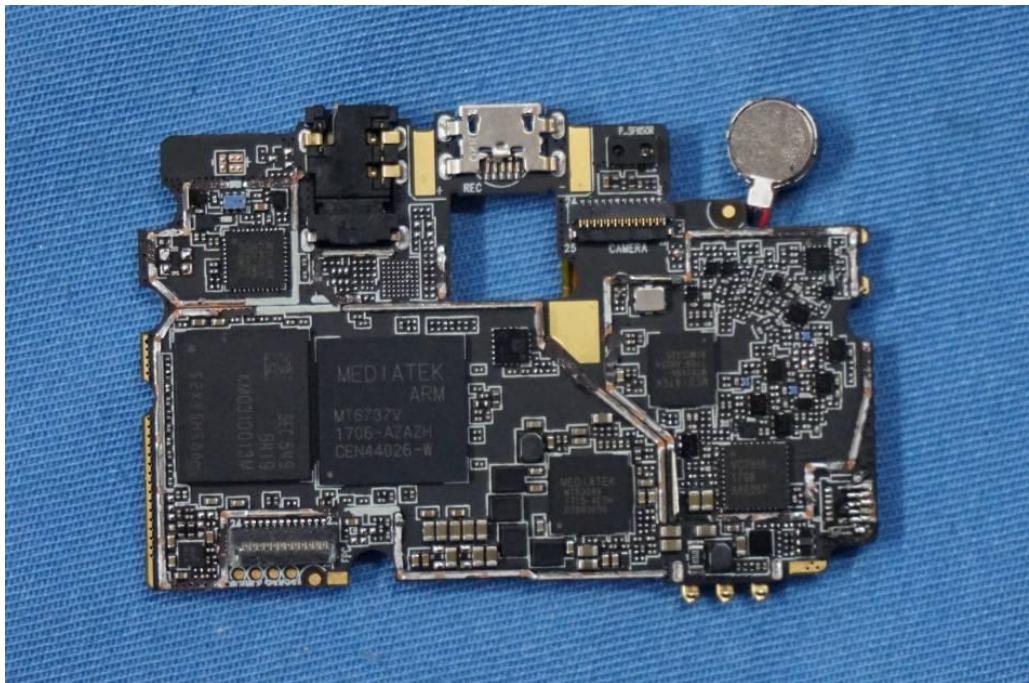

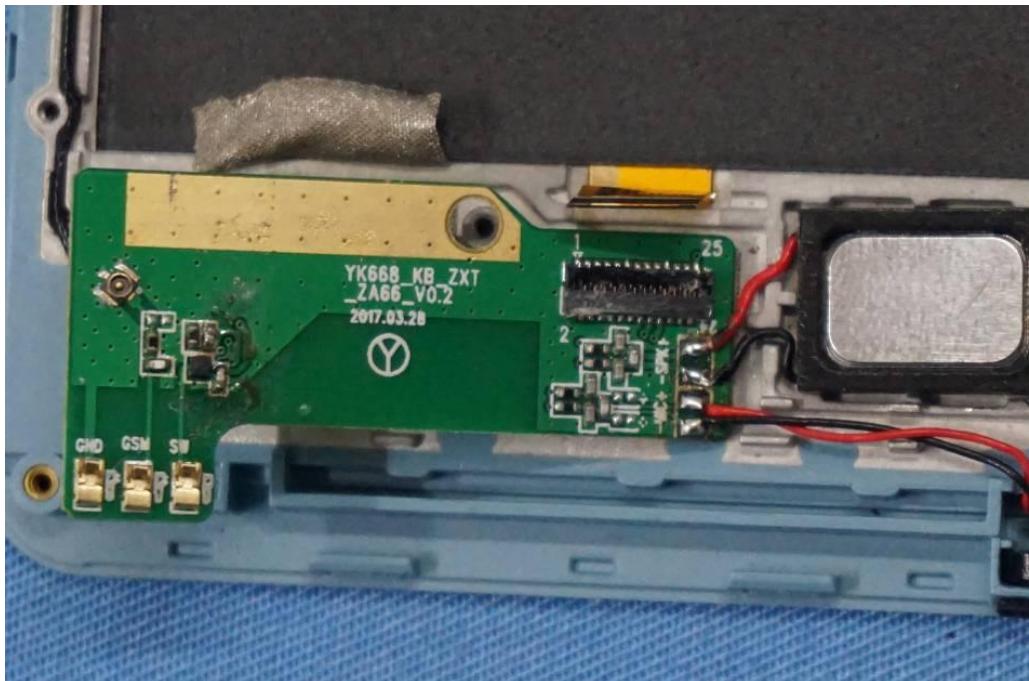



*******END OF REPORT*******