



FCC PART 15 SUBPART C TEST REPORT

FCC PART 15.247

Report Reference No.....: CTA151200102

FCC ID.....: 2AGYM-M7

Compiled by

(position+printed name+signature)....: File administrators Kevin Liu

Kevin . Liu

Supervised by

(position+printed name+signature)....: Project Engineer Kevin Liu

Kevin . Liu

Approved by

(position+printed name+signature)....: RF Manager Eric Wang

Eric Wang

Date of issue.....: Dec 17, 2015

Representative Laboratory Name ..: **Shenzhen CTA Testing Technology Co., Ltd.**

Address: Room 105, 1st Floor, Nangang Business Building ,Qianhai Road, Nanshan Street, Nanshan District,Shenzhen,China

Testing Laboratory Name: **CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.**

Address: Electronic Testing Building, Shahe Road, Xili, Nanshan District,Shenzhen, 518055, P. R. China.

Applicant's name.....: **SHENZHEN MEIDI ELECTRONIC CO.,LTD.**

Address: 12th Floor,Building C3,i Park,No.1001 Xueyuan Road,Xi Li Town,Nanshan District,Shenzhen,China

Test specification

Standard: **FCC Part 15.247: Operation within the bands 902-928 MHz, 2400-2483.5 MHz and 5725-5850 MHz**

TRF Originator.....: Shenzhen CTA Testing Technology Co., Ltd.

Shenzhen CTA Testing Technology Co., Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen CTA Testing Technology Co., Ltd. as copyright owner and source of the material. Shenzhen CTA Testing Technology Co., Ltd.takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test item description: Intelligent projector

Trade Mark: MDI

Manufacturer.....: **SHENZHEN MEIDI ELECTRONIC CO.,LTD.**

Model/Type reference.....: M7

Listed Models: M1

Modulation Type: DSSS(CCK,DQPSK,DBPSK),OFDM(64QAM,16QAM,QPSK, BPSK)

Operation Frequency.....: From 2412MHz to 2462MHz

Rating: DC 3.70V

Result.....: **PASS**

TEST REPORT

| | | |
|-------------------|--------------|-------------------------------|
| Test Report No. : | CTA151200102 | Dec 17, 2015 Date of issue |
|-------------------|--------------|-------------------------------|

Equipment under Test : Intelligent projector

Model /Type : M7

Listed Models : M1

Applicant : SHENZHEN MEIDI ELECTRONIC CO.,LTD

Address : 12th Floor, Building C3, i Park, No. 1001 Xueyuan Road, Xi Li Town, Nanshan District, Shenzhen, China

Manufacturer : SHENZHEN MEIDI ELECTRONIC CO.,LTD.

Address : 12th Floor, Building C3, i Park, No. 1001 Xueyuan Road, Xi Li Town, Nanshan District, Shenzhen, China

| | |
|---------------------|-------------|
| Test Result: | PASS |
|---------------------|-------------|

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Contents

| | | |
|----------|---|-----------|
| <u>1</u> | <u>TEST STANDARDS</u> | <u>4</u> |
| <u>2</u> | <u>SUMMARY</u> | <u>5</u> |
| 2.1 | General Remarks | 5 |
| 2.2 | Product Description | 5 |
| 2.3 | Equipment Under Test | 5 |
| 2.4 | Description of the test mode | 5 |
| 2.5 | Short description of the Equipment under Test (EUT) | 6 |
| 2.6 | EUT operation mode | 7 |
| 2.7 | EUT configuration | 7 |
| 2.8 | Internal Identification of AE used during the test | 7 |
| 2.9 | Related Submittal(s) / Grant (s) | 7 |
| 2.10 | Modifications | 7 |
| 2.11 | Test Environments | 7 |
| <u>3</u> | <u>TEST ENVIRONMENT</u> | <u>9</u> |
| 3.1 | Address of the test laboratory | 9 |
| 3.2 | Test Facility | 9 |
| 3.3 | Environmental conditions | 9 |
| 3.4 | Test Description | 9 |
| 3.5 | Summary of measurement results | 10 |
| 3.6 | Equipments Used during the Test | 11 |
| <u>4</u> | <u>TEST CONDITIONS AND RESULTS</u> | <u>12</u> |
| 4.1 | AC Power Conducted Emission | 12 |
| 4.2 | Radiated Emission | 14 |
| 4.3 | Maximum Peak Output Power | 23 |
| 4.4 | Power Spectral Density | 25 |
| 4.5 | Band Edge Compliance of RF Emission | 32 |
| 4.6 | Spurious RF Conducted Emission | 41 |
| 4.7 | 6dB Bandwidth | 70 |
| 4.8 | Antenna Requirement | 77 |
| <u>5</u> | <u>TEST SETUP PHOTOS OF THE EUT</u> | <u>78</u> |
| <u>6</u> | <u>EXTERNAL PHOTOS OF THE EUT</u> | <u>78</u> |
| <u>7</u> | <u>INTERNAL PHOTOS OF THE EUT</u> | <u>78</u> |

1 TEST STANDARDS

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2009](#): American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 V03](#): Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247

2 SUMMARY

2.1 General Remarks

| | | |
|--------------------------------|---|--------------|
| Date of receipt of test sample | : | Dec 01, 2015 |
| | | |
| | | |
| Testing commenced on | : | Dec 02, 2015 |
| | | |
| | | |
| Testing concluded on | : | Dec 17, 2015 |

2.2 Product Description

The **SHENZHEN MEIDI ELECTRONIC CO.,LTD**'s Model: M7 or the "EUT" as referred to in this report; more general information as follows, for more details, refer to the user's manual of the EUT.

| | |
|------------------------------|--|
| Name of EUT | Intelligent projector |
| Model Number | M7 |
| Antenna Type | Internal |
| WLAN FCC Operation frequency | IEEE 802.11b:2412-2462MHz IEEE 802.11g:2412-2462MHz IEEE 802.11n HT20:2412-2462MHz |
| BT FCC Operation frequency | 2402MHz-2480MHz |
| WLAN FCC Modulation Type | IEEE 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE 802.11n HT20: OFDM (64QAM, 16QAM, QPSK,BPSK) |
| BT Modulation Type | GFSK (BT 4.0) |
| WLAN | Supported 802.11b/802.11g/802.11n |
| Bluetooth | Supported BT4.0 |

2.3 Equipment Under Test

Power supply system utilised

| | | | | | |
|----------------------|---|----------------------------------|----------------------------------|-----------------------|-------------|
| Power supply voltage | : | <input type="radio"/> | 120V / 60 Hz | <input type="radio"/> | 115V / 60Hz |
| | | <input type="radio"/> | 12 V DC | <input type="radio"/> | 24 V DC |
| | | <input checked="" type="radio"/> | Other (specified in blank below) | | |

DC 3.70V

2.4 Description of the test mode

IEEE 802.11b/g/n: The product support Third channels but only use Eleventh channels in USA.

| Channel | Frequency(MHz) | Channel | Frequency(MHz) |
|----------|----------------|---------|----------------|
| 1 | 2412 | 8 | 2447 |
| 2 | 2417 | 9 | 2452 |
| 3 | 2422 | 10 | 2457 |
| 4 | 2427 | 11 | 2462 |
| 5 | 2432 | | |
| 6 | 2437 | | |
| 7 | 2442 | | |

2.5 Short description of the Equipment under Test (EUT)

2.5.1 Test Modes

| Test Case | Test Conditions | |
|--|--------------------|---|
| | Configuration | Description |
| DTS (6 dB) Bandwidth | Measurement Method | FCC KDB 558074 §8.2 Option 2 |
| | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| Maximum Peak Conducted Output Power | Measurement Method | FCC KDB 558074§9.1.2 |
| | Test Environment | NTNV |
| | Test Setup | Test Setup 1 |
| Maximum Power Spectral Density Level | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | Measurement Method | FCC KDB 558074 §10.2 (peak PSD). |
| | Test Environment | NTNV |
| Unwanted Emissions into Non-Restricted Frequency Bands | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | Measurement Method | FCC KDB 558074§11.0. |
| | Test Environment | NTNV |
| Unwanted Emissions into Restricted Frequency Bands (Conducted) | Test Setup | Test Setup 1 |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | Measurement Method | FCC KDB 558074§12.2, Conducted (antenna-port). |
| Unwanted Emissions into Restricted Frequency Bands (Conducted) | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |
| | Measurement Method | FCC KDB 558074§12.1, Radiated(cabinet/case emissions with Impedance matching for antenna-port). |
| Unwanted Emissions into Restricted | Test Environment | NTNV |
| | EUT Configuration | 11b_L,11b_M,11b_H 11g_L,11g_M,11g_H 11n HT20_L, 11n HT20_M, 11n HT20_H |

| Test Case | Test Conditions | |
|-----------------------------------|--------------------|----------------------|
| | Configuration | Description |
| AC Power Line Conducted Emissions | Measurement Method | AC mains conducted. |
| | Test Environment | NTNV |
| | EUT Configuration | 11g_M (Worst Conf.). |

Note: 1. For Radiated Emissions, By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "Z axis" position was the worst, then the final test was executed the worst condition and test data were recorded in this report.

2. Typical working modes for each IEEE 802.11 mode are selected to perform tests. The manufacturer provide special test software to control TX duty cycle >98% for TX test; recorded worst case at difference data rate as follows:

| Test Mode | Test Modes Description |
|-----------|---|
| 11b | IEEE 802.11b with data rate of 1 Mbps using SISO mode. |
| 11g | IEEE 802.11g with data rate of 6 Mbps using SISO mode. |
| 11n HT20 | IEEE 802.11n with data rate of MCS0 and bandwidth of 20MHz using SISO mode. |

2.6 EUT operation mode

| Test Mode | RF Ch. | BG Port | TX Freq. [MHz] | RX Freq. [MHz] | Ch. BW [MHz] |
|----------------------|--------|---------|---------------------|----------------|--------------|
| IEEE 802.11b | L | BG 1 | Ch No. 1 / 2412MHz | --- | 22 |
| | M | BG 1 | Ch No. 6 / 2437 MHz | --- | 22 |
| | H | BG 1 | Ch No. 11/ 2462MHz | --- | 22 |
| IEEE 802.11g | L | BG 1 | Ch No. 1 / 2412MHz | --- | 20 |
| | M | BG 1 | Ch No. 6 / 2437 MHz | --- | 20 |
| | H | BG 1 | Ch No. 11/ 2462MHz | --- | 20 |
| IEEE 802.11n HT20 | L | BG 1 | Ch No. 1 / 2412MHz | --- | 20 |
| | M | BG 1 | Ch No. 6 / 2437 MHz | --- | 20 |
| | H | BG 1 | Ch No. 11/ 2462MHz | --- | 20 |

2.7 EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

● - supplied by the manufacturer

○ - supplied by the lab

| | | | |
|-----------------------|-------------|----------------|---|
| <input type="radio"/> | Power Cable | Length (m) : | / |
| | | Shield : | / |
| | | Detachable : | / |
| <input type="radio"/> | Multimeter | Manufacturer : | / |
| | | Model No. : | / |

2.8 Internal Identification of AE used during the test

| | |
|--------|-------------|
| AE ID* | Description |
| AE1 | Charger |

AE1

Model: SUN0500250

INPUT: AC100-240V 50/60Hz 0.4A

OUTPUT: DC 5.0V 2.5A

*AE ID: is used to identify the test sample in the lab internally.

2.9 Related Submittal(s) / Grant (s)

This submittal(s) (test report) is intended for **FCC ID: 2AGYM-M7** filing to comply with FCC Part 15.247 Rules

2.10 Modifications

No modifications were implemented to meet testing criteria.

2.11 Test Environments

NOTE: The values used in the test report maybe stringent than the declared.

| Environment Parameter | Selected Values During Tests | | |
|-----------------------|------------------------------|---------|-------------------|
| NTNV | Temperature | Voltage | Relative Humidity |
| | Ambient | 3.7VDC | Ambient |

1. The frequency bands used in this EUT are listed as follows:

| Frequency Band(MHz) | 2400-2483.5 | 5150-5350 | 5470-5725 | 5725-5850 |
|---------------------|-------------|-----------|-----------|-----------|
| 802.11b | √ | — | — | — |
| 802.11g | √ | — | — | — |
| 802.11n HT20 | √ | — | — | — |

2. The EUT incorporates a SISO function, Physically, the EUT provides one completed transmitter and one completed receiver.

| Modulation Mode | TX Function |
|-----------------|-------------|
| 802.11b | 1TX |
| 802.11g | 1TX |
| 802.11n HT20 | 1TX |

3 TEST ENVIRONMENT

3.1 Address of the test laboratory

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd.

Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055, P. R. China
The sites are constructed in conformance with the requirements of ANSI C63.4 (2003) and CISPR Publication 22.

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

FCC-Registration information:

FCC-Registration No.: 406086

CCIC Southern Electronic Product Testing (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 406086, valid time is until October 28, 2017.

3.3 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 °C

Humidity: 30-60 %

Atmospheric pressure: 950-1050mbar

3.4 Test Description

| Test Item | FCC Part No. | Requirements | Verdict |
|--|---------------------|--|---------|
| DTS (6 dB) Bandwidth | 15.247(a)(2) | ≥ 500 kHz. | PASS |
| Maximum Peak Conducted Output Power | 15.247(b)(3) | For directional gain: $< 30\text{dBm} - (G[\text{dBi}] - 6 [\text{dB}])$, peak; Otherwise : $< 30\text{dBm}$, peak. | PASS |
| Maximum Power Spectral Density Level | 15.247(e) | For directional gain : $< 8\text{dBm}/3 \text{kHz} - (G[\text{dBi}] - 6[\text{dB}])$, peak. Otherwise : $< 8\text{dBm}/3 \text{kHz}$, peak. | PASS |
| Band Edges Compliance | 15.247(d) | $< -20\text{dB}/100 \text{kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Non-Restricted Frequency Bands | 15.247(d) | $< -20\text{dB}/100 \text{kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Restricted Frequency Bands (Conducted) | 15.247(d) 15.209 | $< -20\text{dB}/100 \text{kHz}$ if total peak power \leq power limit. | PASS |
| Unwanted Emissions into Restricted Frequency Bands (Radiated) | 15.247(d) 15.209 | FCC Part 15.209 field strength limit; | PASS |
| AC Power Line Conducted Emissions | 15.207 | FCC Part 15.207 conducted limit; | PASS |

Remark: The measurement uncertainty is not included in the test result.

3.5 Summary of measurement results

| Test Specification clause | Test case | Test Mode | Test Channel | Recorded In Report | | Pass | Fail | NA | NP | Remark |
|---------------------------|---|--|---|--|---|-------------------------------------|--------------------------|--------------------------|--------------------------|----------|
| §15.247(b)(4) | Antenna gain | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(e) | Power spectral density | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(a)(1) | Spectrum bandwidth – 6 dB bandwidth | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(b)(1) | Maximum output power | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d) | Band edge compliance conducted | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.205 | Band edge compliance radiated | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions conducted | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.247(d) | TX spurious emissions radiated | 802.11b 802.11g 802.11n HT20 802.11n HT40 | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | 802.11b | <input checked="" type="checkbox"/> Lowest <input checked="" type="checkbox"/> Middle <input checked="" type="checkbox"/> Highest | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.109 | RX spurious emissions radiated | -/- | -/- | -/- | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.209(a) | TX spurious Emissions radiated < 30 MHz | 802.11b | -/- | 802.11b | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |
| §15.107(a) §15.207 | Conducted Emissions < 30 MHz | 802.11b | -/- | 802.11b | -/- | <input checked="" type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> | complies |

Remark:

1. The measurement uncertainty is not included in the test result.
2. NA = Not Applicable; NP = Not Performed


3.6 Equipments Used during the Test

| Description | Manufacturer | Model | Serial No. | Test Date | Due Date |
|--------------------------------|--------------|----------------------|---------------|-------------|------------|
| EMI Test Receiver | R&S | ESIB26 | A0304218 | 2015.06.02 | 2016.06.01 |
| Full-Anechoic Chamber | Albatross | 12.8m*6.8m*6.4m | A0412372 | 2015.01.05 | 2016.01.04 |
| Loop Antenna | Schwarz beck | HFH2-Z2 | 100047 | 2015.06.02 | 2016.06.01 |
| Bilog Antenna | Schwarzbeck | VULB 9163 | 9163-274 | 2015.06.02 | 2016.06.01 |
| Bilog Antenna | Schwarzbeck | VULB 9163 | 9163-276 | 2015.06.02 | 2016.06.01 |
| Double ridge horn antenna | R&S | HF960 | 100150 | 2015.06.02 | 2016.06.01 |
| Double ridge horn antenna | R&S | HF960 | 100155 | 2015.06.02 | 2016.06.01 |
| Ultra-wideband antenna | R&S | HL562 | 100089 | 2015.06.02 | 2016.06.01 |
| Ultra-wideband antenna | R&S | HL562 | 100090 | 2015.06.02 | 2016.06.01 |
| Test Antenna – Horn (18-25GHz) | ETS | UG-596A/U | A0902607 | 2015.06.02 | 2016.06.01 |
| Test Antenna – Horn (18-25GHz) | ETS | UG-596A/U | A0902611 | 2015.06.02 | 2016.06.01 |
| Amplifier 20M~3GHz | R&S | PAP-0203H | 22018 | 2015.06.02 | 2016.06.01 |
| Amplifier 1G~18GHz | R&S | MITEQ AFS42-00101800 | 25-S-42 | 2015.06.02 | 2016.06.01 |
| Amplifier 18G~40GHz | R&S | JS42-18002600-28-5A | 12111.0980.00 | 2015.06.02 | 2016.06.01 |
| System Simulator | R&S | CMW500 | A130101034 | 2015.06.010 | 2016.06.09 |
| Signal Analyzer | Agilent | N9030A | MY49430428 | 2015.06.010 | 2016.06.09 |
| Power Sensor | R&S | NRP-Z4 | 823.3618.03 | 2015.06.02 | 2016.06.01 |
| Power Meter | R&S | NRVS | 1020.1809.02 | 2015.06.02 | 2016.06.01 |
| LISN | R&S | ESRV26 | A0304221 | 2015.06.02 | 2016.06.01 |
| EMI Test Receiver | R&S | ESCS | A0304260 | 2015.06.02 | 2016.06.01 |
| EMC Test Software | R&S | ES-K1 | N/A | N/A | N/A |
| EMC Test Software | R&S | EMC32 | N/A | N/A | N/A |

4 TEST CONDITIONS AND RESULTS

4.1 AC Power Conducted Emission

TEST CONFIGURATION

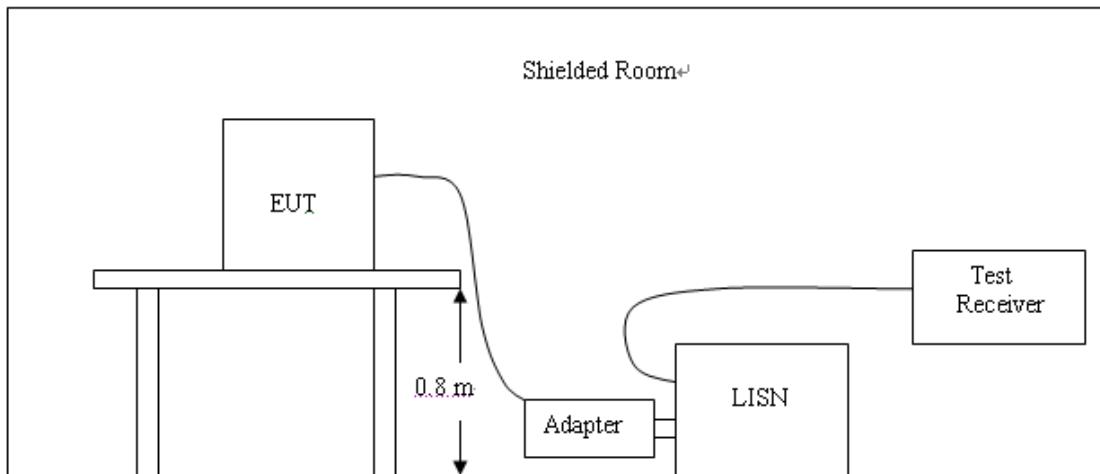

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10-2013
2. Support equipment, if needed, was placed as per ANSI C63.10-2013;
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10-2013;
4. The EUT received DC5V power from the adapter, the adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 KHz to 30MHz for emissions in each of the test modes.
8. During the above scans, the emissions were maximized by cable manipulation.

AC Power Conducted Emission Limit

For intentional device, according to § 15.207(a) AC Power Conducted Emission Limits is as following:


| Frequency (MHz) | Maximum RF Line Voltage (dB μ V) | | | |
|--------------------|--------------------------------------|------|---------|--------|
| | CLASS A | | CLASS B | |
| | Q.P. | Ave. | Q.P. | Ave. |
| 0.15 - 0.50 | 79 | 66 | 66-56* | 56-46* |
| 0.50 - 5.00 | 73 | 60 | 56 | 46 |
| 5.00 - 30.0 | 73 | 60 | 60 | 50 |

* Decreasing linearly with the logarithm of the frequency


TEST RESULTS

The AC Power Conducted Emission measurement is performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test modes and channels.

L:



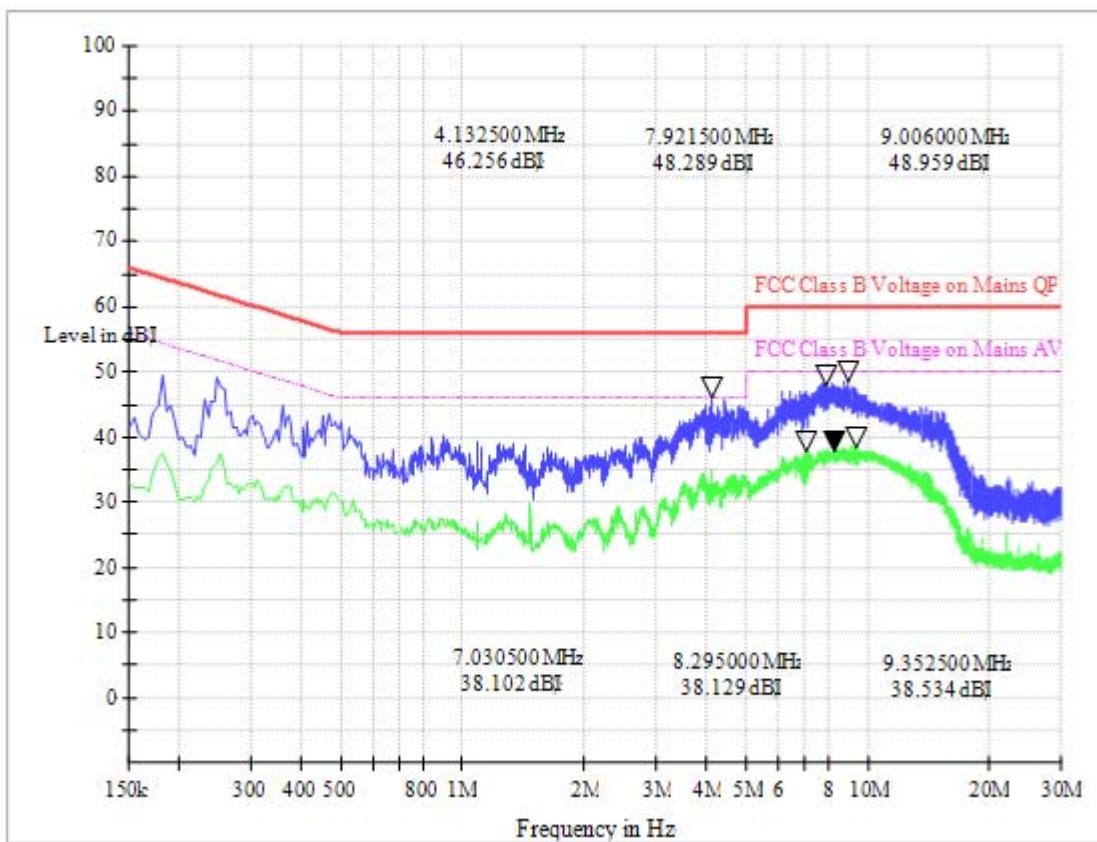


N:

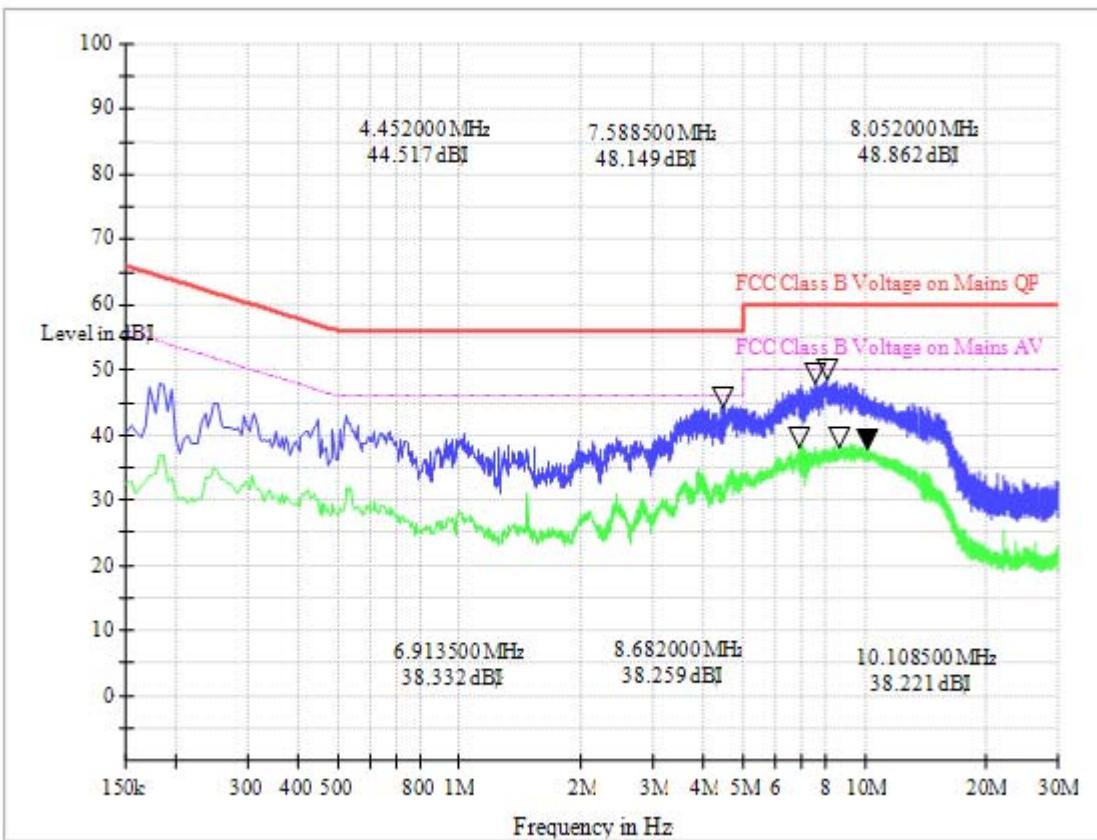

4.2 Radiated Emission

TEST CONFIGURATION

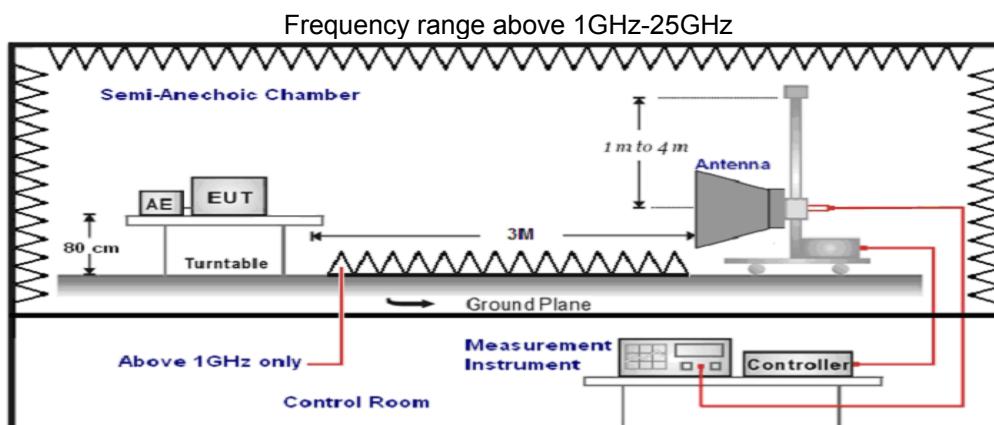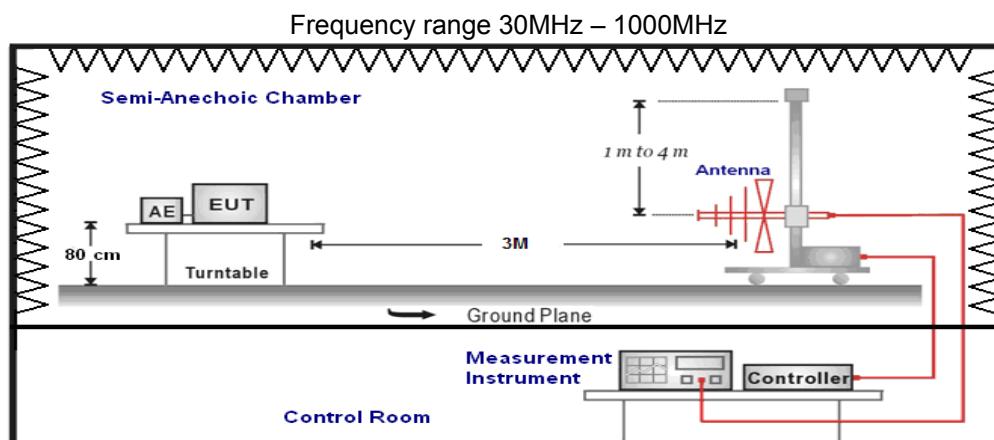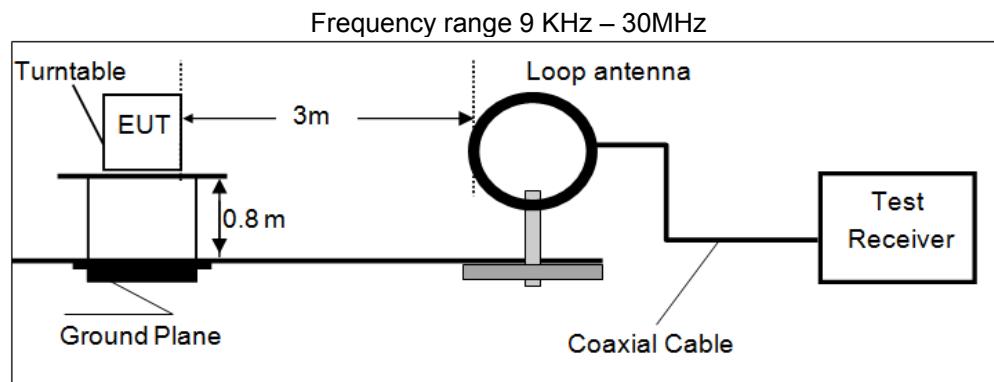

TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.
3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed.
5. The EUT minimum operation frequency was 32.768 KHz and maximum operation frequency was 2462radiated emission test frequency band from 9 KHz to 25GHz.
6. The distance between test antenna and EUT as following table states:

| Test Frequency range | Test Antenna Type | Test Distance |
|----------------------|----------------------------|---------------|
| 9KHz-30MHz | Active Loop Antenna | 3 |
| 30MHz-1GHz | Ultra-Broadband Antenna | 3 |
| 1GHz-18GHz | Double Ridged Horn Antenna | 3 |
| 18GHz-25GHz | Horn Antenna | 1 |

7. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|--|-----------------------|
| 9KHz-150KHz | RBW=200Hz/VBW=3KHz,Sweep time=Auto | QP |
| 150KHz-30MHz | RBW=9KHz/VBW=100KHz,Sweep time=Auto | QP |
| 30MHz-1GHz | RBW=120KHz/VBW=1000KHz,Sweep time=Auto | QP |
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Peak (Receiver) |
| | Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Average (Receiver) |

Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$\mathbf{FS = RA + AF + CL - AG}$$

| | |
|---------------------------|--|
| Where FS = Field Strength | CL = Cable Attenuation Factor (Cable Loss) |
| RA = Reading Amplitude | AG = Amplifier Gain |
| AF = Antenna Factor | |

For example

| Frequency (MHz) | FS (dB μ V/m) | RA (dB μ V/m) | AF (dB) | CL (dB) | AG (dB) | Transd (dB) |
|-----------------|-------------------|-------------------|---------|---------|---------|-------------|
| 300.00 | 40 | 58.1 | 12.2 | 1.6 | 31.90 | -18.1 |

$$\text{Transd} = \text{AF} + \text{CL} - \text{AG}$$

RADIATION LIMIT

For intentional device, according to § 15.209(a), the general requirement of field strength of radiated emission from intentional radiators at a distance of 3 meters shall not exceed the following table. According to § 15.247(d), in any 100kHz bandwidth outside the frequency band in which the EUT is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of desired power.

The pre-test have done for the EUT in three axes and found the worst emission at position shown in test setup photos.

| Frequency (MHz) | Distance (Meters) | Radiated (dB μ V/m) | Radiated (μ V/m) |
|-----------------|-------------------|-------------------------|-----------------------|
| 0.009-0.49 | 300 | 20log(2400/F(KHz))+80 | 2400/F(KHz) |
| 0.49-1.705 | 30 | 20log(24000/F(KHz))+40 | 24000/F(KHz) |
| 1.705-30 | 30 | 20log(30)+40 | 30 |
| 30-88 | 3 | 40.0 | 100 |
| 88-216 | 3 | 43.5 | 150 |
| 216-960 | 3 | 46.0 | 200 |
| Above 960 | 3 | 54.0 | 500 |

TEST RESULTS


Remark:

1. The radiated measurement are performed the each test mode (b/g/n) and channel (low/mid/high), the datum recorded below (802.11b mode, the middle channel) is the worst case for all the test mode and channel.
2. ULTRA-BROADBAND ANTENNA for the radiation emission test below 1G.
3. HORN ANTENNA for the radiation emission test above 1G.
4. We tested both battery powered and powered by adapter charging mode at three orientate ons, recorded worst case at powered by adapter charging mode.
5. “--” means not recorded as emission levels lower than limit.
6. Margin= Limit - Level

For 9KHz to 30MHz


| Frequency (MHz) | Corrected Reading (dB μ V/m)@3m | FCC Limit (dB μ V/m) @3m | Margin (dB) | Detector | Result |
|-----------------|-------------------------------------|------------------------------|-------------|----------|--------|
| 11.48 | 45.84 | 69.54 | 23.70 | QP | PASS |
| 25.98 | 43.59 | 69.54 | 25.95 | QP | PASS |


For 30MHz to 1000MHz

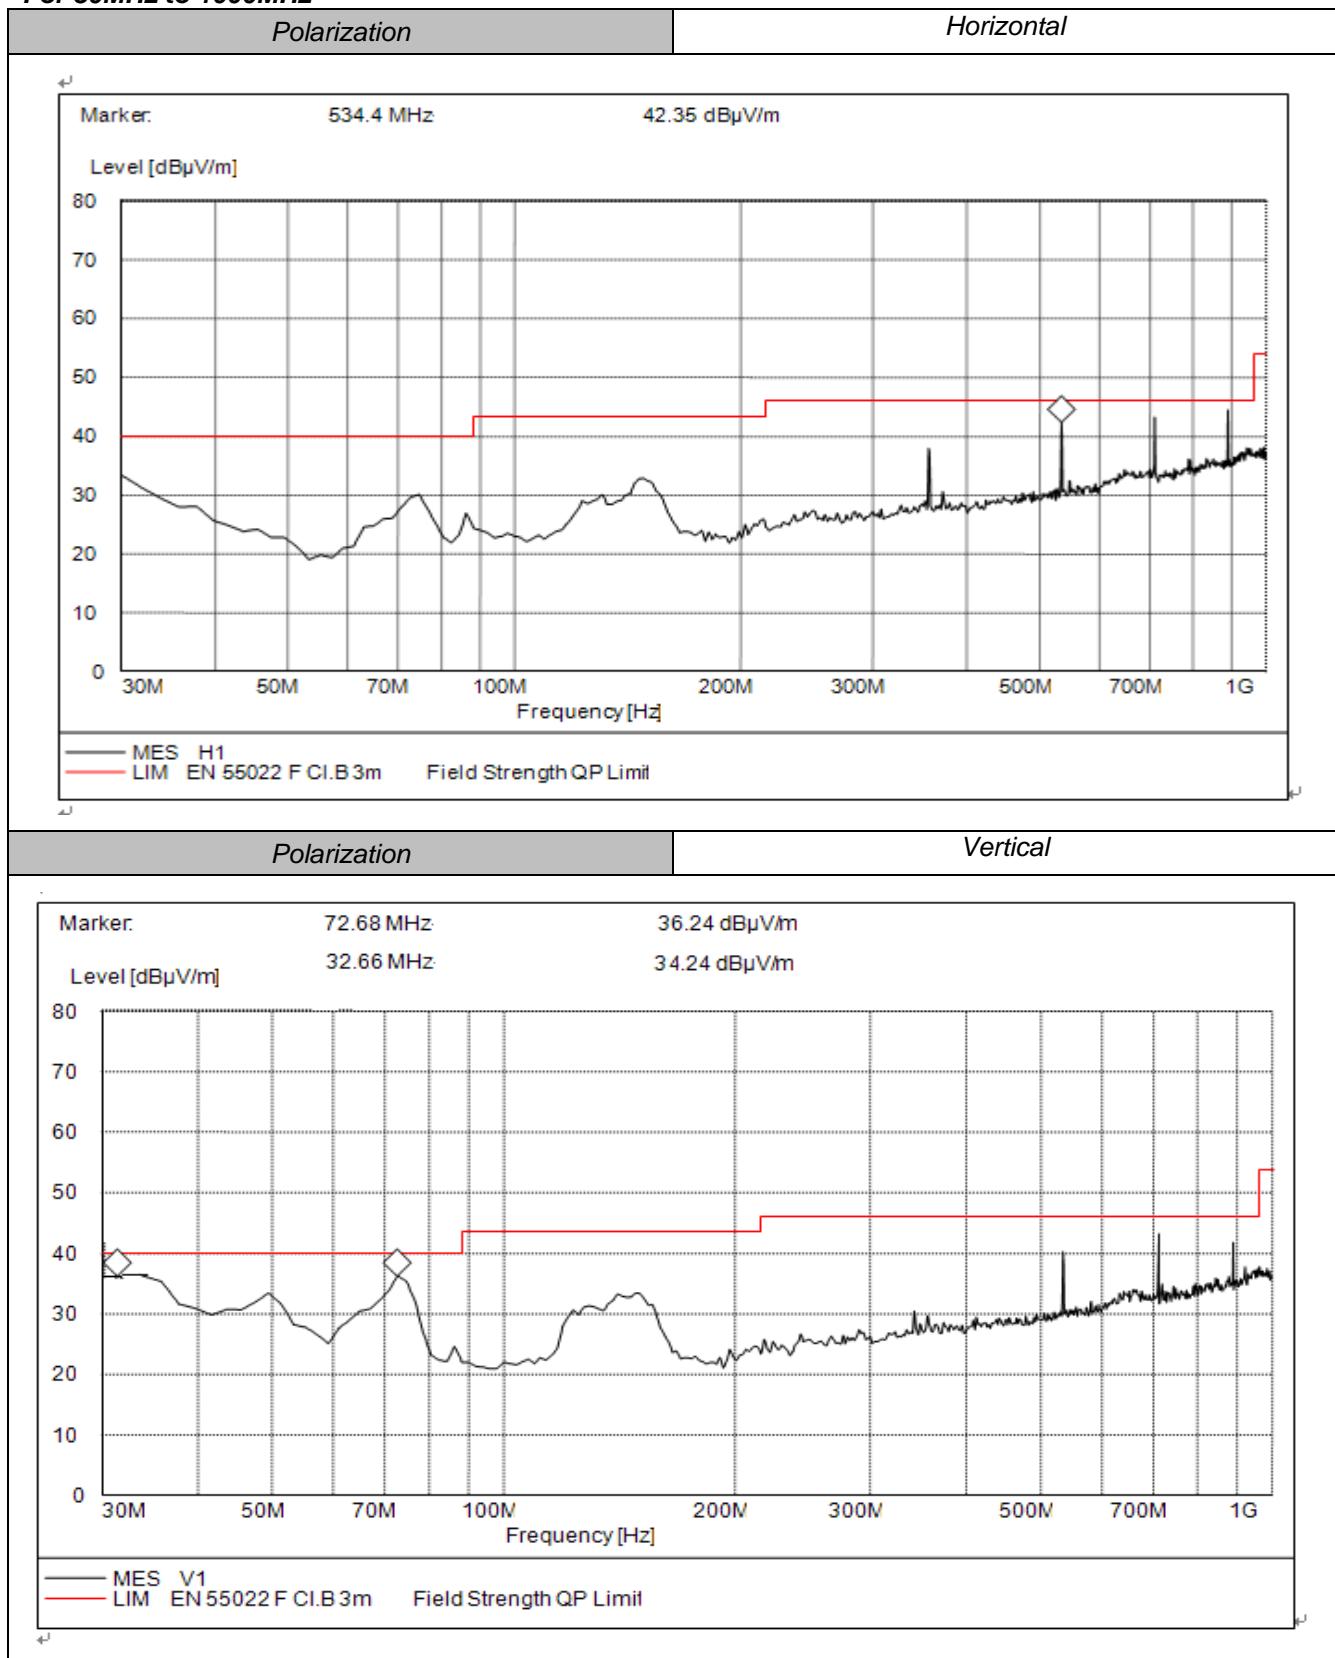



For 1GHz to 25GHz


Note: We tested 11b, 11g, 11n HT20, and recorded the worst case at the 11b Mode.

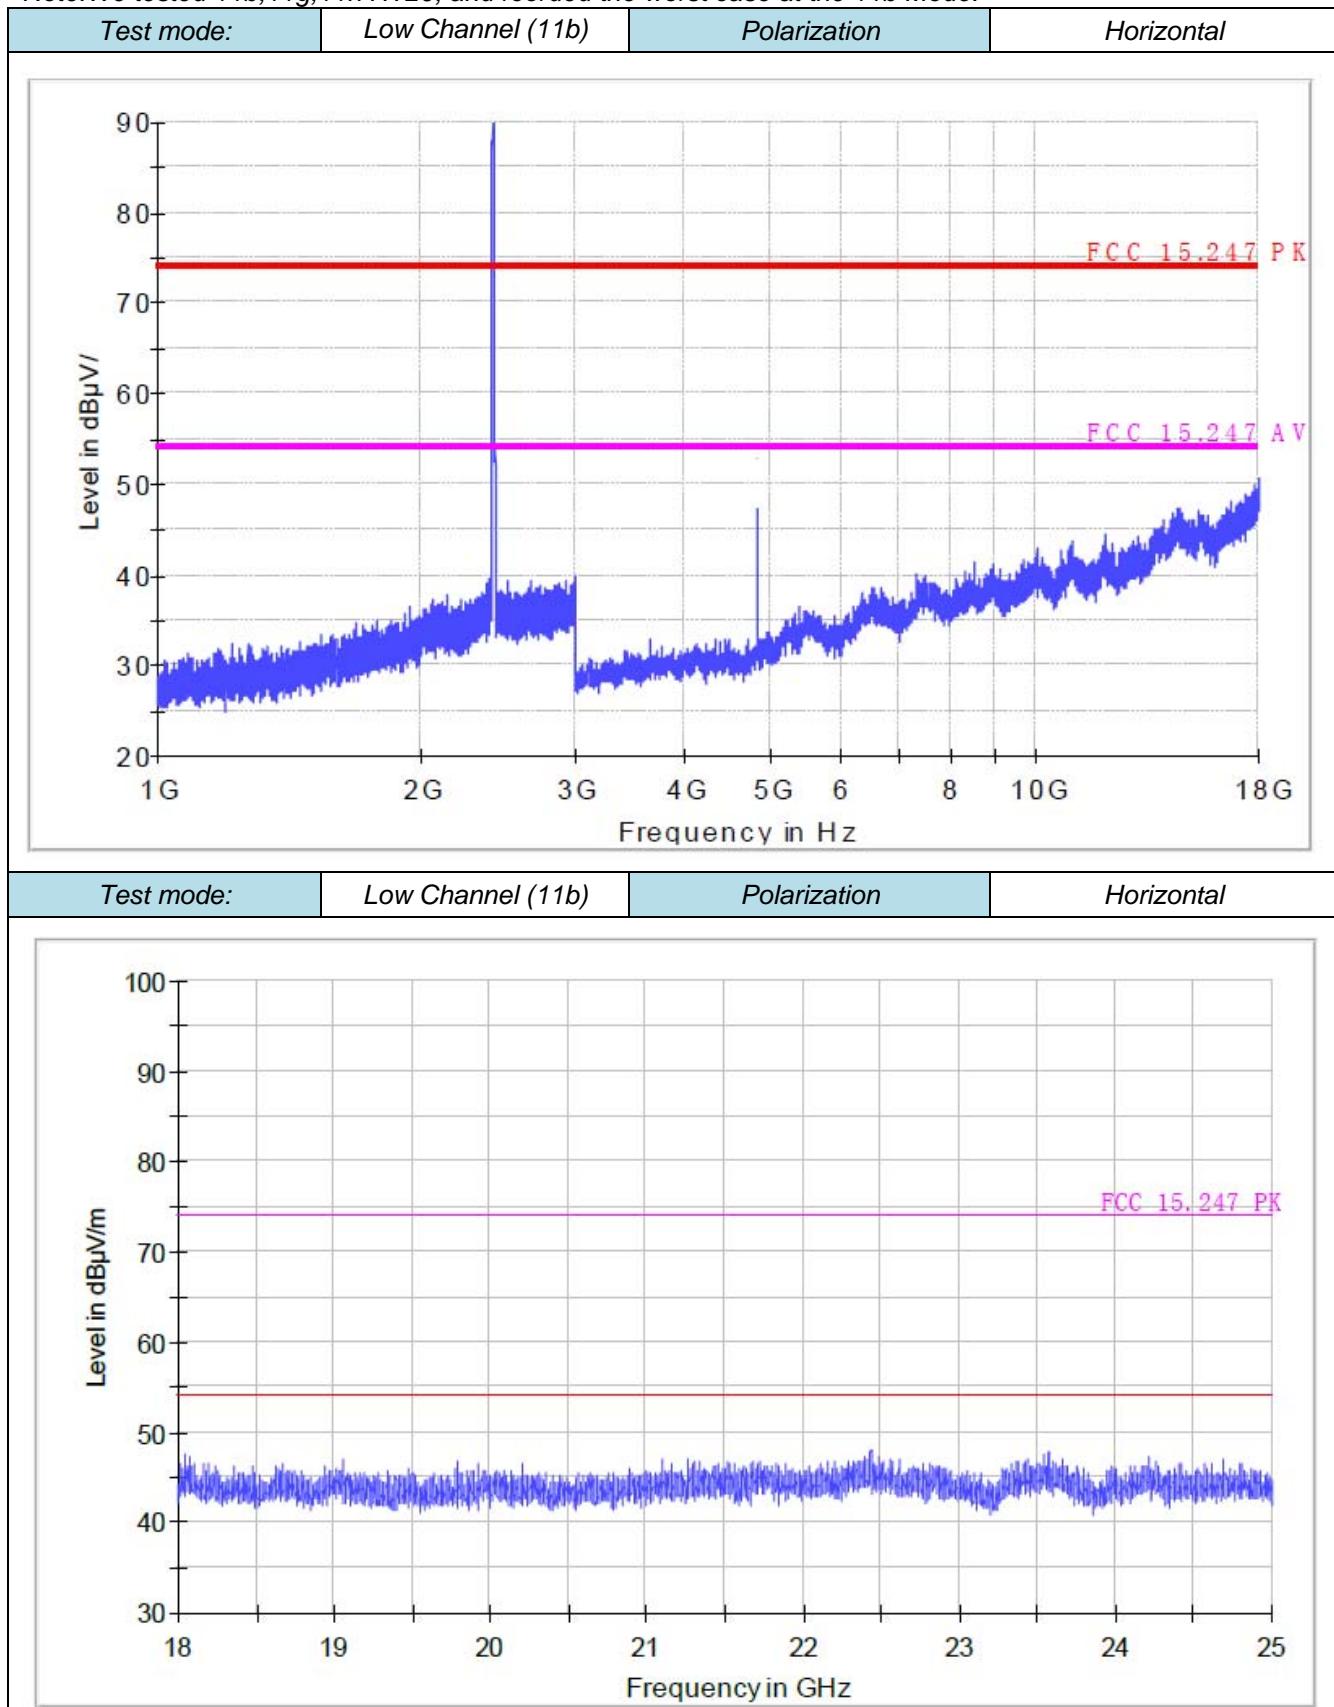


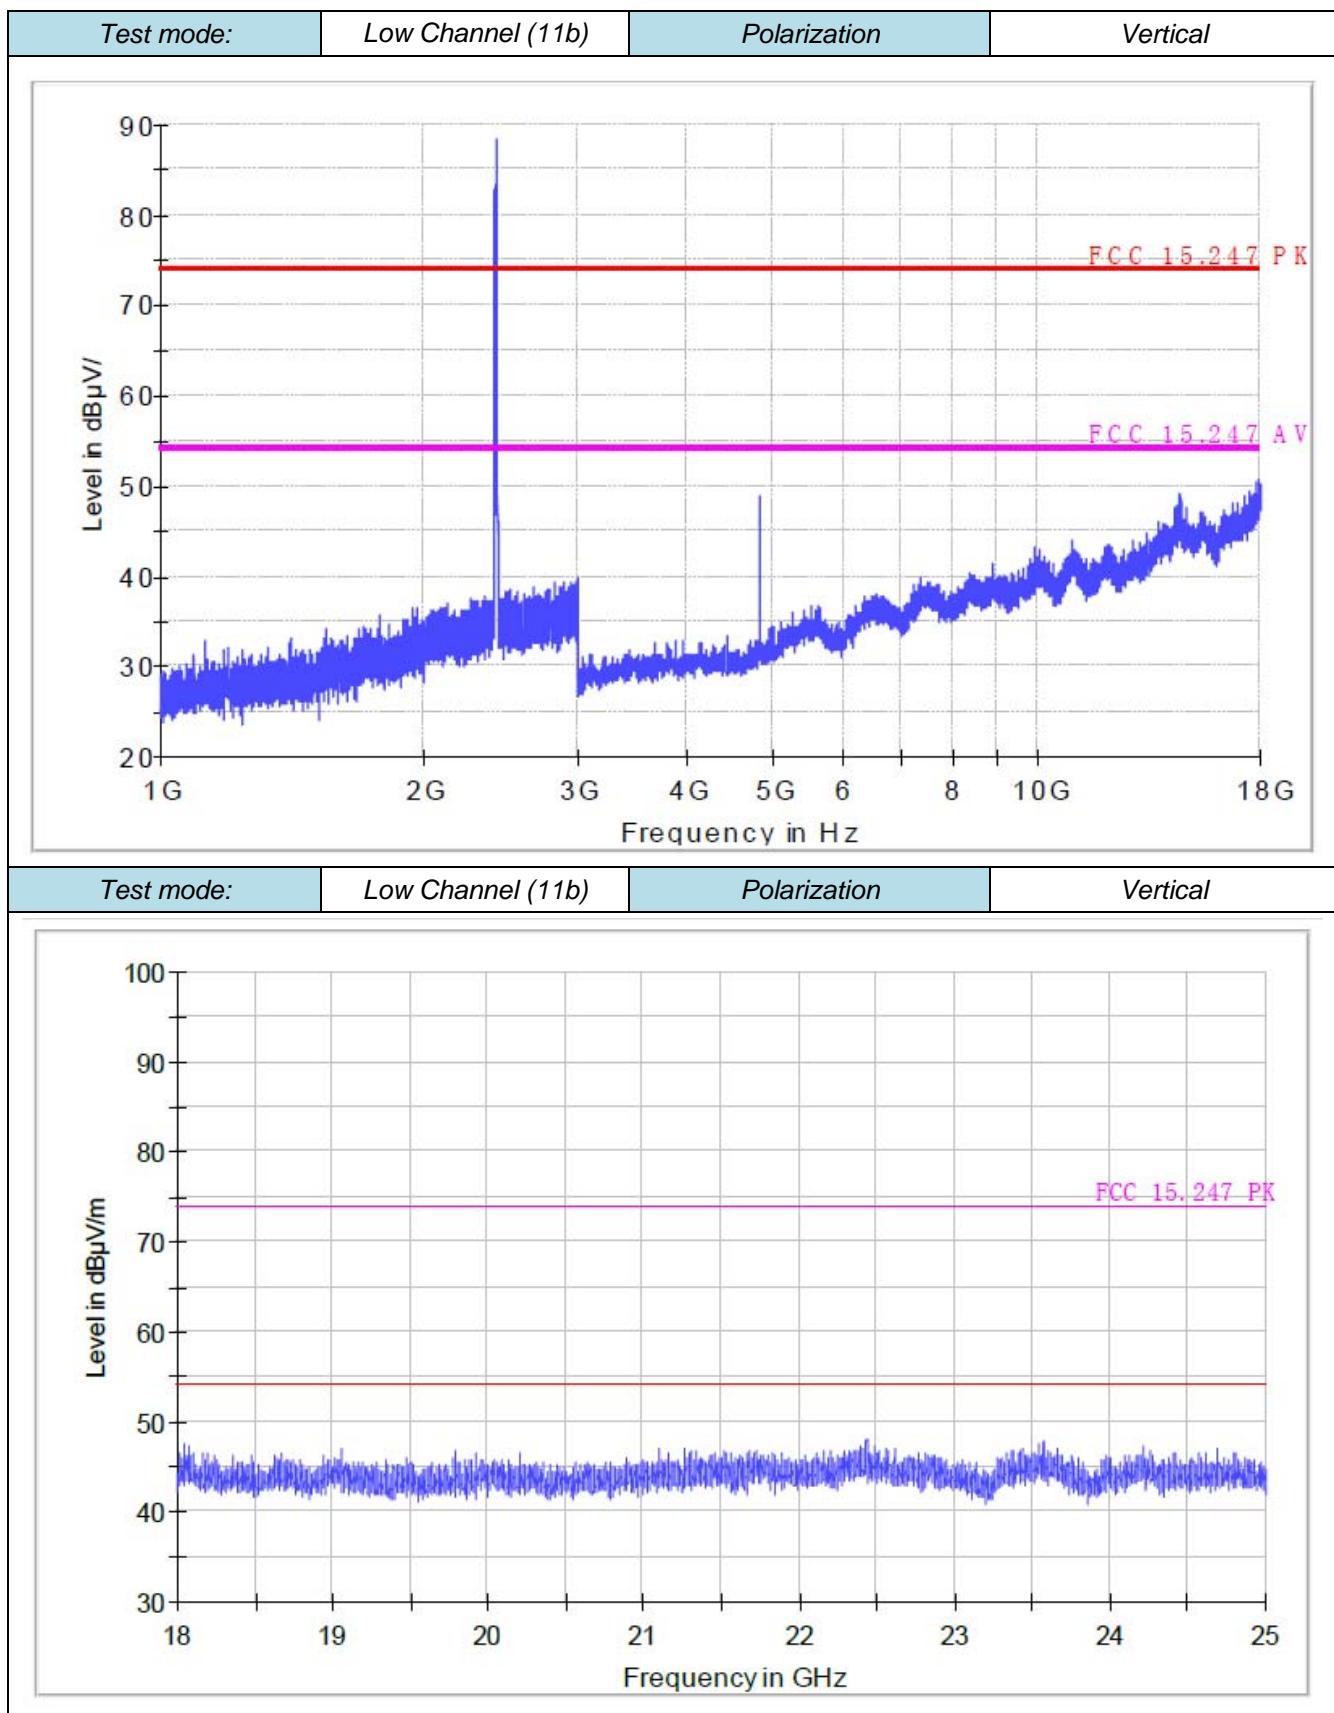

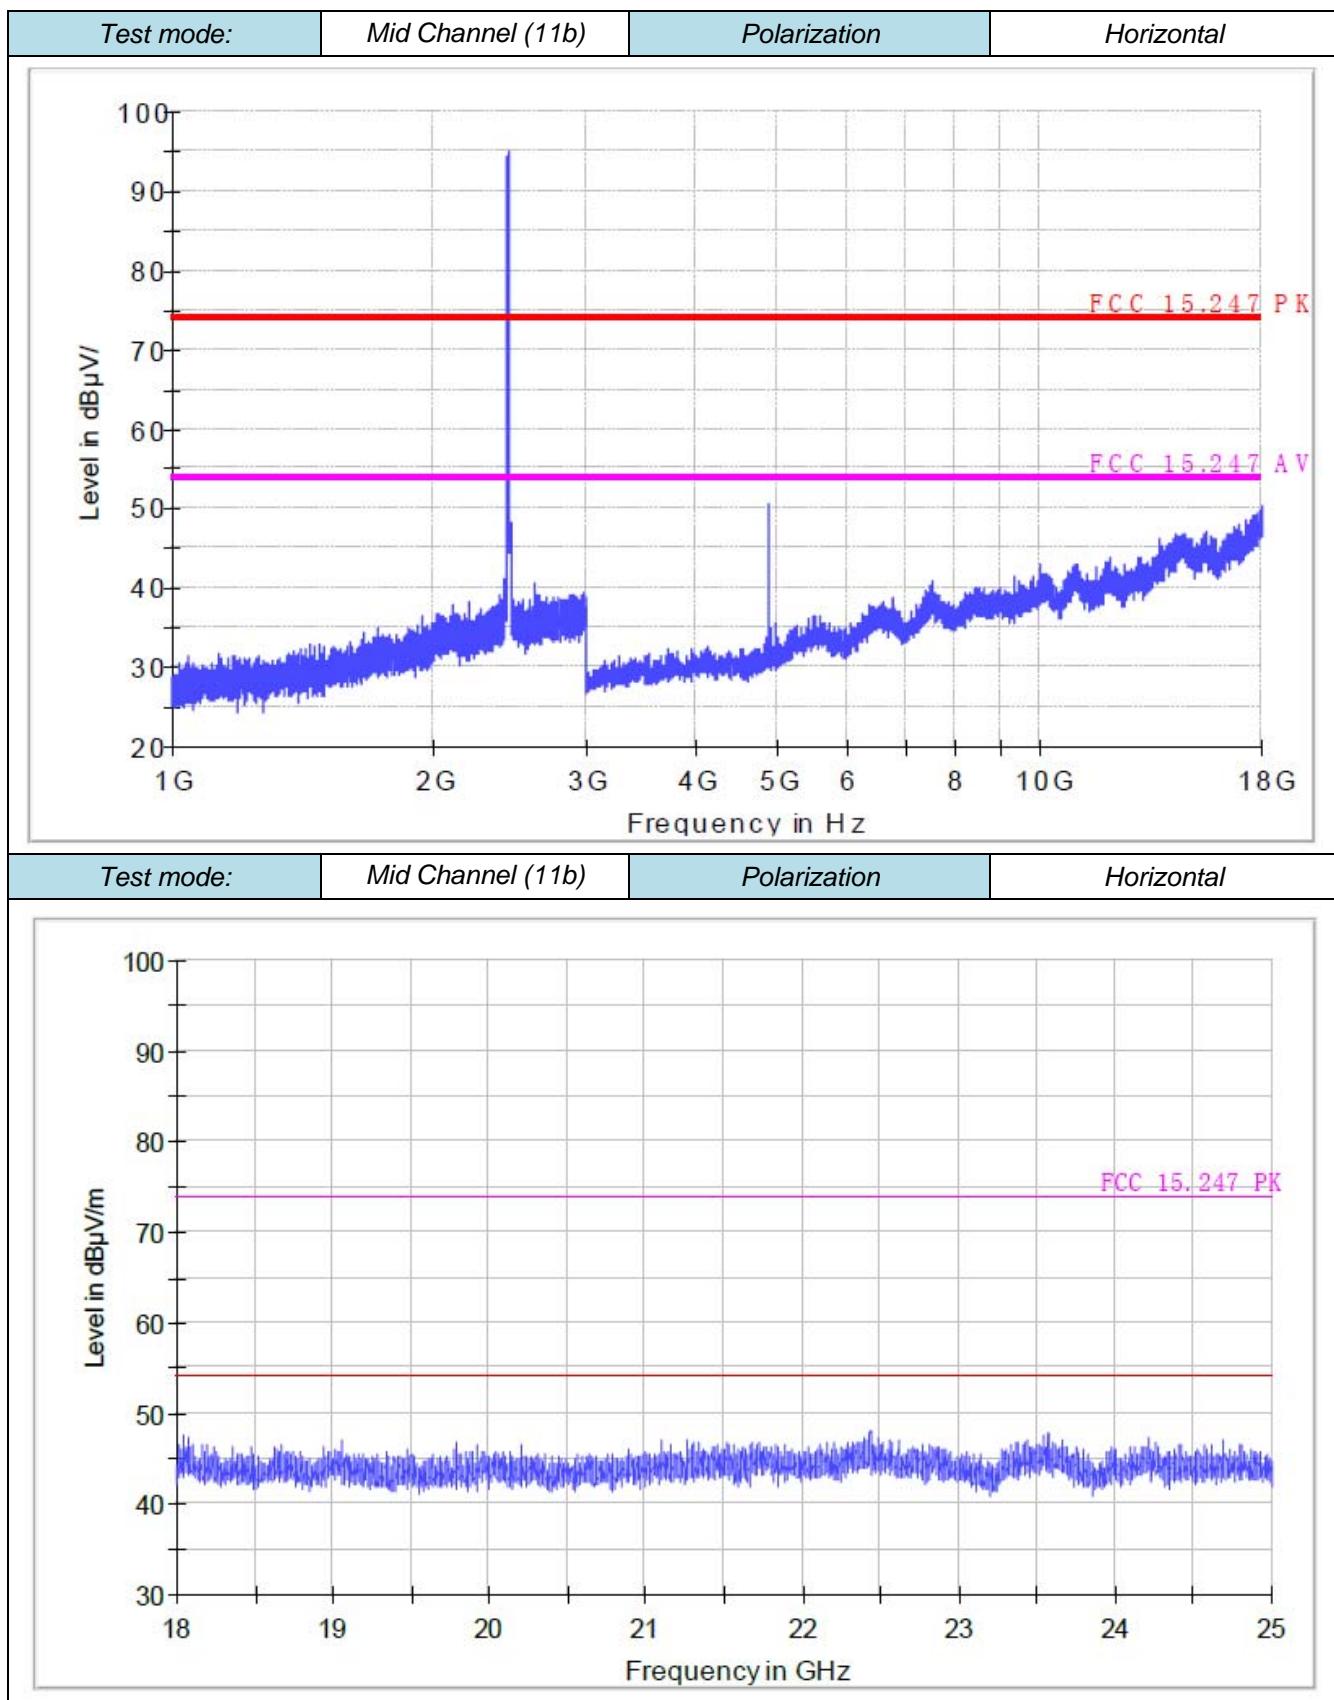

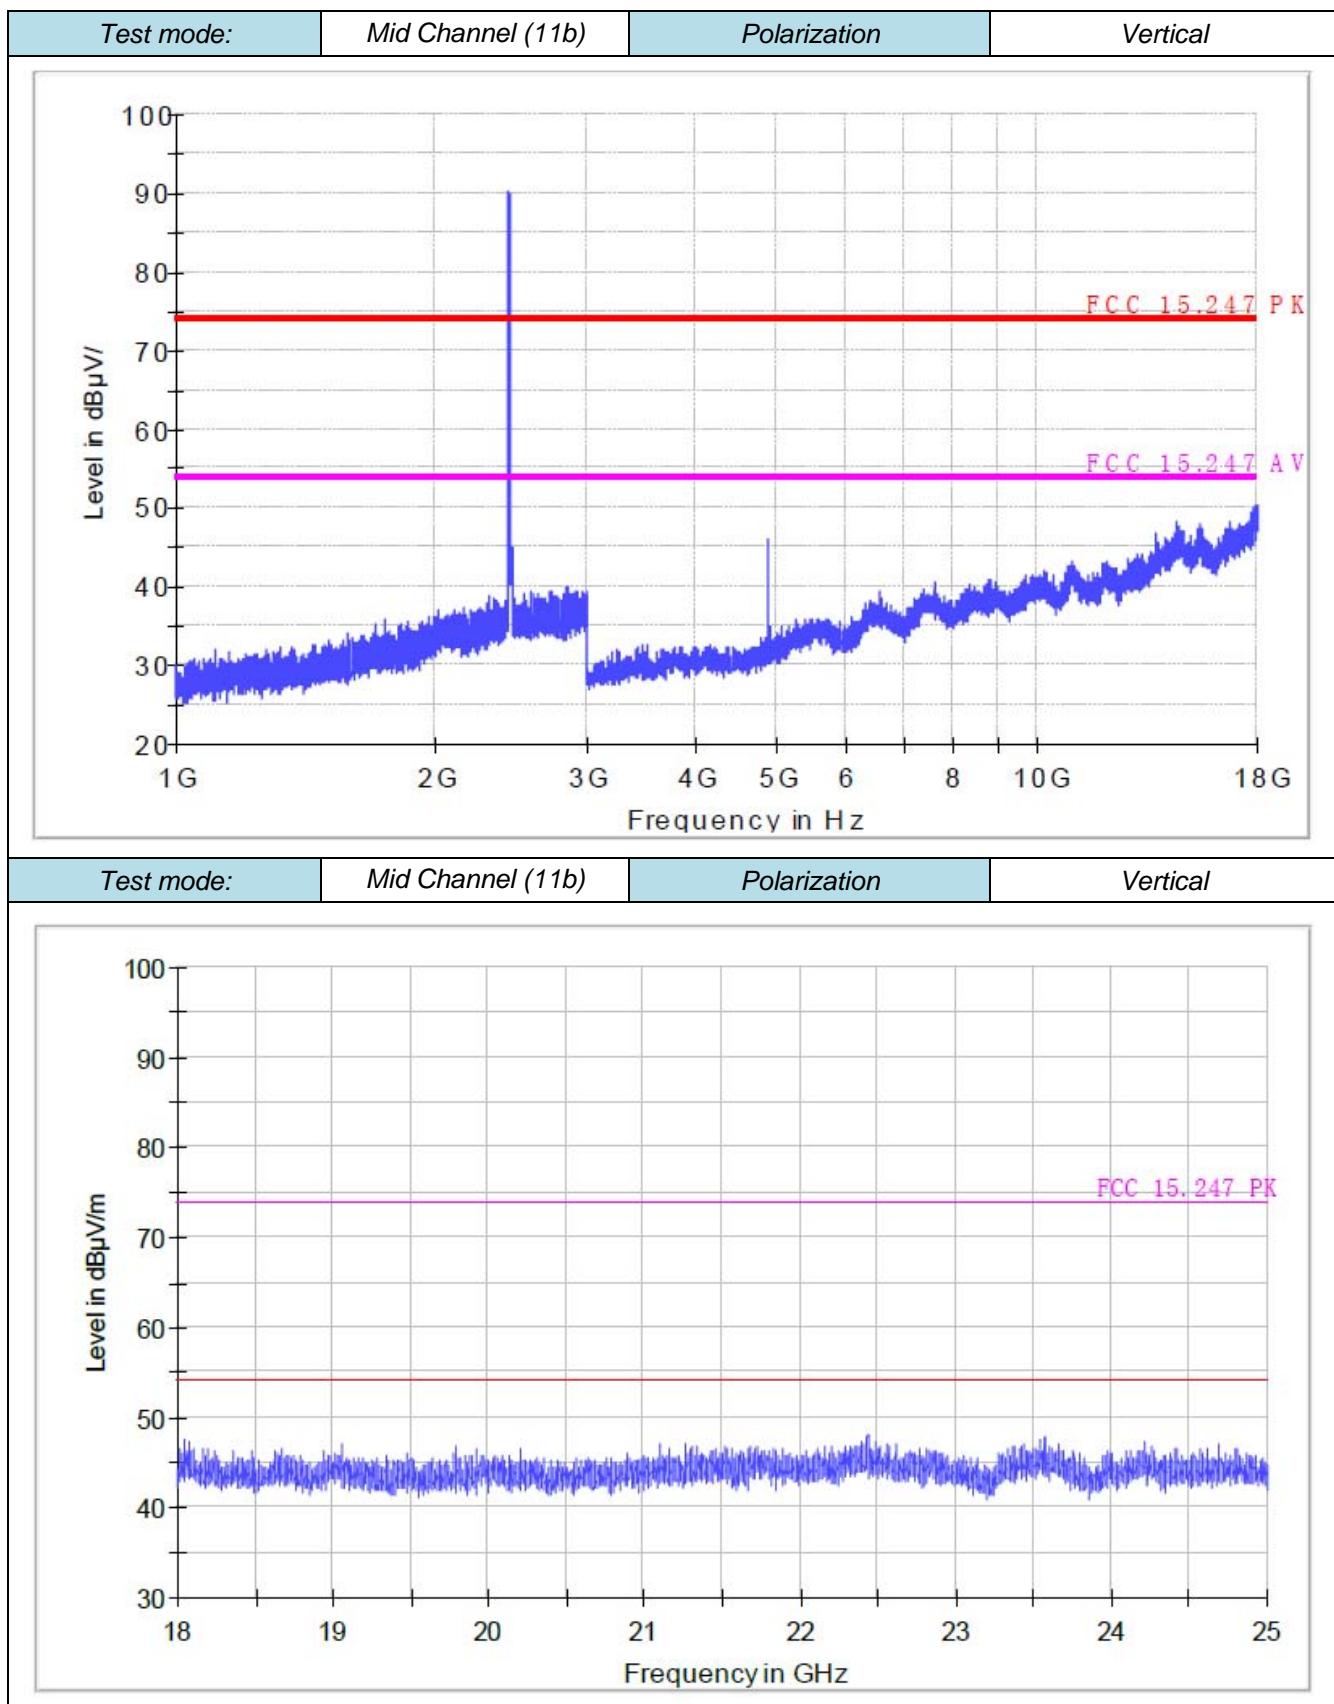


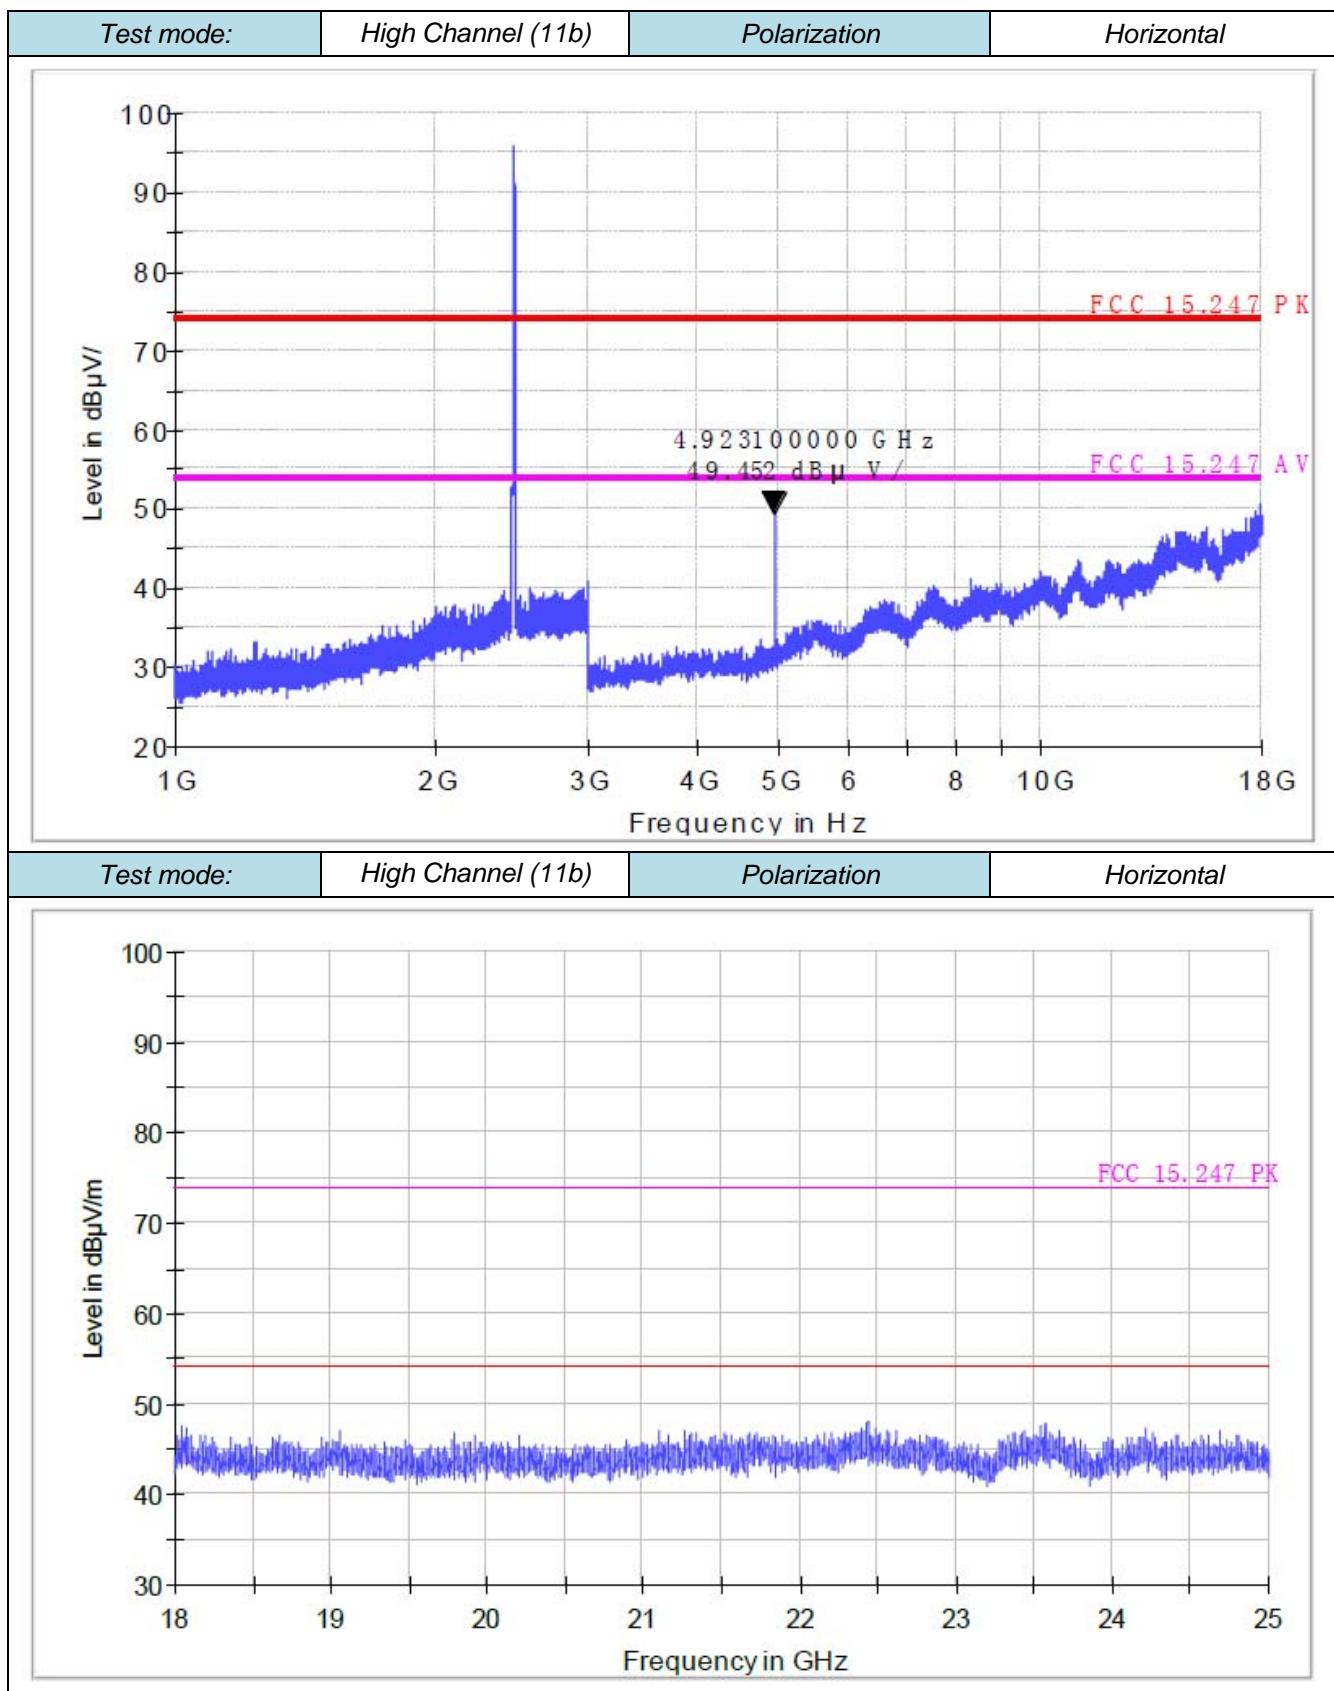

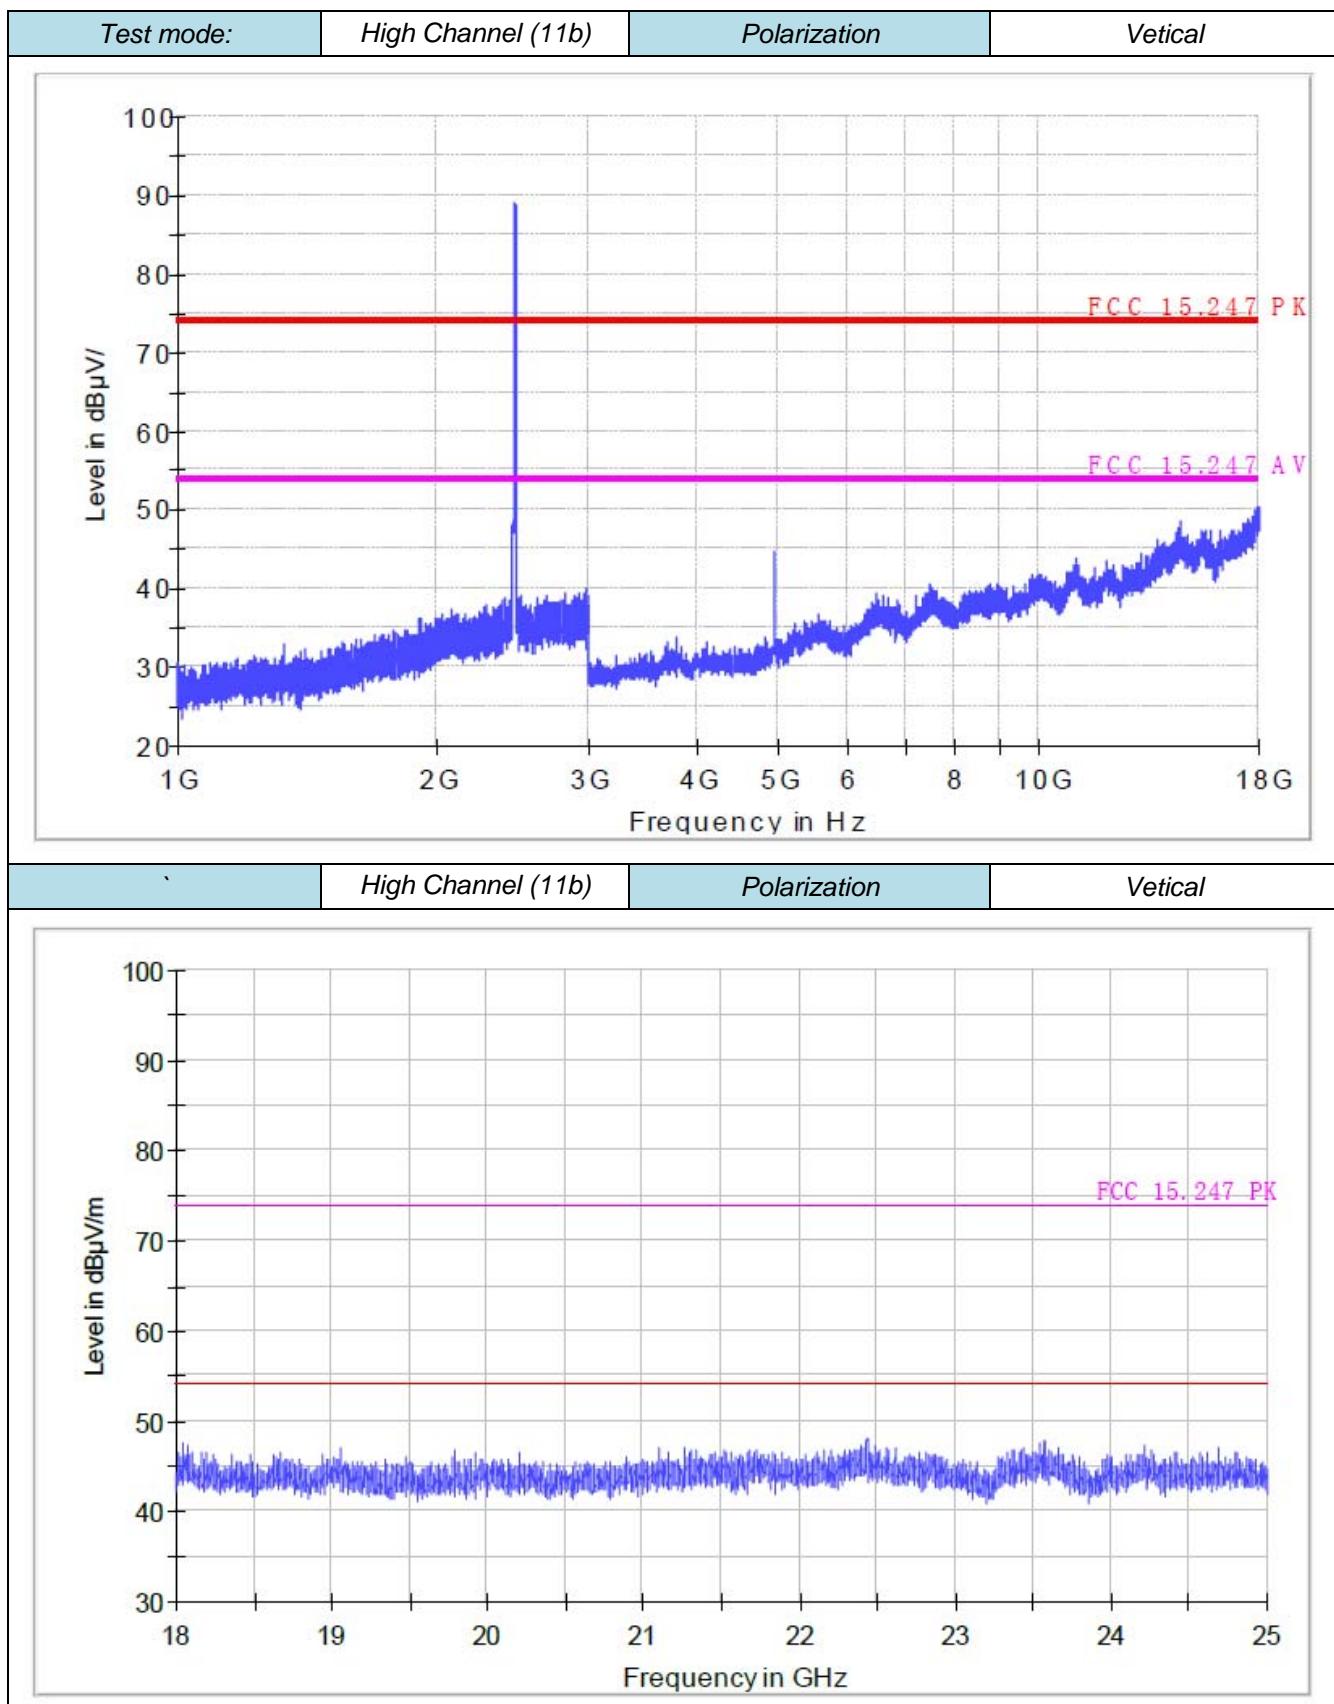

4.3 Maximum Peak Output Power

TEST CONFIGURATION



TEST PROCEDURE

According to KDB558074 D01 DTS Meas Guidance v03:

PKPM1 Peak power meter method: The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.

Maximum conducted (average) output power: As an alternative to spectrum analyzer or EMI receiver measurements, measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the conditions listed below are satisfied.

1. The EUT is configured to transmit continuously, or to transmit with a constant duty factor.
2. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
3. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.

If the transmitter does not transmit continuously, measure the duty cycle (x) of the transmitter output signal as described in Section 6.0.

Measure the average power of the transmitter. This measurement is an average over both the on and off periods of the transmitter.

Adjust the measurement in dBm by adding $10\log(1/x)$, where x is the duty cycle to the measurement result.

LIMIT

The Maximum Peak Output Power Measurement is 30dBm.

TEST RESULTS

Remark: We measured output power at difference data rate for each mode and recorded worst case for each mode.

4.3.1 802.11b Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 1 | 2412 | 16.53 | 30 | PASS |
| 6 | 2437 | 16.87 | 30 | PASS |
| 11 | 2462 | 15.74 | 30 | PASS |

Note:

1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable lose.

4.3.2 802.11g Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 1 | 2412 | 15.55 | 30 | PASS |
| 6 | 2437 | 16.81 | 30 | PASS |
| 11 | 2462 | 15.52 | 30 | PASS |

Note:

1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable lose.

4.3.3 802.11n HT20 Test Mode

A. Test Verdict

| Channel | Frequency (MHz) | Measured Output Peak Power (dBm) | Limits (dBm) | Verdict |
|---------|-----------------|----------------------------------|--------------|---------|
| 1 | 2412 | 15.64 | 30 | PASS |
| 6 | 2437 | 15.82 | 30 | PASS |
| 11 | 2462 | 15.43 | 30 | PASS |

Note:

1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.

4.4 Power Spectral Density

TEST CONFIGURATION



TEST PROCEDURE

According to KDB 558074 D01 V03 Method PKPSD (peak PSD) this procedure shall be used if maximum peak conducted output power was used to demonstrate compliance, and is optional if the maximum conducted (average) output power was used to demonstrate compliance.

1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
4. Set the VBW $\geq 3 \text{ RBW}$.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

LIMIT

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

TEST RESULTS

4.4.1 802.11b Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/3KHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|-----------------------|---------------|-------------------|---------|
| 1 | 2412 | 0.846 | Plot 4.4.1 A | 8 | PASS |
| 6 | 2437 | 1.935 | Plot 4.4.1 B | 8 | PASS |
| 11 | 2462 | 1.192 | Plot 4.4.1 C | 8 | PASS |


Note:

1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

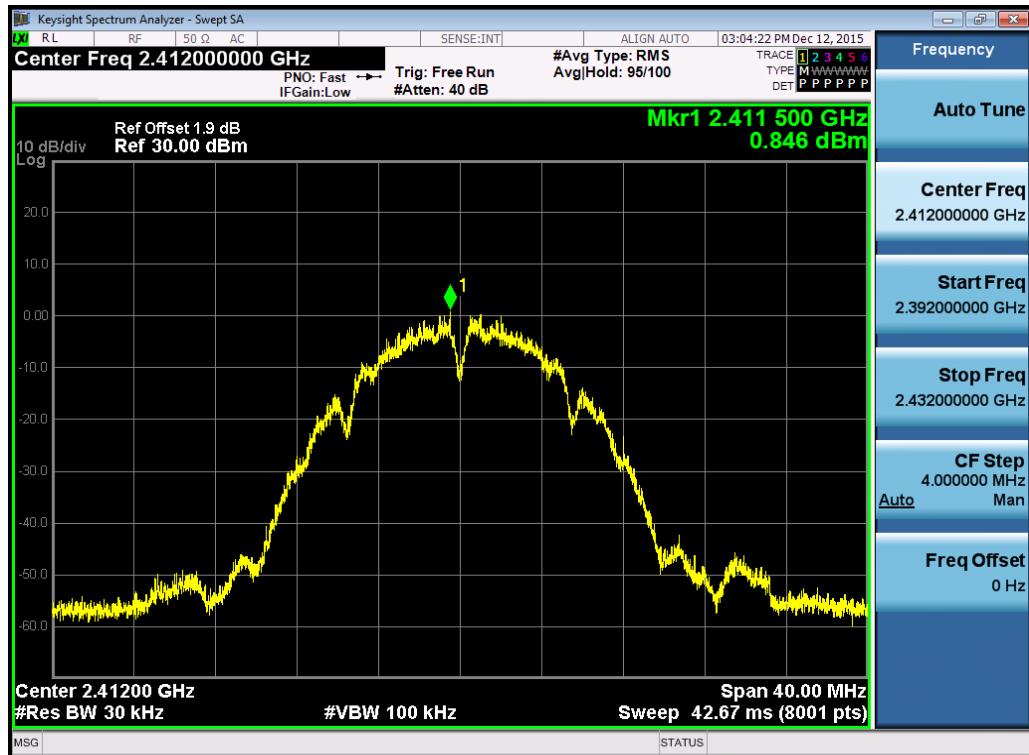

(Plot 4.4.1 A: Channel 1: 2412MHz @ 802.11b)

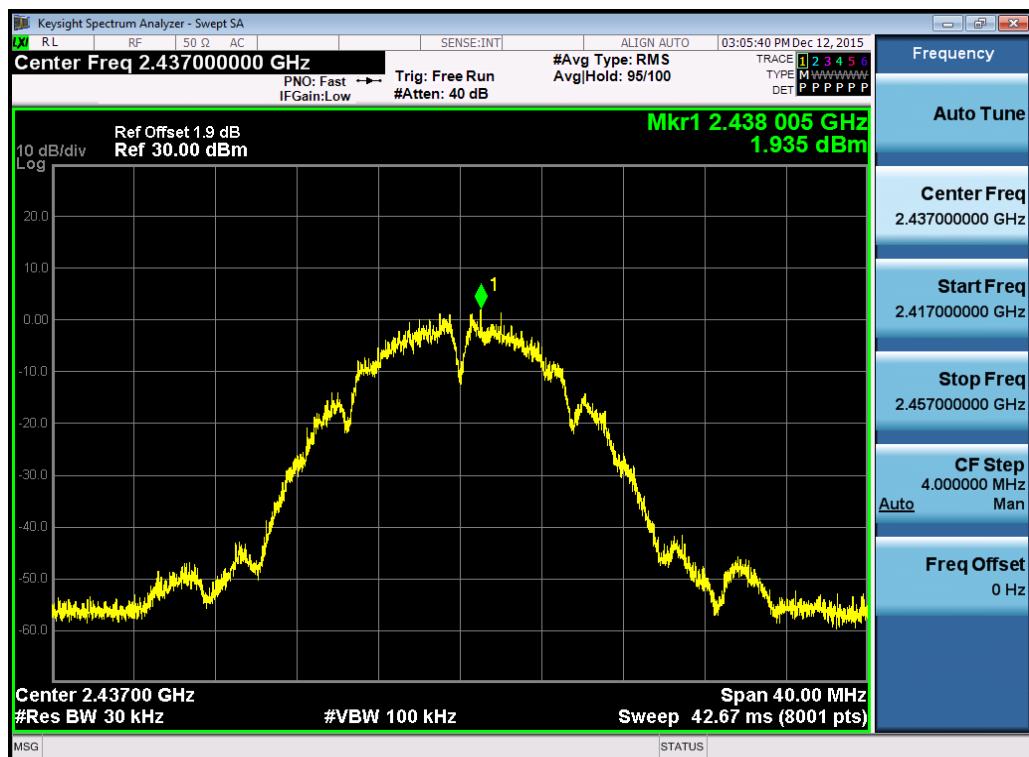

(Plot 4.4.1 B: Channel 6: 2437MHz @ 802.11b)

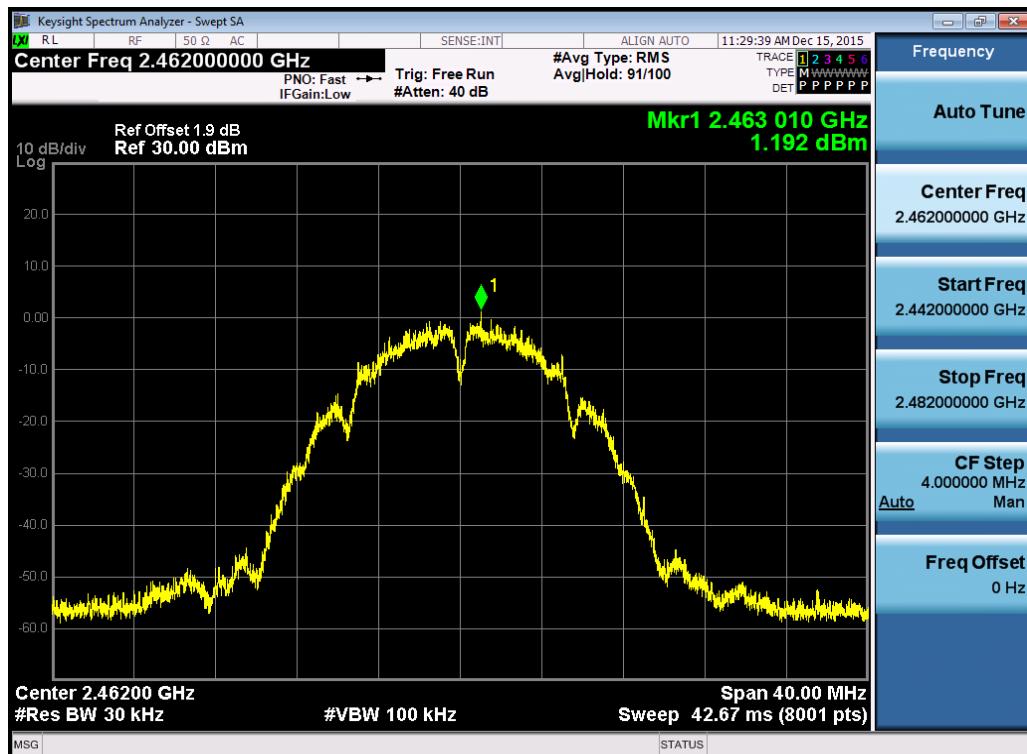

(Plot 4.4.1 C: Channel 11: 2462MHz @ 802.11b)

4.4.2 802.11g Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/30KHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|------------------------|---------------|-------------------|---------|
| 1 | 2412 | -8.259 | Plot 4.4.2 A | 8 | PASS |
| 6 | 2437 | -7.377 | Plot 4.4.2 B | 8 | PASS |
| 11 | 2462 | -8.736 | Plot 4.4.2 C | 8 | PASS |


Note:

1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.


B. Test Plots

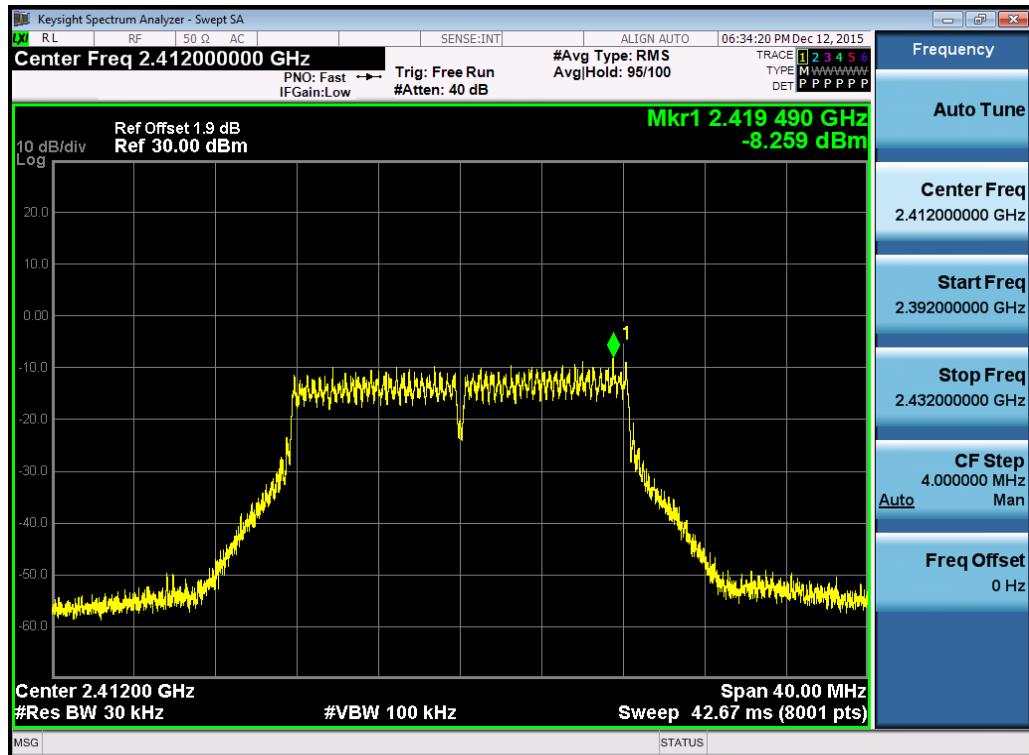

(Plot 4.4.2 A: Channel 1: 2412MHz @ 802.11g)

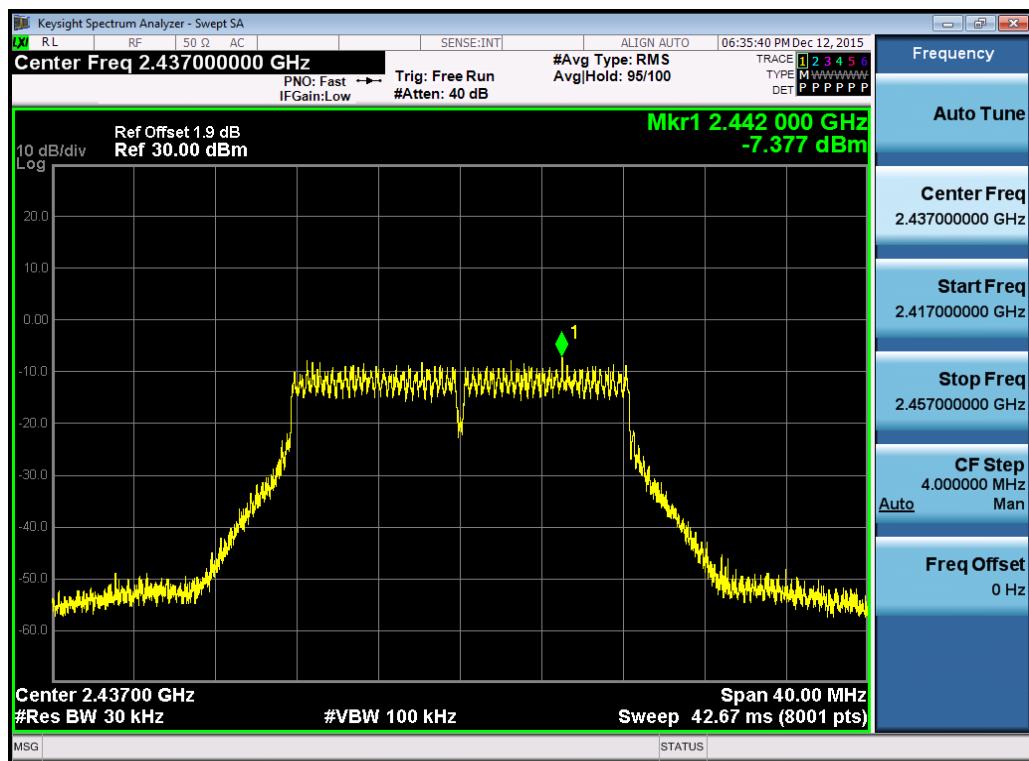

(Plot 4.4.2 B: Channel 6: 2437MHz @ 802.11g)

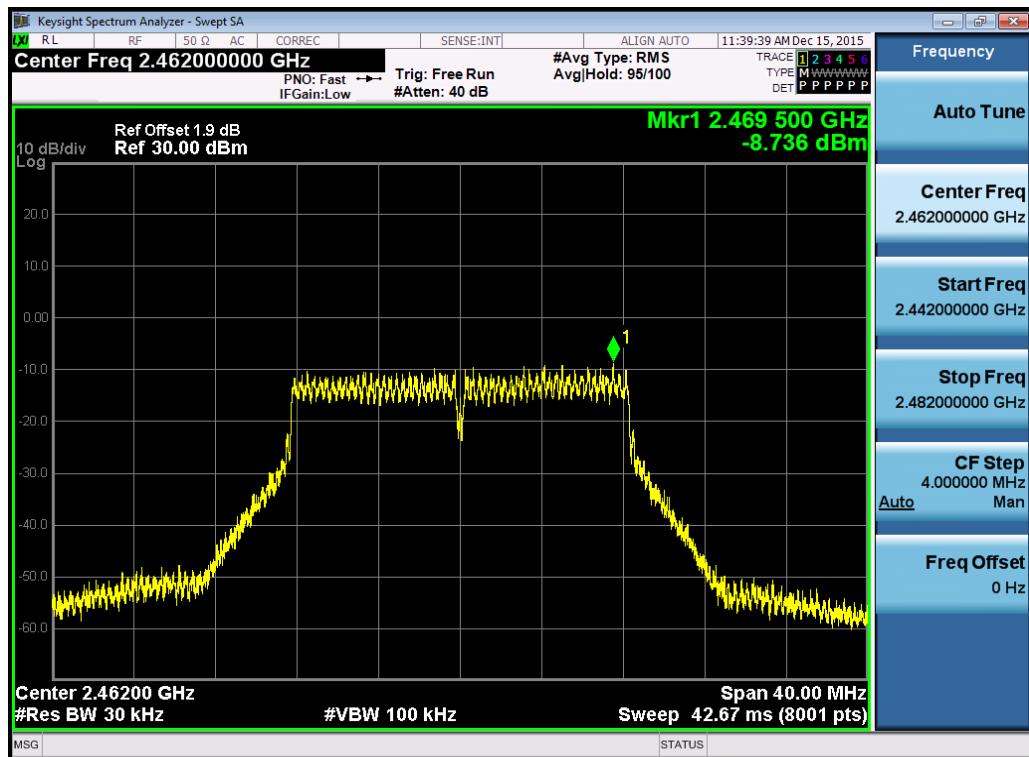

(Plot 4.4.2 C: Channel 11: 2462MHz @ 802.11g)

4.4.3 802.11n HT20 Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Report PSD (dBm/30KHz) | Refer to Plot | Limits (dBm/3KHz) | Verdict |
|---------|-----------------|------------------------|---------------|-------------------|---------|
| 1 | 2412 | -8.530 | Plot 4.4.3 A | 8 | PASS |
| 6 | 2437 | -7.847 | Plot 4.4.3 B | 8 | PASS |
| 11 | 2462 | -8.485 | Plot 4.4.3 C | 8 | PASS |


Note:

1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.


B. Test Plot

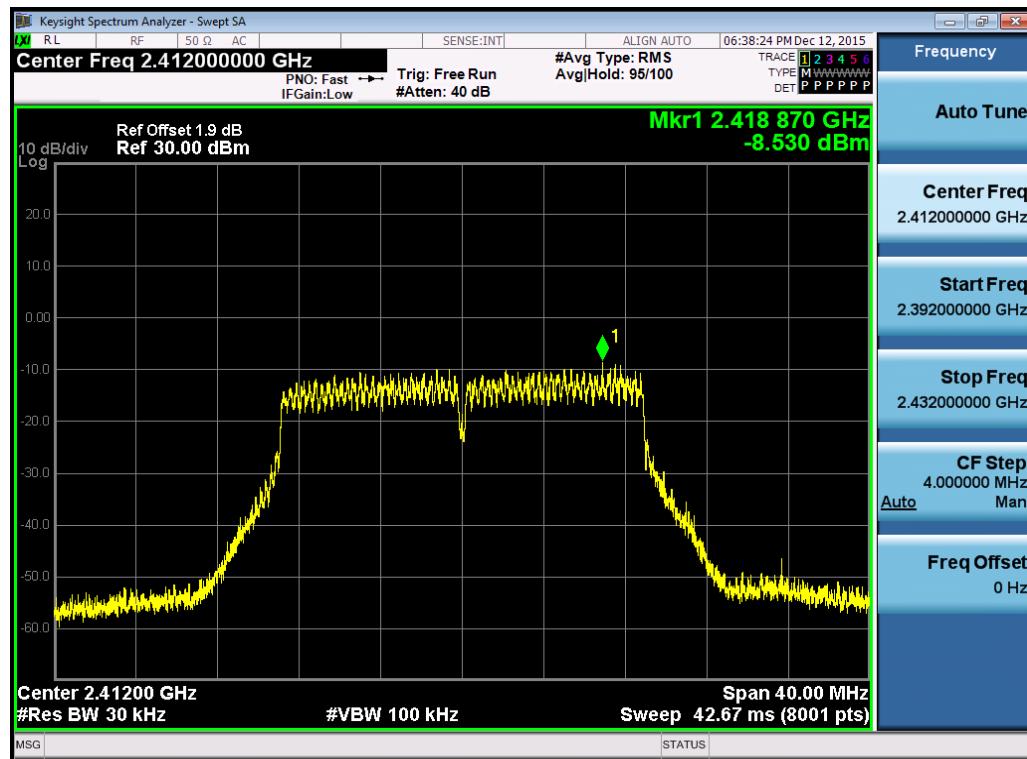

(Plot 4.4.3 A: Channel 1: 2412MHz @ 802.11n HT20)

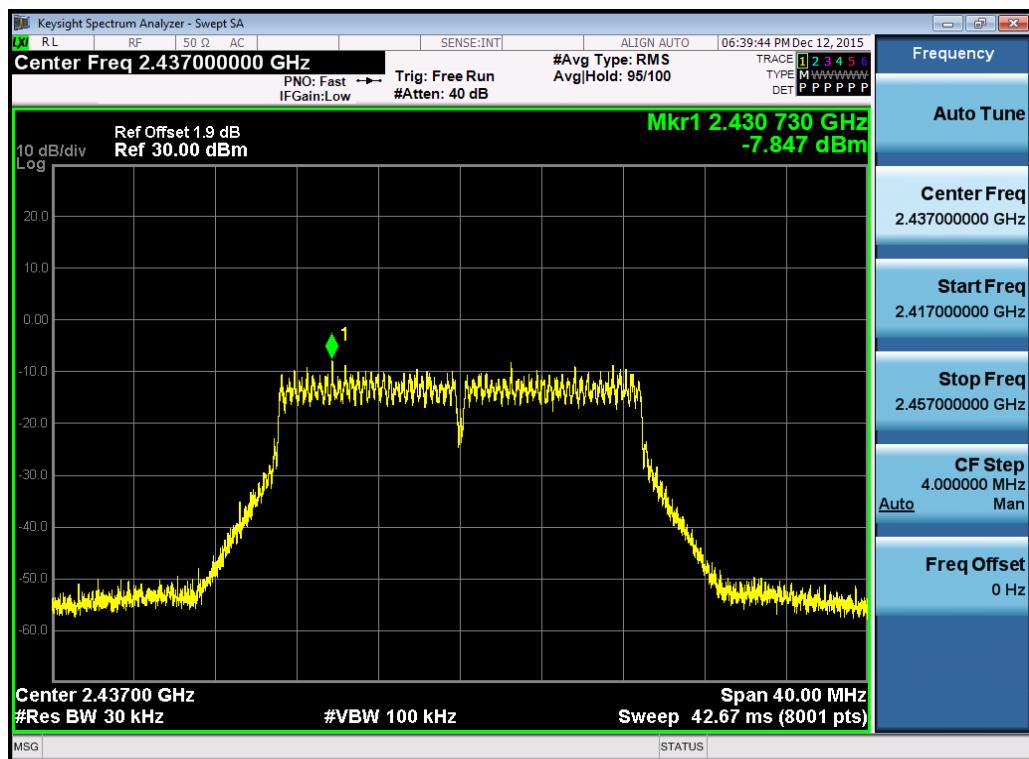

(Plot 4.4.3 B: Channel 6: 2437MHz @ 802.11n HT20)

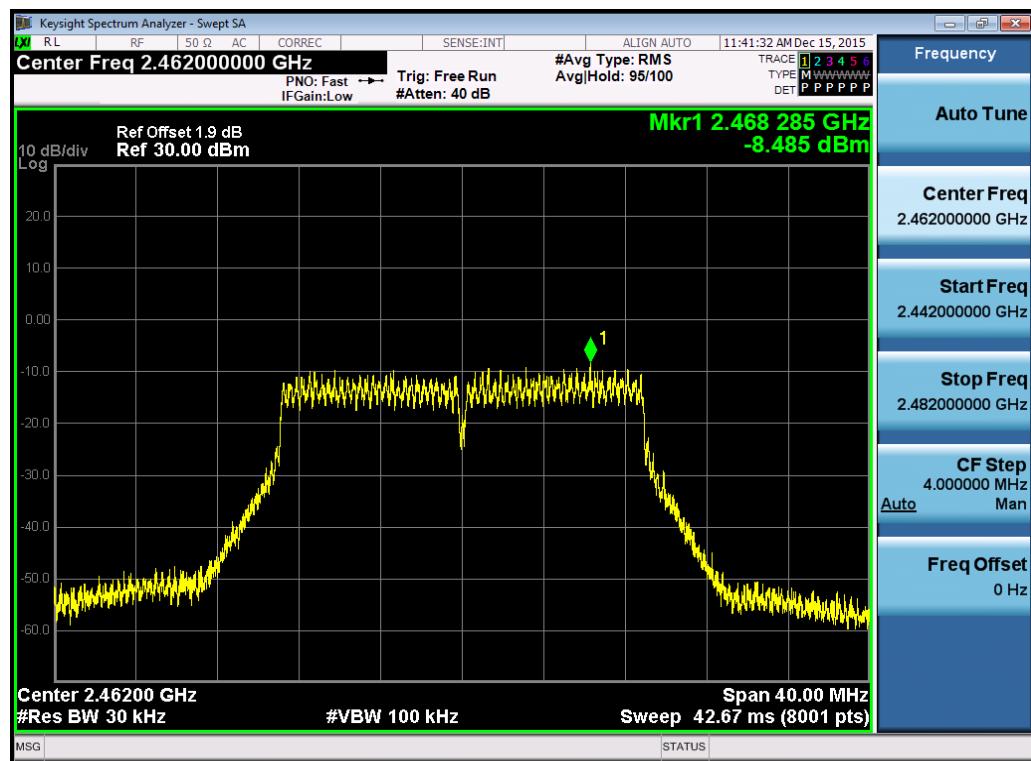

(Plot 4.4.3 C: Channel 11: 2462MHz @ 802.11n HT20)

4.5 Band Edge Compliance of RF Emission

TEST REQUIREMENT


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

TEST PROCEDURE


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, for Radiated emissions restricted band RBW=1MHz, VBW=3MHz.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

TEST CONFIGURATION

For Radiated

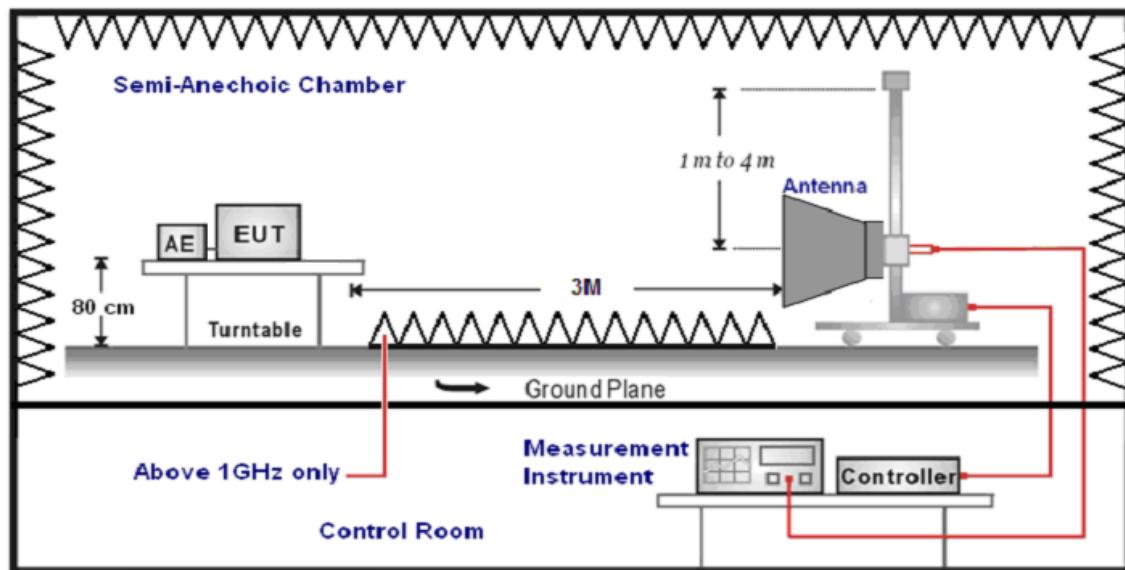

For Conducted



TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Maximum procedure was performed by raising the receiving antenna from 1m to 4m and rotating the turn table from 0°C to 360°C to acquire the highest emissions from EUT.

3. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
4. Repeat above procedures until all frequency measurements have been completed..
5. The distance between test antenna and EUT was 3 meter:
6. Setting test receiver/spectrum as following table states:

| Test Frequency range | Test Receiver/Spectrum Setting | Detector |
|----------------------|--|-----------------------|
| 1GHz-40GHz | Peak Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Peak (Receiver) |
| 1GHz-40GHz | Average Value: RBW=1MHz/VBW=3MHz, Sweep time=Auto | Average (Receiver) |

LIMIT

Below -20dB of the highest emission level in operating band.

Radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a)


TEST RESULTS


4.5.1 For Radiated Bandedge Measurement


Remark:


1. The Bandedge was measured at difference data rate for each mode and recorded worst case for 11B

802.11B:

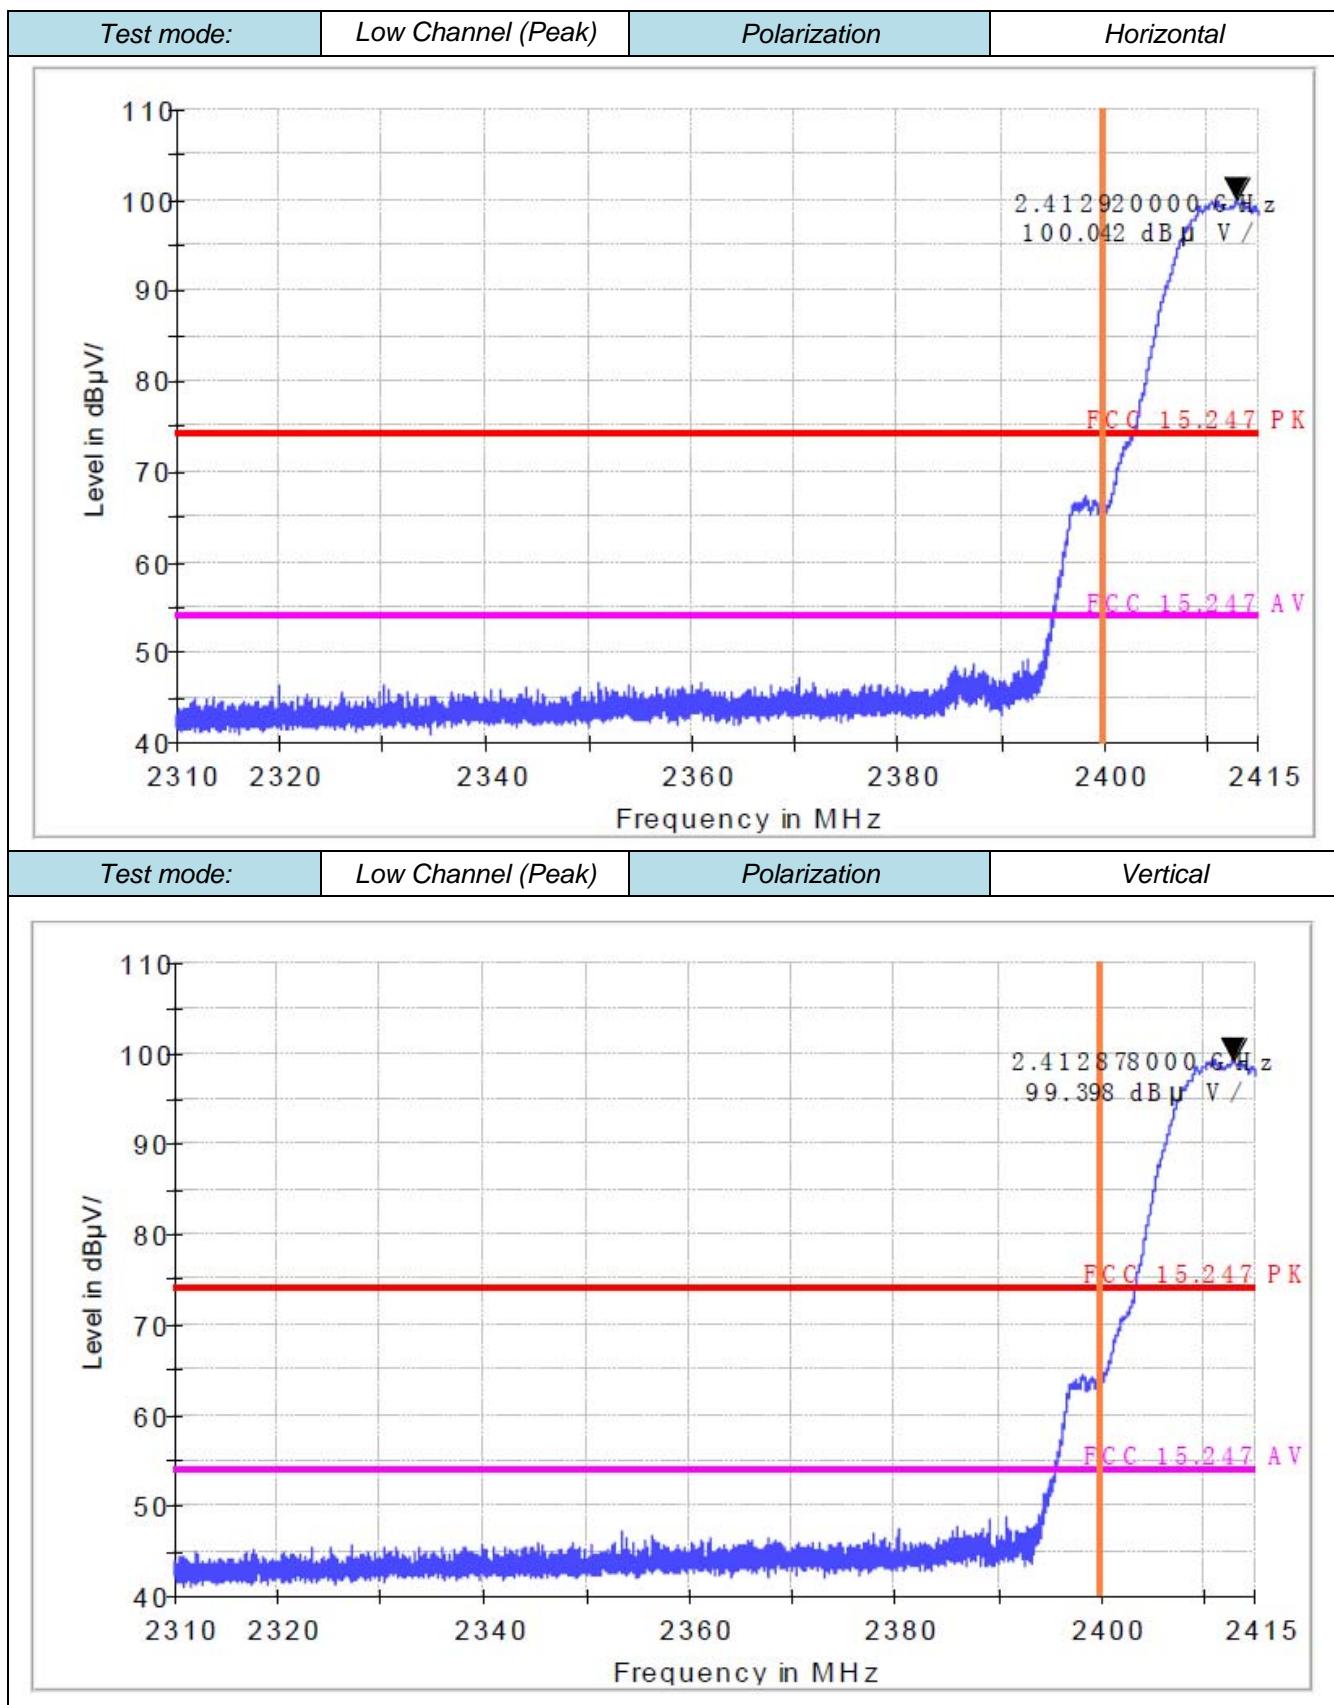

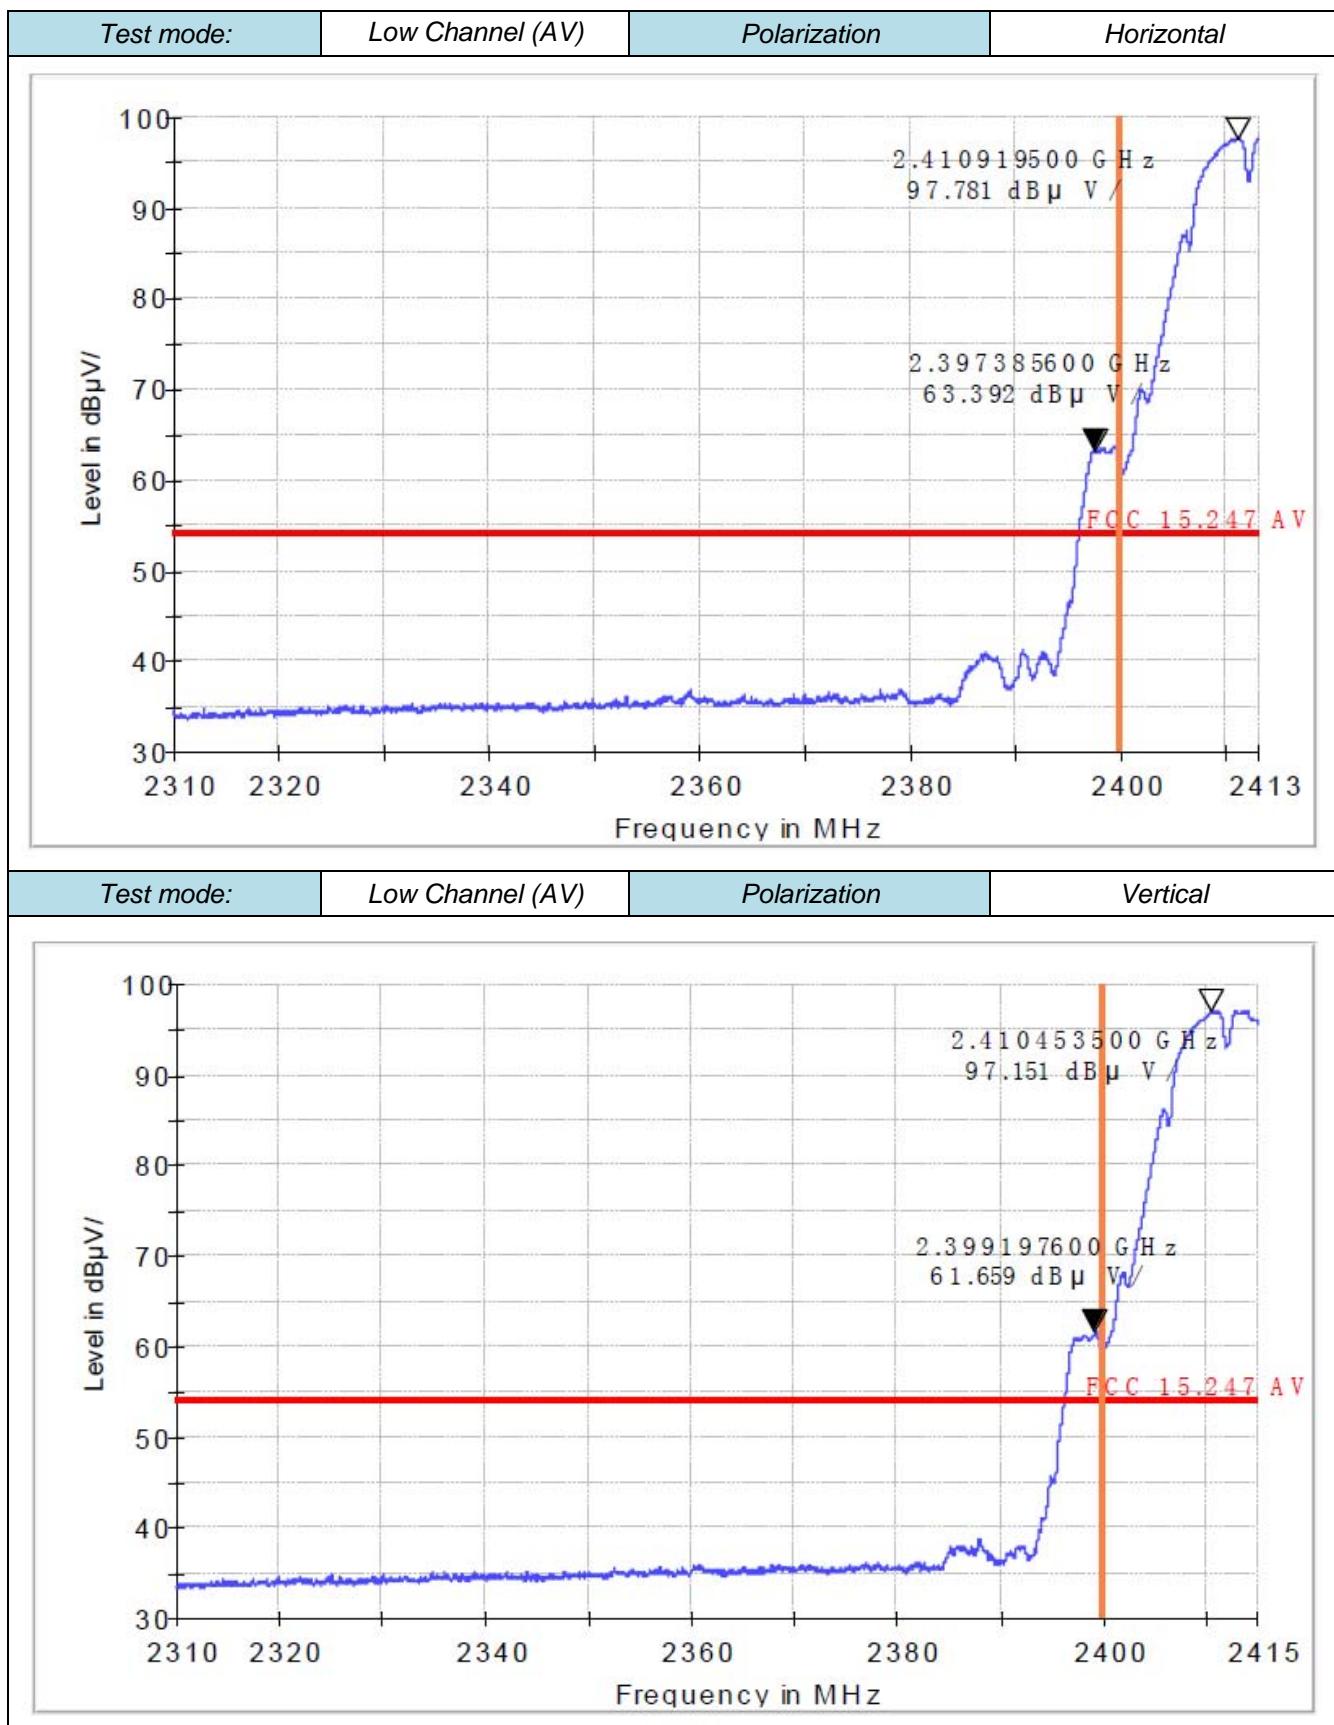

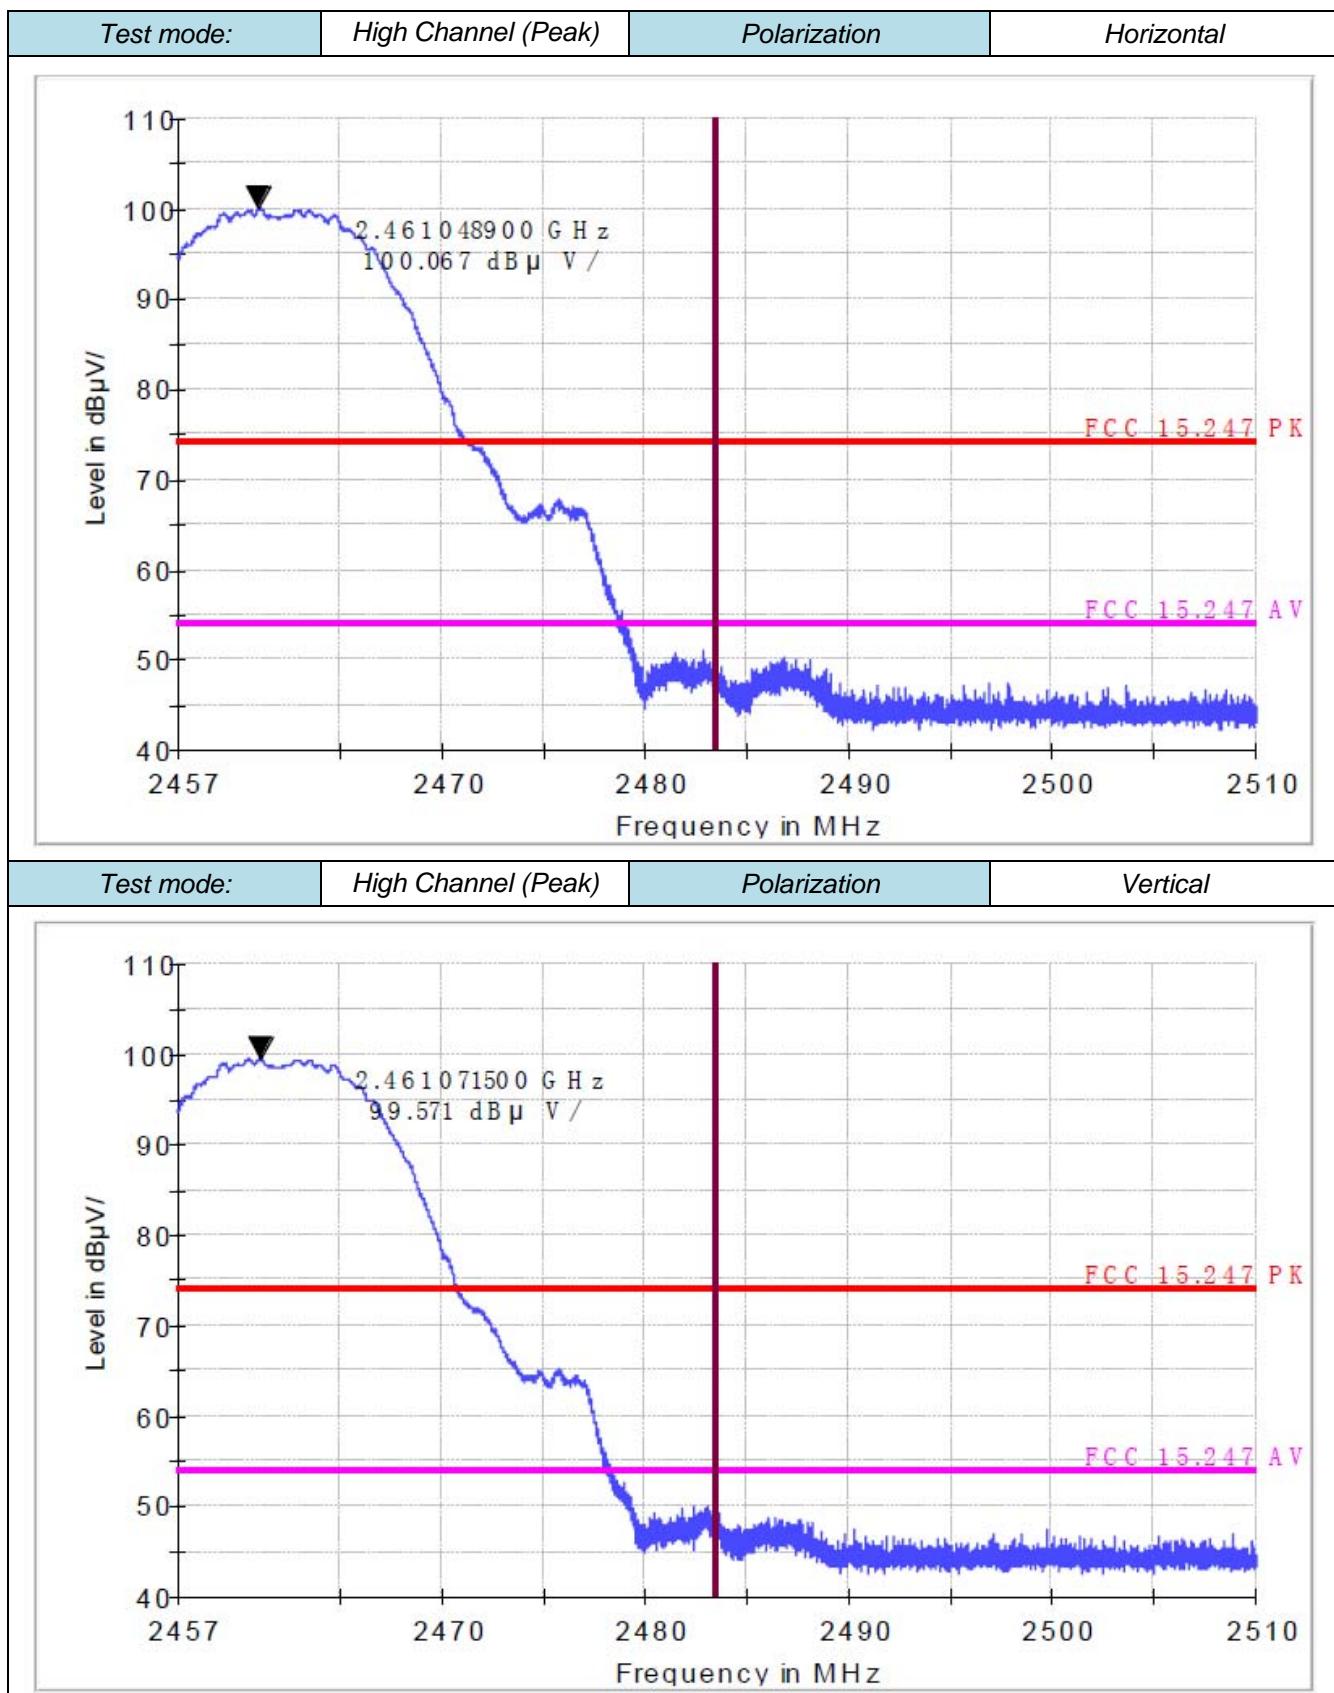


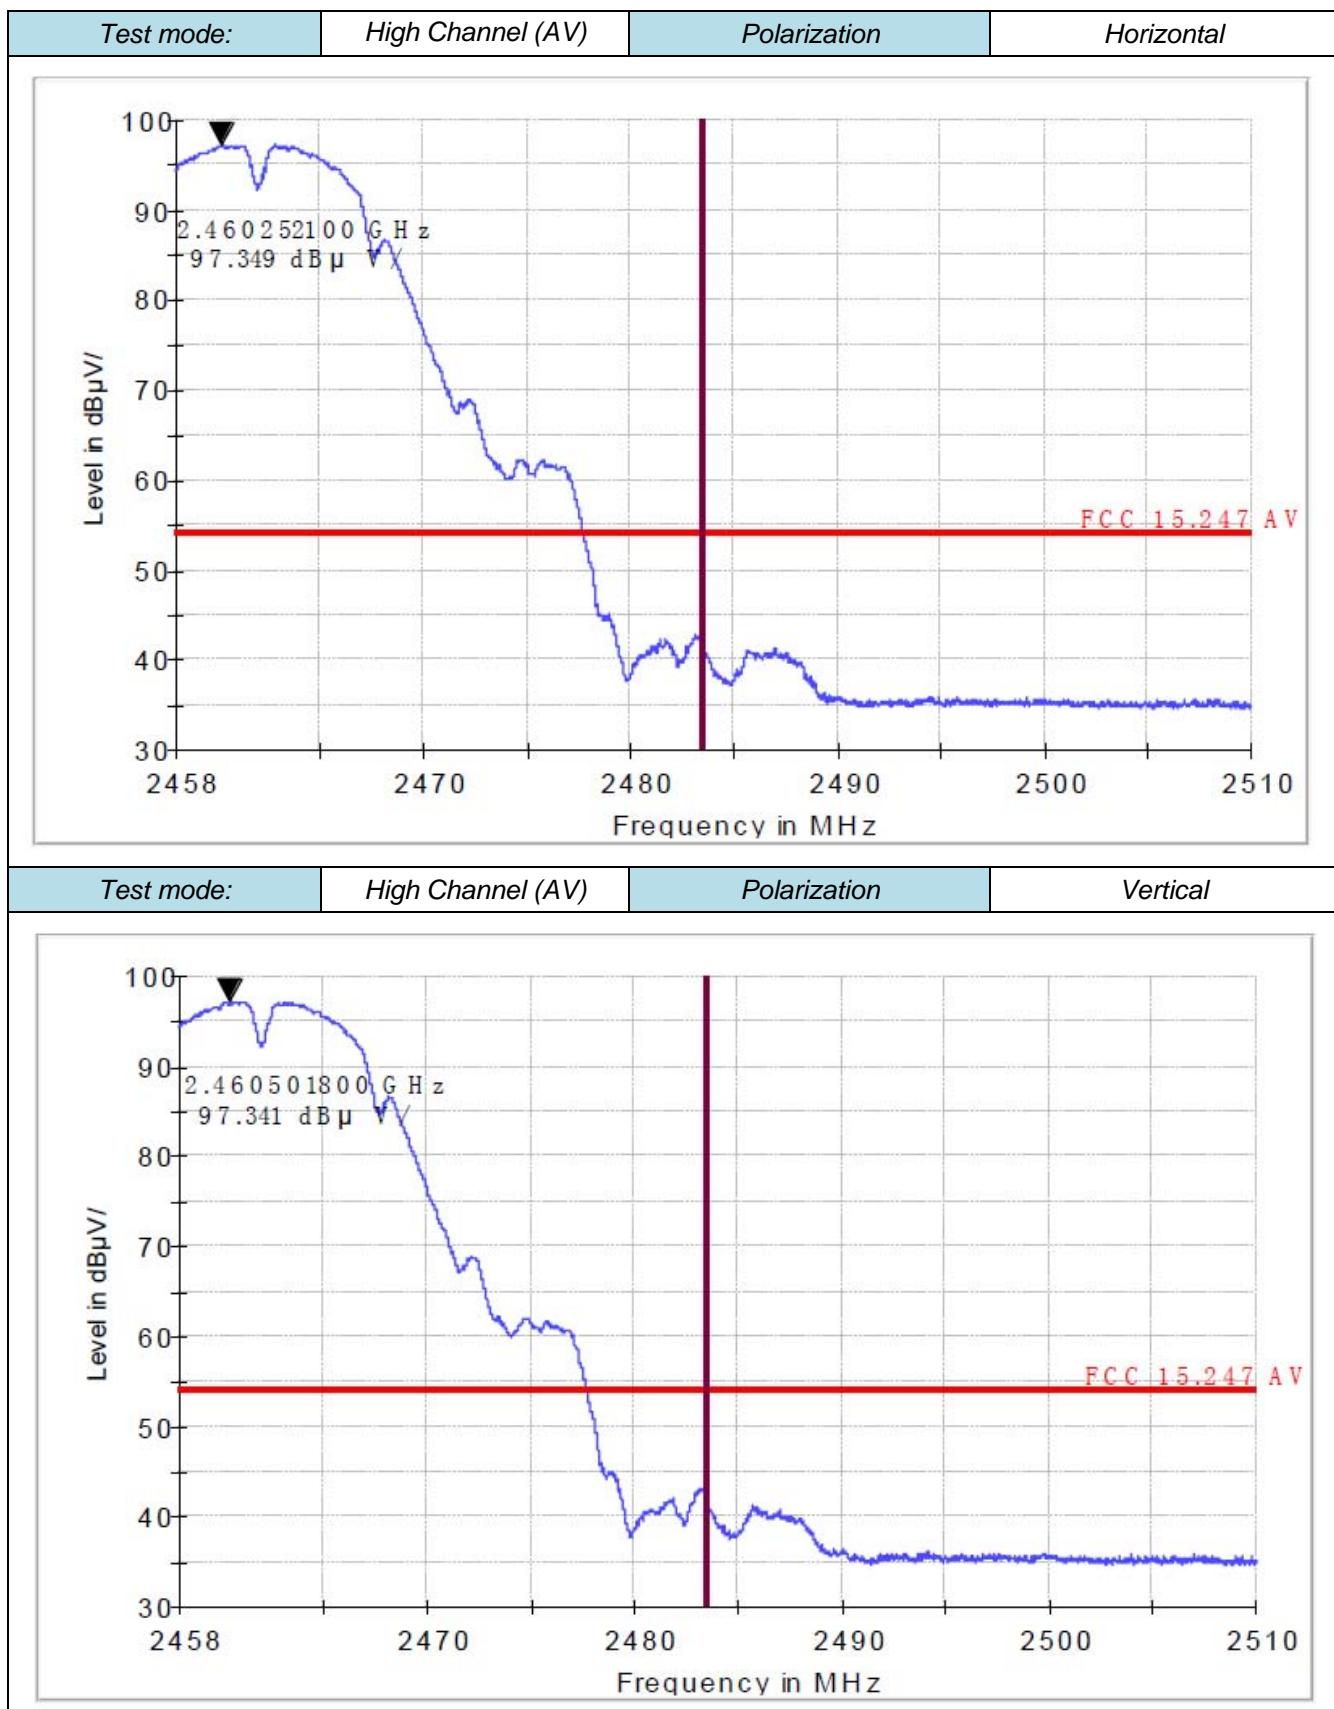


4.5.2 For Conducted Bandedge Measurement

802.11b

A. Test Plots

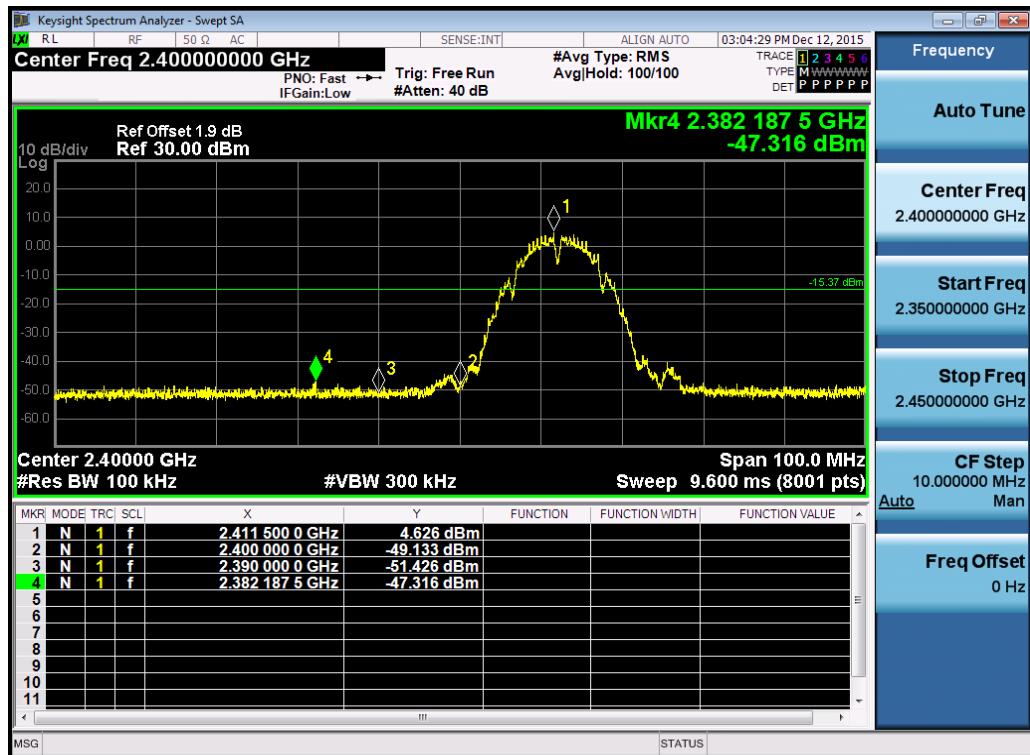


(Plot 4.5.2.1 A: Channel 01: 2412MHz @ 802.11 b)

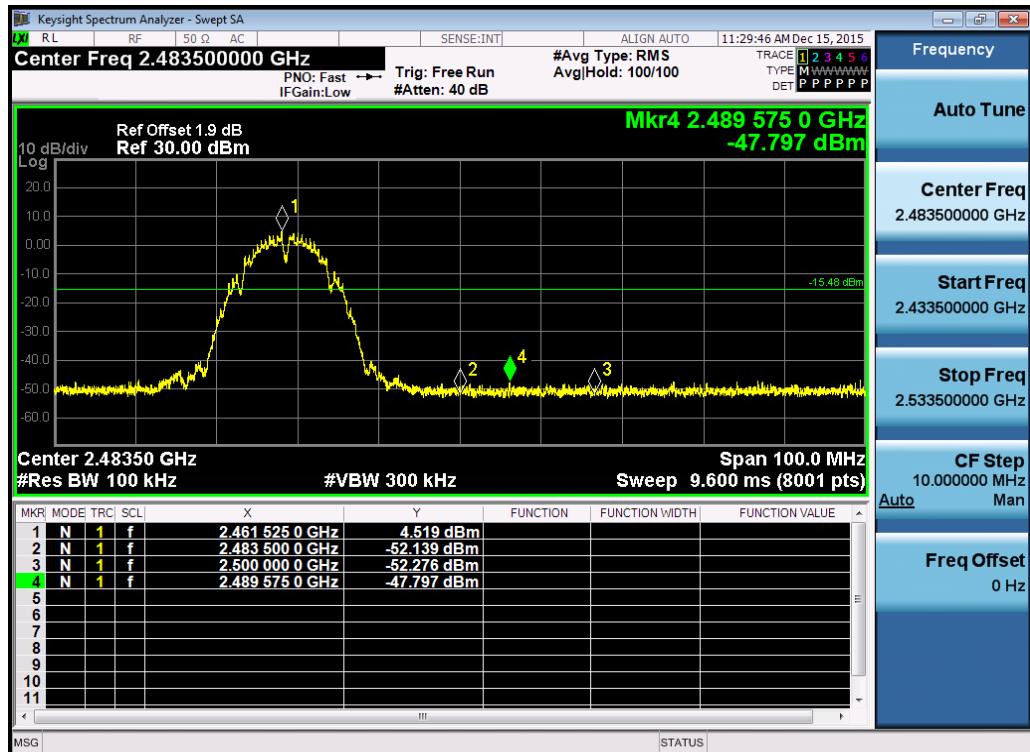


(Plot 4.5.2.1 B: Channel 11: 2462MHz @ 802.11 b)

802.11g

A. Test Plots

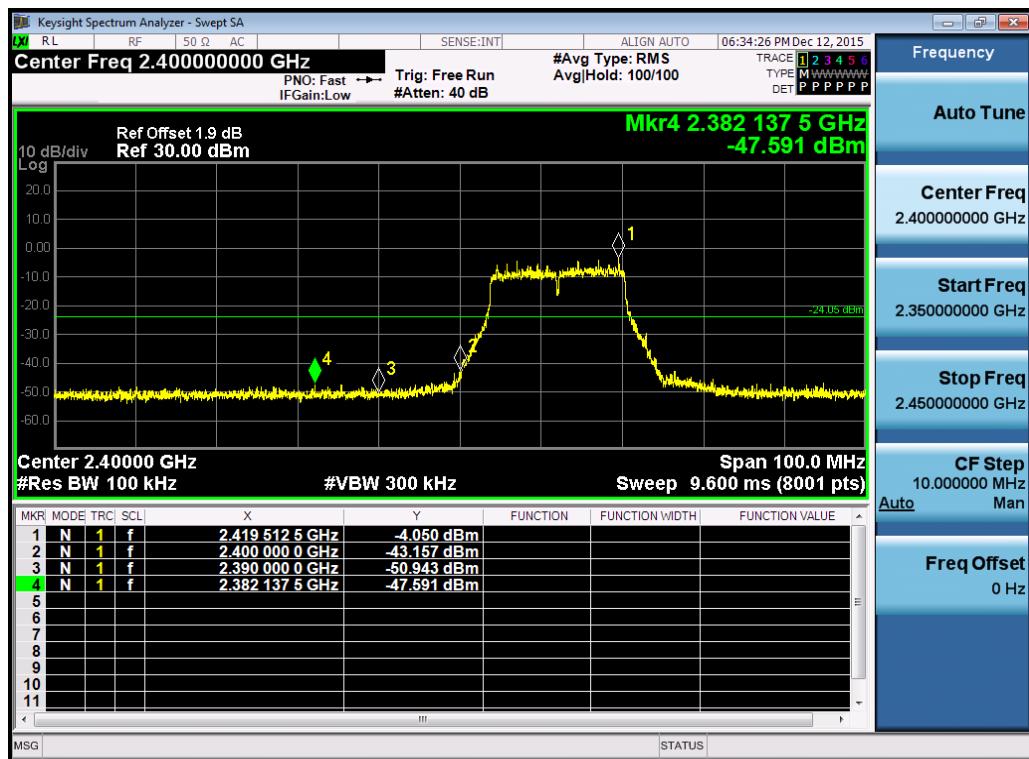


(Plot 4.5.2.2 A: Channel 01: 2412MHz @ 802.11 g)

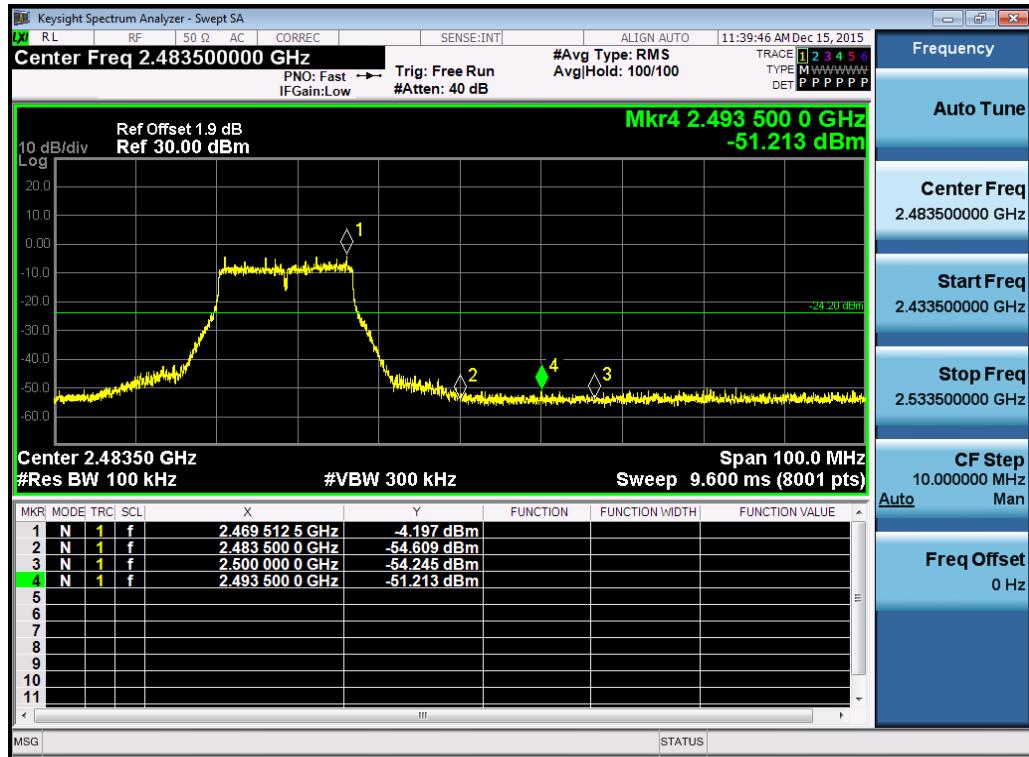


(Plot 4.5.2.2 B: Channel 11: 2462MHz @ 802.11 g)

802.11n HT20

A. Test Plots

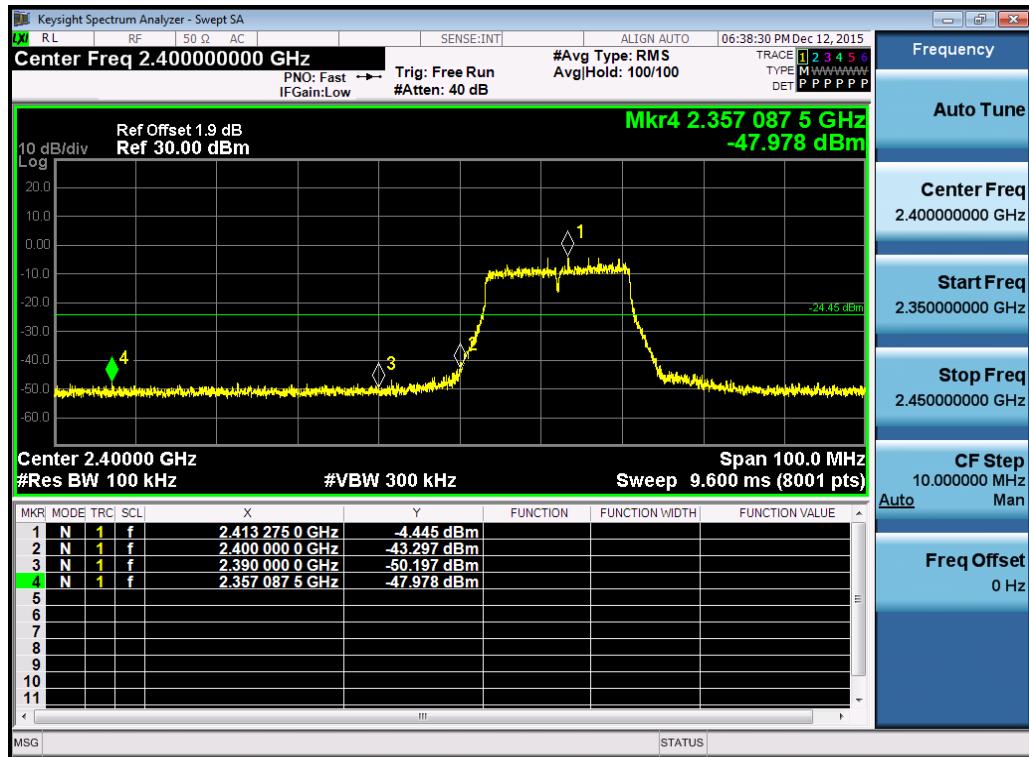


Plot 4.5.2.3 A: Channel 01: 2412MHz @ 802.11n HT20

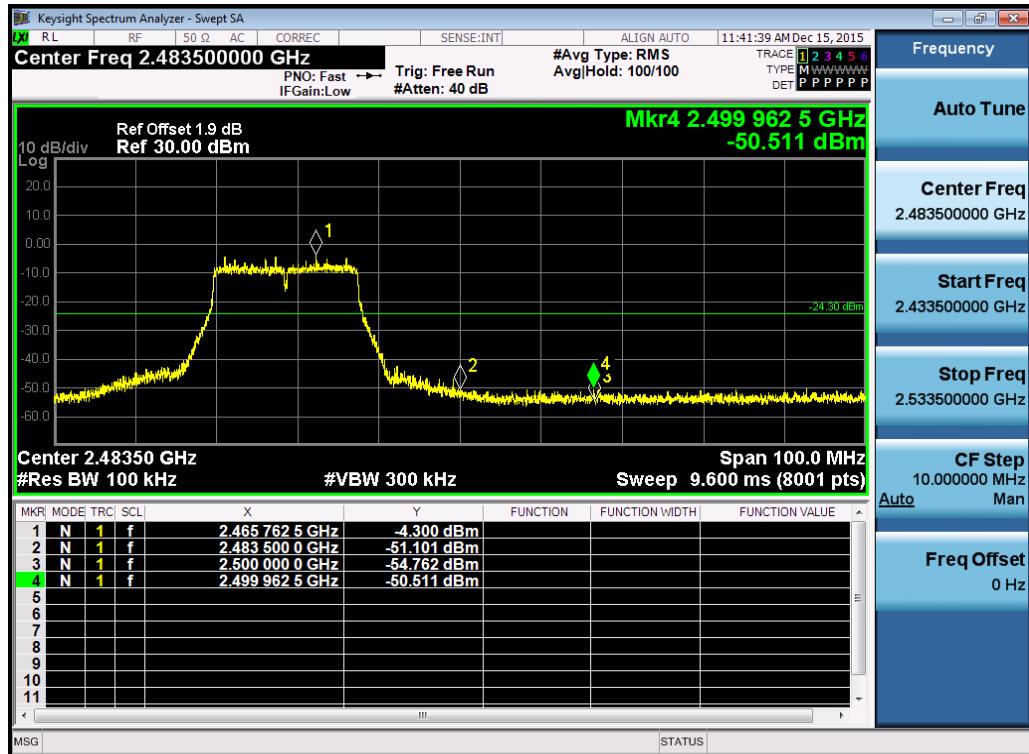

(Plot 4.5.2.3 B: Channel 11: 2412MHz @ 802.11n HT20)

4.6 Spurious RF Conducted Emission

TEST CONFIGURATION



TEST PROCEDURE

The Spurious RF conducted emissions compliance of RF radiated emission should be measured by following the guidance in ANSI C63.10-2009 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization etc. Set RBW=100 kHz and VBW= 300 KHz to measure the peak field strength, and measure frequency range from 9 KHz to 26.5GHz.

LIMIT

1. Below -20dB of the highest emission level in operating band.
2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

TEST RESULTS

Remark: The measurement frequency range is from 9 KHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions and bandege measurement data.


4.6.1 802.11b Test Mode

A. Test Verdict


| Channel | Frequency (MHz) | Frequency Range | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|-----------------|---------------|-------------|---------|
| 1 | 2412 | 2.412 GHz | Plot 4.6.1 A1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.1 A2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.1 A3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.1 A4 | | |
| | | 10GHz-.15 GHz | Plot 4.6.1 A5 | | |
| | | 15GHz-.25 GHz | Plot 4.6.1 A6 | | |
| 6 | 2437 | 2.437 GHz | Plot 4.6.1 B1 | --- | PASS |
| | | 30MHz -26GHz | Plot 4.6.1 B2 | -20 | PASS |
| | | 3GHz-26.5 GHz | Plot 4.6.1 B3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.1 B4 | | |
| | | 10GHz-.15 GHz | Plot 4.6.1 B5 | | |
| | | 15GHz-.25 GHz | Plot 4.6.1 B6 | | |
| 11 | 2462 | 2.462 GHz | Plot 4.6.1 C1 | --- | PASS |
| | | 30MHz -26GHz | Plot 4.6.1 C2 | -20 | PASS |
| | | 3GHz-26.5 GHz | Plot 4.6.1 C3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.1 C4 | | |
| | | 10GHz-.15 GHz | Plot 4.6.1 C5 | | |
| | | 15GHz-.25 GHz | Plot 4.6.1 C6 | | |

Note:


1. For 802.11b mode at finial test to get the worst-case emission at 1Mbps.
2. The test results including the cable lose.
3. For 9KHz -30MHz,Because there was only background, So We did not recorded data.

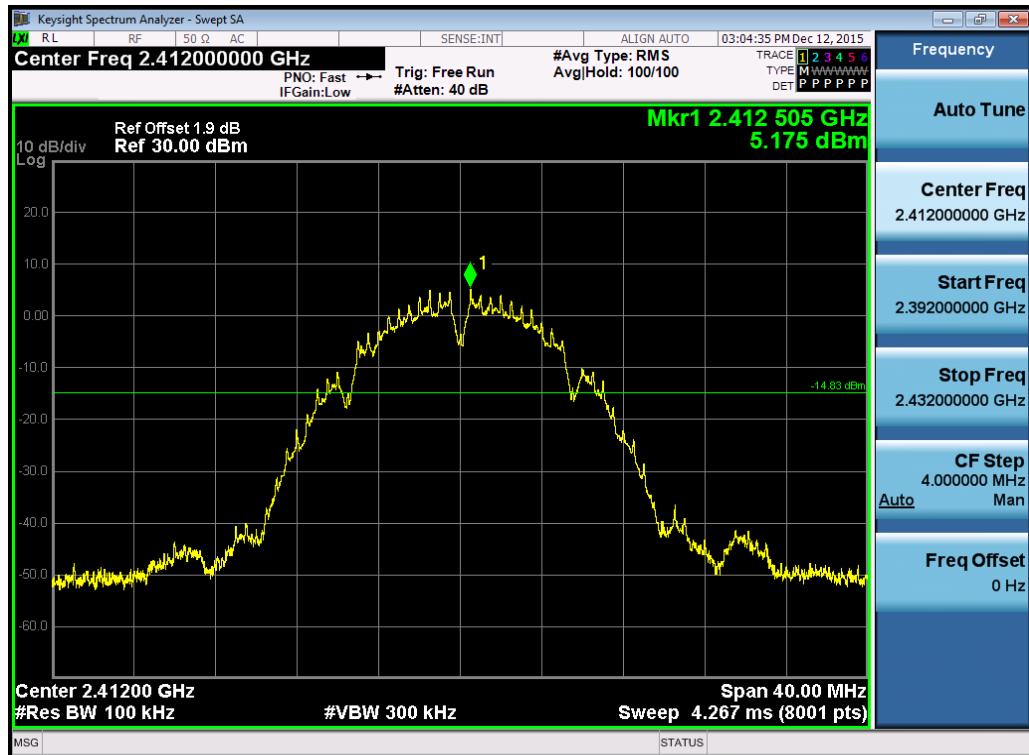


(Plot 4.6.1 A1: Channel 1: 2412MHz @ 802.11b)

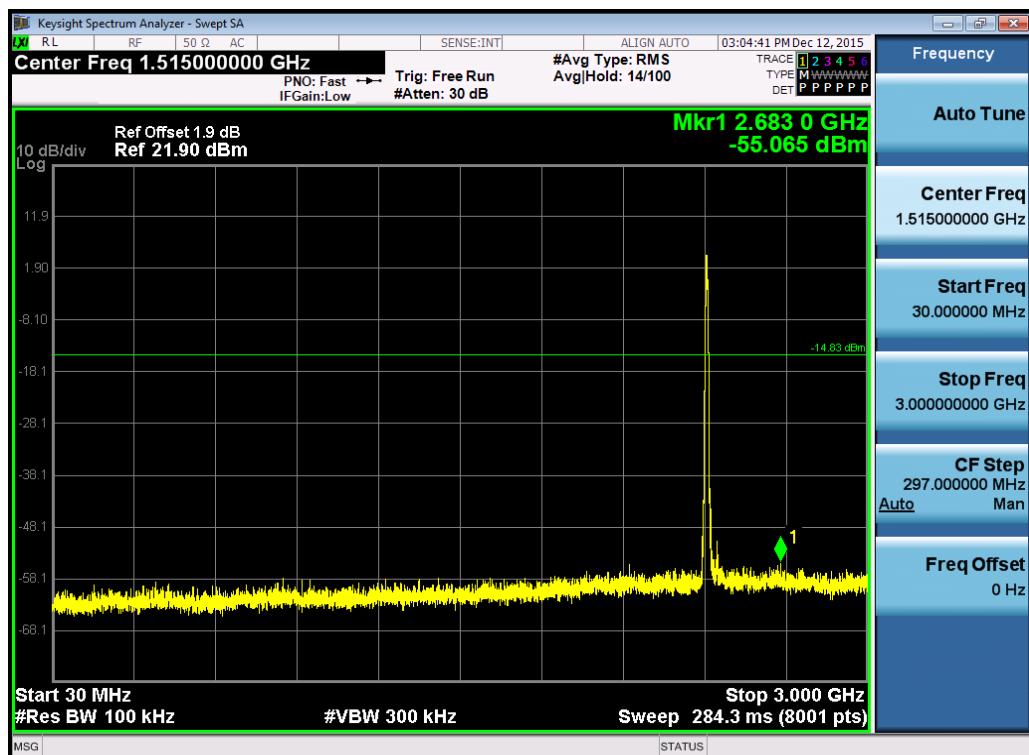


(Plot 4.6.1 A2: Channel 1: 2412MHz @ 802.11b)

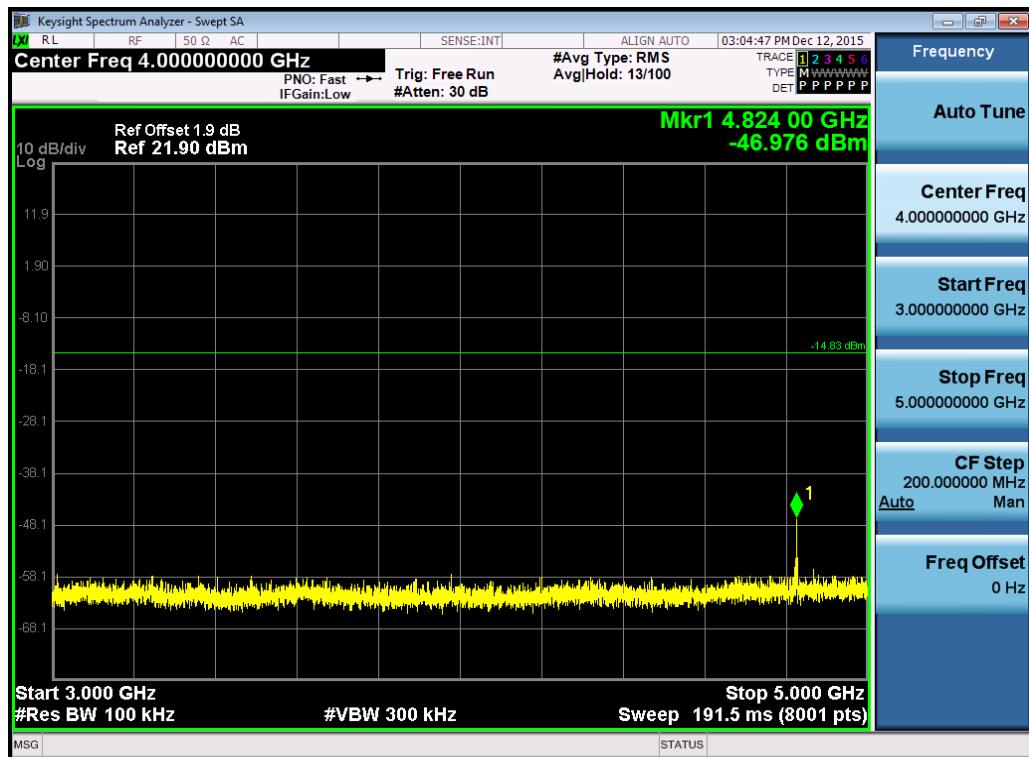


(Plot 4.6.1 A3: Channel 1: 2412MHz @ 802.11b)

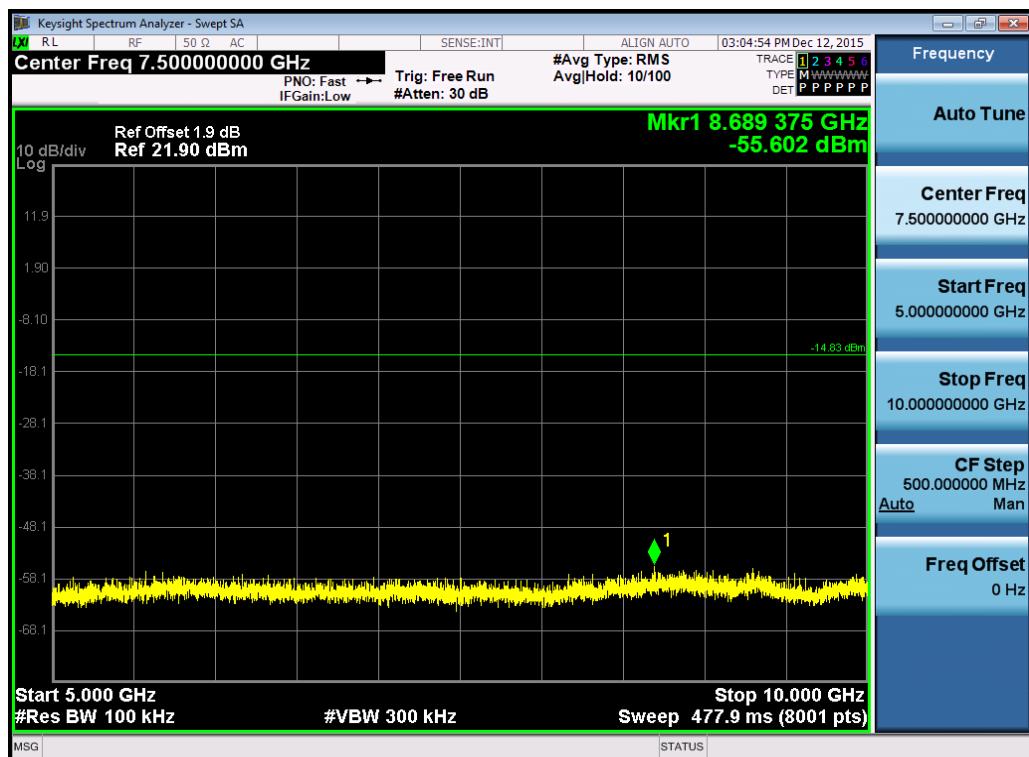


(Plot 4.6.1 A4: Channel 1: 2412MHz @ 802.11b)

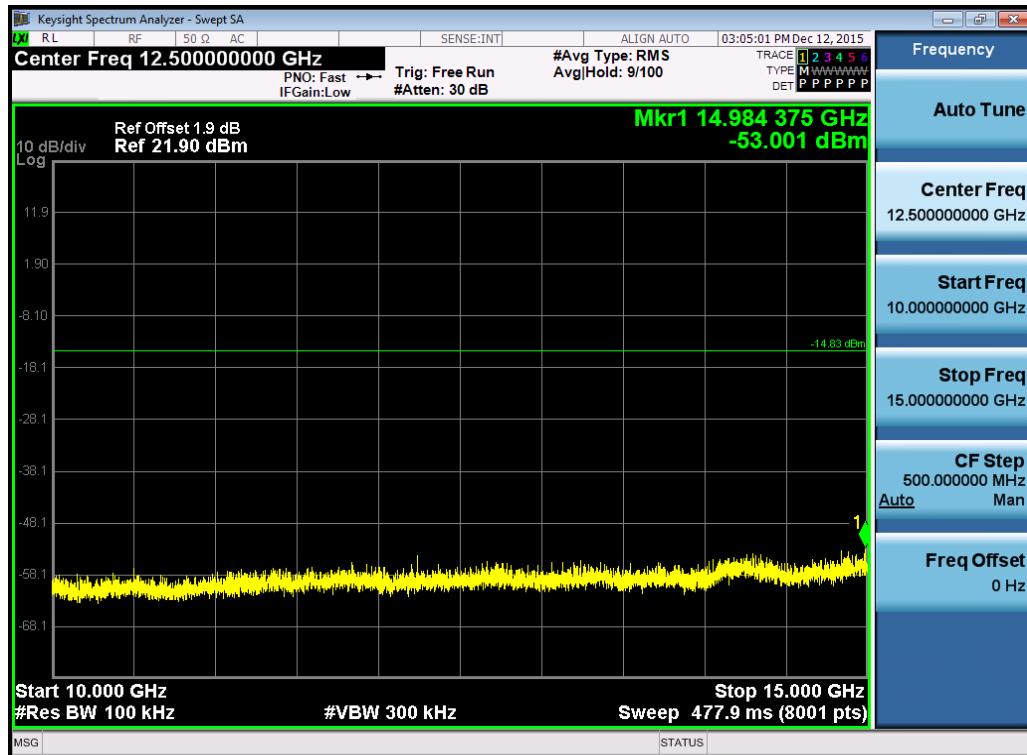


(Plot 4.6.1 A5: Channel 1: 2412MHz @ 802.11b)

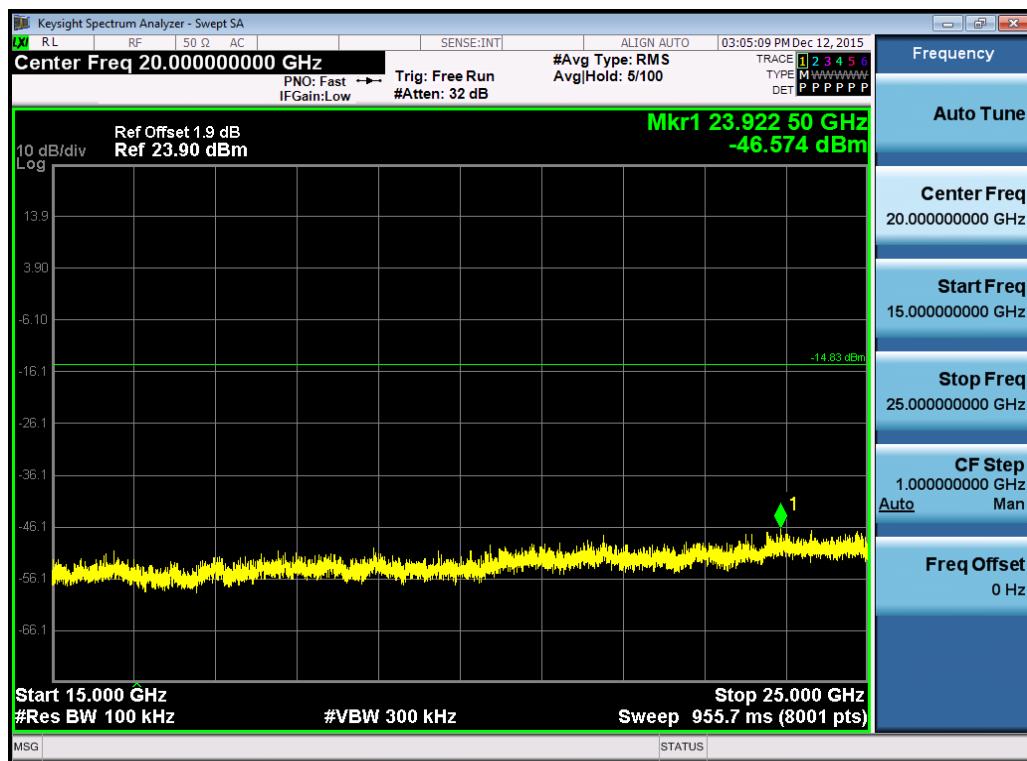


(Plot 4.6.1 A6: Channel 1: 2412MHz @ 802.11b)

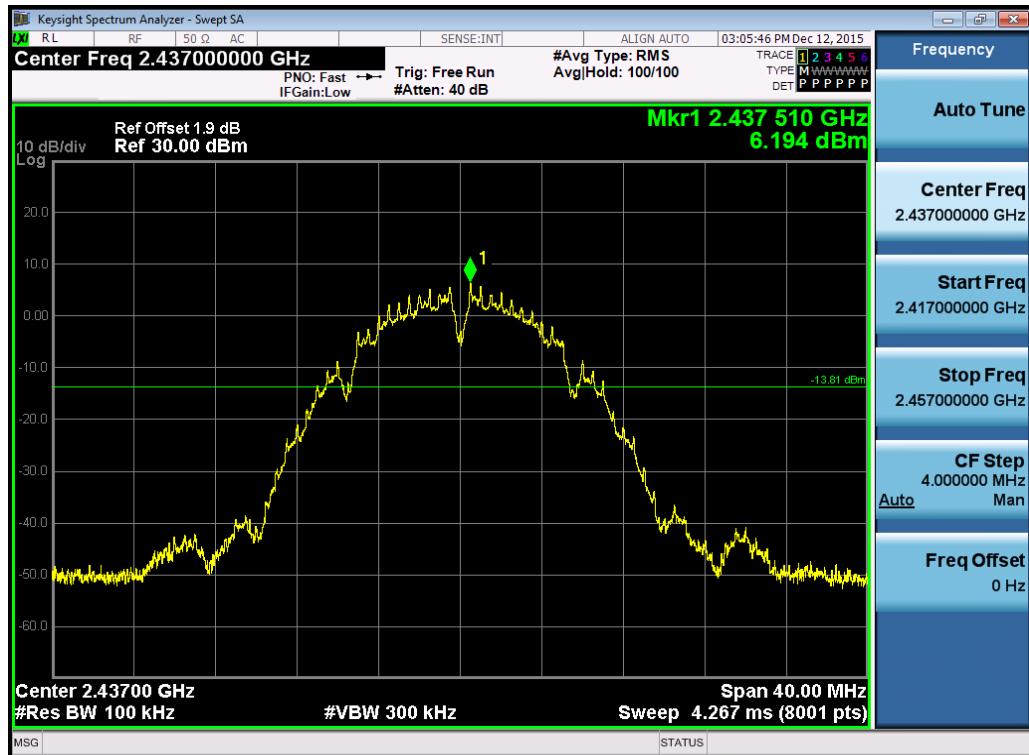


(Plot 4.6.1 B1: Channel 6: 2437MHz @ 802.11b)

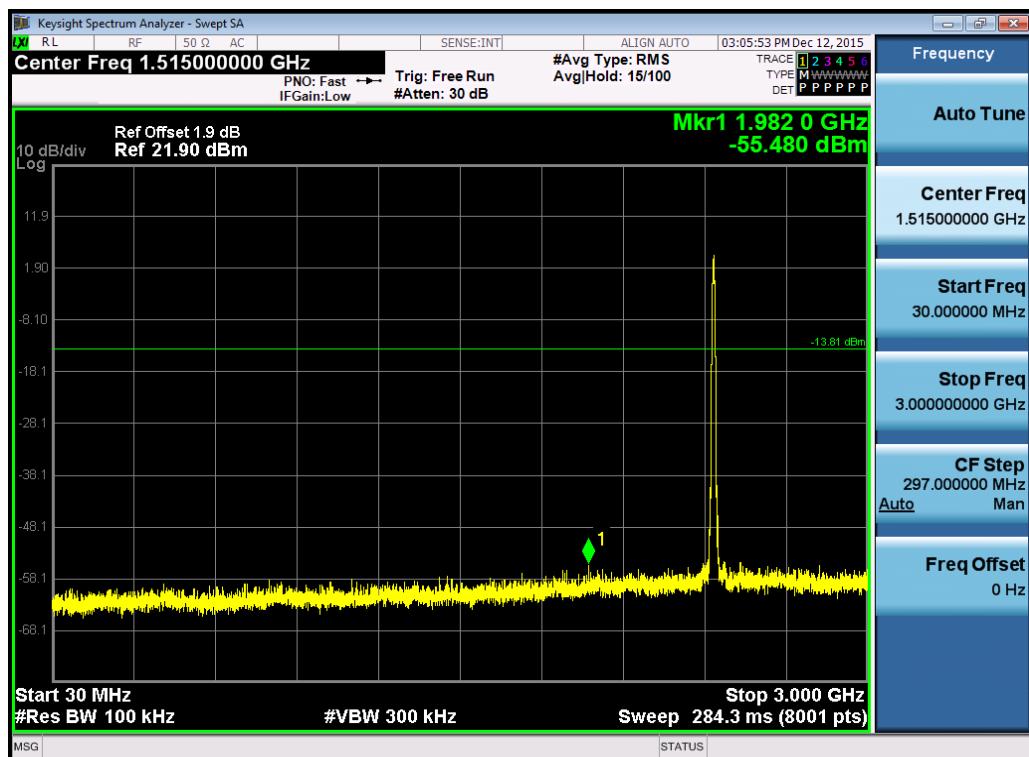


(Plot 4.6.1 B2: Channel 6: 2437MHz @ 802.11b)

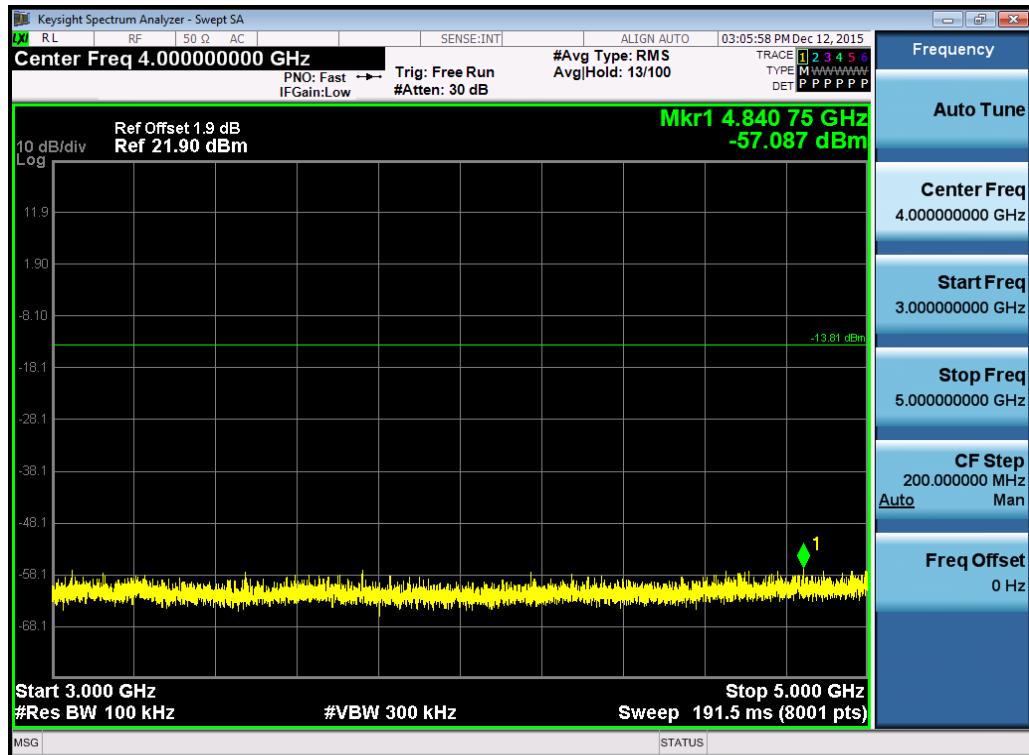


(Plot 4.6.1 B3: Channel 6: 2437MHz @ 802.11b)

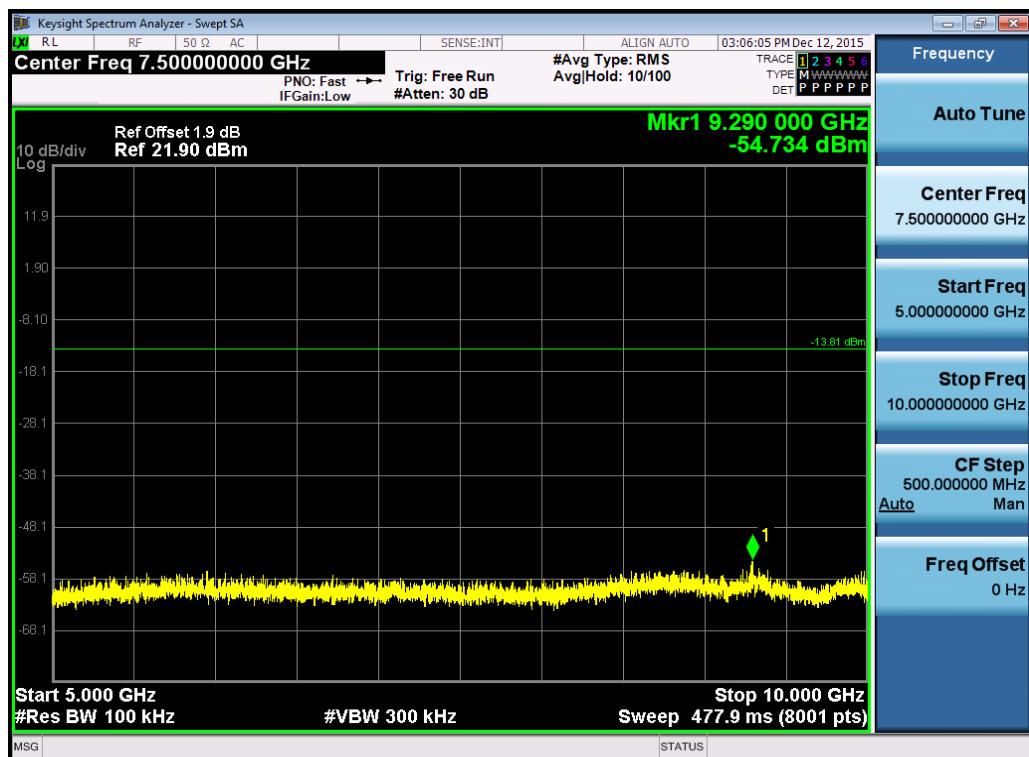


(Plot 4.6.1 B4: Channel 6: 2437MHz @ 802.11b)

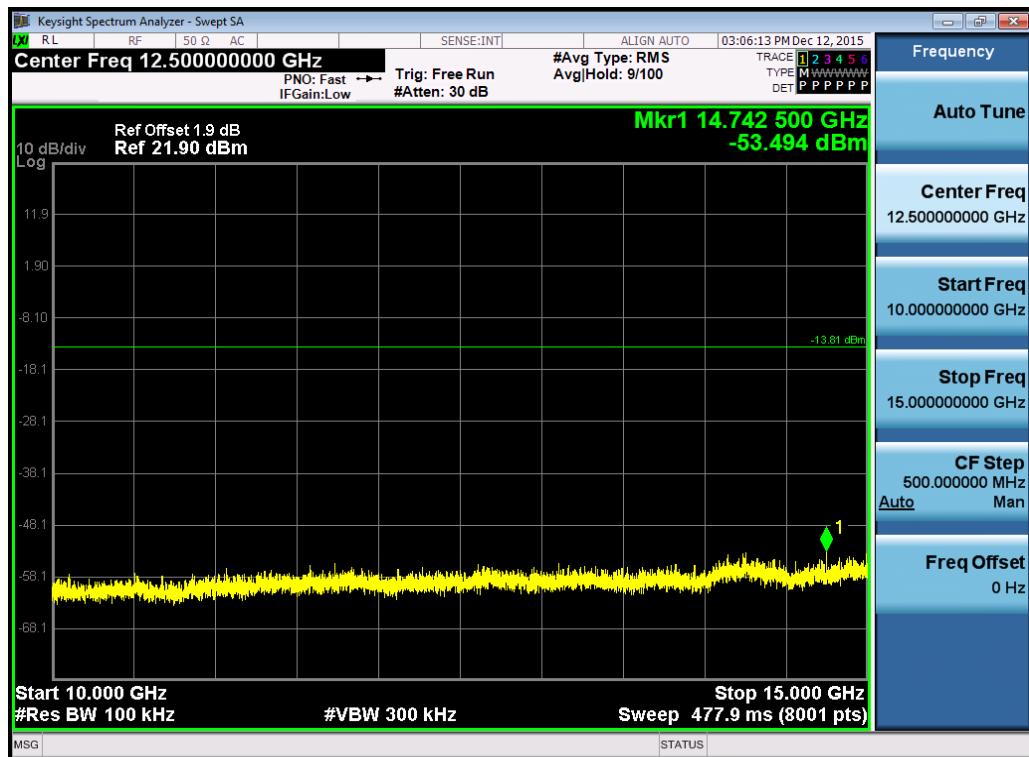


(Plot 4.6.1 B5: Channel 6: 2437MHz @ 802.11b)

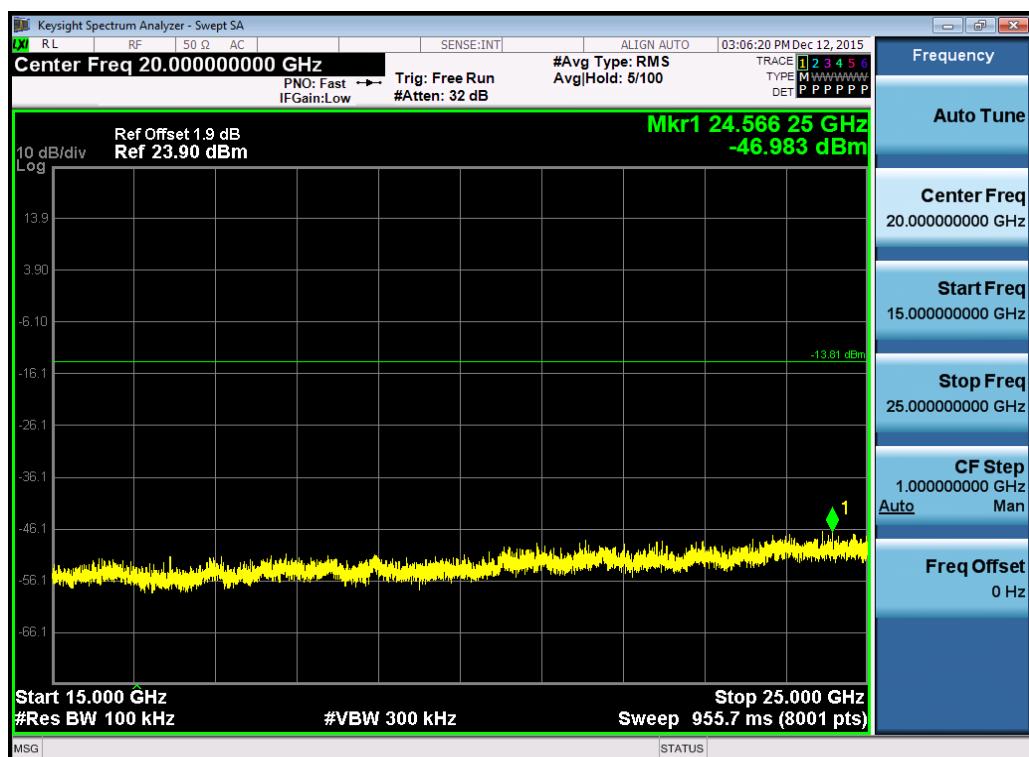


(Plot 4.6.1 B6: Channel 6: 2437MHz @ 802.11b)

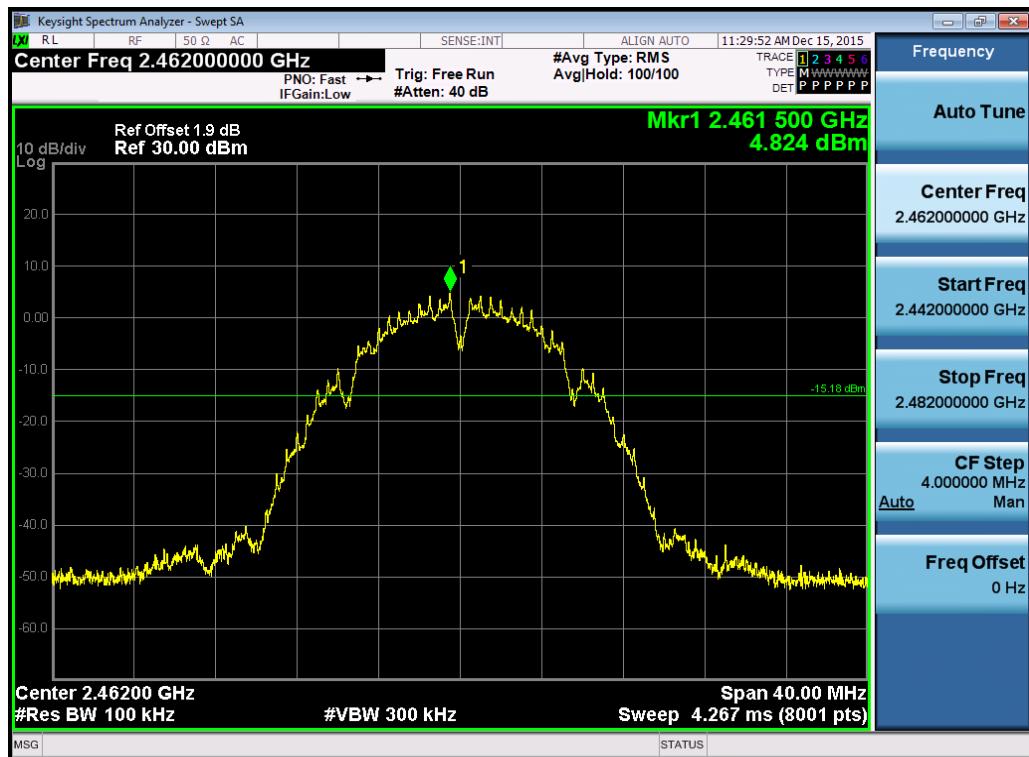


(Plot 4.6.1 C1: Channel 11: 2462MHz @ 802.11b)

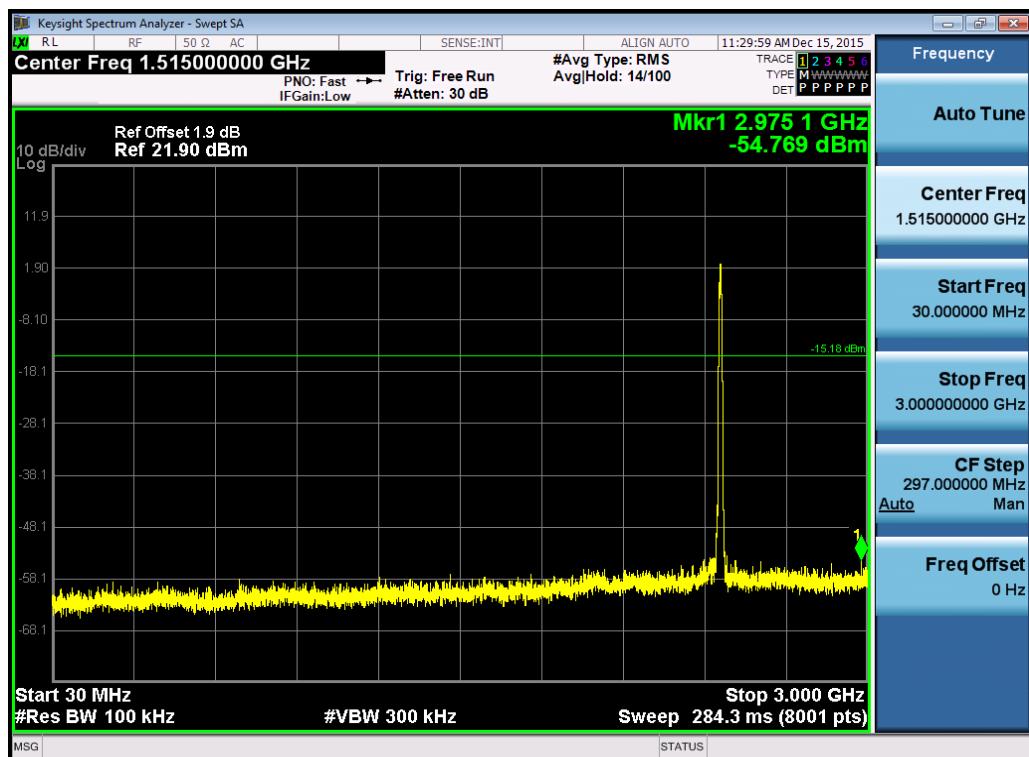


(Plot 4.6.1 C2: Channel 11: 2462MHz @ 802.11b)

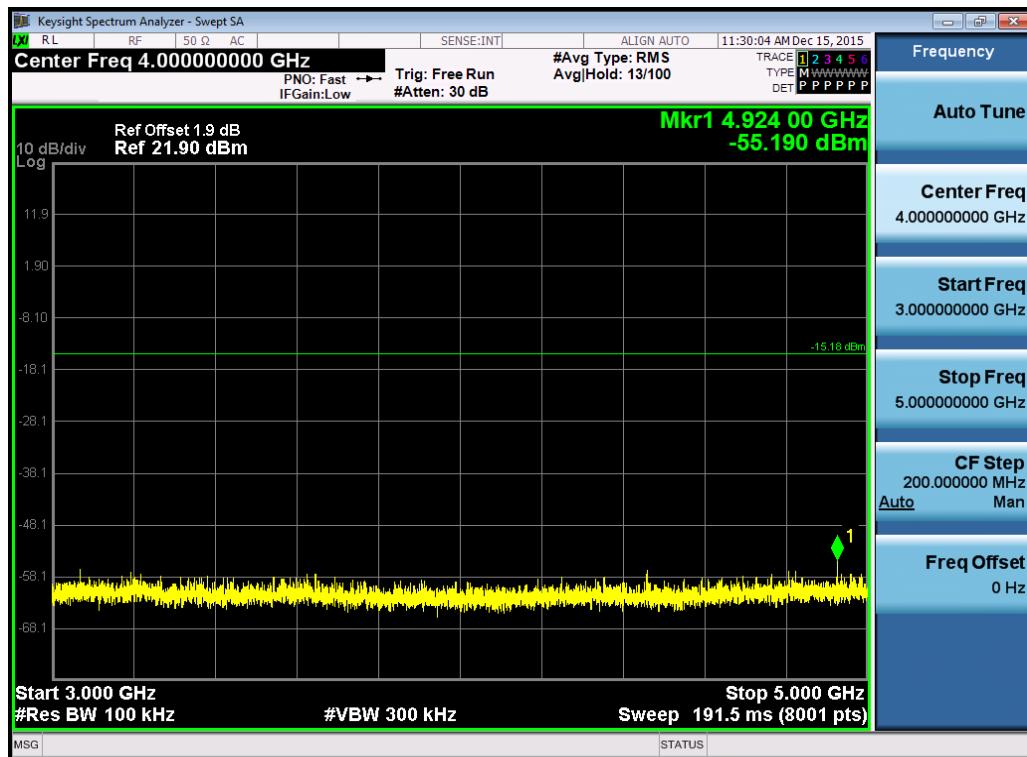


(Plot 4.6.1 C3: Channel 11: 2462MHz @ 802.11b)

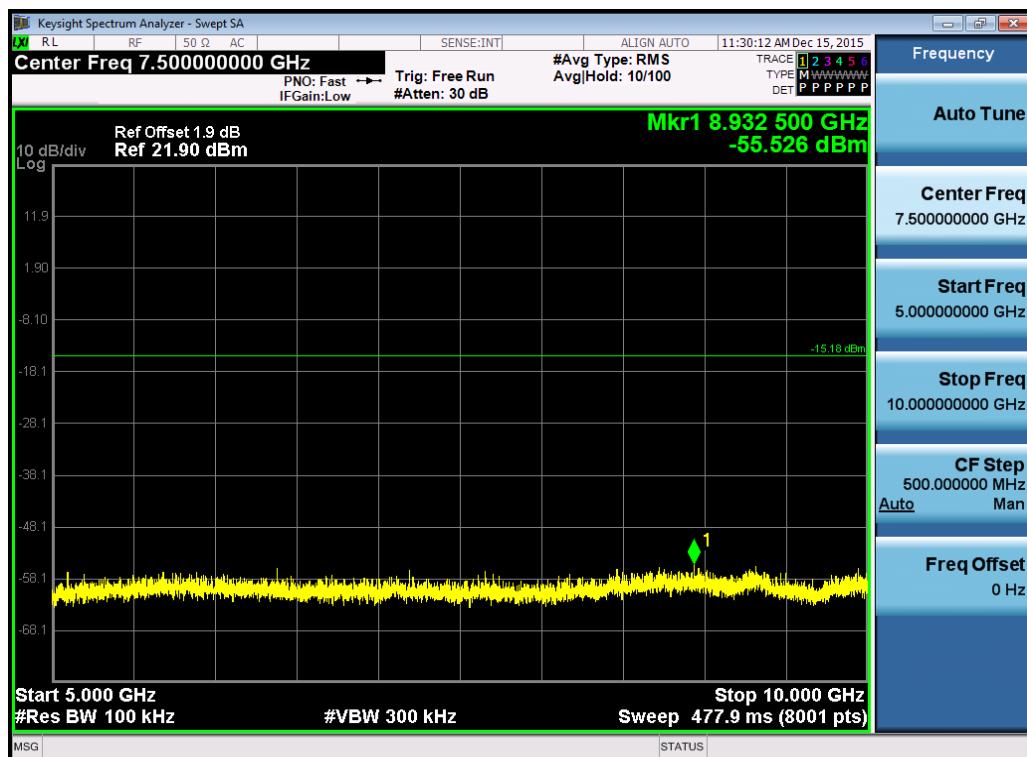

(Plot 4.6.1 C4: Channel 11: 2462MHz @ 802.11b)

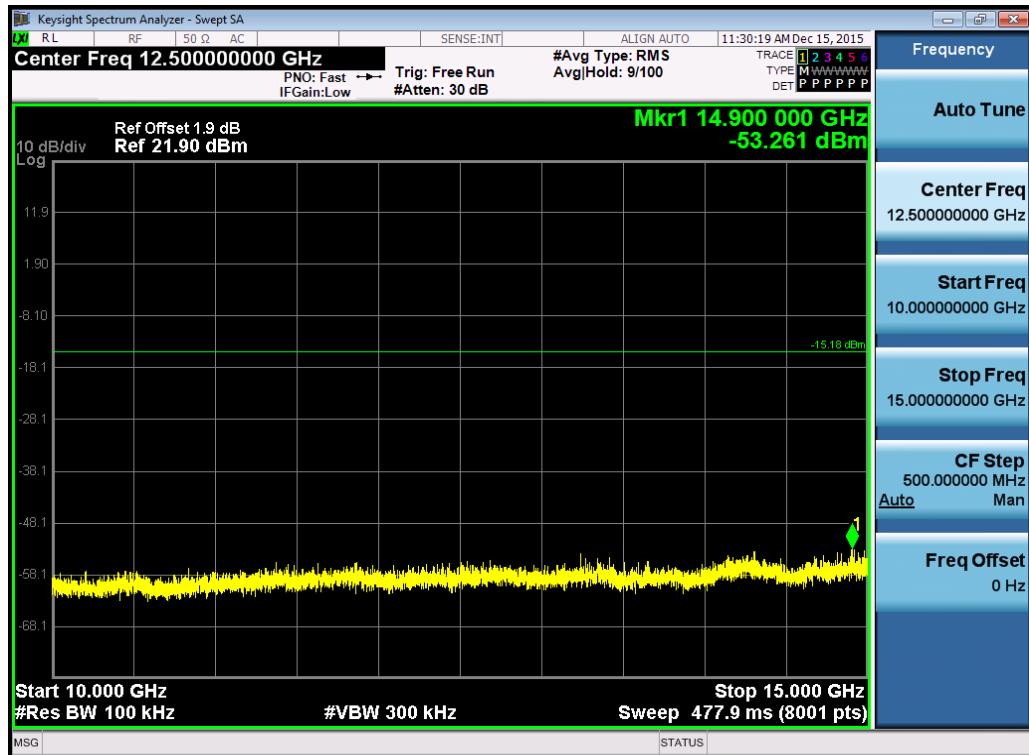

(Plot 4.6.1 C5: Channel 11: 2462MHz @ 802.11b)

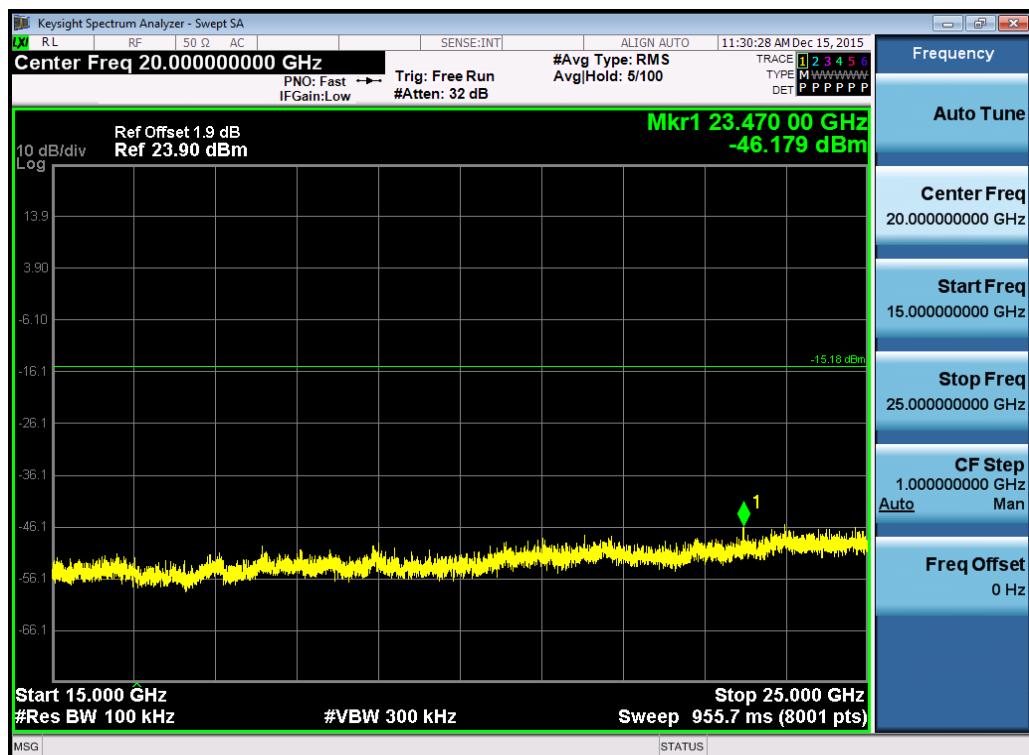

(Plot 4.6.1 C6: Channel 11: 2462MHz @ 802.11b)

4.6.2 802.11g Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Frequency Range | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|-----------------|---------------|-------------|---------|
| 1 | 2412 | 2.412 GHz | Plot 4.6.2 A1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.2 A2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.2 A3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.2 A4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.2 A5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.2 A6 | -20 | PASS |
| 6 | 2437 | 2.437 GHz | Plot 4.6.2 B1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.2 B2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.2 B3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.2 B4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.2 B5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.2 B6 | -20 | PASS |
| 11 | 2462 | 2.462 GHz | Plot 4.6.2 C1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.2 C2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.2 C3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.2 C4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.2 C5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.2 C6 | -20 | PASS |


Note:

1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.
3. For 9KHz -30MHz, Because there was only background, So We did not recorded data.


B. Test Plots

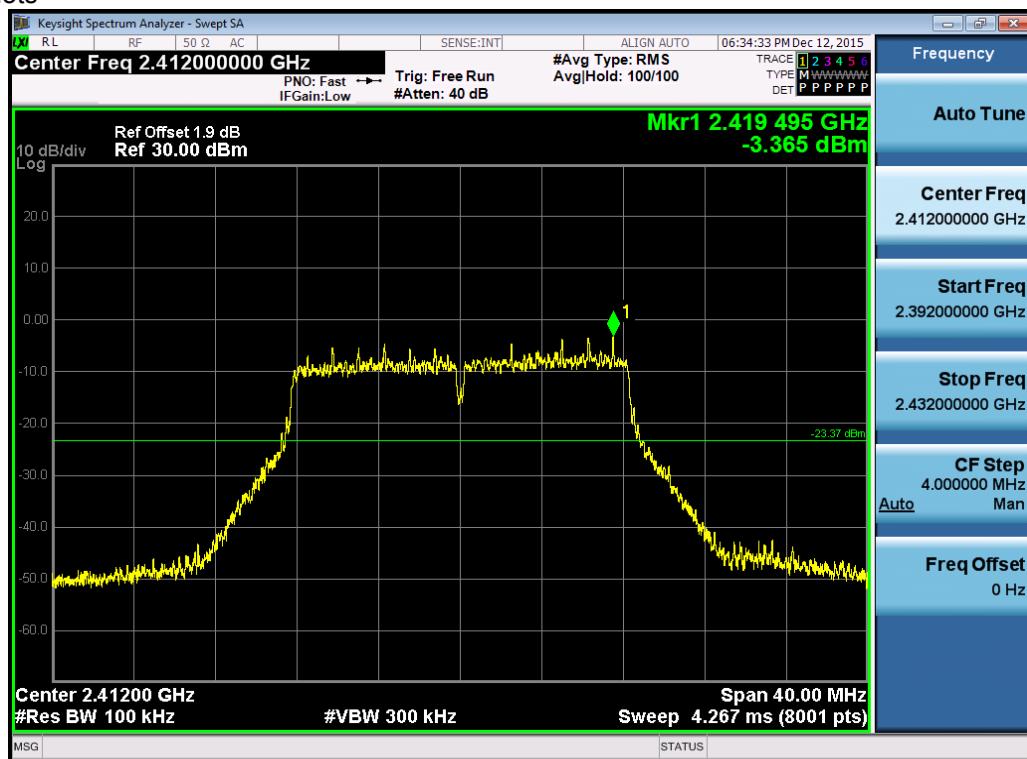


(Plot 4.6.2 A1: Channel 1: 2412MHz @ 802.11g)

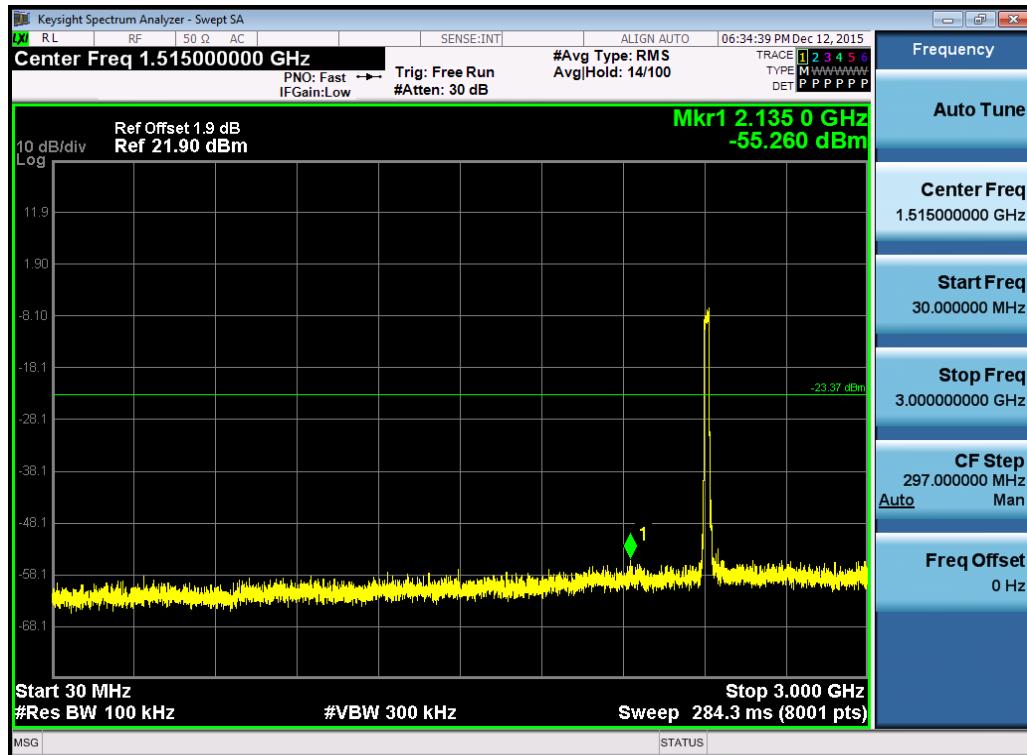


(Plot 4.6.2 A2: Channel 1: 2412MHz @ 802.11g)

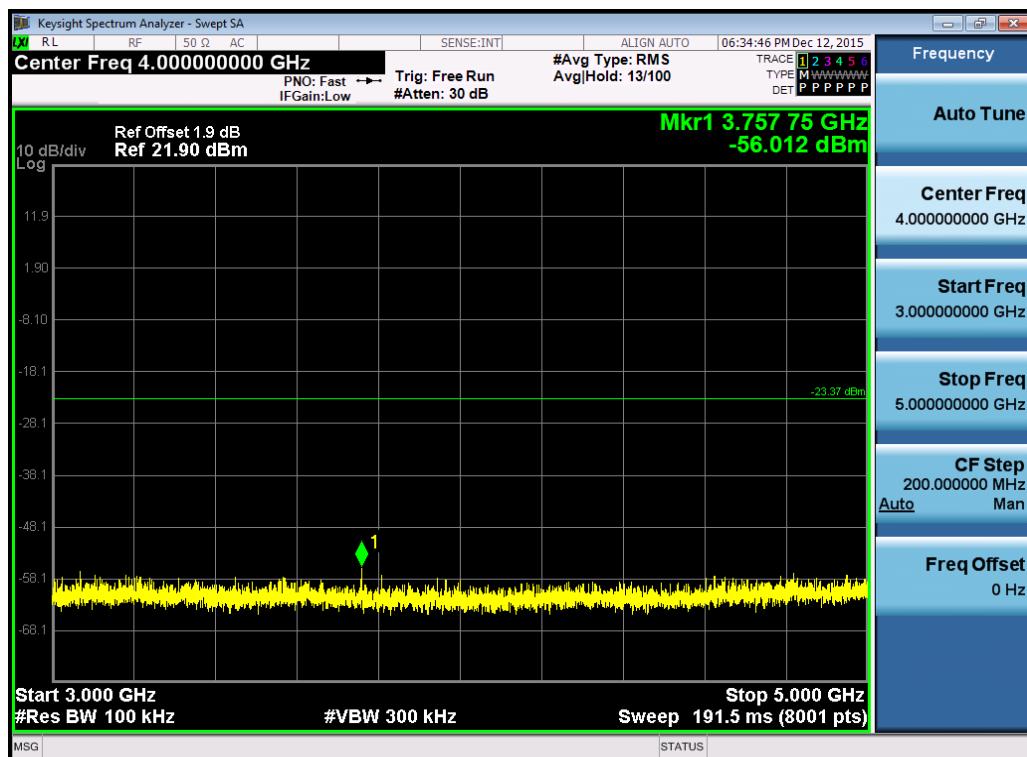


(Plot 4.6.2 A3: Channel 1: 2412MHz @ 802.11g)

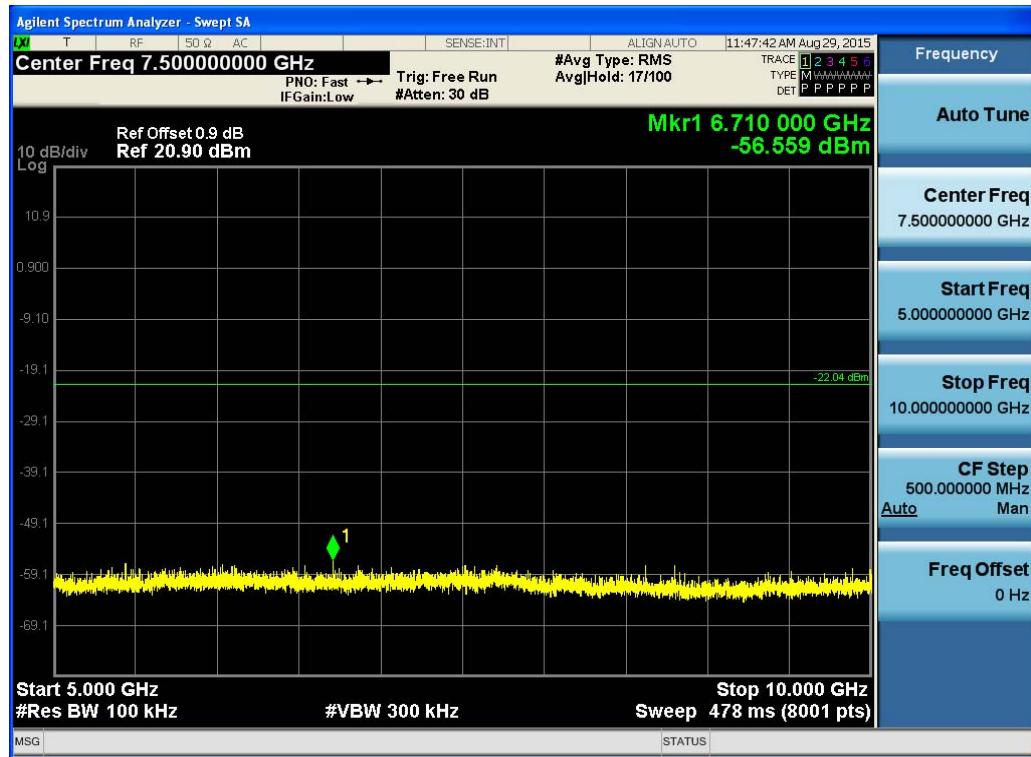


(Plot 4.6.2 A4: Channel 1: 2412MHz @ 802.11g)

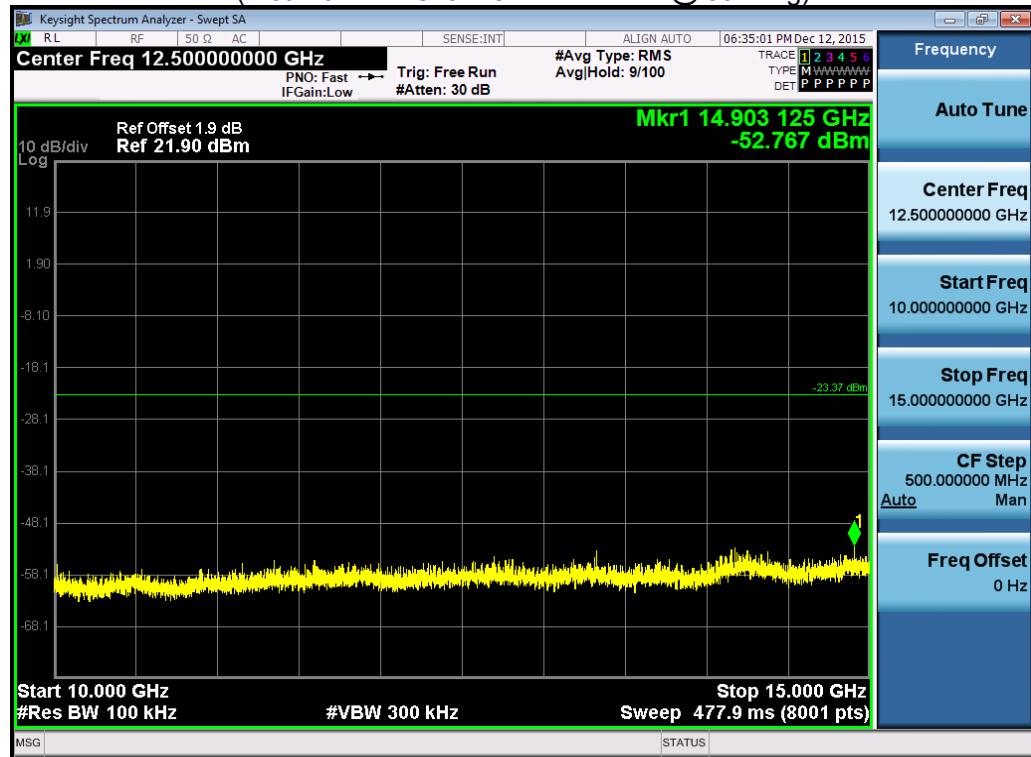


(Plot 4.6.2 A5: Channel 1: 2412MHz @ 802.11g)

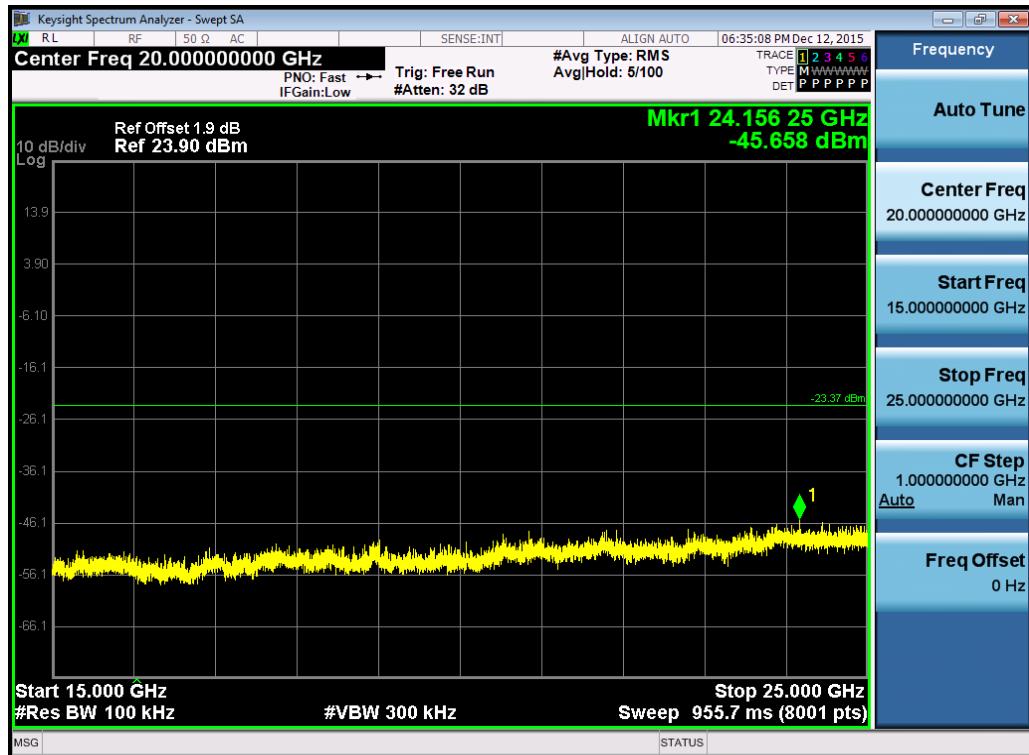


(Plot 4.6.2 A6: Channel 1: 2412MHz @ 802.11g)

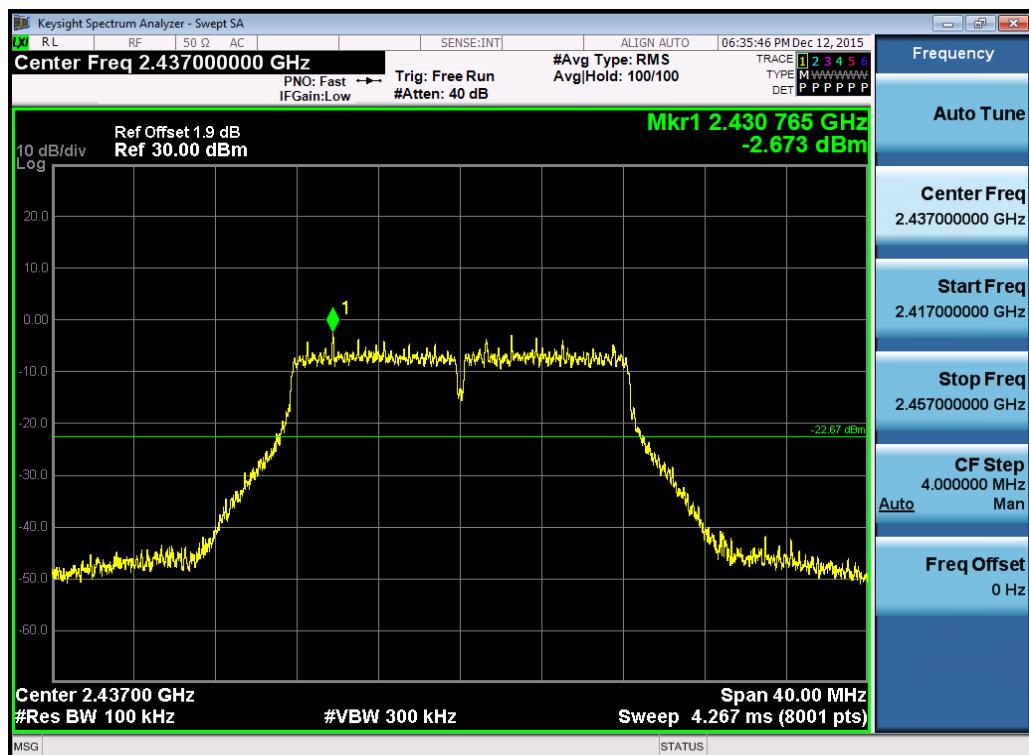


(Plot 4.6.2 B1: Channel 6: 2437MHz @ 802.11g)

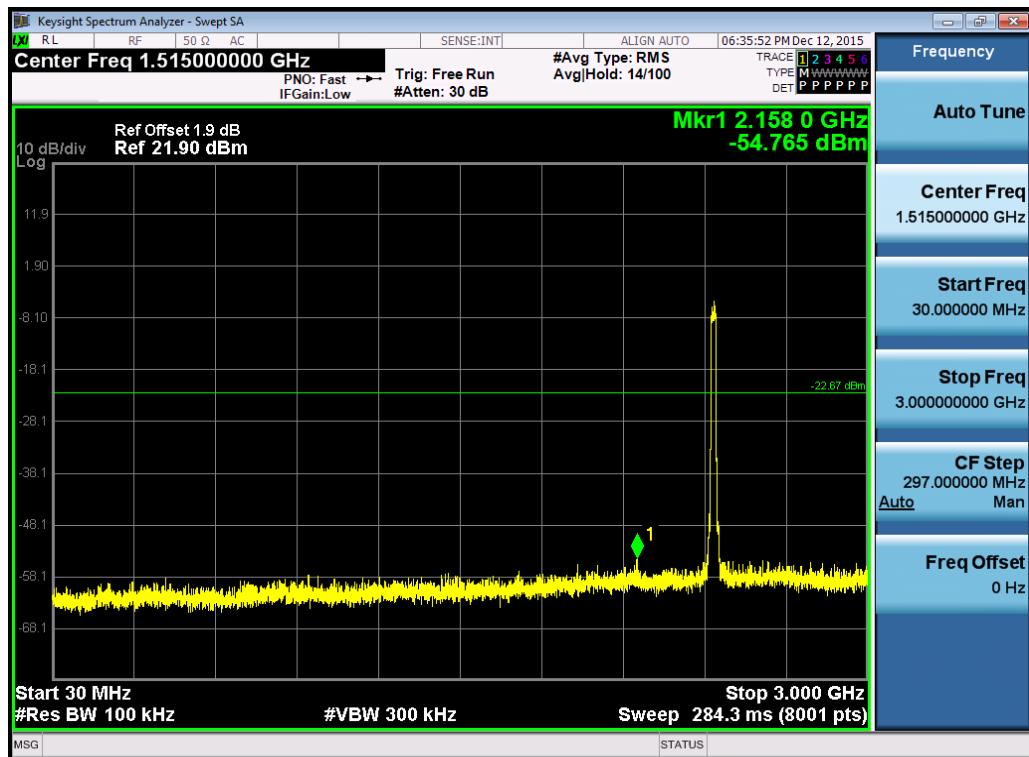


(Plot 4.6.2 B2: Channel 6: 2437MHz @ 802.11g)

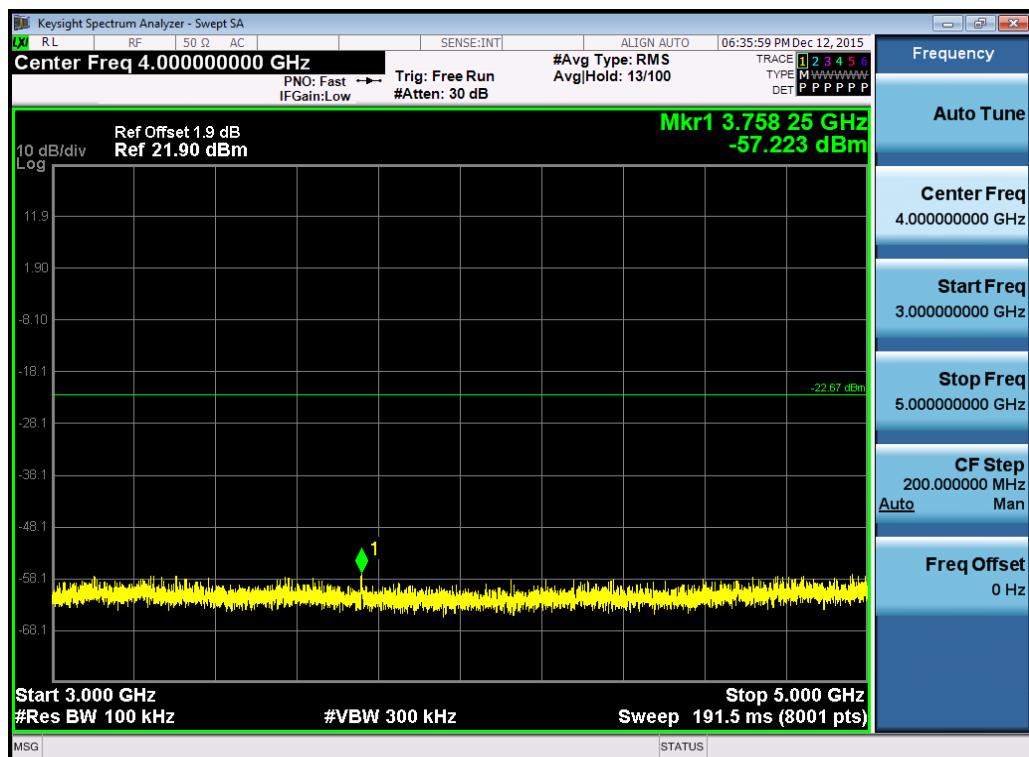


(Plot 4.6.2 B3: Channel 6: 2437MHz @ 802.11g)

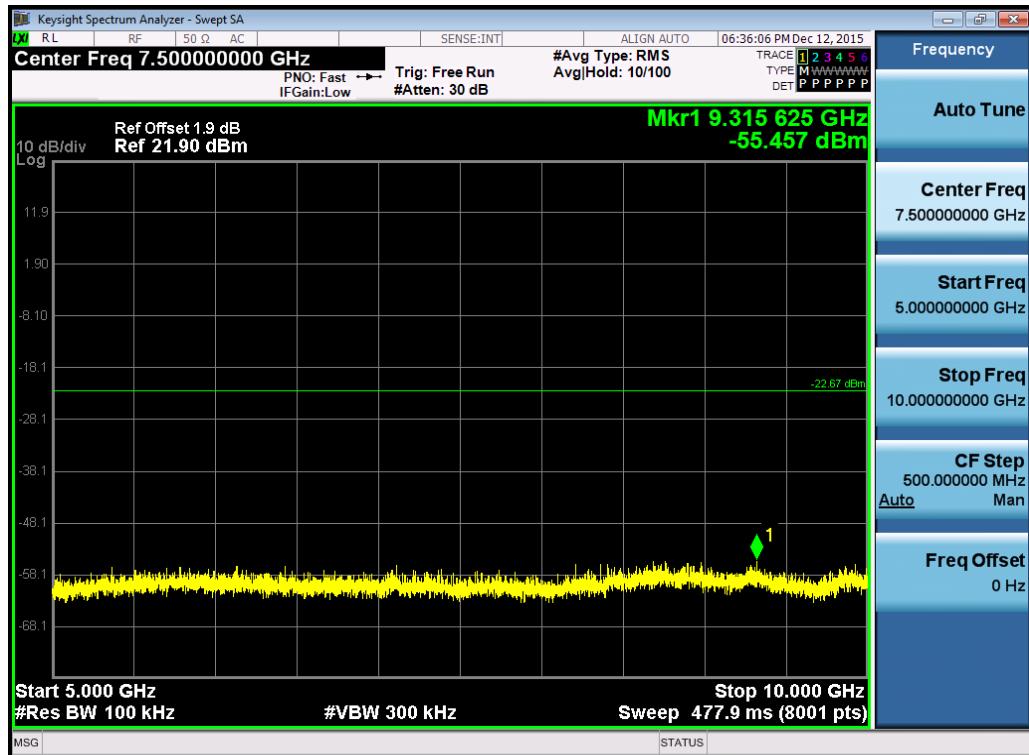


(Plot 4.6.2 B4: Channel 6: 2437MHz @ 802.11g)

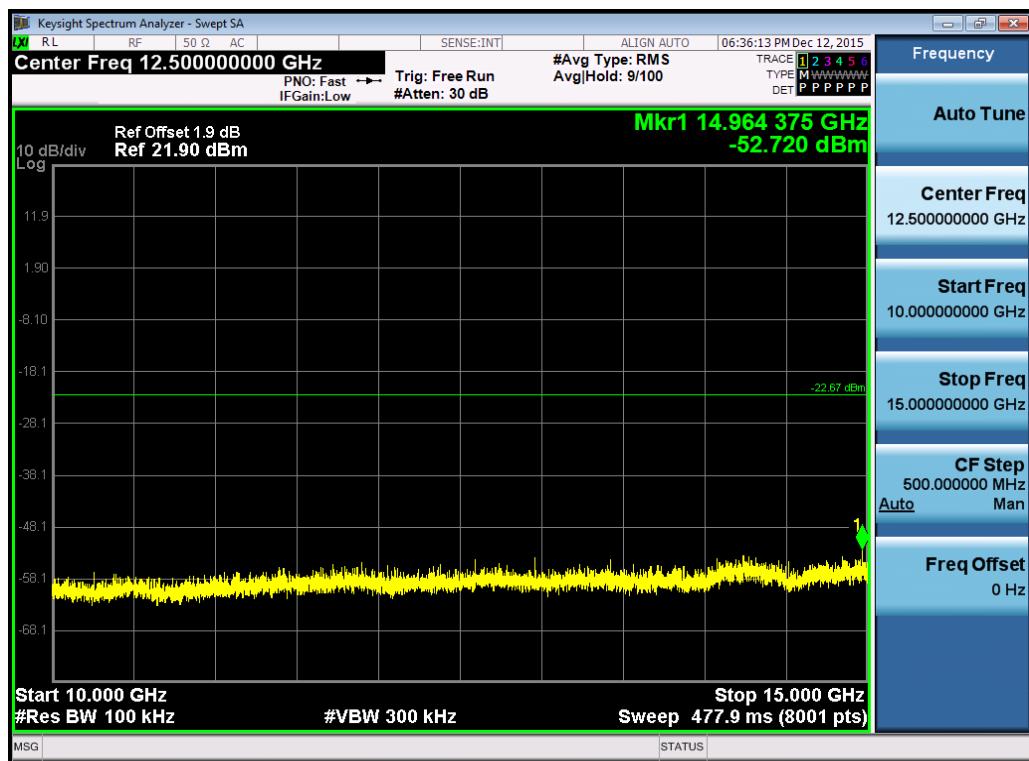


(Plot 4.6.2 B5: Channel 6: 2437MHz @ 802.11g)

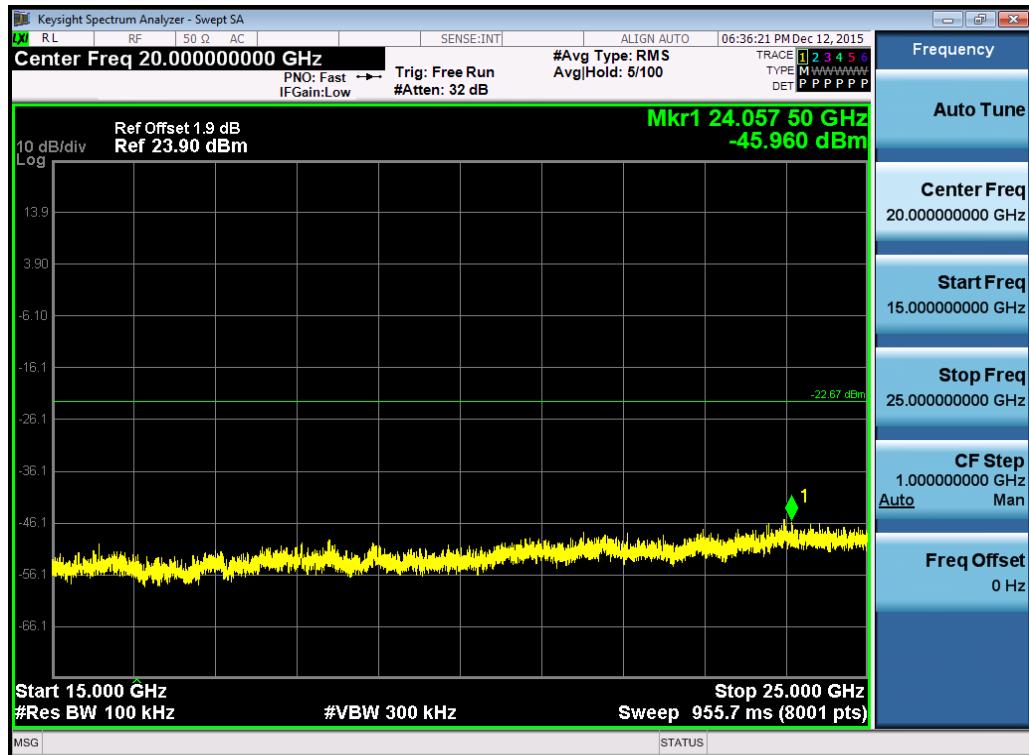


(Plot 4.6.2 B6: Channel 6: 2437MHz @ 802.11g)

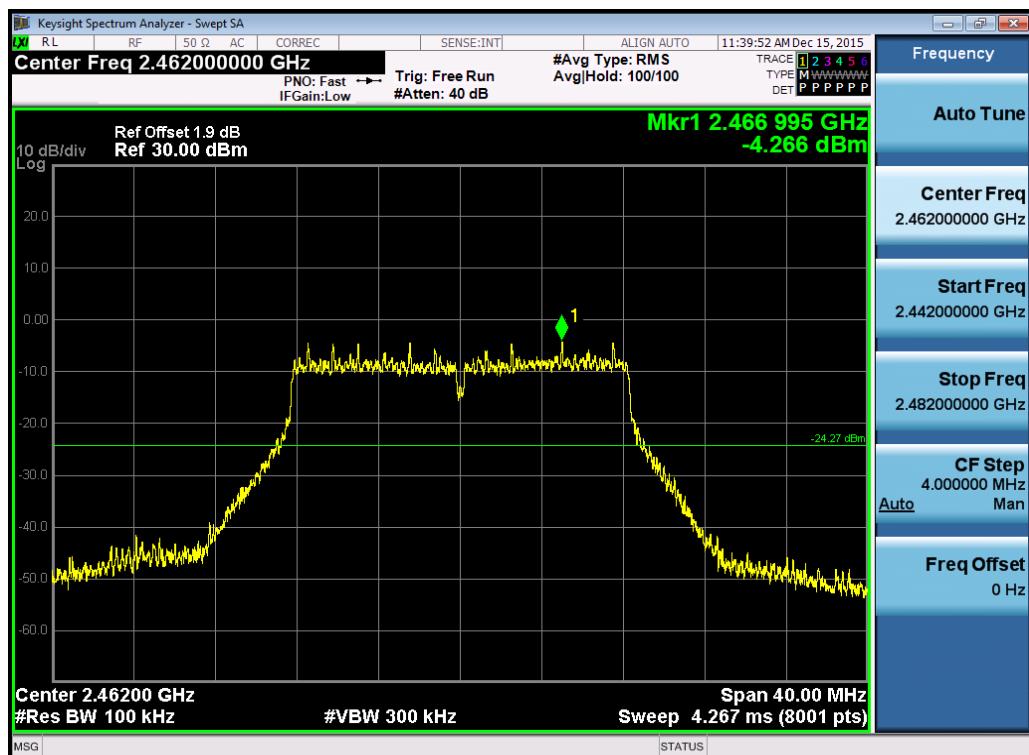


(Plot 4.6.2 C1: Channel 11: 2462MHz @ 802.11g)

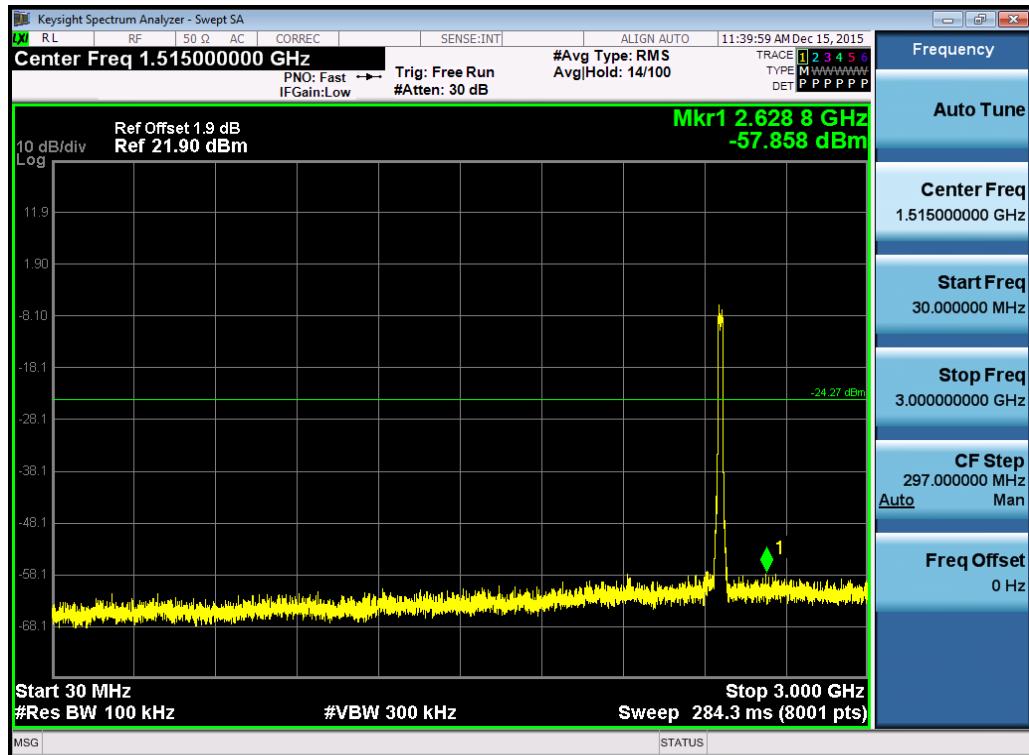


(Plot 4.6.2 C2: Channel 11: 2462MHz @ 802.11g)

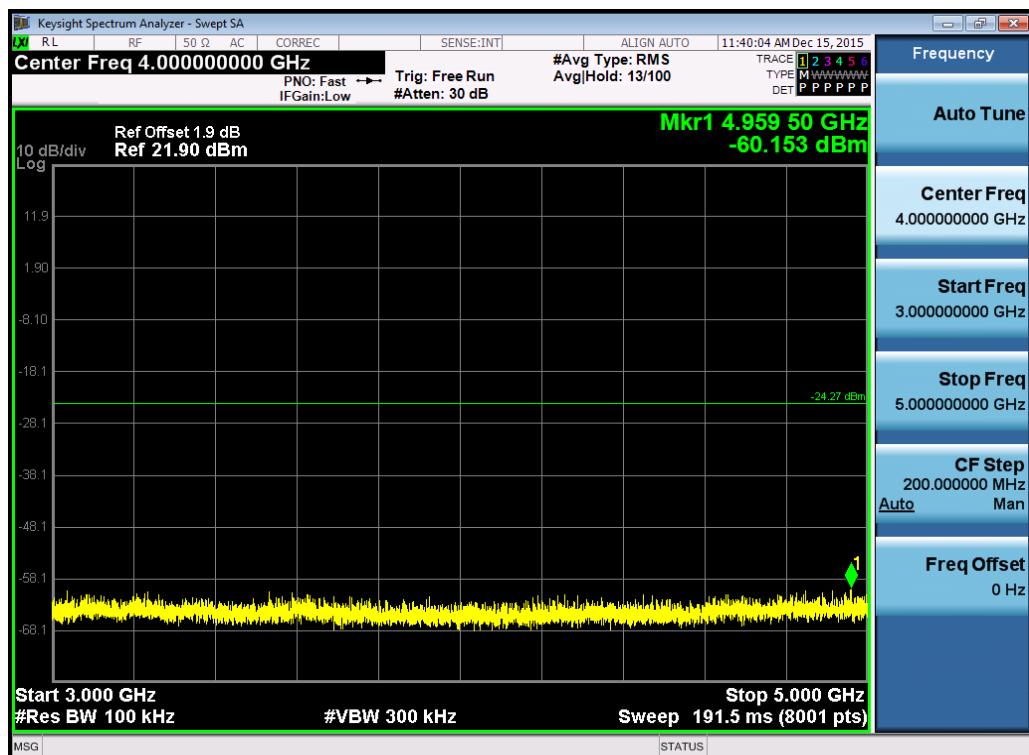


(Plot 4.6.2 C3: Channel 11: 2462MHz @ 802.11g)

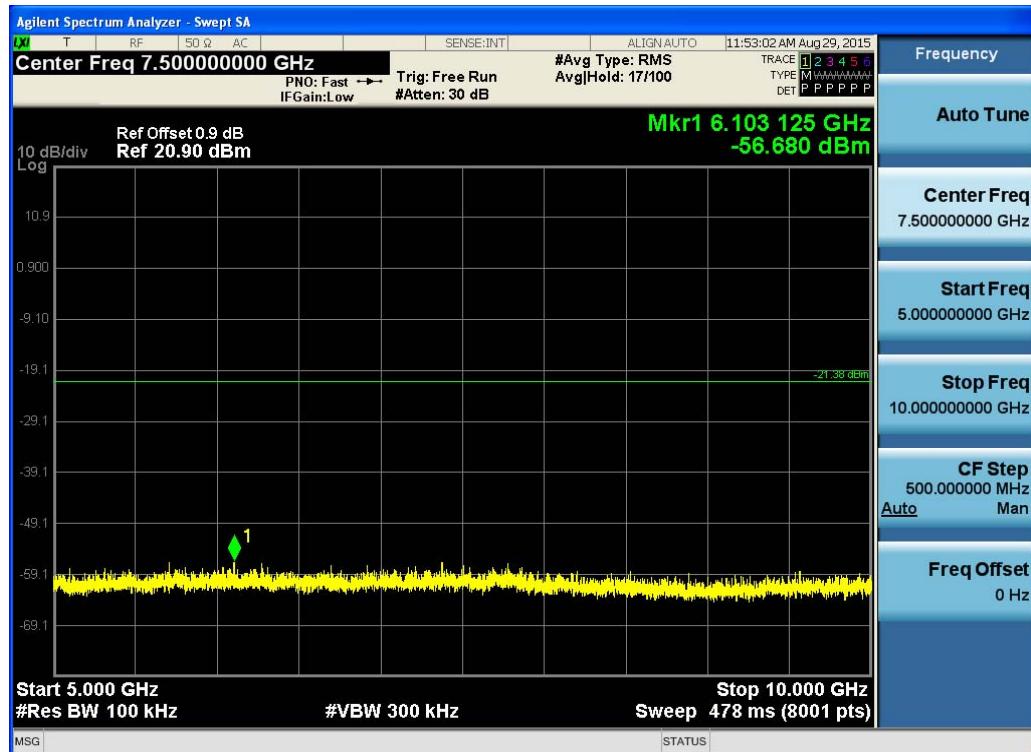

(Plot 4.6.2 C4: Channel 11: 2462MHz @ 802.11g)

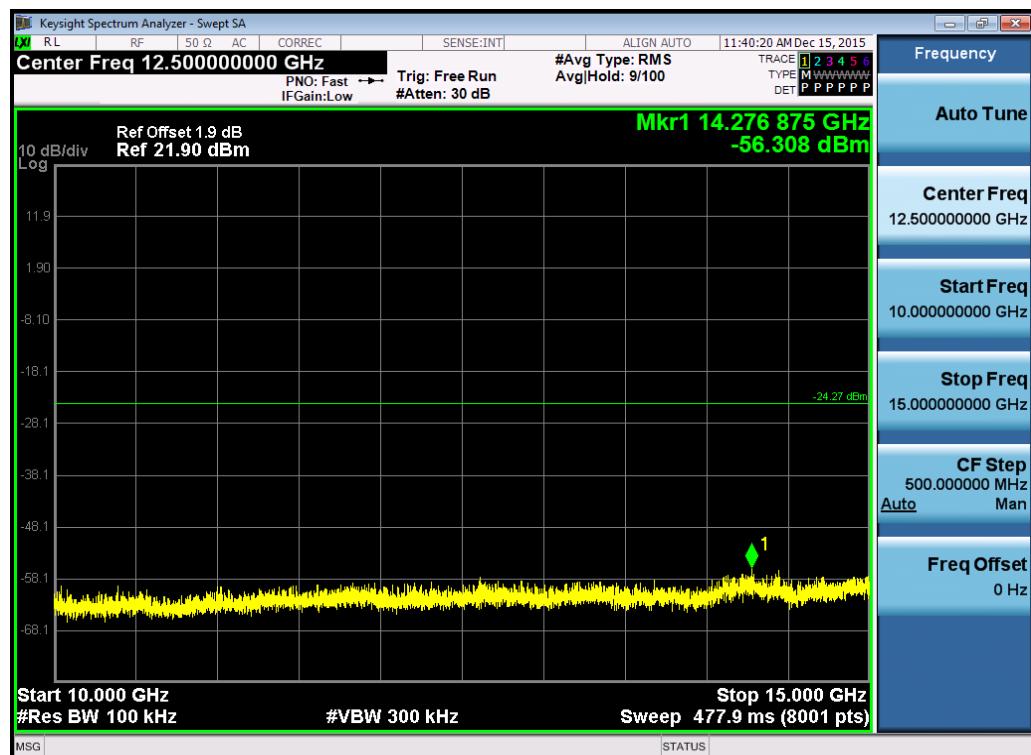

(Plot 4.6.2 C5: Channel 11: 2462MHz @ 802.11g)

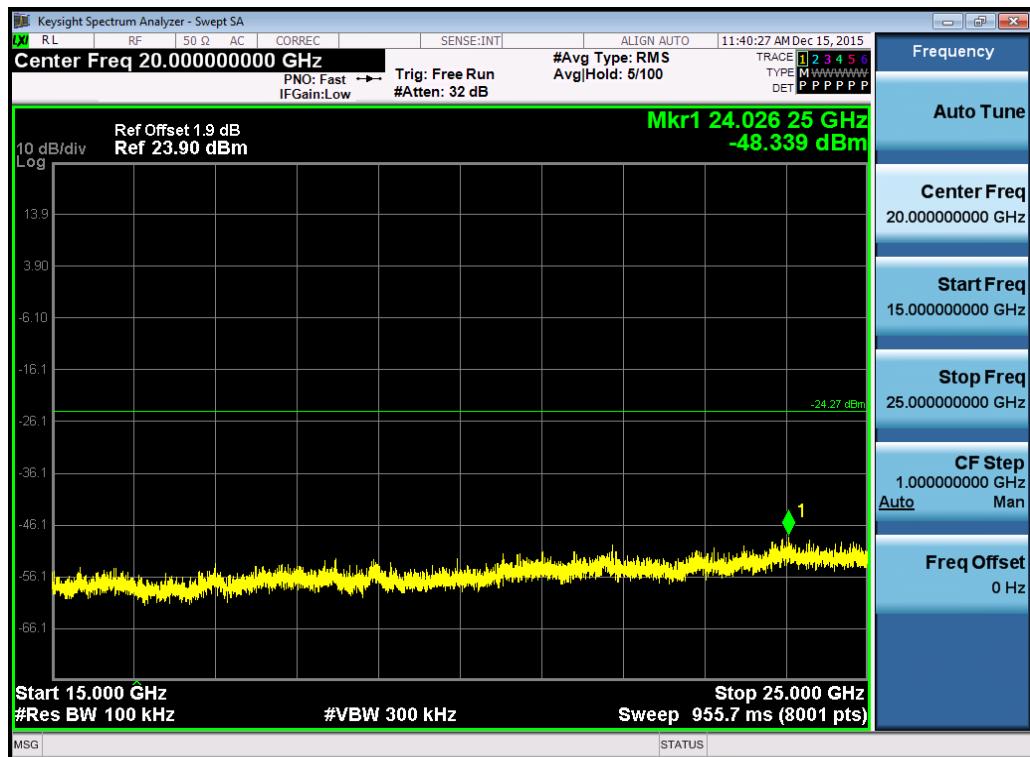

(Plot 4.6.2 C6: Channel 11: 2462MHz @ 802.11g)

4.6.3 802.11n HT20MHz Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | Frequency Range | Refer to Plot | Limit (dBc) | Verdict |
|---------|-----------------|-----------------|---------------|-------------|---------|
| 1 | 2412 | 2.412 GHz | Plot 4.6.3 A1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.3 A2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.3 A3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.3 A4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.3 A5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.3 A6 | -20 | PASS |
| 6 | 2437 | 2.437 GHz | Plot 4.6.3 B1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.3 B2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.3 B3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.3 B4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.3 B5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.3 B6 | -20 | PASS |
| 11 | 2462 | 2.462 GHz | Plot 4.6.3 C1 | --- | PASS |
| | | 30MHz -3GHz | Plot 4.6.3 C2 | -20 | PASS |
| | | 3GHz-.5 GHz | Plot 4.6.3 C3 | -20 | PASS |
| | | 3GHz-.10 GHz | Plot 4.6.3 C4 | -20 | PASS |
| | | 10GHz-.15 GHz | Plot 4.6.3 C5 | -20 | PASS |
| | | 15GHz-.25 GHz | Plot 4.6.3 C6 | -20 | PASS |


Note:

1. For 802.11n HT20MHz mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.
3. For 9KHz -30MHz, Because there was only background, So We did not recorded data.


B. Test Plots

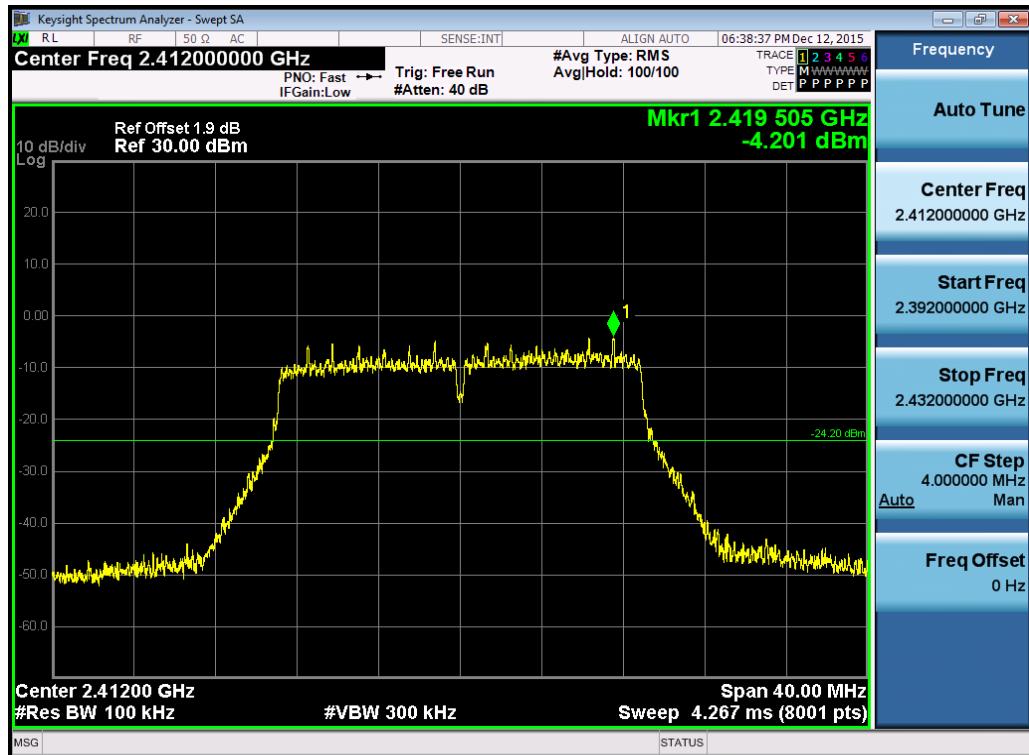


(Plot 4.6.3 A1: Channel 1: 2412MHz @ 802.11n HT20)

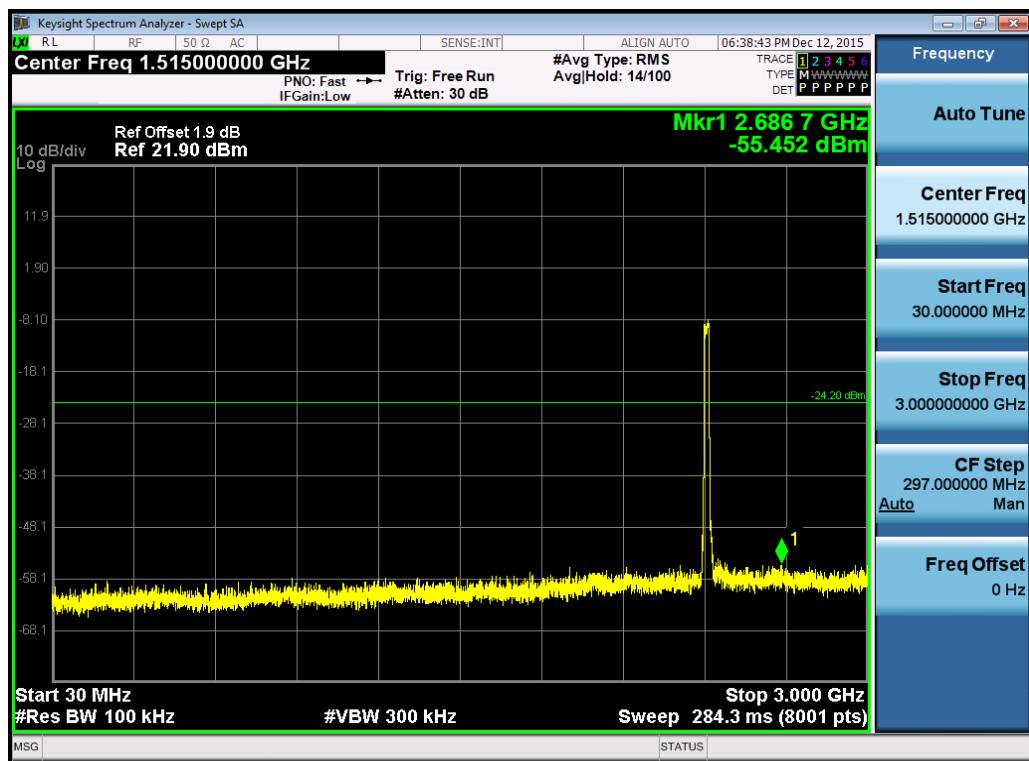


(Plot 4.6.3 A2: Channel 1: 2412MHz @ 802.11n HT20)

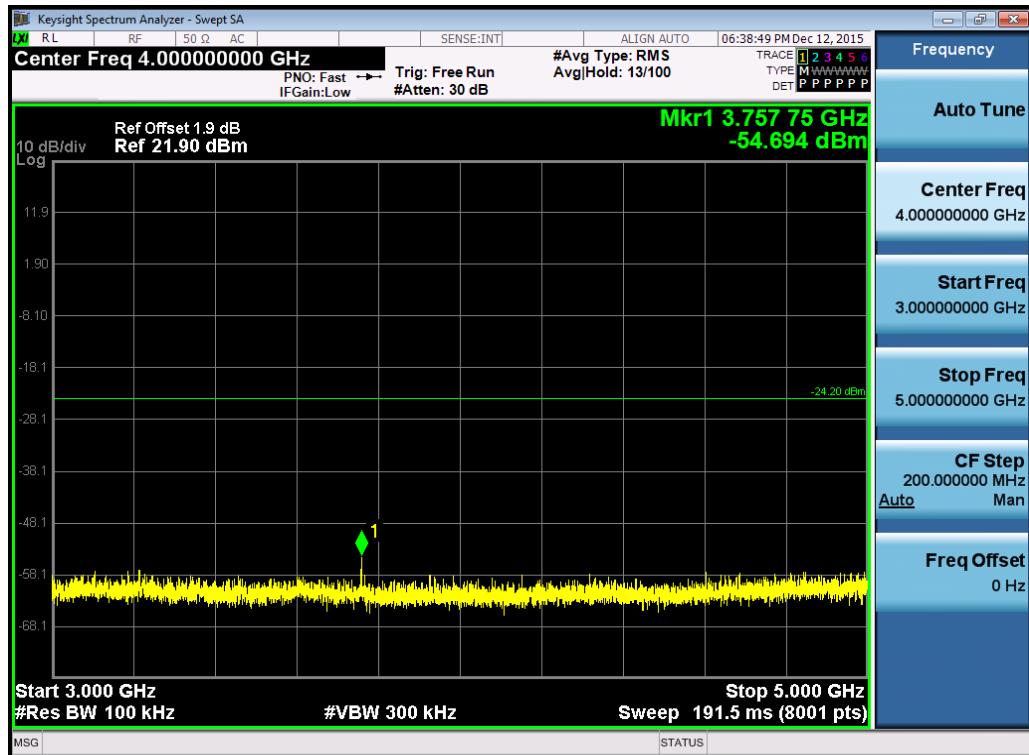


(Plot 4.6.3 A3: Channel 1: 2412MHz @ 802.11n HT20)

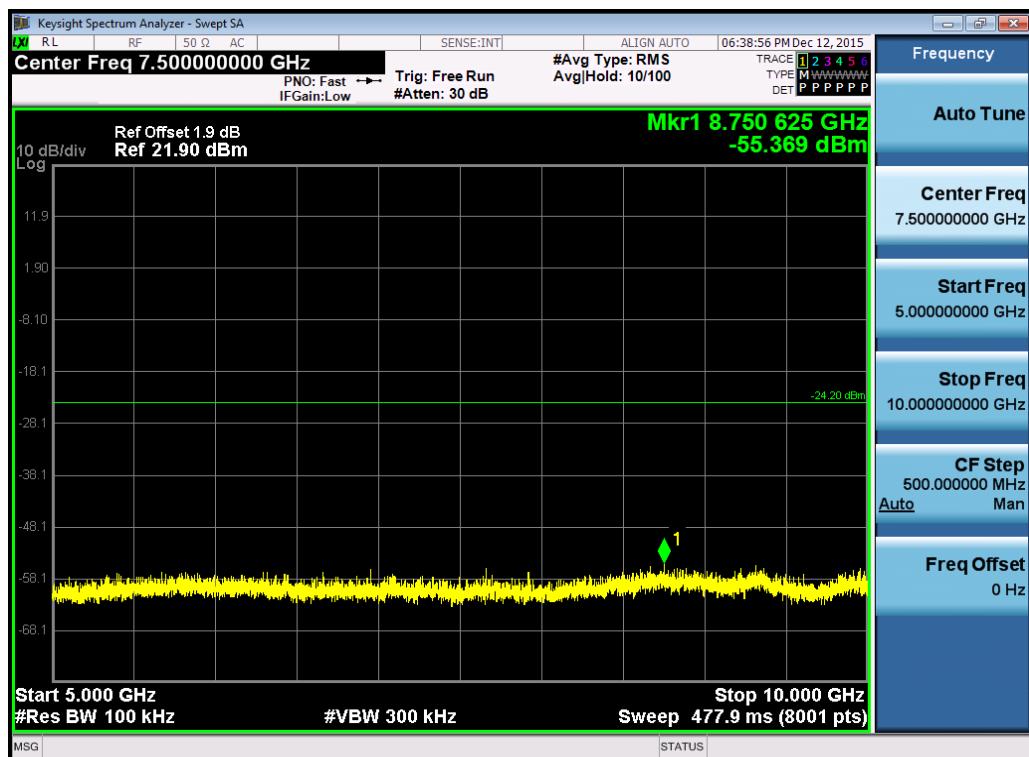


(Plot 4.6.3 A4: Channel 1: 2412MHz @ 802.11n HT20)

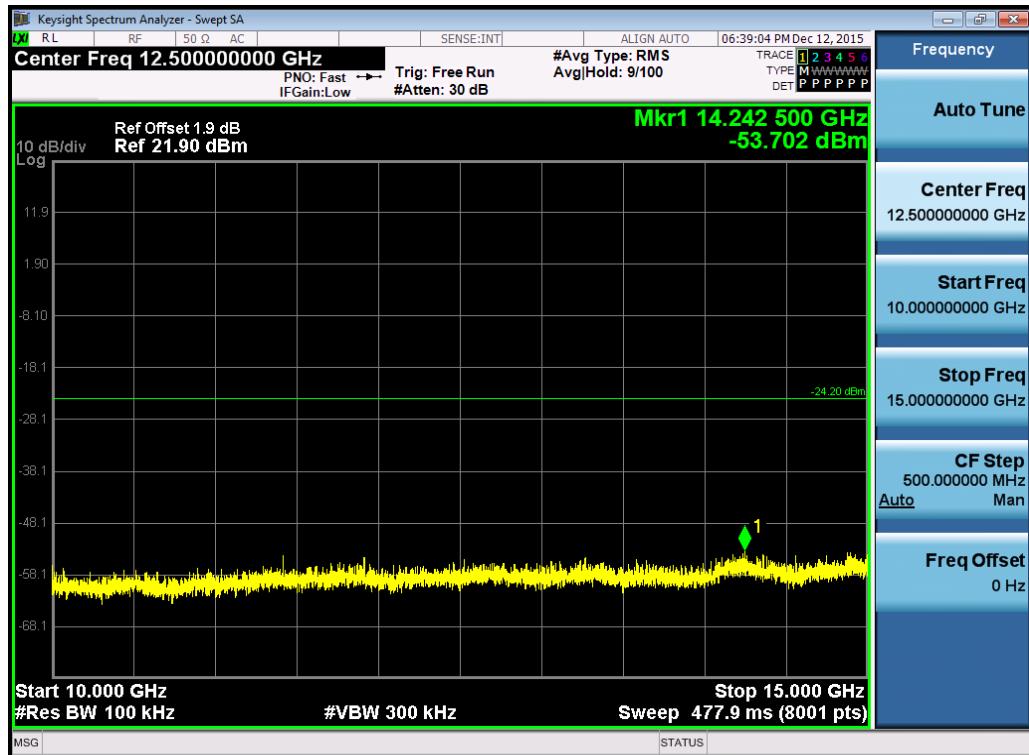


(Plot 4.6.3 A5: Channel 1: 2412MHz @ 802.11n HT20)

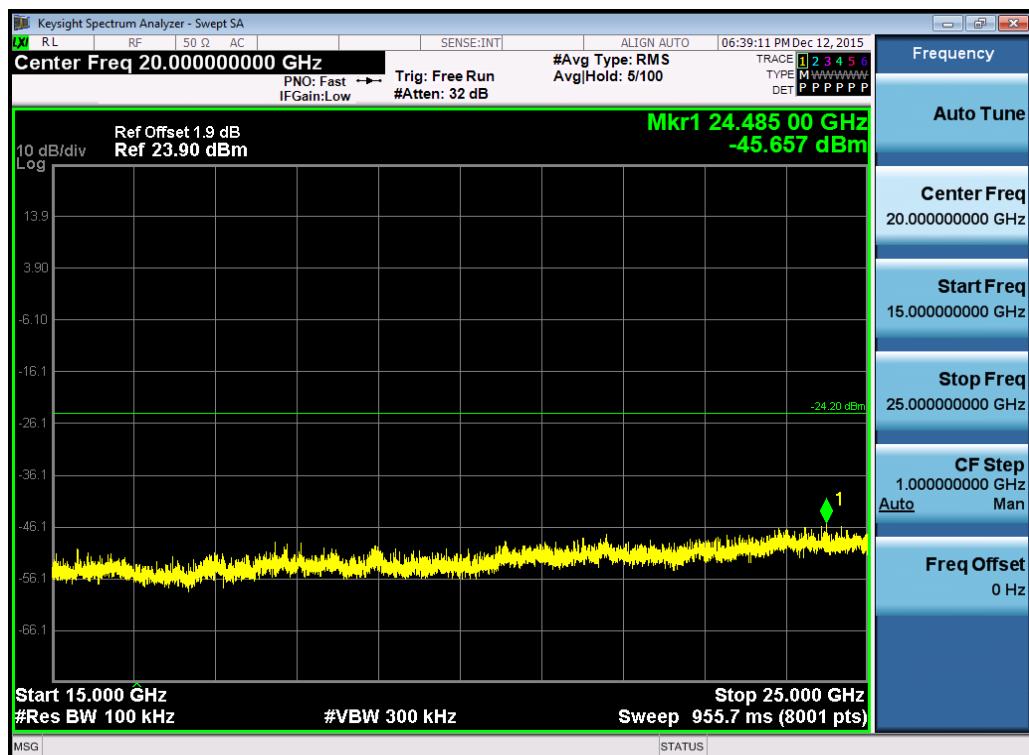


(Plot 4.6.3 A6: Channel 1: 2412MHz @ 802.11n HT20)

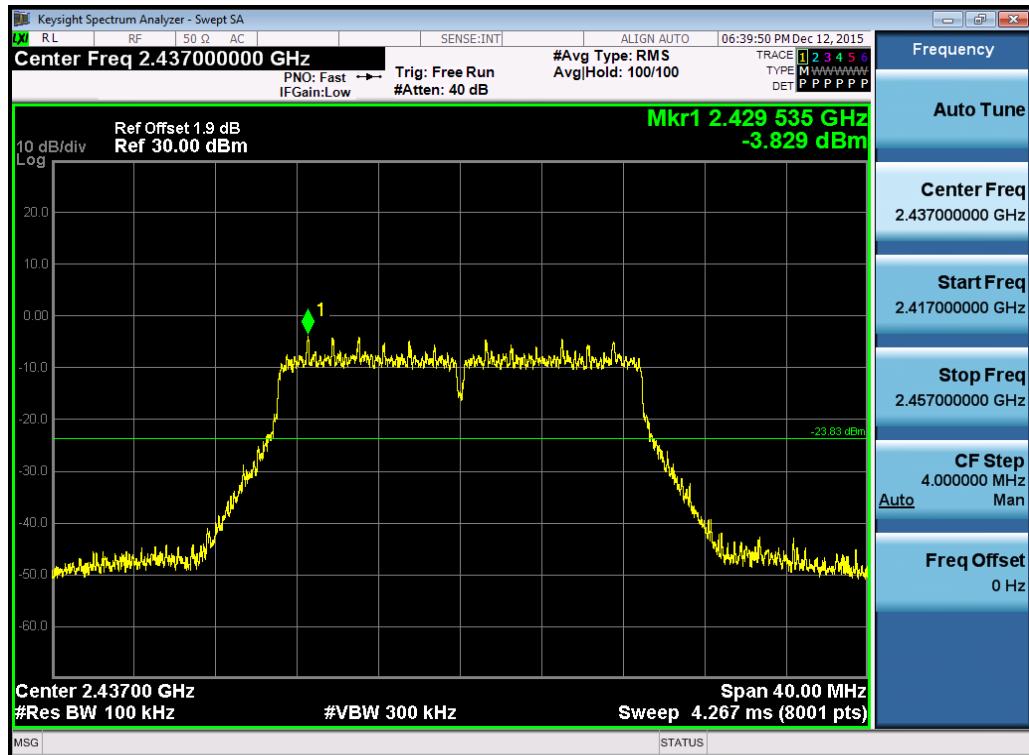


(Plot 4.6.3 B1: Channel 6: 2437MHz @ 802.11n HT20)

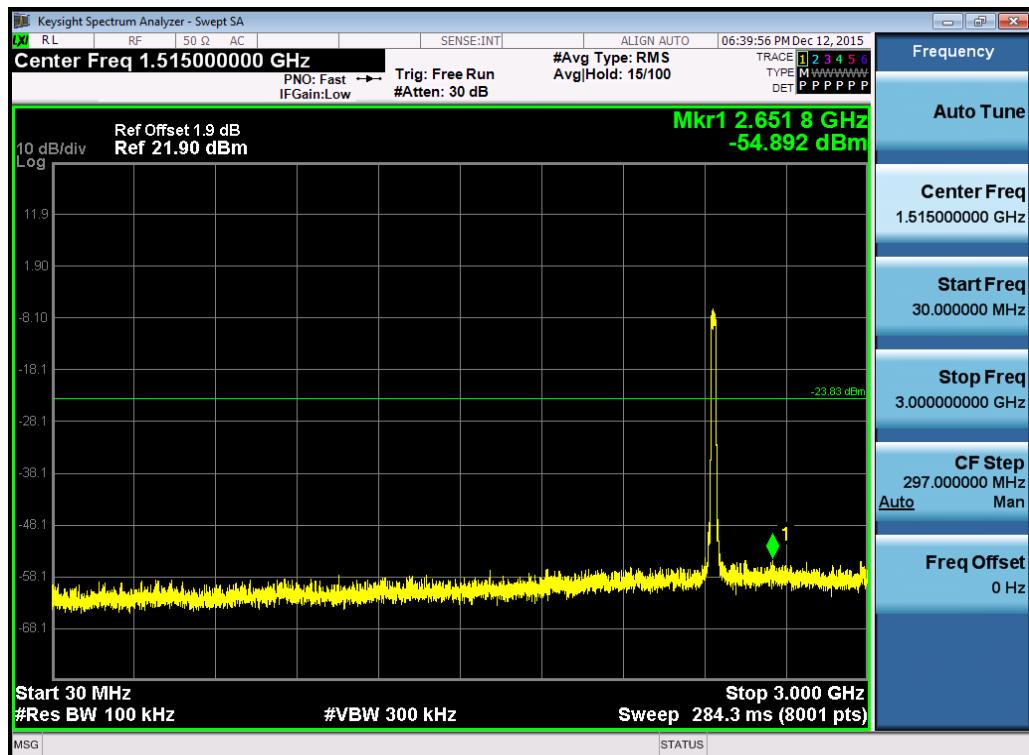


(Plot 4.6.3 B2: Channel 6: 2437MHz @ 802.11n HT20)

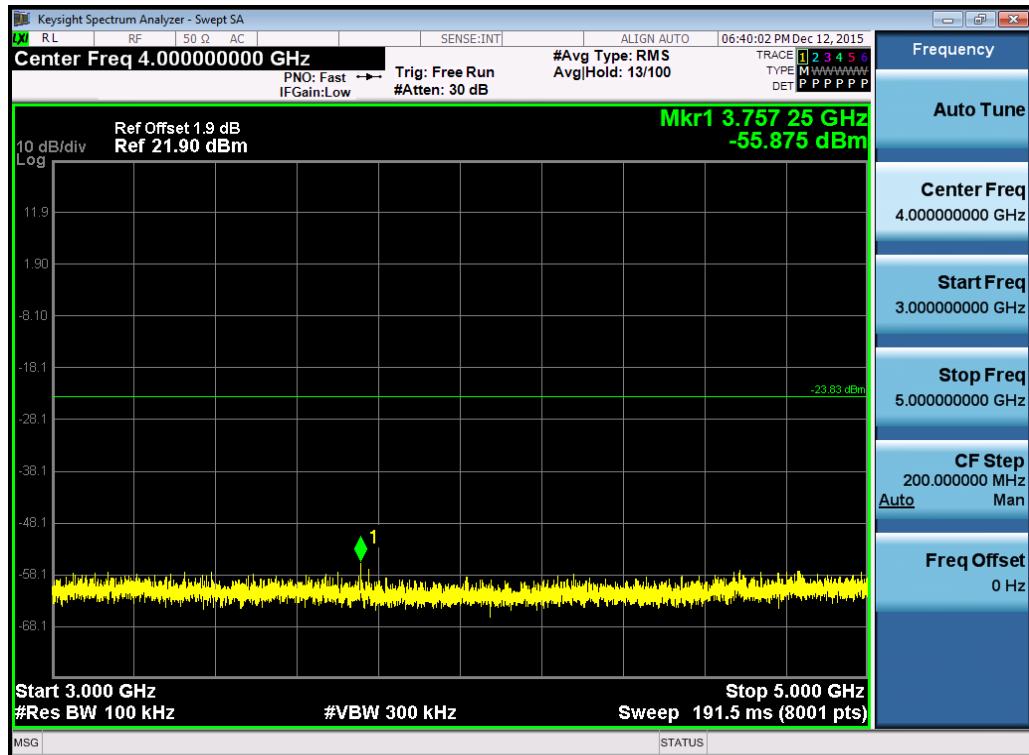


(Plot 4.6.3 B3: Channel 6: 2437MHz @ 802.11n HT20)

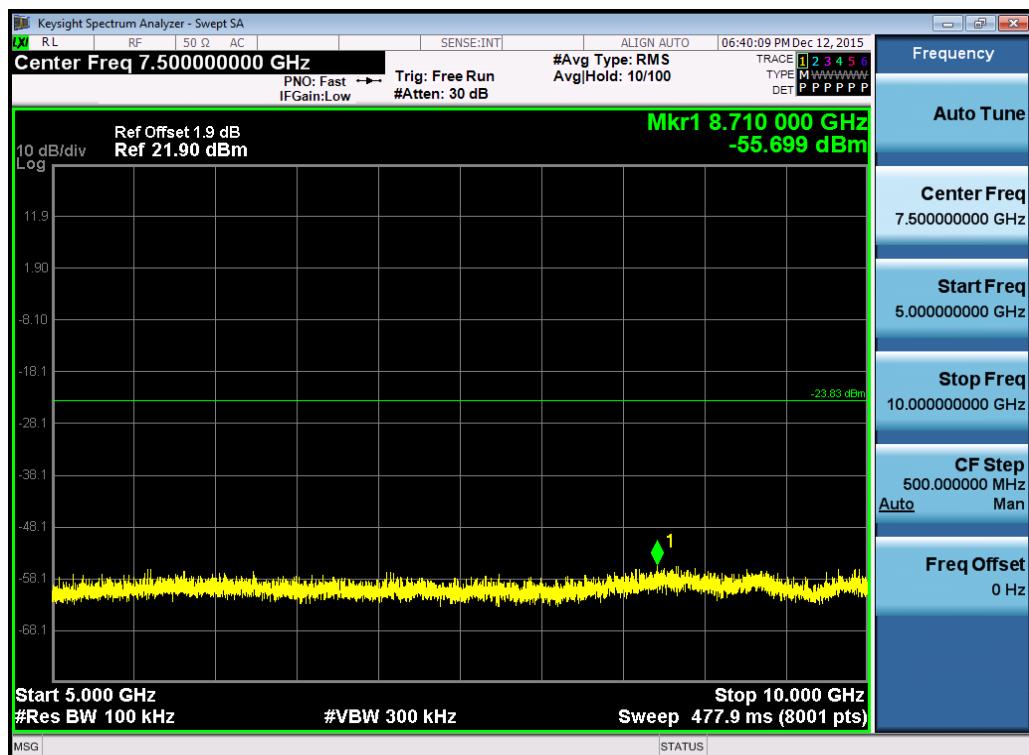


(Plot 4.6.3 B4: Channel 6: 2437MHz @ 802.11n HT20)

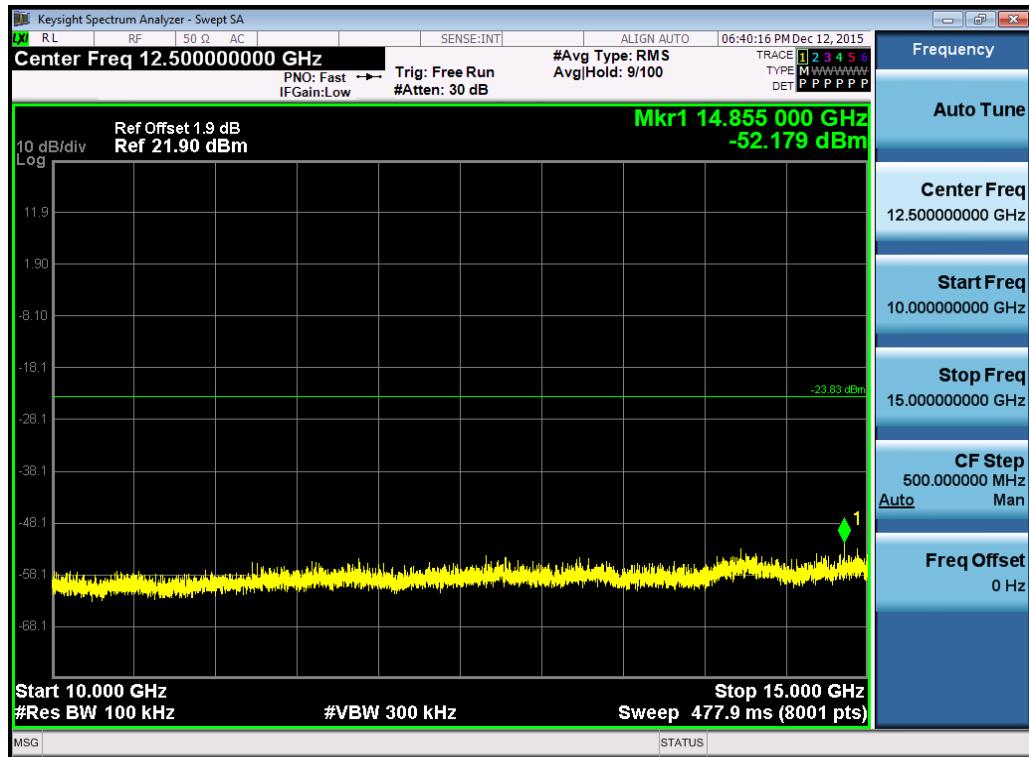


(Plot 4.6.3 B5: Channel 6: 2437MHz @ 802.11n HT20)

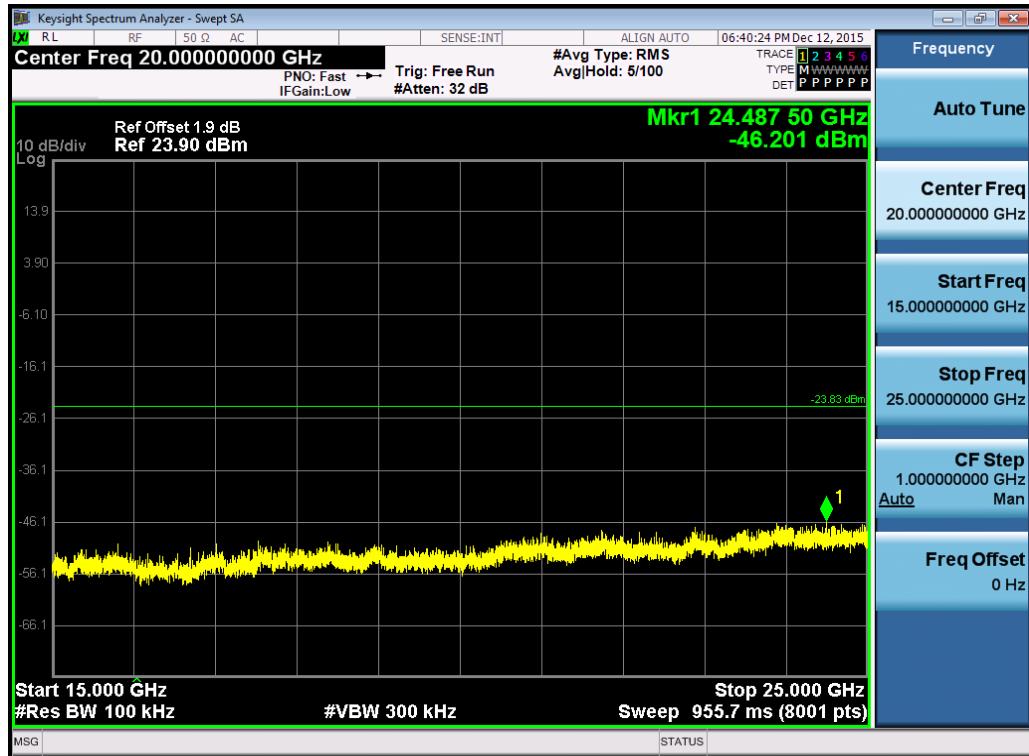


(Plot 4.6.3 B6: Channel 6: 2437MHz @ 802.11n HT20)

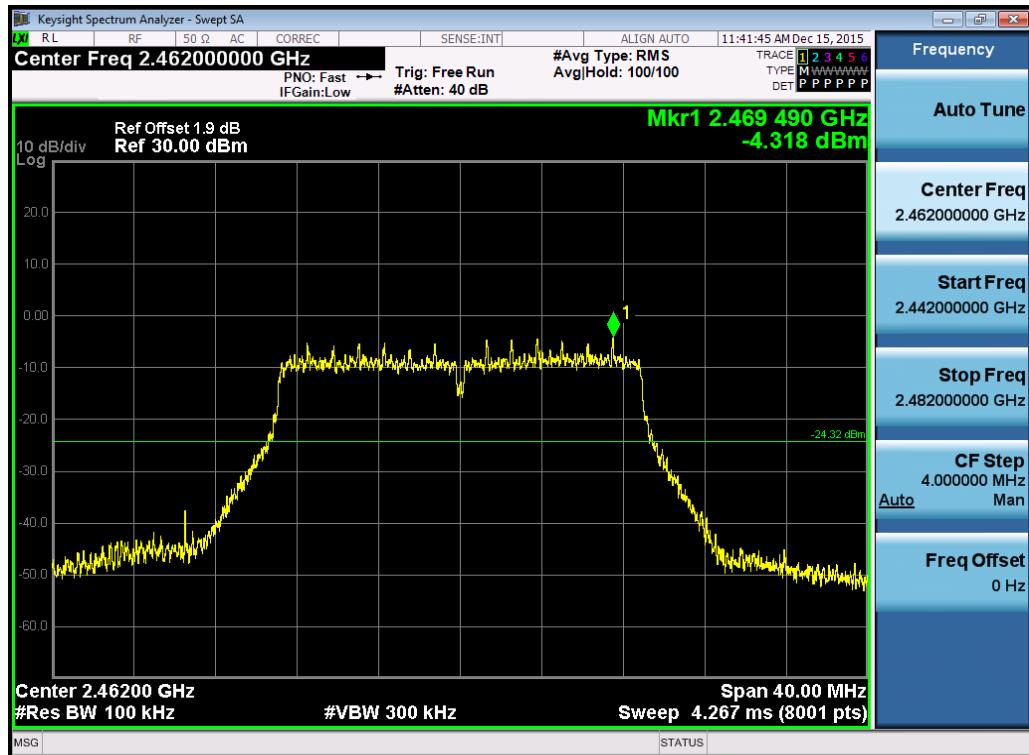


(Plot 4.6.3 C1: Channel 11: 2462MHz @ 802.11n HT20)

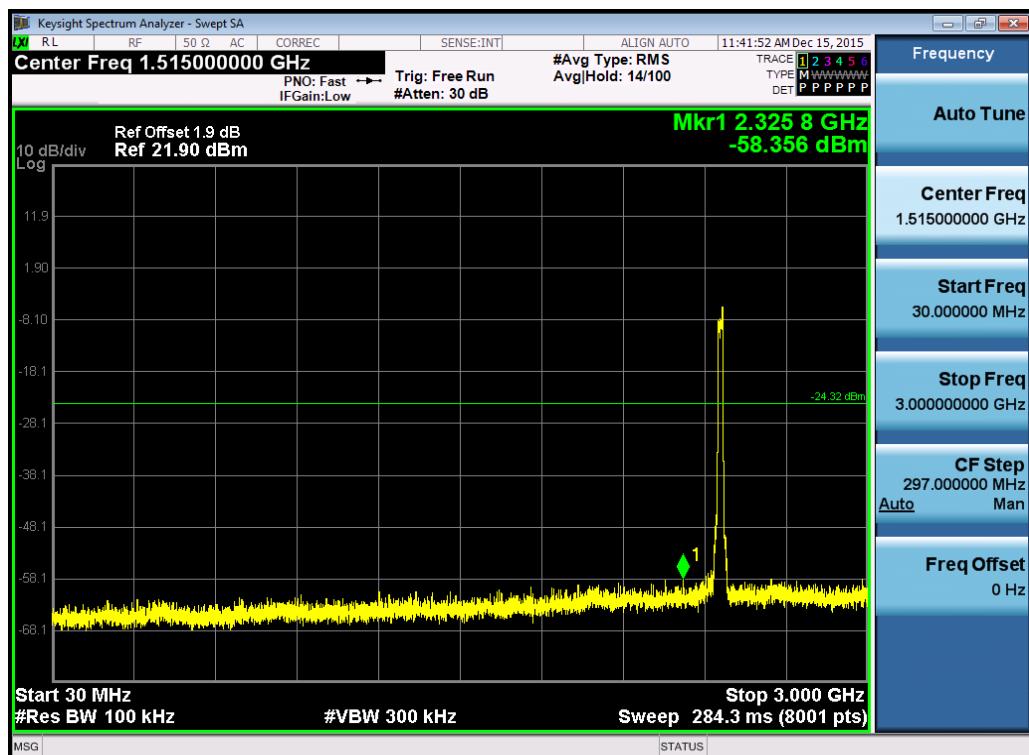


(Plot 4.6.3 C2: Channel 11: 2462MHz @ 802.11n HT20)

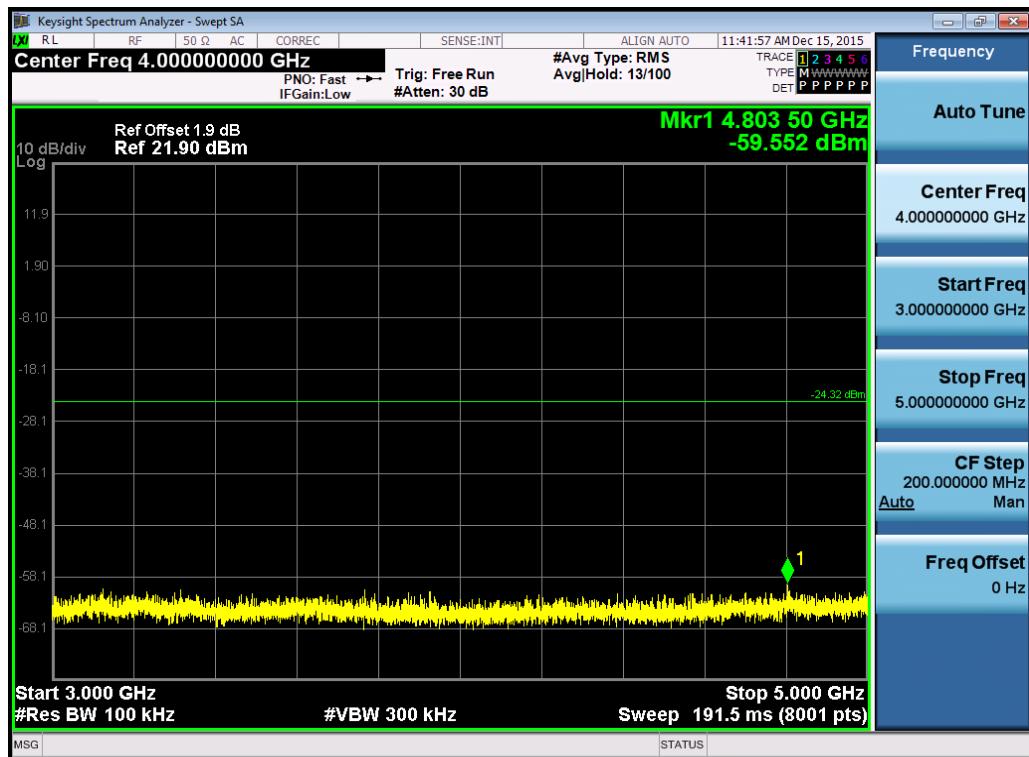


(Plot 4.6.3 C3: Channel 11: 2462MHz @ 802.11n HT20)

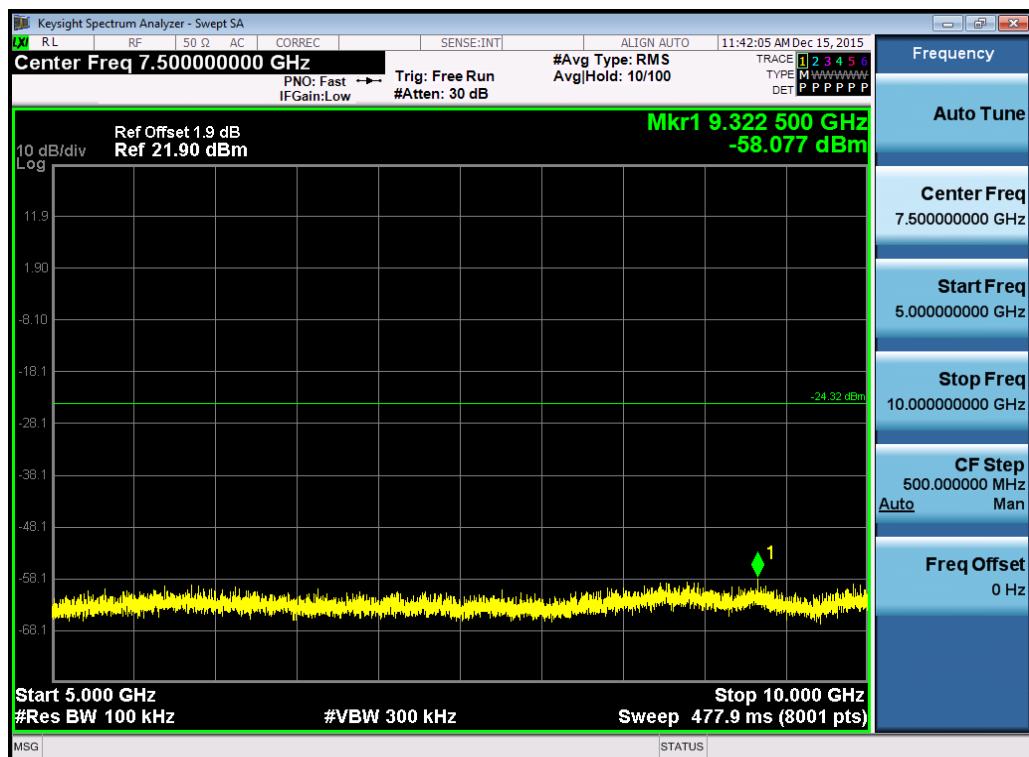

(Plot 4.6.3 C4: Channel 11: 2462MHz @ 802.11n HT20)

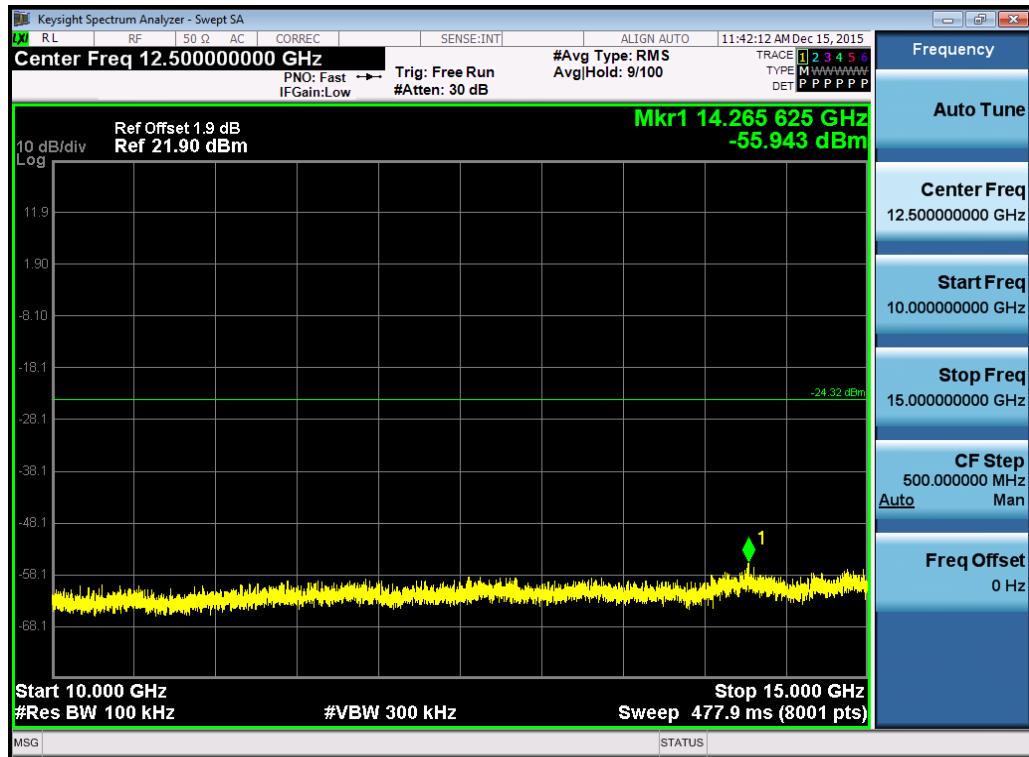


(Plot 4.6.3 C5: Channel 11: 2462MHz @ 802.11n HT20)

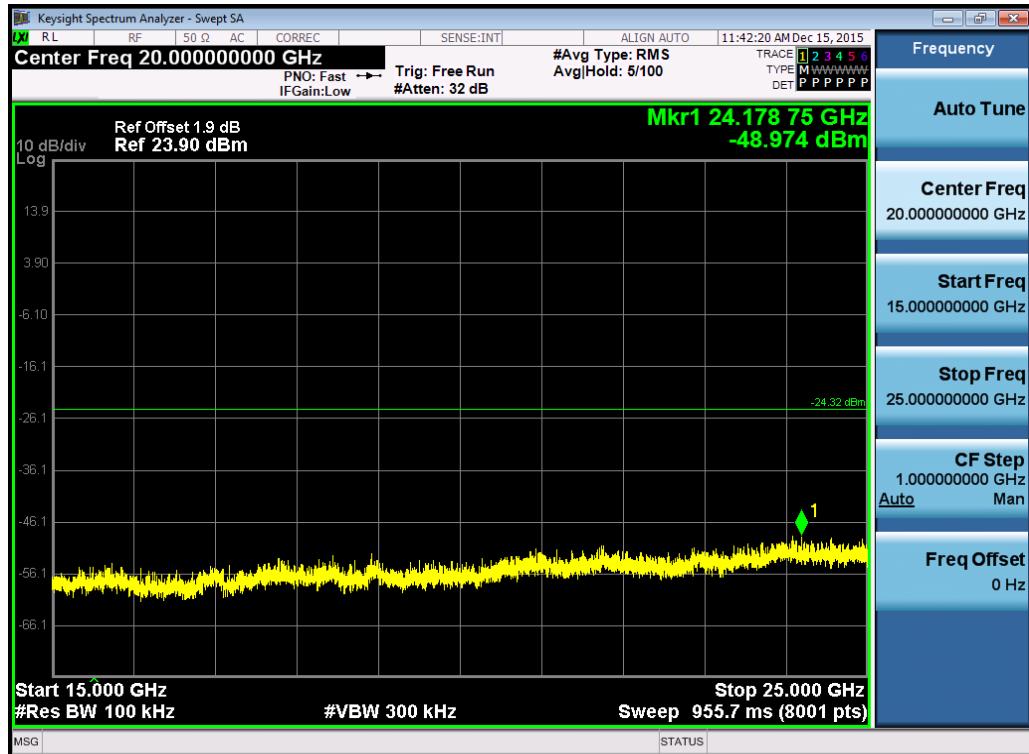

(Plot 4.6.3 C6: Channel 11: 2462MHz @ 802.11n HT20)

4.7 6dB Bandwidth

TEST CONFIGURATION



TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=100 KHz and VBW=300KHz. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB. According to KDB558074 D01 V03 for one of the following procedures may be used to determine the modulated DTS device signal bandwidth.

1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

LIMIT

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

TEST RESULTS

4.7.1 802.11b Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1 | 2412 | 7.112 | Plot 4.7.1 A | ≥ 500 | PASS |
| 6 | 2437 | 7.079 | Plot 4.7.1 B | ≥ 500 | PASS |
| 11 | 2462 | 7.572 | Plot 4.7.1 C | ≥ 500 | PASS |


Note:

1. For 802.11b mode at final test to get the worst-case emission at 1Mbps.
2. The test results including the cable loss.


B. Test Plots

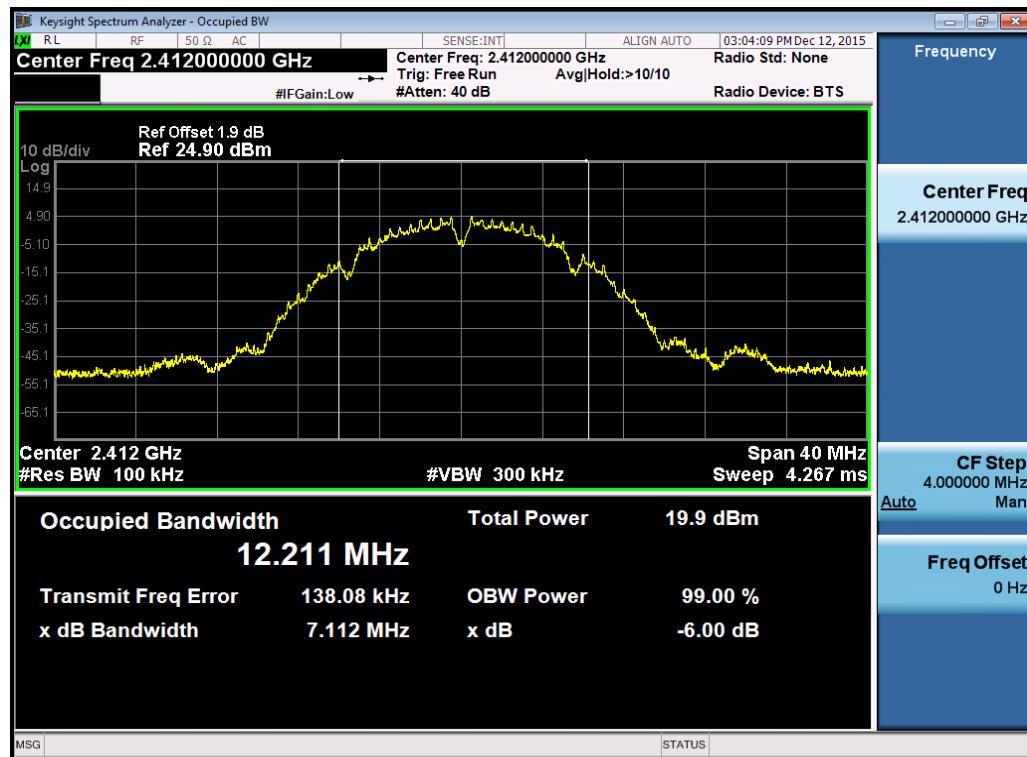

(Plot 4.7.1 A: Channel 1: 2412MHz @ 802.11b)

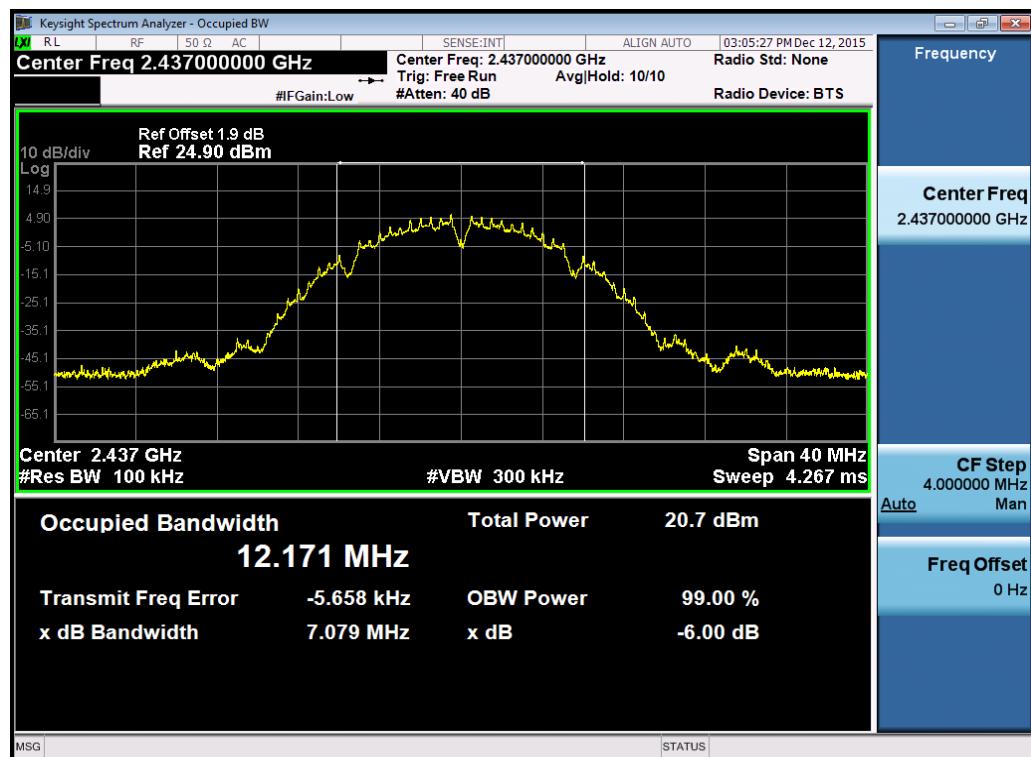

(Plot 4.7.1 B: Channel 6: 2437MHz @ 802.11b)

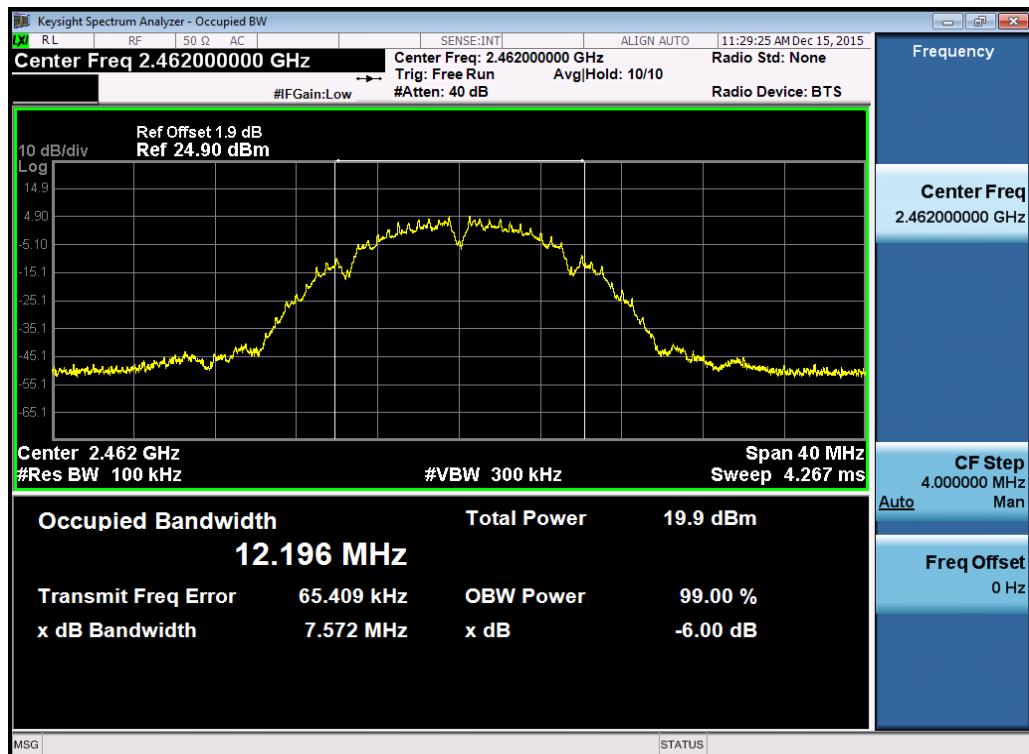

(Plot 4.7.1 C: Channel 11: 2462MHz @ 802.11b)

4.7.2 801.11g Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1 | 2412 | 16.35 | Plot 4.7.2 A | ≥500 | PASS |
| 6 | 2437 | 16.37 | Plot 4.7.2 B | ≥500 | PASS |
| 11 | 2462 | 16.33 | Plot 4.7.2 C | ≥500 | PASS |


Note:

1. For 802.11g mode at final test to get the worst-case emission at 6Mbps.
2. The test results including the cable loss.


B. Test Plots

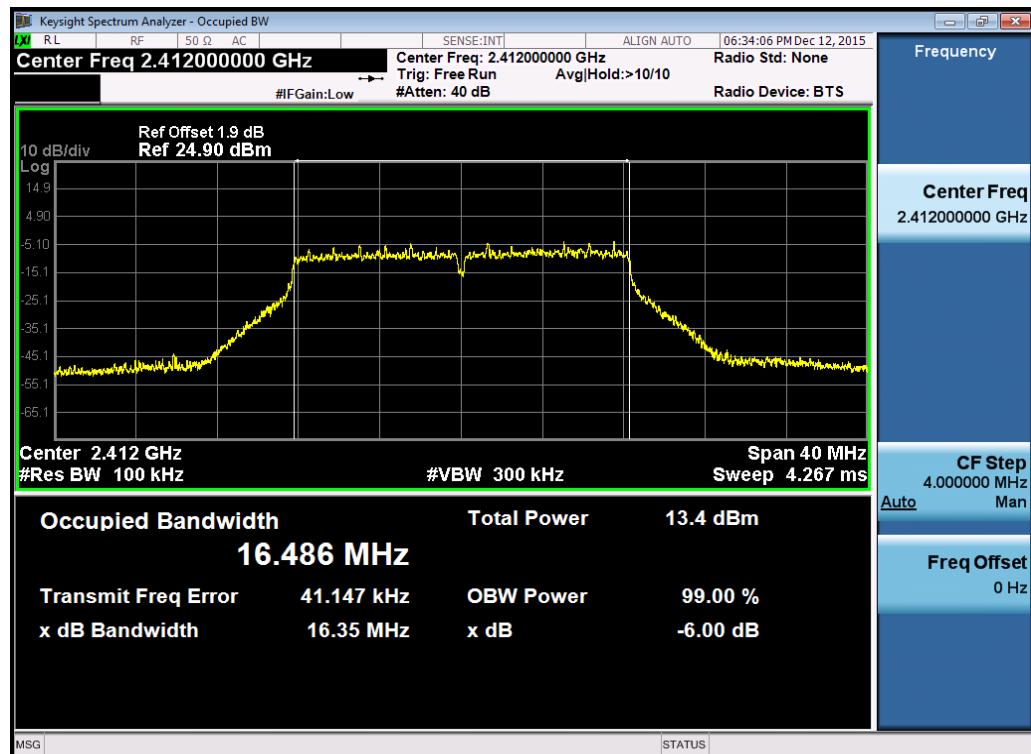

(Plot 4.7.2 A: Channel 1: 2412MHz @ 802.11g)

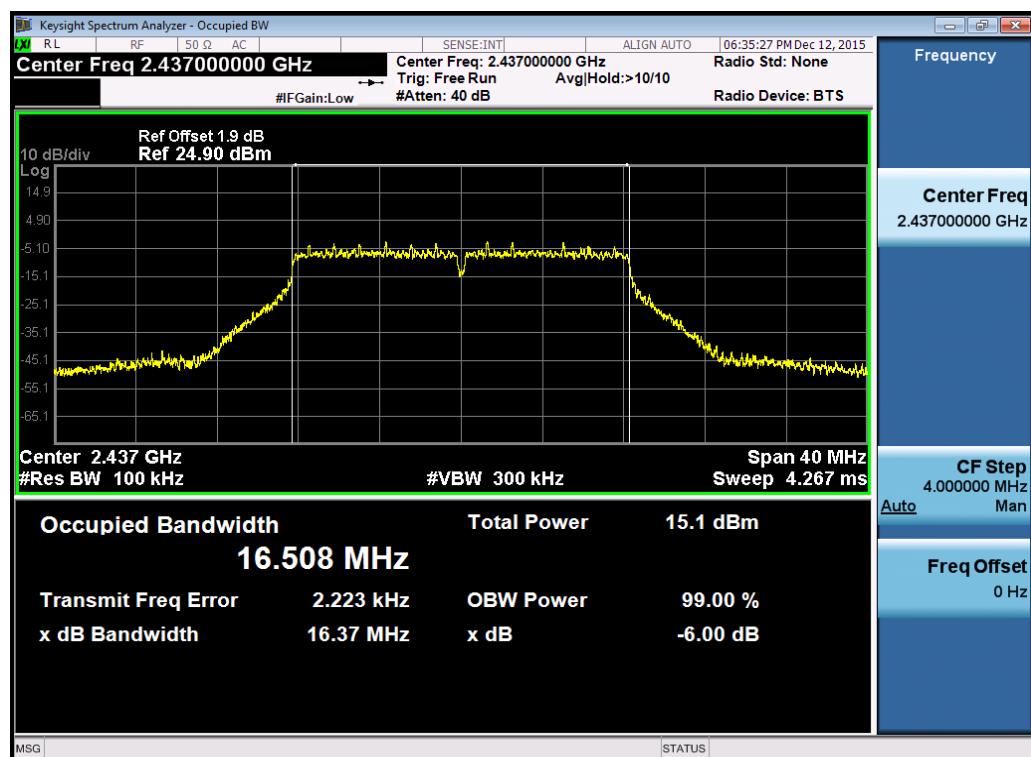

(Plot 4.7.2 B: Channel 6: 2437MHz @ 802.11g)

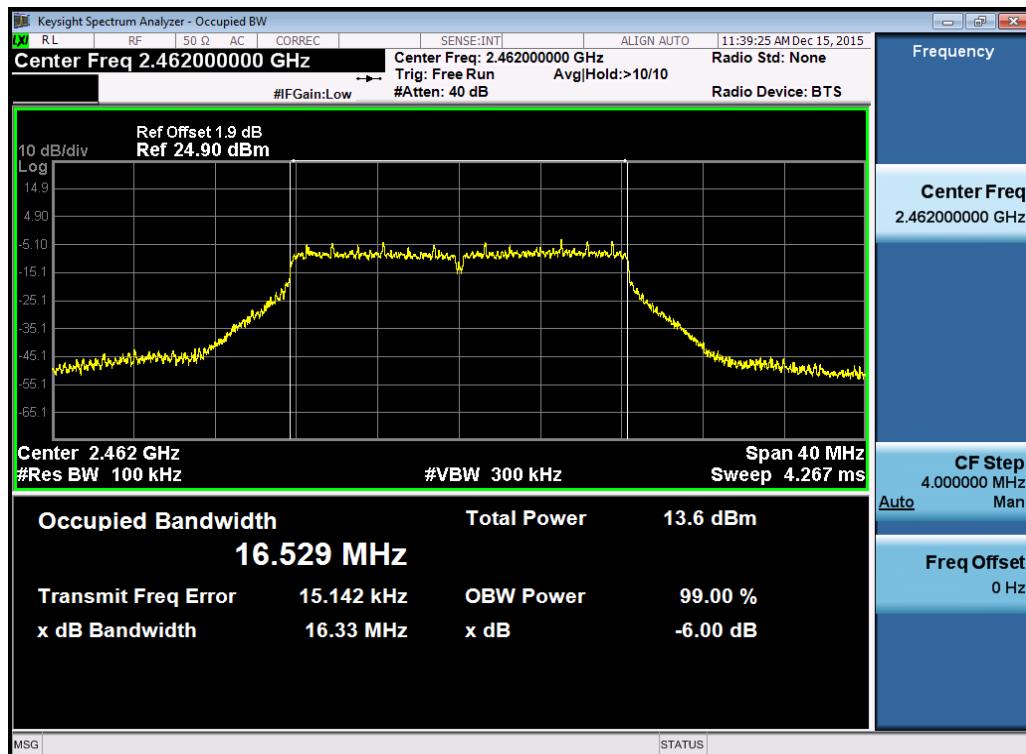

(Plot 4.7.2 C: Channel 11: 2462MHz @ 802.11g)

4.7.3 801.11n HT20 Test Mode


A. Test Verdict

| Channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Refer to Plot | Limits (kHz) | Verdict |
|---------|-----------------|----------------------|---------------|--------------|---------|
| 1 | 2412 | 16.69 | Plot 4.7.3 A | ≥500 | PASS |
| 6 | 2437 | 17.55 | Plot 4.7.3 B | ≥500 | PASS |
| 11 | 2462 | 17.57 | Plot 4.7.3 C | ≥500 | PASS |


Note:

1. For 802.11n HT20 mode at final test to get the worst-case emission at 6.5Mbps.
2. The test results including the cable loss.


B. Test Plots

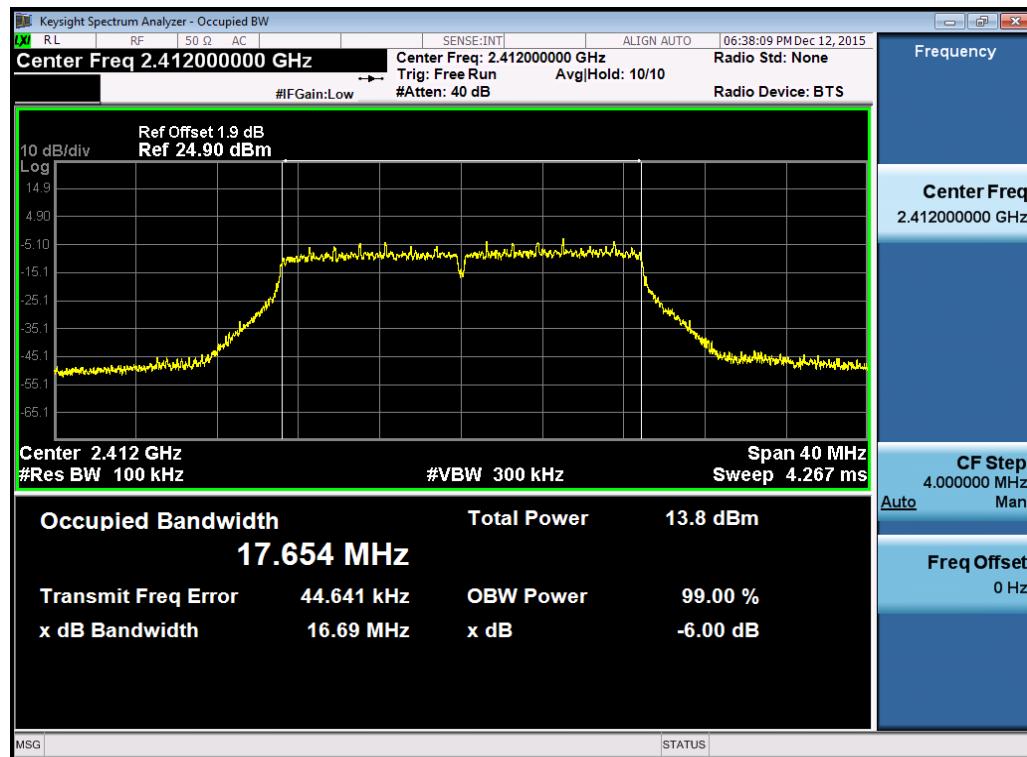

(Plot 4.7.3 A: Channel 1: 2412MHz @ 802.11n HT20)

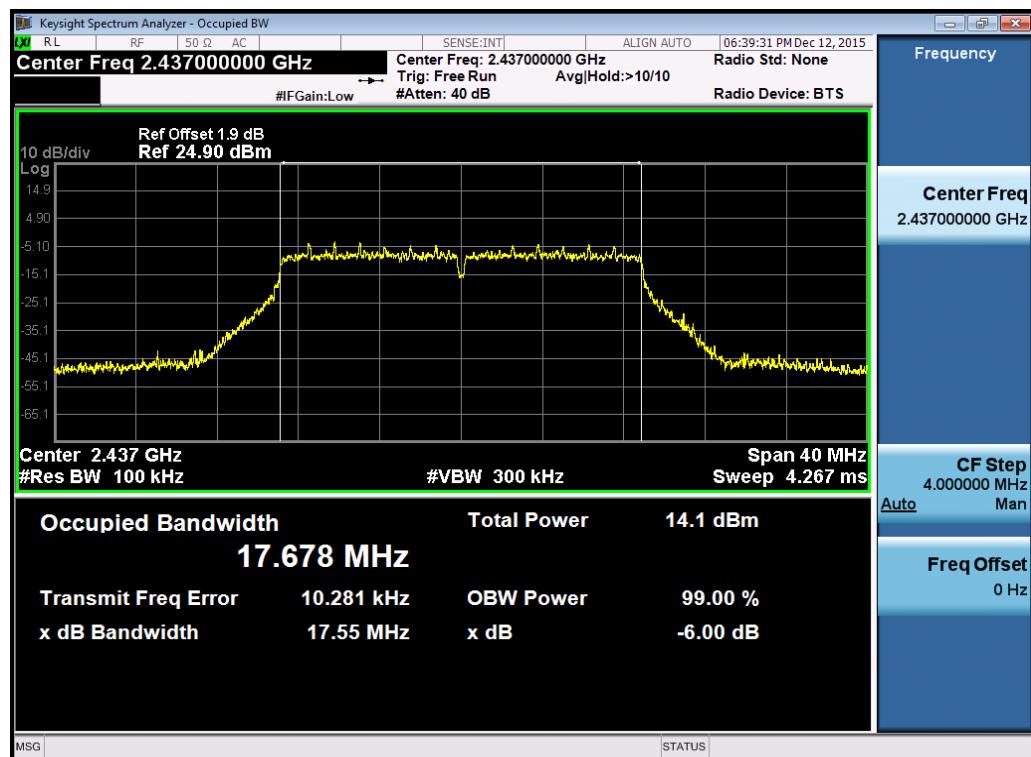

(Plot 4.7.3 B: Channel 6: 2437MHz @ 802.11n HT20)

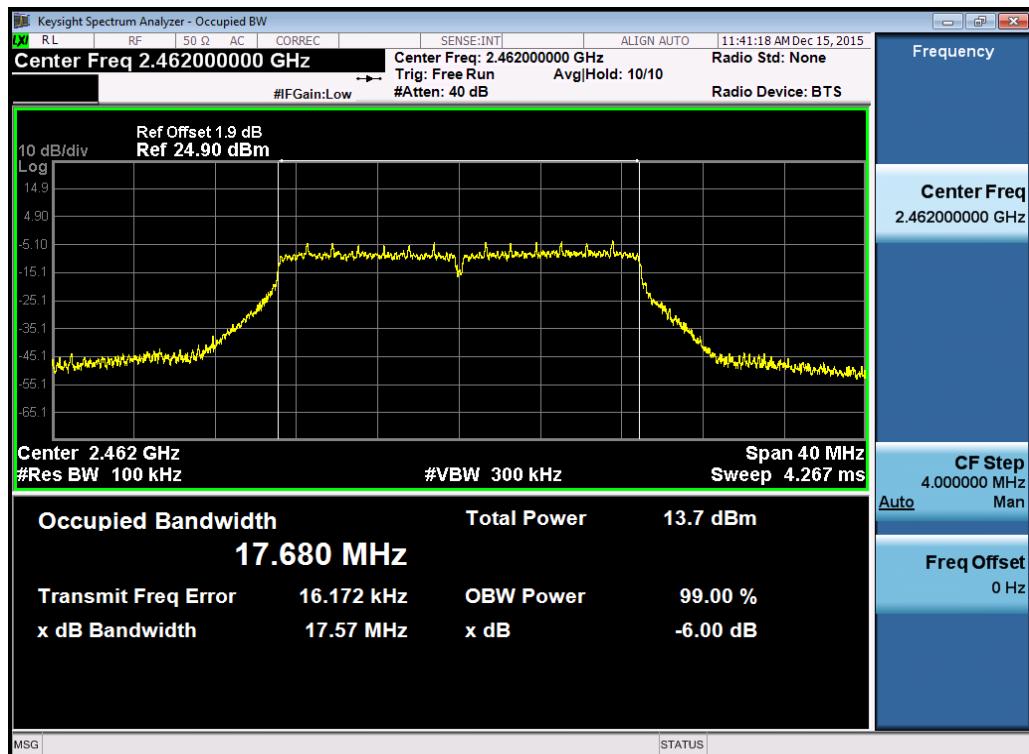

(Plot 4.7.3 C: Channel 11: 2462MHz @ 802.11n HT20)

4.8 Antenna Requirement

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (c), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Measurement

The antenna gain of the complete system is calculated by the difference of radiated power in EIRP and the conducted power of the module. For normal WLAN devices, the DSSS mode is used.

Measurement parameters

| Measurement parameter | |
|-----------------------|----------|
| Detector: | Peak |
| Sweep time: | Auto |
| Resolution bandwidth: | 1MHz |
| Video bandwidth: | 3MHz |
| Trace-Mode: | Max hold |

Limits

| FCC | IC |
|--------------|----|
| Antenna Gain | |
| 6 dBi | |

Results

| T_{nom} | V_{nom} | Lowest Channel 2412 MHz | Middle Channel 2437 MHz | Highest Channel 2462 MHz |
|--|------------------|---|----------------------------|-----------------------------|
| Conducted power [dBm] Measured with DSSS modulation | | 10.53 | 10.87 | 9.74 |
| Conducted power [dBm] Measured with DSSS modulation | | 10.66 | 11.10 | 9.91 |
| Gain [dBi] Calculated | | 0.13 | 0.23 | 0.17 |
| Measurement uncertainty | | $\pm 0.6 \text{ dB (cond.)} / \pm 2.56 \text{ dB (rad.)}$ | | |

5 Test Setup Photos of the EUT

Please refer to separated files for Test Setup Photos of the EUT.

6 External Photos of the EUT

Please refer to separated files for External Photos of the EUT.

7 Internal Photos of the EUT

Please refer to separated files for Internal Photos of the EUT.

.....**End of Report**.....