

Revision 4.0

Report No.: 31750999.002 Page 1 of 26

Electromagnetic Compatibility Test Report

Tested to FCC Part 15C

On

Wireless Remote Monitoring Platform

Model: BRCS02



10 Maguire Road Building 3, 1st Floor Lexington, MA 02421 USA

Prepared by:

TUV Rheinland of North America, Inc.



Report No.: 31750999.002 Page 2 of 26

Manufacturer's statement - attestation

The manufacturer; MC10, as the responsible party for the equipment tested, hereby affirms:

- a) That he has reviewed and concurs that the test shown in this report are reflective of the operational characteristics of the device for which certification is sought;
- b) That the device in this test report will be representative of production units;
- c) That all changes (in hardware and software/firmware) to the subject device will be reviewed.
- d) That any changes impacting the attributes, functionality or operational characteristics documented in this report will be communicated to the body responsible for approving (certifying) the subject equipment.

Steven Fastert	Show
Printed name of official	Signature of official
MC10	
10 Maguire Road Building 3, 1st Floor Lexington, MA 02421 USA	MAR/30/2017
Address	Date
857-214-5611	sfastert@mc10inc.com
Telephone number	Email address of official



Report No.: 31750999.002 Page 3 of 26

Client:	MC10 10 Maguire Road Lexington, MA 02	•	Floor	Steven Fastert Ph: 857-214-5611 Fax: - sfastert@mc10inc.com				
Identification:	Wireless Remo Platform	te Monitoring		Sei	rial No.:	KVDWYW2F		
Test item:	Model: BRCS	02		Da	ite tested:	24 March 2017		
Testing location:	762 Park Aven	d of North Ame nue IC 27596-9470U				19) 554-3668 19) 554-3542		
Test specification:	FCC FCC FCC	Emissions: FCC Part 15, Subpart C FCC Parts 15.207(a), FCC Parts 15.249(d), 15.209, 15.215(c) FCC Part 15.249, FCC Parts 15.249(a), 15.249(c),						
Test Result	The above pro	oduct was found	d to be C	Compli	ant to the	above test standard(s)		
tested by: Mark Ry	an		reviewed by: Randy Sorrenti					
8 September 2017 Signature				ember 20 Signature				
Other Aspects:		"		None				
	ompliant, Complies = passed mpliant, Does Not Comply = f pplicable	ailed						
F©		AC-MRA	CCRED	TED		Industry Canada		
90552 and 1	100881	Testing Cert	t #3331.0	#3331.05 2932H-1 and 2932H-2				

Report No.: 31750999.002 Page 4 of 26

TABLE OF CONTENTS

1	Gi	ENERAL INFORMATION	5
	1.1 1.2 1.3 1.1	SCOPE PURPOSE REVISION HISTORY SUMMARY OF TEST RESULTS	5 5
2	LA	ABORATORY INFORMATION	
3	2.1 2.2 2.3 2.4 2.5	ACCREDITATIONS EXPANDED MEASUREMENT UNCERTAINTY CALIBRATION TRACEABILITY SOFTWARE USED MEASUREMENT EQUIPMENT USED RODUCT INFORMATION	
	3.1 3.2 3.3 3.4	PRODUCT DESCRIPTION EQUIPMENT MODIFICATIONS EQUIVALENT MODELS TEST PLAN	10 10
4	RA	ADIATED EMISSIONS IN TRANSMIT MODE	11
	4.1 4.2	RADIATED EMISSIONS - FCC PARTS 15.249, RSS-210 A2.9(A)	
5	CC	ONDUCTED EMISSIONS ON AC MAINS IN TRANSMIT MODE	26
	5 1	CONDUCTED EMISSIONS ON AC MAINS – FCC 15 207(A) AND RSS-GEN 7 2 4	26



31750999.002

FCC ID: 2AGYUBRCS02

Page 5 of 26

1 General Information

Report No.:

1.1 Scope

This report is intended to document the status of conformance with the requirements of the standard(s), based on the results of testing performed on 24 March 2017 on the Wireless Remote Monitoring Platform, Model No. BRCS02, manufactured by MC10. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components. This report is further intended to document changes and modifications to the EUT throughout its life cycle. All documentation will be included as a supplement.

1.2 Purpose

Testing was performed to evaluate the EMC performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

1.3 Revision History

Revision	Date	Description of Revision
.001	6 April 2017	Initial Release
.002	7 Sept. 2017	Corrected Typos and Updated Measurement Uncertainty tables



Report No.: 31750999.002 Page 6 of 26

1.	1 Sum	ma	ry of Test Results						
A 12 4	MC10	D	ID 'II' 2 1 (F)	Tel	857-214-561	1	Contact	Steven Fastert	
Applicant			nd Building 3, 1st Floor 02421 USA	Fax	-		e-mail	sfastert@mc10	inc.com
Description		Wir	eless Remote Monitoring Platform	Model		BRC	CS02		
Serial Num	ber	KV	/DWYW2F	Test V	oltage/Freq.	Batte	ery Operated		
Test Date C	completed:	24	March 2017	Test E	ngineer	Mar	k Ryan		
Sta	Standards		Description	Severity Level or Limit				Worst-case Values	Test Result
FCC Part 15 Standard	, Subpart C		Radio Frequency Devices- Subpart C: Intentional Radiators	See cal	led out parts be	See Below	Complies		
FCC Part 15	.249		Operation within the band 2400 to 2483.5 MHz	See cal	See called out parts below			See Below	Complies
FCC Parts 1 15.249(c)	5.249(a),		Radiated Output Power for Fundamental and Harmonic Frequencies	Fund: Shall not exceed 50 mV/m at 3m Harmonics: Shall not exceed 500µV/m (0.5 mV/m) at 3m, (unresticted bands)			Below Limits	Complies	
FCC Parts 1 15.209, 15.2	() /		Out-of-Band Spurious Emissions and Band Edges (EUT in Transmit Mode)	Below the applicable limits				Below Limits	Complies
FCC Parts 1	5.207(a)		Conducted Emissions on AC Mains	NA, Tł	ne EUT is batter	ry ope	rated only	NA	NA



31750999.002

Frecisely hight.

2 Laboratory Information

Report No.:

2.1 Accreditations

2.1.1 US Federal Communications Commission

TUV Rheinland of North America located at 762 Park Avenue, Youngsville, NC 27596-9470 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 90552 and 100881). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.2 ILAC / A2LA

The laboratory has been assessed and accredited by A2LA in accordance with ISO Standard 17025:2005 (Certificate Number: 3331.05, Master Code: 134288). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.3 Industry Canada

Registration No.: 2932H-1 The OATS has been accepted by Industry Canada to perform testing to 3 and to 10 meters, based on the test procedures described in ANSI C63.4-2013 and ANSI C63.10-2014.

Registration No.: 2932H-2 The 5 meter chamber has been accepted by Industry Canada to perform testing to 3 meters, based on the test procedures described in ANSI C63.4-2013 and ANSI C63.10-2014.

2.1.4 Japan – VCCI

The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) is a group that consists of Information Technology Equipment (ITE) manufacturers and EMC test laboratories. The purpose of the Council is to take voluntary control measures against electromagnetic interference from Information Technology Equipment, and thereby contribute to the development of a socially beneficial and responsible state of affairs in the realm of Information Technology Equipment in Japan. TUV Rheinland at the 762 Park Ave. Youngsville, N.C 27596 address has been assessed and approved in accordance with the Regulations for Voluntary Control Measures. (Laboratory Registration No: A-0034).

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

FCC ID: 2AGYUBRCS02

Page 7 of 26



Report No.: 31750999.002 Page 8 of 26

2.1.5 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

Field Strength
$$(dB\mu V/m) = RAW - AMP + CBL + ACF$$

Where: $RAW = Measured level before correction (dB<math>\mu$ V)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu V/m = 10^{\frac{dB\mu V/m}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor-Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 dBuV/m + 17.5 dB - 20 dB + 1.0 dB = 23.5 dBuV/m$$

2.2 Expanded Measurement Uncertainty

The accumulated measurement uncertainties of the test system in use for the parameters measured were expected not exceed the values given in the following tables.

Per CISPR 16-4-2:2011	U ₉₅
Radiated Disturbance @ 3m, 10m	
30 MHz – 1,000 MHz (Horizontal Polarity)	3m = 4.52 dB,
1.0 GHz – 6.0 GHz	3m = 4.25 dB
> 6.0 GHz	3m = 4.93 dB

 U_{95} = Expanded Uncertainty.

Note:

Expanded measurement uncertainty numbers are shown in the table above. Compliance criteria are not based on measurement uncertainty. The expanded uncertainty at a level of 95% confidence is obtained by multiplying the combined standard uncertainty by a coverage factor of 2 (U_{96}).



31750999.002

Precisely Right.

Per ETSI TR 100 028 and ETSI TR 100 273	U ₉₅
Frequency Accuracy	
30 MHz – 1000 MHz (Band 1)	1.44 Hz
1.0 GHz – 6.0 GHz (Band 2)	1.78 Hz
> 6.0 GHz (Band 3)	3.13 Hz
Carrier Power Measurement	
Total	1.59 dB
Adjacent Channel Power Measurement	
Total	1.47 dB
Conducted Spurious Emissions Measurement	
Total	4.01 dB
Frequency Deviation Measurement	
Total	1.30 dB
Total Response Measurement	
Total	0.46 dB

U₉₅= Expanded Uncertainty.

Notes:

Report No.:

Expanded measurement uncertainty numbers are shown in the table above. The given uncertainty figures are valid to a confidence level of 95 % (k=2), calculated according to the methods described in ETSI TR 100 028 and ETSI TR 100 273.

2.3 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard 17025:2005. Equipment calibration records are kept on file at the test facility.

2.4 Software Used

Manufacturer	Name	Version
Quantum Change/EMC Systems LLC.	Tile	3.2U
TUV	Alt "R"	1
TUV	Alt "C"	1
ETS-Lindgren	EMPower	1.0.2.11

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

FCC ID: 2AGYUBRCS02

Page 9 of 26



Report No.: 31750999.002 Page 10 of 26

2.5 Measurement Equipment Used

Equipment	Manufacturer	Model #	Serial/Inst #	Last Cal dd/mm/yy	Next Cal dd/mm/yy					
Radiated and Conducted RF Emissions (5 Meter Chamber)										
Receiver, EMI	Rohde & Schwarz	ESIB40	100043	16-Aug-16	16-Aug-17					
Spectrum Analyzer	Agilent Tec.	E7405A	US39440157	16-Aug-16	16-Aug-17					
Amplifier, preamp	Agilent Technologies	8449B	3008A01480	20-Aug-15	20-Aug-17					
Antenna Horn 1-18GHz	EMCO	3115	2236	18-Nov-15	18-Nov-17					
18-40GHz Horn and Amp	COM-POWER	AHA-B40	105002	12-Sep-16	12-Sep-16					
Cable, Coax	MicroCoax	MKR300C-0-0-1200-500500	002	17-Aug-16	17-Aug-17					
Cable, Coax	MicroCoax	MKR300C-0-1968-500310	005	17-Aug-16	17-Aug-17					
Cable, Coax	MicroCoax	UFB29C-1-5905-50U-50U	009	17-Aug-16	17-Aug-17					
Notch Filter: 2.4-2.4835GHz	Micro-Tronics	BRM50702	049	18-Aug-16	18-Aug-17					
USB RF Power Sensor	ETS-Lindgren	7002-006	14I000SNO054	18-Aug-16	18-Aug-17					
USB RF Power Sensor	ETS-Lindgren	7002-006	14I000SNO055	18-Aug-16	18-Aug-17					
	General Laboratory Equipment									
Meter, Multi	Fluke	179	90580752	18-Aug-16	18-Aug-17					
Meter, Temp/Humid/Barom	ExTech	SD700	Q677933	21-Dec-15	21-Dec-17					
Meter, Temp/Humid/Barom	ExTech	SD700	Q677942	21-Dec-15	21-Dec-17					

3 Product Information

3.1 Product Description

See Appendix A of this report

3.2 Equipment Modifications

No modifications were needed to bring product into compliance.

3.3 Equivalent Models

No additional models covered by test report.

3.4 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report



neiniand FCC ID: 2AGYUBRCS02

Report No.: 31750999.002 Page 11 of 26

4 Radiated Emissions in Transmit mode

4.1 Radiated emissions - FCC Parts 15.249, RSS-210 A2.9(a)

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limits:

Fundamental Frequency: 2400 to 2483.5 MHz $-50\,$ mV/m (94 dB μ V/m) at 3m.

Harmonic Frequencies: $500 \mu V/m$ (54 dB $\mu V/m$) at 3m.

Spurious Emissions: To the limits of FCC Part 15.209 and RSS-GEN 7.2.1.

4.1.1 Over View of Test


Results	Complies (as tested	l per this	Date	Date 24 March 2016						
Standard	-	FCC Parts 15.205, 15.209, 15.215(c), 15.249(a), 15.249(c), 15.249(d) RSS-210 A2.9, and RSS-GEN								
Product Model	BRCS02	BRCS02 Serial# KVDWYW2F								
Test Set-up	Tested in a 5m Semi 80cm above the grou					a 1.0m x	1.5m non-co	nductive table		
EUT Powered By	Battery Operated	Temp	73° F	H	umidity	35%	Pressure	998 mbar		
Perf. Criteria	(Below Limit) Perf. Veri			erif	ication	cation Readings Under Limit				
Mod. to EUT	None		Test Pe	rfoi	rmed By	Mark	Mark Ryan			

4.1.2 Test Procedure

Testing was performed in accordance with 47 CFR Part 15, ANSI C63.10:2013, RSS-GEN Issue 4. These test methods are listed under the laboratory's A2LA Scope of Accreditation. This test measures the levels emanating from the EUT, thus evaluating the potential for the EUT to cause radio frequency interference to other electronic devices.

4.1.3 Deviations

Since all emissions outside the band are within the limits of FCC Part 15.209 and RSS-GEN 7.2.1, the emissions shown below are also compliant with FCC Parts 15.205, 15.209, 15.215(c), 15.249(d), RSS-210 A8.5, and RSS-GEN 7.2.1.





Report No.: 31750999.002 Page 12 of 26

4.1.5 Final Test

All final radiated spurious emissions measurements were below (in compliance) the limits.

The worst –case emissions are shown below. All other emissions are on file at TUV Rheinland.

4.1.5.1 Worst Case Emissions inside the Frequency Band

Emission	ANT	ANT	Table	FIM	Amp	Cable	ANT	E-Field	Test to
Freq	Polar	Pos	Pos	Value	Gain	Loss	Factor	Value	Part
(MHz)	(H/V)	(m)	(deg)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	15.249
Orientati	on A:								
2402.00	H	1.2	229	45.66	0.00	5.89	28.51	80.06	94.00
2402.00	H	1.2	229	51.14	0.00	5.89	28.51	85.54	114.00
2402.00	٧	1.4	268	48.83	0.00	5.89	28.51	83.23	94.00
2402.00	V	1.4	268	54.00	0.00	5.89	28.51	88.40	114.00
2440.00	Н	1.1	323	45.97	0.00	5.95	28.65	80.57	94.00
2440.00	H	1.1	323	51.26	0.00	5.95	28.65	85.86	114.00
2440.00	٧	1	278	46.48	0.00	5.95	28.65	81.08	94.00
2440.00	٧	1	278	51.67	0.00	5.95	28.65	86.27	114.00
2480.00	Н	1.1	319	45.17	0.00	5.98	28.76	79.91	94.00
2480.00	Н	1.1	319	50.64	0.00	5.98	28.76	85.38	114.00
2480.00	٧	1.4	288	45.70	0.00	5.98	28.76	80.44	94.00
2480.00	V	1.4	288	51.01	0.00	5.98	28.76	85.75	114.00
Orientati	on B:								
2402.00	H	1.4	201	42.24	0.00	5.89	28.51	76.64	94.00
2402.00	Н	1.4	201	48.19	0.00	5.89	28.51	82.59	114.00
2402.00	V	1.2	129	45.17	0.00	5.89	28.51	79.57	94.00
2402.00	V	1.2	129	50.52	0.00	5.89	28.51	84.92	114.00
Orientation	on C:								
2402.00	Н	1.44	314	46.43	0.00	5.89	28.51	80.83	94.00
2402.00	Н	1.44	314	51.80	0.00	5.89	28.51	86.20	114.00
2402.00	V	1.4	184	29.20	0.00	5.89	28.51	63.60	94.00
2402.00	V	1.4	184	39.78	0.00	5.89	28.51	74.18	114.00

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: GREEN = Average Detector, Blue = Peak Detector

The Limit using the Peak Detector is 20dB higher than the Average Detector limit.

EUT in Orientation A is worst case as shown. All other data is on file at TUV Rheinland.

This highlighted frequency and orientation was Highest Emission (2405 MHz, Orientation A, Vertical).

Note: the Maximum Field strength for using FCC Part 15.249 is 94.0 dB μ V/m (Avg) and 114 dB μ V/m (peak). The high measured emission is 83.23 dB μ V/m (Avg) and 88.40 dB μ V/m (Peak).


FCC Part 15.249 is applicable for this intentional radiator.



Report No.: 31750999.002 Page 13 of 26

4.1.5.2 Emissions Outside the Frequency Band:

Radiated Emissions – 30 MHz to 1000 MHz Horizontal

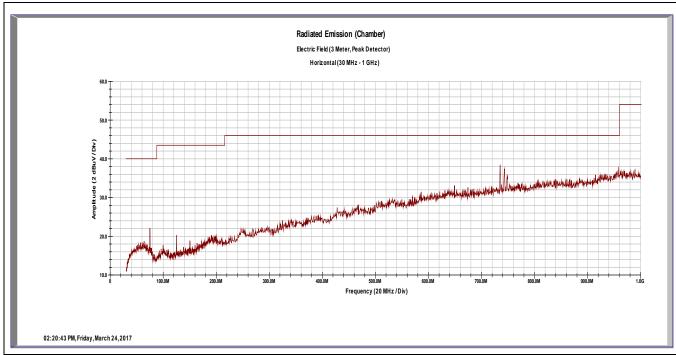

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
736.80	ÌΗ΄	1.2	249	2.10	0.00	3.15	25.30	30.55	46.00	-15.45

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor


Notes: Highest horizontal spurs were on Channel 0 (2402MHz)

A notch filter at the transmitter fundamental frequency was not used.

Report No.: 31750999.002 Page 14 of 26

Radiated Emissions Ch 2 – 30 MHz to 1000 MHz

Vertical

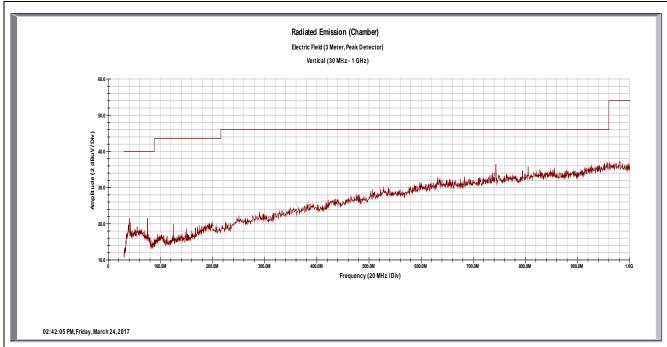

Emission	ANT	ANT	Table	FIM	Amp	Cable	ANT	E-Field	Spec	Spec
Freq	Polar	Pos	Pos	Value	Gain	Loss	Factor	Value	Limit	Margin
(MHz)	(H/V)	(m)	(deg)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)
40.56	Н	1	345	3.95	0.00	0.75	13.46	18.15	40.00	-21.85
743.00	Н	1.4	188	3.20	0.00	3.17	25.30	31.67	46.00	-14.33

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: Highest Vertical spurs were on Channel 39 (2480 MHz).


A notch filter at the transmitter fundamental frequency was not used.



Report No.: 31750999.002 Page 15 of 26

Worst Case Radiated Emissions – 1 to 10 GHz

Horizontal

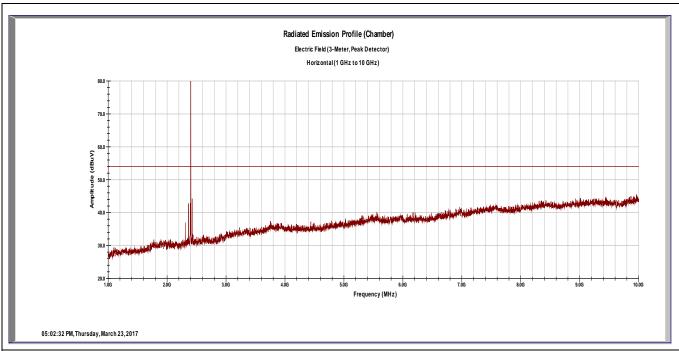

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: Worst-case spurs and harmonic on Vertical plot.


A notch filter at the transmitter fundamental frequency was not used.



Report No.: 31750999.002 Page 16 of 26

Worst Case Radiated Emissions - 1 to 10 GHz

Vertical

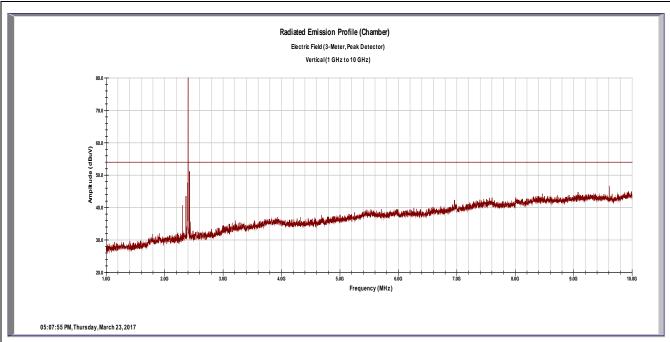

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)
9607.20	Н	1.1	204	24.71	34.18	16.88	37.35	44.76	54.00	-9.24
9607.20	V	1.1	204	37.93	34.18	16.88	37.35	57.98	74.00	

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: GREEN = Average Detector, Blue = Peak Detector


The Limit using the Peak Detector is 20dB higher than the Average Detector limit.

Due to the transmitter is very low power, the Band notch filter was not used for these values.



Report No.: 31750999.002 Page 17 of 26

Radiated Emissions Ch 2 – 10 to 18 GHz Horizontal

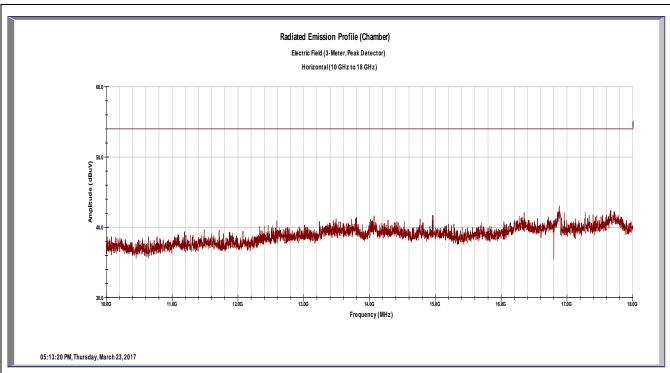

Emission Freq (MHz)	ANT Polar (H/V)	ANT Pos (m)	Table Pos (deg)	FIM Value (dBuV)	Amp Gain (dB)	Cable Loss (dB)	ANT Factor (dB/m)	E-Field Value (dBuV/m)	Spec Limit (dBuV/m)	Spec Margin (dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: Band notch filter was not used.


No measureable emissions noted.



Report No.: 31750999.002 Page 18 of 26

Radiated Emissions Ch 2 – 10 to 18 GHz

Vertical

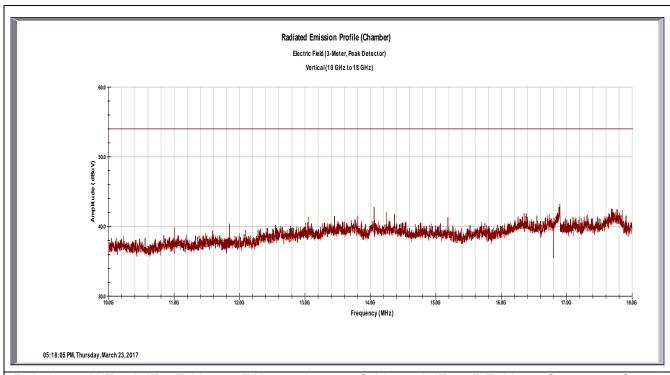

Emission	ANT	ANT	Table	FIM	Amp	Cable	ANT	E-Field	Spec	Spec
Freq	Polar	Pos	Pos	Value	Gain	Loss	Factor	Value	Limit	Margin
(MHz)	(H/V)	(m)	(deg)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: Band notch filter not used. No measureable emissions noted



Report No.: 31750999.002 Page 19 of 26

Radiated Emissions Ch 2 – 18 to 25 GHz Horizontal

🔆 Agilent 08:21:16 Mar 24, 2017 Ref 90 dB_u∨ #Atten 0 dB Peak Log 10 dB/ Start 18 GHz Stop 25 GHz Res BW 1 MHz VBW 3 MHz Sweep 79.99 ms (8000 pts) E-Field ANT ANT Table FIM Cable ANT Spec Spec Emission Amp Limit Freq Polar Pos Pos Value Gain Loss Factor Value Margin (MHz) (H/V)(dBuV) (dBuV/m) (dBuV/m) (dB) (m) (deg) (dB) (dB) (dB/m)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: No measureable emissions were noted.

No correction factors were used for the above graph. The number of Sweep Points was increased to 8000.

The Measuring distance was decreased to 1 meter.

No notch filter was used for this frequency range.

The other two channels presented very similar results. Plots for other the channels are on file at TUV Rheinland.



Report No.: 31750999.002 Page 20 of 26

Radiated Emissions Ch 2 – 18 to 25 GHz Vertical

🔆 Agilent 08:19:42 Mar 24, 2017 Ref 90 dBu√ #Atten 0 dB Peak Log 10 dB/ M1 S2 S3 FC Stop 25 GHz Start 18 GHz Res BW 1 MHz VBW 3 MHz Sweep 79.99 ms (8000 pts) ANT ANT Table FIM Cable ANT E-Field Spec **Emission** Amp Spec Value Limit Margin Freq Polar Pos Pos Value Gain Loss Factor (H/V)(dBuV) (dBuV/m) (dBuV/m) (dB) (MHz) (m) (deg) (dB) (dB) (dB/m)

Spec Margin = E-Field Value - Limit, E-Field Value = FIM Value - Amp Gain + Cable Loss + ANT Factor

Notes: No measureable emissions were noted.

No correction factors were used for the above graph. The number of Sweep Points was increased to 8000.

The Measuring distance was decreased to 1 meter.

No notch filter was used for this frequency range.

The other two channels presented very similar results. Plots for other the channels are on file at TUV Rheinland.



Report No.: 31750999.002 Page 21 of 26

4.2 Band Edge requirements - FCC Part 15.249(d), RSS-210 2.2

4.2.1 Test Over View

Results	Complies (as tested	l per this	Date	2	23 Ma	rch 2017				
Standard	FCC Part 15.249(d),	FCC Part 15.249(d), RSS 210 2.2								
Product Model	BRCS02	BRCS02 Serial# KVDWYW2F								
Test Set-up	Direct Measurement	Direct Measurement from antenna port								
EUT Powered By	Battery Operated	Temp	73° F	H	umidity	35%	Pressu	ure	998 mbar	
Perf. Criteria	(Below Limit)		Perf. Verification Readings Under Limit					mit		
Mod. to EUT	None		Test Performed By Mark Ryan							

4.2.2 Test Procedure

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Sec. 15.209, whichever is the lesser attenuation.

4.2.3 Deviations

There were no deviations from the test methodology listed in the test plan.


RBW of 100 kHz was chosen as it is within 1% to 5% of the total span. (4.8%)

The VBW of 300 kHz was chosen as it is 3 times the 100 kHz RBW.

The Sweep time was set to Auto.

4.2.4 Final Test

The EUT met the performance criteria requirement as specified in the standards.

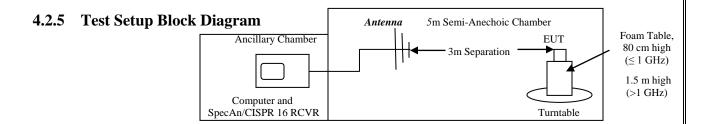

The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TUV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.

TUV Rheinland of North America, Inc., 762 Park Avenue, Youngsville, NC 27596-9470, Tel: 919-554-3668, Fax: 919-554-3542



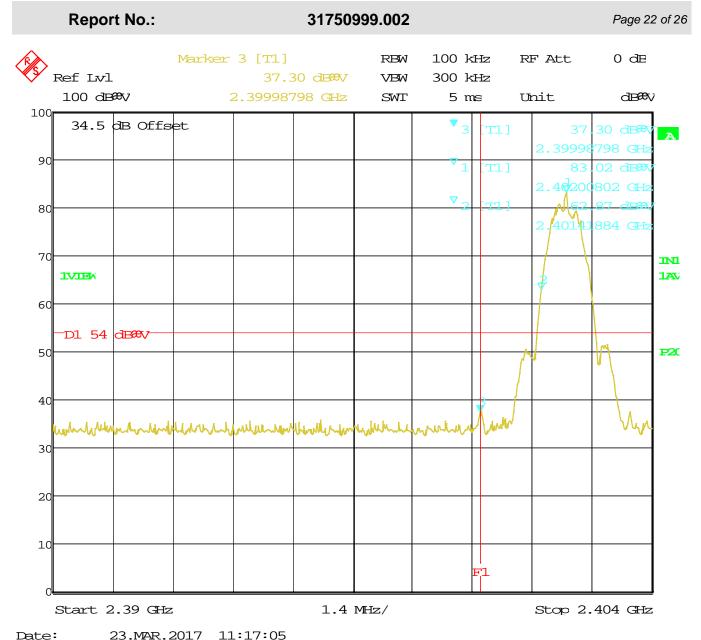


Figure 1: Lower Band Edge Average Measurement (Radiated Emission)

Note: Band Edge is at 2.4 GHz, and the nearest restricted band (2390MHz) is 10 MHz below the band-edge. At the lowest channel, the 20dB down point is at 2401.42 MHz. The EUT is compliant with the rules.




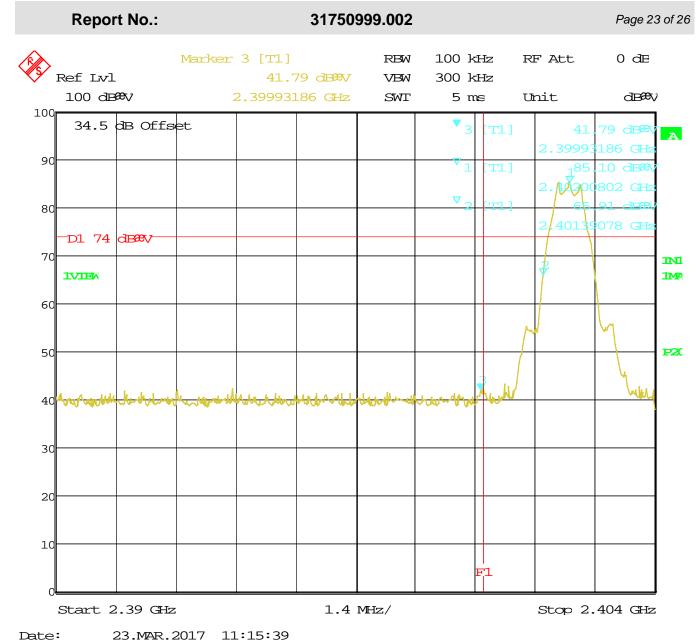


Figure 2: Lower Band Edge Peak Measurement (Radiated Emission)

Note: Band Edge is at 2.4 GHz, and the nearest restricted band (2390MHz) is 10 MHz below the band-edge. At the lowest channel, the 20dB down point is at 2401.39 MHz. The EUT is compliant with the rules.



Report No.: 31750999.002 Page 24 of 26

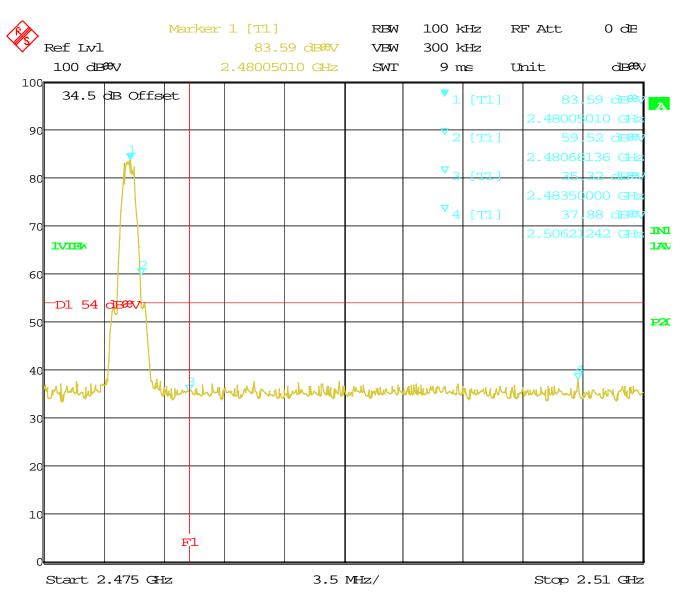


Date: 23.MAR.2017 10:44:25

Figure 3: Upper Band Edge Average Measurement (Radiated Emission)

Note: Band edge (F1) at 2483.5 MHz is also the start of a restricted band, so the rules for restricted bands apply.

The highest channel frequency outside the band-edge (2506.21 MHz) is $37.88 \text{ dB}\mu\text{V/m}$ (average), which is 16.12 dB below the 54 dB restrict-band average limit.



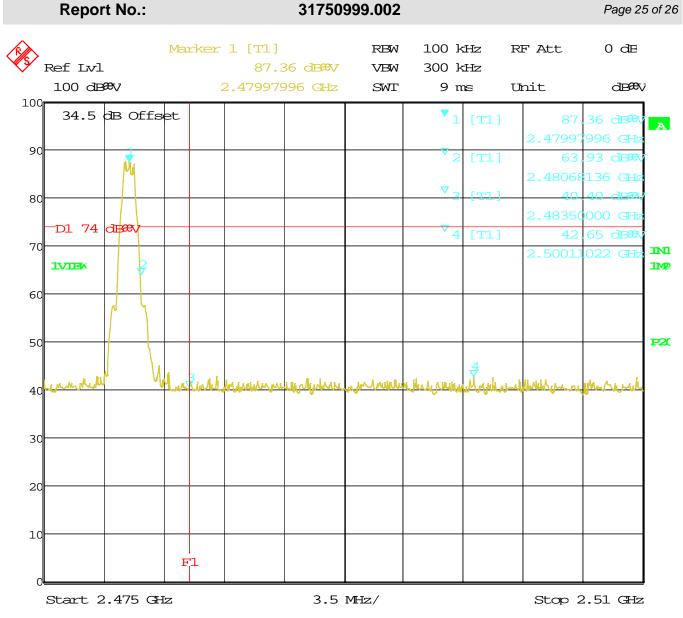

Date: 23.MAR.2017 11:00:26

Figure 4: Upper Band Edge Peak Measurement (Radiated Emission)

Note: Band edge (F1) at 2483.5 MHz is also the start of a restricted band, so the rules for restricted bands apply.

The highest channel frequency outside the band-edge (2500.11 MHz) is $42.65~dB\mu V/m$ (peak) which is 31.35 dB below the 74 dB restrict-band peak limit.

The EUT is compliant with the rules.



31750999.002

neiniand FCC ID: 2AGYUBRCS02

Page 26 of 26

5 Conducted Emissions on AC MAINS in Transmit mode

5.1 Conducted Emissions on AC Mains – FCC 15.207(a) and RSS-GEN 7.2.4

This test measures the electromagnet levels of spurious signals generated by the EUT on the AC power line that may affect the performance of other nearby electronic equipment.

5.1.1 Over View of Test

Report No.:

Results	NA EUT is battery of	operated	Date	16 Mar 2	2017					
Standard	FCC Parts 15.207(a)									
Product Model	BRCS02 Serial# NA									
Test Set-up	Tested in shielded room. EUT placed on table, see test plans for details									
EUT Powered By	Battery Operated	Temp	72° F	Hum	idity	10%	Pressure	1001 mbar		
Frequency Range	150 kHz – 30 MHz									
Perf. Criteria	Battery Operated Perf. Verification Readings Under Limit for L1 & Neutra							L1 & Neutral		
Mod. to EUT	None									

5.1.2 Test Procedure

Conducted and FCC emissions tests were performed using the procedures of ANSI C63.4:2014 including methods for signal maximizations and EUT configuration.

The frequency range from 150 kHz – 30 MHz was investigated for conducted emissions.

EUT was placed on a 1.0m x 1.5m non-conductive table 80cm above the ground plane, 40cm from a vertical ground plane, using procedures specified in the test plan and standard.

5.1.3 Deviations

The Test sample is battery operated only. It does not have provision for external power of any kind.

5.1.4 Final Test

This test is not applicable for this device.