

FCC REPORT

Applicant: Wonderwing H.K Electronics Ltd

Address of Applicant: Room 2401-2404, REITH CENTER No, 9030 North of Shennan Rd, Nanshan, Shenzhen, China, 518053

Equipment Under Test (EUT)

Product Name: SZ1 Zigbee module

Model No.: SZ1

Trade Mark: Zigbee

FCC ID: 2AGZD-SZ1

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247:2014

Date of sample receipt: December 14, 2015

Date of Test: December 15-18, 2015

Date of report issued: December 21, 2015

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:

A handwritten signature of Robinson Lo is written over a circular blue official seal. The seal contains the text 'GTS' in the center, surrounded by 'UNITED TECHNOLOGY SERVICES' and 'GLOBAL TESTING'.

Robinson Lo
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the GTS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of GTS or testing done by GTS in connection with, distribution or use of the product described in this report must be approved by GTS in writing.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	December 21, 2015	Original

Prepared By:

Zolward Pan

Date:

December 21, 2015

Project Engineer

Check By:

Hank. Yan

Date:

December 21, 2015

Reviewer

3 Contents

	Page
1 COVER PAGE	1
2 VERSION	2
3 CONTENTS	3
4 TEST SUMMARY	4
4.1 MEASUREMENT UNCERTAINTY	4
5 GENERAL INFORMATION	5
5.1 CLIENT INFORMATION	5
5.2 GENERAL DESCRIPTION OF EUT	5
5.3 TEST MODE	6
5.4 DESCRIPTION OF SUPPORT UNITS	6
5.5 TEST FACILITY	7
5.6 TEST LOCATION	7
6 TEST INSTRUMENTS LIST	8
7 TEST RESULTS AND MEASUREMENT DATA	9
7.1 ANTENNA REQUIREMENT	9
7.2 CONDUCTED EMISSIONS	10
7.3 CONDUCTED PEAK OUTPUT POWER	13
7.4 CHANNEL BANDWIDTH	15
7.5 POWER SPECTRAL DENSITY	17
7.6 BAND EDGES	19
7.6.1 Conducted Emission Method	19
7.6.2 Radiated Emission Method	21
7.7 SPURIOUS EMISSION	23
7.7.1 Conducted Emission Method	23
7.7.2 Radiated Emission Method	25
8 TEST SETUP PHOTO	31
9 EUT CONSTRUCTIONAL DETAILS	33

4 Test Summary

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Channel Bandwidth	15.247 (a)(2)	Pass
Power Spectral Density	15.247 (e)	Pass
Band Edge	15.247(d)	Pass
Spurious Emission	15.205/15.209	Pass

Pass: The EUT complies with the essential requirements in the standard.

Remark : Test according to ANSI C63.4:2014 and ANSI C63.10:2013

4.1 Measurement Uncertainty

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	9kHz ~ 30MHz	± 4.34dB	(1)
Radiated Emission	30MHz ~ 1000MHz	± 4.24dB	(1)
Radiated Emission	1GHz ~ 26.5GHz	± 4.68dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	± 3.45dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 Client Information

Applicant:	Wonderwing H.K Electronics Ltd
Address of Applicant:	Room 2401-2404, REITH CENTER No, 9030 North of Shennan Rd, Nanshan, Shenzhen, China, 518053
Manufacturer/ Factory:	Wonderwing H.K Electronics Ltd
Address of Manufacturer/ Factory:	Room 2401-2404, REITH CENTER No, 9030 North of Shennan Rd, Nanshan, Shenzhen, China, 518053

5.2 General Description of EUT

Product Name:	SZ1 Zigbee module
Model No.:	SZ1
Operation Frequency:	2405MHz~2480MHz
Channel numbers:	16
Channel separation:	5MHz
Modulation type:	O-QPSK
Antenna Type:	PCB Antenna
Antenna gain:	4.0dBi
Power supply:	DC 3.3V

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2405MHz	5	2425MHz	9	2445MHz	13	2465MHz
2	2410MHz	6	2430MHz	10	2450MHz	14	2470MHz
3	2415MHz	7	2435MHz	11	2455MHz	15	2475MHz
4	2420MHz	8	2440MHz	12	2460MHz	16	2480 MHz

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2405MHz
The middle channel	2440MHz
The Highest channel	2480MHz

5.3 Test mode

Transmitting mode	Keep the EUT in continuously transmitting mode.
Remark: 85%-115% input power have been adjusted , no influence found.	

5.4 Description of Support Units

Manufacturer	Description	Model	Serial Number	FCC Approval
Apple	PC	A1278	C1MN99ERDTY3	FCC DOC
DELTA	ADAPTER	ADP-60ADT	N/A	FCC DOC

5.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC —Registration No.: 600491**

Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 600491, June 28, 2013.

- **Industry Canada (IC) —Registration No.: 9079A-2**

The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, June 26, 2013.

5.6 Test Location

All tests were performed at:

Global United Technology Services Co., Ltd.

Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102

Tel: 0755-27798480

Fax: 0755-27798960


6 Test Instruments list

Radiated Emission:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	3m Semi- Anechoic Chamber	ZhongYu Electron	9.2(L)*6.2(W)* 6.4(H)	GTS250	Mar. 27 2015	Mar. 26 2016
2	Control Room	ZhongYu Electron	6.2(L)*2.5(W)* 2.4(H)	GTS251	N/A	N/A
3	Spectrum Analyzer	Agilent	E4440A	GTS533	Dec. 3 2015	Dec. 2 2016
4	EMI Test Receiver	Rohde & Schwarz	ESU26	GTS203	June 30 2015	June 29 2016
5	BiConiLog Antenna	SCHWARZBECK MESS-ELEKTRONIK	VULB9163	GTS214	June 30 2015	June 29 2016
6	Double -ridged waveguide horn	SCHWARZBECK MESS-ELEKTRONIK	9120D-829	GTS208	June 26 2015	June 25 2016
7	Horn Antenna	ETS-LINDGREN	3160	GTS217	Mar. 27 2015	Mar. 26 2016
8	EMI Test Software	AUDIX	E3	N/A	N/A	N/A
9	Coaxial Cable	GTS	N/A	GTS213	Mar. 28 2015	Mar. 27 2016
10	Coaxial Cable	GTS	N/A	GTS211	Mar. 28 2015	Mar. 27 2016
11	Coaxial cable	GTS	N/A	GTS210	Mar. 28 2015	Mar. 27 2016
12	Coaxial Cable	GTS	N/A	GTS212	Mar. 28 2015	Mar. 27 2016
13	Amplifier(100kHz-3GHz)	HP	8347A	GTS204	June 30 2015	June 29 2016
14	Amplifier(2GHz-20GHz)	HP	8349B	GTS206	June 30 2015	June 29 2016
15	Amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	GTS218	June 26 2015	June 25 2016
16	Band filter	Amindeon	82346	GTS219	Mar. 28 2015	Mar. 27 2016
17	Power Meter	Anritsu	ML2495A	GTS540	June 30 2015	June 29 2016
18	Power Sensor	Anritsu	MA2411B	GTS541	June 30 2015	June 29 2016


General used equipment:						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
1	Barometer	ChangChun	DYM3	GTS257	July 07 2015	July 06 2016

7 Test results and Measurement Data

7.1 Antenna requirement

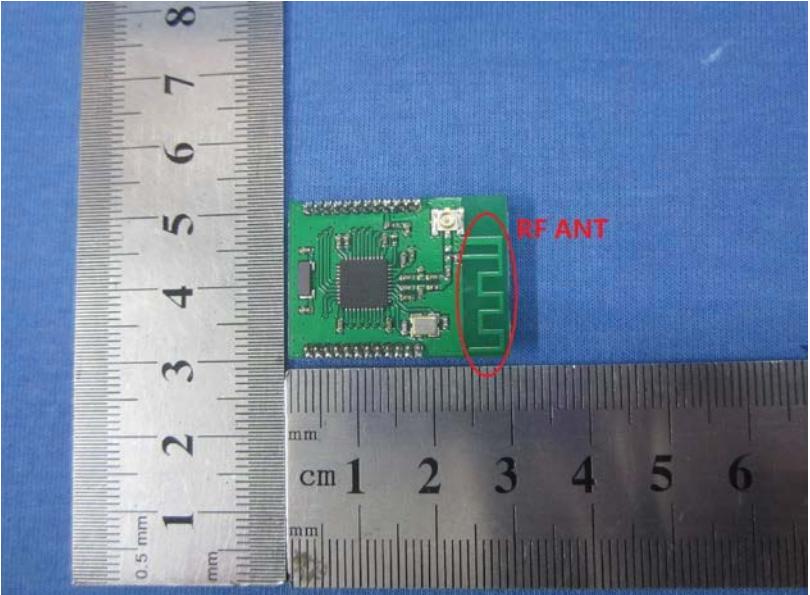
Standard requirement:	FCC Part15 C Section 15.203 /247(c)
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.	
EUT Antenna: <i>The antenna is PCB Antenna, the best case gain of the antenna is 4.0 dBi</i>	
	

7.2 Conducted Emissions

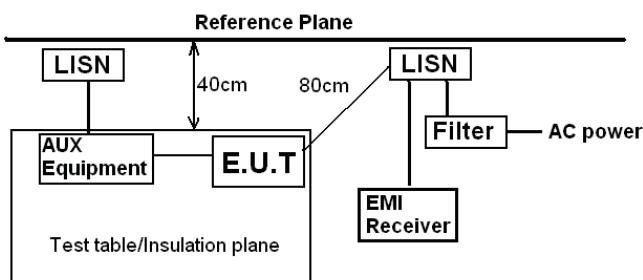Test Requirement:	FCC Part15 C Section 15.207																
Test Method:	ANSI C63.10:2013																
Test Frequency Range:	150KHz to 30MHz																
Class / Severity:	Class B																
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto																
Limit:	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>			Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)																
	Quasi-peak	Average															
0.15-0.5	66 to 56*	56 to 46*															
0.5-5	56	46															
5-30	60	50															
	<small>* Decreases with the logarithm of the frequency.</small>																
Test setup:	 <p><i>Remark:</i> <i>E.U.T: Equipment Under Test</i> <i>LISN: Line Impedance Stabilization Network</i> <i>Test table height=0.8m</i></p>																
Test procedure:	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10:2013 on conducted measurement. 																
Test Instruments:	Refer to section 6.0 for details																
Test mode:	Refer to section 5.3 for details																
Test results:	Pass																

Measurement data

Line:

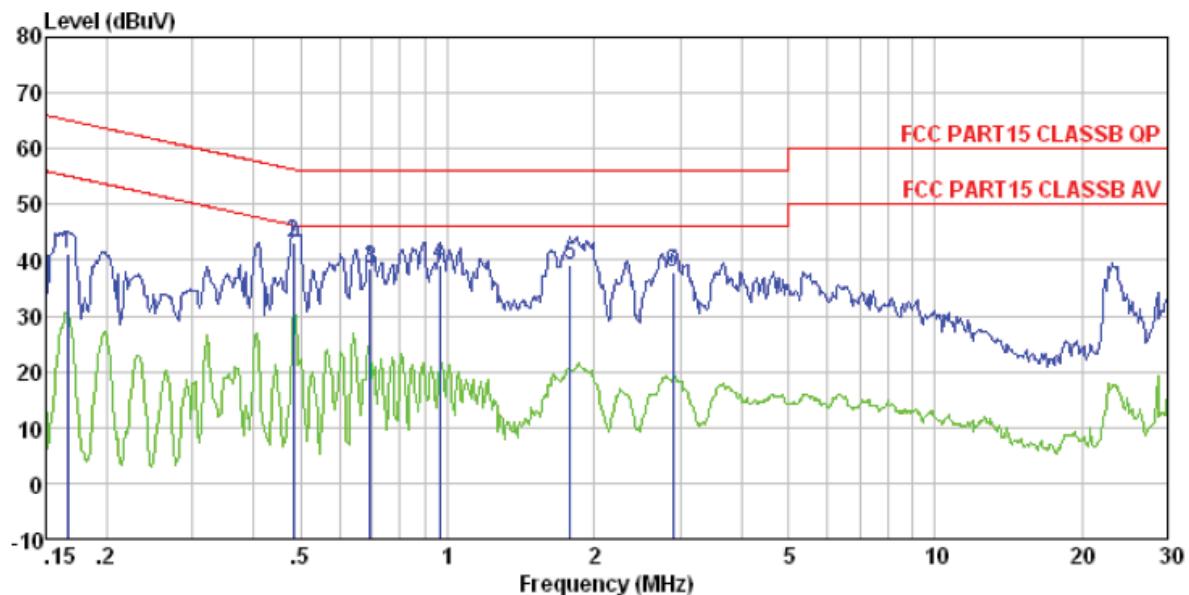

Condition : FCC PART15 CLASSB QP LISN-2013 LINE


Job No. : 2249RF

Test mode : Transmitting mode

Test Engineer: Qing

Freq	Read		LISN Level	Factor	Cable Loss	Limit Line	Over Limit	Remark
	MHz	dBuV						
1	0.166	41.02	41.29	0.15	0.12	65.16	-23.87	QP
2	0.484	43.01	43.24	0.12	0.11	56.27	-13.03	QP
3	0.694	38.34	38.61	0.14	0.13	56.00	-17.39	QP
4	0.963	38.75	39.02	0.14	0.13	56.00	-16.98	QP
5	1.781	38.85	39.11	0.12	0.14	56.00	-16.89	QP
6	2.900	37.49	37.79	0.15	0.15	56.00	-18.21	QP

Neutral:

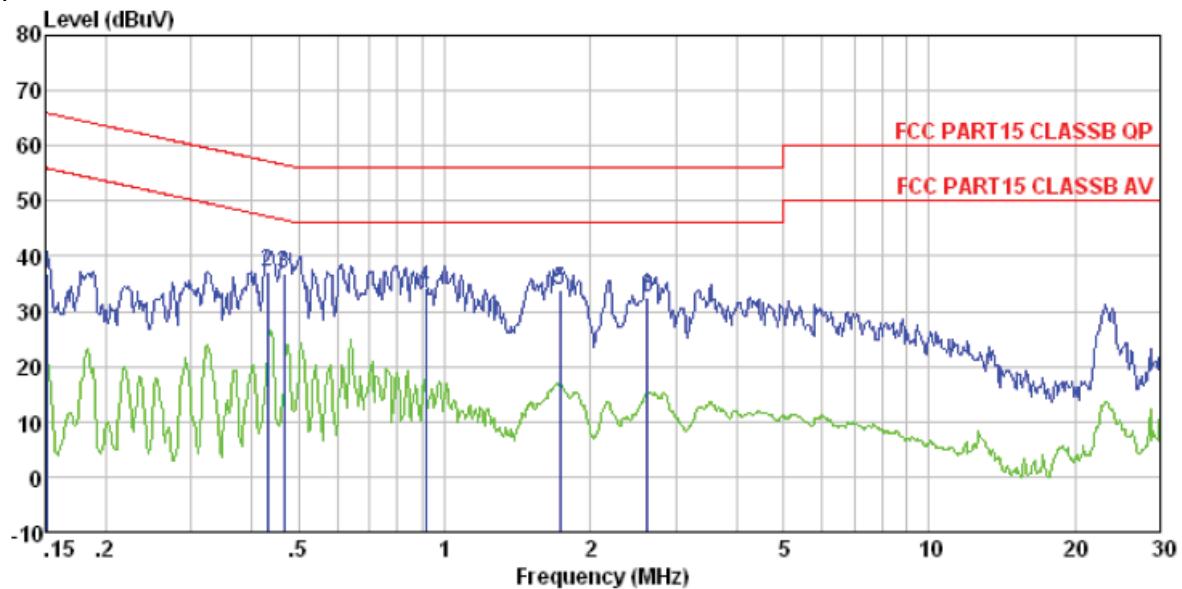

Condition : FCC PART15 CLASSB QP LISN-2013 NEUTRAL

Job No. : 2249RF

Test mode : Transmitting mode

Test Engineer: Qing


Freq	Read	LISN		Cable	Limit	Over	Remark
	Level	Level	Factor	Loss	Line	Limit	
MHz	dBuV	dBuV		dB	dBuV	dB	
1	0.152	36.75	36.94	0.07	0.12	65.91	-28.97 QP
2	0.431	37.10	37.27	0.06	0.11	57.24	-19.97 QP
3	0.466	36.53	36.70	0.06	0.11	56.58	-19.88 QP
4	0.914	34.08	34.28	0.07	0.13	56.00	-21.72 QP
5	1.734	33.64	33.87	0.09	0.14	56.00	-22.13 QP
6	2.622	32.42	32.67	0.10	0.15	56.00	-23.33 QP

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level =Receiver Read level + LISN Factor + Cable Loss

If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.


7.3 Conducted Peak Output Power

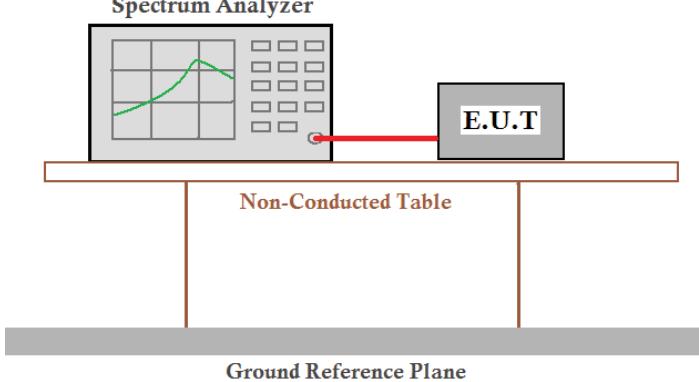Test Requirement:	FCC Part15 C Section 15.247 (b)(3)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	30dBm
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Peak Output Power (dBm)	Limit(dBm)	Result
2405	3.17	30	PASS
2445	3.02		
2480	2.94		


Test plot as follows:

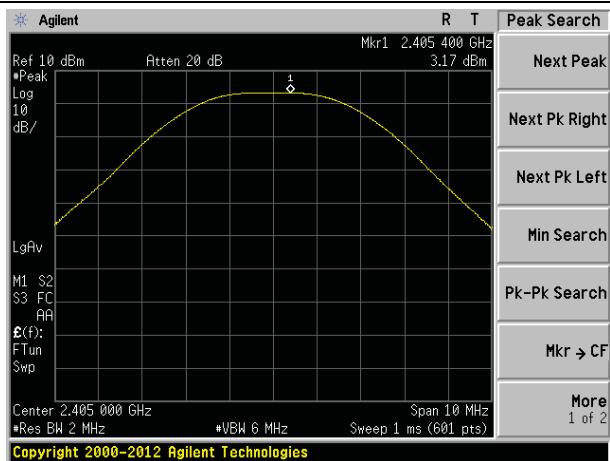

2405MHz

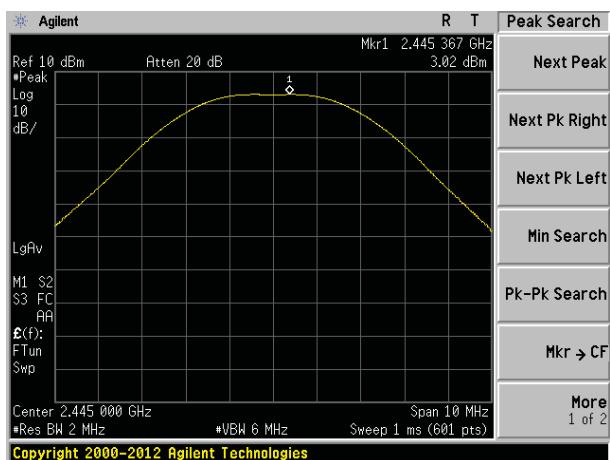


2440MHz

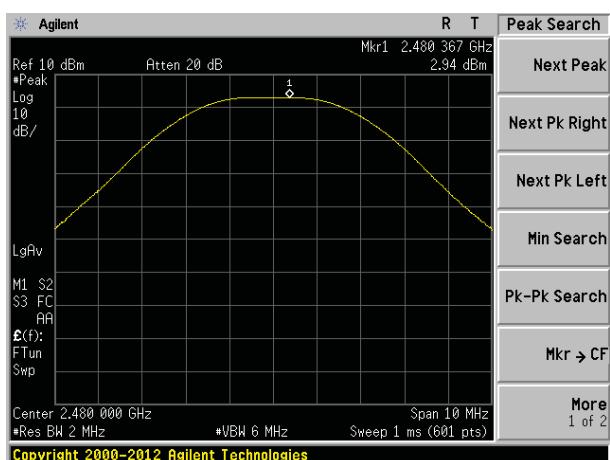

2480MHz


7.4 Channel Bandwidth

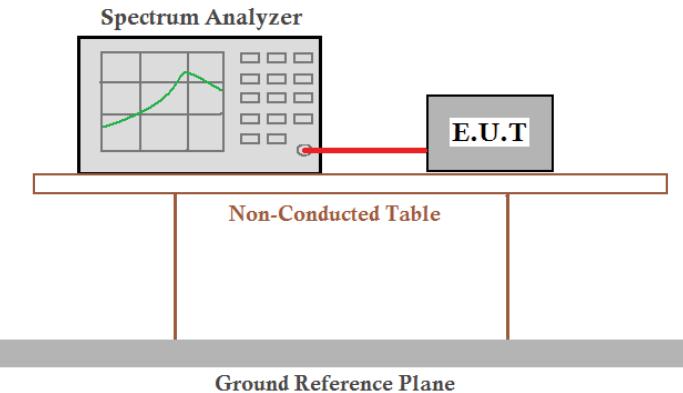Test Requirement:	FCC Part15 C Section 15.247 (a)(2)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	>500KHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass


Measurement Data

Frequency (MHz)	Channel Bandwidth (MHz)	Limit(KHz)	Result
2405	1.597	>500	Pass
2445	1.611		
2480	1.600		


Test plot as follows:

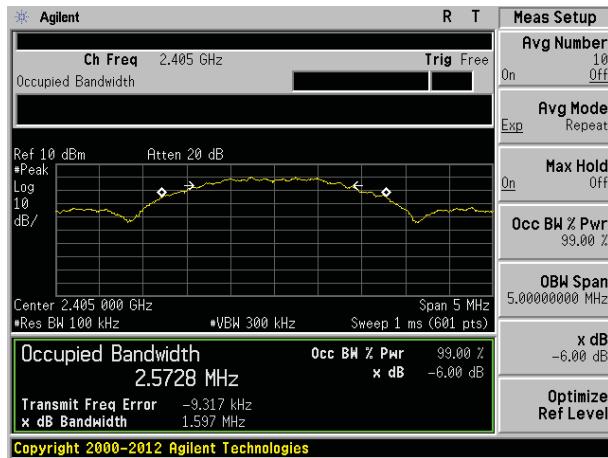

2405MHz

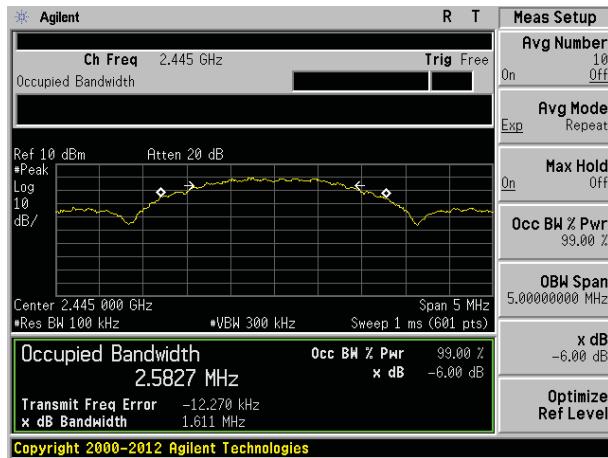


2445MHz

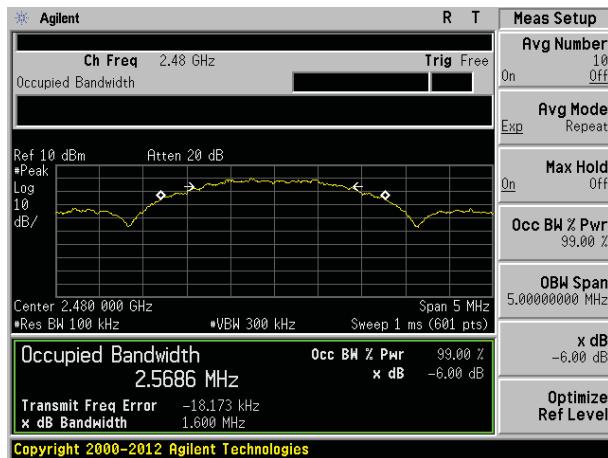


2480MHz

7.5 Power Spectral Density

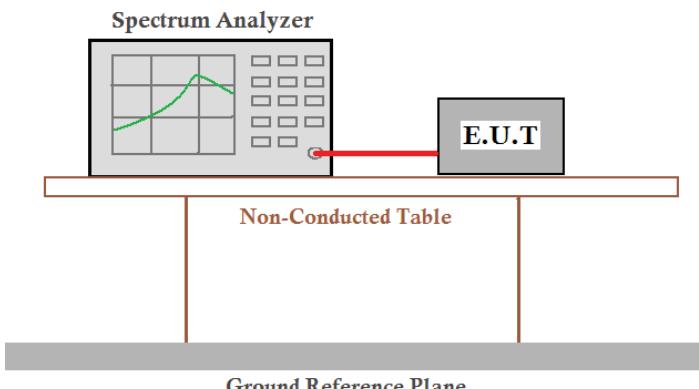
Test Requirement:	FCC Part15 C Section 15.247 (e)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	8dBm/3kHz
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Measurement Data


Frequency (MHz)	Power Spectral Density (dBm)	Limit (dBm/3kHz)	Result
2405	-0.10	8.00	Pass
2445	-0.78		
2480	-1.20		

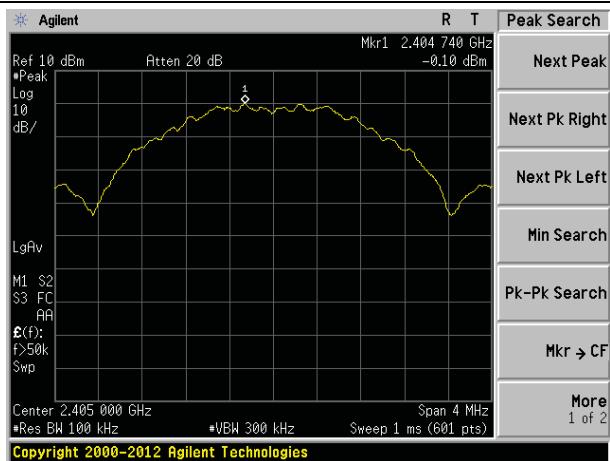Test plot as follows:


2405MHz

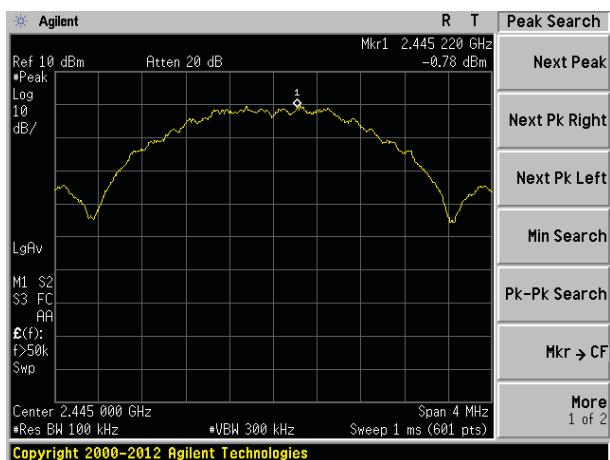


2445MHz

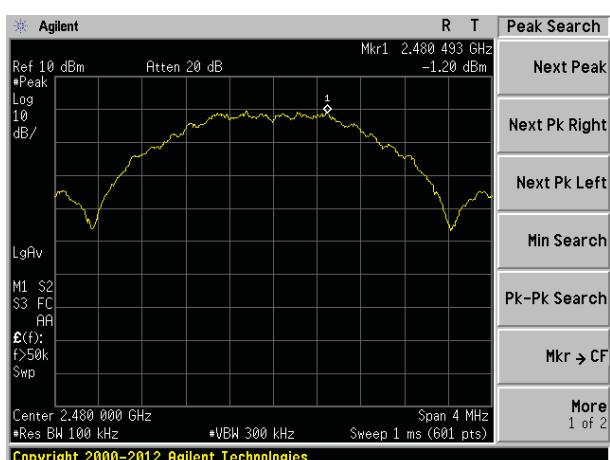


2480MHz


7.6 Band edges

7.6.1 Conducted Emission Method

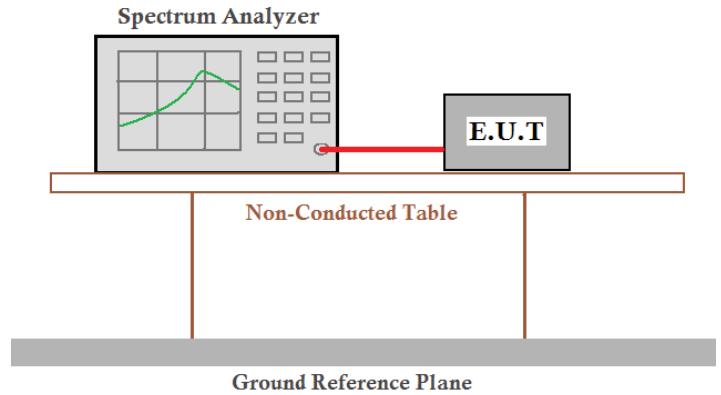Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

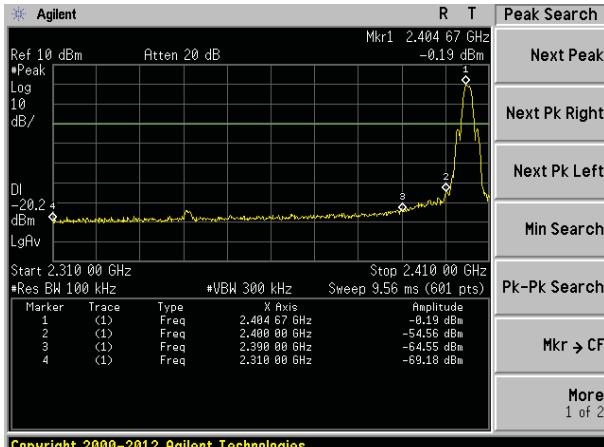
Test plot as follows:


Lowest channel

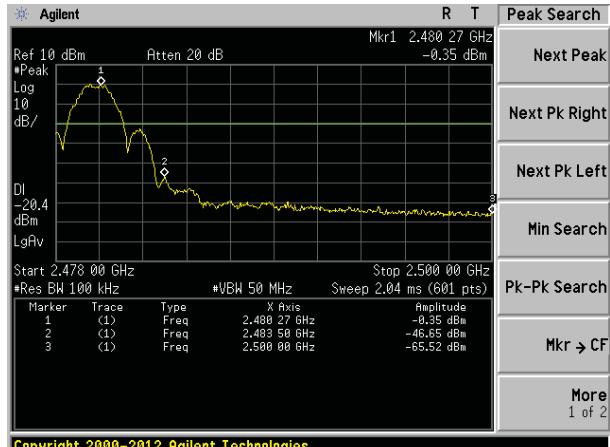

Highest channel

7.6.2 Radiated Emission Method

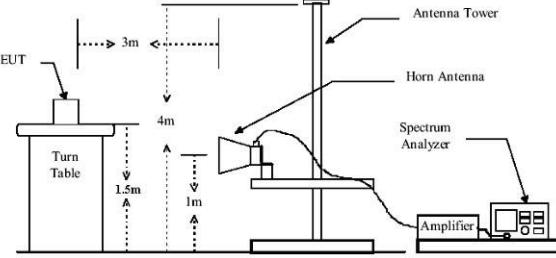Test Requirement:	FCC Part15 C Section 15.209 and 15.205								
Test Method:	ANSI C63.10:2013								
Test Frequency Range:	All of the restrict bands were tested, only the worst band's (2310MHz to 2500MHz) data was showed.								
Test site:	Measurement Distance: 3m								
Receiver setup:	Frequency	Detector	RBW	VBW	Value				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
		RMS	1MHz	3MHz	Average				
Limit:	Frequency	Limit (dBuV/m @3m)		Value					
	Above 1GHz	54.00		Average					
		74.00		Peak					
Test setup:									
Test Procedure:	<ol style="list-style-type: none"> The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report. 								
Test Instruments:	Refer to section 6.0 for details								
Test mode:	Refer to section 5.3 for details								
Test results:	Pass								

Measurement data:

Remark: The pre-test were performed on lowest, middle and highest frequencies, only the worst case's (lowest and highest frequencies) data was showed.

Test channel:	2405MHz
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	47.50	27.91	5.30	30.37	50.34	74.00	-23.66	Horizontal
2390.00	55.13	27.59	5.38	30.18	57.92	74.00	-16.08	Horizontal
2400.00	66.28	27.58	5.39	30.18	69.07	74.00	-4.93	Horizontal
2310.00	44.89	27.91	5.30	30.37	47.73	74.00	-26.27	Vertical
2390.00	47.75	27.59	5.38	30.18	50.54	74.00	-23.46	Vertical
2400.00	59.02	27.58	5.39	30.18	61.81	74.00	-12.19	Vertical

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2310.00	34.88	27.91	5.30	30.37	37.72	54.00	-16.28	Horizontal
2390.00	34.74	27.59	5.38	30.18	37.53	54.00	-16.47	Horizontal
2400.00	43.23	27.58	5.39	30.18	46.02	54.00	-7.98	Horizontal
2310.00	34.80	27.91	5.30	30.37	37.64	54.00	-16.36	Vertical
2390.00	35.36	27.59	5.38	30.18	38.15	54.00	-15.85	Vertical
2400.00	46.60	27.58	5.39	30.18	49.39	54.00	-4.61	Vertical

Test channel:	2480MHz
---------------	---------

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	70.09	27.53	5.47	29.93	73.16	74.00	-0.84	Horizontal
2500.00	44.39	27.55	5.49	29.93	47.50	74.00	-26.50	Horizontal
2483.50	65.44	27.53	5.47	29.93	68.51	74.00	-5.49	Vertical
2500.00	44.64	27.55	5.49	29.93	47.75	74.00	-26.25	Vertical

Average value:


Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
2483.50	49.98	27.53	5.47	29.93	53.05	54.00	-0.95	Horizontal
2500.00	34.08	27.55	5.49	29.93	37.19	54.00	-16.81	Horizontal
2483.50	47.53	27.53	5.47	29.93	50.60	54.00	-3.40	Vertical
2500.00	34.12	27.55	5.49	29.93	37.23	54.00	-16.77	Vertical


Remark:

- Final Level = Receiver Read level + Antenna Factor + Cable Loss - Preamplifier Factor
- The emission levels of other frequencies are very lower than the limit and not show in test report.


7.7 Spurious Emission

7.7.1 Conducted Emission Method

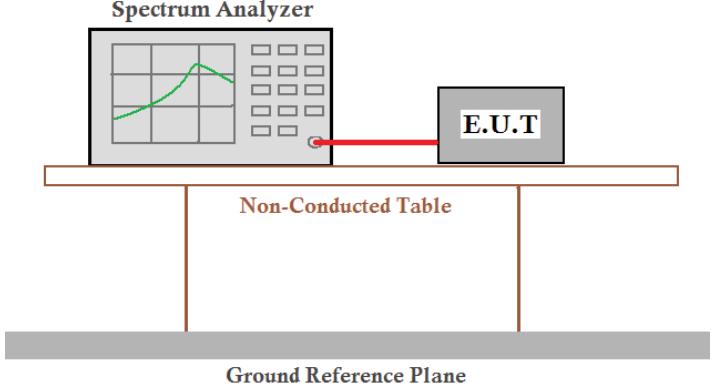
Test Requirement:	FCC Part15 C Section 15.247 (d)
Test Method:	ANSI C63.10:2013 and KDB558074 D01 DTS Meas Guidance V03
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Test setup:	
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

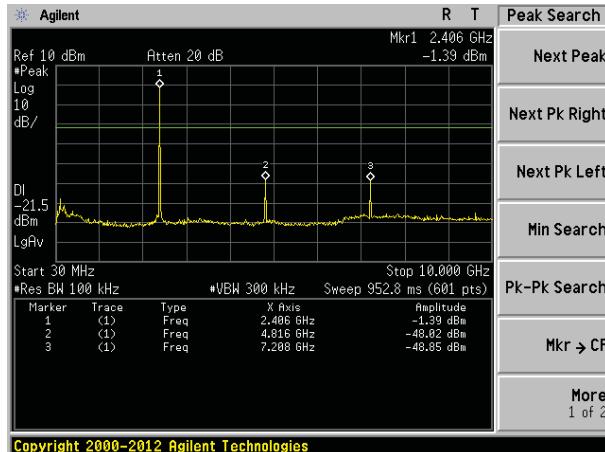Test plot as follows:
Lowest channel


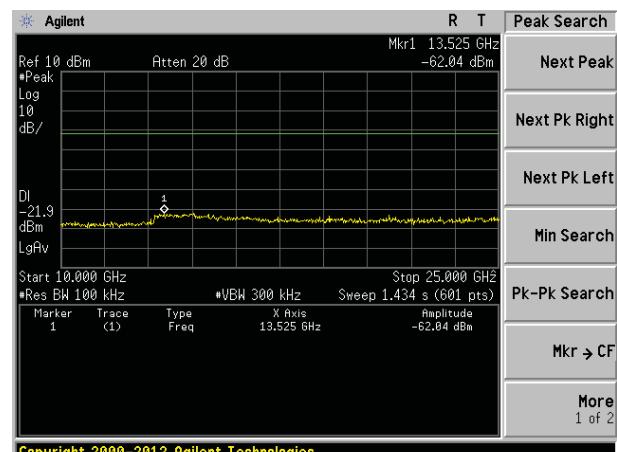
30MHz~10GHz

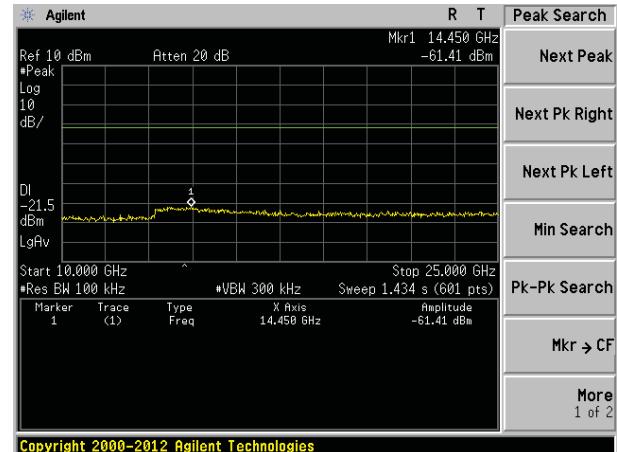


10GHz~25GHz

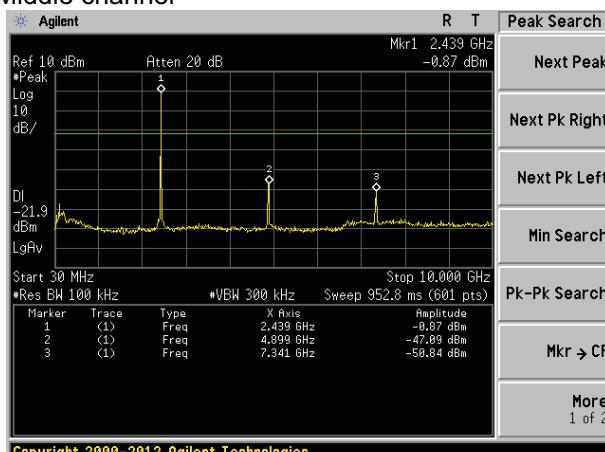Middle channel


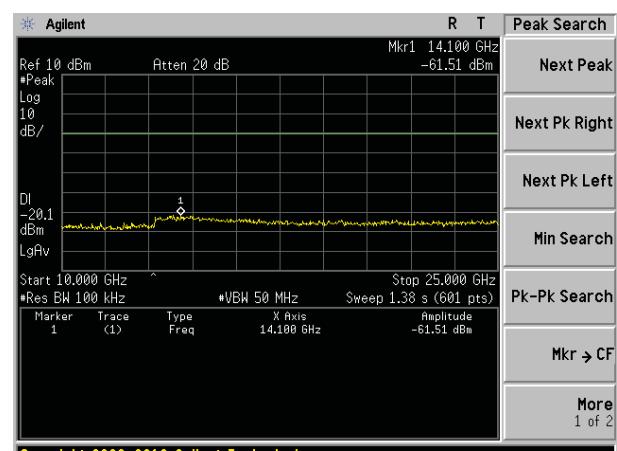
30MHz~10GHz



10GHz~25GHz


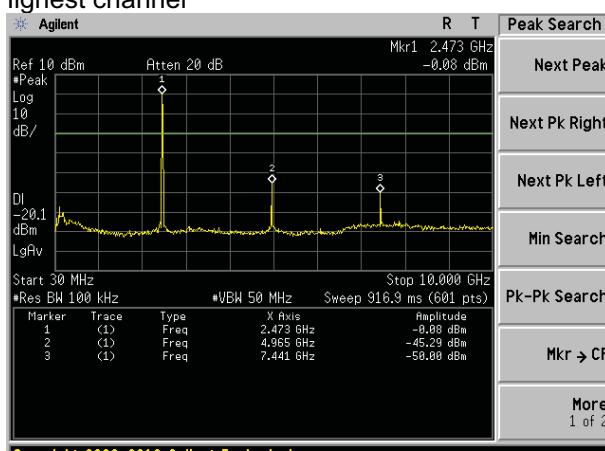
Highest channel


30MHz~10GHz



10GHz~25GHz

7.7.2 Radiated Emission Method

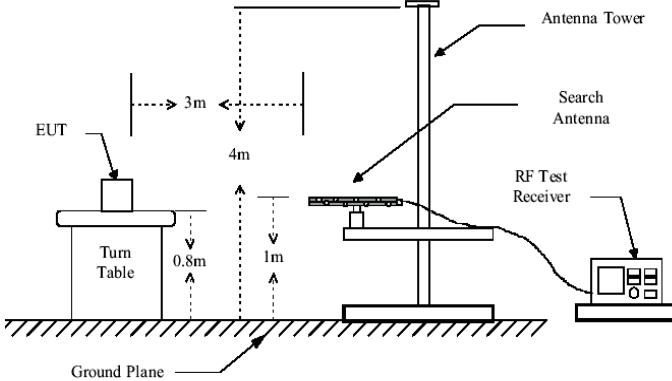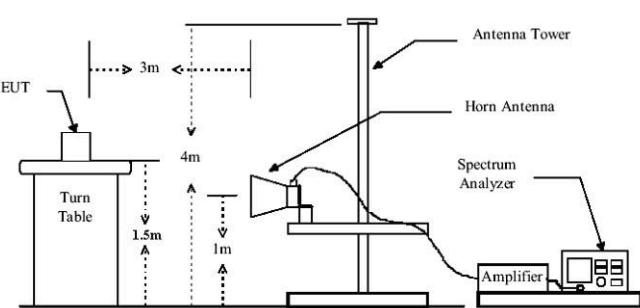Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10: 2013				
Test Frequency Range:	30MHz to 25GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		RMS	1MHz	3MHz	Average
Limit:	Frequency	Limit (dBuV/m @3m)		Value	
	30MHz-88MHz	40.00		Quasi-peak	
	88MHz-216MHz	43.50		Quasi-peak	
	216MHz-960MHz	46.00		Quasi-peak	
	960MHz-1GHz	54.00		Quasi-peak	
	Above 1GHz	54.00		Average	
		74.00		Peak	
Test setup:	Below 1GHz  Above 1GHz 				

Test Procedure:	<ol style="list-style-type: none">1. The EUT was placed on the top of a rotating table (0.8 meters for below 1GHz and 1.5 meters for above 1GHz) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.7. The radiation measurements are performed in X, Y, Z axis positioning. And found the Y axis positioning which it is worse case, only the test worst case mode is recorded in the report.
Test Instruments:	Refer to section 6.0 for details
Test mode:	Refer to section 5.3 for details
Test results:	Pass

Remark:

Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.

Measurement Data

■ Below 1GHz

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	polarization
31.40	42.85	14.32	0.57	30.09	27.65	40.00	Vertical
38.48	39.79	15.20	0.65	30.05	25.59	40.00	Vertical
66.97	36.10	11.89	0.92	29.87	19.04	40.00	Vertical
167.82	36.13	10.90	1.67	29.33	19.37	43.50	Vertical
216.02	31.87	13.07	1.93	29.36	17.51	43.50	Vertical
656.53	26.18	20.66	3.94	29.24	21.54	46.00	Vertical
31.29	37.84	14.32	0.57	30.09	22.64	40.00	Horizontal
59.23	28.29	14.74	0.85	29.93	13.95	40.00	Horizontal
99.88	25.64	15.16	1.19	29.70	12.29	43.50	Horizontal
230.91	25.93	13.67	2.02	29.48	12.14	46.00	Horizontal
408.95	25.51	17.26	2.90	29.48	16.19	46.00	Horizontal
618.54	26.36	20.52	3.80	29.28	21.40	46.00	Horizontal

■ Above 1GHz

Test channel:	Lowest							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	43.81	31.78	8.60	32.09	52.10	74.00	-21.90	Vertical
7215.00	40.09	36.15	11.66	31.99	55.91	74.00	-18.09	Vertical
9620.00	32.04	38.01	14.14	31.60	52.59	74.00	-21.41	Vertical
12025.00	*					74.00		Vertical
14430.00	*					74.00		Vertical
4810.00	32.75	31.78	8.60	32.09	41.04	74.00	-32.96	Horizontal
7215.00	31.85	36.15	11.66	31.99	47.67	74.00	-26.33	Horizontal
9620.00	27.23	38.01	14.14	31.60	47.78	74.00	-26.22	Horizontal
12025.00	*					74.00		Horizontal
14430.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4810.00	34.18	31.78	8.60	32.09	42.47	54.00	-11.53	Vertical
7215.00	29.73	36.15	11.66	31.99	45.55	54.00	-8.45	Vertical
9620.00	20.76	38.01	14.14	31.60	41.31	54.00	-12.69	Vertical
12025.00	*					54.00		Vertical
14430.00	*					54.00		Vertical
4810.00	22.70	31.78	8.60	32.09	30.99	54.00	-23.01	Horizontal
7215.00	21.81	36.15	11.66	31.99	37.63	54.00	-16.37	Horizontal
9620.00	17.31	38.01	14.14	31.60	37.86	54.00	-16.14	Horizontal
12025.00	*					54.00		Horizontal
14430.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

Test channel:	Middle							
---------------	--------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	42.28	31.86	8.67	32.13	50.68	74.00	-23.32	Vertical
7335.00	36.35	36.41	11.72	31.88	52.60	74.00	-21.40	Vertical
9780.00	28.58	38.43	14.27	31.62	49.66	74.00	-24.34	Vertical
12225.00	*					74.00		Vertical
14640.00	*					74.00		Vertical
4890.00	30.28	31.86	8.67	32.13	38.68	74.00	-35.32	Horizontal
7335.00	28.83	36.41	11.72	31.88	45.08	74.00	-28.92	Horizontal
9780.00	27.05	38.43	14.27	31.62	48.13	74.00	-25.87	Horizontal
12225.00	*					74.00		Horizontal
14640.00	*					74.00		Horizontal

Average value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4890.00	33.05	31.86	8.67	32.13	41.45	54.00	-12.55	Vertical
7335.00	26.94	36.41	11.72	31.88	43.19	54.00	-10.81	Vertical
9780.00	19.98	38.43	14.27	31.62	41.06	54.00	-12.94	Vertical
12225.00	*					54.00		Vertical
14640.00	*					54.00		Vertical
4890.00	20.92	31.86	8.67	32.13	29.32	54.00	-24.68	Horizontal
7335.00	19.30	36.41	11.72	31.88	35.55	54.00	-18.45	Horizontal
9780.00	16.86	38.43	14.27	31.62	37.94	54.00	-16.06	Horizontal
12225.00	*					54.00		Horizontal
14640.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. **, means this data is the too weak instrument of signal is unable to test.

Test channel:	Highest							
---------------	---------	--	--	--	--	--	--	--

Peak value:

Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	40.15	31.93	8.73	32.16	48.65	74.00	-25.35	Vertical
7440.00	35.55	36.59	11.79	31.78	52.15	74.00	-21.85	Vertical
9920.00	28.91	38.81	14.38	31.88	50.22	74.00	-23.78	Vertical
12400.00	*					74.00		Vertical
14880.00	*					74.00		Vertical
4960.00	35.95	31.93	8.73	32.16	44.45	74.00	-29.55	Horizontal
7440.00	29.09	36.59	11.79	31.78	45.69	74.00	-28.31	Horizontal
9920.00	27.51	38.81	14.38	31.88	48.82	74.00	-25.18	Horizontal
12400.00	*					74.00		Horizontal
14880.00	*					74.00		Horizontal

Average value:



Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960.00	29.38	31.93	8.73	32.16	37.88	54.00	-16.12	Vertical
7440.00	25.41	36.59	11.79	31.78	42.01	54.00	-11.99	Vertical
9920.00	17.66	38.81	14.38	31.88	38.97	54.00	-15.03	Vertical
12400.00	*					54.00		Vertical
14880.00	*					54.00		Vertical
4960.00	25.57	31.93	8.73	32.16	34.07	54.00	-19.93	Horizontal
7440.00	19.63	36.59	11.79	31.78	36.23	54.00	-17.77	Horizontal
9920.00	17.63	38.81	14.38	31.88	38.94	54.00	-15.06	Horizontal
12400.00	*					54.00		Horizontal
14880.00	*					54.00		Horizontal

Remark:

1. Final Level =Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. “**”, means this data is the too weak instrument of signal is unable to test.

8 Test Setup Photo



Radiated Emission

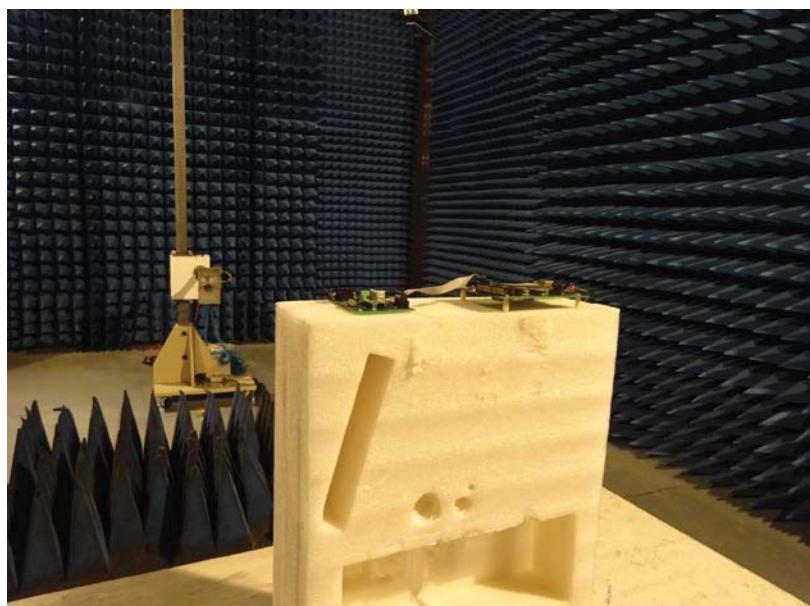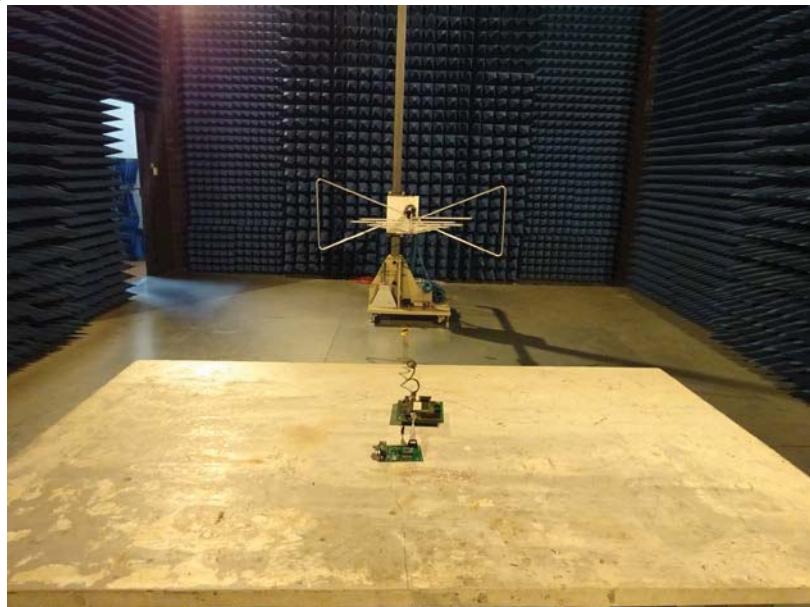

Conducted Emission



9 EUT Construction Details

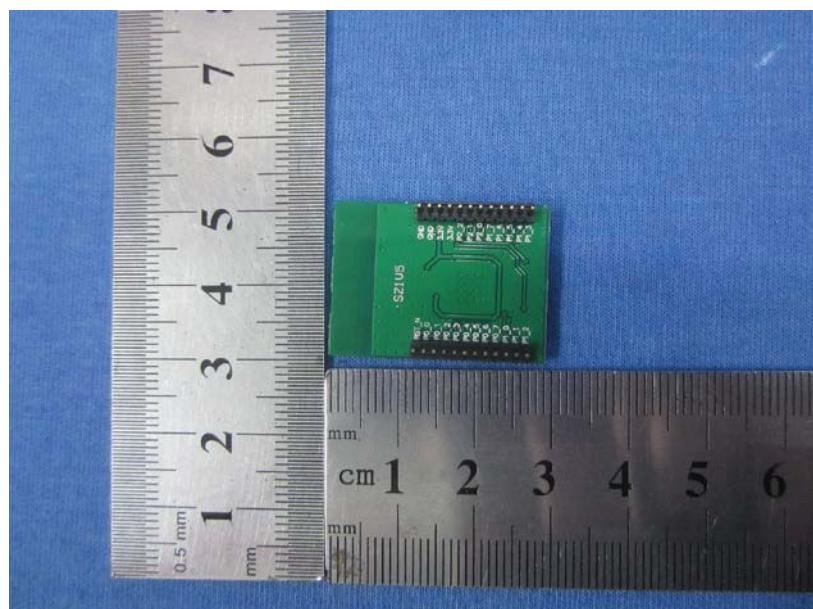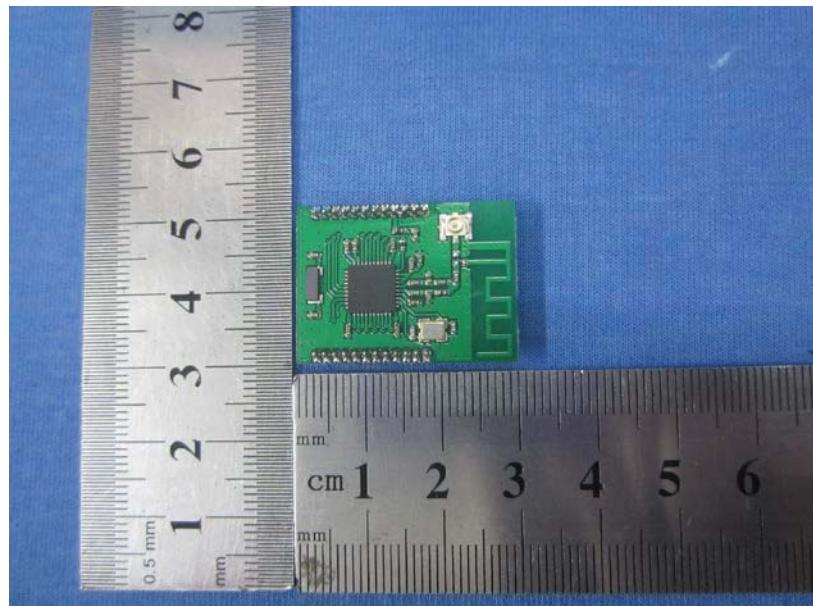

-----End-----