

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.**FCC BLE TEST REPORT**

PRODUCT	ELECTRONIC SHELF LABEL
BRAND	SUNMI
MODEL	BL260
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25BL260
ISSUE DATE	September 26, 2022
STANDARD(S)	FCC Part15

Prepared by: Tao Lingyan**Signature****Reviewed by: Yang Fan****Signature****Approved by: Liu Long****Signature****CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENT(S).....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
2. GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION	5
3. GENERAL INFORMATION OF THE CUSTOMER.....	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
4. GENERAL INFORMATION OF THE PRODUCT.....	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
5. TEST CONFIGURATION INFORMATION	8
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	8
5.2 TEST EQUIPMENTS UTILIZED.....	8
5.3 MEASUREMENT UNCERTAINTY	9
6. TEST RESULTS	11
6.1 PEAK OUTPUT POWER-CONDUCTED	11
6.2 99% OCCUPIED BANDWIDTH.....	13
6.3 PEAK POWER SPECTRAL DENSITY	15
6.4 6DB BANDWIDTH.....	17
6.5 FREQUENCY BAND EDGES-CONDUCTED	19
6.6 CONDUCTED EMISSION	21
6.7 RADIATED EMISSION.....	24
6.8 AC POWERLINE CONDUCTED EMISSION	29
ANNEX A: REVISED HISTORY	31
ANNEX B: ACCREDITATION CERTIFICATE.....	32

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	FCC Part15	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	2020

1.2 Reference Document(s)

No.	Reference	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	2019

1.3 Summary of Test Results

Measurement Items	Sub-clause of Part15C	Verdict
Maximum Peak Output Power	15.247(b)	Pass
Peak Power Spectral Density	15.247(e)	Pass
6dB Occupied Bandwidth	15.247(a)	Pass
99% Occupied Bandwidth	15.247(a)	Pass
Band Edges Compliance	15.247(d)	Pass
Transmitter Spurious Emission-Conducted	15.247(d)	Pass
Transmitter Spurious Emission-Radiated	15.247/15.205/15.209	Pass
AC Powerline Conducted Emission	15.207	N/A

NOTE:

The BL260, manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing. Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.2.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

a. All the test data for each data were verified, but only the worst case was reported.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	-0.5 dBi

Note: The data of 1.3 is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	101kPa

2.3 Project Information

Project Manager	Gao Hongning
Test Date	August 16, 2022 to September 16, 2022

3. General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388 Song Hu Road, Yang Pu District, Shanghai, China

4. General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product	ELECTRONIC SHELF LABEL
Model	BL260
Date of Receipt	August 16,2022/ August 16,2022
EUT ID*	S01/S02
SN/IMEI	B110D27T00006/ B110D27T00008
Supported Radio Technology and Bands	BLE NFC
Hardware Version	N/A
Software Version	N/A
FCC ID	2AH25BL260
NOTE: EUT ID is the internal identification code of the laboratory.	

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25℃	3℃	40℃
Working Voltage of EUT	Normal	Minimum	Maximum
	3V	2.2V	3.3V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Programmable Power Supply	Keithley 2303	4039070	Starpoint	May 10, 2021	1.5 Years
2	Vector Signal Generator	SMBV100 A	257904	R&S	February 21, 2022	1 Year
3	Temperature box	B-TF-107C	BTF107C-201804107	Boyi	May 10, 2021	1.5 Years
4	Spectrum Analyzer	FSQ40	200063	R&S	November 02, 2021	1 Year
5	USB Wideband Power Sensor	U2021XA	MY56410009	Keysight	February 21, 2022	1 Year
6	Simultaneous Sampling DQA	U2531A	TW56183514	Agilent	March 02, 2022	1 Year
7	Vector Signal Generator	SMU200A	104684	R&S	May 10, 2021	1.5 Years
8	Wireless communication comprehensive tester	CMW270	100919	R&S	May 10, 2021	1.5 Years
9	Eagle Test Software	Eagle V3.3	N/A	ECIT	N/A	N/A

5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123123	R&S	2021/5/10	1.5 year
2	Universal Radio Communication Tester	CMW500	104178	R&S	2021/5/10	1.5 year
3	EMI Test Receiver	ESU40	100307	R&S	2022/2/23	1 year
4	TRILOG Broadband Antenna	VULB9163	VULB9163-515	Schwarzbeck	2022/3/11	1 year
5	Double- ridged Waveguide Antenna	ETS-3117	00135890	ETS	2022/3/9	2 years
6	Horn Antenna	3160-09	LM6321	ETS	2021/2/3	3 years
7	Horn Antenna	3160-10	LM5942	ETS	2021/2/3	3 years
8	Pre-amplifier	SCU08F1	8320024	R&S	2021/5/10	1.5 year
9	Pre-amplifier	SCU18	10155	R&S	2021/5/10	1.5 year
10	Pre-amplifier	SCU26	10025	R&S	2021/5/10	1.5 year
11	Pre-amplifier	SCU40	10020	R&S	2021/5/10	1.5 year
12	2-Line V-Network	ENV216	101380	R&S	2022/2/21	1 year
13	EMI Test Receiver	ESCI	101235	R&S	2022/2/23	1 year
14	EMI Test software	EMC32 V9.15	N/A	R&S	N/A	N/A
15	EMI Test software	EMC32 V10.35.02	N/A	R&S	N/A	N/A

5.3 Measurement Uncertainty

Item(s)	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	2402MHz-2480MHz	95%	0.544dB
Peak Power Spectral Density	2402MHz-2480MHz	95%	0.544dB
6dB Bandwidth	2402MHz-2480MHz	95%	62.04Hz
Frequency Band Edges-Conducted	2390MHz-2488.5MHz	95%	0.544dB
Conducted Emission	9KHz-30MHz	95%	0.89dB

Item(s)	Range	Confidence Level	Calculated Uncertainty
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

6. Test Results

6.1 Peak Output Power-Conducted

6.1.1 Measurement Limit

Standard	Limit (dBm)
FCC 47 Part 15.247(b)(3)	<30

6.1.2 Test Condition


DTS procedure	RBW	VBW	Span	Sweeptime
BT-LE	3MHz	10MHz	10MHz	Auto

6.1.3 Test Procedure




The measurement is according to ANSI C63.10 clause 11.9.1

1. Set the RBW $\geq$ DTS bandwidth.
2. Set VBW $\geq [3 \times \text{RBW}]$.
3. Set span $\geq [3 \times \text{RBW}]$.
4. Sweep time = auto couple.
5. Detector = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.
8. Use peak marker function to determine the peak amplitude level.

6.1.4 Test setup

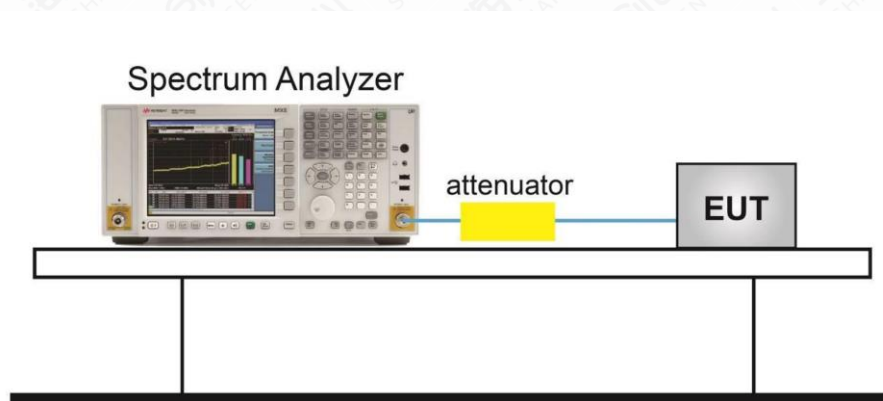

Measurement Results

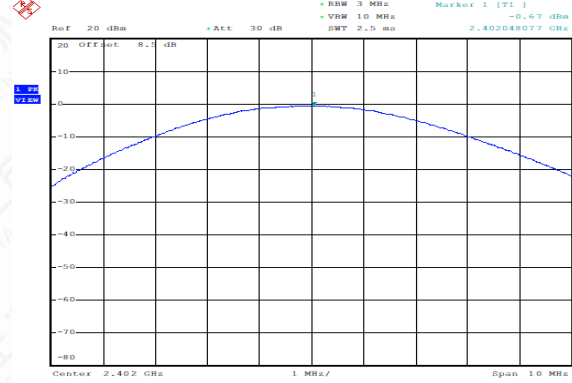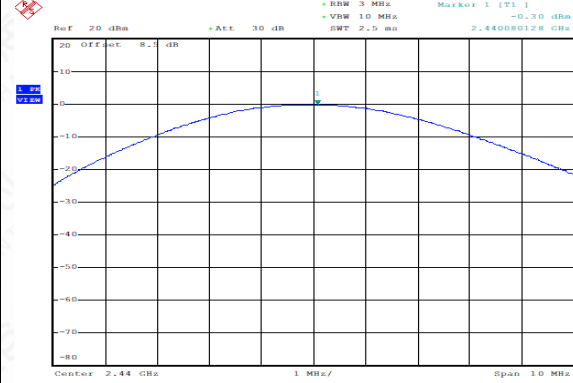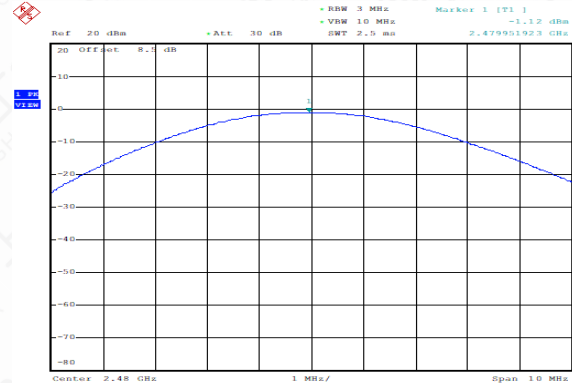Peak Conducted Output Power CH0 (dBm)	-0.673	Peak Conducted Output Power CH19 (dBm)	-0.3
 Ref: 20 dBm, Att: 30 dB, RBW: 3 MHz, VSW: 10 MHz, Span: 10 MHz, Center: 2.402 GHz, Marker 1 [T1]: -0.673 dBm, 2.402048077 GHz Date: 19.AUG.2022 12:26:08		 Ref: 20 dBm, Att: 30 dB, RBW: 3 MHz, VSW: 10 MHz, Span: 10 MHz, Center: 2.44 GHz, Marker 1 [T1]: -0.30 dBm, 2.440080128 GHz Date: 19.AUG.2022 12:27:09	
Peak Conducted Output Power CH39 (dBm)	-0.139	/	
 Ref: 20 dBm, Att: 30 dB, RBW: 3 MHz, VSW: 10 MHz, Span: 10 MHz, Center: 2.48 GHz, Marker 1 [T1]: -0.132 dBm, 2.479951923 GHz Date: 19.AUG.2022 12:27:47		/	

6.2 99% Occupied Bandwidth

6.2.1 Measurement Limit


Standard	Limit
15.247(a)	N/A

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.


6.2.3 Test setup

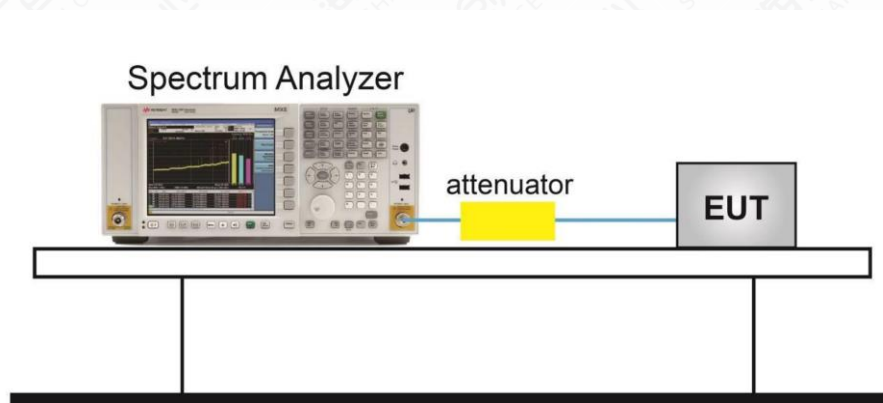

Measurement Result

Modulation type	Channel	99% Bandwidth (MHz)
GFSK DH5	Ch 0	1.053
	Ch 19	1.048
	Ch 39	1.053

Test graphs as below

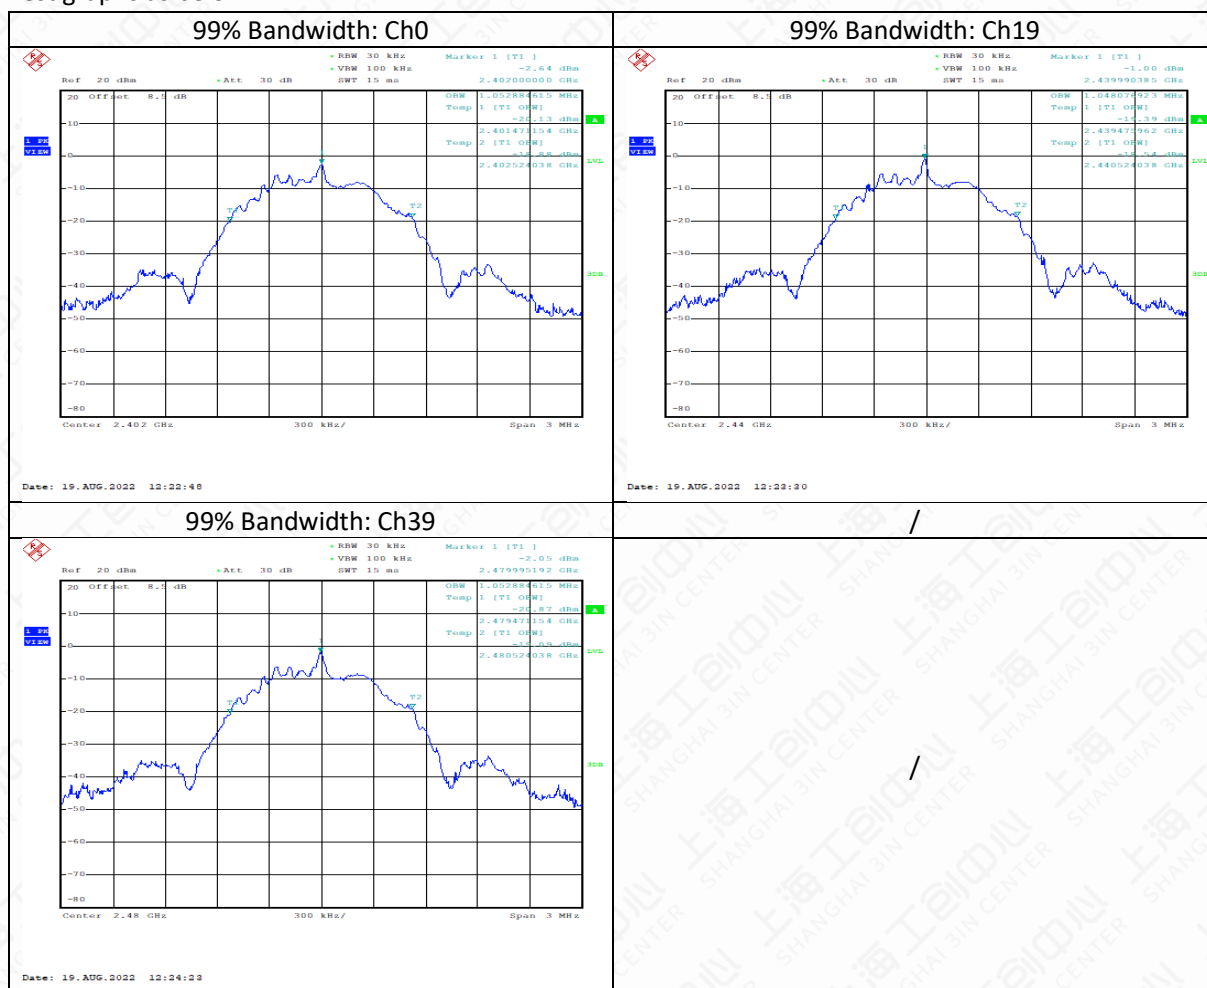

6.3 Peak Power Spectral Density

6.3.1 Measurement Limit


Standard	Limit
FCC 47 Part 15.247(e)	$\leq 8\text{dBm}/3\text{ kHz}$

6.3.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.10.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.

6.3.3 Test Setup

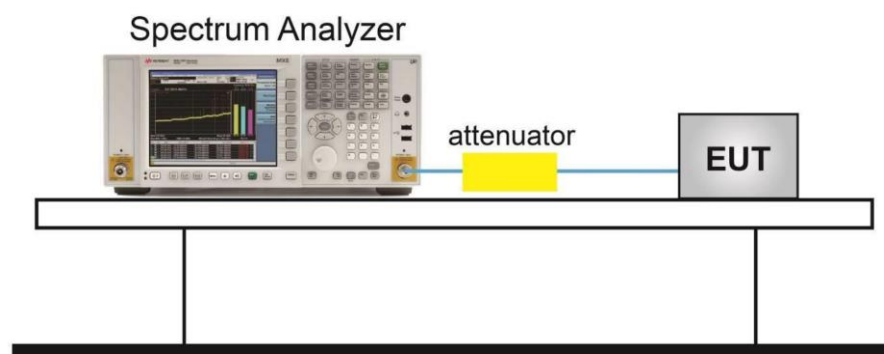

Measurement Results

Modulation type	Channel	PSD (dBm/3kHz)
GFSK DH5	Ch 0	-16.052
	Ch 19	-14.255
	Ch 39	-15.9

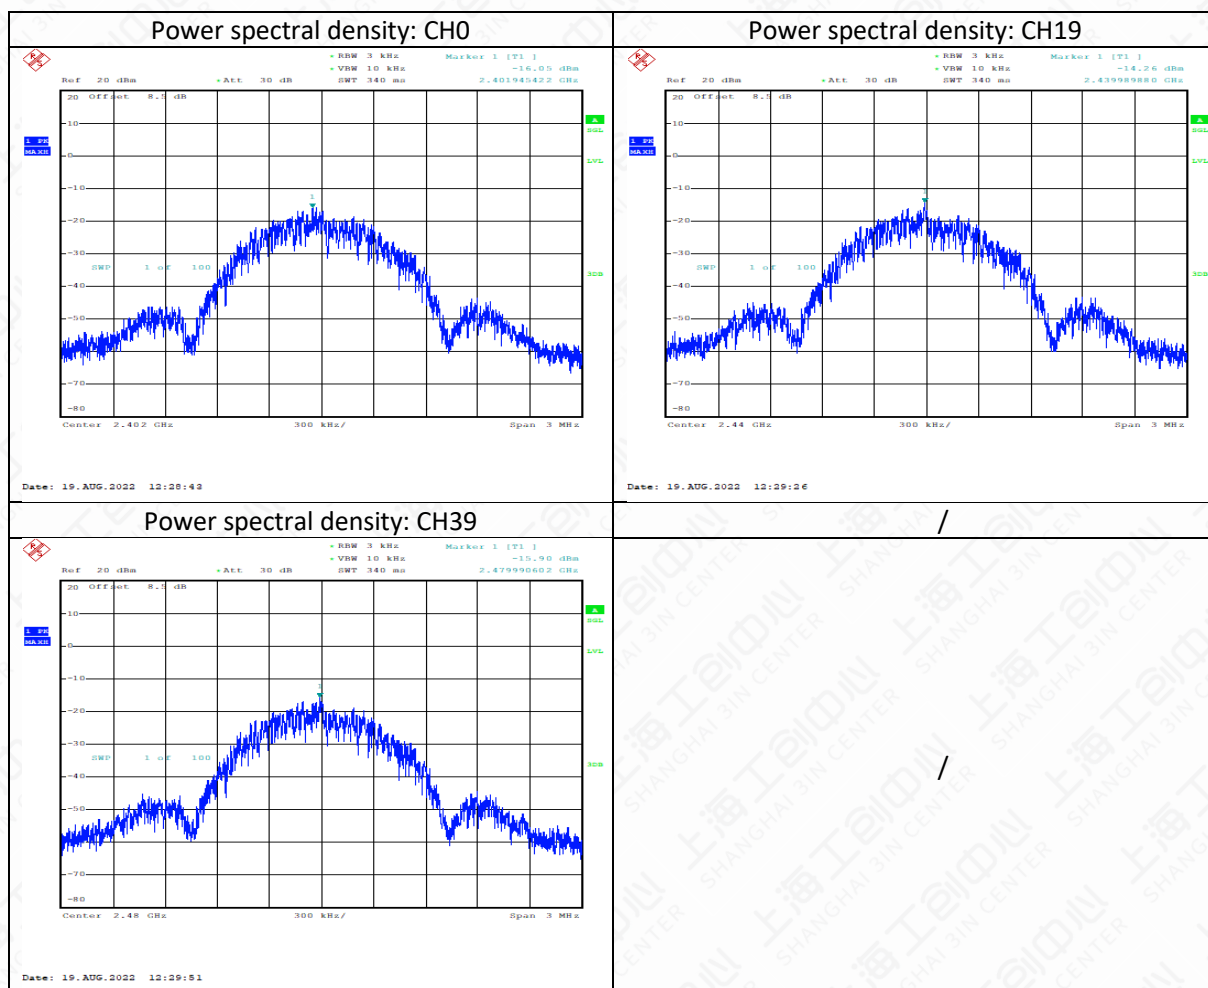

6.4 6dB Bandwidth

6.4.1 Measurement Limit


Standard	Limit
FCC 47 Part 15.247 (a) (2)	$\geq 500\text{kHz}$

6.4.2 Test procedures

The measurement is according to ANSI C63.10 clause 11.8.


1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW = 100 kHz.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.4.3 Test Setup

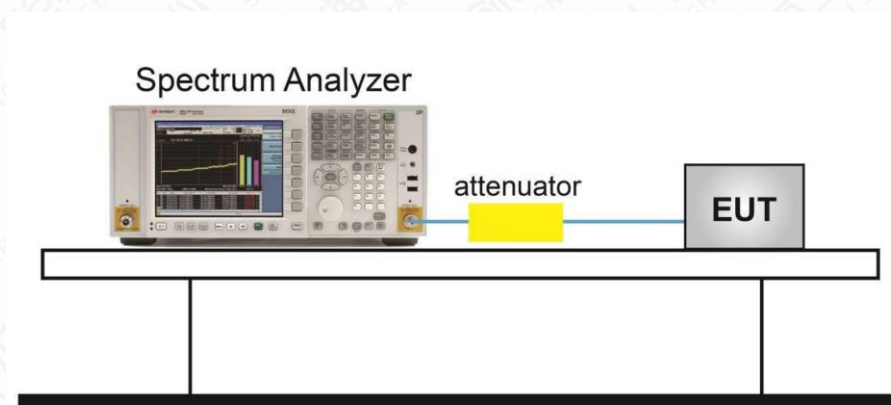

Measurement Result

Modulation type	Channel	6dB Bandwidth (Khz)
GFSK DH5	Ch 0	683
	Ch 19	678
	Ch 39	668

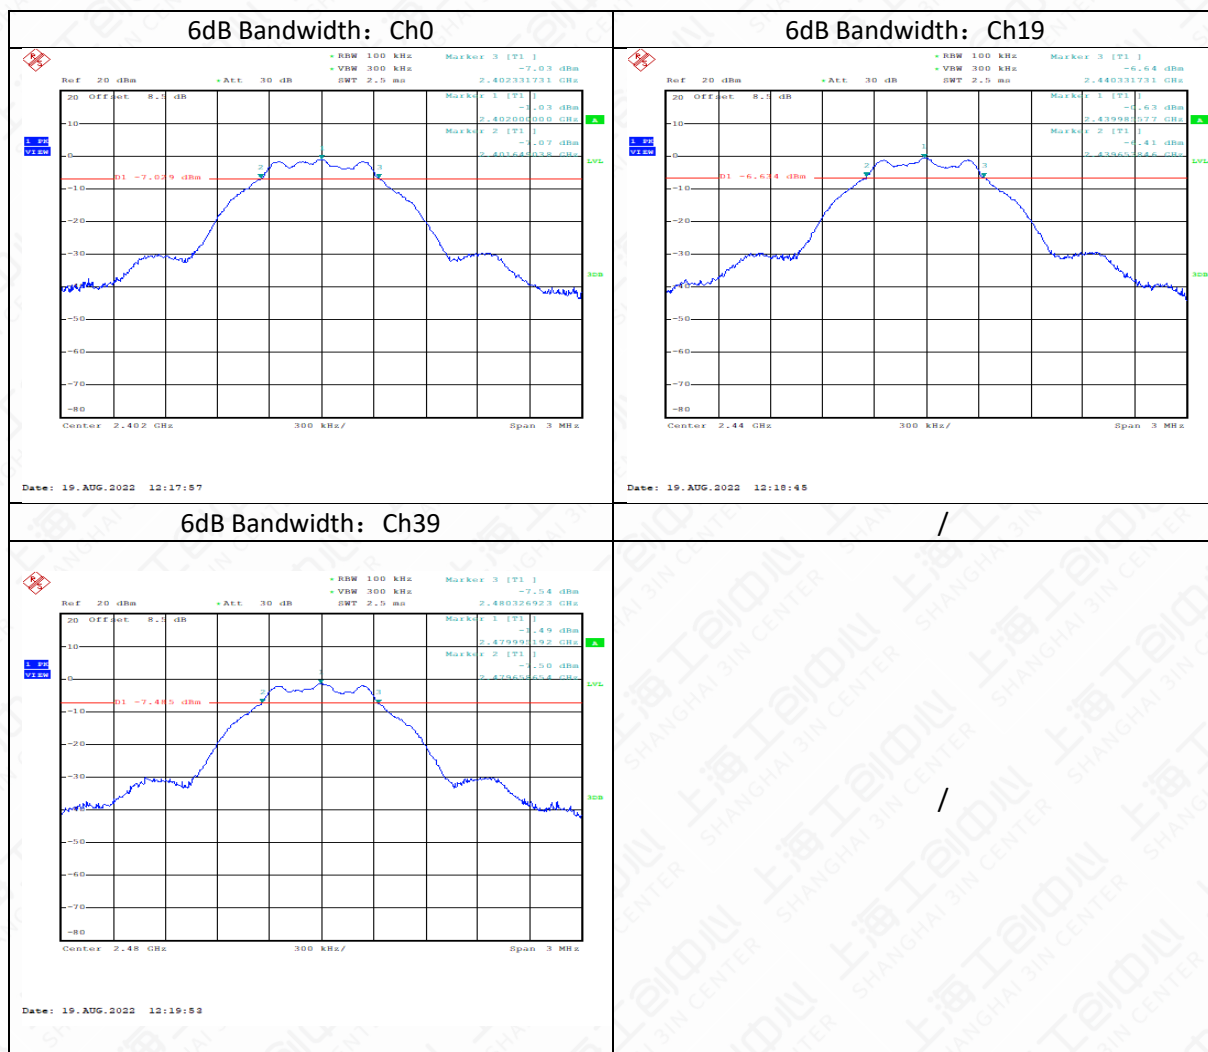

6.5 Frequency Band Edges-Conducted

6.5.1 Measurement Limit


Standard	Limit(dBc)
FCC 47 Part 15.247(d)	>20

6.5.2 Test procedures


The measurement is according to ANSI C63.10 clause 11.13.2

1. Span: Wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products that fall outside of the authorized band of operation.
2. Reference level: As required to keep the signal from exceeding the maximum instrument input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.5.2.
3. Attenuation: Auto (at least 10 dB preferred).
4. Sweep time: Coupled.
5. Resolution bandwidth: 100 kHz.6) Video bandwidth: 300 kHz.7) Detector: Peak.8) Trace: Max hold.

6.5.3 Test Setup

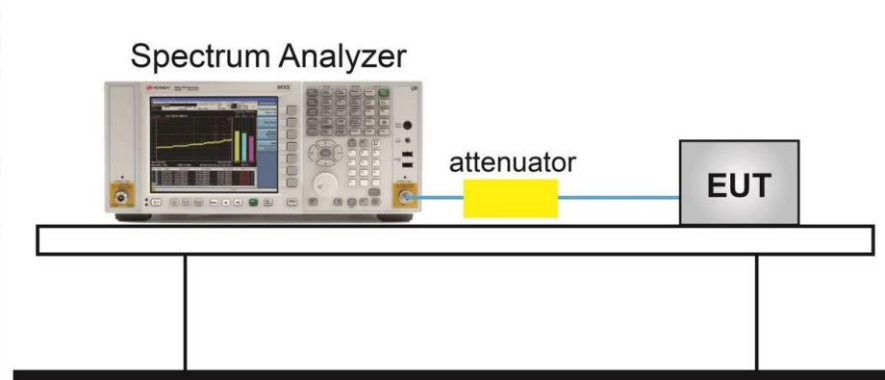

Measurement Result

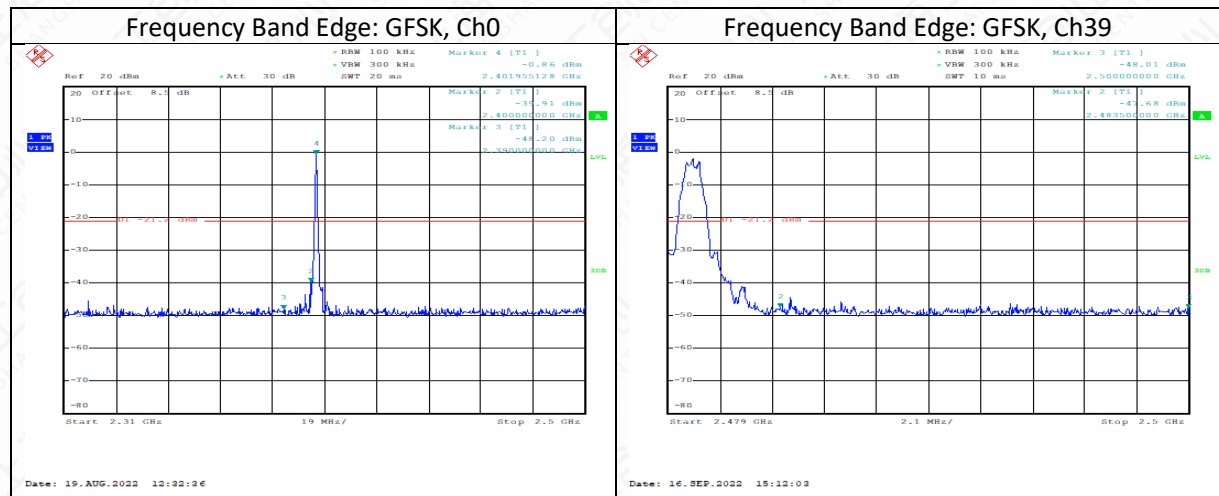

6.6 Conducted Emission

6.6.1 Measurement Limit

Standard	Limit(dBc)
FCC 47 Part 15.247(d)	20dB below peak output power in 100KHz bandwidth

6.6.2 Test procedures

This measurement is according to ANSI C63.10 clause 11.11.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.


Reference level measurement

3. Set instrument center frequency to DTS channel center frequency.
4. Set the span to ≥ 1.5 times the DTS bandwidth.
5. Set the RBW = 100 kHz.
6. Set the VBW $\geq [3 \times \text{RBW}]$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum PSD level.


Emission level measurement

12. Set the center frequency and span to encompass frequency range to be measured.
13. Set the RBW = 100 kHz.
14. Set the VBW $\geq [3 \times \text{RBW}]$.
15. Detector = peak.
16. Sweep time = auto couple.
17. Trace mode = max hold.
18. Allow trace to fully stabilize.
19. Use the peak marker function to determine the maximum amplitude level.


6.6.3 Test Setup

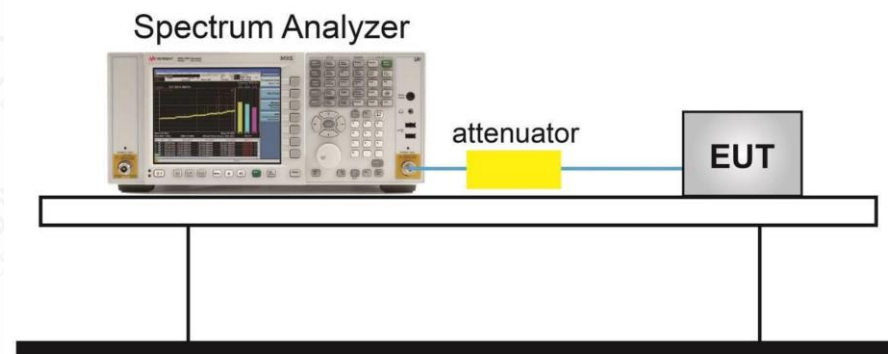

Measurement Result

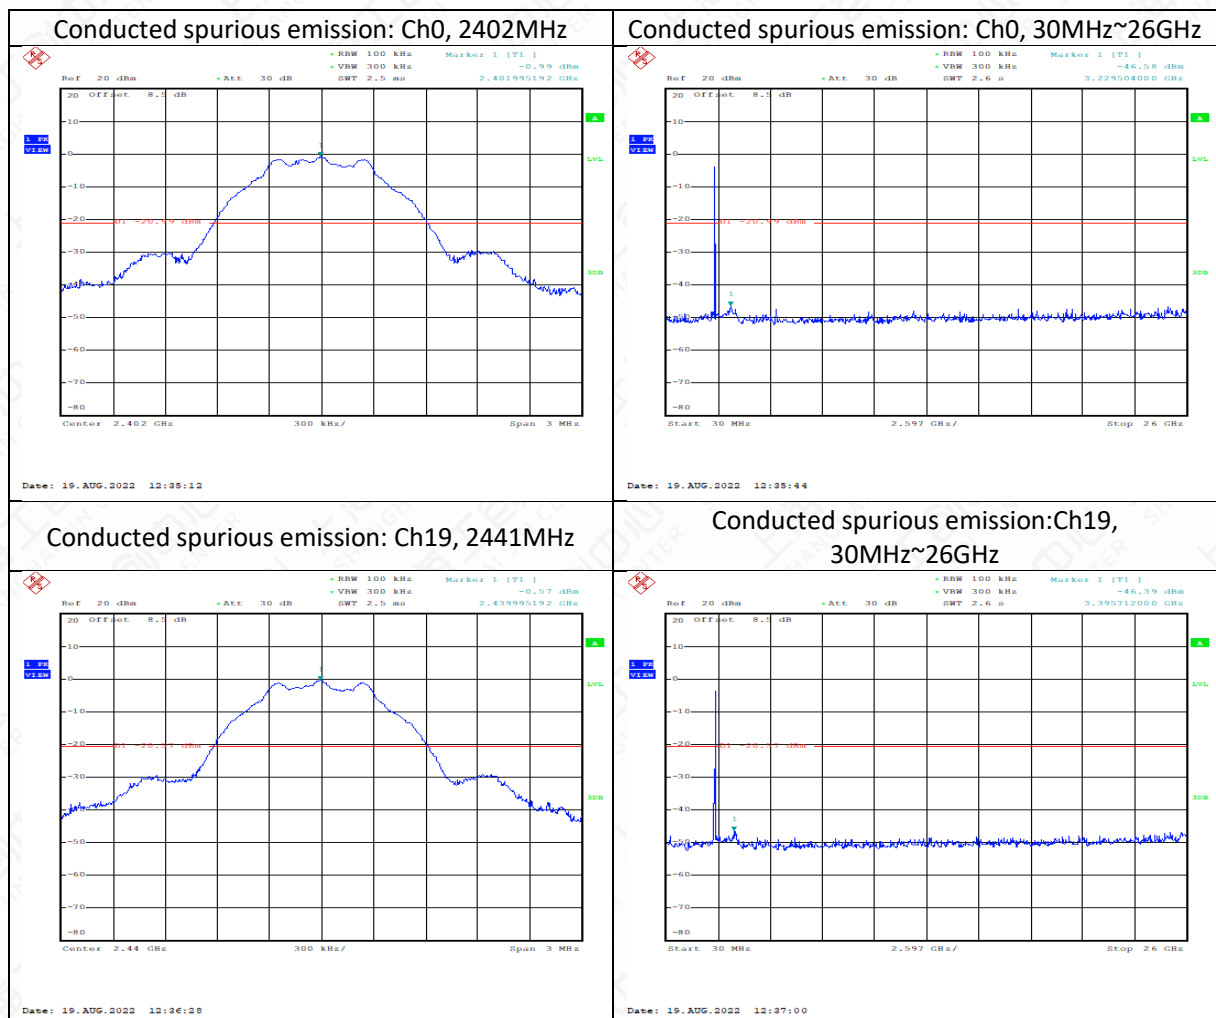


Conducted spurious emission: Ch39, 2480MHz

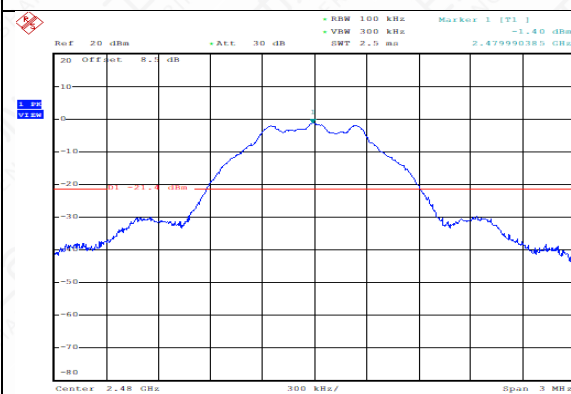

Date: 19.AUG.2022 12:37:45

Conducted spurious emission: Ch39, 30MHz~26GHz

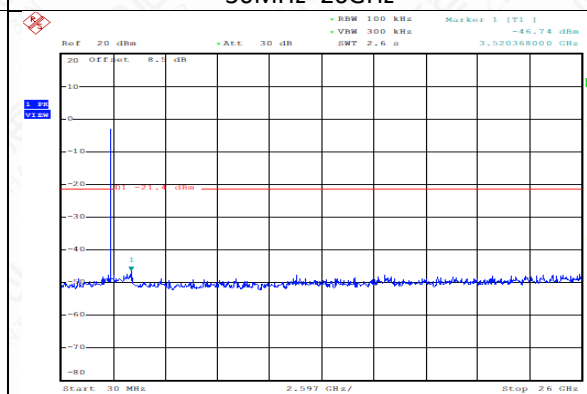

Date: 19.AUG.2022 12:38:17

6.7 Radiated Emission

6.7.1 Measurement Limit

Standard	Limit(dBc)
FCC 47 Part 15.247(d),15.205(a),15.209(a)	20dB below peak output power

In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a) (see 15.205(c)).

Limit in restricted band

Frequency of emission (MHz)	Field strength (uV/m)	Field strength (dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.7.2 Test Method


Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.


Frequency of emission (MHz)	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

6.7.3 Test Setup

Below 1GHz Test Setup

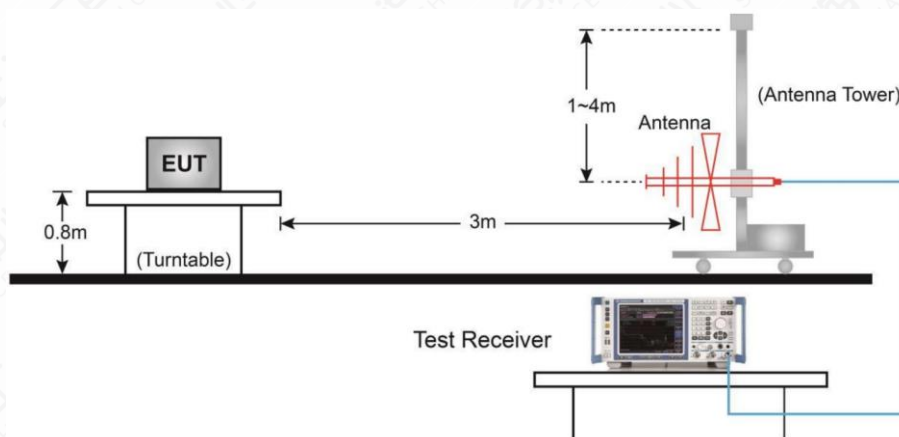

Above 1GHz Test Setup

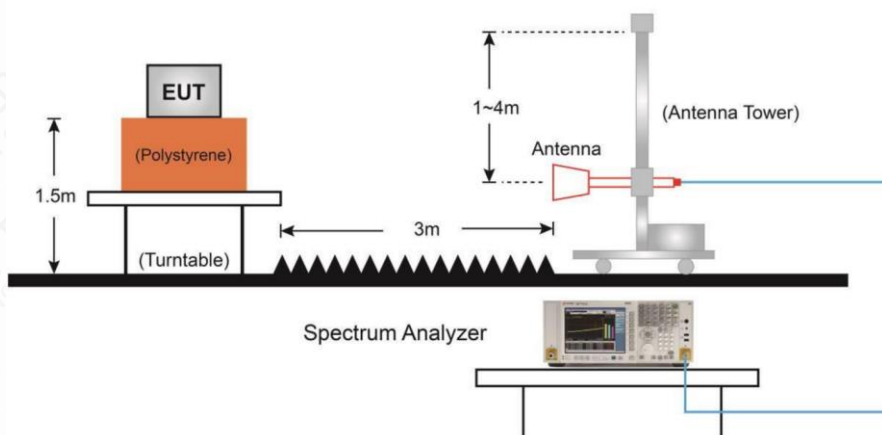

Measurement Results:


A “reference path loss” is established and AR_{Pi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.


The measurement results are obtained as described below:

$$AR_{Pi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$$

$$\text{Result} = P_{\text{Mea}} + AR_{Pi}$$

The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.

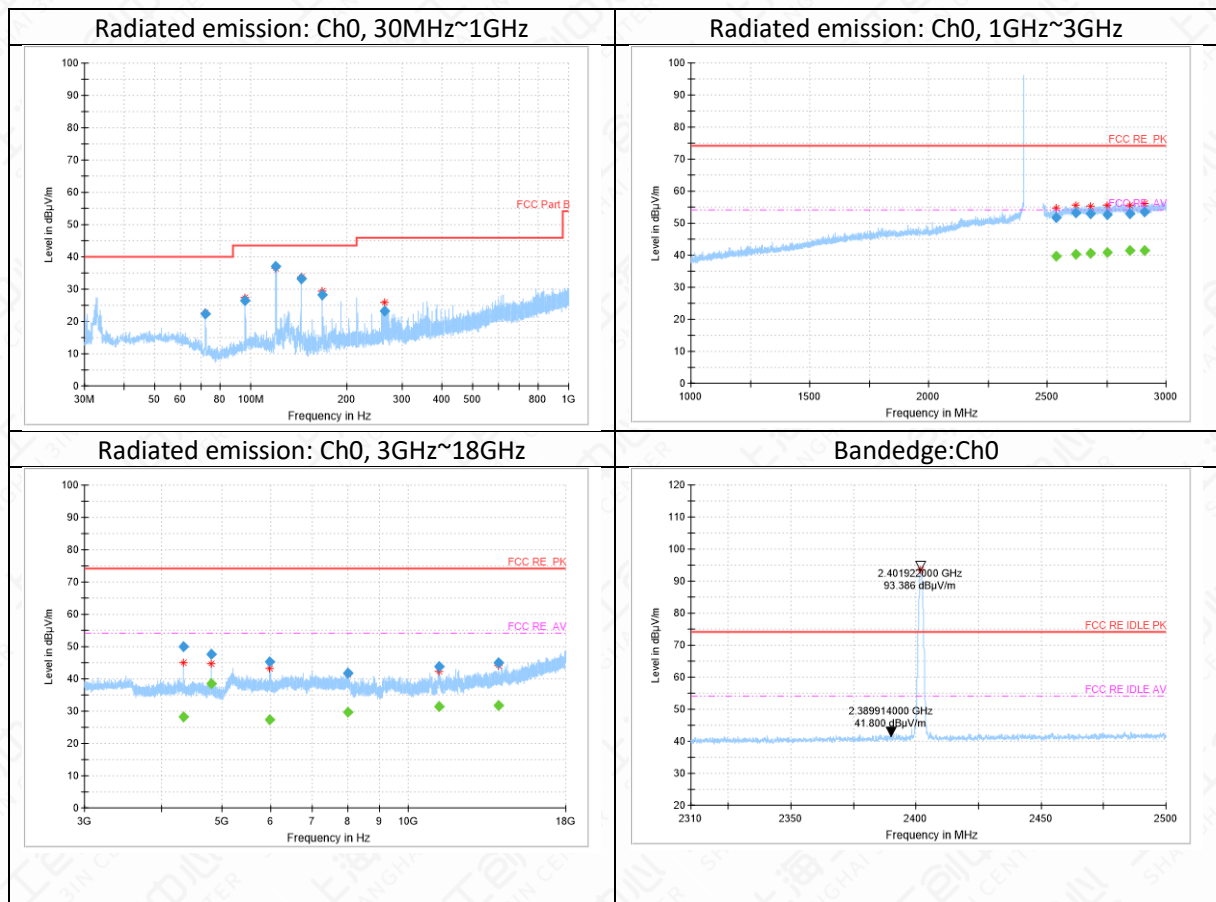

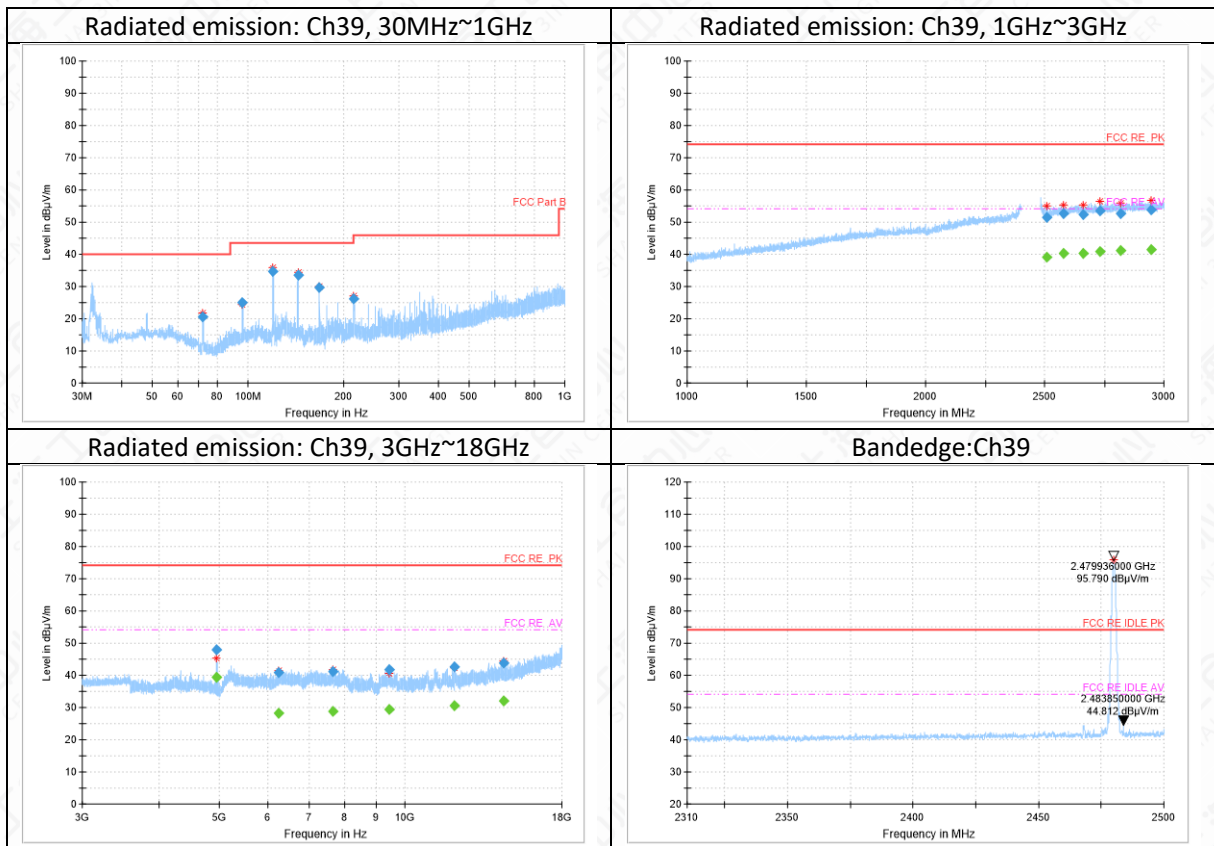

Note: The out-of-limit signal in the picture is the main frequency signal.

Ch0 30MHz-1GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
72.0	22.43	-16.2	38.63	H
96.0	26.38	-14.2	40.58	H
120.0	37.11	-15	52.11	H
144.0	33.14	-17.1	50.24	H
168.1	28.24	-15.3	43.54	H
264.0	23.16	-11.5	34.66	H

Ch0 1GHz-3GHz

Frequency (MHz)	Result (dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Polarity
2535.1	51.62	14.8	36.82	H
2620.0	53.26	15.7	37.56	H
2683.7	52.84	15.9	36.94	H
2751.3	52.58	16.2	36.38	V
2845.4	53.04	16.6	36.44	V
2907.2	53.63	16.7	36.93	H

Ch0 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4332.0	50.11	-5.3	55.41	V
4804.1	47.63	-4.9	52.53	H
5981.2	45.29	-4	49.29	V
8005.6	41.75	-1	42.75	H
11217.2	43.84	1.7	42.14	H
14002.8	44.88	4.7	40.18	H

Ch39 30MHz-1GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
72.0	20.63	-16.2	36.83	H
96.0	25.11	-14.2	39.31	H
120.0	34.85	-15	49.85	H
144.0	33.57	-17.1	50.67	H
168.0	29.59	-15.3	44.89	H
216.0	26.29	-12.8	39.09	H

Ch39 1GHz-3GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
2510.1	51.51	14.7	36.81	V
2578.7	52.64	15.3	37.34	H
2661.3	52.39	15.9	36.49	H
2733.0	53.52	16.1	37.42	V
2819.6	52.78	16.6	36.18	V
2944.6	53.85	16.8	37.05	V

Ch39 3GHz-18GHz

Frequency (MHz)	Result (dB μ V/m)	ARpl (dB)	PMea (dB μ V/m)	Polarity
4960.0	47.91	-4.2	52.11	V
6249.8	41.02	-2.7	43.72	V
7642.9	41.17	-1.8	42.97	V
9454.0	41.65	-0.3	41.95	H
12055.3	42.69	2	40.69	V
14485.6	43.94	5.1	38.84	H


6.8 AC Powerline Conducted Emission

6.8.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.8.2 Test Setup

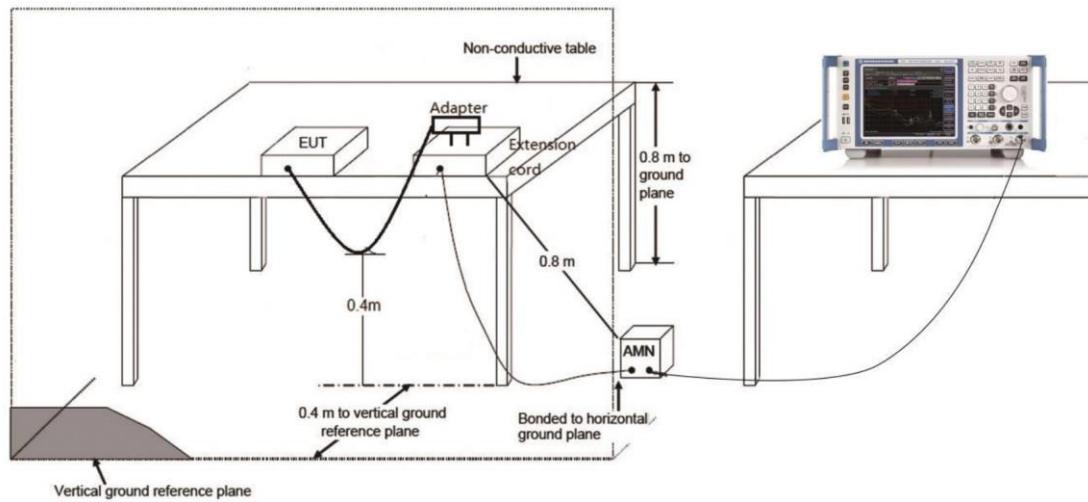

Measurement Result and limit:

In accordance with the requirements of standard FCC Part 15.207, conducted emission is not applicable.

Annex A: Revised History

Version	Revised Content
V00	Initial

Annex B: Accreditation Certificate**END OF REPORT**