

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

FCC/IC 5.8G WLAN TEST REPORT

PRODUCT	POS System
BRAND	SUNMI
MODEL	L1584,L1585,L1586,L1591, L1592, L1593,L3571,L3572,L3573
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25D2S2ND
IC	22621-D2S2ND
ISSUE DATE	January 06, 2023
STANDARD(S)	FCC Part15, RSS-247 Issue 2, RSS-Gen Issue 5

Prepared by: Tao Lingyan


Reviewed by: Yang Fan

Approved by: Zhang Min

Signature

Signature

Signature

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
2. GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION	5
3. GENERAL INFORMATION OF THE CUSTOMER.....	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
4. GENERAL INFORMATION OF THE PRODUCT.....	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4.3 ADDITIONAL INFORMATION	7
5. TEST CONFIGURATION INFORMATION	8
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	8
5.2 TEST EQUIPMENTS UTILIZED.....	8
5.3 MEASUREMENT UNCERTAINTY	10
6. MEASUREMENT RESULTS	11
6.1 MAXIMUM AVERAGE OUTPUT POWER	11
6.2 PEAK POWER SPECTRAL DENSITY	15
6.3 6dB OCCUPIED BANDWIDTH.....	19
6.4 99% OCCUPIED BANDWIDTH(CONDUCTED).....	23
6.5 FREQUENCY STABILITY	27
6.6 TRANSMITTER SPURIOUS EMISSION.....	27
6.7 BAND EDGES COMPLIANCE.....	37
6.8 AC POWERLINE CONDUCTED EMISSION	40
ANNEX A: REVISED HISTORY	43
ANNEX B: ACCREDITATION CERTIFICATE.....	44

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard(s)	Title	Version
1	FCC Part15	Title 47 of the Code of Federal Regulations; Chapter I Part 15 - Radio frequency devices	2020
2	RSS-247 Issue 2	Digital Transmission Systems (DTSS), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2017
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

1.2 Reference Documents

No.	Reference	Title	Version
1	ANSI 63.10	Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz	2013
2	KDB 789033	Information Infrastructure (U-NII) Devices - Part 15, Subpart E	2017
3	KDB 905462	COMPLIANCE MEASUREMENT PROCEDURES FOR UNLICENSED-NATIONAL INFORMATION INFRASTRUCTURE DEVICES OPERATING IN THE 5250-5350 MHz AND 5470-5725 MHz BANDS INCORPORATING DYNAMIC FREQUENCY SELECTION	2016

1.3 Summary of Test Results

Measurement Items	Sub-clause of Part15C	Sub-clause of IC	Verdict
Maximum Output Power	15.407(a)	RSS-247 6.2	Pass
Power Spectral Density	15.407(a)	RSS-247 6.2	Pass
6dB Occupied Bandwidth	15.407(e)	RSS-247 6.2	Pass
99% Occupied Bandwidth	N/A	RSS-GEN 6.7	Pass
Band edge compliance	15.407(b)	RSS-247 6.2	Pass
Transmitter Spurious Emission-Conducted	15.407	RSS-247 6.2	Pass
Transmitter Spurious Emission - Radiated	15.407,15.205,15.209	RSS-247 6.2 RSS-Gen 8.9,8.10	Pass
AC Powerline Conducted Emission	15.207	RSS-Gen 8.8	Pass

NOTE:

The L1584,L1585,L1586,L1591, L1592, L1593,L3571,L3572,L3573 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new products for testing.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and

test methods as defined in type certification requirement listed in section 1 of this test report.

- a. All the test data for each data were verified, but only the worst case was reported.
- b. The DC and low frequency voltages' measurement uncertainty is $\pm 2\%$.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	1.02 dBi

Note: The data of 1.4 is provided by the customer may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	958356
FCC Designation No.	CN1177

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	101kPa

2.3 Project Information

Project Manager	Gao Hongning
Test Date	June 8, 2022 to July 1, 2022

3. General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	+86 18501703215

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road, Yang Pu District, Shanghai, China

4. General Information of The Product

4.1 Product Description for Equipment under Test (EUT)

Product Name	POS System
Model name	L1584,L1585,L1586,L1591, L1592, L1593,L3571,L3572,L3573
Date of Receipt	N01: May 29,2022 N06: June 09,2022
EUT ID*	N01/N06
SN/IMEI	DD23D05N40036/ DD19D25U40089
Supported Radio Technology and Bands	BT 4.2 BR/ EDR, BLE WLAN 802.11 b,g,n WLAN 802.11 a,n,ac
Hardware Version	RK3568_MB_V2.0
Software Version	3.0.0
FCC ID	2AH25D2S2ND
IC	22621-D2S2ND
NOTE: EUT ID is the internal identification code of the laboratory.	

4.2 Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
AE1	RF Cable	N/A	N/A

4.3 Additional Information

WLAN Frequency	UNII 3: 5725MHz-5850MHz
Occupied Channel Bandwidth	20 MHz for Wi-Fi (802.11 a/n/ac) 40 MHz for Wi-Fi (802.11 ac) 80 MHz for Wi-Fi(802.11 ac)
WLAN type of modulation	OFDM

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25°C	-10°C	55°C
Working Voltage of EUT	Normal	Minimum	Maximum
	24V	22.8V	25.2V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	Programmable Power Supply	Keithley 2303	4039070	Starpont	May 10, 2021	1.5years
2	Vector Signal Generator	SMBV100A	257904	R&S	February 21, 2022	1 year
3	Temperature box	B-TF-107C	BTF107C-201804107	Boyi	May 10, 2021	1.5 years
4	Spectrum Analyzer	FSQ40	200063	R&S	November 02, 2021	1 year
5	USB Wideband Power Sener	U2021XA	MY56410009	KEYSGHT	February 21, 2022	1 year
6	Simultaneous Sampling DQA	U2531A	TW56183514	Agilent	March 02, 2022	1 year
7	Vector Signal Generator	SMU200A	104684	R&S	May 10, 2021	1.5 years
8	Wireless communication comprehensive tester	CMW270	100919	R&S	May 10, 2021	1.5 years
9	Eagle Test Software	Eagle V3.3	N/A	ECIT	N/A	N/A
10	Talent Microwave Band Rejection Filter	Filter	191016001	N/A	N/A	N/A

5.2.2 Radiated Emission Test System

No.	Name	Model	S/N	Manufacturer	Cal. Date	Cal. Interval
1	EMI Test Receiver	ESU40	100307	R&S	February 23, 2022	1 Year
2	Trilog Antenna	VULB9163	VULB9163-515	Schwarzbeck	March 11, 2022	1 Year
3	Double Ridged Guide Antenna	ETS-3117	00135890	ETS	March. 09, 2022	2 Years
4	Universal Radio Communication tester	CMU200	123123	R&S	August 23, 2021	1Year
5	Universal Radio Communication tester	CMW500	104178	R&S	August 23, 2021	1Year
6	EMI Test Software	EMC32 V9.15.00	N/A	R&S	N/A	N/A
7	2-Line V-Network	ENV216	101380	R&S	February 21, 2022	1 Year

5.2.3 Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (9.8 meters×6.7 meters×6.7 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz

5.3 Measurement Uncertainty

Item(s)	Range	Confidence Level	Calculated Uncertainty
Peak Output Power-Conducted	5100MHz-5875MHz	95%	1.024dB
Peak Power Spectral Density	5100MHz-5875MHz	95%	1.024dB/MHz
Conducted Emission	30MHz-2GHz	95%	0.90dB
Conducted Emission	2GHz-3.6GHz	95%	0.88dB
Conducted Emission	3.6GHz-8GHz	95%	0.96dB
Conducted Emission	8GHz-20GHz	95%	0.94dB
Conducted Emission	20GHz-22GHz	95%	0.88dB
Conducted Emission	22GHz-26GHz	95%	0.86dB
Transmitter Spurious Emission-Radiated	9KHz-30MHz	95%	5.66dB
Transmitter Spurious Emission-Radiated	30MHz-1000MHz	95%	4.98dB
Transmitter Spurious Emission-Radiated	1000MHz -18000MHz	95%	5.06dB
Transmitter Spurious Emission-Radiated	18000MHz -40000MHz	95%	5.20dB
AC Power line Conducted Emission	0.15MHz-30MHz	95%	3.66 dB

6. Measurement Results

6.1 Maximum Average Output Power

6.1.1 Measurement Limit and Method

Standard	Limit (dBm)
FCC CRF Part 15.407(a)	< 30
RSS-247 6.2.4.1	< 30

6.1.2 Test Procedure

The measurement method SA-1 is made according to KDB 789033

Set the spectrum analyzer in the following:

Detector: RMS.


RBW=1MHz.

VBW=3MHz.

Sweep time = AUTO.

Span: 30MHz (for 20MHz); 50MHz (for 40MHz).

6.1.3 Test setup

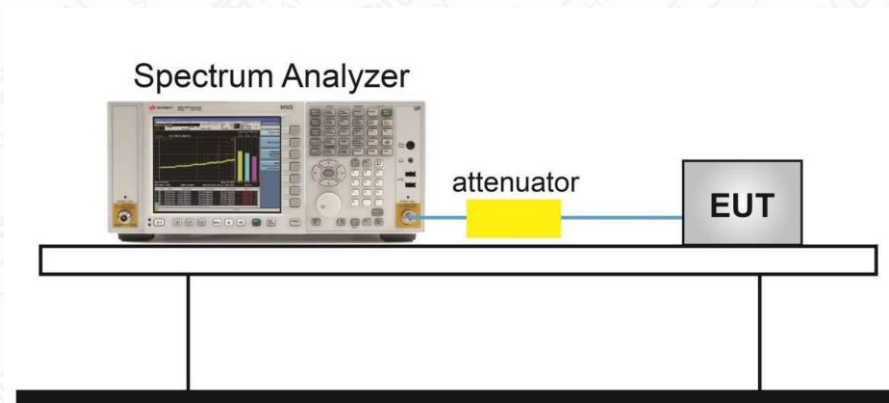

Measurement Results

U-NII-3


Mode	Channel	index	Conducted (dBm)	E.I.R.P (dBm)	Duty cycle factor (dB)
802.11a	5745	53	15.40	16.42	0.32
	5785	53	14.91	15.93	0.32
	5825	53	13.73	14.75	0.32

802.11n(20MHz)	5745	53	15.42	16.44	0.26
	5785	53	14.77	15.79	0.26
	5825	53	13.64	14.66	0.26
802.11n(40MHz)	5755	53	15.06	16.08	0.35
	5795	53	14.91	15.93	0.35
802.11ac	5745	53	15.51	16.53	0.33
	5785	53	14.87	15.89	0.33
	5825	53	13.70	14.72	0.33
802.11ac(40)	5755	53	15.32	16.34	0.41
	5795	53	14.92	15.94	0.41
802.11ac(80)	5775	53	13.38	14.40	0.44


Conclusion: PASS

TEST PLOTS:

U-NII-3

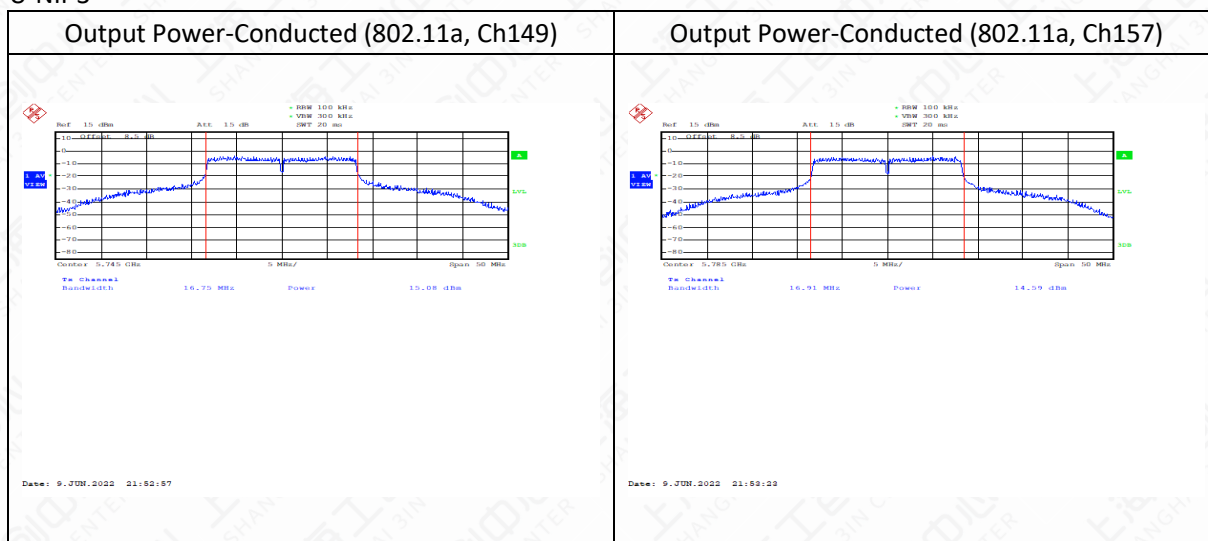


Output Power-Conducted (802.11a, Ch165)

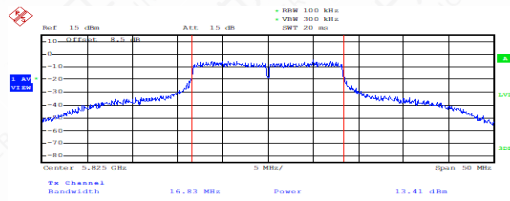


Date: 9-JUN-2022 21:59:44

Output Power-Conducted (802.11n-HT20, Ch149)

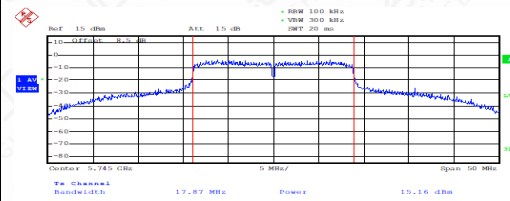


Date: 9-JUN-2022 21:56:12

Output Power-Conducted (802.11n-HT20, Ch157)

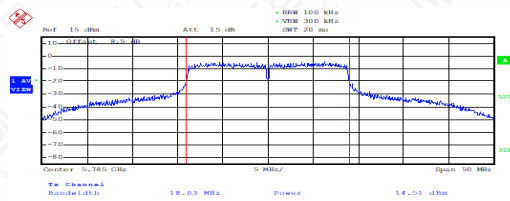


Date: 9-JUN-2022 21:54:30

Output Power-Conducted (802.11n-HT20, Ch165)

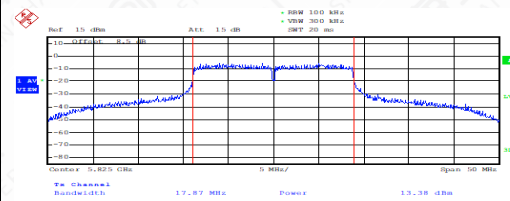


Date: 9-JUN-2022 21:55:10

Output Power-Conducted (802.11n-HT40, Ch151)






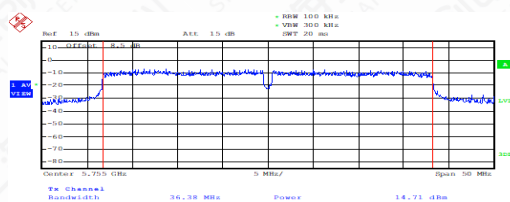


Date: 9-JUN-2022 21:55:39

Output Power-Conducted (802.11n-HT40, Ch159)

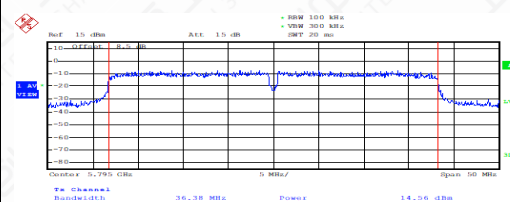

Date: 9-JUN-2022 21:56:04

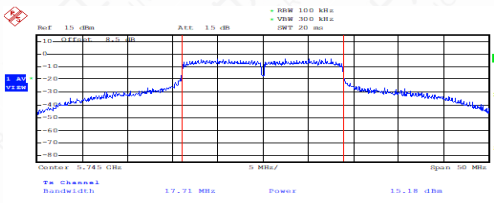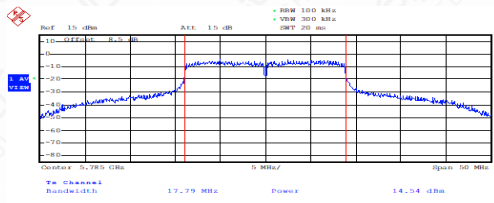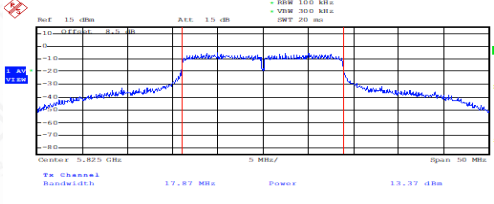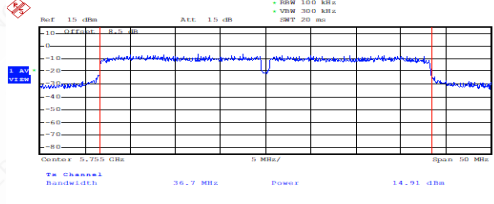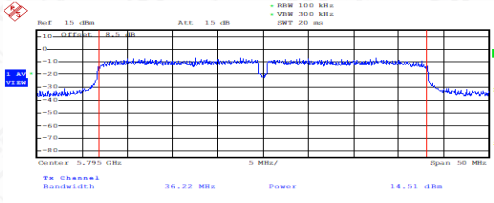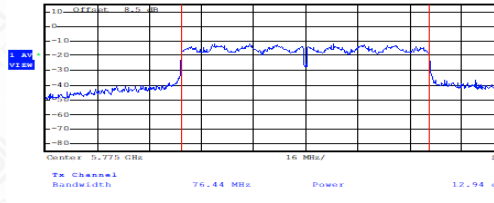Output Power-Conducted (802.11ac-VHT20, Ch149)  Date: 9 JUN 2022 21:56:35	Output Power-Conducted (802.11ac-VHT20, Ch157)  Date: 9 JUN 2022 21:56:57
Output Power-Conducted (802.11ac-VHT20, Ch165)  Date: 9 JUN 2022 21:57:21	Output Power-Conducted (802.11ac-VHT40, Ch151)  Date: 9 JUN 2022 21:57:48
Output Power-Conducted (802.11ac-VHT40, Ch159)  Date: 9 JUN 2022 21:58:08	Output Power-Conducted (802.11ac-VHT80, Ch155)  Date: 16 JUN 2022 21:36:56

Note: Using the ADB platform software set by default by the customer.


6.2 Peak Power Spectral Density

6.2.1 Measurement Limit

Standard	Limit
FCC 47 CFR Part 15.407(a)	< 30 dBm/500 kHz
RSS-247 6.2.4.1	< 30 dBm/500 kHz

6.2.2 Test setup The output power measurement method SA-1 is made according to KDB 789033


6.2.3 Test setup

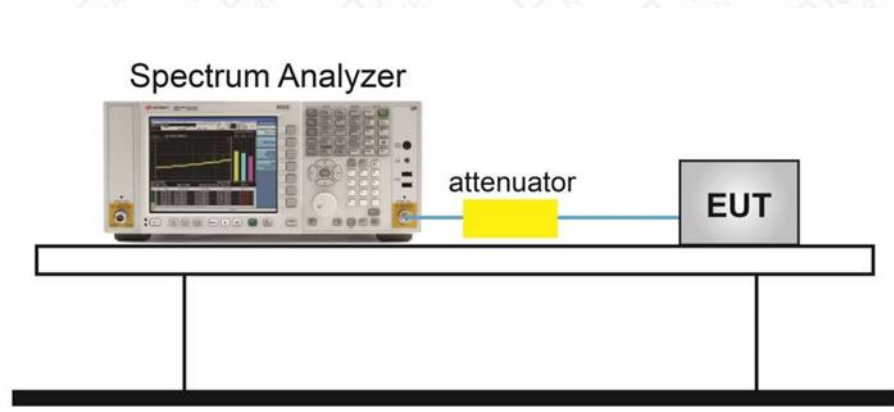


Measurement Results

Mode	Channel	Power Spectral Density (dBm/MHz)	Conclusion
802.11a	149	6.18	P
	157	5.74	P
	165	4.26	P
802.11n HT20	149	5.44	P
	157	4.75	P
	165	4.17	P
802.11n HT40	151	2.21	P
	159	1.48	P
802.11ac VHT20	149	5.30	P
	157	5.13	P
	165	3.63	P
802.11ac VHT40	151	3.72	P
	159	2.11	P
	155	0.15	P

Test graphs as below:

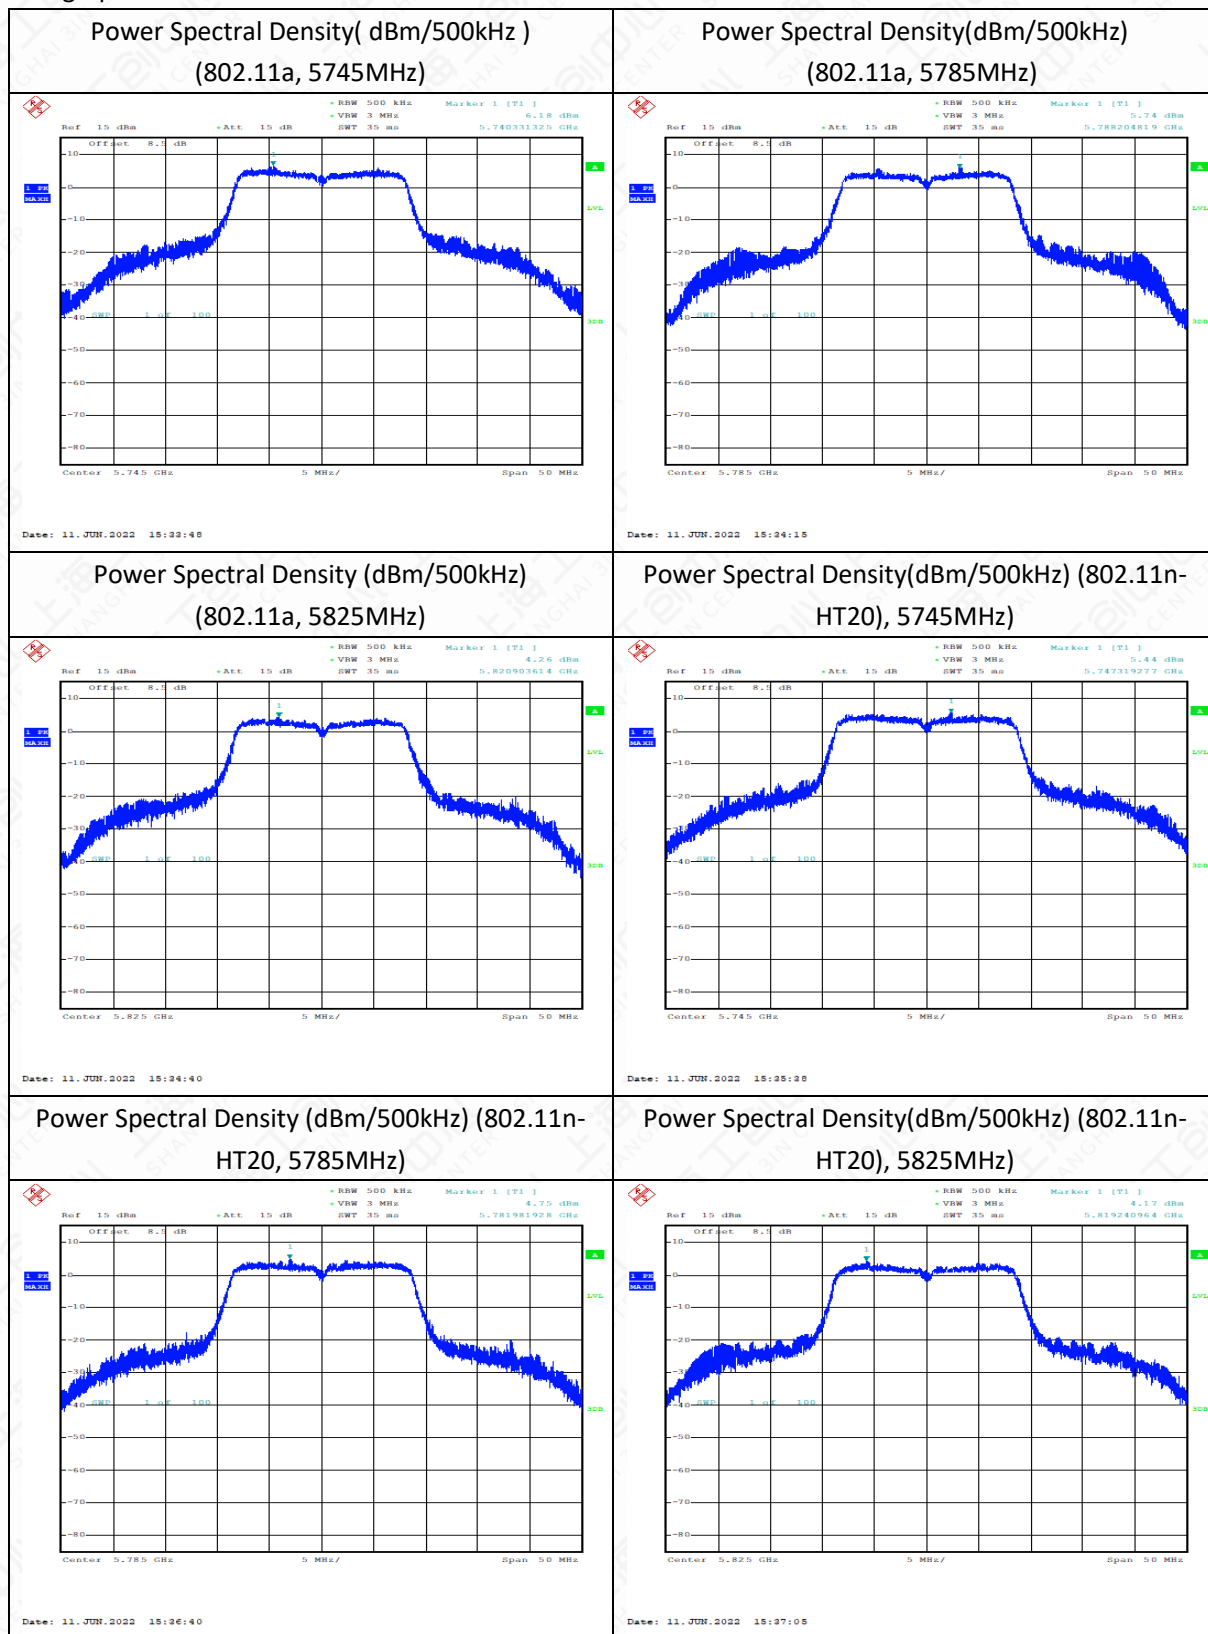


Power Spectral Density (dBm/500kHz) (802.11n-HT40, 5755MHz)

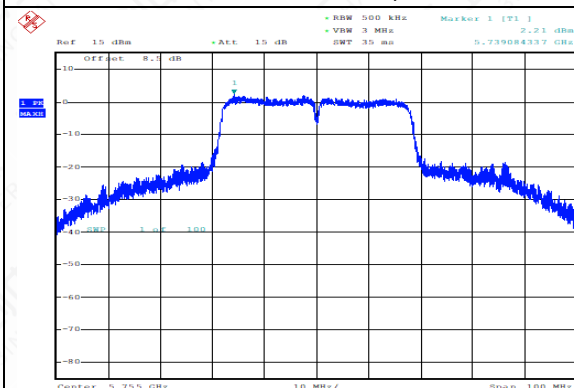


Date: 11. JUN. 2022 15:37:48

Power Spectral Density(dBm/500kHz) (802.11n-HT40), 5795MHz)

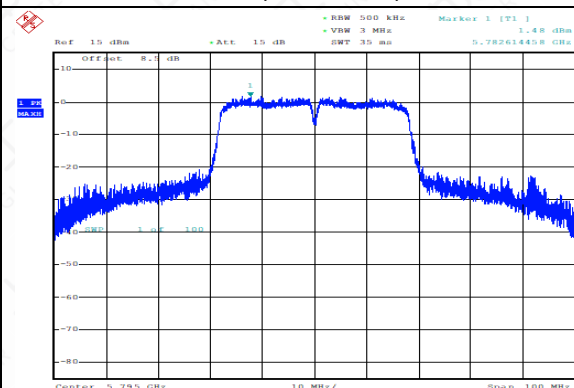


Date: 11. JUN. 2022 15:38:24

Power Spectral Density(dBm/500kHz) (802.11ac-VHT20, 5745MHz)

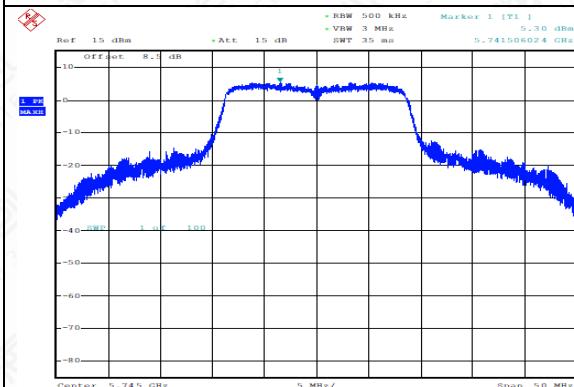


Date: 11. JUN. 2022 15:38:55

Power Spectral Density(dBm/500kHz) (802.11ac-VHT20, 5785MHz)

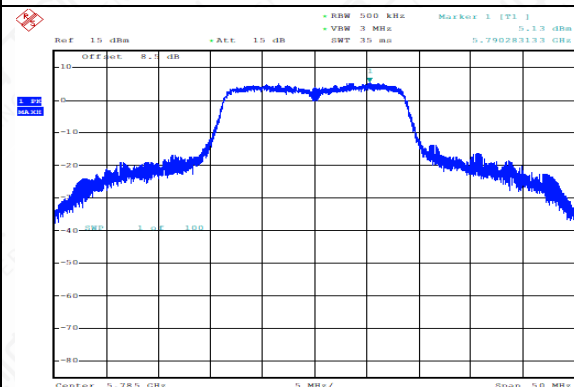


Date: 11. JUN. 2022 15:39:25

Power Spectral Density (dBm/500kHz) (802.11ac-VHT20, 5825MHz)

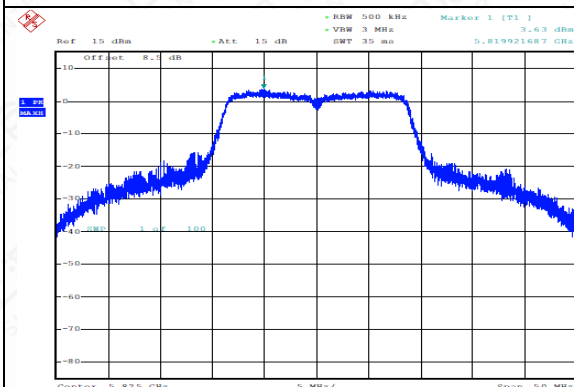


Date: 11. JUN. 2022 15:40:01

Power Spectral Density (dBm/500kHz) (802.11ac-VHT40, 5755MHz)

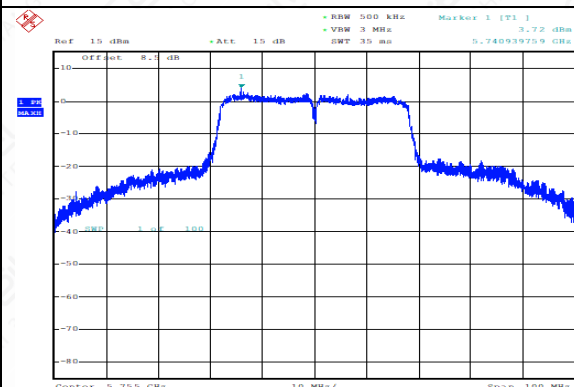


Date: 11. JUN. 2022 15:40:52

Power Spectral Density (dBm/500kHz) (802.11ac-VHT40, 5795MHz)

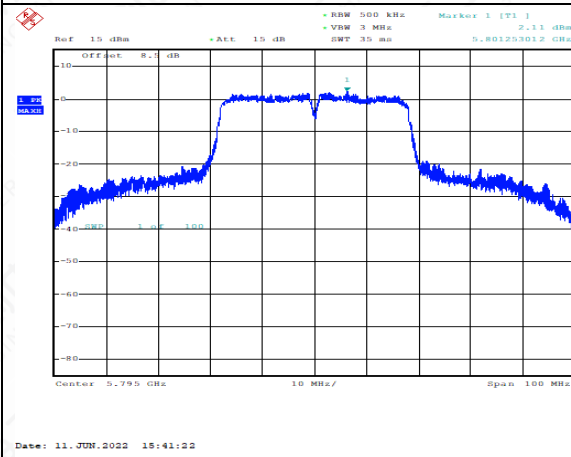

Power Spectral Density (dBm/500kHz) (802.11ac-VHT80, 5775MHz)

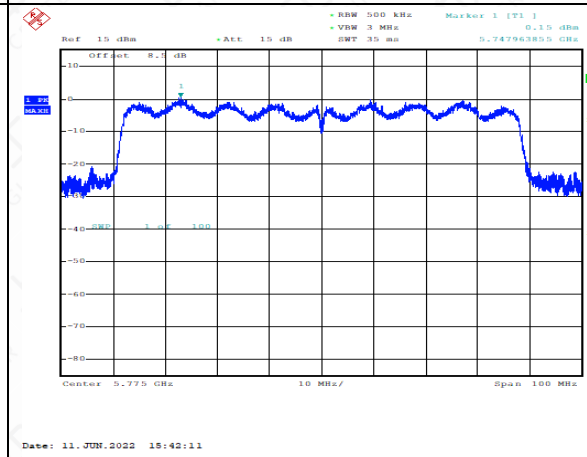

6.3 6dB Occupied Bandwidth

6.3.1 Measurement Limit


Standard	Limit(KHz)
FCC 47 CFR Part 15.407(e)	≥500
RSS-247 6.2.4.1	≥500

6.3.2 The measurement is made according to KDB 789033


Measurement Result







Mode	Channel	Occupied 6dB Bandwidth (MHz)	Conclusion
802.11a	149	16.35	P
	157	16.35	P
	165	16.35	P
802.11n HT20	149	17.23	P
	157	16.99	P
	165	17.07	P
802.11n HT40	151	35.50	P
	159	35.42	P
802.11ac HT20	149	16.43	P
	157	17.15	P
	165	17.31	P
802.11ac HT40	151	35.58	P
	159	35.34	P
802.11ac HT80	155	75.48	p





6.3.3 Test Setup

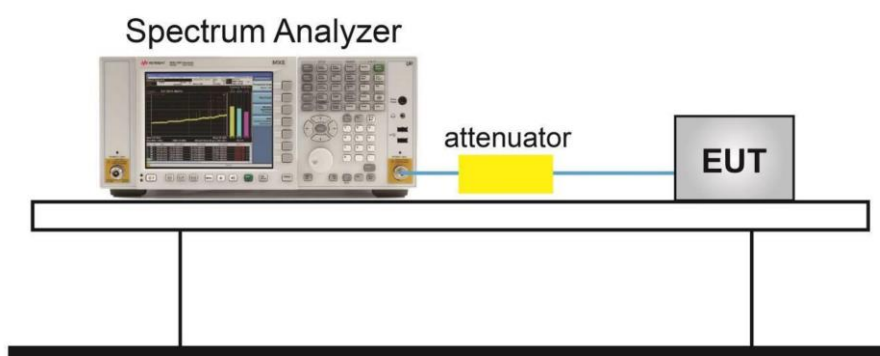

Test graphs as below:

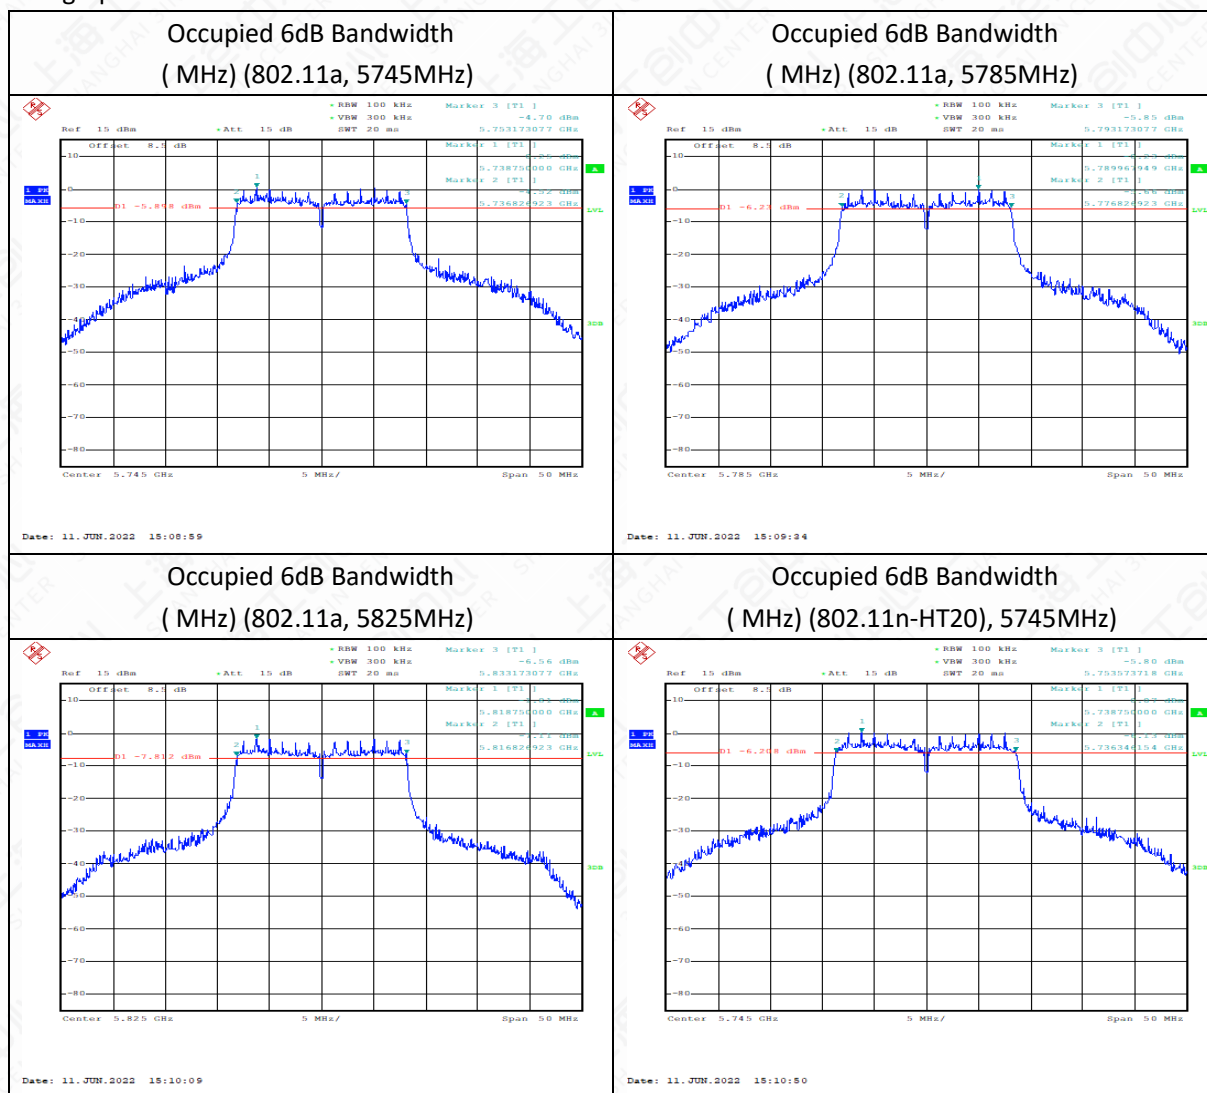

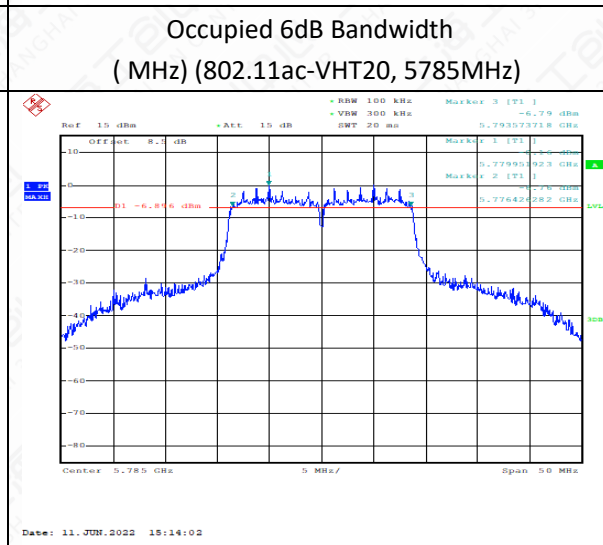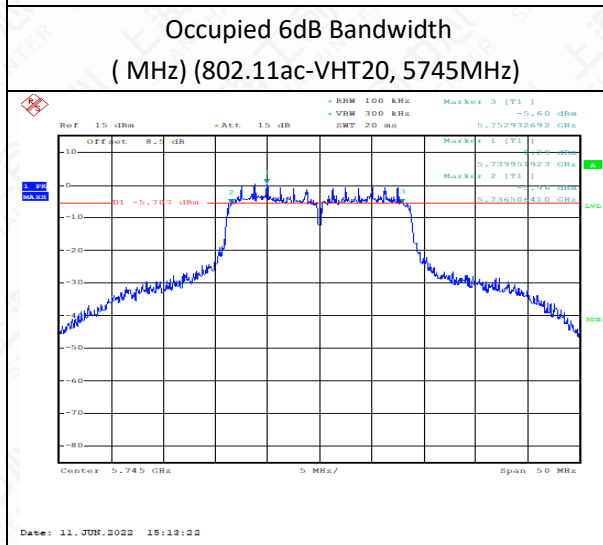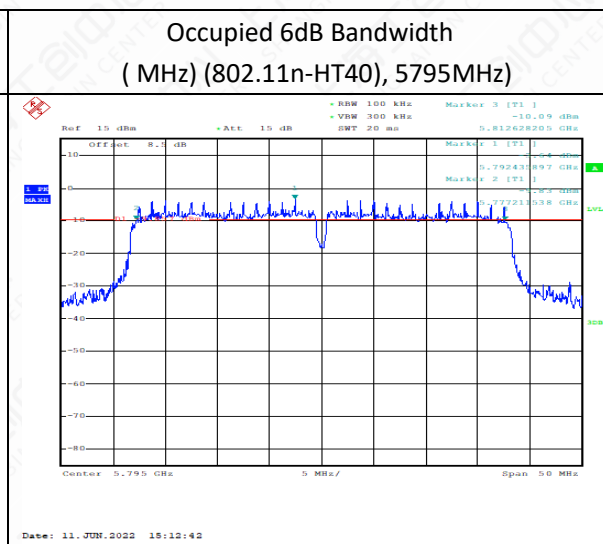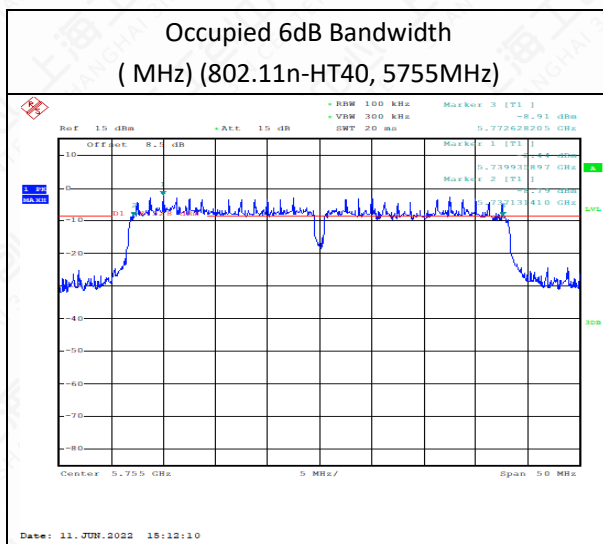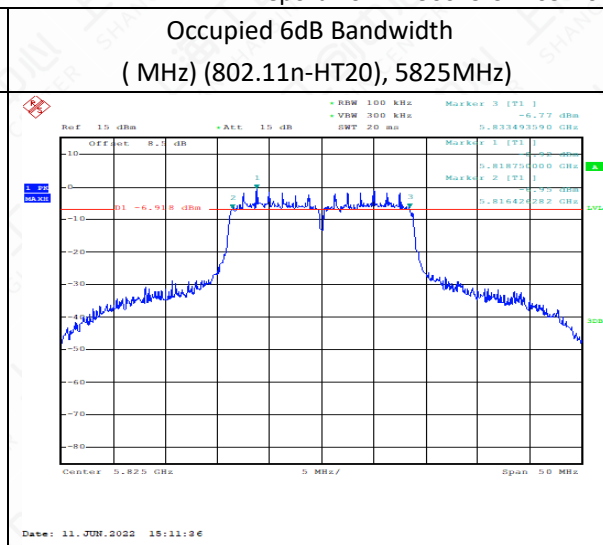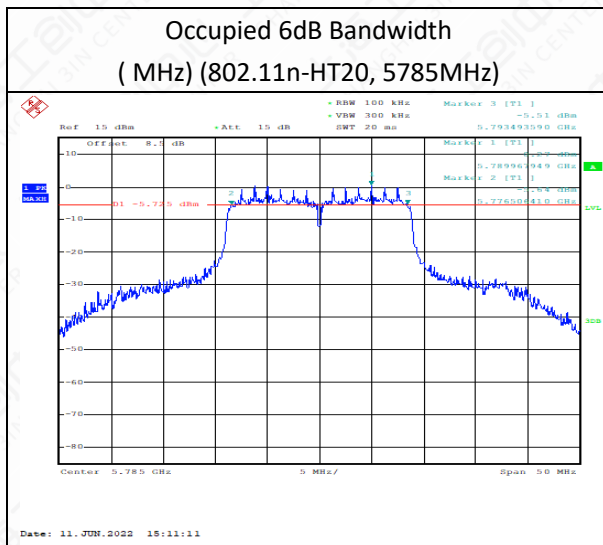

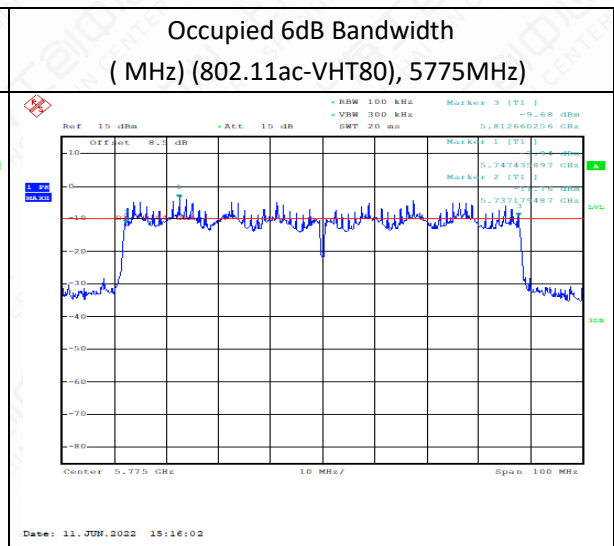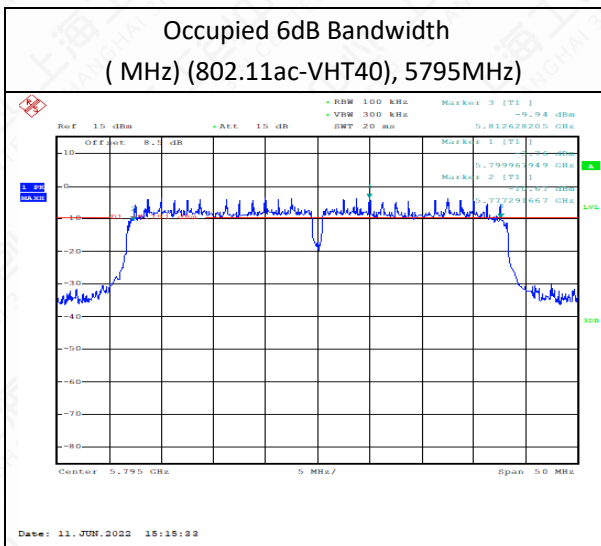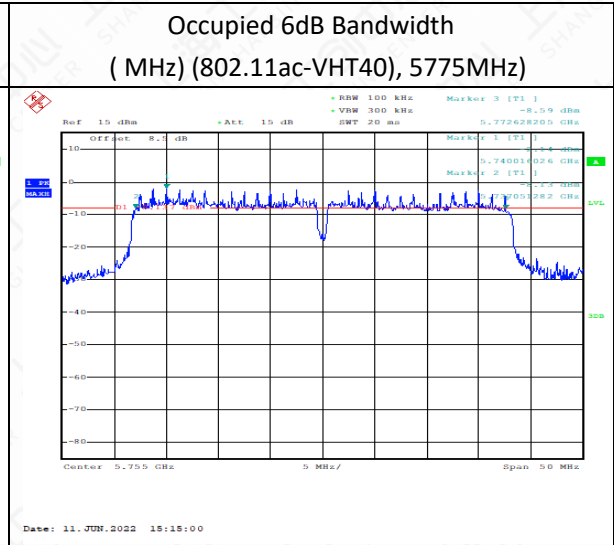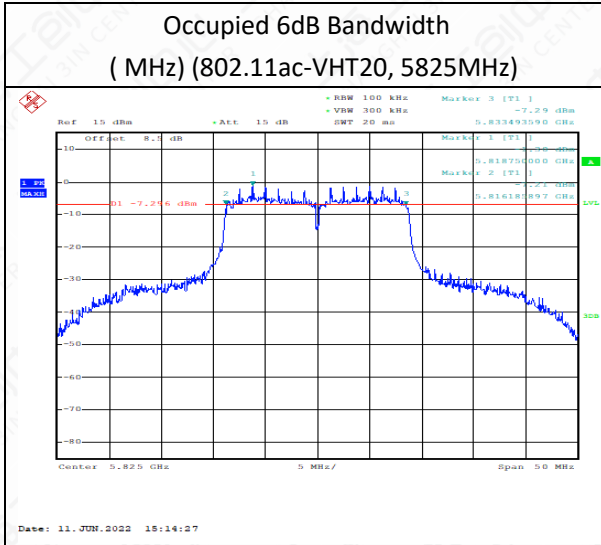


6.4 99% Occupied Bandwidth(conducted)

6.4.1 Measurement Limit

Standard	Limit(KHz)
RSS-Gen 6.7	N/A

6.4.2 The measurement is made according to KDB 789033


6.4.3 Test Setup

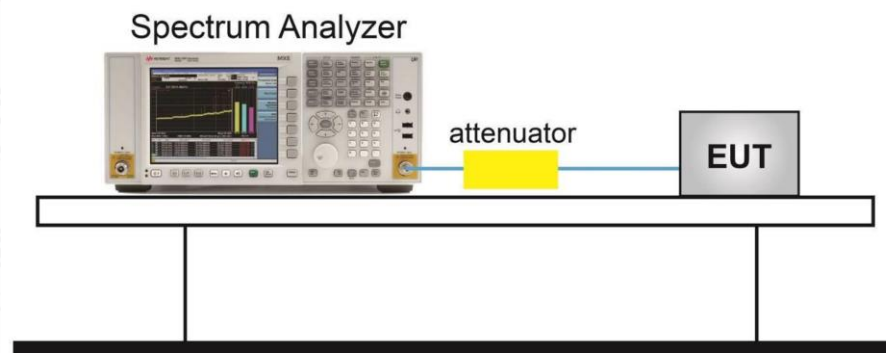



Measurement Result

Mode	Channel	99% Occupied Bandwidth (MHz)	Conclusion
802.11a	149	17.468	P
	157	17.388	P
	165	17.308	P
802.11n HT20	149	18.670	P
	157	18.109	P
	165	18.189	P
802.11n HT40	151	40.865	P
	159	37.019	P
802.11ac HT20	149	18.349	P
	157	18.189	P
	165	18.029	P
802.11ac HT40	151	38.462	P
	159	37.019	P
802.11ac HT80	155	76.442	P

Test graphs as below

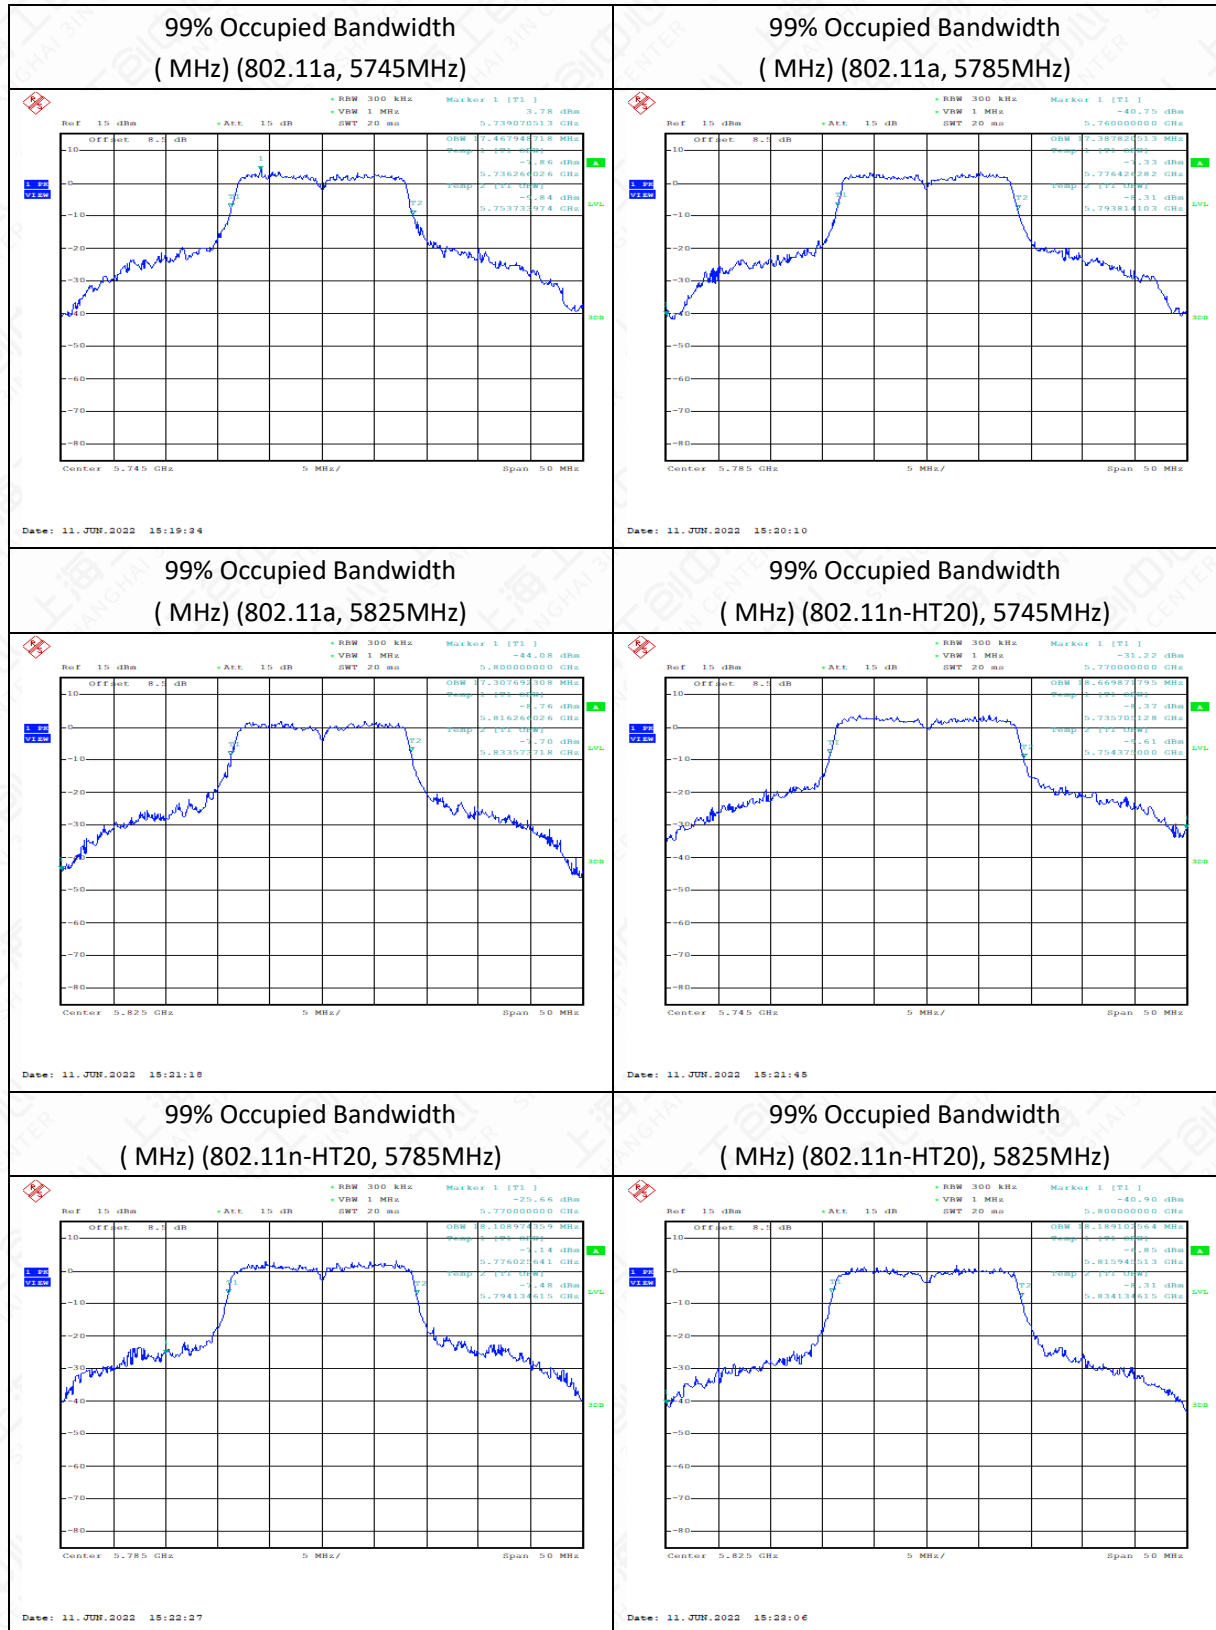

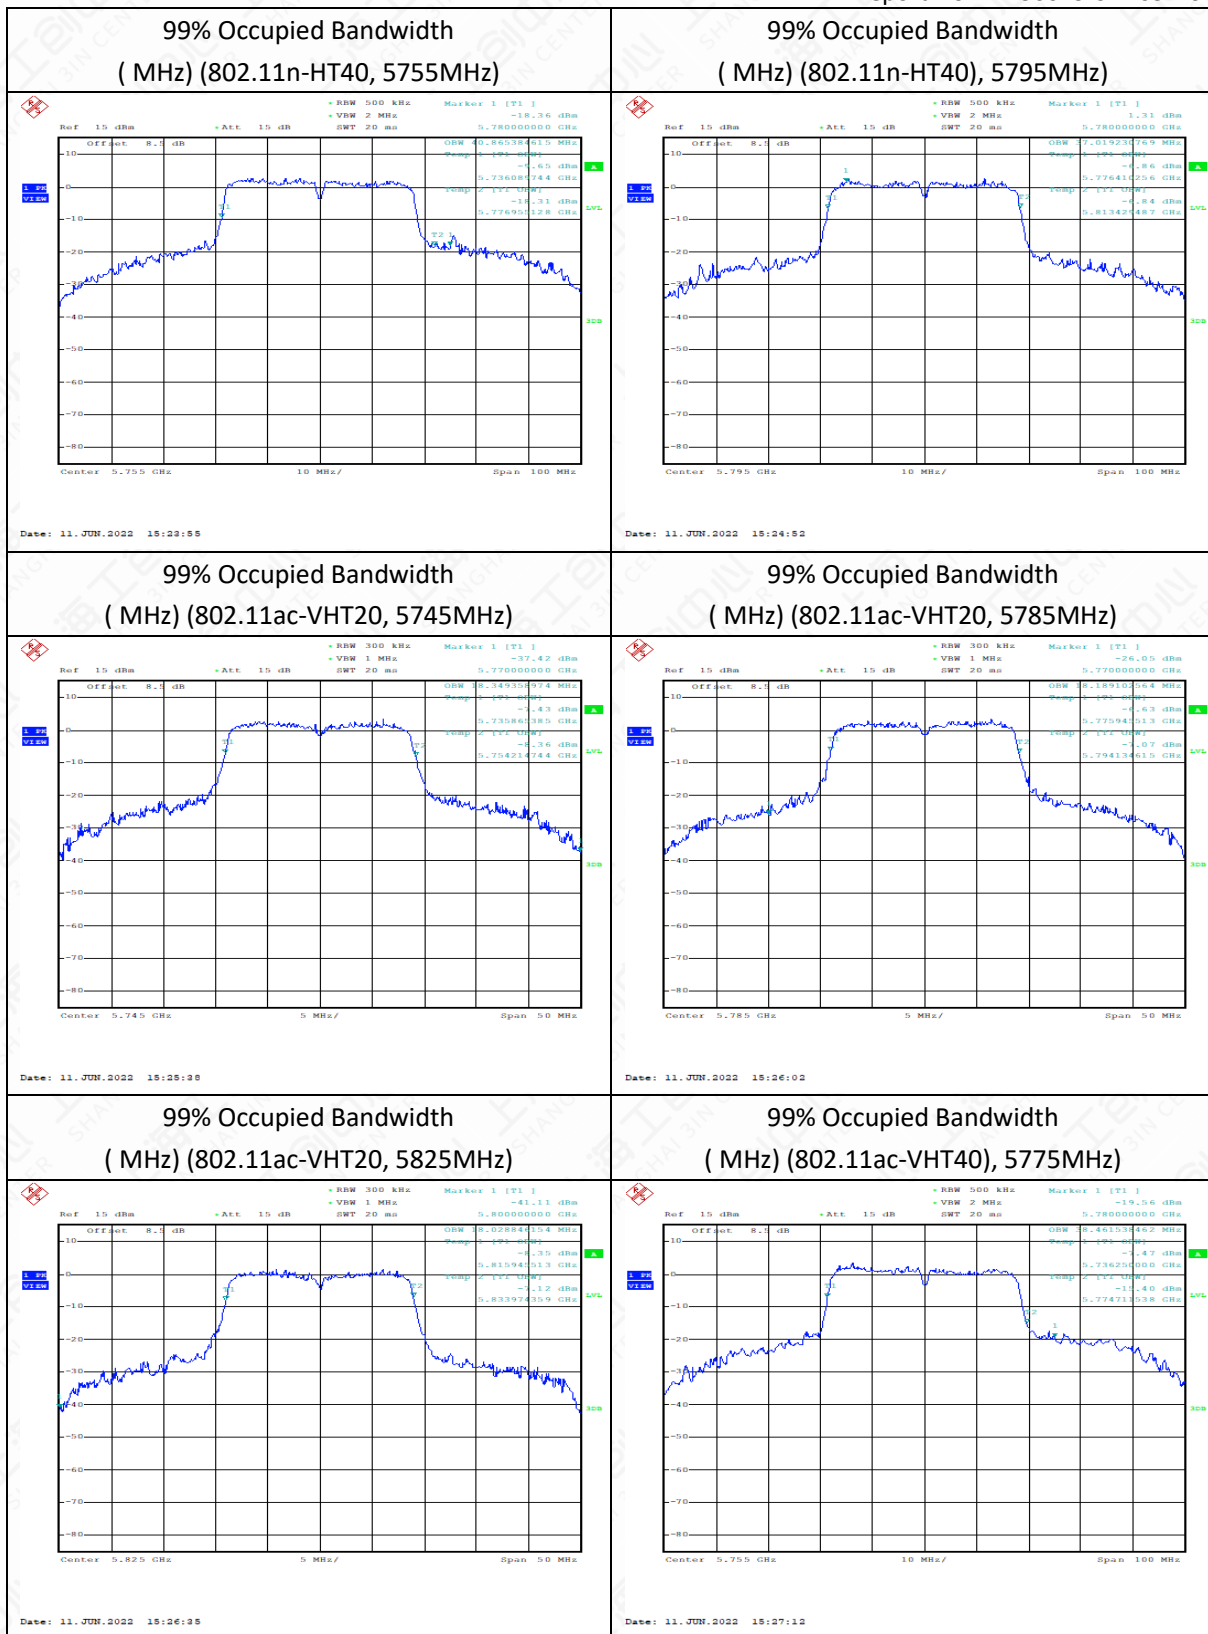

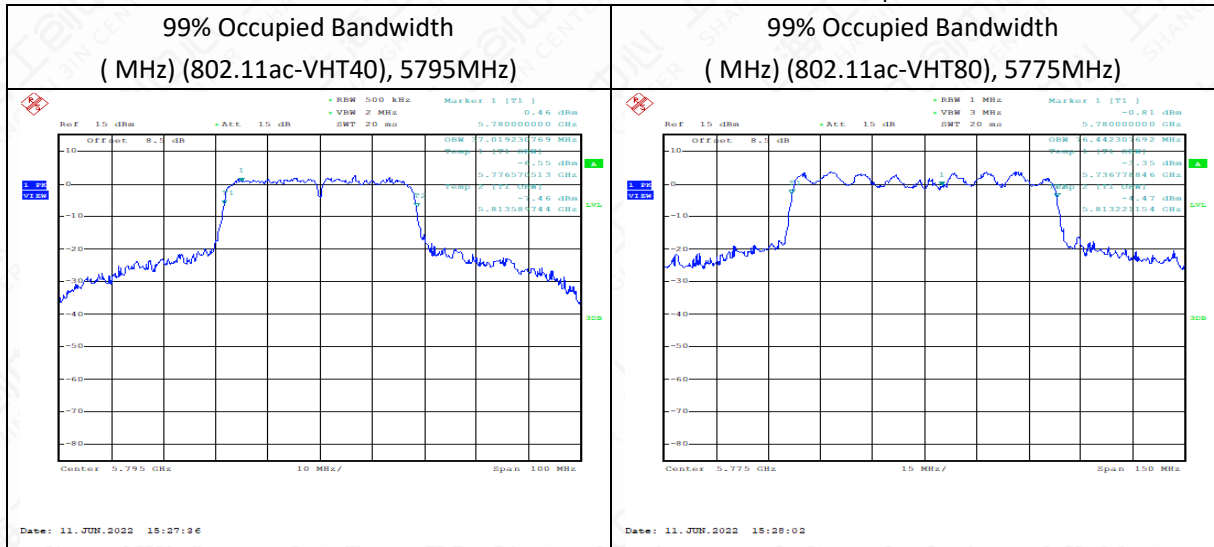

6.5 Frequency Stability

Manufacturers ensured the EUT meet the requirement of frequency stability, such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.(According to 15.407(g) and RSS-Gen 8.11)

6.6 Transmitter Spurious Emission

Measurement Limit

Standard	Limit
FCC 47 Part 15.407, 15.205, 15.209	< -27
RSS-Gen 8.9,8.10 RSS-247 6.2.4.2	< -27

The measurement is made according to ANSI C63.10.

Frequency of emission (MHz)	Field strength(uV/m)	Field strength(dBuV/m)
0.009-0.490	2400/F(kHz)	/
0.490-1.705	24000/F(kHz)	/
1.705-30	30	/
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

6.6.1 Transmitter Spurious Emission – Conducted


Modulation type and data rate tested (Only worst case result is given below):

Mode	Data rate	Channel
802.11a	6Mbps	149
802.11n-HT20	MCS0	149
802.11n-HT40	MCS0	151
802.11ac-HT20	MCS0	149
802.11ac-HT40	MCS0	151
802.11ac-HT80	MCS0	155


Measurement Results


MODE	Channel	Frequency Range	Conclusion
802.11a	149(5745MHz)	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P
802.11n-HT20	149	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P
802.11n-HT40	151(5755MHz)	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P
802.11ac-HT20	149	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P
802.11ac-HT40	151(5755MHz)	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P
802.11ac-HT80	155(5775MHz)	30 MHz ~ 1 GHz	P
		1 GHz ~ 5.7 GHz	P
		5.7 GHz ~ 40 GHz	P


Test Setup

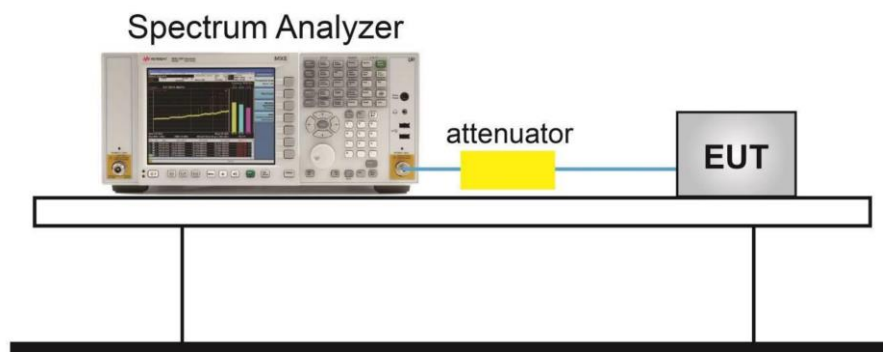

Test graphs as below

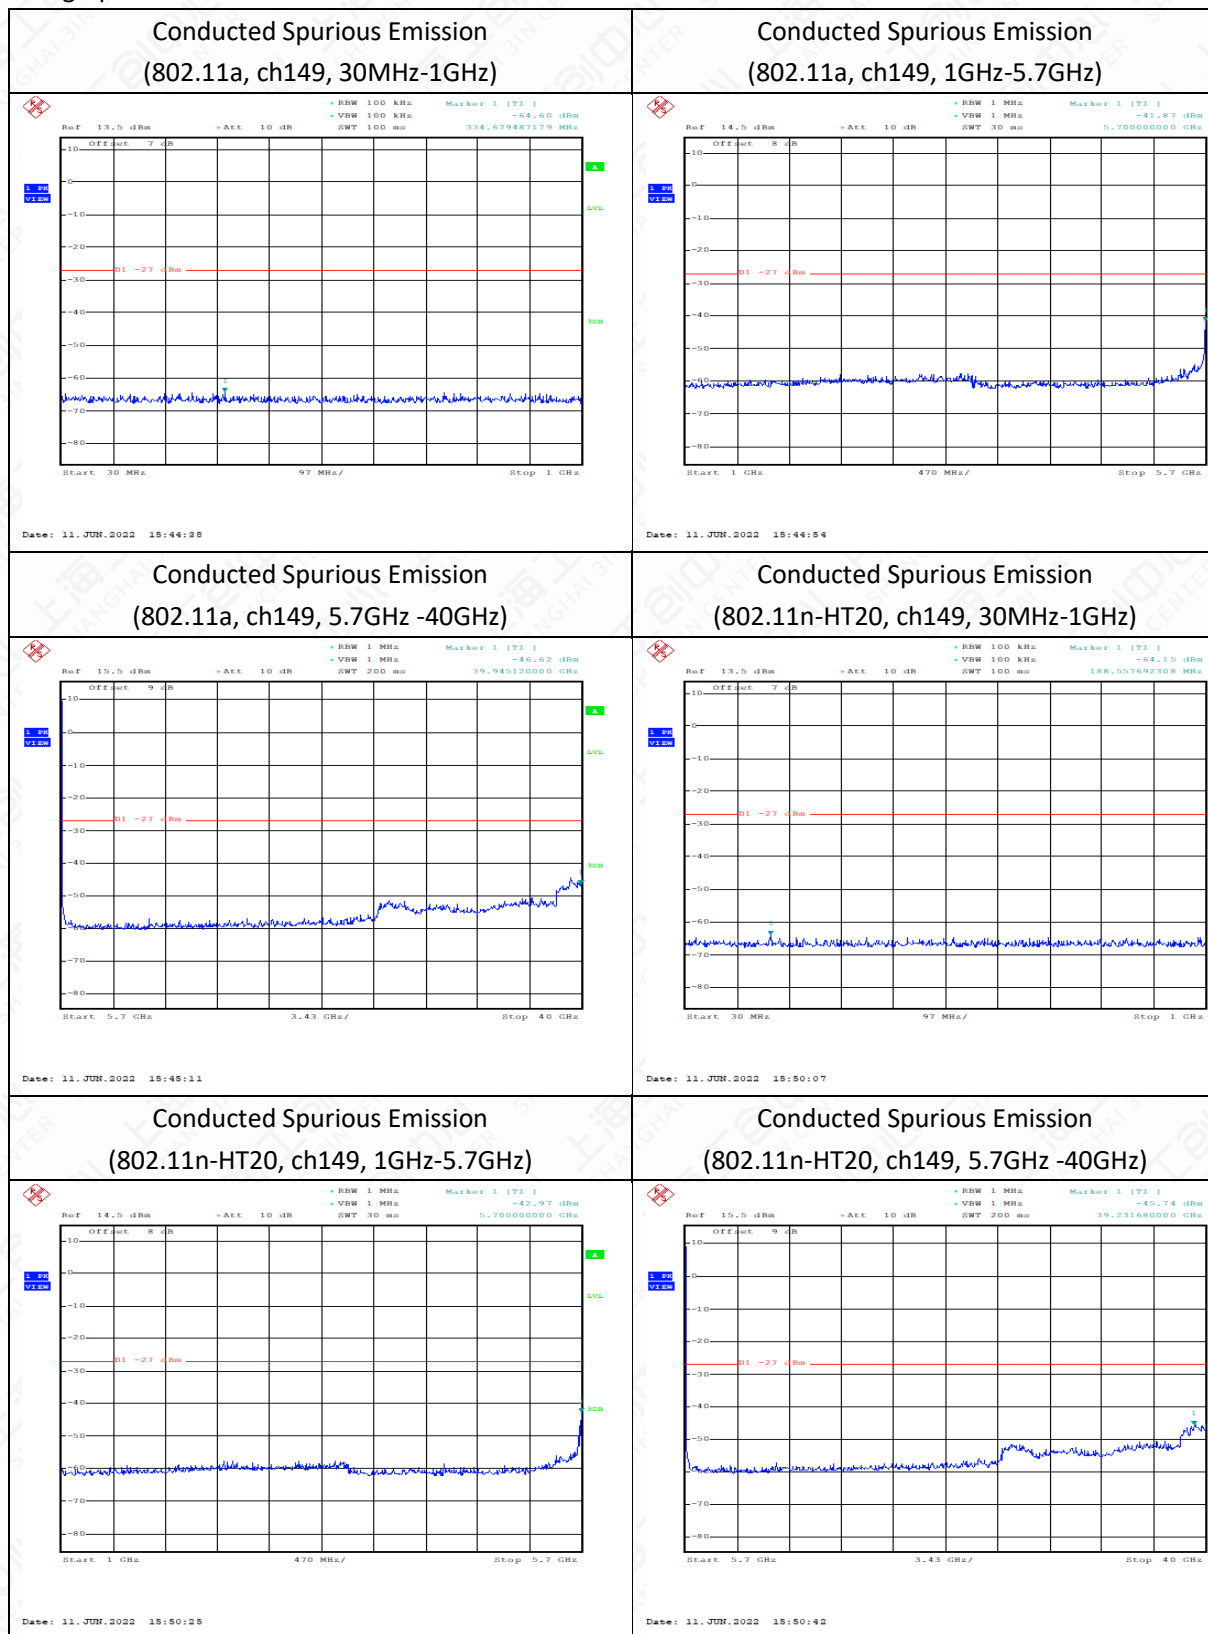

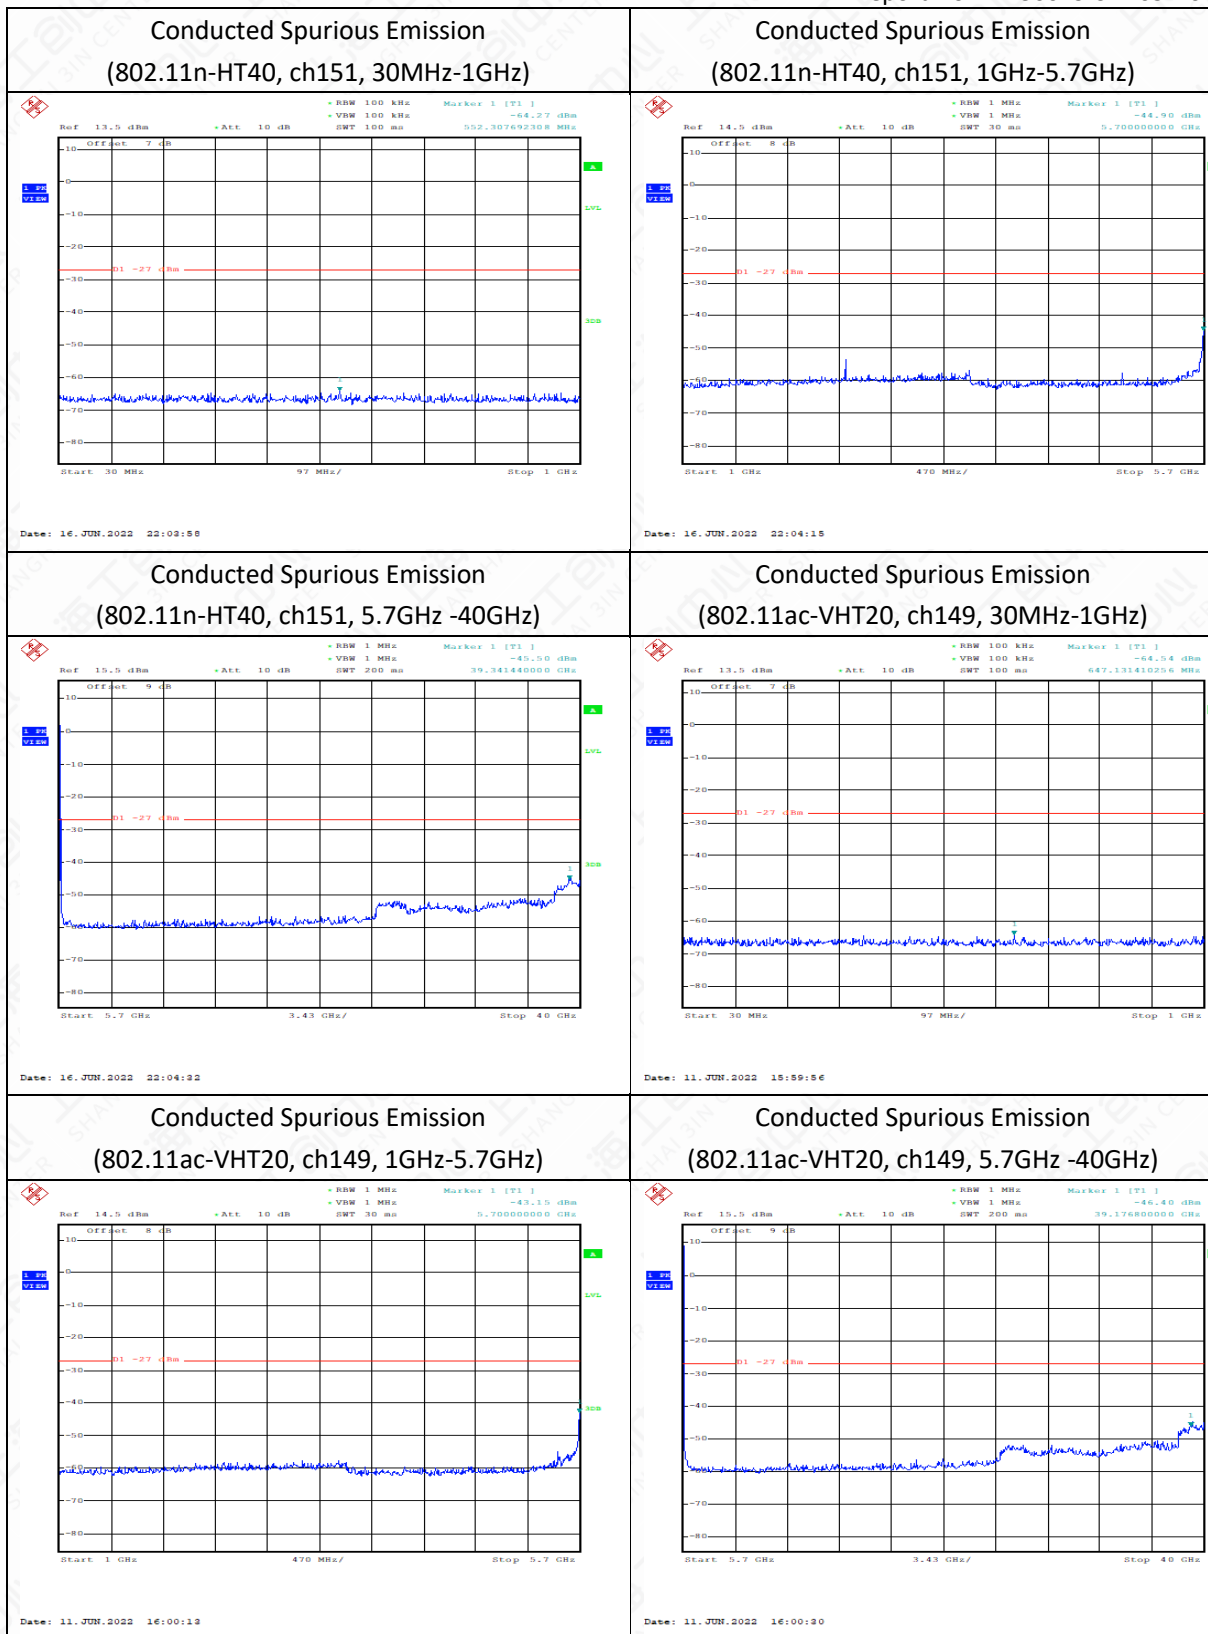

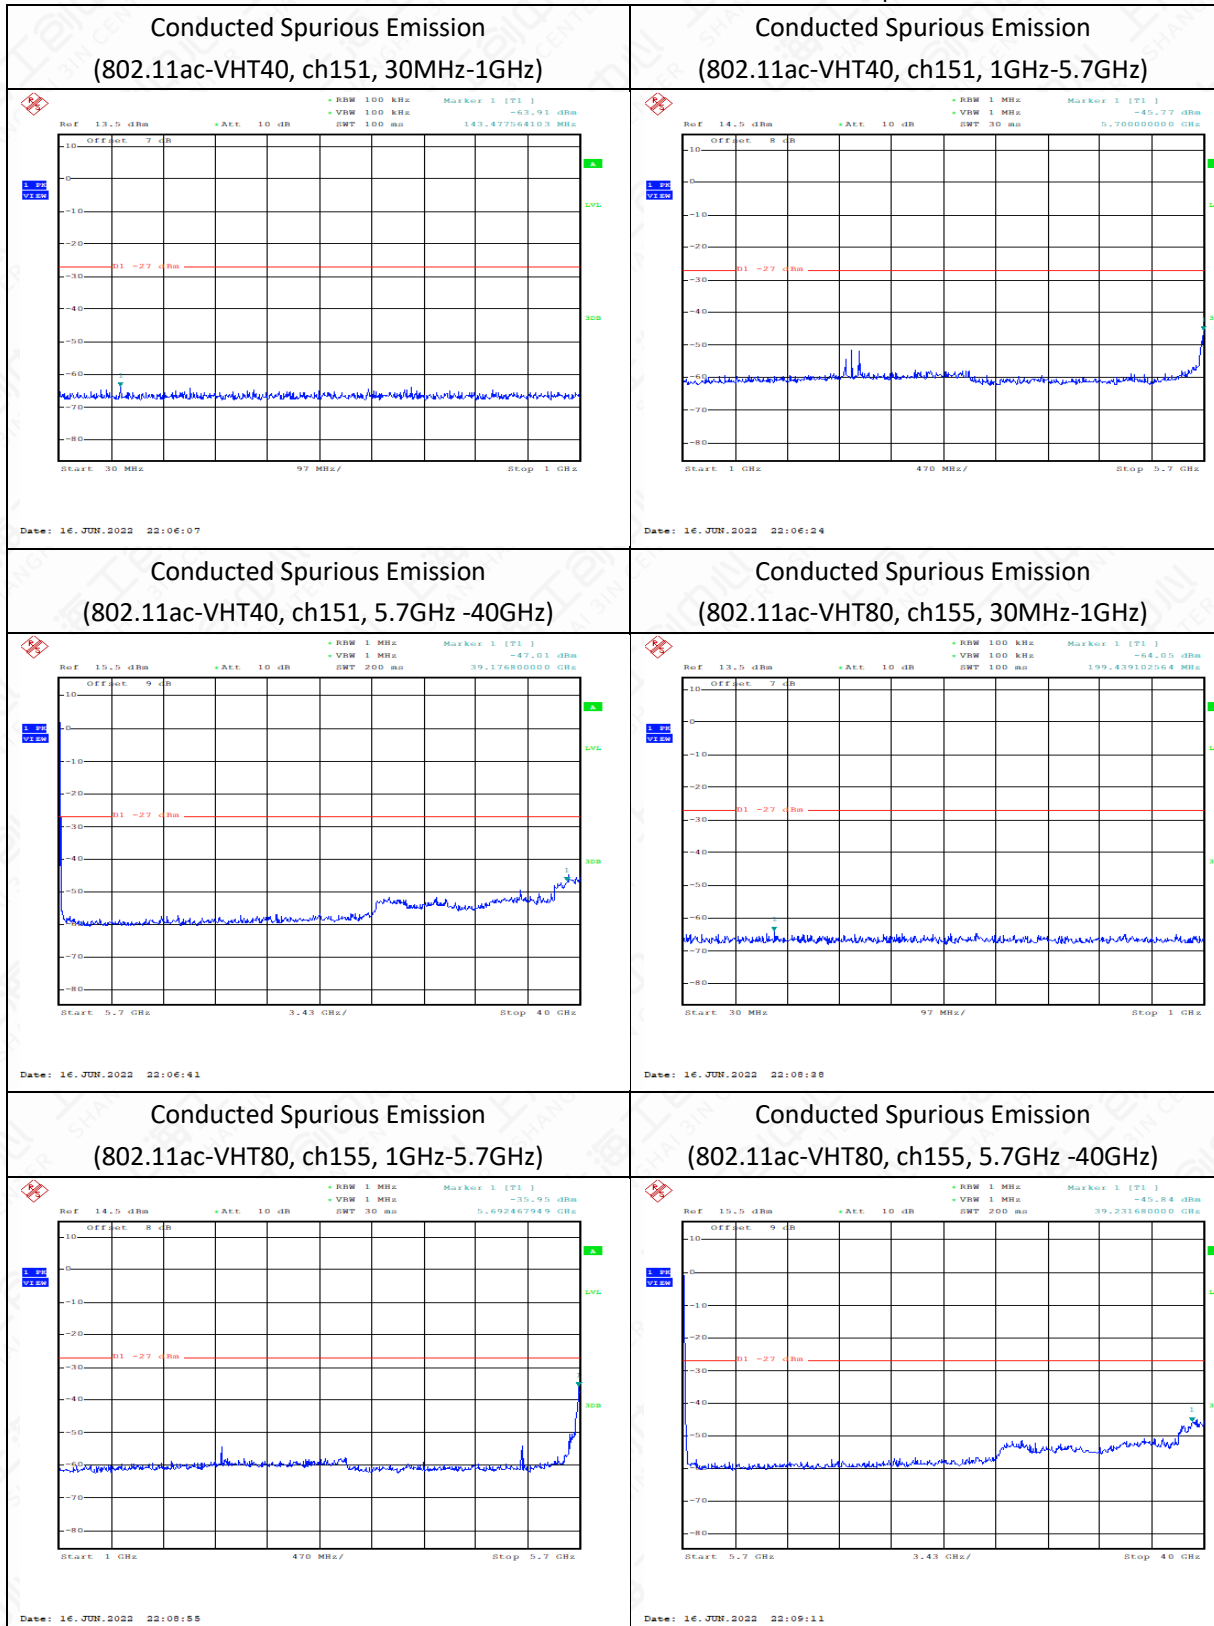

6.6.2 Transmitter Spurious Emission - Radiated

Test procedures

The measurement was applied in a semi - anechoic chamber. While testing for spurious emission higher than 1GHz, if applied, the pre - amplifier would be equipped just at the output terminal of the antenna.

Tabletop devices shall be placed on a nonconducting platform with nominal top surface dimensions 1 m by 1.5 m. For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m.

The turntable rotated 360 degrees to determine the position of the maximum emission level.

The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mast. The antenna moved up and down between from 1meter to 4 meters to find out the maximum emission level.

The EUT was tested according to KDB 789033 D02: Section G.

The radiated emission was measured using the Spectrum Analyzer with the resolutions bandwidth set as:

RBW = 300 Hz, VBW = 1 kHz (9 kHz~150 kHz);

RBW = 10 kHz, VBW = 30 kHz (150 kHz~30MHz);

RBW = 100 kHz, VBW = 300 kHz (30MHz~1GHz for PK)

RBW = 1MHz, VBW = 3MHz (>1GHz for PK);

Remark:

1. Factor= Antenna Factor + Cable Loss (- Amplifier, is employed)
2. Measured level= Original Receiver Reading + Factor
3. Margin = Limit - Measured level
4. If the PK measured level is lower than AV limit, the AV test can be elided. Modulation type and data rate tested (Only worst case result is given below):


Mainly Supply		
Mode	Data rate	Channel
802.11a	6Mbps	165(5825MHz)
802.11n-HT20	MCS0	157(5785MHz)
802.11n-HT40	MCS0	159(5795MHz)
802.11ac-HT20	MCS0	165(5825MHz)
802.11ac-HT40	MCS0	159(5795MHz)
802.11ac-HT80	MCS0	155(5775MHz)

Measurement Results


Mainly Supply			
Mode	Channel	Frequency Range	Conclusion
802.11a	165(5825MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P
		26.5 GHz~ 40 GHz	P
802.11n-HT20	157(5785MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P
		26.5 GHz~ 40 GHz	P
802.11n-HT40	159(5795MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P
		26.5 GHz~ 40 GHz	P
802.11ac-HT20	165(5825MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P
		26.5 GHz~ 40 GHz	P
802.11ac-HT40	159(5795MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P
		26.5 GHz~ 40 GHz	P
802.11ac-HT80	155(5775MHz)	30 MHz ~1 GHz	P
		1 GHz ~ 8 GHz	P
		8 GHz ~ 18 GHz	P
		18 GHz ~ 26.5 GHz	P

Test graphs as below


Below 1GHz Test Setup

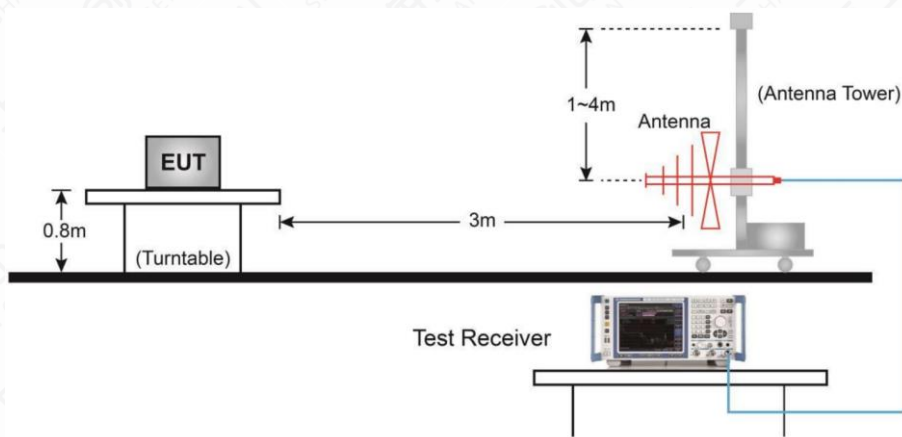


Above 1GHz Test Setup

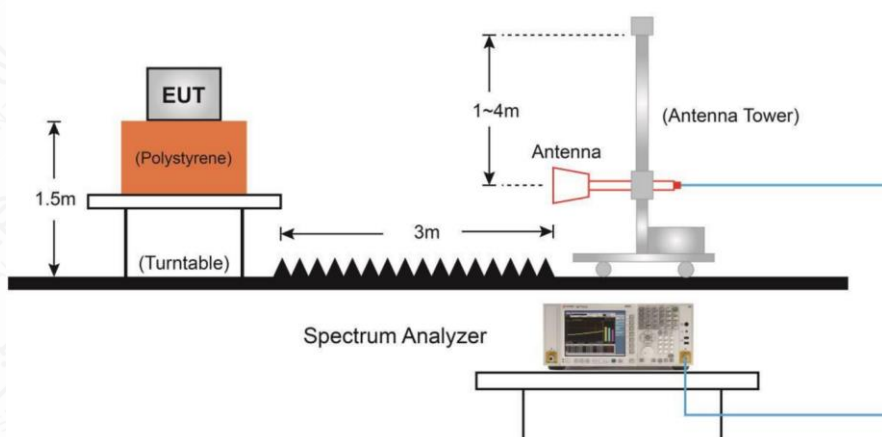


Radiated Spurious Emission
(802.11ac- VHT80, ch155, 30MHz-1GHz)

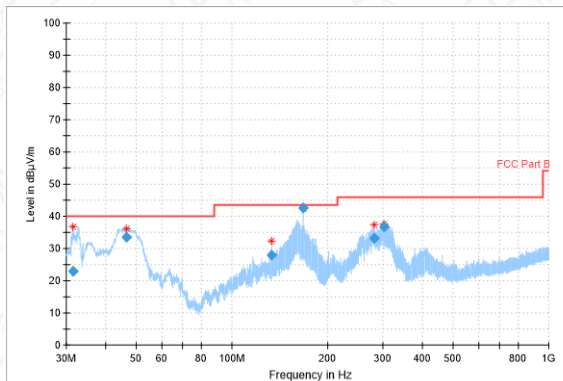

Radiated Spurious Emission
(802.11ac-VHT80, ch155, 1GHz-8GHz)

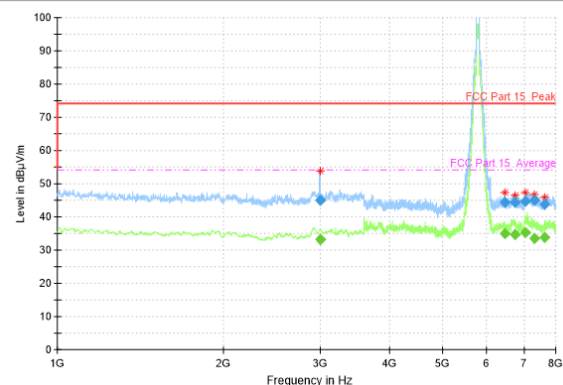

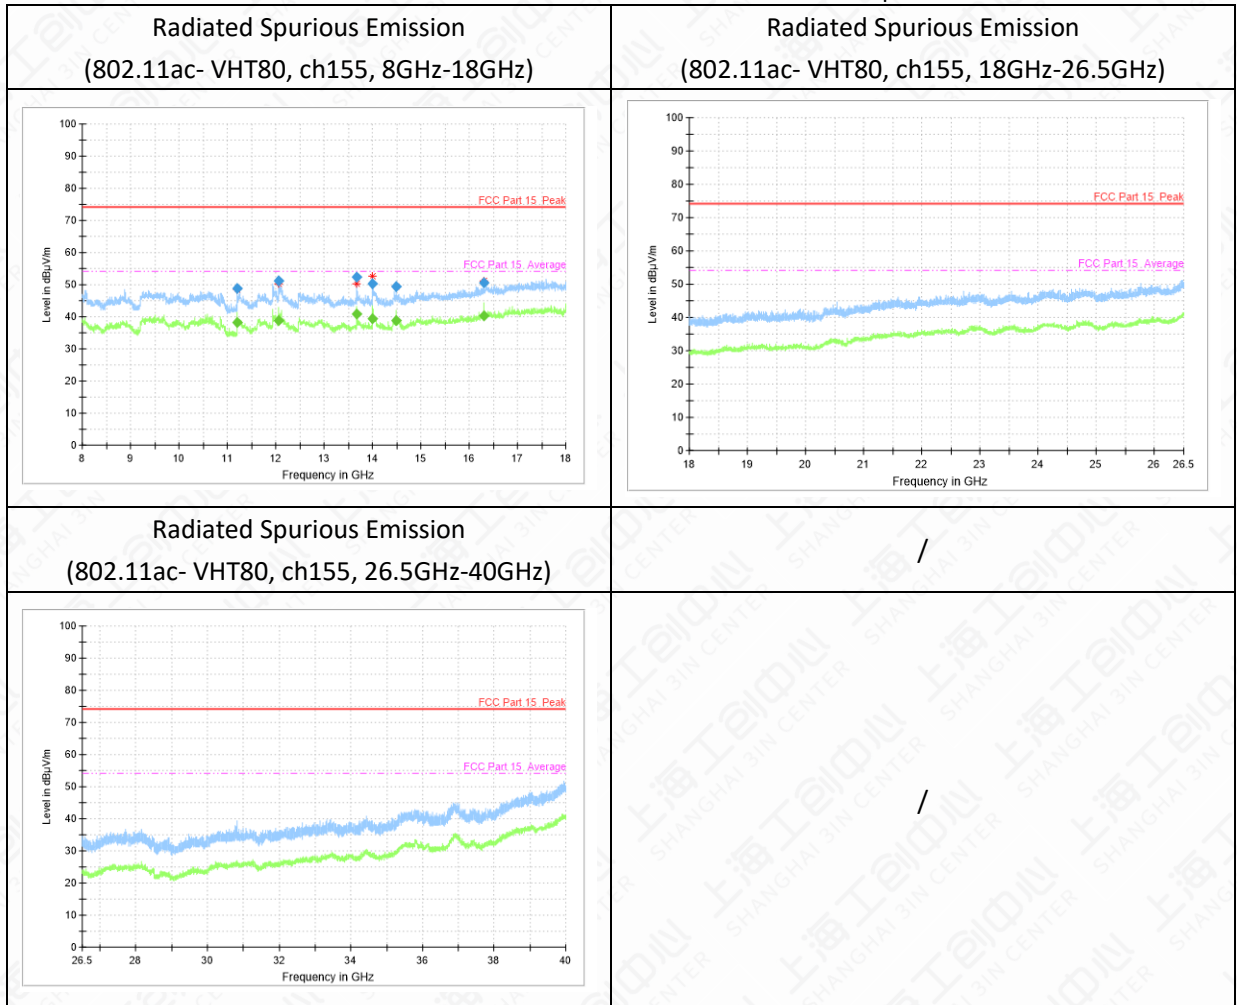

802.11ac- VHT80 mode

Channel 155 (30MHz ~ 1GHz)

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
31.5	23.08	-14.3	37.38	V
46.6	33.65	-12.2	45.85	V
133.4	27.96	-16.4	44.36	H
168.0	42.71	-15.3	58.01	H
281.5	33.35	-10.9	44.25	H
301.9	36.72	-10.8	47.52	V

Channel 155 (1GHz-8GHz)

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
2992.6	45.08	1.8	43.28	V
6462.2	44.36	2.9	41.46	H
6759.4	44.4	3.6	40.8	H
7035.8	44.64	4.4	40.24	V
7307.0	44.93	4	40.93	V
7640.2	43.92	3.5	40.42	H

Channel 155 (8GHz-18GHz)

Frequency(MHz)	Result(dBuV/m)	ARpl(dB)	PMea(dBuV/m)	Polarity
11208.4	48.9	8	40.9	V
12061.0	51.05	10.2	40.85	V
13680.6	52.21	11.6	40.61	H
14001.6	50.24	12.4	37.84	H
14486.6	49.45	12.5	36.95	V
16302.8	50.71	16.1	34.61	V

6.7 Band Edges Compliance

Band Edges - Radiated

6.7.1 Measurement Limit

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
- (5) In addition, radiated emissions which fall in the restricted bands, as defined in § 15.205(a), must also comply with the radiated emission limits specified in § 15.209(a) (see § 15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100**	3
88-216	150**	3
216-960	200**	3
Above 960	500	3

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

- (6) IC Restricted frequency bands:

MHz	MHz	GHz
0.090 - 0.110	149.9 - 150.05	9.0 - 9.2
0.495 - 0.505	156.52475 - 156.52525	9.3 - 9.5
2.1735 - 2.1905	156.7 - 156.9	10.6 - 12.7
3.020 - 3.026	162.0125 - 167.17	13.25 - 13.4
4.125 - 4.128	167.72 - 173.2	14.47 - 14.5
4.17725 - 4.17775	240 - 285	15.35 - 16.2
4.20725 - 4.20775	322 - 335.4	17.7 - 21.4

5.677 - 5.683	399.9 - 410	22.01 - 23.12
6.215 - 6.218	608 - 614	23.6 - 24.0
6.26775 - 6.26825	960 - 1427	31.2 - 31.8
6.31175 - 6.31225	1435 - 1626.5	36.43 - 36.5
8.291 - 8.294	1645.5 - 1646.5	Above 38.6
8.362 - 8.366	1660 - 1710	
8.37625 - 8.38675	1718.8 - 1722.2	
8.41425 - 8.41475	2200 - 2300	
12.29 - 12.293	2310 - 2390	
12.51975 - 12.52025	2483.5 - 2500	
12.57675 - 12.57725	2655 - 2900	
13.36 - 13.41	3260 - 3267	
16.42 - 16.423	3332 - 3339	
16.69475 - 16.69525	3345.8 - 3358	
16.80425 - 16.80475	3500 - 4400	
25.5 - 25.67	4500 - 5150	
37.5 - 38.25	5350 - 5460	
73 - 74.6	7250 - 7750	
74.8 - 75.2	8025 - 8500	
108 - 138		


6.7.2 Set the spectrum analyzer in the following

1. Sweep mode: SweepAnalyzer6db.
2. PEAK: RBW=1MHz / VBW=3MHz / Sweep=2.5ms, Sweep point;5001
3. AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=2.5ms, Sweep point;5001

Measurement Result

Mode	Channel	Conclusion
802.11a	149	P
	165	P
802.11n HT20	149	P
	165	P
802.11n HT40	151	P
	159	P
802.11ac VHT20	149	P
	165	P
802.11ac VHT40	151	P
	159	P
802.11ac VHT80	155	P

Test graphs as below:

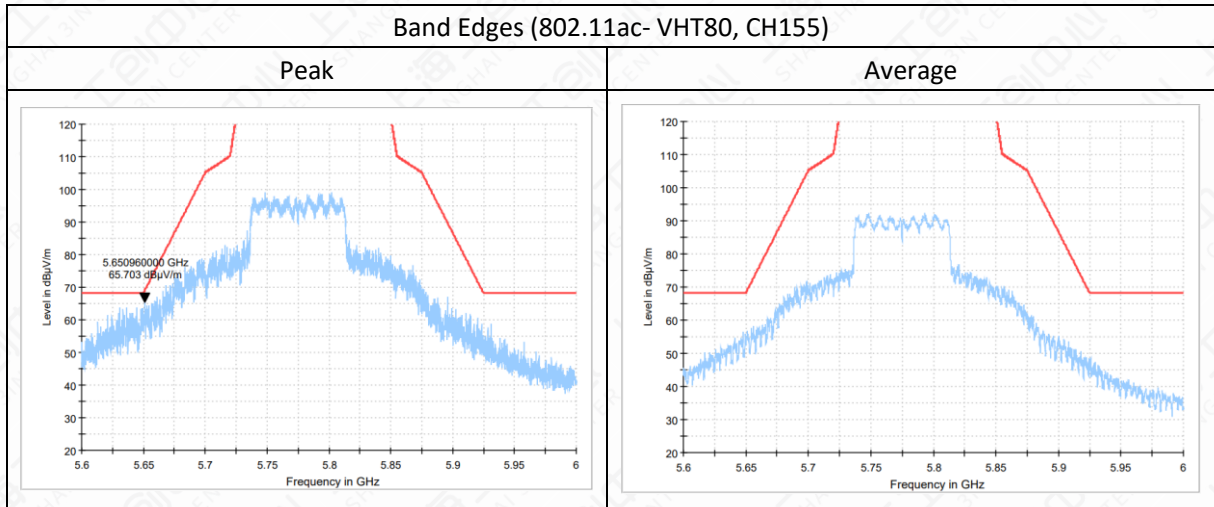


6.8 AC Powerline Conducted Emission

6.8.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.8.2 Test Setup

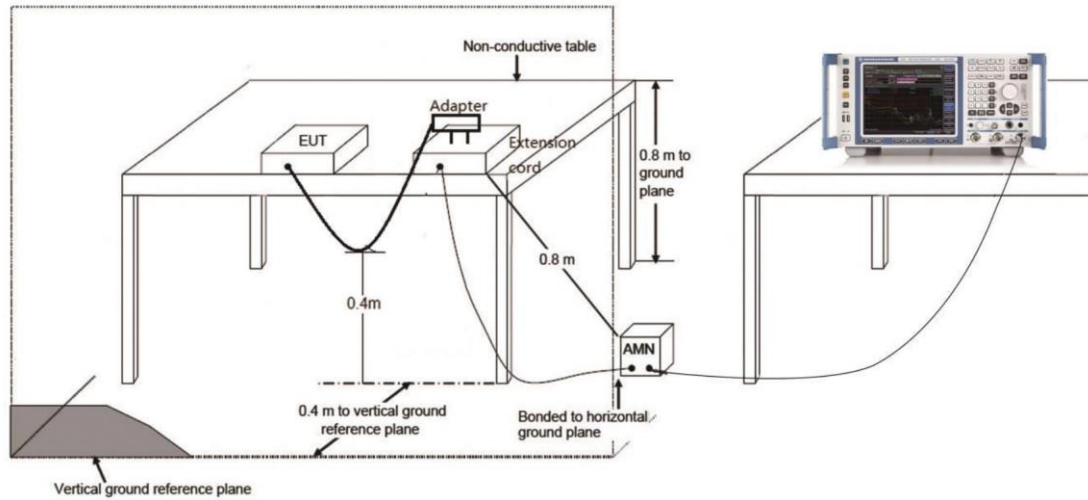

6.8.3 Test Condition


Voltage (V)	Frequency (Hz)
120	60

Measurement Result and limit

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

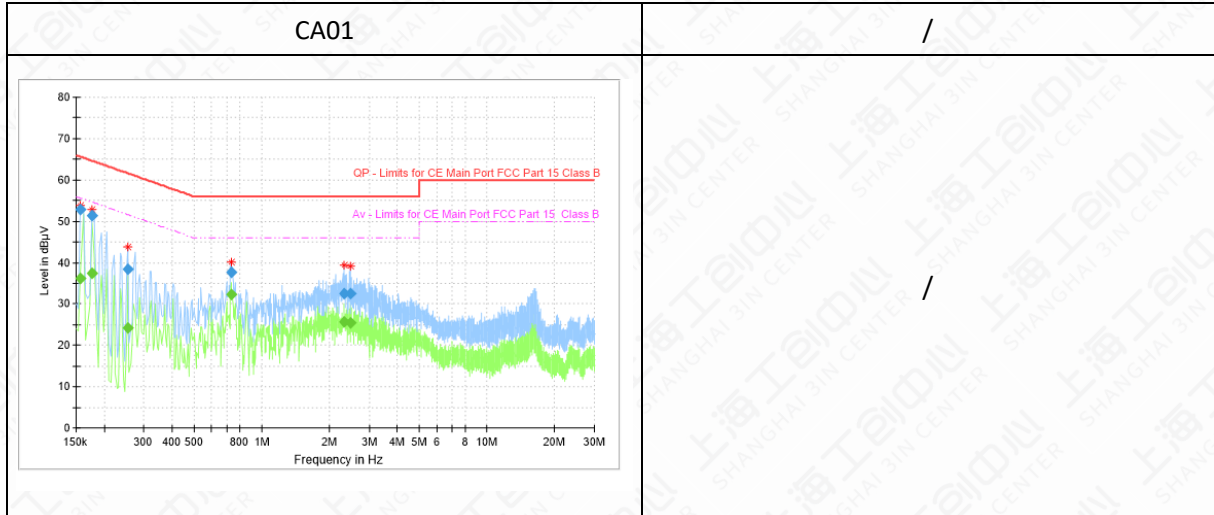

CA01

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.157463	---	36.14	55.60	19.45	15000.0	9.000	L1	ON	9.6
0.157463	52.86	---	65.60	12.74	15000.0	9.000	L1	ON	9.6
0.176119	---	37.41	54.67	17.25	15000.0	9.000	L1	ON	9.6
0.176119	51.36	---	64.67	13.30	15000.0	9.000	L1	ON	9.6
0.254475	---	24.14	51.61	27.47	15000.0	9.000	L1	ON	9.6
0.254475	38.29	---	61.61	23.32	15000.0	9.000	L1	ON	9.6
0.732075	---	32.26	46.00	13.74	15000.0	9.000	L1	ON	9.6
0.732075	37.60	---	56.00	18.40	15000.0	9.000	L1	ON	9.6
2.321588	---	25.64	46.00	20.36	15000.0	9.000	L1	ON	9.7
2.321588	32.45	---	56.00	23.55	15000.0	9.000	L1	ON	9.7
2.482031	---	25.50	46.00	20.50	15000.0	9.000	L1	ON	9.7
2.482031	32.43	---	56.00	23.57	15000.0	9.000	L1	ON	9.7

Annex A: Revised History

Version	Revised Content
V00	Initial
V01	Update the equipemnts list; Update the section 6.1 and 6.7

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

INDUSTRIAL INTERNET INNOVATION CENTER (SHANGHAI) CO., LTD.

Shanghai, People's Republic of China

for technical competence in the field of

Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 12th day of April 2021.

Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2023

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT