

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.



SRD TEST REPORT

PRODUCT	POS System
BRAND	SUNMI
MODEL	F3510
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
FCC ID	2AH25D3PRO
IC	22621-D3PRO
ISSUE DATE	March 22, 2024
STANDARD(S)	FCC Part15C, RSS-247 Issue 3, RSS-Gen Issue 5

Prepared by: Tao Lingyan

Reviewed by: Yang Fan

Approved by: Zhang Min

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.

CONTENTS

1. SUMMARY OF TEST REPORT	3
1.1 TEST STANDARD(S)	3
1.2 REFERENCE DOCUMENTS.....	3
1.3 SUMMARY OF TEST RESULTS.....	3
1.4 DATA PROVIDED BY APPLICANT.....	4
2. GENERAL INFORMATION OF THE LABORATORY	5
2.1 TESTING LABORATORY	5
2.2 LABORATORY ENVIRONMENTAL REQUIREMENTS.....	5
2.3 PROJECT INFORMATION	5
3. GENERAL INFORMATION OF THE CUSTOMER	6
3.1 APPLICANT	6
3.2 MANUFACTURER	6
4. GENERAL INFORMATION OF THE PRODUCT.....	7
4.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST	7
4.2 INTERNAL IDENTIFICATION OF AE USED DURING THE TEST.....	7
4.3 ADDITIONAL INFORMATION	7
5. TEST CONFIGURATION INFORMATION	9
5.1 LABORATORY ENVIRONMENTAL CONDITIONS.....	9
5.2 TEST EQUIPMENTS UTILIZED.....	9
5.3 MEASUREMENT UNCERTAINTY	11
6 TEST RESULTS	13
6.1 PEAK OUTPUT POWER-CONDUCTED	13
6.2 FREQUENCY BAND EDGES-CONDUCTED	16
6.3 CONDUCTED EMISSION	19
6.4 RADIATED EMISSION	24
6.5 TIME OF OCCUPANCY (DWELL TIME)	54
6.6 20DB BANDWIDTH	57
6.7 99% OCCUPIED BANDWIDTH.....	60
6.8 CARRIER FREQUENCY SEPARATION.....	63
6.9 NUMBER OF HOPPING CHANNELS	65
6.10 AC POWERLINE CONDUCTED EMISSION	67
ANNEX A: REVISED HISTORY	70
ANNEX B: ACCREDITATION CERTIFICATE.....	71

1. Summary of Test Report

1.1 Test Standard(s)

No.	Test Standard	Title	Version
1	FCC Part15C	FCC CFR 47, Part 15, Subpart C: 15.205 Restricted bands of operation; 15.209 Radiated emission limits, general requirements; 15.247 Operation within the bands 902-928MHz, 2400-2483.5MHz, and 5725-5850MHz.	--
2	RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices	2023
3	RSS-Gen Issue 5	General Requirements for Compliance of Radio Apparatus	2021

1.2 Reference Documents

No.	Test Standard	Title	Version
1	ANSI C63.10	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices	2013
2	KDB 558074 D01 15.247 Meas Guidance v05r02	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum systems (DSS) Operating Under §15.247	--

Note: KDB 558074 D01 15.247 Meas Guidance v05r02 is not A2LA certified.

1.3 Summary of Test Results

No.	Measurement Items	FCC Rules	IC Rules	Verdict
1	Maximum Peak Output Power	15.247(b)	RSS-247 5.4	Pass
2	20dB Occupied Bandwidth	15.247(a)	RSS-247 5.1	Pass
3	99% Occupied Bandwidth	N/A	RSS-GEN 6.7	Pass
4	Band Edges Compliance	15.247 (d)	RSS-247 5.5	Pass
5	Time Of Occupancy (Dwell Time)	15.247(a)	RSS-247 5.1	Pass
6	Carrier Frequency Separation	15.247(a)	RSS-247 5.1	Pass
7	Number Of Hopping Channels	15.247(a)	RSS-247 5.1	Pass
8	Transmitter Spurious Emission-Conducted	15.247(d)	RSS-247 5.5	Pass
9	Transmitter Spurious Emission-Radiated	15.247,15.209,15.205	RSS-GEN 8.9, 8.10	Pass
10	AC Powerline Conducted Emission	15.207	RSS-GEN 8.8	Pass
11	Antenna requirement	15.203/15.247(c)	RSS Gen 6.8, RSS-247 5.4	Pass ^{Note 2}

Note 1:

The F3510 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a new product for testing. There are two configurations S02aa (Mainly Supply) & S11aa (Secondary Supply) in this project. We mainly tested the S02aa (Mainly Supply), and S11aa (Secondary Supply) tested the worst mode of the main supply, and recorded the test results of the worst mode respectively in the report. The description of the differences between S02aa (Mainly Supply) & S11aa (Secondary Supply) are as follows:

EUT ID	FCC ID number	IC number	HVIN	Fingerprint
S02aa (Mainly Supply)	2AH25D3PRO	22621-D3PRO	F3510	Yes
S11aa (Secondary Supply)			F3510A	N/A

Industrial Internet Innovation Center (Shanghai) Co., Ltd. only performed test cases which identified with Pass/Fail/Inc result in section 1.3.

Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

Note 2:

Bluetooth used a FPC antenna with max Gain 1.70dBi that complied with 15.203 Requirements.

Note:

- All the test data for each data were verified, but only the worst case was reported.
- The GFSK, $\pi/4$ DQPSK and 8DPSK were set in DH5 for GFSK, 2-DH5 for $\pi/4$ DQPSK, 3-DH5 for 8DPSK.

1.4 Data Provided by Applicant

No.	Item(s)	Data
1	Antenna gain of EUT	1.70 dBi

Note: The data of antenna gain is provided by the Antenna specification may affect the validity of the test results in this report, and the impact and consequences of this shall be undertaken by the customer.

2. General Information of The Laboratory

2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364
IC Designation No.	10766A
CAB identifier	CN0067

2.2 Laboratory Environmental Requirements

Temperature	15°C~35°C
Relative Humidity	25%RH~75%RH
Atmospheric Pressure	86kPa~106kPa

2.3 Project Information

Project Manager	Gao Hongning
Test Date	January 31, 2024 to March 21, 2024

3. General Information of The Customer

3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Telephone	+86 17302160204

3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Telephone	+86 17302160204

4. General Information of The Product

4.1 Product Description for Equipment under Test

Product Name	POS System
Model name	F3510
Date of Receipt	S05aa/S02aa:January 31,2024 S09aa:February 21,2024 S11aa:February 22,2024
EUT ID*	S05aa/S09aa/S02aa/S11aa
SN/IMEI	S05aa: DP02D41R10015 S09aa: DP02D41R10035 S02aa: DP02D41R10008 S11aa:DP01D41N10086
Supported Radio Technology and Bands	BT 5.0 BR/EDR/BLE WLAN 802.11b,g,n WLAN 802.11a,n,ac
Hardware Version	SD03_MB V1.1
Software Version	1.0.0
FCC ID	2AH25D3PRO
IC	22621-D3PRO
NOTE1: EUT ID is the internal identification code of the laboratory. NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.	

4.2 Internal Identification of AE used during the test

AE ID*	Description	Model	SN/Remark
CA02	Adapter	CYZS36-240150	Jiangsu Chenyang Electron Co., Ltd. 24V,1.5A
UA02	AC Cable	N/A	N/A
NOTE: *AE ID is the internal identification code of the laboratory.			

4.3 Additional Information

Bluetooth Frequency	2402MHz-2480MHz
Bluetooth Channel	Ch0-78
Bluetooth Modulation	GFSK; $\pi/4$ DQPSK; 8DPSK

Test frequency list:

GFSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480
$\pi/4$ DQPSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480
8DPSK	Channel	0	39	78
	Freq. (MHz)	2402	2441	2480

Note: This report is for BT only.

5. Test Configuration Information

5.1 Laboratory Environmental Conditions

5.1.1 Permanent Facilities

Relative Humidity	Min. = 45 %, Max. = 55 %		
Atmospheric Pressure	101kPa		
Temperature	Normal	Minimum	Maximum
	25°C	-10°C	40°C
Working Voltage of EUT	Normal	Minimum	Maximum
	24V	22.8V	25.2V

5.2 Test Equipments Utilized

5.2.1 Conducted Test System

No.	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Test Software	TS1120	10727	V3.2.22	N/A	Tonscend	N/A	N/A
2	Automatic control unit	JS0806-2	2218060623	N/A	N/A	Tonscend	2023-05-06	1 Year
3	Wireless communication comprehensive tester	CMW500	164865	V3.8.12	N/A	R&S	2023-07-26	1 Year
4	Spectrum Analyzer	FSQ40	200063	V4.75	N/A	R&S	2023-10-16	1 Year
5	Analog Signal Generator	SMF	104770	V3.0.13.0-2.20.530.15.4	N/A	R&S	2023-10-16	1 year
6	Vector Signal Generator	SMCV100B	103691	V5.00.122.24	N/A	R&S	2023-07-27	1 Year
7	Programmable Power Supply	Keithley 2303	4039070	N/A	N/A	Keithley	2023-06-23	1 Year
8	Temperature box	B-TF-107C	BTF107C-201804107	N/A	N/A	Boyi	2023-06-28	1 Year
9	Network test unit AP	GT-AXE11000	N2IG0X401637KWF	V3.0.0.4.386_45940	N/A	ASUS	N/A	N/A
10	Vector Signal Generator	SMBV100A	257904	V4.15.125.49	N/A	R&S	2023-10-16	1 Year

5.2.2 Radiated Emission Test System

No	Name	Model	S/N	SW Version	HW Version	Manufacturer	Cal. Date	Cal. Interval
1	Universal Radio Communication Tester	CMU200	123126	V5.2.1	B12	R&S	2023-10-16	1 Year
2	Universal Radio Communication Tester	CMW500	104178	V3.7.20	1206.0600.00	R&S	2023-10-16	1 Year
3	EMI Test Receiver	ESU40	100307	V5.1-24-3	01	R&S	2023-12-19	1 Year
4	TRILOG Broadband Antenna	VULB9163	01345	N/A	N/A	Schwarzbeck	2023-03-23	1 Year
5	Double-ridged Waveguide Antenna	ETS-3117	00135890	N/A	N/A	ETS	2022-03-09	2 Years
6	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
7	Horn Antenna	3160-09	LM6321	N/A	N/A	R&S	2023-07-16	1 Year
8	Horn Antenna	3160-10	LM5942	N/A	N/A	R&S	2023-07-16	1 Year
9	Loop Antenna	AL-130R	121083	N/A	N/A	COM-POWER	2023-9-13	1 Year
10	Preamplifier	SCU08F1	8320024	N/A	N/A	R&S	2023-10-16	1 Year
11	Preamplifier	SCU18	10155	N/A	N/A	R&S	2023-10-16	1 Year
12	Preamplifier	SCU26	10025	N/A	N/A	R&S	2023-10-16	1 Year
13	Preamplifier	SCU40	10020	N/A	N/A	R&S	2023-10-16	1 Year
14	2-Line V-Network	ENV216	101380	N/A	N/A	R&S	2023-12-19	1 Year
15	EMI Test Software	EMC32 V10.35.02	N/A	N/A	N/A	R&S	N/A	N/A
16	Test Receiver	ESCI	101235	V5.1-24-3	0	R&S	2023-12-19	1 Year

Note: After 2024-3-9, the Double-ridged Waveguide Antenna of this device is not used for radiation testing.

5.2.3 Test Environment

Shielding Room1 (6.0 meters×3.0 meters×2.7 meters) did not exceed following limits along the conducted RF performance testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 20 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Ground system resistance	< 0.5 Ω
Temperature	Min. = 15 °C, Max. = 35 °C

Control room did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 30 %, Max. = 60 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω

Fully-anechoic chamber1 (9.8 meters×6.7 meters×6.7 meters) did not exceed following limits along the EMC testing:

Temperature	Min. = 15 °C, Max. = 35 °C
Relative humidity	Min. = 25 %, Max. = 75 %
Shielding effectiveness	> 100 dB
Electrical insulation	> 10 kΩ
Ground system resistance	< 0.5 Ω
VSWR	Between 0 and 6 dB, from 1GHz to 18GHz
Site Attenuation Deviation	Between -4 and 4 dB, 30MHz to 1GHz

5.3 Measurement Uncertainty

Measurement Uncertainty of Conduction test

Measurement Items	Range	Confidence Level	Calculated Uncertainty
20dB Emission Bandwidth	2400–2483.5MHz	95%	±1.9%
Carrier Frequency Separation	2400–2483.5MHz	95%	±1.9%
Maximum Power Spectral Density Level	2400–2483.5MHz	95%	±0.98 dB
Number of Hopping Channel	2400–2483.5MHz	95%	±1.9%
Time of Occupancy	2400–2483.5MHz	95%	±0.11%

Max Peak Conducted Output Power	2400–2483.5MHz	95%	±0.98 dB
Band-edge Spurious Emission	2400–2483.5MHz	95%	±1.21dB
Conducted RF Spurious Emission	9kHz-40GHz	95%	9kHz-7GHz:±1.21dB 7GHz-40GHz: ±3.31dB

Measurement Uncertainty of Radiation test

Measurement Items	Uncertainty(dB)
Radiated Emission 30MHz-1000MHz	±5.10
Radiated Emission 1000MHz-18000MHz	±5.66
Radiated Emission 18000MHz-40000MHz	±5.22
AC Powerline Conducted Emission	±4.38

Note: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

6 Test Results

6.1 Peak Output Power-Conducted

6.1.1 Measurement Limit

Standard	Conducted Limit (dBm)	EIRP Limit(dBm)
FCC 47 Part 15.247(b)	GFSK:≤30, pi/4-DQPSK and 8DPSK≤20.97	N/A
RSS-247 5.4(b)	GFSK:≤30, pi/4-DQPSK and 8DPSK≤20.97	≤36

6.1.2 Test Condition


Hopping Mode	RBW	VBW	Span	Sweeptime
Hopping OFF	3MHz	10MHz	9MHz	Auto

6.1.3 Test Procedure

The measurement is according to ANSI C63.10 clause 7.8.5.

1. The output power of EUT was connected to the spectrum analyzer by cable and divide. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Use the following spectrum analyzer settings:
 - a) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - b) RBW > 20 dB bandwidth of the emission being measured.
 - c) VBW ≥ RBW.
 - d) Sweep: Auto.
 - e) Detector function: Peak.
 - f) Trace: Max hold.
4. Allow trace to stabilize.
5. Use the marker-to-peak function to set the marker to the peak of the emission.
6. The indicated level is the peak output power, after any corrections for external attenuators and cables.
7. Record the results.

6.1.4 Test setup

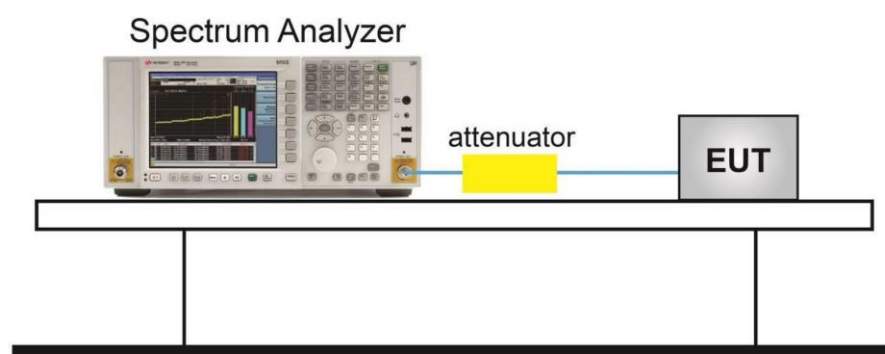



6.1.5 Measurement Results

Test Mode	Antenna	Frequency [MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP [dBm]	Verdict
DH5	Ant1	2402	12.58	≤30	14.28	PASS
DH5	Ant1	2441	12.34	≤30	14.04	PASS
DH5	Ant1	2480	12.27	≤30	13.97	PASS
2DH5	Ant1	2402	10.61	≤20.97	12.31	PASS
2DH5	Ant1	2441	10.50	≤20.97	12.2	PASS
2DH5	Ant1	2480	11.44	≤20.97	13.14	PASS
3DH5	Ant1	2402	11.01	≤20.97	12.71	PASS
3DH5	Ant1	2441	10.95	≤20.97	12.65	PASS
3DH5	Ant1	2480	11.85	≤20.97	13.55	PASS

Note: Bold font is the maximum Value

Test Graphs

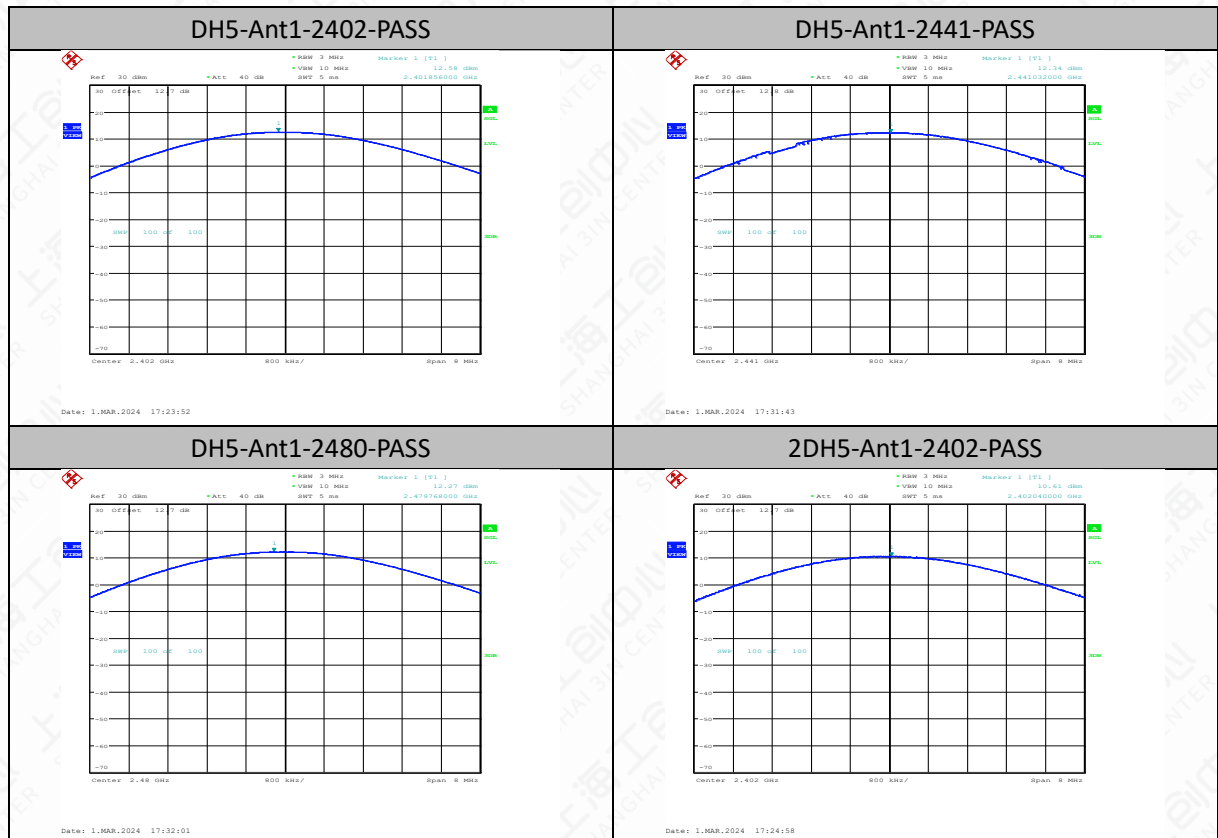

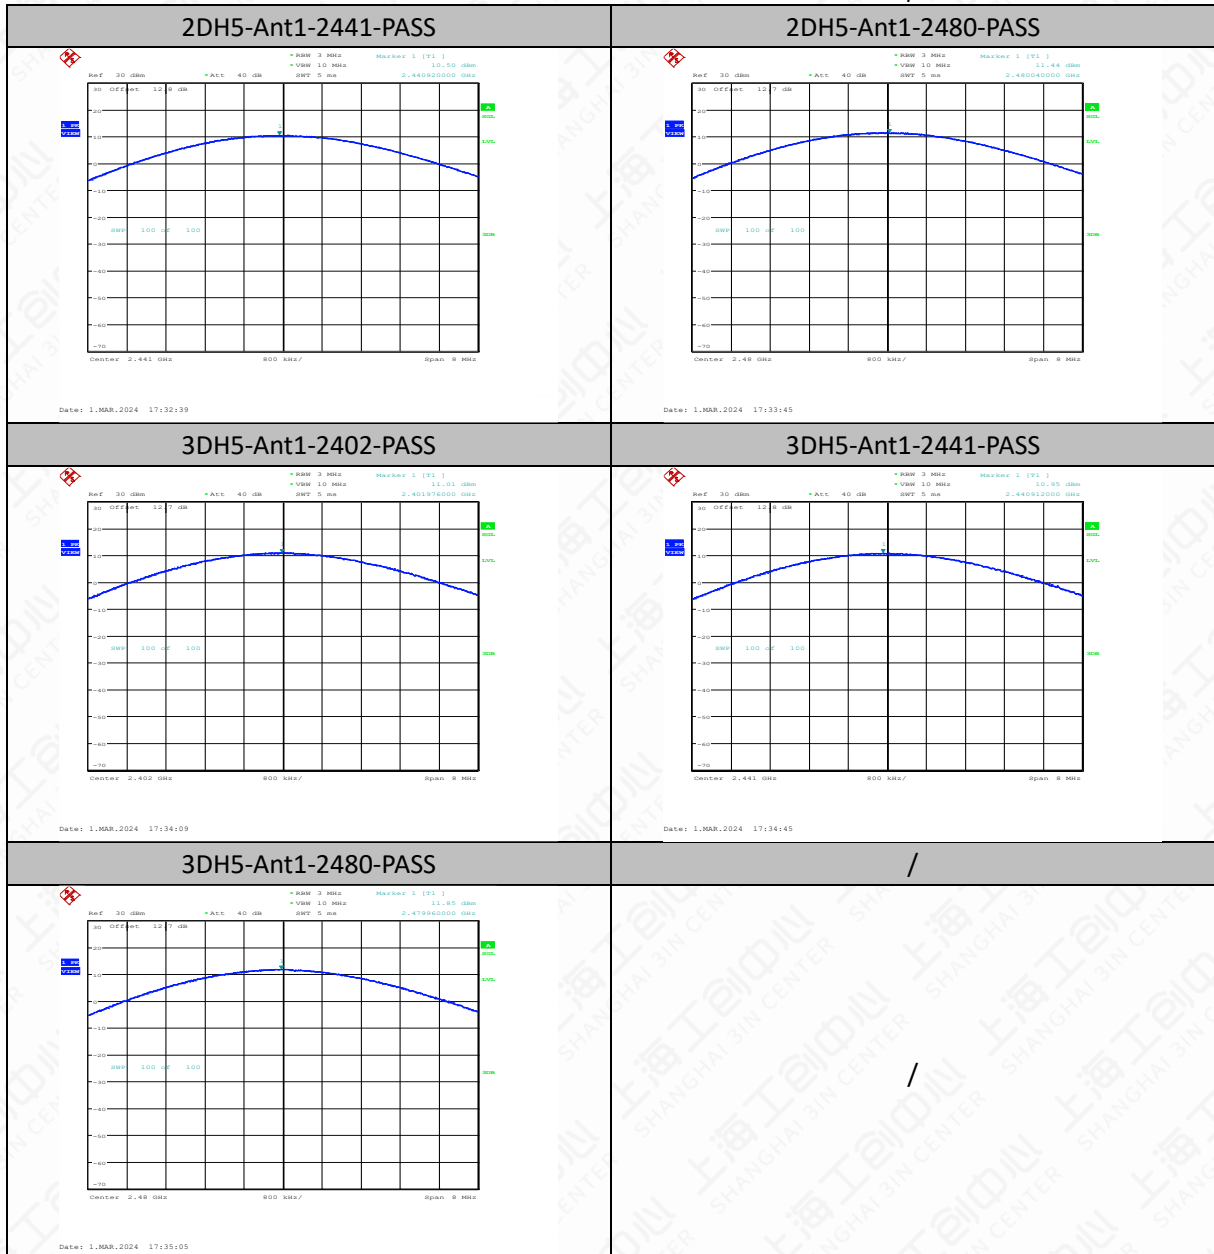

6.2 Frequency Band Edges-Conducted

6.2.1 Measurement Limit


Standard	Limit(dBc)
FCC 47 CFR Part 15.247(d)	>20
RSS-247 5.5	>20

6.2.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.6.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz, span more than 1.5 times channel bandwidth (2MHz).
3. Detector =peak, sweep time=auto couple, trace mode=max hold.Allow sweep to continue until the trace stabilizes.


6.2.3 Test setup

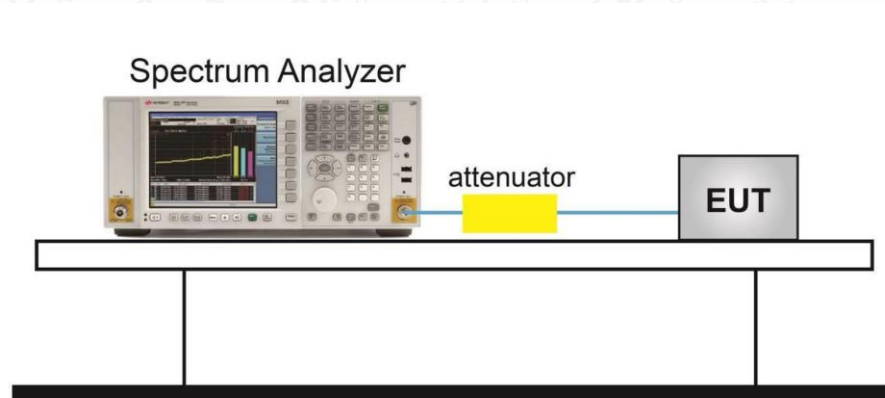


6.2.4 Measurement Result

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	Low	2402	5.15	-44.73	≤-14.85	PASS
DH5	Ant1	High	2480	3.84	-44.75	≤-16.16	PASS
DH5	Ant1	Low	Hop_2402	11.64	-41.83	≤-8.36	PASS
DH5	Ant1	High	Hop_2480	12.28	-42.5	≤-7.72	PASS
2DH5	Ant1	Low	2402	2.49	-44.38	≤-17.51	PASS
2DH5	Ant1	High	2480	0.45	-43.91	≤-19.55	PASS
2DH5	Ant1	Low	Hop_2402	6.71	-42.42	≤-13.29	PASS
2DH5	Ant1	High	Hop_2480	9.28	-41.64	≤-10.72	PASS
3DH5	Ant1	Low	2402	0.68	-44.34	≤-19.32	PASS
3DH5	Ant1	High	2480	-2.79	-44.94	≤-22.79	PASS
3DH5	Ant1	Low	Hop_2402	9.46	-42.04	≤-10.54	PASS
3DH5	Ant1	High	Hop_2480	10.31	-42.26	≤-9.69	PASS

Test Graphs

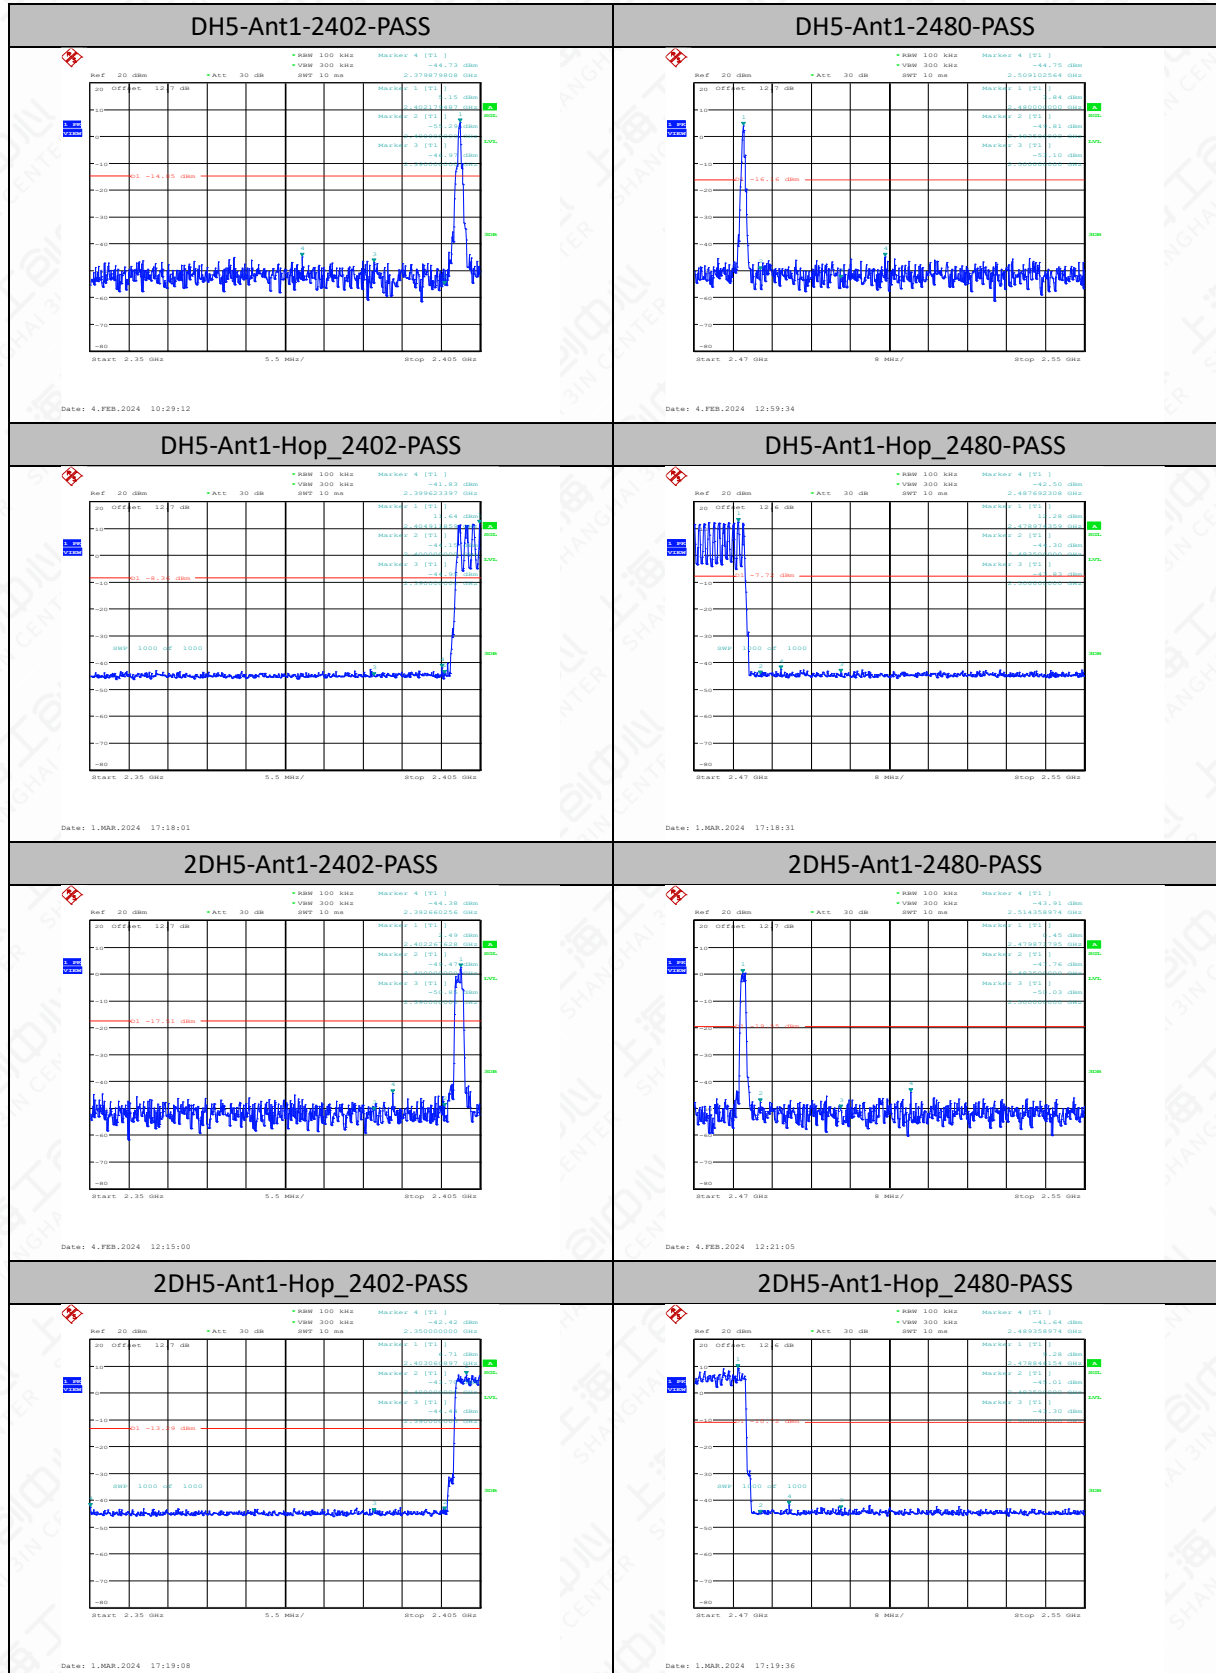

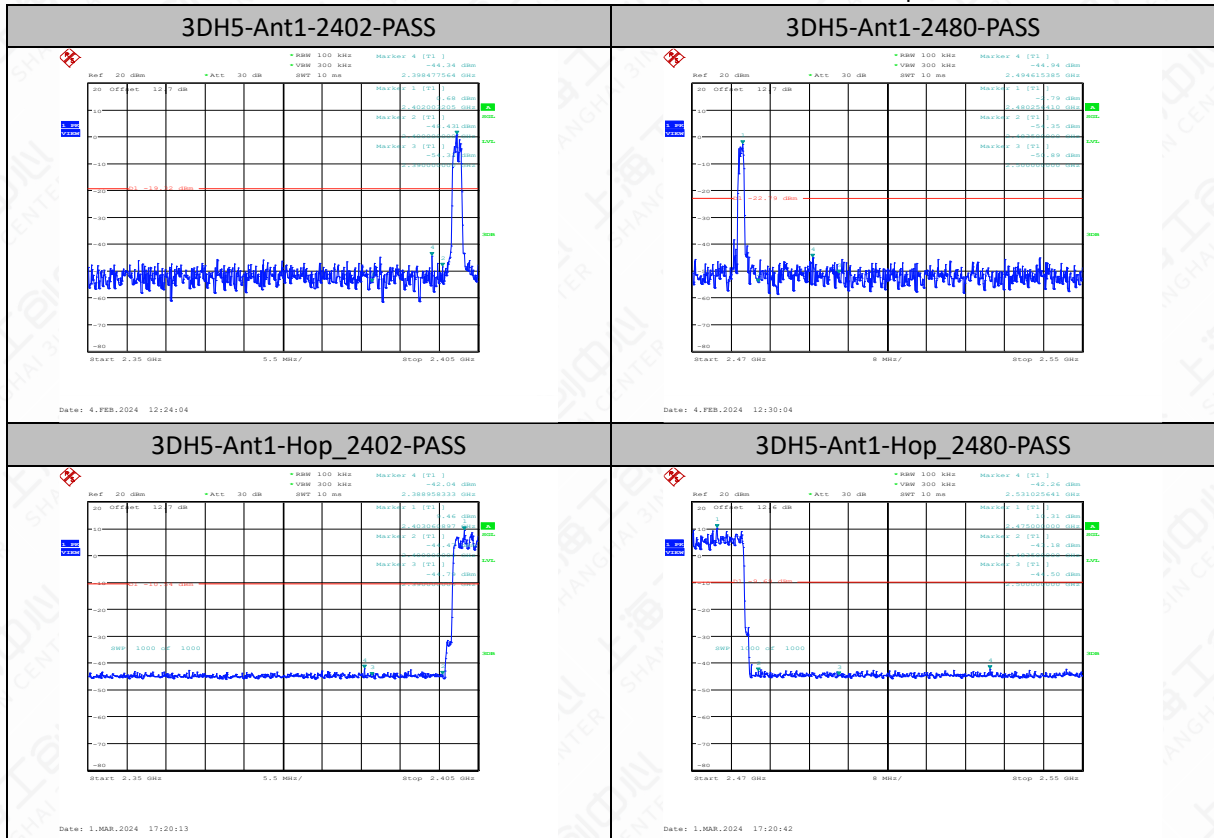

6.3 Conducted Emission

6.3.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part15.247 (d)	20dB below peak output power in 100kHz bandwidth
RSS-247 5.5	20dB below peak output power in 100kHz bandwidth

6.3.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.8.

1. Connect the EUT to spectrum analyzer.
2. Set RBW=100KHz, VBW=300KHz.
3. Detector =peak, sweep time=auto couple, trace mode=max hold

6.3.3 Test Setup

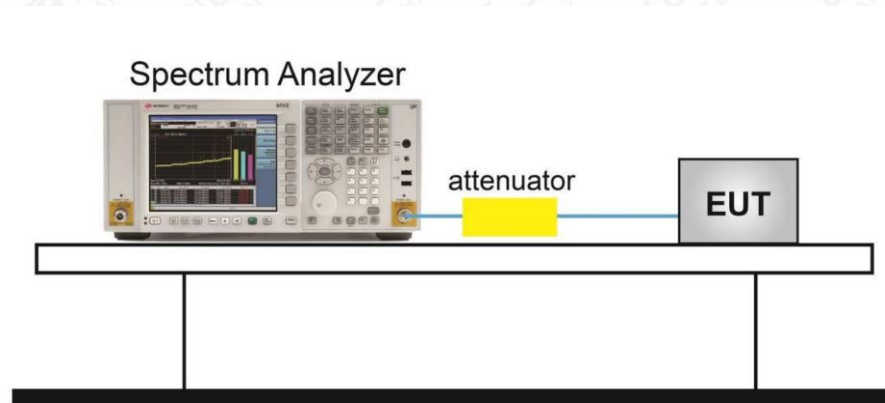



6.3.4 Measurement Results


TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
DH5	Ant1	2402	0~Reference	5.68	5.68	---	PASS
DH5	Ant1	2402	30~1000	5.68	-53.01	≤-14.32	PASS
DH5	Ant1	2402	1000~26500	5.68	-50.83	≤-14.32	PASS
DH5	Ant1	2441	0~Reference	5.34	5.34	---	PASS
DH5	Ant1	2441	30~1000	5.34	-52.87	≤-14.66	PASS
DH5	Ant1	2441	1000~26500	5.34	-50.87	≤-14.66	PASS
DH5	Ant1	2480	0~Reference	5.25	5.25	---	PASS
DH5	Ant1	2480	30~1000	5.25	-53.66	≤-14.75	PASS
DH5	Ant1	2480	1000~26500	5.25	-51.16	≤-14.75	PASS
2DH5	Ant1	2402	0~Reference	5.17	5.17	---	PASS
2DH5	Ant1	2402	30~1000	5.17	-53.37	≤-14.83	PASS
2DH5	Ant1	2402	1000~26500	5.17	-50.73	≤-14.83	PASS
2DH5	Ant1	2441	0~Reference	5.67	5.67	---	PASS
2DH5	Ant1	2441	30~1000	5.67	-53.84	≤-14.33	PASS


2DH5	Ant1	2441	1000~26500	5.67	-50.86	≤ -14.33	PASS
2DH5	Ant1	2480	0~Reference	4.69	4.69	---	PASS
2DH5	Ant1	2480	30~1000	4.69	-53.68	≤ -15.31	PASS
2DH5	Ant1	2480	1000~26500	4.69	-50.81	≤ -15.31	PASS
3DH5	Ant1	2402	0~Reference	5.40	5.40	---	PASS
3DH5	Ant1	2402	30~1000	5.40	-53.22	≤ -14.6	PASS
3DH5	Ant1	2402	1000~26500	5.40	-51.06	≤ -14.6	PASS
3DH5	Ant1	2441	0~Reference	5.54	5.54	---	PASS
3DH5	Ant1	2441	30~1000	5.54	-53.24	≤ -14.46	PASS
3DH5	Ant1	2441	1000~26500	5.54	-51.03	≤ -14.46	PASS
3DH5	Ant1	2480	0~Reference	5.57	5.57	---	PASS
3DH5	Ant1	2480	30~1000	5.57	-53.51	≤ -14.43	PASS
3DH5	Ant1	2480	1000~26500	5.57	-50.59	≤ -14.43	PASS

Test Graphs

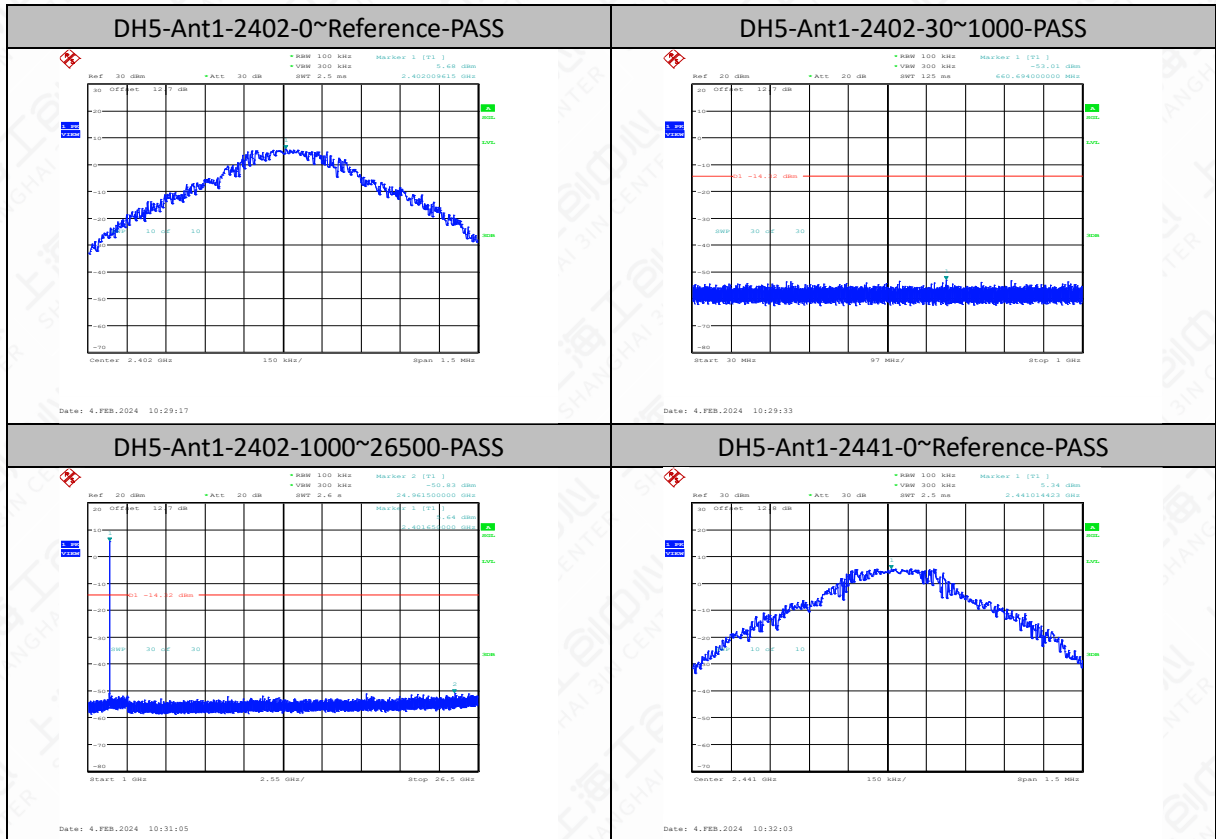

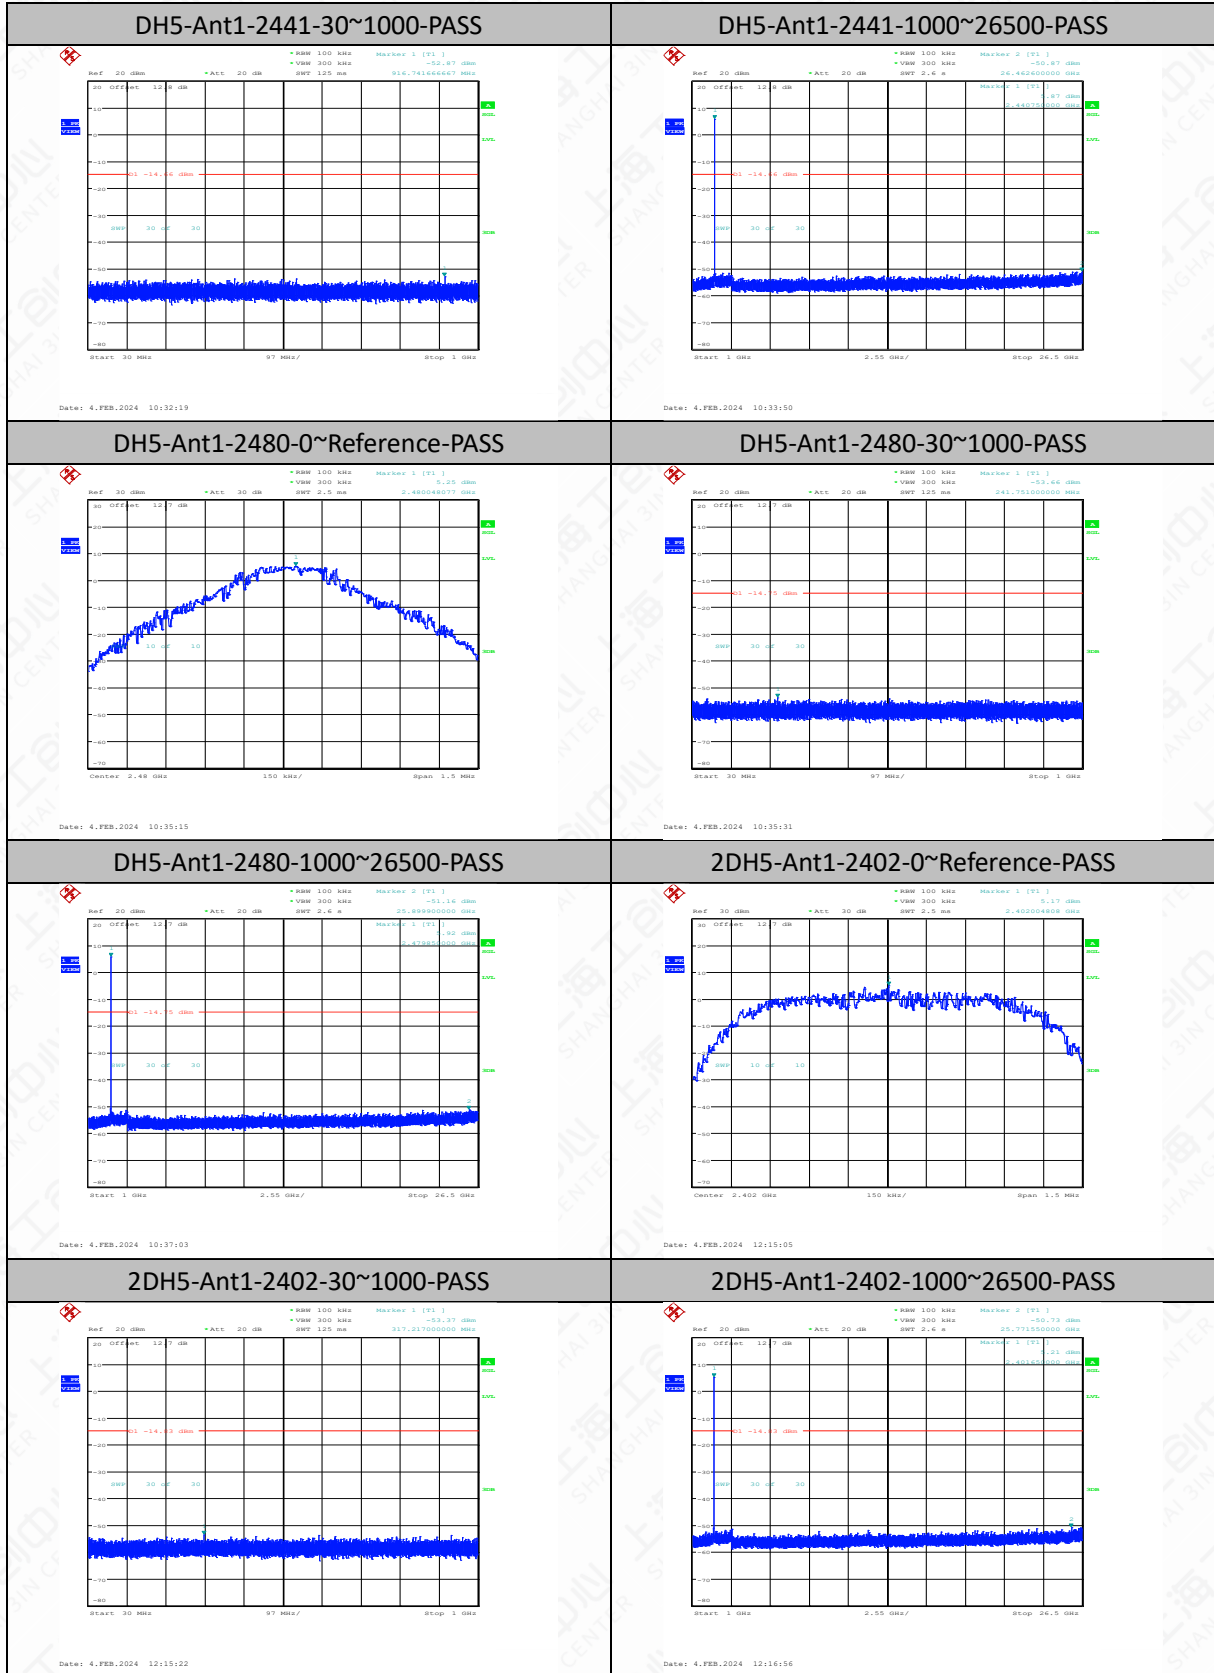

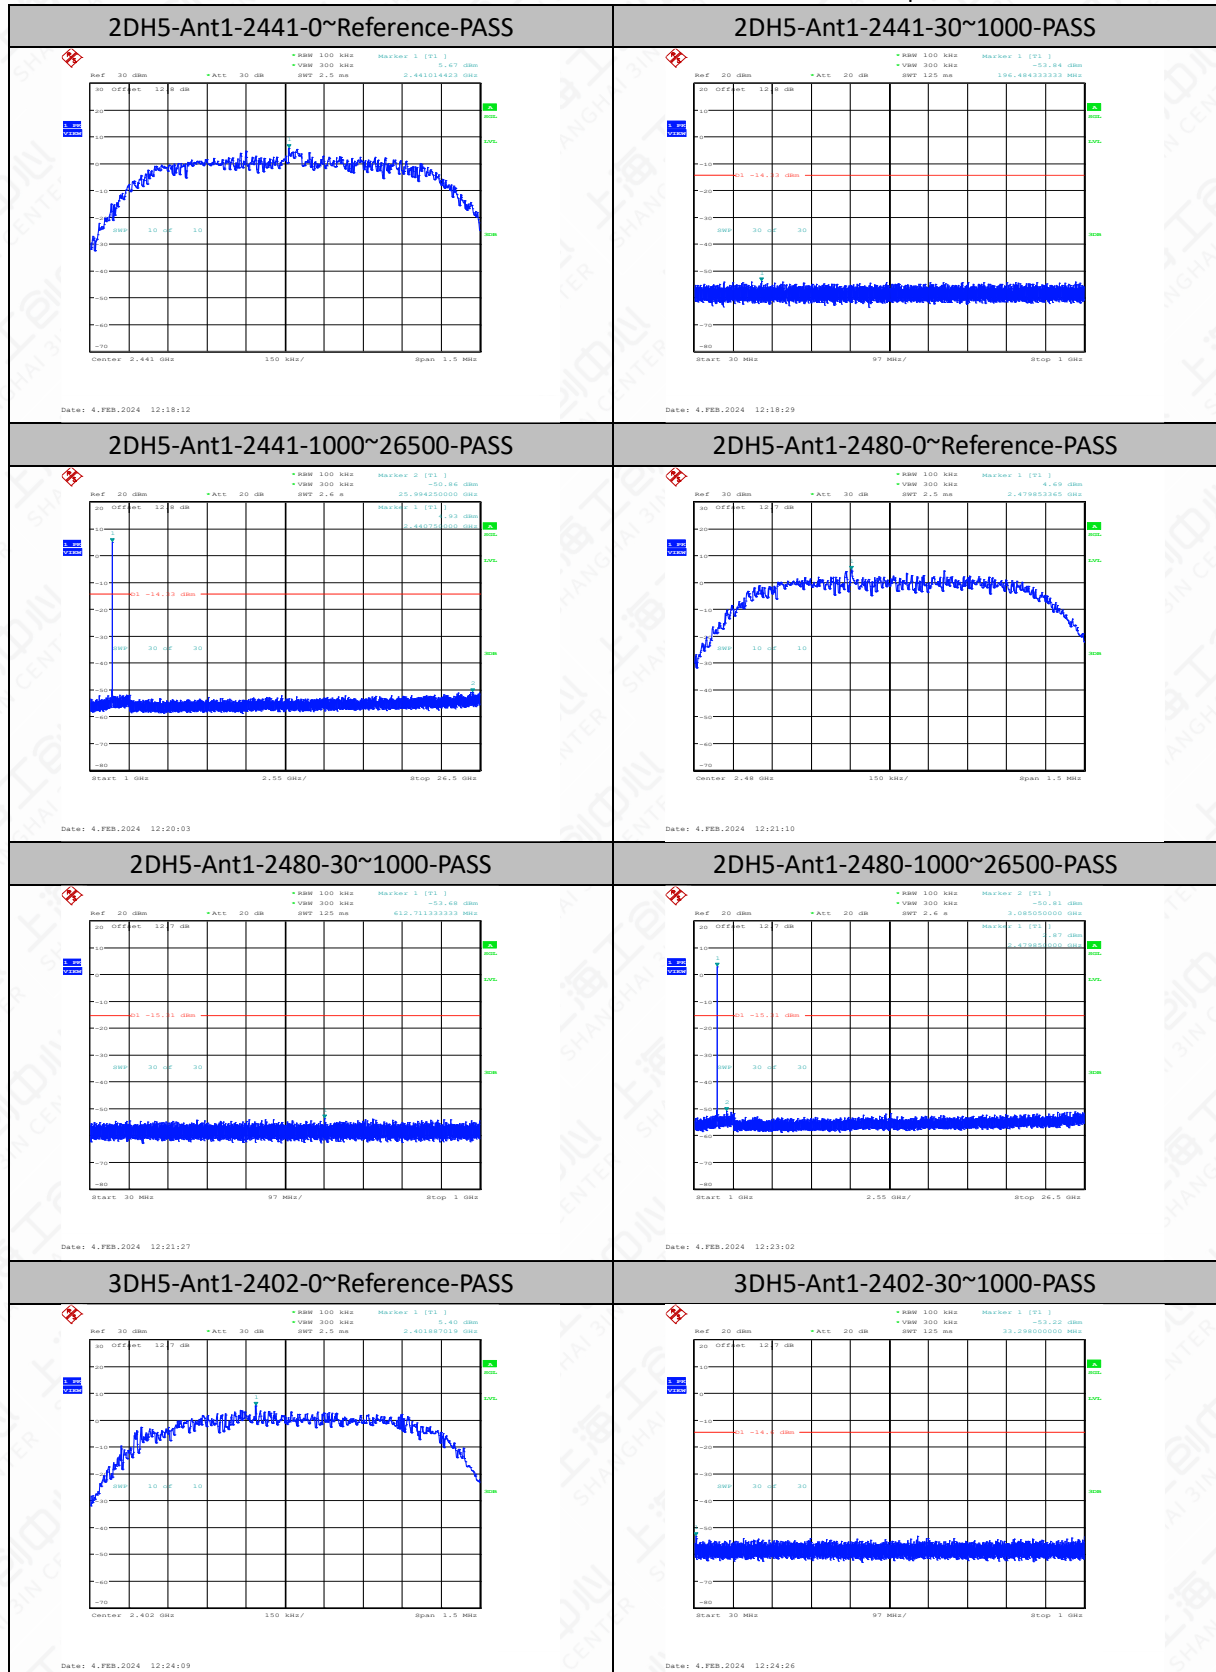

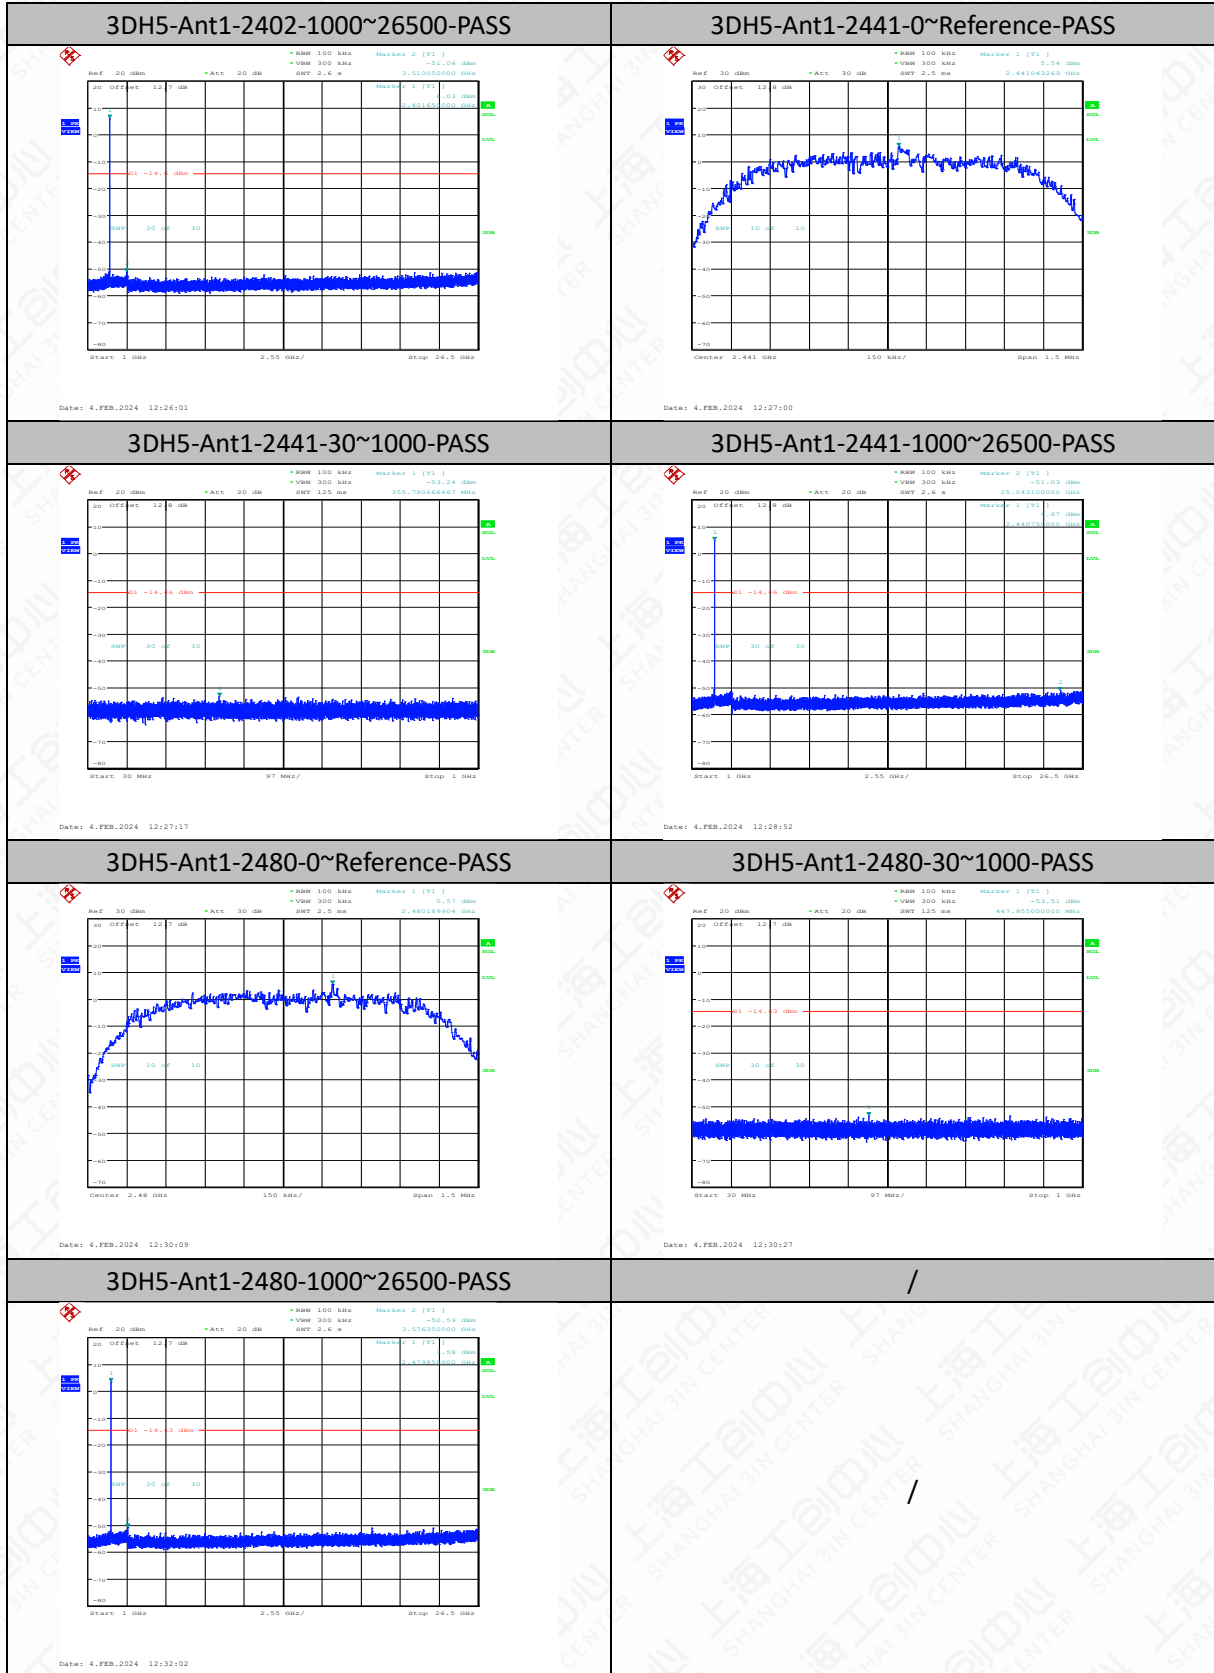

6.4 Radiated Emission

6.4.1 Measurement Limit

According to the FCC 15.205&15.209/RSS-Gen section 8.9&1.0

Limit in restricted band

Frequency of emission (MHz)	Field strength (mV/m)	Field strength (dBuV/m)
0.009~0.49	2400/F (kHz)	129-94
0.49~1.705	24000/F (kHz)	74-63
1.705~30	30	70
30~88	100	40
88~216	150	43.5
216~960	200	46
Above 960	500	54

6.4.2 Test Method

Portable, small, lightweight, or modular devices that may be handheld, worn on the body, or placed on a table during operation shall be positioned on a non-conducting platform, the top of which is 80 cm above the reference ground plane. The preferred area occupied by the EUT arrangement is 1 m by 1.5 m, For emissions testing at or below 1 GHz, the table height shall be 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. but it may be larger or smaller to accommodate various sized EUTs. For testing purposes, ceiling- and wall-mounted devices also shall be positioned on a tabletop (see also ANSI C63.10-2013 section 6.3.4 and 6.3.5). In making any tests involving handheld, body-worn, or ceiling-mounted equipment, it is essential to recognize that the measured levels may be dependent on the orientation (attitude) of the three orthogonal axes of the EUT. Thus, exploratory tests as specified in 8.3.1 shall be carried out for various axes orientations to determine the attitude having maximum or near-maximum emission level.

The EUT was placed on a non-conductive table. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.

Test Settings – Below 1GHz (Quasi-Peak Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 100 kHz.
3. Set the VBW = 300 kHz.
4. Detector = quasi-peak.
5. Sweep time = auto couple.
6. Trace mode = max hold.
7. Trace was allowed to stabilize.

Test Settings – Above 1GHz (Peak Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 1MHz.

3. Set the VBW = 3MHz.
4. Detector = peak
5. Trace mode = max hold
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


Test Settings – Above 1GHz (Average Field Strength Measurements)

1. Set the center frequency and span to encompass frequency range to be measured.
2. Set the RBW = 1MHz.
3. Set the VBW = 3MHz.
4. Detector = power average (RMS).
5. Number of measurement points = 1001 (Number of points must be $\geq 2 \times \text{span} \backslash \text{RBW}$)
6. Sweep time = auto
7. Trace (RMS) averaging was performed over at least 100 traces.


Frequency of emission	RBW/VBW	Sweep Time (s)
0.009~30	9KHz/30KHz	Auto
30~1000	100KHz/300KHz	5
1000~4000	1MHz/3MHz	15
4000~18000	1MHz/3MHz	40
18000~26500	1MHz/3MHz	20

6.4.3 Test Setup


Below 30MHz Test Setup

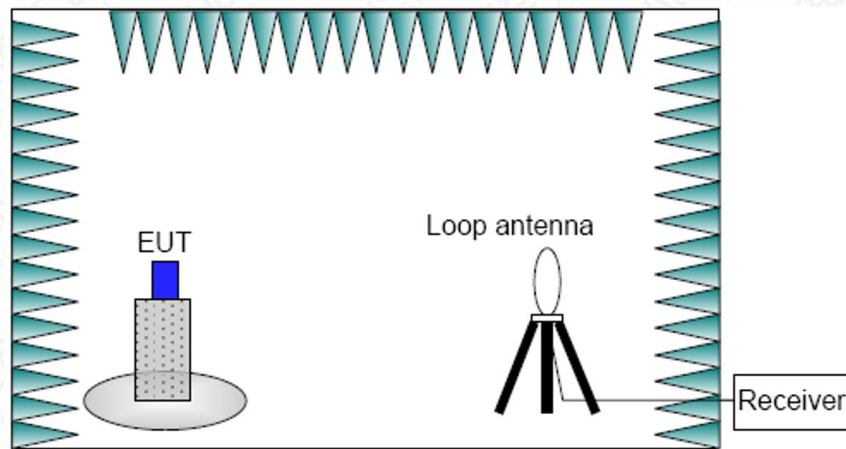

Below 1GHz Test Setup

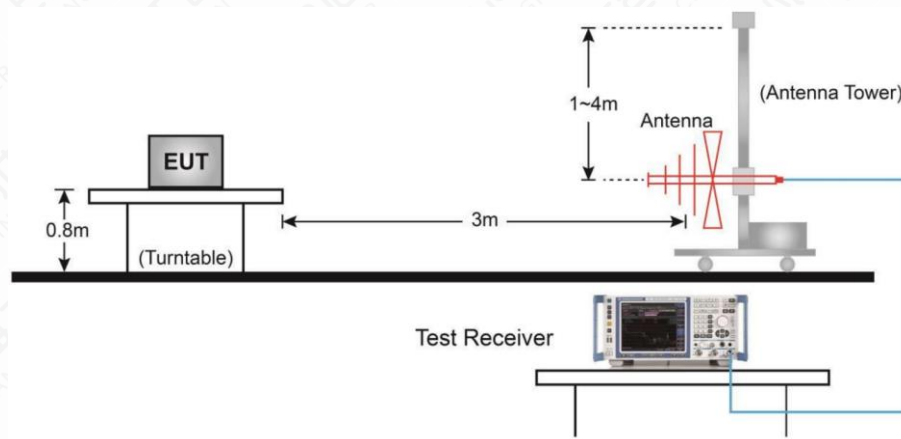

Above 1GHz Test Setup

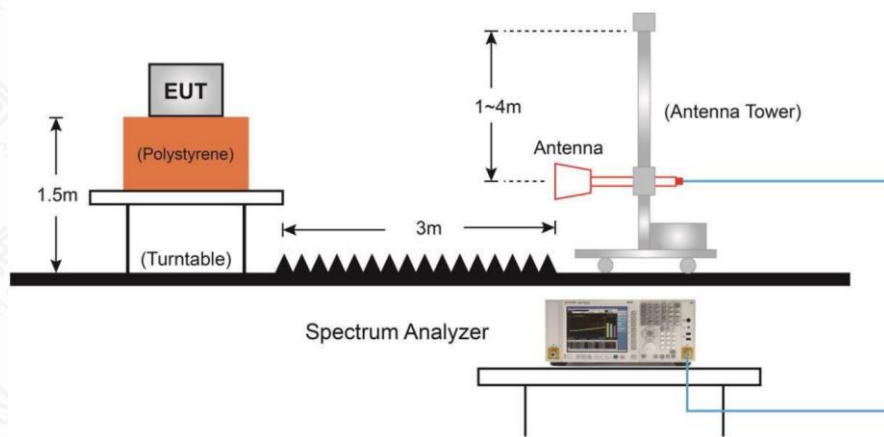

6.4.4 Measurement Results


A “reference path loss” is established and AR_{pi} is the attenuation of “reference path loss”, and including the gain of receive antenna, the gain of the preamplifier, the cable loss.

The measurement results are obtained as described below:


$AR_{pi} = \text{Cable loss} + \text{Antenna Factor} - \text{Preamplifier gain}$

$\text{Result} = P_{\text{Mea}} + AR_{pi}$


Mainly Supply (S02)

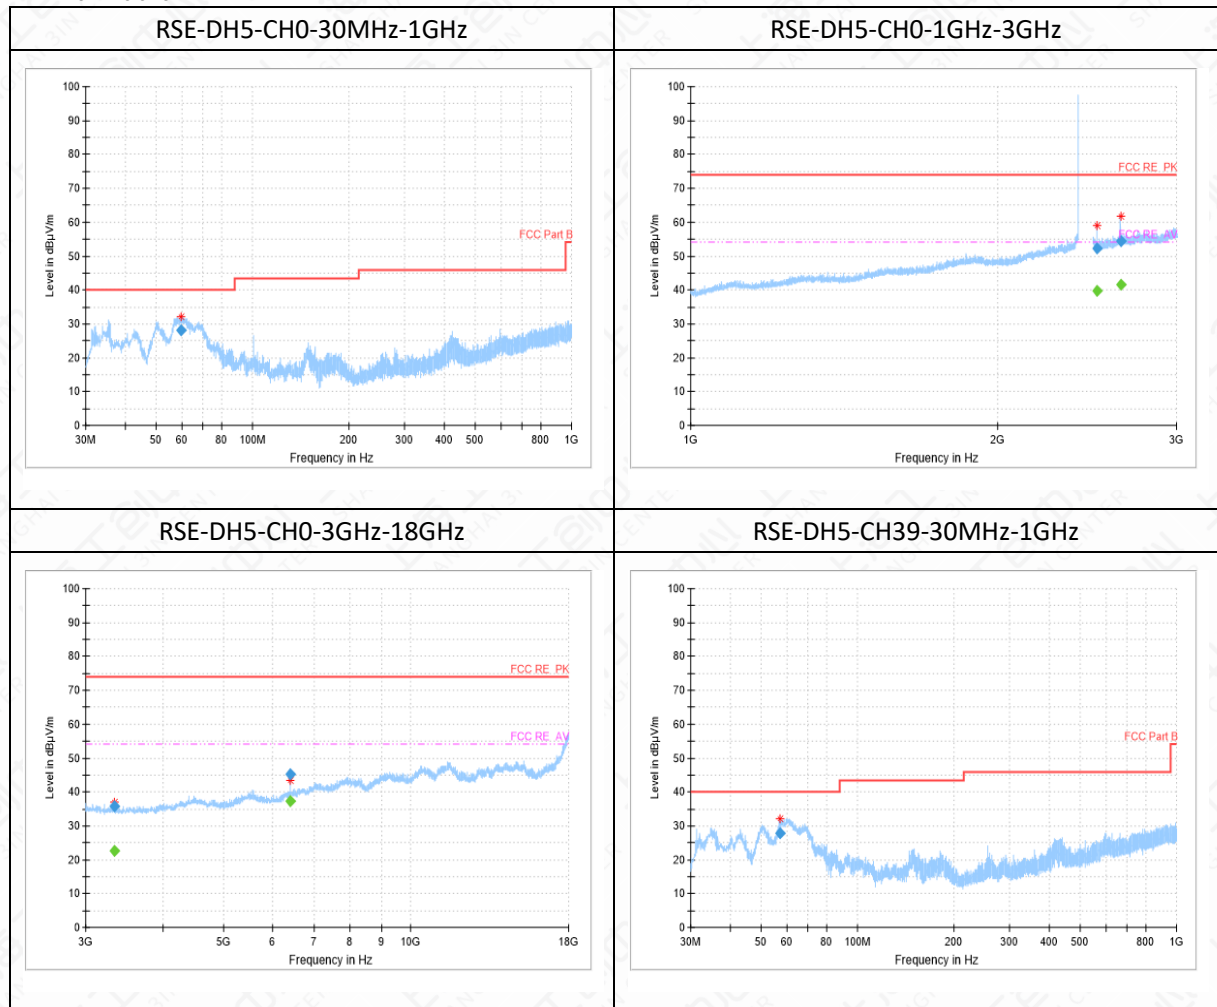


RSE-DH5-CH39-1GHz-3GHz

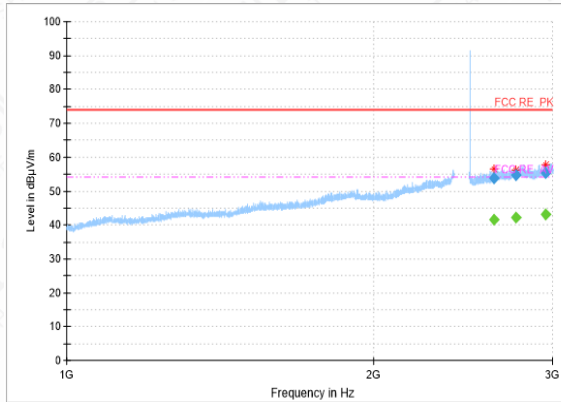


RSE-DH5-CH39-3GHz-18GHz

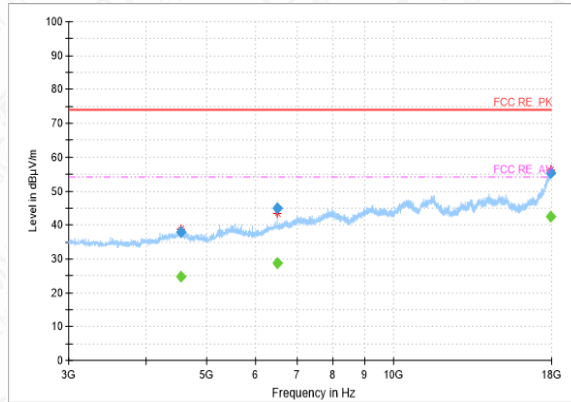


RSE-DH5-CH78-30MHz-1GHz

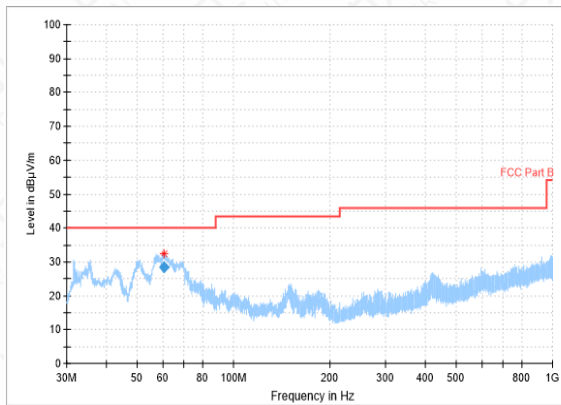


RSE-DH5-CH78-1GHz-3GHz

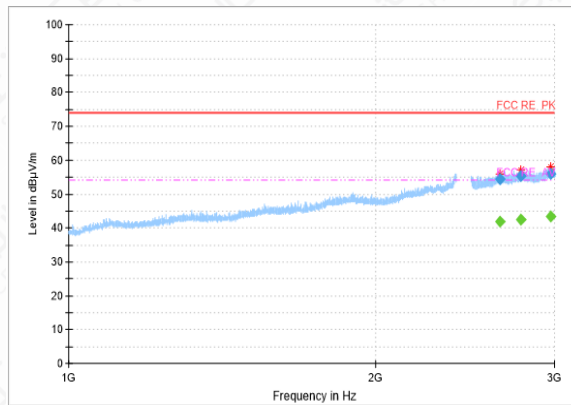


RSE-DH5-CH78-3GHz-18GHz

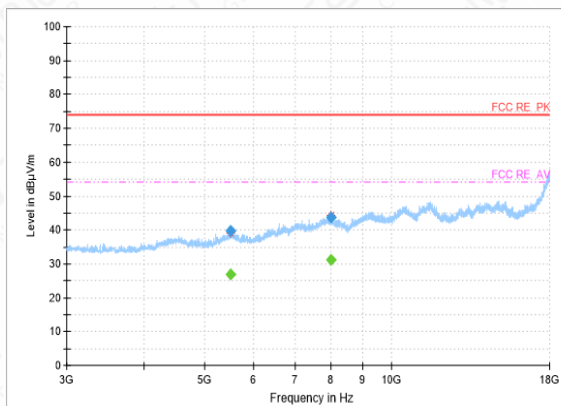


RSE-2DH5-CH0-30MHz-1GHz

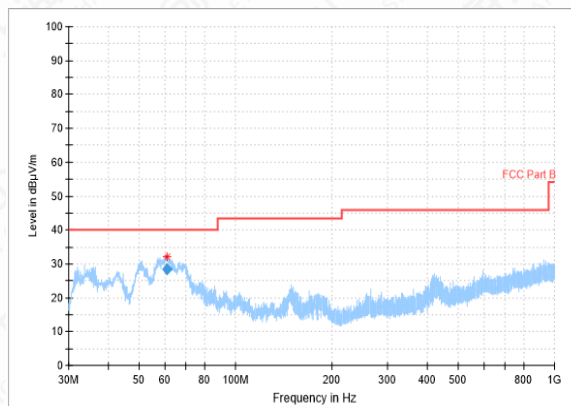


RSE-2DH5-CH0-1GHz-3GHz

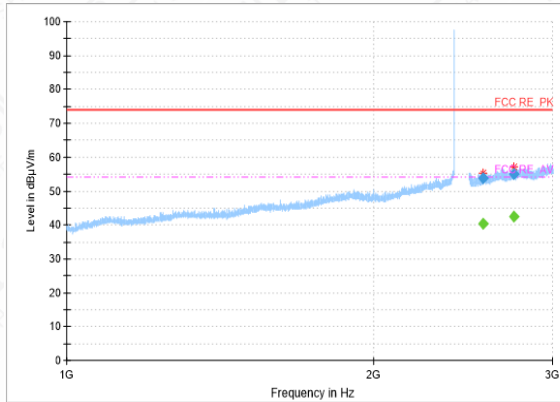


RSE-2DH5-CH0-3GHz-18GHz

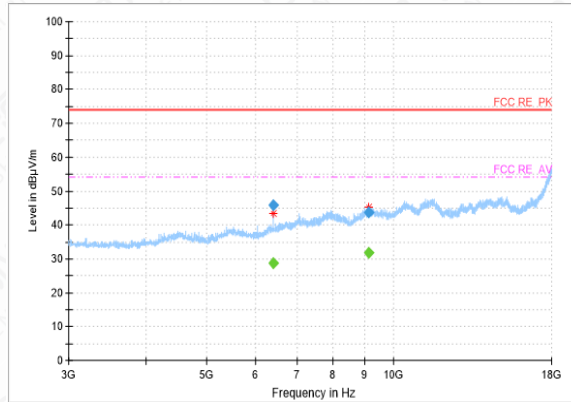


RSE-2DH5-CH39-30MHz-1GHz

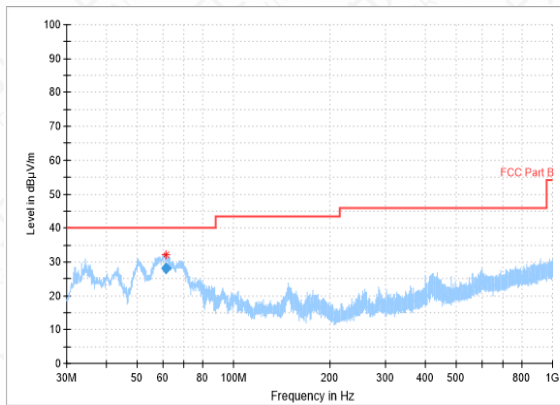


RSE-2DH5-CH39-1GHz-3GHz

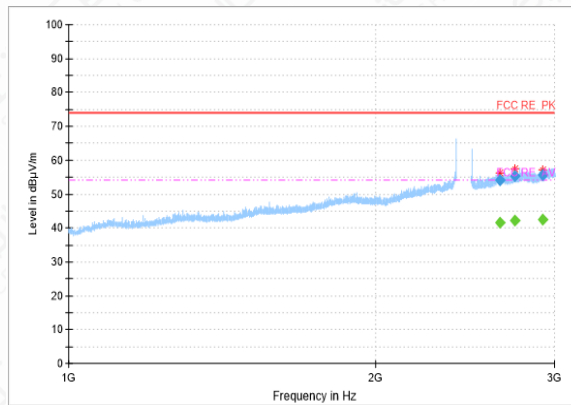


RSE-2DH5-CH39-3GHz-18GHz

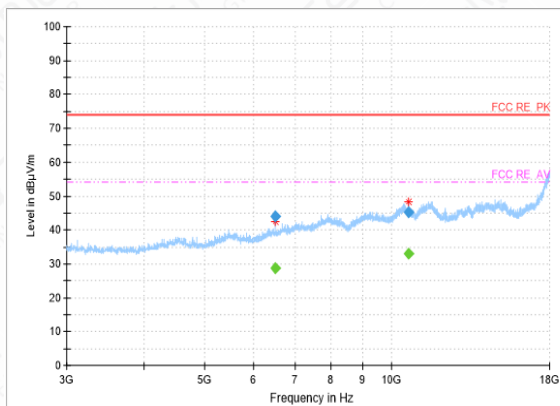


RSE-2DH5-CH78-30MHz-1GHz

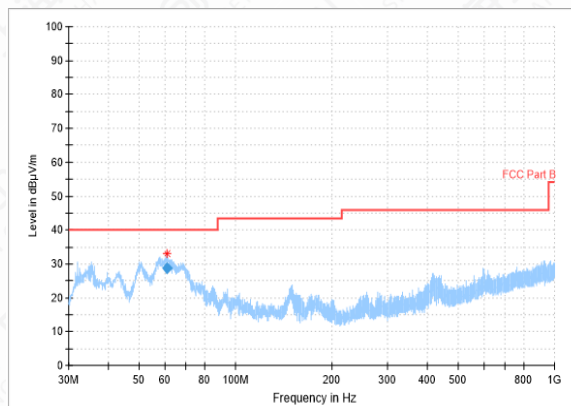


RSE-2DH5-CH78-1GHz-3GHz

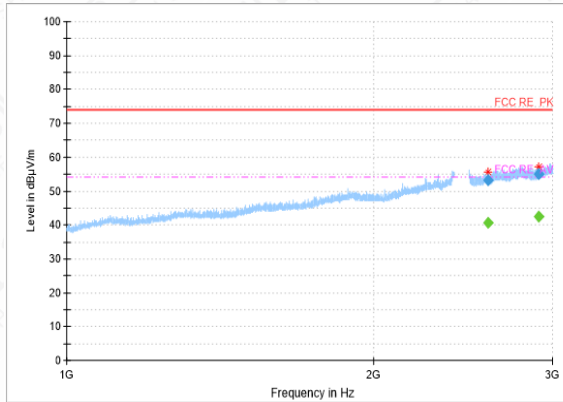


RSE-2DH5-CH78-3GHz-18GHz

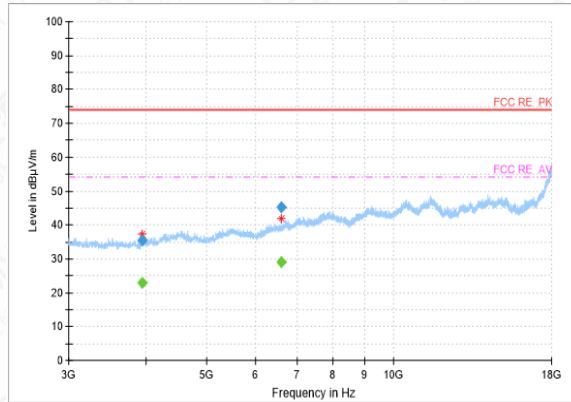


RSE-3DH5-CH0-30MHz-1GHz

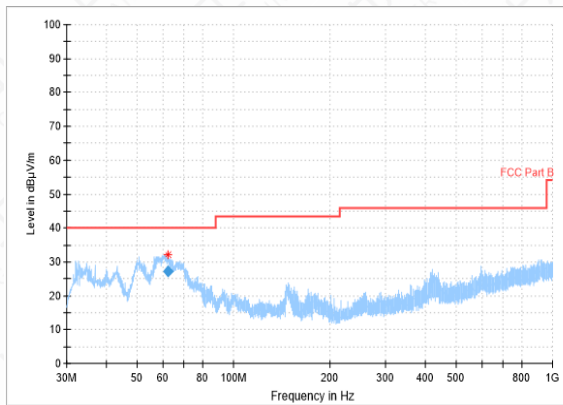


RSE-3DH5-CH0-1GHz-3GHz

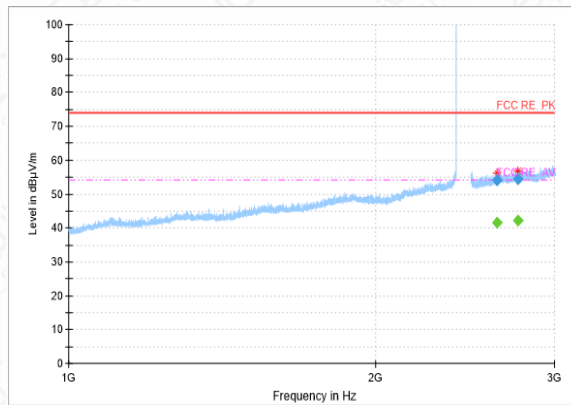


RSE-3DH5-CH0-3GHz-18GHz

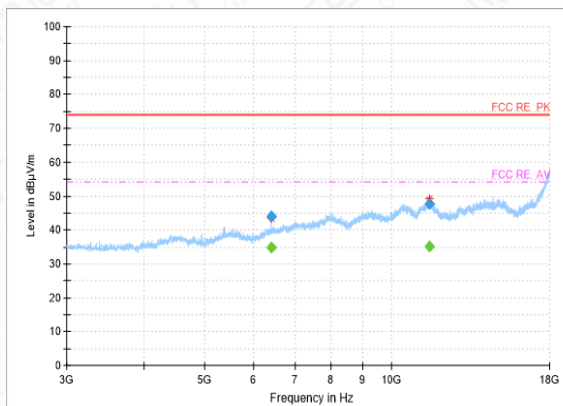


RSE-3DH5-CH39-30MHz-1GHz

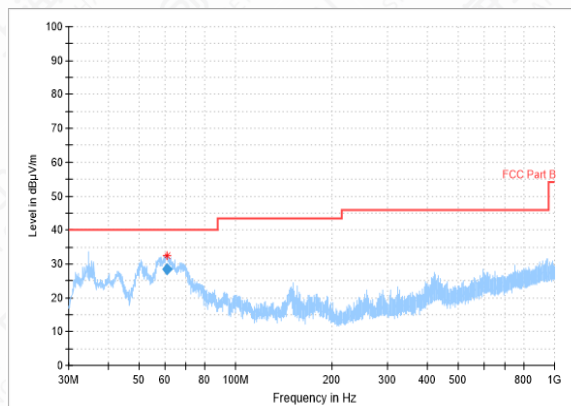


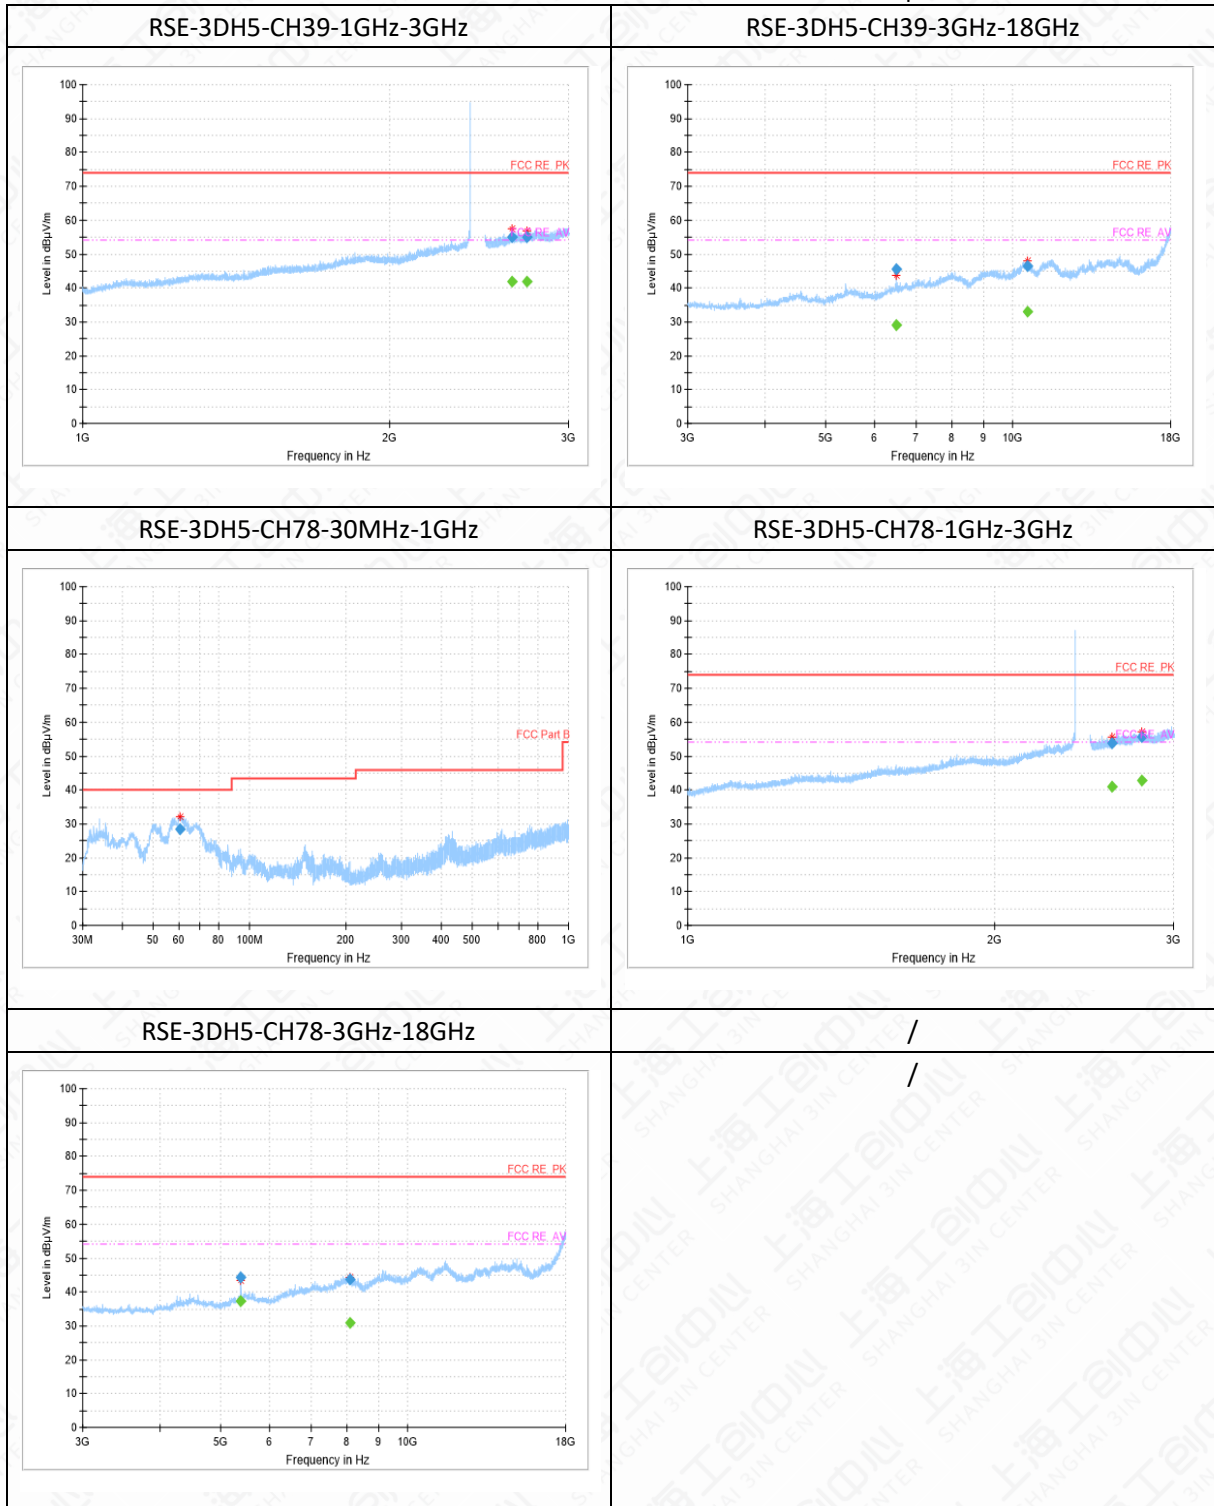


Bandedge

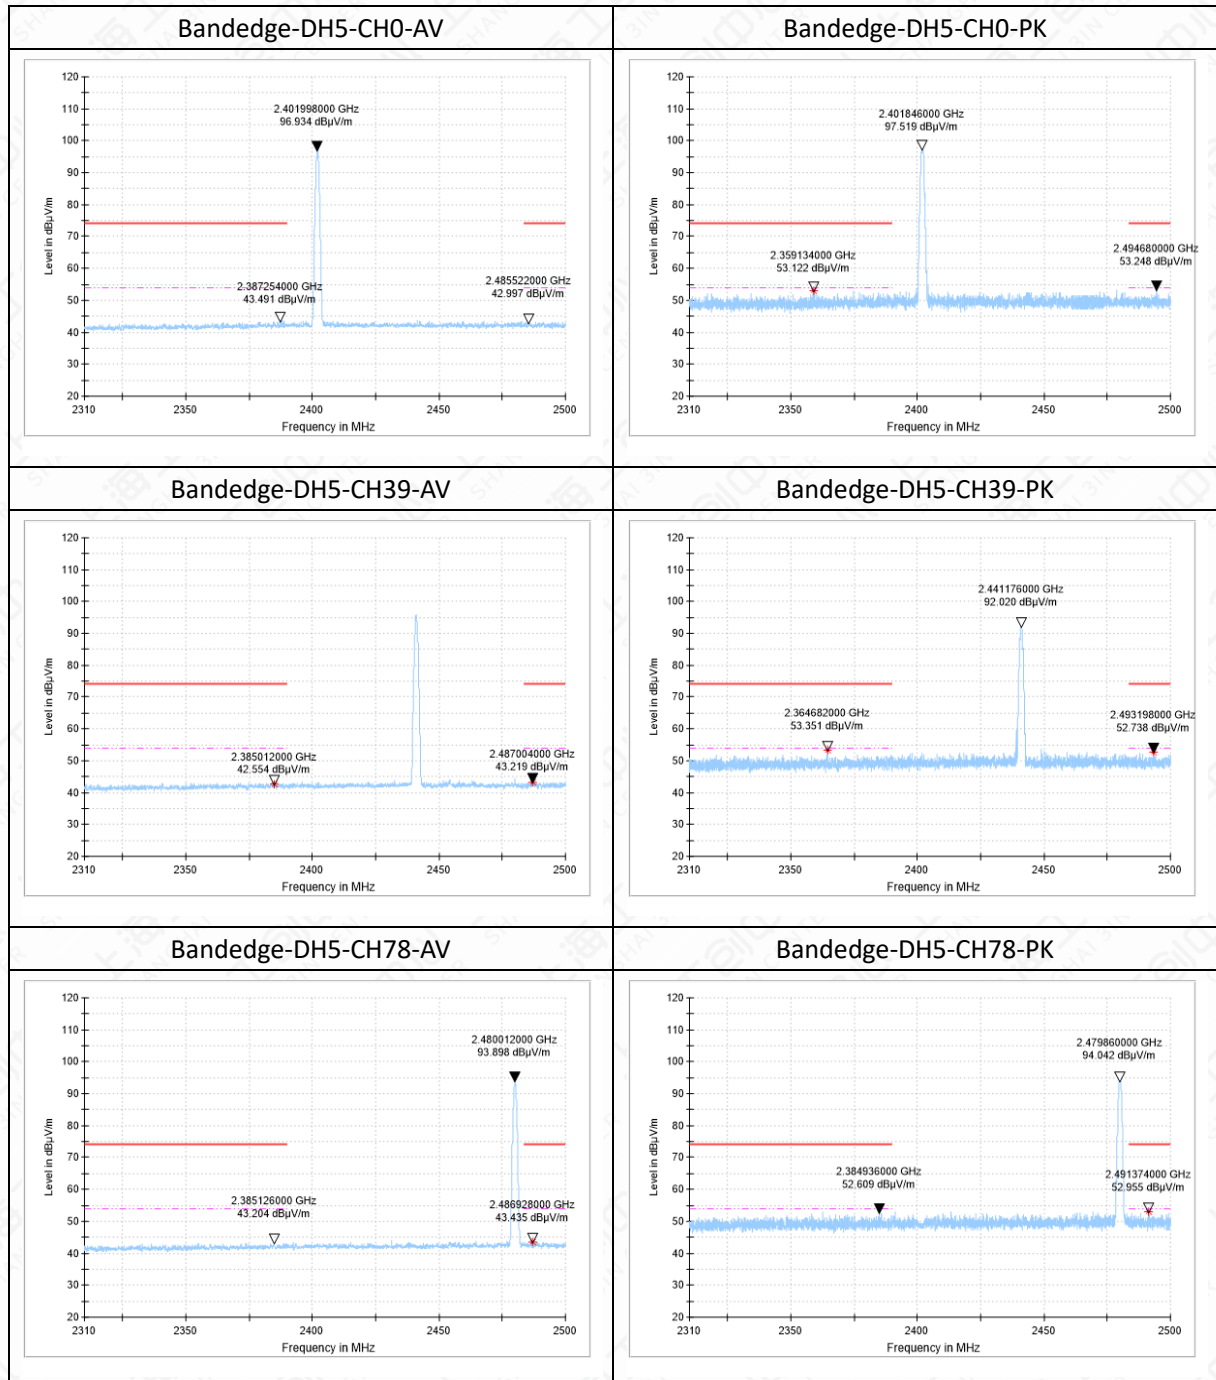


Bandedge-2DH5-CH0-AV

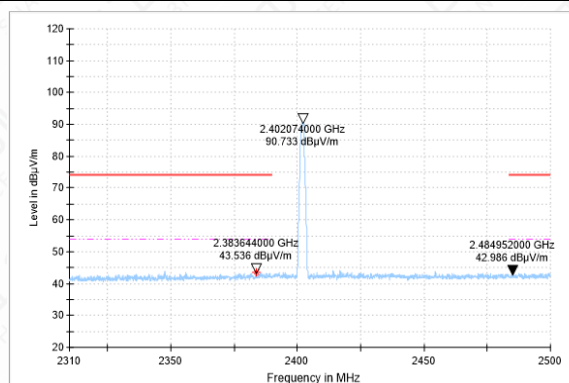


Bandedge-2DH5-CH0-PK

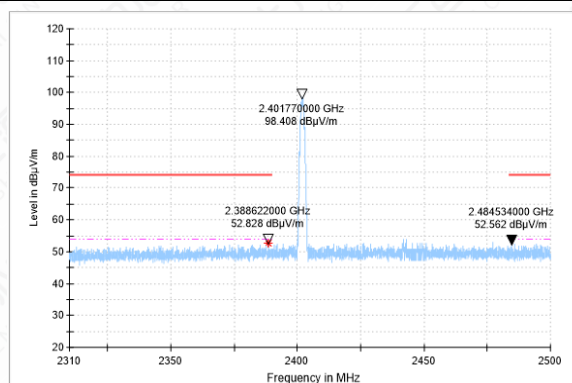


Bandedge-2DH5-CH39-AV

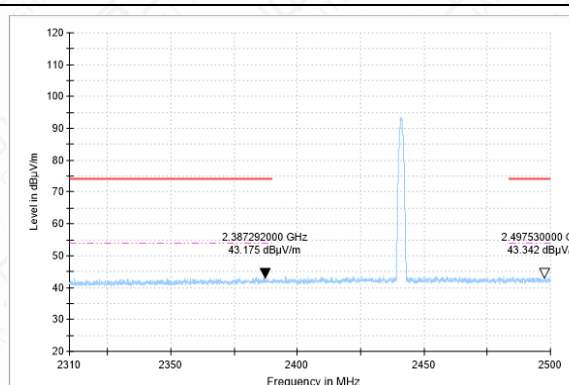


Bandedge-2DH5-CH39-PK

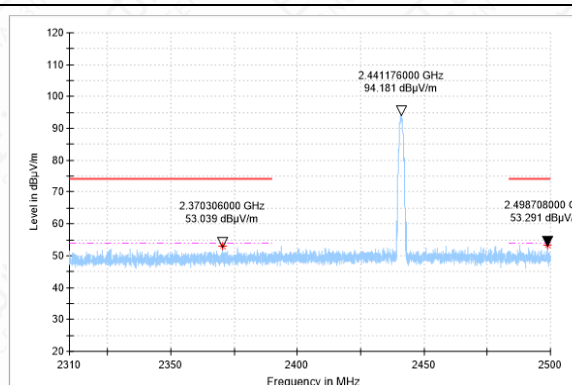


Bandedge-2DH5-CH78-AV

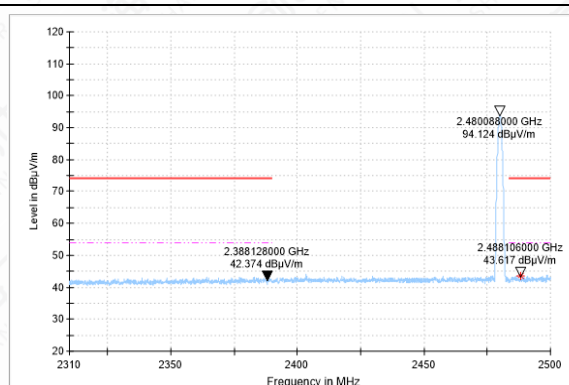


Bandedge-2DH5-CH78-PK

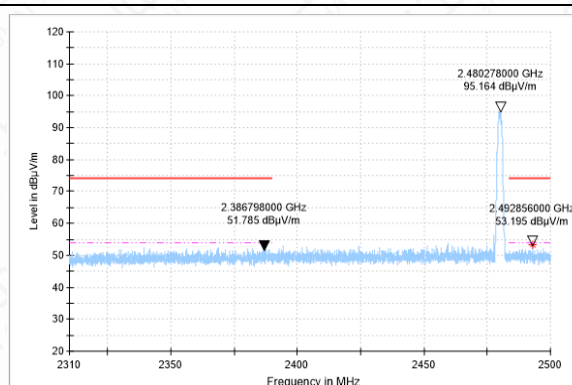


Bandedge-3DH5-CH0-AV

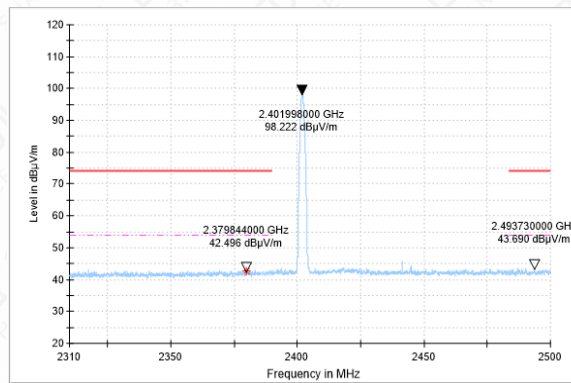


Bandedge-3DH5-CH0-PK

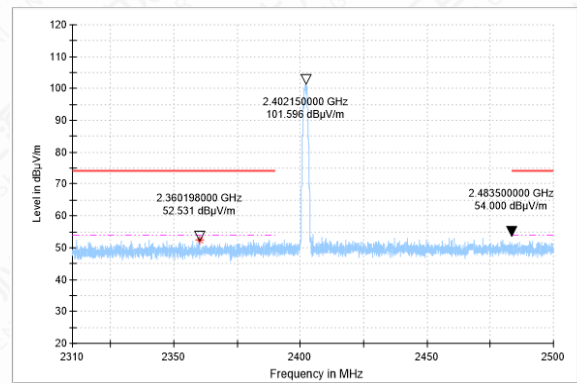


Bandedge-3DH5-CH39-AV

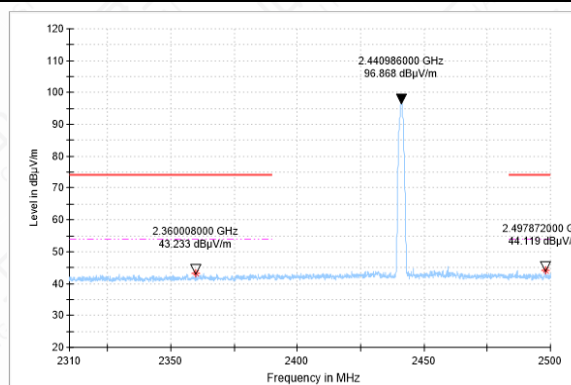


Bandedge-3DH5-CH39-PK

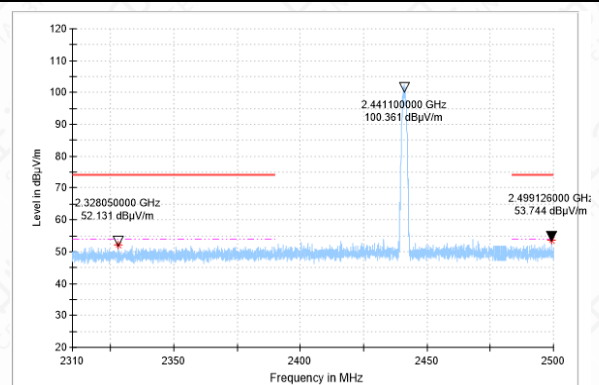


Bandedge-3DH5-CH78-AV

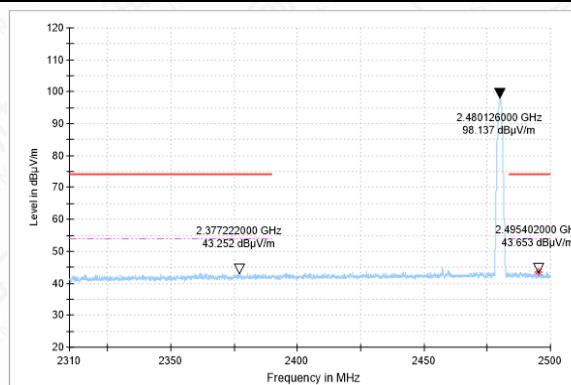


Bandedge-3DH5-CH78-PK

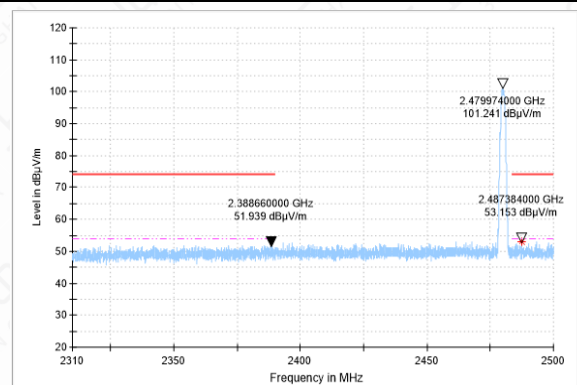



Secondary supply(S11)

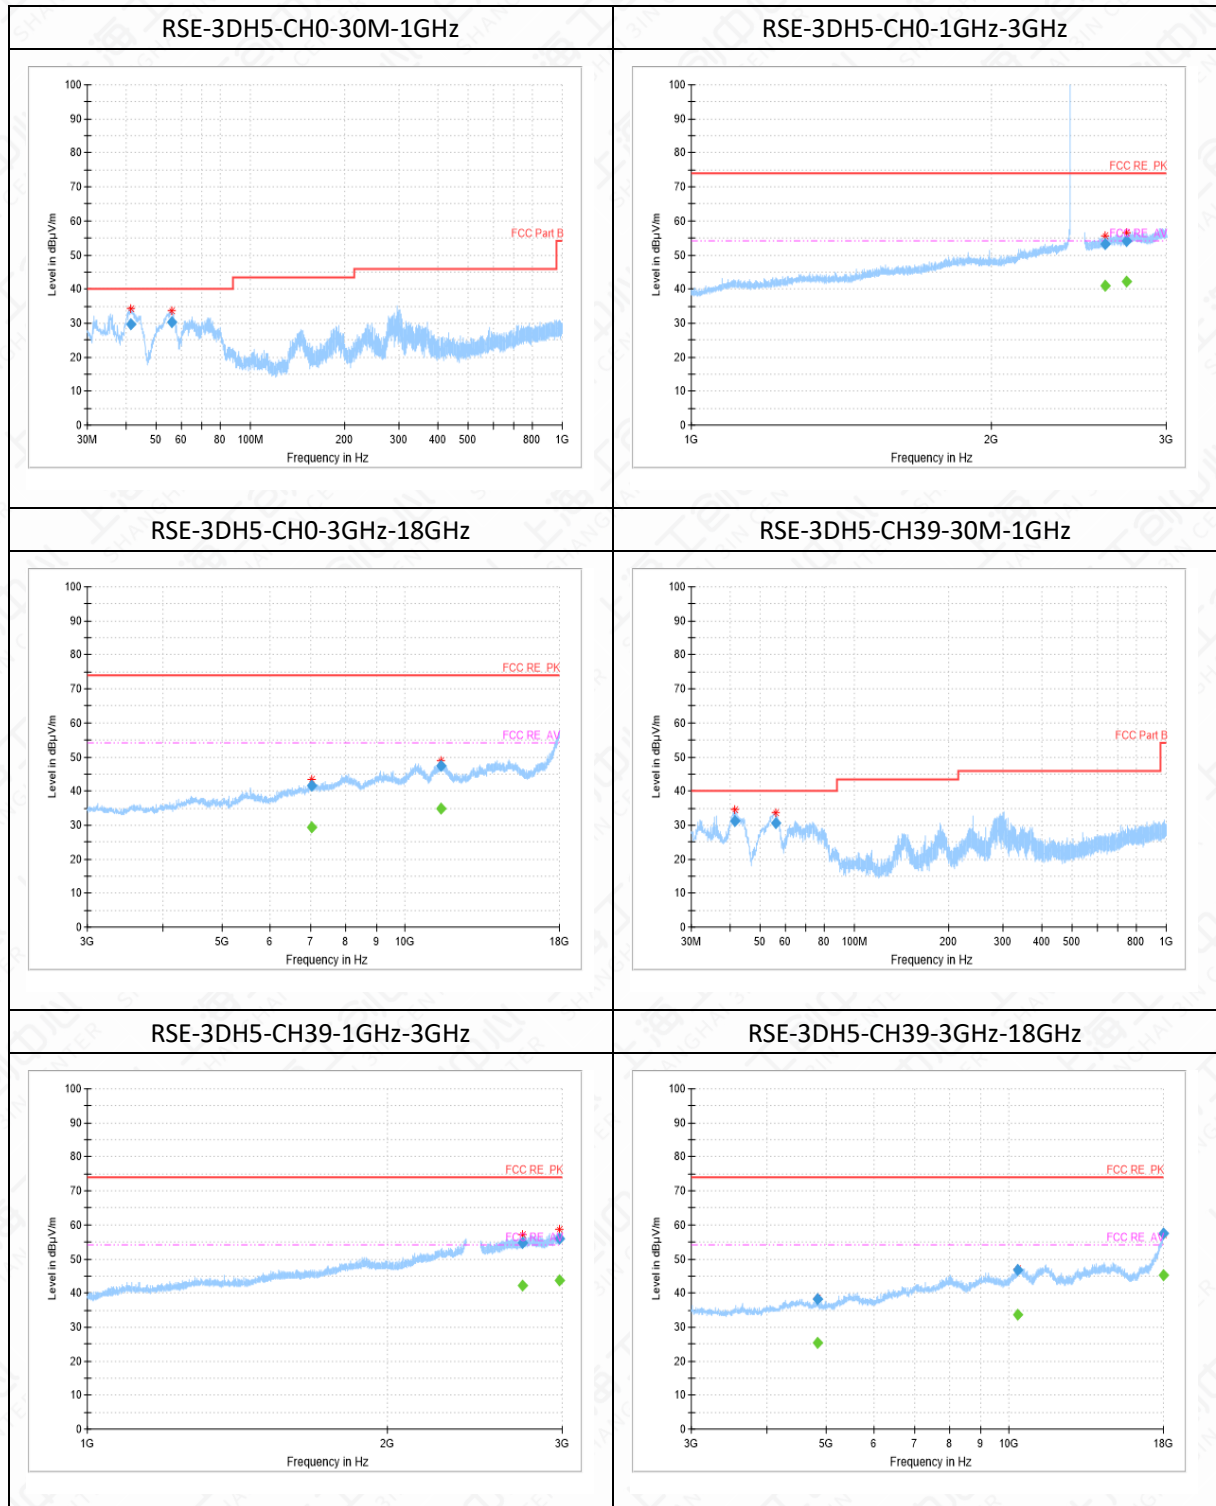

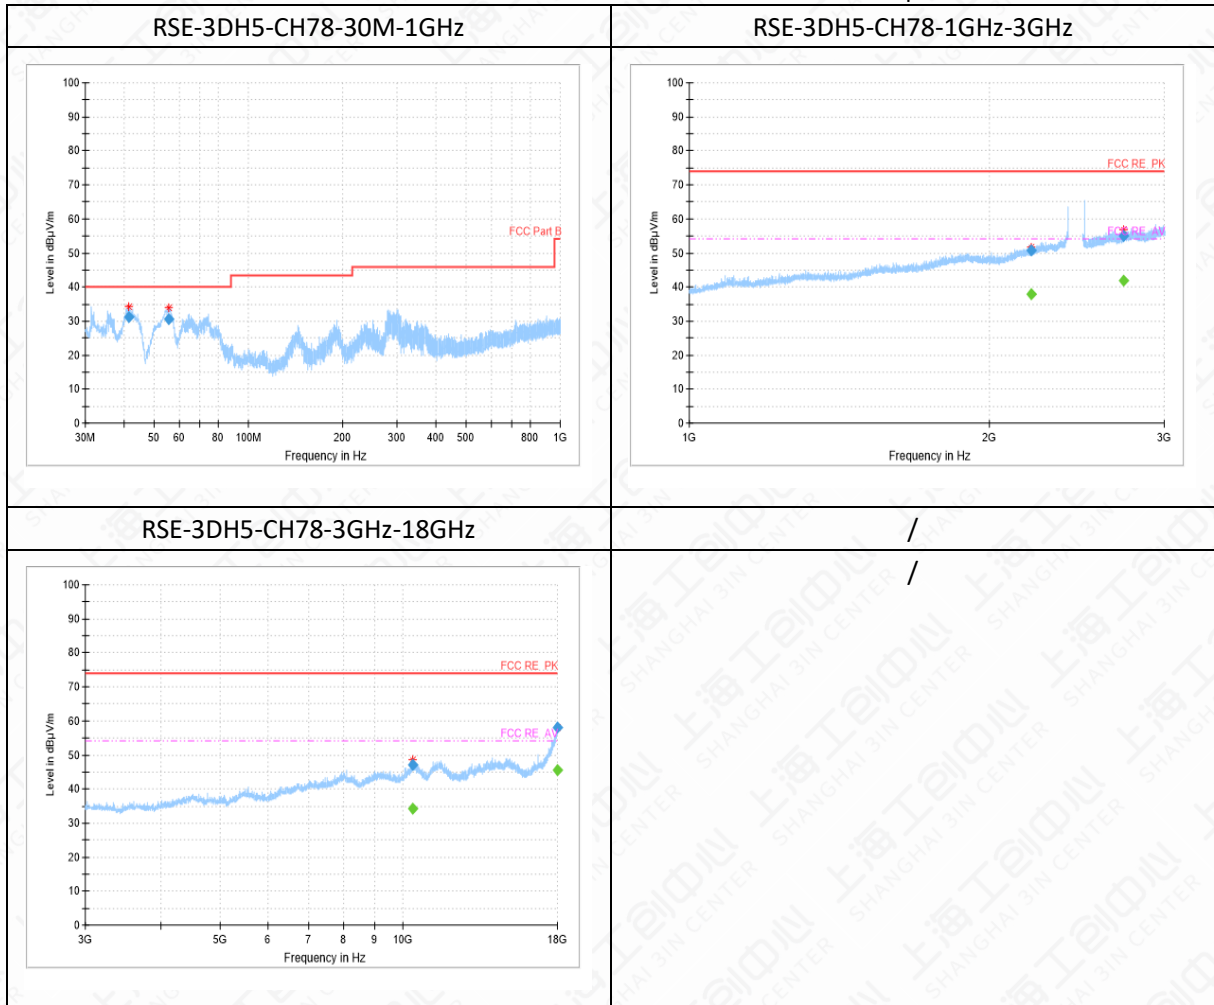

Bandedge

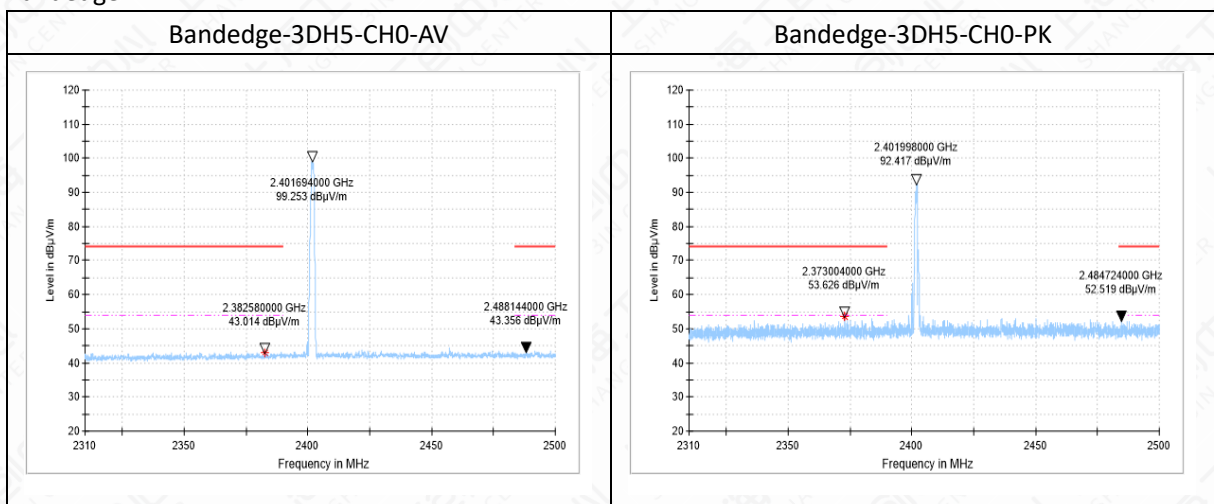

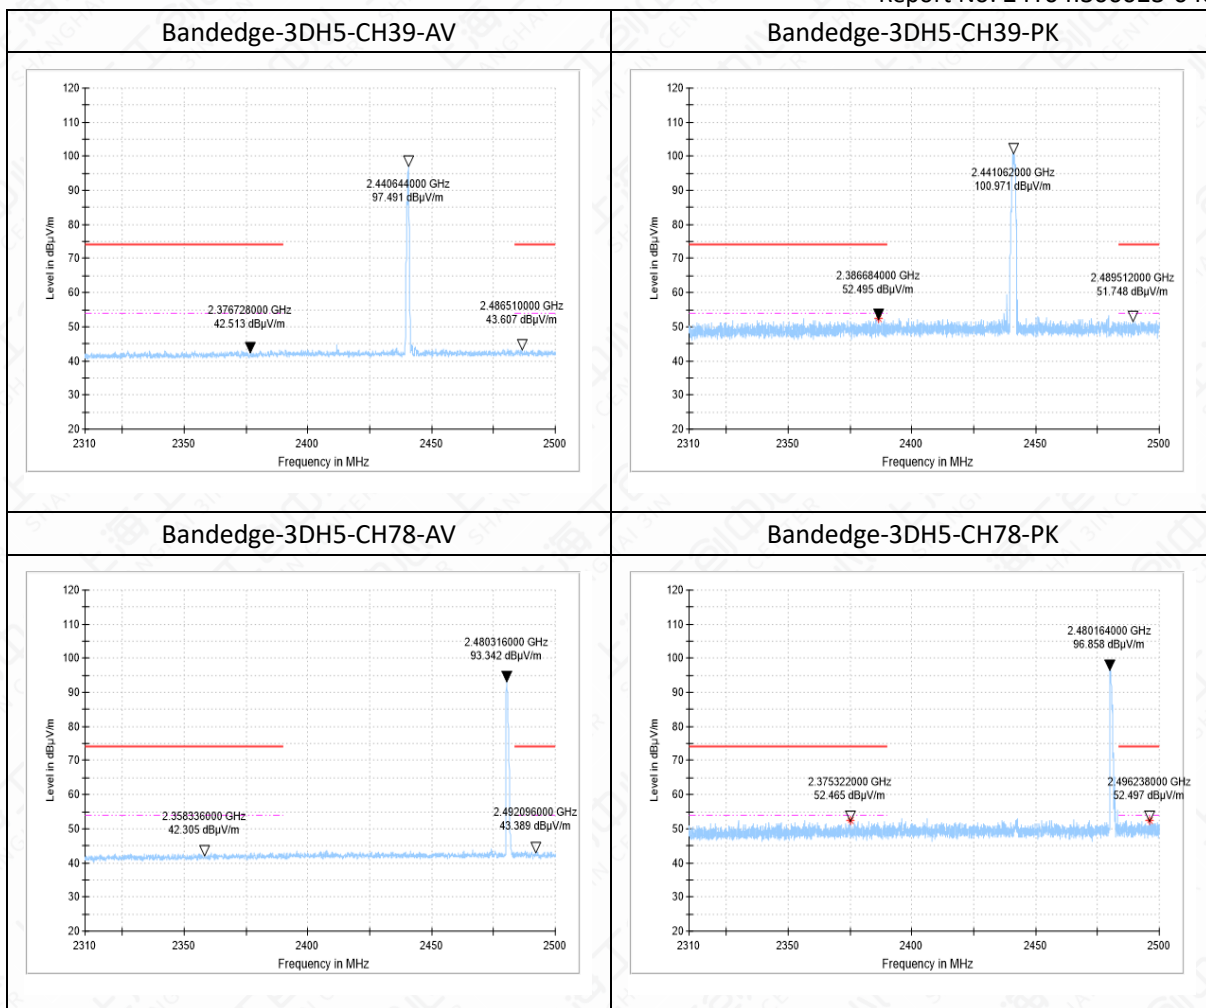

Note:

1. The out-of-limit signal in the picture is the main frequency signal.
2. Only data in worst mode is provided.
3. Sweep the whole frequency band through the range from 30MHz to the 10th harmonic of the carrier, the Emissions in the frequency band 18GHz-26.5GHz is more than 20dB below the limit are not report.
4. The test data below 30MHz is more than 20dB lower than the limit value, so it is not provided in the report.
5. Horizontal and vertical polarity is all have been tested, the result of them is synthesized in the above data diagram.

Mainly Supply (S02)
RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2507.8	52.43	16	36.43	21.57	74.00	H
2643.3	54.46	17	37.46	19.54	74.00	H

RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2507.8	39.86	16	23.86	14.14	54.00	H
2643.3	41.72	17	24.72	12.28	54.00	H

RSE-DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
59.7	28.15	-12	40.15	11.85	40.00	V

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3340.4	35.85	-11	46.85	38.15	74.00	V
6405.5	45.3	-4	49.3	28.70	74.00	H

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3340.4	22.7	-11	33.7	31.30	54.00	V
6405.5	37.19	-4	41.19	16.81	54.00	H

RSE-DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
57.3	27.84	-12	39.84	12.16	40.00	V

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2630.3	53.93	17	36.93	20.07	74.00	H
2762.0	54.83	18	36.83	19.17	74.00	V
2951.0	55.48	19	36.48	18.52	74.00	H

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2630.3	41.57	17	24.57	12.43	54.00	H
2762.0	42.09	18	24.09	11.91	54.00	V
2951.0	43.22	19	24.22	10.78	54.00	H

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4549.2	37.98	-8	45.98	36.02	74.00	V
6508.1	44.81	-4	48.81	29.19	74.00	H
17907.1	55.21	17	38.21	18.79	74.00	V

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4549.2	24.87	-8	32.87	29.13	54.00	V
6508.1	28.88	-4	32.88	25.12	54.00	H
17907.1	42.44	17	25.44	11.56	54.00	V

RSE-DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.6	28.38	-13	41.38	11.62	40.00	V

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2650.5	54.56	17	37.56	19.44	74.00	V
2780.2	55.35	18	37.35	18.65	74.00	H
2970.9	55.9	19	36.9	18.10	74.00	V

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2650.5	41.83	17	24.83	12.17	54.00	V
2780.2	42.56	18	24.56	11.44	54.00	H
2970.9	43.31	19	24.31	10.69	54.00	V

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5513.9	39.77	-6	45.77	34.23	74.00	H
7998.8	43.69	0	43.69	30.31	74.00	H

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5513.9	27.02	-6	33.02	26.98	54.00	H
7998.8	31.33	0	31.33	22.67	54.00	H

RSE-2DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.1	28.37	-13	41.37	11.63	40.00	V

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2563.0	53.69	16	37.69	20.31	74.00	V
2748.3	54.96	18	36.96	19.04	74.00	V

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2563.0	40.41	16	24.41	13.59	54.00	V
2748.3	42.38	18	24.38	11.62	54.00	V

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6404.0	45.81	-4	49.81	28.19	74.00	H
9121.0	43.87	1	42.87	30.13	74.00	V

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6404.0	28.83	-4	32.83	25.17	54.00	H
9121.0	31.86	1	30.86	22.14	54.00	V

RSE-2DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.3	28.2	-13	41.2	11.80	40.00	V

RSE-2DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2653.7	54.14	17	37.14	19.86	74.00	V
2741.5	55.32	18	37.32	18.68	74.00	V
2923.0	55.63	18	37.63	18.37	74.00	V

RSE-2DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2653.7	41.6	17	24.6	12.40	54.00	V
2741.5	42.29	18	24.29	11.71	54.00	V
2923.0	42.47	18	24.47	11.53	54.00	V

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	43.91	-4	47.91	30.09	74.00	V
10655.1	45.35	3	42.35	28.65	74.00	V

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	28.73	-4	32.73	25.27	54.00	V
10655.1	32.94	3	29.94	21.06	54.00	V

RSE-2DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.8	28.7	-13	41.7	11.30	40.00	V

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2593.4	53.1	16	37.1	20.90	74.00	V
2907.8	55.14	18	37.14	18.86	74.00	H

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2593.4	40.65	16	24.65	13.35	54.00	V
2907.8	42.61	18	24.61	11.39	54.00	H

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3941.2	35.37	-10	45.37	38.63	74.00	V
6612.1	45.18	-4	49.18	28.82	74.00	H

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3941.2	22.97	-10	32.97	31.03	54.00	V
6612.1	28.99	-4	32.99	25.01	54.00	H

RSE-3DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
62.3	27.27	-13	40.27	12.73	40.00	V

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2632.5	54	17	37	20.00	74.00	V
2763.7	54.44	18	36.44	19.56	74.00	V

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2632.5	41.68	17	24.68	12.32	54.00	V
2763.7	42.08	18	24.08	11.92	54.00	V

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6405.5	44	-4	48	30.00	74.00	H
11521.4	47.56	5	42.56	26.44	74.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6405.5	34.97	-4	38.97	19.03	54.00	H
11521.4	35.22	5	30.22	18.78	54.00	H

RSE-3DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.1	28.43	-13	41.43	11.57	40.00	V

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2639.4	54.94	17	37.94	19.06	74.00	V
2729.8	55.09	18	37.09	18.91	74.00	H

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2639.4	41.75	17	24.75	12.25	54.00	V
2729.8	41.81	18	23.81	12.19	54.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	45.68	-4	49.68	28.32	74.00	H
10566.5	46.52	3	43.52	27.48	74.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	29.13	-4	33.13	24.87	54.00	H
10566.5	32.91	3	29.91	21.09	54.00	H

RSE-3DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.6	28.5	-13	41.5	11.50	40.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2612.4	53.74	17	36.74	20.26	74.00	H
2794.7	55.52	18	37.52	18.48	74.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2612.4	41.11	17	24.11	12.89	54.00	H
2794.7	42.7	18	24.7	11.30	54.00	V

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5400.0	44.47	-6	50.47	29.53	74.00	V
8099.1	43.74	0	43.74	30.26	74.00	H

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5400.0	37.46	-6	43.46	16.54	54.00	V
8099.1	31.03	0	31.03	22.97	54.00	H

RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2507.8	52.43	16	36.43	21.57	74.00	H
2643.3	54.46	17	37.46	19.54	74.00	H

RSE-DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2507.8	39.86	16	23.86	14.14	54.00	H
2643.3	41.72	17	24.72	12.28	54.00	H

RSE-DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
59.7	28.15	-12	40.15	11.85	40.00	V

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3340.4	35.85	-11	46.85	38.15	74.00	V
6405.5	45.3	-4	49.3	28.70	74.00	H

RSE-DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3340.4	22.7	-11	33.7	31.30	54.00	V
6405.5	37.19	-4	41.19	16.81	54.00	H

RSE-DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
57.3	27.84	-12	39.84	12.16	40.00	V

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2630.3	53.93	17	36.93	20.07	74.00	H
2762.0	54.83	18	36.83	19.17	74.00	V
2951.0	55.48	19	36.48	18.52	74.00	H

RSE-DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2630.3	41.57	17	24.57	12.43	54.00	H
2762.0	42.09	18	24.09	11.91	54.00	V
2951.0	43.22	19	24.22	10.78	54.00	H

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4549.2	37.98	-8	45.98	36.02	74.00	V
6508.1	44.81	-4	48.81	29.19	74.00	H
17907.1	55.21	17	38.21	18.79	74.00	V

RSE-DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4549.2	24.87	-8	32.87	29.13	54.00	V
6508.1	28.88	-4	32.88	25.12	54.00	H
17907.1	42.44	17	25.44	11.56	54.00	V

RSE-DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.6	28.38	-13	41.38	11.62	40.00	V

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2650.5	54.56	17	37.56	19.44	74.00	V
2780.2	55.35	18	37.35	18.65	74.00	H
2970.9	55.9	19	36.9	18.10	74.00	V

RSE-DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2650.5	41.83	17	24.83	12.17	54.00	V
2780.2	42.56	18	24.56	11.44	54.00	H
2970.9	43.31	19	24.31	10.69	54.00	V

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5513.9	39.77	-6	45.77	34.23	74.00	H
7998.8	43.69	0	43.69	30.31	74.00	H

RSE-DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5513.9	27.02	-6	33.02	26.98	54.00	H
7998.8	31.33	0	31.33	22.67	54.00	H

RSE-2DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.1	28.37	-13	41.37	11.63	40.00	V

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2563.0	53.69	16	37.69	20.31	74.00	V
2748.3	54.96	18	36.96	19.04	74.00	V

RSE-2DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2563.0	40.41	16	24.41	13.59	54.00	V
2748.3	42.38	18	24.38	11.62	54.00	V

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6404.0	45.81	-4	49.81	28.19	74.00	H
9121.0	43.87	1	42.87	30.13	74.00	V

RSE-2DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6404.0	28.83	-4	32.83	25.17	54.00	H
9121.0	31.86	1	30.86	22.14	54.00	V

RSE-2DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.3	28.2	-13	41.2	11.80	40.00	V

RSE-2DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2653.7	54.14	17	37.14	19.86	74.00	V
2741.5	55.32	18	37.32	18.68	74.00	V
2923.0	55.63	18	37.63	18.37	74.00	V

RSE-2DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2653.7	41.6	17	24.6	12.40	54.00	V
2741.5	42.29	18	24.29	11.71	54.00	V
2923.0	42.47	18	24.47	11.53	54.00	V

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	43.91	-4	47.91	30.09	74.00	V
10655.1	45.35	3	42.35	28.65	74.00	V

RSE-2DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	28.73	-4	32.73	25.27	54.00	V
10655.1	32.94	3	29.94	21.06	54.00	V

RSE-2DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.8	28.7	-13	41.7	11.30	40.00	V

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2593.4	53.1	16	37.1	20.90	74.00	V
2907.8	55.14	18	37.14	18.86	74.00	H

RSE-2DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2593.4	40.65	16	24.65	13.35	54.00	V
2907.8	42.61	18	24.61	11.39	54.00	H

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3941.2	35.37	-10	45.37	38.63	74.00	V
6612.1	45.18	-4	49.18	28.82	74.00	H

RSE-2DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
3941.2	22.97	-10	32.97	31.03	54.00	V
6612.1	28.99	-4	32.99	25.01	54.00	H

RSE-3DH5-CH0-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
62.3	27.27	-13	40.27	12.73	40.00	V

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2632.5	54	17	37	20.00	74.00	V
2763.7	54.44	18	36.44	19.56	74.00	V

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2632.5	41.68	17	24.68	12.32	54.00	V
2763.7	42.08	18	24.08	11.92	54.00	V

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6405.5	44	-4	48	30.00	74.00	H
11521.4	47.56	5	42.56	26.44	74.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6405.5	34.97	-4	38.97	19.03	54.00	H
11521.4	35.22	5	30.22	18.78	54.00	H

RSE-3DH5-CH39-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
61.1	28.43	-13	41.43	11.57	40.00	V

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2639.4	54.94	17	37.94	19.06	74.00	V

2729.8	55.09	18	37.09	18.91	74.00	H
--------	-------	----	-------	-------	-------	---

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2639.4	41.75	17	24.75	12.25	54.00	V
2729.8	41.81	18	23.81	12.19	54.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	45.68	-4	49.68	28.32	74.00	H
10566.5	46.52	3	43.52	27.48	74.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
6508.1	29.13	-4	33.13	24.87	54.00	H
10566.5	32.91	3	29.91	21.09	54.00	H

RSE-3DH5-CH78-30MHz-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
60.6	28.5	-13	41.5	11.50	40.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2612.4	53.74	17	36.74	20.26	74.00	H
2794.7	55.52	18	37.52	18.48	74.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2612.4	41.11	17	24.11	12.89	54.00	H
2794.7	42.7	18	24.7	11.30	54.00	V

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5400.0	44.47	-6	50.47	29.53	74.00	V
8099.1	43.74	0	43.74	30.26	74.00	H

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
5400.0	37.46	-6	43.46	16.54	54.00	V
8099.1	31.03	0	31.03	22.97	54.00	H

Secondary supply(S11)
RSE-3DH5-CH0-30M-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
41.4	29.79	-13	42.79	10.21	40.00	V
55.9	30.24	-12	42.24	9.76	40.00	V

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2606.0	53.23	16	37.23	20.77	74.00	V
2738.3	54.27	18	36.27	19.73	74.00	H

RSE-3DH5-CH0-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2606.0	40.86	16	24.86	13.14	54.00	V
2738.3	42.27	18	24.27	11.73	54.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
7037.9	41.55	-2	43.55	32.45	74.00	V
11485.2	47.33	5	42.33	26.67	74.00	H

RSE-3DH5-CH0-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
7037.9	29.32	-2	31.32	24.68	54.00	V
11485.2	35	5	30	19.00	54.00	H

RSE-3DH5-CH39-30M-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
41.5	31.18	-13	44.18	8.82	40.00	V
55.9	30.44	-12	42.44	9.56	40.00	V

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2736.2	54.77	18	36.77	19.23	74.00	V
2982.3	56.02	19	37.02	17.98	74.00	H

RSE-3DH5-CH39-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2736.2	42.15	18	24.15	11.85	54.00	V
2982.3	43.59	19	24.59	10.41	54.00	H

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4837.0	38.21	-6	44.21	35.79	74.00	V
10347.2	46.83	3	43.83	27.17	74.00	H
17977.5	57.46	19	38.46	16.54	74.00	V

RSE-3DH5-CH39-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
4837.0	25.36	-6	31.36	28.64	54.00	V
10347.2	33.6	3	30.6	20.40	54.00	H
17977.5	45.17	19	26.17	8.83	54.00	V

RSE-3DH5-CH78-30M-1GHz

Frequency (MHz)	QuasiPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
41.6	31.07	-13	44.07	8.93	40.00	V
55.6	30.72	-12	42.72	9.28	40.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2204.2	50.81	13	37.81	23.19	74.00	H
2730.1	55.01	18	37.01	18.99	74.00	V

RSE-3DH5-CH78-1GHz-3GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
2204.2	37.93	13	24.93	16.07	54.00	H
2730.1	41.83	18	23.83	12.17	54.00	V

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	MaxPeak(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
10389.4	47.12	3	44.12	26.88	74.00	H
17999.0	58.07	20	38.07	15.93	74.00	V

RSE-3DH5-CH78-3GHz-18GHz

Frequency (MHz)	Average(dBμV/m)	ARpl (dB)	PMea (dBμV/m)	Margin(dB)	Limit(dBμV/m)	Polarity
10389.4	34.1	3	31.1	19.90	54.00	H
17999.0	45.71	20	25.71	8.29	54.00	V

Note: Only the worst case is written in the report.

6.5 Time Of Occupancy (Dwell Time)

6.5.1 Measurement Limit

Standard	Limit(ms)
FCC 47 Part 15.247 (a) (1) (iii)	<400
RSS-247 5.1	<400

6.5.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.4


1. Connect the EUT through cable and divide with spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 8.
4. Span: Zero span, centered on a hopping channel.
5. RBW shall be $\leq$ channel spacing and where possible RBW should be set $\gg 1/T$, where T is the expected dwell time per channel.
6. Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
7. Detector function: Peak.
8. Trace: Clear-write, single sweep
9. Place markers at the start of the first transmission on the channel and at the end of the last transmission. The dwell time per hop is the time between these two markers.

To determine the number of hops on a channel in the regulatory observation period repeat the measurement using a longer sweep time. When the device uses a single hopping sequence the period of measurement should be sufficient to capture at least 2 hops. When the device uses a dynamic hopping sequence, or the sequence varies, the period of measurement may need to capture multiple hops to better determine the average time of occupancy. Count the number of hops on the channel across the sweep time. The average number of hops on the same channel within the regulatory observation period is calculated from the number of hops on the channel divided by the spectrum analyzer sweep time multiplied by the regulatory observation period. For example, if three hops are counted with an analyzer sweep time of 500 ms and the regulatory observation period is 10 s, then the number of hops in that ten seconds is $3 / 0.5 \times 10$, or 60 hops.

The average time of occupancy is calculated by multiplying the dwell time per hop by the number of hops in the observation period. Where the device shares the same hopping algorithms (dwell time, channel selection) across multiple data rates or modulation schemes then the time of occupancy need only be measured for one of those modulation schemes or data rates. If the dwell time value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in dwell time.

Spectral plots of the channel occupancy shall be included in the report.


6.5.3 Test Setup

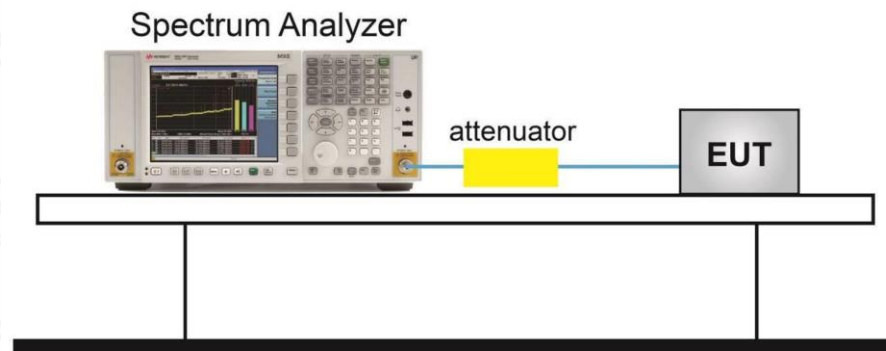


Measurement Results

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.884	130	0.375	≤0.4	PASS
2DH5	Ant1	Hop	2.886	90	0.26	≤0.4	PASS
3DH5	Ant1	Hop	2.889	120	0.347	≤0.4	PASS

Test Graphs

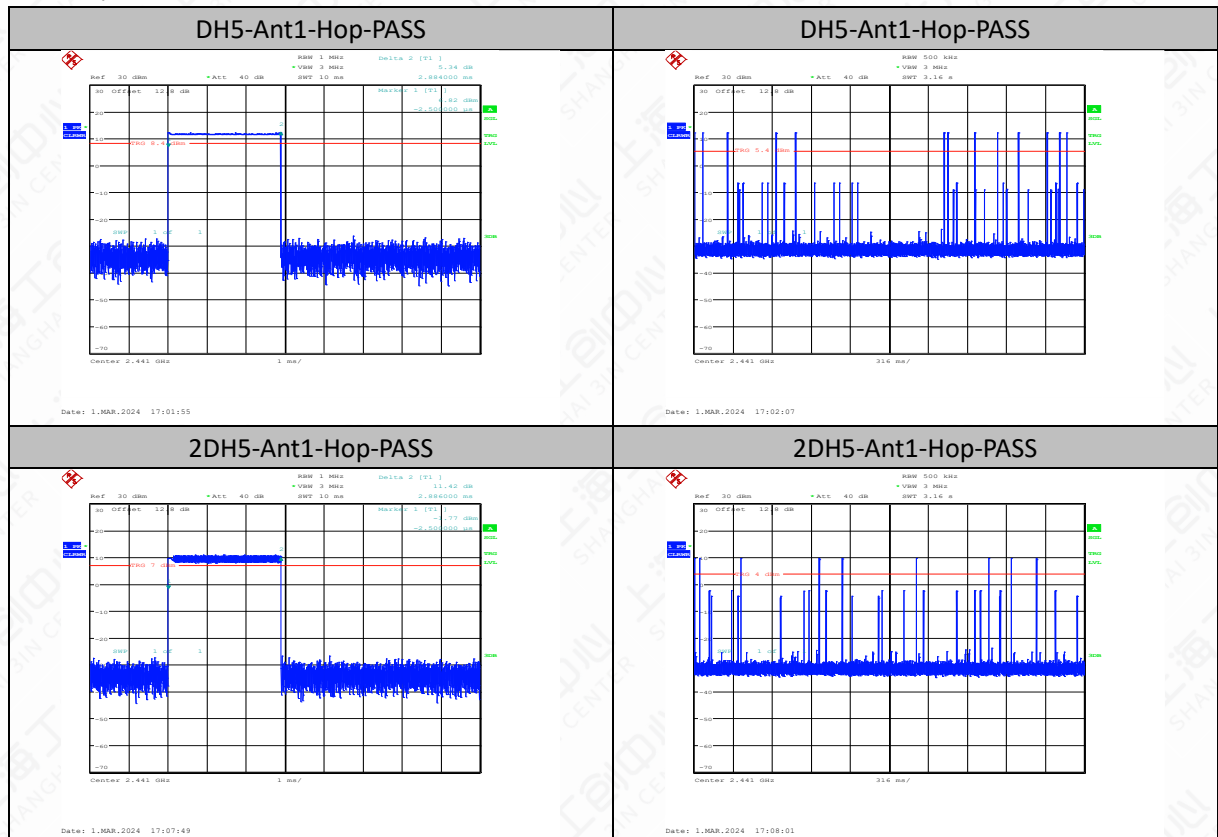

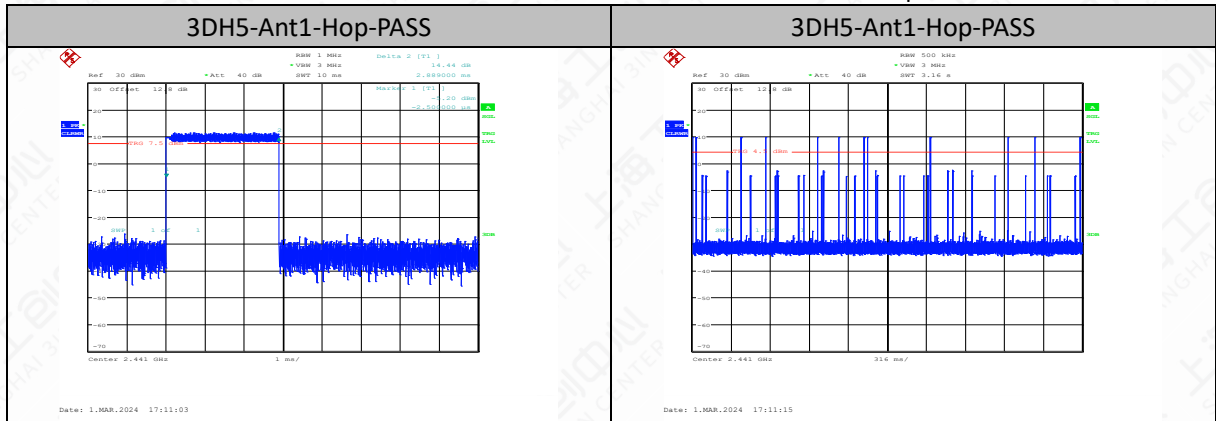

6.6 20dB Bandwidth

6.6.1 Measurement Limit


Standard	Limit
FCC 47 Part 15.247(a)	N/A
RSS-247 5.1	N/A

6.6.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.7

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit maximum power.
3. Set the spectrum analyzer as step 4 to step 7.
4. Span: two or five times of OBW
5. RBW= 1% to 5% of the OBW; VBW is approximately three times of RBW; Max Hold.
6. Select the max peak, and N DB DOWN=20dB.
7. Record the results.


6.6.3 Test Setup

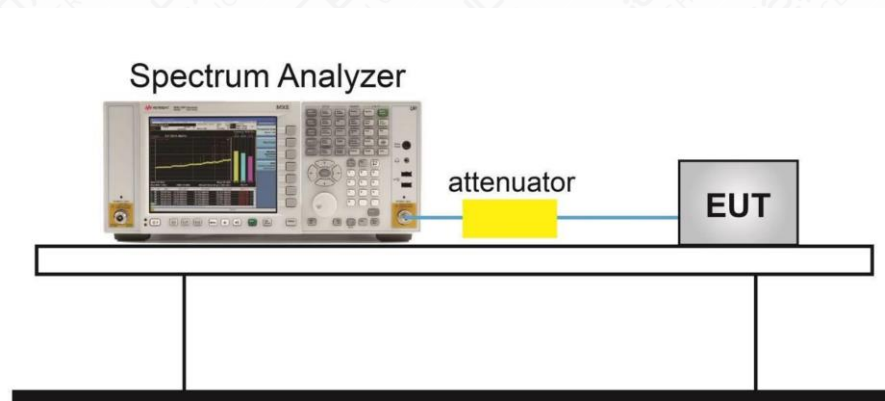


6.6.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.94	2401.56	2402.50	---	---
DH5	Ant1	2441	0.95	2440.56	2441.51	---	---
DH5	Ant1	2480	0.94	2479.56	2480.50	---	---
2DH5	Ant1	2402	1.29	2401.39	2402.68	---	---
2DH5	Ant1	2441	1.29	2440.39	2441.68	---	---
2DH5	Ant1	2480	1.29	2479.39	2480.68	---	---
3DH5	Ant1	2402	1.31	2401.37	2402.68	---	---
3DH5	Ant1	2441	1.31	2440.37	2441.68	---	---
3DH5	Ant1	2480	1.31	2479.37	2480.68	---	---

Test Graphs

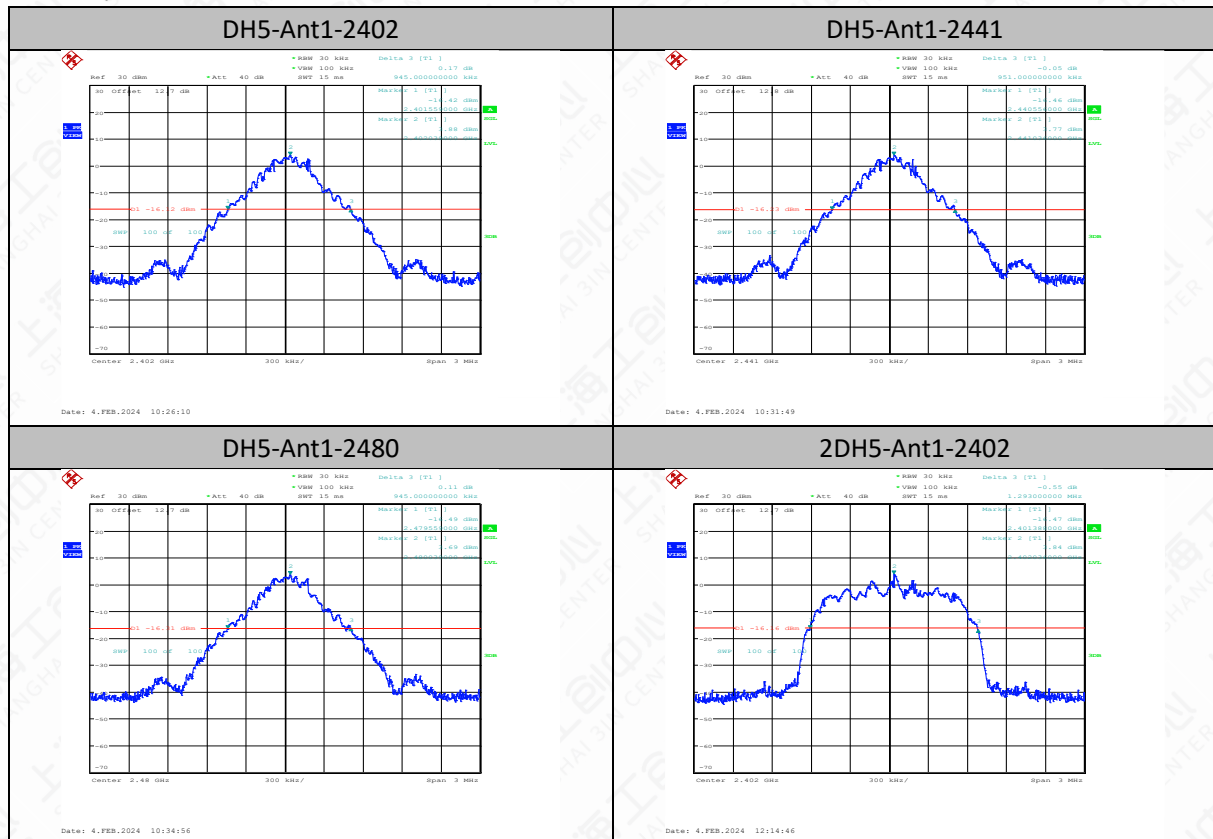

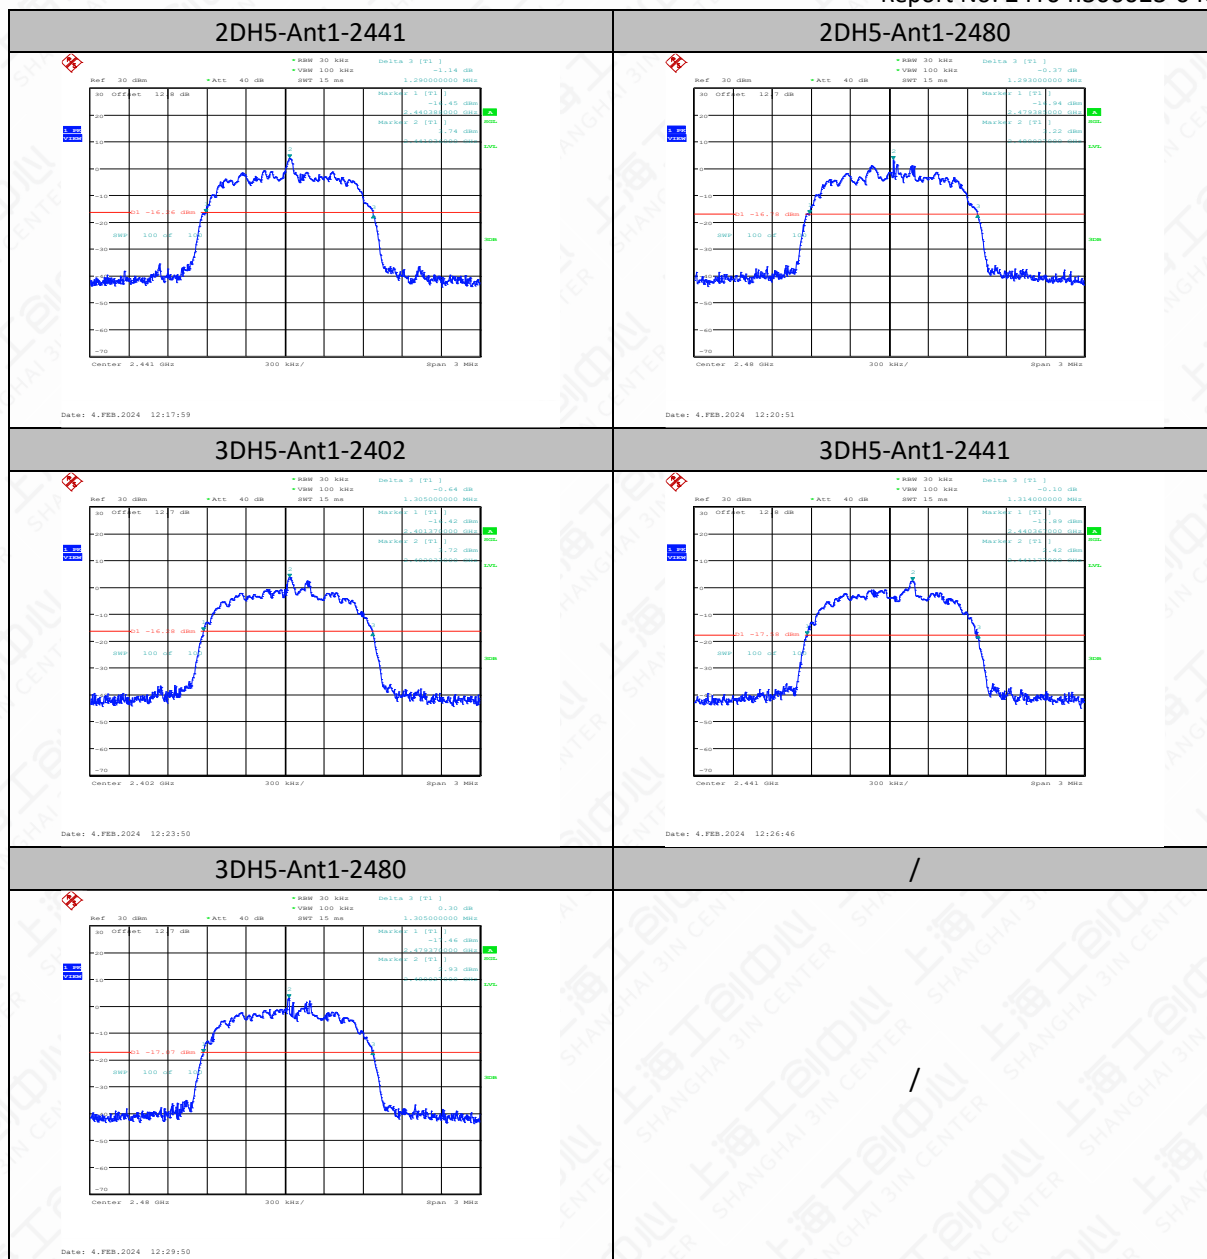

6.7 99% Occupied Bandwidth

6.7.1 Measurement Limit


Standard	Limit
N/A	N/A
RSS-GEN 6.7	N/A

6.7.2 Test procedures

The measurement is according to ANSI C63.10 clause 6.9.3.

1. The output power of EUT was connected to the spectrum analyzer. The path loss was compensated to the results for each measurement.
2. Enable EUT transmitter maximum power continuously.
3. Set RBW shall be in the range of 1% to 5% of the OBW.
4. Set the VBW $\geq [3 \times \text{RBW}]$.
5. Detector = peak.
6. Trace mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize.
9. The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.


6.7.3 Test setup

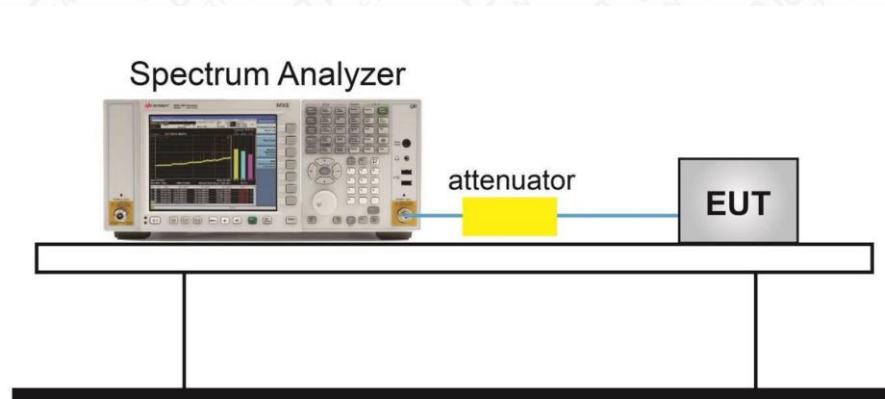


6.7.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.879	2401.5830	2402.4620	---	---
DH5	Ant1	2441	0.876	2440.5830	2441.4590	---	---
DH5	Ant1	2480	0.873	2479.5860	2480.4590	---	---
2DH5	Ant1	2402	1.185	2401.4300	2402.6150	---	---
2DH5	Ant1	2441	1.182	2440.4300	2441.6120	---	---
2DH5	Ant1	2480	1.182	2479.4300	2480.6120	---	---
3DH5	Ant1	2402	1.185	2401.4300	2402.6150	---	---
3DH5	Ant1	2441	1.185	2440.4300	2441.6150	---	---
3DH5	Ant1	2480	1.188	2479.4300	2480.6180	---	---

Test graphs

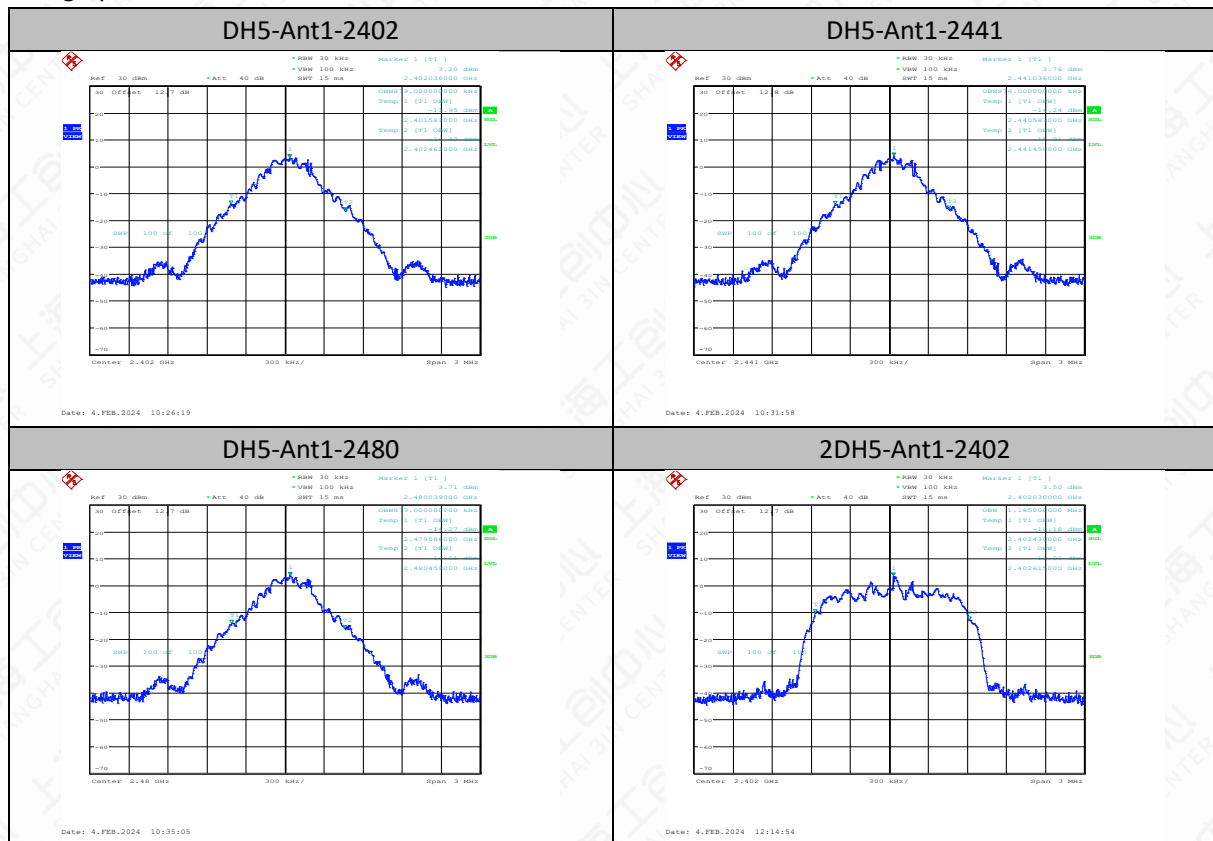

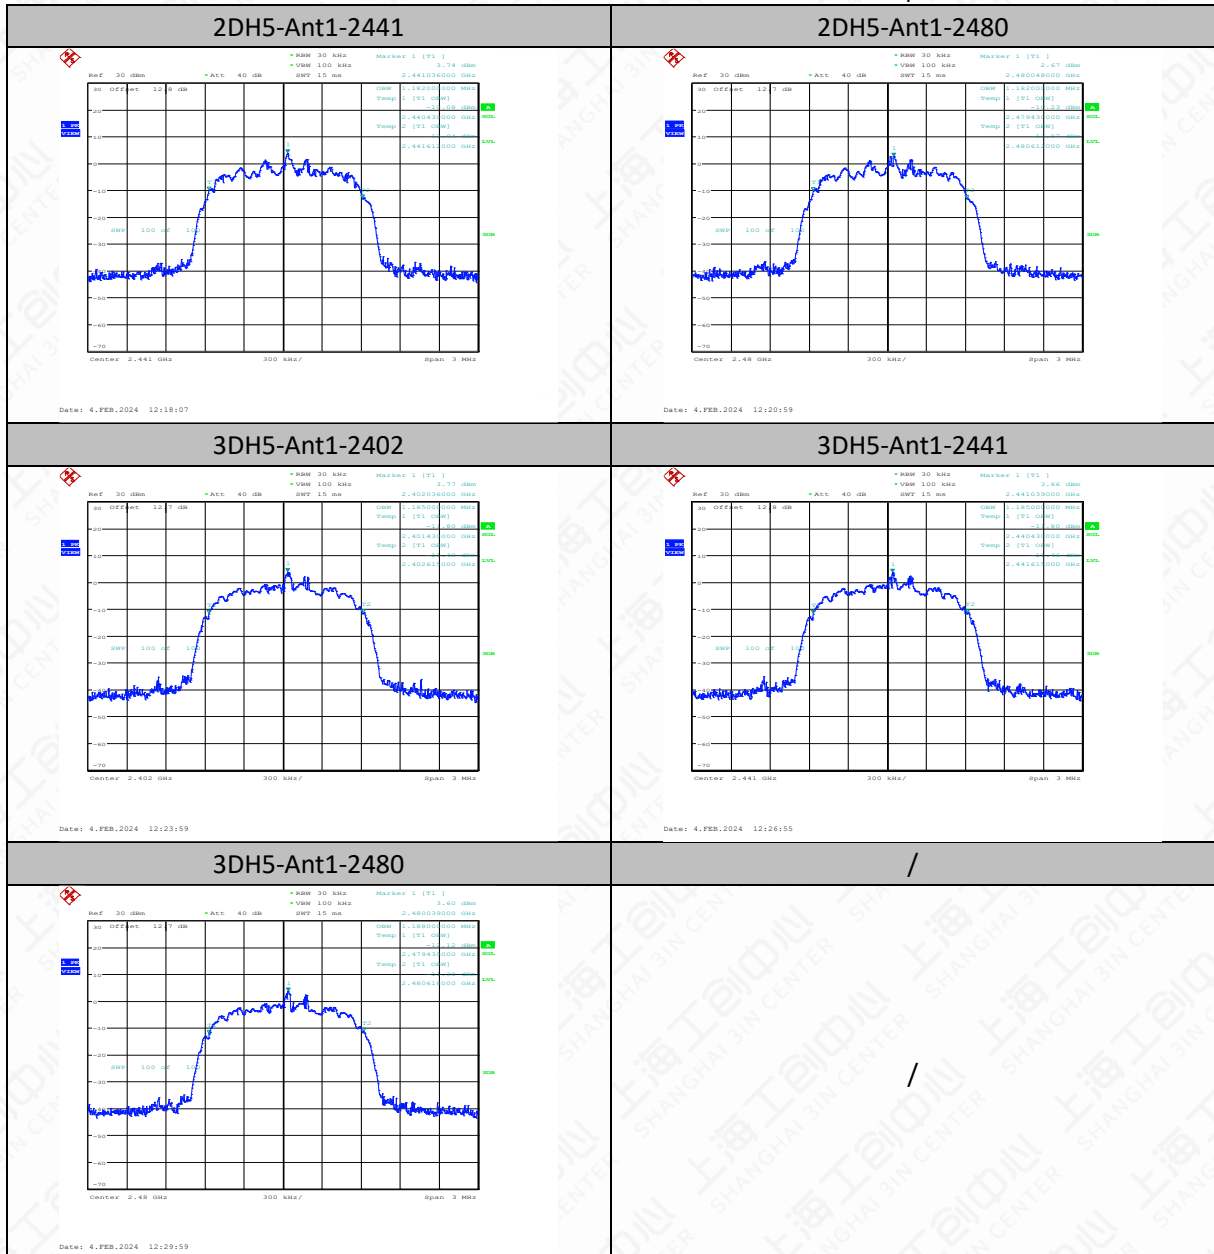

6.8 Carrier Frequency Separation

6.8.1 Measurement Limit


Standard	Limit(KHz)
FCC 47 Part 15.247 (a) (1)	GFSK: Over 25kHz or 20dB bandwidth $\pi/4$ DQPSK; 8DPSK: Over 25kHz or $(2/3)*20$ dB bandwidth
RSS-247 5.1	GFSK: Over 25kHz or 20dB bandwidth $\pi/4$ DQPSK; 8DPSK: Over 25kHz or $(2/3)*20$ dB bandwidth

6.8.2 Test procedures

The measurement is according to ANSI C63.10 clause 7.8.2.

1. Connect the EUT through cable and divide and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: Wide enough to capture the peaks of two adjacent channels.
4. RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
5. Video (or average) bandwidth (VBW) $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.


6.8.3 Test Setup

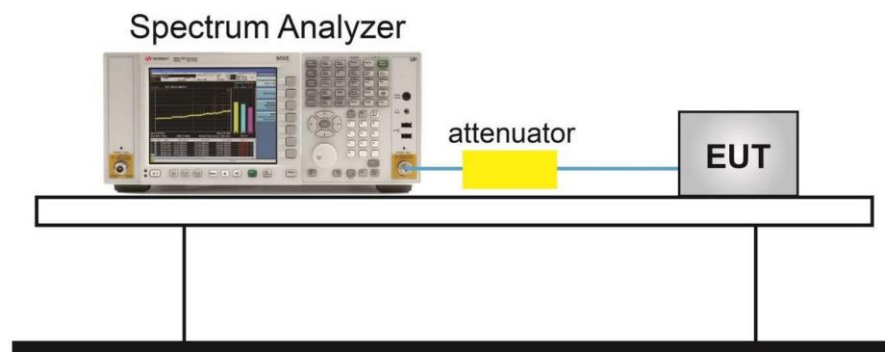

6.8.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1	≥0.950	PASS
2DH5	Ant1	Hop	1.016	≥0.860	PASS
3DH5	Ant1	Hop	1.029	≥0.873	PASS

Test Graphs

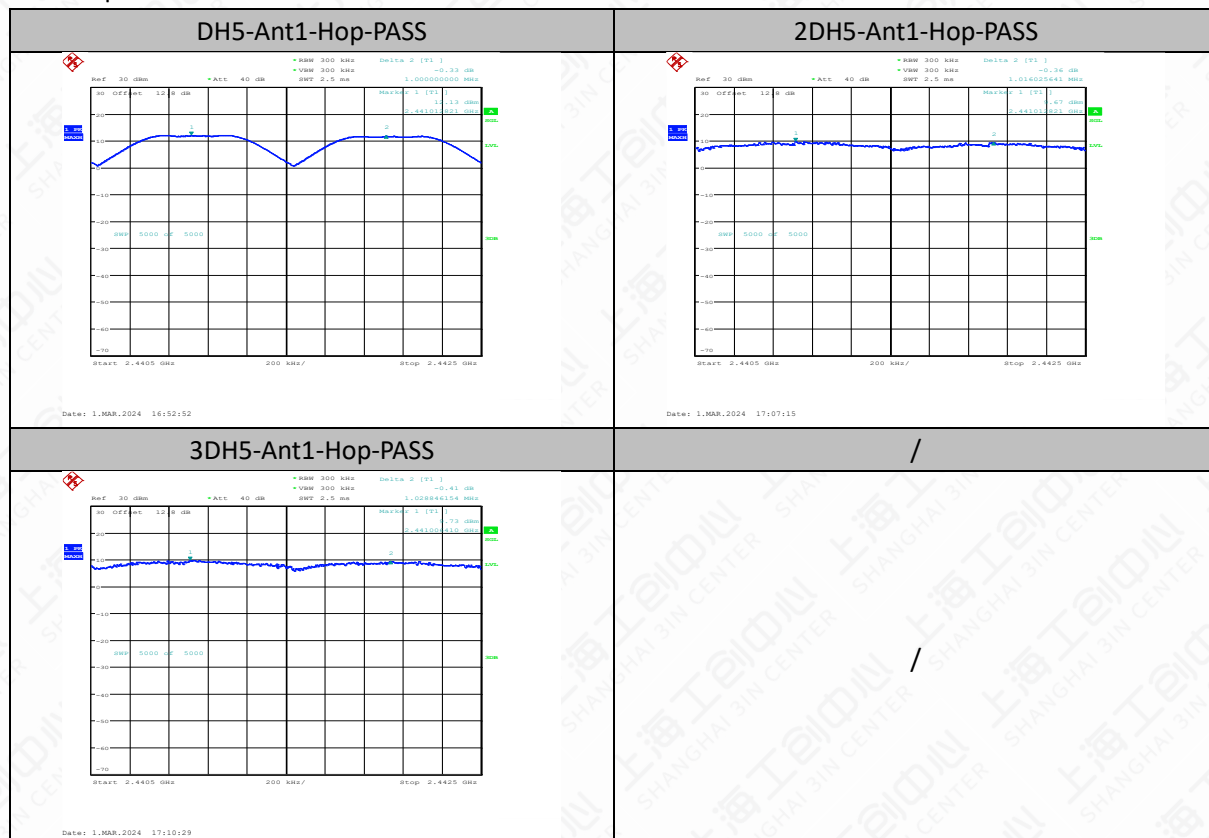

6.9 Number Of Hopping Channels

6.9.1 Measurement Limit


Standard	Limit
FCC 47 CFR Part 15.247 (a)(1)(iii)	At least 15 non-overlapping channels
RSS-247 5.1	At least 15 non-overlapping channels

6.9.2 Test procedure

The measurement is according to ANSI C63.10 clause 7.8.3.

1. Connect the EUT through cable and divide with CMW270 and spectrum analyzer.
2. Enable the EUT transmit in hopping mode.
3. Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
4. RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
5. VBW $\geq$ RBW.
6. Sweep: Auto.
7. Detector function: Peak.
8. Trace: Max hold.
9. Allow the trace to stabilize.
10. Record the test results.


6.9.3 Test Setup

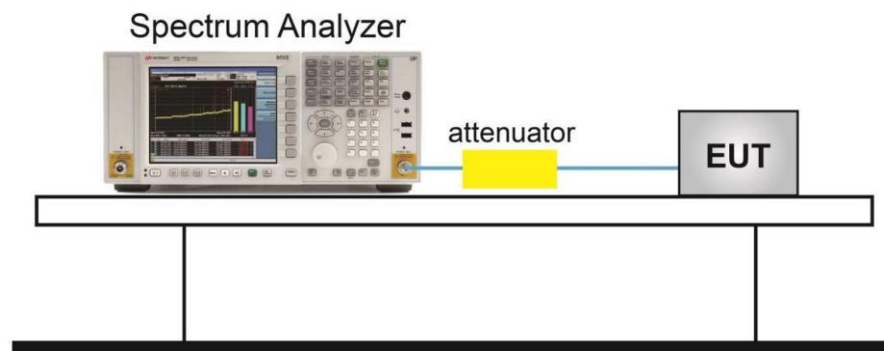

6.9.4 Measurement Result

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥ 15	PASS
2DH5	Ant1	Hop	79	≥ 15	PASS
3DH5	Ant1	Hop	79	≥ 15	PASS

Test Graphs

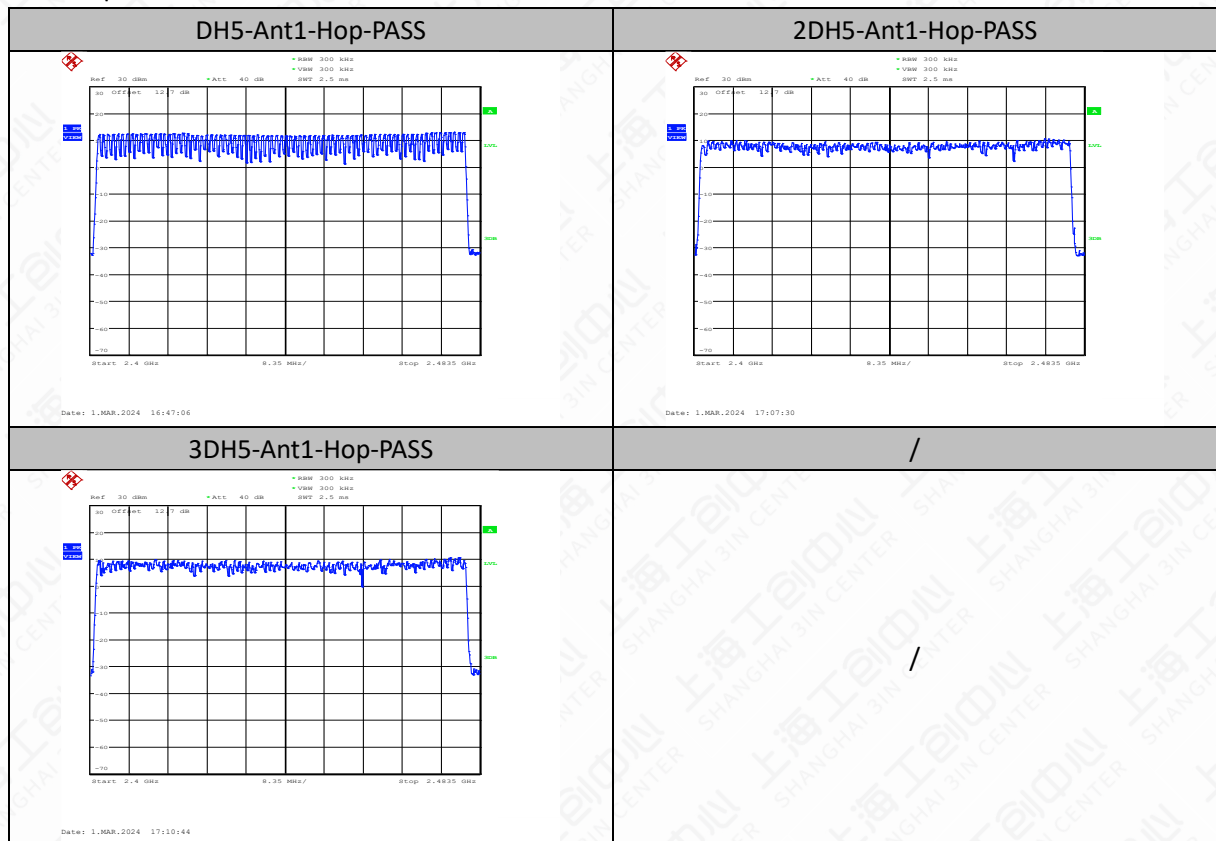


6.10 AC Powerline Conducted Emission

6.10.1 Method of Measurement: ANSI C63.10-2013-clause 6.2

1. The one EUT cable configuration and arrangement and mode of operation that produced the emission with the highest amplitude relative to the limit is selected for the final measurement, while applying the appropriate modulating signal to the EUT.
2. If the EUT is relocated from an exploratory test site to a final test site, the highest emissions shall be remaximized at the final test location before final ac power-line conducted emission measurements are performed.
3. The final test on all current-carrying conductors of all of the power cords to the equipment that comprises the EUT (but not the cords associated with other non-EUT equipment in the system) is then performed for the full frequency range for which the EUT is being tested for compliance without further variation of the EUT arrangement, cable positions, or EUT mode of operation.
4. If the EUT is comprised of equipment units that have their own separate ac power connections, e.g., floor-standing equipment with independent power cords for each shelf that are able to connect directly to the ac power network, each current-carrying conductor of one unit is measured while the other units are connected to a second (or more) LISN(s). All units shall be separately measured. If a power strip is provided by the manufacturer, to supply all of the units making up the EUT, only the conductors in the power cord of the power strip shall be measured.

If the EUT uses a detachable antenna, these measurements shall be made with a suitable dummy load connected to the antenna output terminals; otherwise, the tests shall be made with the antenna connected and, if adjustable, fully extended. When measuring the ac conducted emissions from a device that operates between 150 kHz and 30 MHz a non-detachable antenna may be replaced with a dummy load for the measurements within the fundamental emission band of the transmitter, but only for those measurements.³⁶ Record the six highest EUT emissions relative to the limit of each of the current-carrying conductors of the power cords of the equipment that comprises the EUT over the frequency range specified by the procuring or regulatory agency. Diagram or photograph the test setup that was used. See Clause 8 for full reporting requirements.

6.10.2 Test Setup

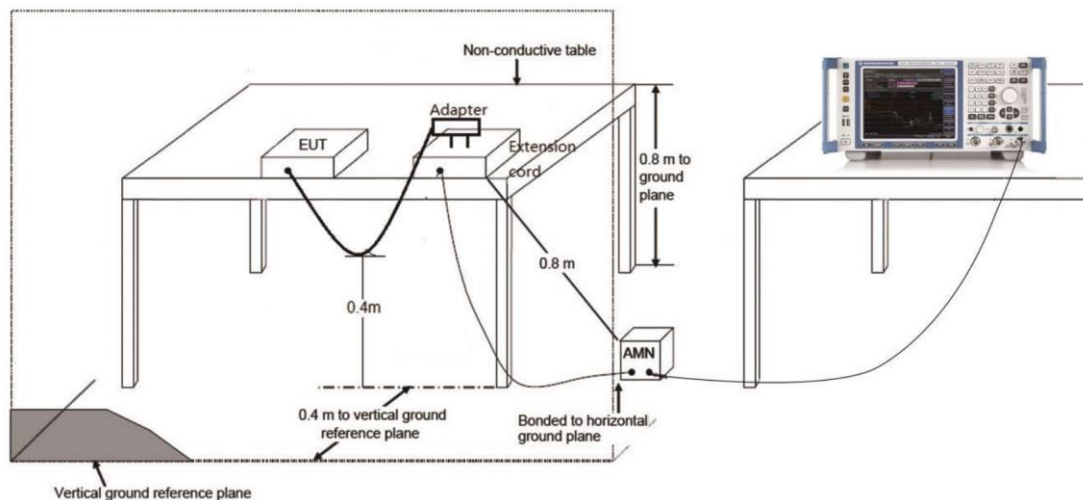

6.10.3 Test Condition

Voltage (V)	Frequency (Hz)
120	60


6.10.4 Measurement limit

(Quasi-peak-average Limit)

Frequency range (MHz)	Quasi-peak Limit (dBμV)	Average Limit (dBμV)	Conclusion
0.15 to 0.5	66 to 56	56 to 46	P
0.5 to 5	56	46	
5 to 30	60	50	

NOTE: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

6.10.5 Measurement Result

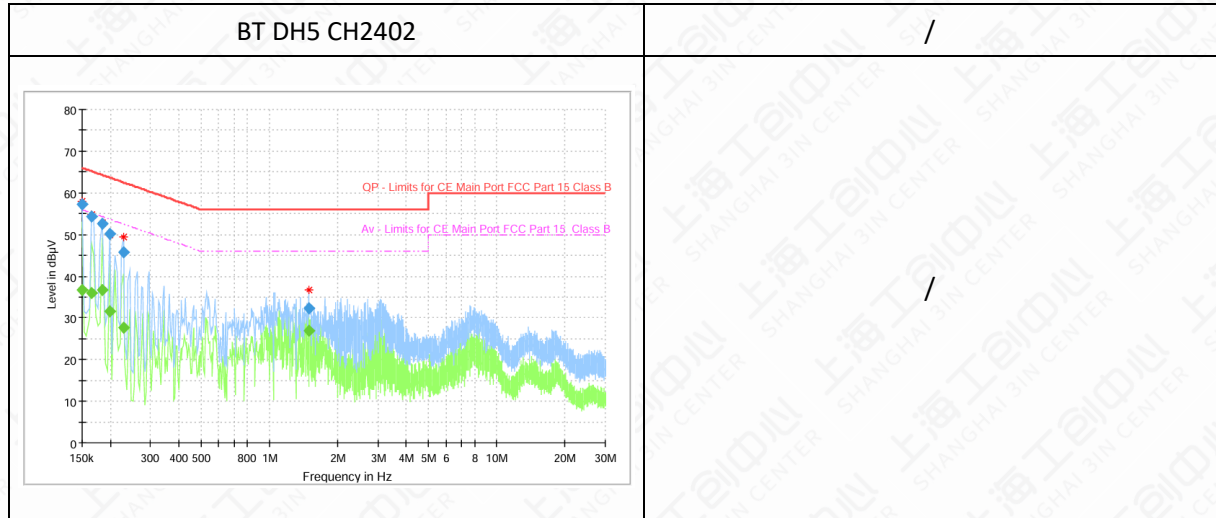

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Meas.Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.150000	57.13	---	66.00	8.87	15000.0	9.000	N	ON	9.6
0.150000	---	36.74	56.00	19.26	15000.0	9.000	N	ON	9.6
0.164925	54.28	---	65.21	10.93	15000.0	9.000	L1	ON	9.6
0.164925	---	35.95	55.21	19.26	15000.0	9.000	L1	ON	9.6
0.183581	52.61	---	64.32	11.71	15000.0	9.000	L1	ON	9.6
0.183581	---	36.78	54.32	17.54	15000.0	9.000	L1	ON	9.6
0.198506	50.03	---	63.67	13.64	15000.0	9.000	L1	ON	9.6
0.198506	---	31.51	53.67	22.16	15000.0	9.000	L1	ON	9.6
0.228356	45.84	---	62.51	16.67	15000.0	9.000	L1	ON	9.6
0.228356	---	27.61	52.51	24.90	15000.0	9.000	L1	ON	9.6
1.485788	32.21	---	56.00	23.79	15000.0	9.000	L1	ON	9.6
1.485788	---	26.90	46.00	19.10	15000.0	9.000	L1	ON	9.6

Note: All modes have been tested and only the worst mode is recorded in the report.

Annex A: Revised History

Version	Revised Content
V0	Initial

Annex B: Accreditation Certificate



Accredited Laboratory

A2LA has accredited

**INDUSTRIAL INTERNET INNOVATION CENTER
(SHANGHAI) CO., LTD.**
Shanghai, People's Republic of China

for technical competence in the field of
Electrical Testing

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 *General requirements for the competence of testing and calibration laboratories*. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).



Presented this 20th day of September 2023.



Mr. Trace McInturf, Vice President, Accreditation Services
For the Accreditation Council
Certificate Number 3682.01
Valid to February 28, 2025

For the tests to which this accreditation applies, please refer to the laboratory's Electrical Scope of Accreditation.

END OF REPORT