



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 1 of 122

TEST REPORT

Application No.: SUCR2503000255AT
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer: Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
EUT Description: Wireless Data Terminal
Model No.: TFB1B
Trade Mark: SUNMI
FCC ID: 2AH25M3L
Standards: FCC 47 CFR Part 15, Subpart E
Date of Receipt: March 28, 2025
Date of Test: May 23, 2025 to May 26, 2025
Date of Issue: June 11, 2025

Test Result :	PASS *
----------------------	---------------

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Wireless Laboratory

South of No. 6 Plant, No. 1, RunSheng Road, Suzhou Industrial Park,
Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000

t (86-512) 6229 2980
www.sgsgroup.com.cn




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 2 of 122

Version

Revision Record			
Version	Description	Date	Remark
01	Original	June 11, 2025	/

Authorized for issue by:				
Tested By				
		Hayley Zhang / Project Manager		
Approved By				
		Cloud Peng/Technical Manager		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 3 of 122

Contents

Version	2
1 Test Summary	4
2 General Information	5
2.1 Details of Client	5
2.2 Test Location	5
2.3 Test Facility	5
2.4 General Description of EUT	6
2.5 Test Environment and Mode	9
2.6 Description of Support Units	9
2.7 Worst-case configuration and mode	9
3 Equipment List	10
4 Measurement Uncertainty (95% confidence levels, k=2)	12
5 Test results and Measurement Data	13
5.1 Antenna Requirement	13
5.2 AC Power Line Conducted Emissions	14
5.3 Duty Cycle	18
5.4 Maximum e.i.r.p.	19
5.5 26dB Emission Bandwidth	20
5.6 99% Occupied Bandwidth	21
5.7 Power Spectral Density	22
5.8 In-Band Emissions	23
5.9 Contention Based Protocol	24
5.10 Radiated Spurious Emissions	26
5.11 Restricted bands around fundamental frequency	28
6 Photographs - Setup Photos	30
7 Appendix	31



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 4 of 122

1 Test Summary

Test Item	FCC Rule No.	Test Requirements	Test Result	Result
Antenna Requirement	15.203/15.407(a)	--	Clause 3.1	PASS
AC Power Line Conducted Emissions	15.407(b)(8)	< FCC 15.207 limits	Clause 3.2	PASS
Duty Cycle	--	No limit.	Clause 3.3	Reference report SUCR250100002106
Maximum e.i.r.p.	15.407(a)(8)	< 24dBm over the frequency band of Operation, e.i.r.p.	Clause 3.4	PASS
26dB Emission Bandwidth	15.407(a)(11)	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.	Clause 3.5	Reference report SUCR250100002106
99% Occupied Bandwidth	-	No limit.	Clause 3.6	Reference report SUCR250100002106
Maximum Power Spectral Density	15.407(a)(8)	< -1dBm/MHz e.i.r.p.	Clause 3.7	PASS
In-Band Emissions	15.407(b)(7)	EUT must meet the limits detailed in 15.407(b)(7)	Clause 3.8	Reference report SUCR250100002106
Contention Based Protocol	15.407(d)(6)	EUT must detect AWGN signal with 90% (or better) certainty	Clause 3.9	PASS
Unwanted Emissions that fall Out of the Restricted Bands (Radiated)	15.407(b)(6) 15.205, 15.209	< -27dBm/MHz e.i.r.p. outside of the 5.925 - 7.125GHz band	Clause 3.10	PASS
Unwanted Emissions in the Restricted Bands (Radiated)	15.407(b)(6) 15.205, 15.209	Emissions in restricted bands must meet the radiated limits detailed in 15.209	Clause 3.11	PASS

Remark:

This test report (Report No.: SUCR250300025506 issue on 2025/06/11) is based on the original test report (Report No.: SUCR250100002106 issue on 2025/06/09).

Review this report and original report, this report just changing the parts according to the declaration letter from client.

Considering to the difference, pre-scan were performed on the sample in this report to find the items which can be influential to the result in the original test report for fully retest.

Therefore in this report only the maximum e.i.r.p., maximum power spectral density, ac power line conducted emission, Contention Based Protocol and radiated spurious emissions based on the worst case of the original report with report number SUCR250100002106 issue on 2025/06/09 and other test data in this report are based on the previous report with report number SUCR250100002106 issue on 2025/06/09.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 5 of 122

2 General Information

2.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address of Applicant:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address of Manufacturer:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

2.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test engineer:	Ives Cheng, King-p Li

2.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 717327



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 6 of 122

2.4 General Description of EUT

EUT Description:	Wireless Data Terminal	
Model No.:	TFB1B	
Trade Mark:	SUNMI	
Hardware Version:	V1.2	
Software Version:	T602AA_EVT_14.0_SUNMI_202503131820.00-00	
Power Supply:	3.87V from battery	
IEEE 802.11 WLAN Mode Supported:	☒ 802.11ax (20 MHz channel bandwidth) ☒ 802.11ax (40 MHz channel bandwidth) ☒ 802.11ax (80 MHz channel bandwidth)	
Operation Frequency:	IEEE 802.11 ax(HE20/40/80): 5925 MHz ~ 6425 MHz IEEE 802.11 ax(HE20/40/80): 6425 MHz ~ 6525 MHz IEEE 802.11 ax(HE20/40/80): 6525 MHz ~ 6875 MHz IEEE 802.11 ax(HE20/40/80): 6875 MHz ~ 7125 MHz	
Type of Modulation:	OFDM/OFDMA	
FCC Classification:	6GHz Low Power Indoor Client (6XD)	
Antenna Type:	FPC Antenna	
Smart System:	☒ MIMO	802.11ax: 2Tx & 2Rx
Antenna Gain:	UNII-5:-6.74dBi(Ant2); -6.72dBi(Ant3) UNII-6:-10.02dBi(Ant2); -9.50dBi(Ant3) UNII-7:-7.79dBi(Ant2); -6.41dBi(Ant3) UNII-8:-7.79dBi(Ant2); -6.44dBi(Ant3)	
	Note: The antenna gain are derived from the gain information report provided by the manufacturer.	
Remark: 1.As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information. 2.The device does not support 802.11ax OFDMA Partial RU tones (26T, 52T, 106T, etc.) 3.In FCC 15.31, for each band in which the device can be operated with the device operating at the number of frequencies in each band specified in the following table, and the selected channel to perform the test as below:		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 7 of 122

Frequency range over which device operates	Number of Measurement Frequencies Required	Location of Measurement Frequency in Band of Operation
1 MHz or less	1	centre
1 MHz to 10 MHz	2	1 near high end, 1 near low end
Greater than 10 MHz	3	1 near high end, 1 near centre, 1 near low end

For UNII-5:		
Mode	Channel	Frequency(MHz)
IEEE 802.11ax 20MHz	1	5955
	45	6175
	93	6415
IEEE 802.11ax 40MHz	3	5965
	43	6165
	91	6405
IEEE 802.11ax 80MHz	7	5985
	39	6145

For UNII-6:		
Mode	Channel	Frequency(MHz)
IEEE 802.11ax 20MHz	97	6435
	105	6475
	113	6515
IEEE 802.11ax 40MHz	99	6445
	107	6485
	115	6525
IEEE 802.11ax 80MHz	87	6385
	103	6465



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 8 of 122

For UNII-7:		
Mode	Channel	Frequency(MHz)
IEEE 802.11ax 20MHz	117	6535
	149	6695
	181	6855
	185	6875
IEEE 802.11ax 40MHz	123	6565
	147	6685
	179	6845
IEEE 802.11ax 80MHz	119	6545
	135	6625
	151	6705
	167	6785
	183	6865

For UNII-8:		
Mode	Channel	Frequency(MHz)
IEEE 802.11ax 20MHz	189	6895
	209	6995
	233	7115
IEEE 802.11ax 40MHz	187	6885
	195	6925
	203	6965
	227	7085
IEEE 802.11ax 80MHz	199	6945
	215	7025



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 9 of 122

2.5 Test Environment and Mode

Environment Parameter	101 kPa Selected Values During Tests	
Relative Humidity	44-46 % RH Ambient	
Value	Temperature(°C)	Voltage(V)
NTNV	22~23	3.87
Remark: NV: Normal Voltage NT: Normal Temperature		

2.6 Description of Support Units

The EUT has been tested as an independent unit.

2.7 Worst-case configuration and mode

Low data rate was used to test on antenna port conducted tests and radiated spurious emissions since it has the highest maximum power. Following are the worst-case data rates set for test:

Modulation Type	SISO - Data Rate	MIMO - Data Rate
802.11ax (HE 20)	MCS0 (8 Mbps)	/
802.11ax (HE 40)	MCS0 (16 Mbps)	/
802.11ax (HE 80)	MCS0 (34 Mbps)	/



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 10 of 122

3 Equipment List

RF Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Shielding Room	Brilliant-emc	N/A	SUWI-04-08-01	2022/11/09	2025/11/08
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-07	2025/02/13	2026/02/12
Measurement Software	Tonscend	TST272 V2.0	SUWI-03-55-03	NCR	NCR
Signal Analyzer	ROHDE&SCHWARZ	FSW43	SUWI-01-02-04	2025/01/20	2026/01/19
Temperature Chamber	ESPEC	SU-242	SUWI-01-13-02	2025/05/07	2026/05/06
Wideband Radio Communication Tester	ROHDE&SCHWARZ	CMW500	SUWI-01-16-05	2025/01/21	2026/01/20
DC Power Supply	HYELEC	HY3005B	SUWI-01-18-01	2025/01/15	2026/01/14
Power meter	Anritsu	ML2495A	SUWI-01-31-01	2024/11/19	2025/11/18
Pulse power sensor	Anritsu	MA2411B	SUWI-01-32-01	2024/11/19	2025/11/18
MXG Vector signal genitor	KEYSIGHT	N5182B	SUWI-01-38-01	2025/01/15	2026/01/14
Router	ASUS	GT-AXE11000(FCC ID MSQ-RTAXJF00)	SUWI-03-14-02	NCR	NCR
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2024/11/19	2025/11/18

CE Test System					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Test receiver	ROHDE&SCHWARZ	ESR7	SUWI-01-10-01	2025/01/15	2026/01/14
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-06	2025/02/13	2026/02/12
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-03	2025/05/08	2026/05/07
Artificial network	ROHDE&SCHWARZ	ENV216	SUWI-01-19-04	2025/05/08	2026/05/07
Measurement Software	Tonscend	JS32-CE 4.0.0.2	SUWI-02-09-05	NCR	NCR



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 11 of 122

RSE Test Equipment					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy/mm/dd)	Cal.Due date (yyyy/mm/dd)
Semi-Anechoic Chamber	Brilliant-emc	N/A	SUWI-04-02-01	2023/06/03	2026/06/02
Temperature and humidity meter	MingGao	TH101B	SUWI-01-01-05	2025/02/13	2026/02/12
Signal Analyzer	ROHDE &SCHWARZ	FSW43	SUWI-01-02-04	2025/01/20	2026/01/19
Signal Analyzer	KEYSIGHT	N9020A	SUWI-01-02-07	2024/11/21	2025/11/20
Test receiver	ROHDE &SCHWARZ	ESR7	SUWI-01-10-01	2025/01/15	2026/01/14
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	VULB 9168	SUWI-01-11-04	2024/08/22	2026/08/21
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9120D	SUWI-01-11-02	2025/05/07	2027/05/06
Receiving antenna	SCHWRZBECK MESS-ELEKTRONIK	BBHA 9170	SUWI-01-11-03	2025/05/07	2027/05/06
Active Loop Antenna	SCHWRZBECK MESS-ELEKTRONIK	FMZB 1519B	SUWI-01-21-01	2025/05/07	2027/05/06
Amplifier	Tonscend	TAP9K3G40	SUWI-01-14-01	2025/01/16	2026/01/15
Amplifier	Tonscend	TAP01018050	SUWI-01-14-02	2025/01/16	2026/01/15
Amplifier	Tonscend	TAP18040048	SUWI-01-14-03	2025/01/20	2026/01/19
Measurement Software	Tonscend	JS32-RE V4.0.0.0	SUWI-02-09-04	NCR	NCR

Remark: NCR=No Calibration Requirement.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 12 of 122

4 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Total RF power, conducted	±0.54dB
2	RF power density, conducted	±1.03dB
3	Conduction Emission	± 2.90dB (150kHz to 30MHz)
4	Radiated Emission	± 3.13dB (9k -30MHz)
		± 4.8dB (30M -1GHz)
		± 4.8dB (1GHz to 18GHz)
		± 4.80dB (Above 18GHz)
Remark: The U _{lab} (lab Uncertainty) is less than U _{cispr/ETSI} (CISPR/ETSI Uncertainty), so the test results – compliance is deemed to occur if no measured disturbance level exceeds the disturbance limit; – non-compliance is deemed to occur if any measured disturbance level exceeds the disturbance limit.		



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 13 of 122

5 Test results and Measurement Data

5.1 Antenna Requirement

Standard requirement:	47 CFR Part 15 Section 15.203
The antenna is FPC Antenna and no consideration of replacement. The best case gain of the antenna is UNII-5:-6.74dBi(Ant2); -6.72dBi(Ant3) UNII-6:-10.02dBi(Ant2); -9.50dBi(Ant3) UNII-7:-7.79dBi(Ant2); -6.41dBi(Ant3) UNII-8:-7.79dBi(Ant2); -6.44dBi(Ant3)	
<i>Note:</i> <i>The antenna gain are derived from the gain information report provided by the manufacturer.</i>	
<i>Remark:</i> <i>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</i>	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01


Page: 14 of 122

5.2 AC Power Line Conducted Emissions

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013 Section 6.2		
Test Frequency Range:	150kHz to 30MHz		
Receiver Setup:	RBW = 9kHz, VBW = 30kHz		
Limit:	Frequency range (MHz)	Limit (dBUV)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
* Decreases with the logarithm of the frequency.			
Test Procedure:	1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.		

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
 Rev.: 01
 Page: 15 of 122

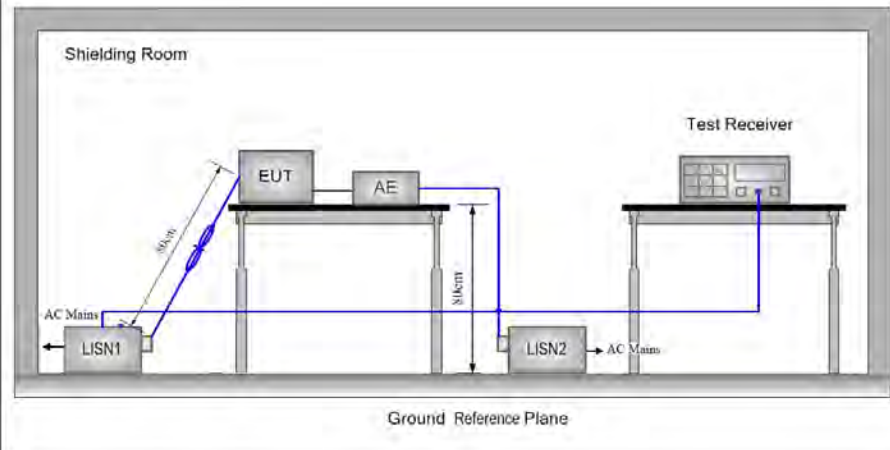Test Setup:	
Test Mode:	BT Link + WIFI 2.4G Link + WIFI 5G/6E Link
Instruments Used:	Refer to section 3 for details
Test Results:	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506


Rev.: 01


Page: 16 of 122

Measurement Data


An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

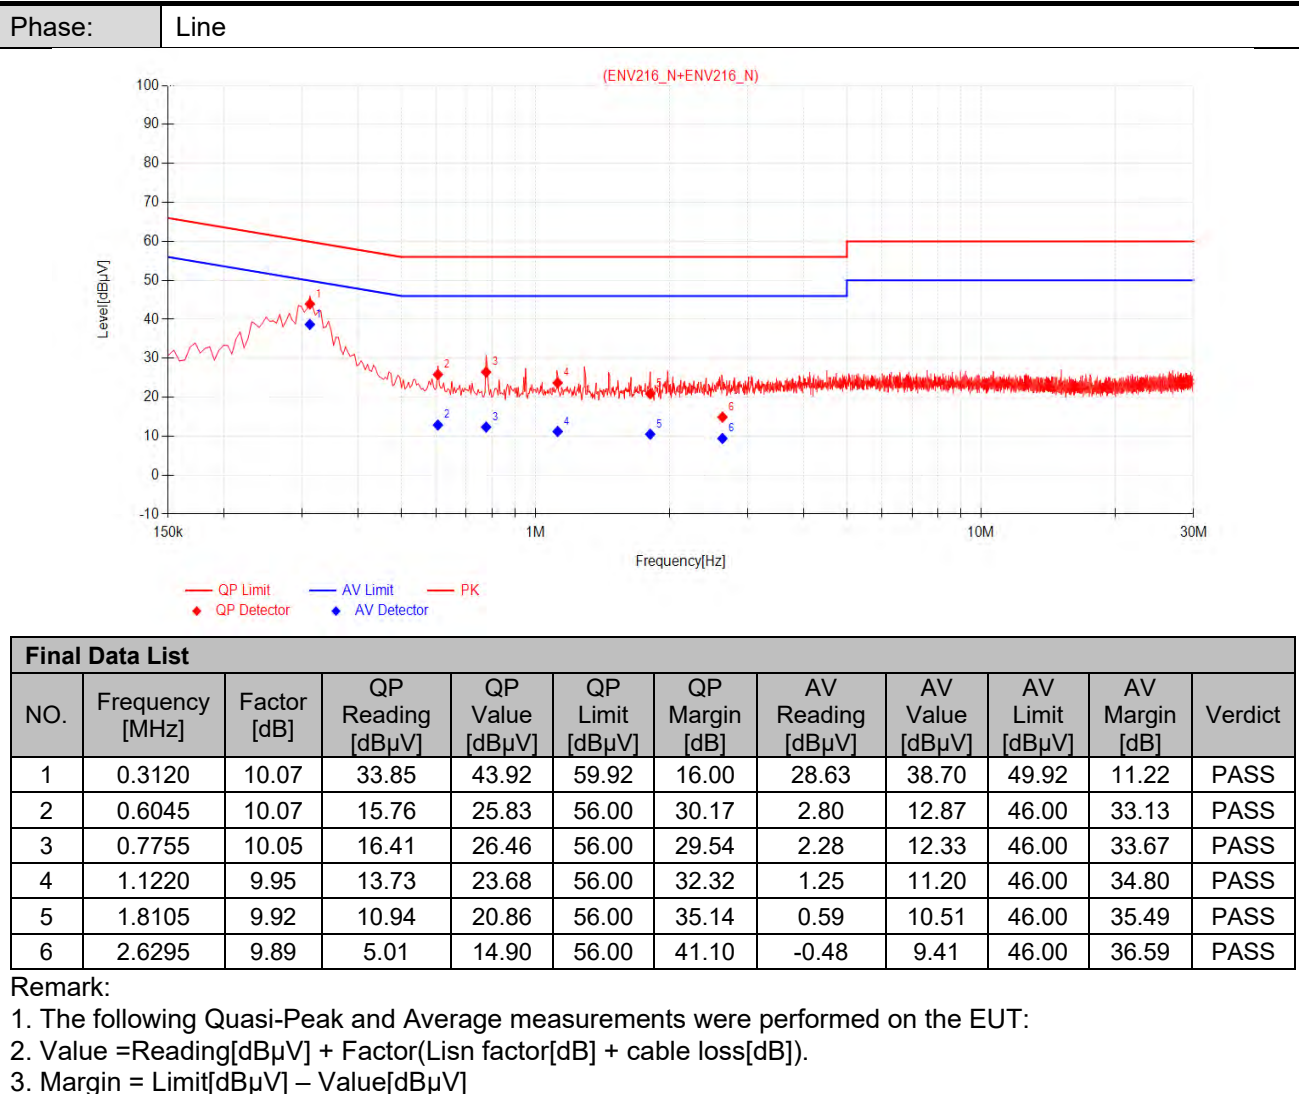


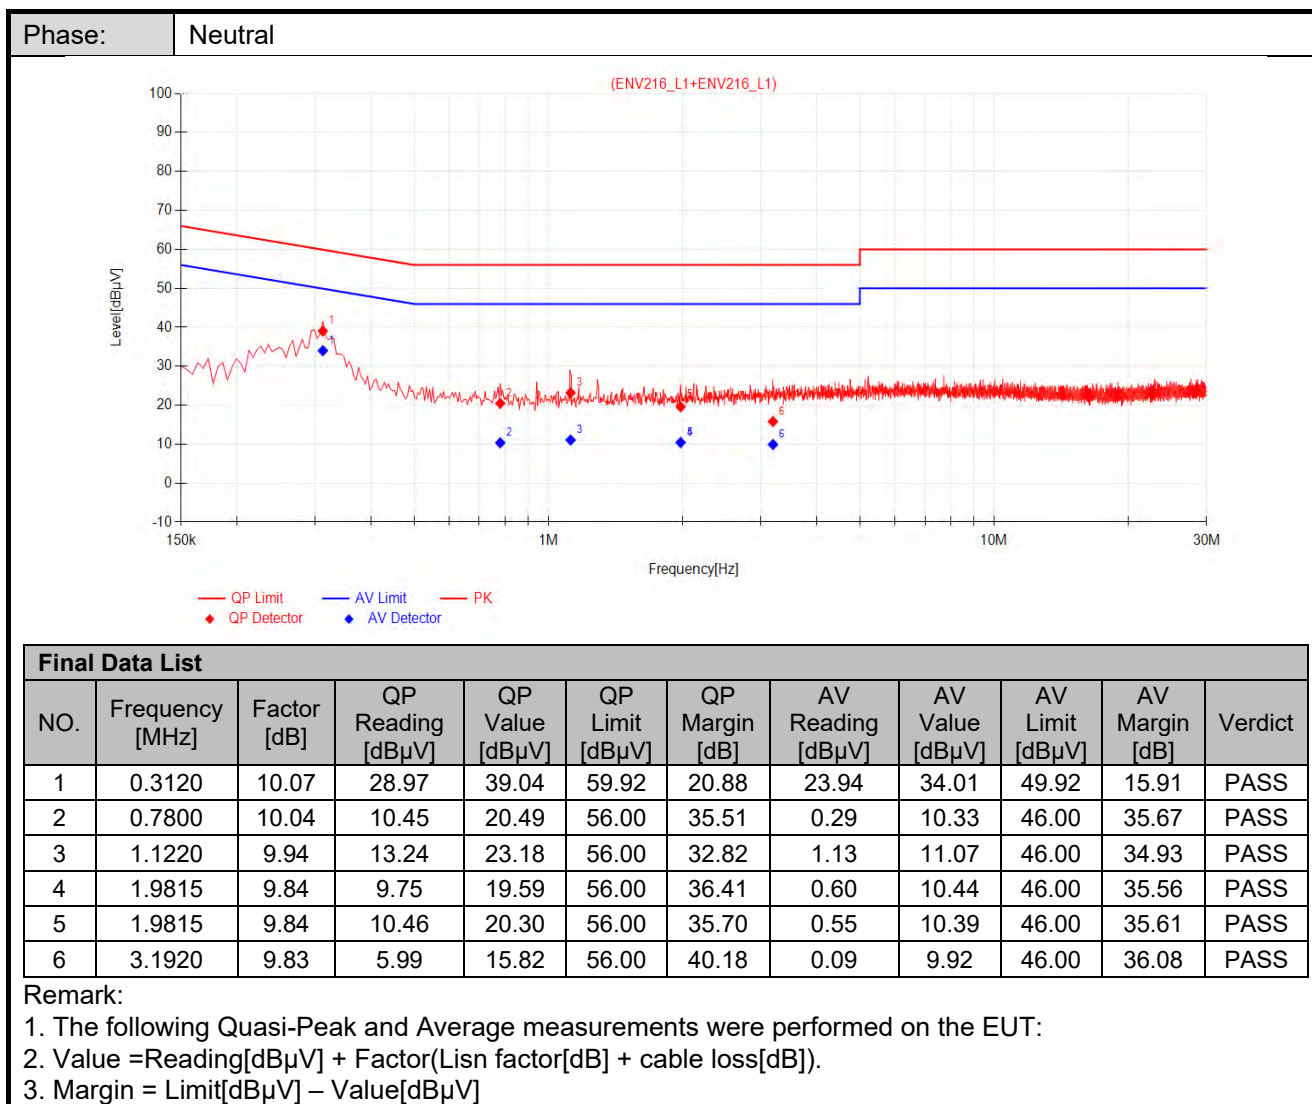


5.3 Duty Cycle

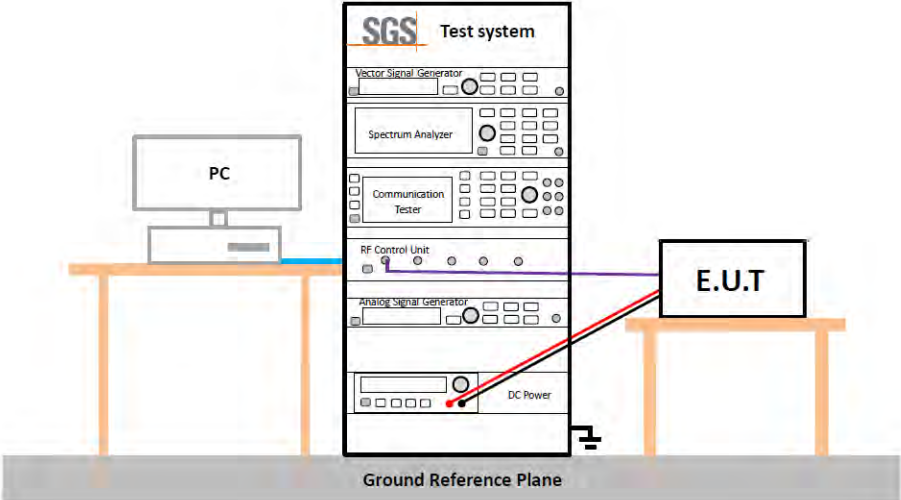Test Requirement:	ANSI C63.10 :2013 Section 12.2
Test Method:	ANSI C63.10 :2013 Section 12.2
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For report purpose
The detailed test data see: Reference report SUCR250100002106	


5.4 Maximum e.i.r.p.

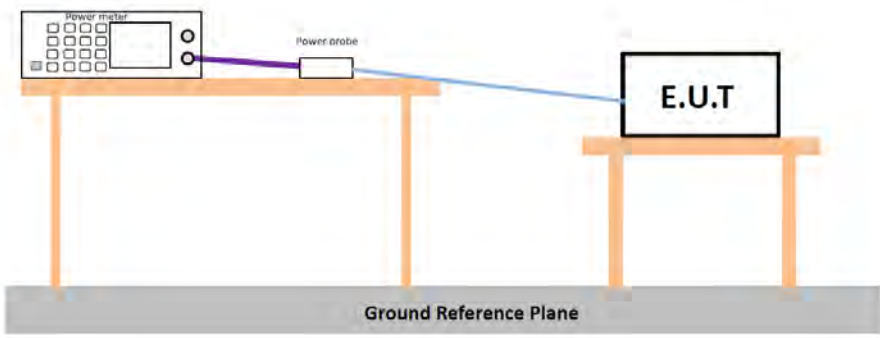Test Requirement:	47 CFR Part 15 Section 15.407(a) 15.407(a)(5)
Test Method:	ANSI C63.10 :2013 Section11.9.2.3
Test Setup:	 * Test with power meter (Detector function: Average)
Test Instruments:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	For client devices operating under the control of an indoor access point in the 5.925-7.125GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.
Test Results:	Pass
The detailed test data see: Appendix	


5.5 26dB Emission Bandwidth

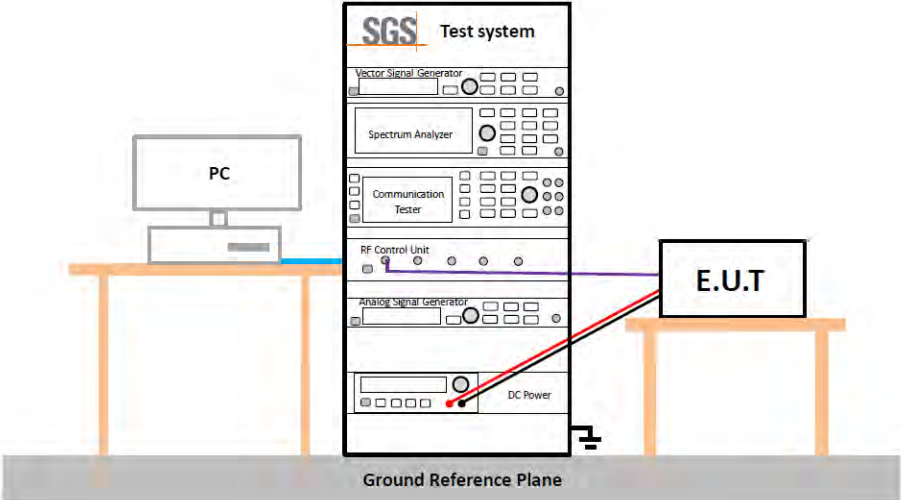Test Requirement:	47 CFR Part 15 Section 15.407(a), KDB 789033 D02
Test Method:	ANSI C63.10: 2013 Section 11.8 Option 2
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.
Test Results:	Pass
The detailed test data see: Reference report SUCR250100002106	


5.6 99% Occupied Bandwidth

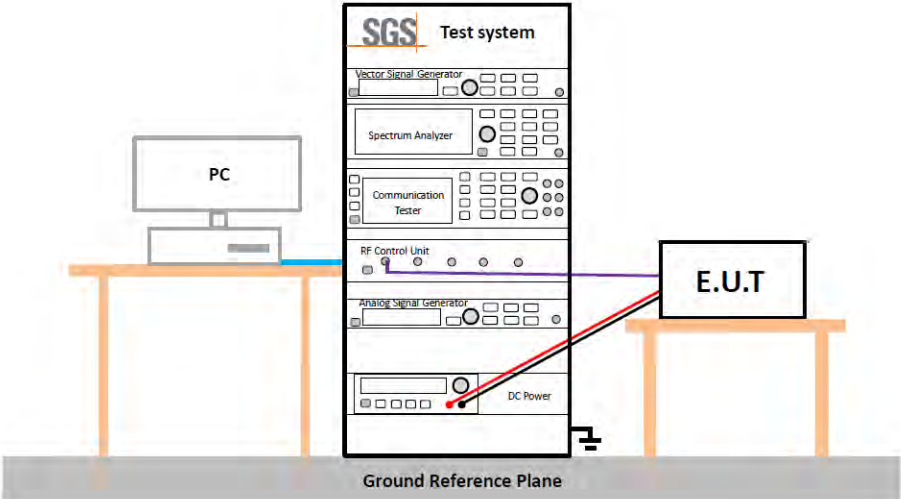Test Requirement:	KDB 789033 D02§ D
Test Method:	ANSI C63.10: 2013 Section 6.9.3
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	No restriction limits
Test Results:	For report purpose
The detailed test data see: Reference report SUCR250100002106	


5.7 Power Spectral Density

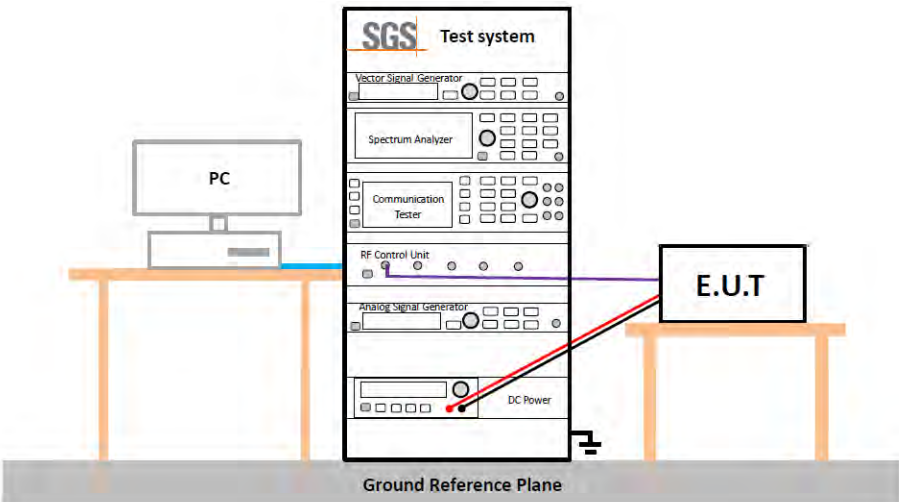Test Requirement:	47 CFR Part 15 Section 15.407(a)
Test Method:	ANSI C63.10: 2013 Section 11.10.2 KDB 789033 D02 v02r01, Section F.
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details.
Limit:	For client devices operating under the control of an indoor access point in the 5.925-7.125GHz bands, the maximum power spectral density must not exceed -1 dBm e.i.r.p. in any 1-megahertz band.
Test Results:	Pass
The detailed test data see: Appendix	

5.8 In-Band Emissions

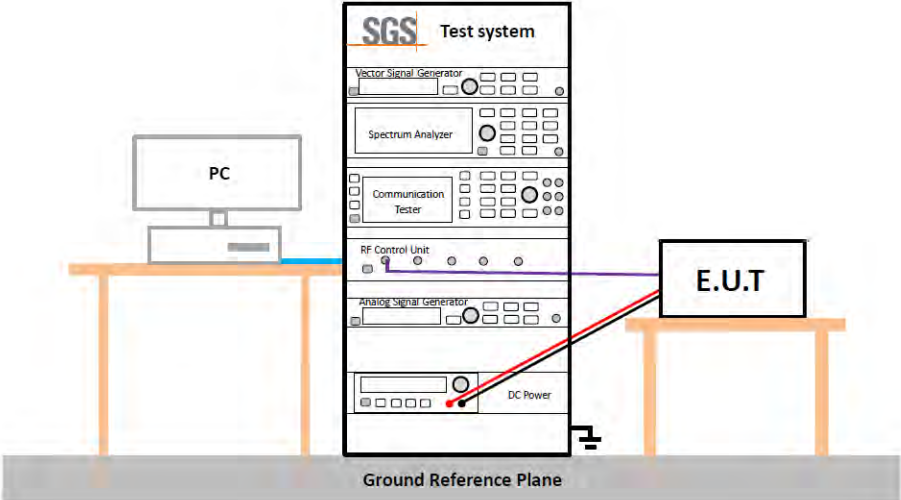Test Requirement:	47 CFR Part 15 Section 15.407(b)(7)
Test Method:	KDB 987594 D02 U-NII 6GHz EMC Measurement v01
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Refer to section 3.7 for details. Only the worst case is recorded in the report.
Limit:	For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.
Test Results:	Pass
The detailed test data see: Reference report SUCR250100002106	

5.9 Contention Based Protocol

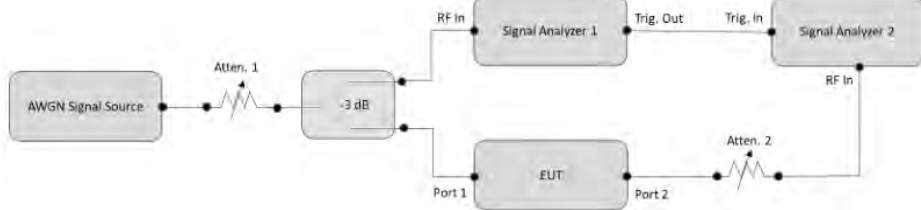Test Requirement:	47 CFR Part 15 Section 15.407(d)
Test Method:	ANSI C63.10: 2013 KDB 987594 D02 U-NII 6GHz EMC Measurement v01
Test Setup:	
Instruments Used:	Refer to section 3 for details
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Test Procedure:	1) Configure the EUT to transmit with a constant duty cycle. 2) Set the operating parameters of the EUT including power level, operating frequency, modulation and bandwidth. 3) Set the signal analyzer center frequency to the nominal EUT channel center frequency. The span range of the signal analyzer shall be between two times and five times the OBW of the EUT. Connect the output port of the EUT to the signal analyzer 2, as shown in Figure 2. Ensure that the attenuator 2 provides enough attenuation to not overload the signal analyzer 2 receiver. 4) Monitoring the signal analyzer 2, verify the EUT is operating and transmitting with the parameters set at step two. 5) Using an AWGN signal source, generate (but do not transmit, i.e., RF OFF) a 10MHz-wide AWGN signal. Use Table 1 to determine the center frequency of the 10MHz AWGN signal relative to the EUT's channel bandwidth and center frequency. 6) Set the AWGN signal power to an extremely low level (more than 20 dB below the -62 dBm threshold). Connect the AWGN signal source, via a 3-dB splitter, to the signal analyzer 1 and the EUT as shown in Figure 2. 7) Transmit the AWGN signal (RF ON) and verify its characteristics on the signal analyzer 1. 8) Monitor the signal analyzer 2 to verify if the AWGN signal has been detected and the EUT has ceased transmission. If the EUT continues to transmit, then incrementally increase the AWGN signal power level until the EUT stops transmitting. 9) (Including all losses in the RF paths) Determine and record the AWGN signal power level (at the EUT's antenna port) at which the EUT ceased transmission. Repeat the procedure at least 10 times to verify the EUT can detect an AWGN signal with 90% (or better) level of certainty. 10) Refer to Table 1 to determine number of times the detection threshold testing needs to be repeated. If testing is required more than once, then go back to step 5, choose a different center frequency for the AWGN signal and repeat the process.
Limit:	Unlicensed low-power indoor devices must detect co-channel radio frequency power that is at least -62 dBm or lower. Upon detection of energy in the band, unlicensed low power indoor devices must vacate the channel and stay off the channel as long as detected radio frequency power is equal to or greater than the threshold (-62 dBm). The -62 dBm (or lower) threshold is referenced to a 0 dBi antenna gain. To ensure incumbent operations are reliably detected in the



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 25 of 122

	band, low power indoor devices must detect RF energy throughout their intended operating channel. For example, an 802.11 device that plans to transmit a 40 MHz- wide signal (on a primary 20 MHz channel and a secondary 20 MHz channel) must detect energy throughout the entire 40 MHz channel. Additionally, low-power indoor devices must detect co-channel energy with 90% or greater certainty.
Test Results:	Pass
The detailed test data see: Appendix	

5.10 Radiated Spurious Emissions

Test Requirement:	47 CFR Part 15 Section 15.205 and 15.209
Test Method:	ANSI C63.10: 2013 Section 6.4 / 6.5 / 6.6
Test Site:	Measurement Distance: 3m or 10m (Semi-Anechoic Chamber)
Test frequency:	9kHz ~ 40GHz(or 10 Harmonic)

Test Setup:

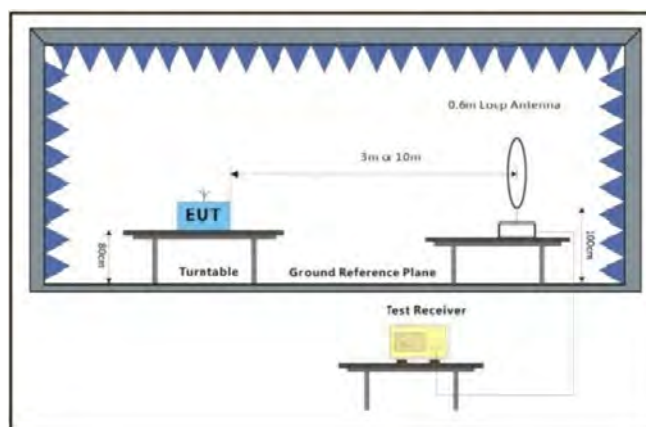


Figure 1. 9kHz to 30MHz

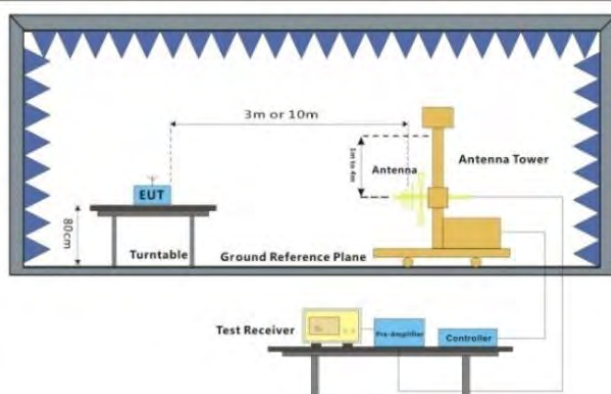


Figure 1. 30MHz to 1GHz

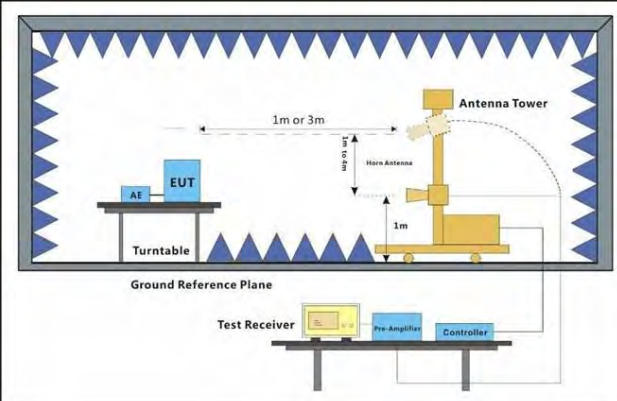


Figure 2. Above 1 GHz

Test Procedure:	- For below 1GHz test, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation. - For above 1GHz test, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation (Distance from antenna to EUT is 1m for measurements >18GHz). - The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. - The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. - For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the
-----------------	--



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01


Page: 27 of 122

	maximum reading. f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. g. Test the EUT in the outermost channels. h. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case. i. Repeat above procedures until all frequencies measured was complete. j. The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported k. The disturbance above 18GHz was very low, and the harmonics were the highest point could be found when testing, so only the harmonics had been displayed. l. At a measurement distance of 1 meter the limit line was increased by $20 \times \text{LOG}(3/1) = 9.54 \text{ dB}$.
Test Configuration:	Measurements below 30MHz • RBW = 10 kHz • VBW = 30 kHz • Detector = Peak & Average & Quasi-peak • Trace mode = max hold Measurements Below 1000MHz • RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq 3 \text{ MHz}$ • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details. For below 1GHz part, through pre-scan all channels, but only the worst case is recorded in the report.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	

5.11 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15 Section 15.407(b)		
Test Method:	ANSI C63.10: 2013 Section 11.12		
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)		
Limit:	Frequency	Limit (dBuV/m)	Remark
	30MHz-88MHz	40.0	Quasi-peak
	88MHz-216MHz	43.5	Quasi-peak
	216MHz-960MHz	46.0	Quasi-peak
	960MHz-1GHz	54.0	Quasi-peak
	Above 1GHz	54.0	Average Value
		74.0	Peak Value

Test Setup:

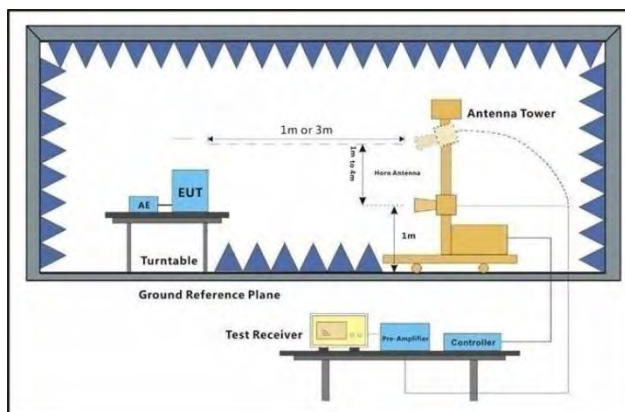

Test Procedure:

- The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
- Test the EUT in the outermost channels.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
- Repeat above procedures until all frequencies measured was complete.

Test Configuration:

Measurements Below 1000MHz



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 29 of 122

	• RBW = 120 kHz • VBW = 300 kHz • Detector = Quasi-peak • Trace mode = max hold Peak Measurements Above 1000 MHz • RBW = 1 MHz • VBW $\geq$ 3 MHz • Detector = Peak • Sweep time = auto • Trace mode = max hold Average Measurements Above 1000MHz • RBW = 1 MHz • VBW = 10Hz, when duty cycle is no less than 98 percent. • VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
Final Test Mode:	Refer to section 3.7 for details.
Instruments Used:	Refer to section 3 for details
Test Results:	Pass
The detailed test data see: Appendix	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 30 of 122

6 Photographs - Setup Photos

Refer to Appendix A.2 BT&WLAN&NFC Setup Photos.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 31 of 122

7 Appendix

1. Maximum Conducted Output Power

1.1 Test Result

1.1.1 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	8.47	8.27	11.38	/	Pass
			6175	SU	/	8.33	8.13	11.24	/	Pass
			6415	SU	/	7.82	7.57	10.71	/	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	9.26	9.03	12.16	/	Pass
			6165	SU	/	8.78	8.66	11.73	/	Pass
			6405	SU	/	8.66	8.43	11.56	/	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	9.53	9.29	12.42	/	Pass
			6145	SU	/	8.47	8.35	11.42	/	Pass
			6385	SU	/	8.37	8.33	11.36	/	Pass

1.1.2 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	2.00	1.55	4.79	<=24	Pass
			6175	SU	/	1.86	1.41	4.65	<=24	Pass
			6415	SU	/	1.35	0.85	4.12	<=24	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	2.79	2.31	5.57	<=24	Pass
			6165	SU	/	2.31	1.94	5.14	<=24	Pass
			6405	SU	/	2.19	1.71	4.97	<=24	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	3.06	2.57	5.83	<=24	Pass
			6145	SU	/	2.00	1.63	4.83	<=24	Pass
			6385	SU	/	1.90	1.61	4.77	<=24	Pass

1.1.3 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	8.66	8.41	11.55	/	Pass
			6475	SU	/	8.52	8.29	11.42	/	Pass
			6515	SU	/	8.45	8.31	11.39	/	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	9.44	9.19	12.32	/	Pass
			6485	SU	/	8.68	8.24	11.48	/	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	9.90	9.63	12.78	/	Pass

1.1.4 EIRP



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 32 of 122

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	-1.36	-1.09	1.79	<=24	Pass
			6475	SU	/	-1.50	-1.21	1.66	<=24	Pass
			6515	SU	/	-1.57	-1.19	1.63	<=24	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	-0.58	-0.31	2.57	<=24	Pass
			6485	SU	/	-1.34	-1.26	1.71	<=24	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	-0.12	0.13	3.02	<=24	Pass

1.1.5 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	8.48	8.19	11.35	/	Pass
			6695	SU	/	8.38	8.03	11.22	/	Pass
			6855	SU	/	8.66	8.36	11.52	/	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	8.23	8.50	11.38	/	Pass
			6685	SU	/	9.63	9.38	12.52	/	Pass
			6845	SU	/	9.02	8.68	11.86	/	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	8.52	9.73	12.18	/	Pass
			6705	SU	/	9.68	9.47	12.58	/	Pass
			6785	SU	/	8.45	9.07	11.78	/	Pass

1.1.6 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	0.69	1.78	4.28	<=24	Pass
			6695	SU	/	0.59	1.62	4.15	<=24	Pass
			6855	SU	/	0.87	1.95	4.45	<=24	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	0.44	2.09	4.35	<=24	Pass
			6685	SU	/	1.84	2.97	5.45	<=24	Pass
			6845	SU	/	1.23	2.27	4.79	<=24	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	0.73	3.32	5.23	<=24	Pass
			6705	SU	/	1.89	3.06	5.52	<=24	Pass
			6785	SU	/	0.66	2.66	4.78	<=24	Pass

1.1.7 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-2.18	-2.43	0.71	/	Pass
			6995	SU	/	-2.44	-2.84	0.37	/	Pass
			7115	SU	/	-4.65	-4.88	-1.75	/	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	9.30	9.05	12.19	/	Pass
			7005	SU	/	8.89	8.30	11.62	/	Pass
			7085	SU	/	9.75	9.47	12.62	/	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	9.30	9.03	12.18	/	Pass
			7025	SU	/	9.90	9.61	12.76	/	Pass

1.1.8 EIRP



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 33 of 122

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-9.97	-8.87	-6.37	<=24	Pass
			6995	SU	/	-10.23	-9.28	-6.72	<=24	Pass
			7115	SU	/	-12.44	-11.32	-8.83	<=24	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	1.51	2.61	5.11	<=24	Pass
			7005	SU	/	1.10	1.86	4.51	<=24	Pass
			7085	SU	/	1.96	3.03	5.54	<=24	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	1.51	2.59	5.09	<=24	Pass
			7025	SU	/	2.11	3.17	5.68	<=24	Pass

1.1.9 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	-3.13	-3.04	-0.07	/	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	8.99	8.77	11.89	/	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	8.66	8.64	11.66	/	Pass

1.1.10 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	-10.92	-9.48	-7.13	<=24	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	1.20	2.33	4.81	<=24	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	0.87	2.20	4.60	<=24	Pass

1.1.11 Power

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	8.34	8.61	11.49	/	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	8.21	7.41	10.84	/	Pass

1.1.12 EIRP

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	E.I.R.P (dBm)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	-1.68	-0.89	1.74	<=24	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	-1.81	-2.09	1.06	<=24	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 34 of 122

2. Maximum Power Spectral Density

2.1 Test Result

2.1.1 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	-4.64	-3.59	-1.38	/	Pass
			6175	SU	/	-3.15	-4.26	-1.05	/	Pass
			6415	SU	/	-4.89	-5.20	-2.30	/	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	-3.93	-4.15	-1.24	/	Pass
			6165	SU	/	-3.59	-4.72	-1.30	/	Pass
			6405	SU	/	-3.74	-5.66	-1.65	/	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	-5.60	-5.72	-2.90	/	Pass
			6145	SU	/	-5.19	-6.01	-2.73	/	Pass
			6385	SU	/	-4.51	-6.51	-2.61	/	Pass

2.1.2 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	5955	SU	/	-11.11	-10.31	-7.68	<=-1	Pass
			6175	SU	/	-9.62	-10.98	-7.24	<=-1	Pass
			6415	SU	/	-11.36	-11.92	-8.62	<=-1	Pass
	802.11ax (HEW40)	MIMO	5965	SU	/	-10.40	-10.87	-7.62	<=-1	Pass
			6165	SU	/	-10.06	-11.44	-7.69	<=-1	Pass
			6405	SU	/	-10.21	-12.38	-8.15	<=-1	Pass
	802.11ax (HEW80)	MIMO	5985	SU	/	-12.07	-12.44	-9.24	<=-1	Pass
			6145	SU	/	-11.66	-12.73	-9.15	<=-1	Pass
			6385	SU	/	-10.98	-13.23	-8.95	<=-1	Pass

2.1.3 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	-5.76	-5.05	-2.52	/	Pass
			6475	SU	/	-5.09	-4.42	-1.77	/	Pass
			6515	SU	/	-5.19	-4.26	-1.79	/	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	-5.52	-5.95	-2.80	/	Pass
			6485	SU	/	-5.64	-5.68	-2.80	/	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	-6.68	-7.06	-3.95	/	Pass

2.1.4 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6435	SU	/	-15.78	-14.55	-12.11	<=-1	Pass
			6475	SU	/	-15.11	-13.92	-11.46	<=-1	Pass
			6515	SU	/	-15.21	-13.76	-11.41	<=-1	Pass
	802.11ax (HEW40)	MIMO	6445	SU	/	-15.54	-15.45	-12.48	<=-1	Pass
			6485	SU	/	-15.66	-15.18	-12.40	<=-1	Pass
	802.11ax (HEW80)	MIMO	6465	SU	/	-16.70	-16.56	-13.62	<=-1	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 35 of 122

2.1.5 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	-4.28	-3.80	-1.16	/	Pass
			6695	SU	/	-4.16	-3.53	-1.00	/	Pass
			6855	SU	/	-3.77	-5.23	-1.52	/	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	-6.61	-6.60	-3.84	/	Pass
			6685	SU	/	-5.33	-4.91	-2.21	/	Pass
			6845	SU	/	-3.60	-6.38	-1.93	/	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	-6.35	-5.04	-2.65	/	Pass
			6705	SU	/	-6.08	-5.22	-2.72	/	Pass
			6785	SU	/	-3.91	-6.03	-1.95	/	Pass

2.1.6 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6535	SU	/	-12.07	-10.21	-8.03	<=-1	Pass
			6695	SU	/	-11.95	-9.94	-7.82	<=-1	Pass
			6855	SU	/	-11.56	-11.64	-8.59	<=-1	Pass
	802.11ax (HEW40)	MIMO	6565	SU	/	-14.40	-13.01	-10.64	<=-1	Pass
			6685	SU	/	-13.12	-11.32	-9.12	<=-1	Pass
			6845	SU	/	-11.39	-12.79	-9.02	<=-1	Pass
	802.11ax (HEW80)	MIMO	6625	SU	/	-14.14	-11.45	-9.58	<=-1	Pass
			6705	SU	/	-13.87	-11.63	-9.60	<=-1	Pass
			6785	SU	/	-11.70	-12.44	-9.04	<=-1	Pass

2.1.7 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-3.53	-5.14	-1.31	/	Pass
			6995	SU	/	-4.75	-5.33	-2.19	/	Pass
			7115	SU	/	-4.59	-5.91	-2.24	/	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	-2.97	-5.95	-1.29	/	Pass
			7005	SU	/	-3.66	-5.65	-1.76	/	Pass
			7085	SU	/	-3.93	-5.66	-1.84	/	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	-3.72	-5.74	-1.87	/	Pass
			7025	SU	/	-4.64	-5.68	-2.33	/	Pass

2.1.8 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6895	SU	/	-11.32	-11.58	-8.44	<=-1	Pass
			6995	SU	/	-12.54	-11.77	-9.13	<=-1	Pass
			7115	SU	/	-12.38	-12.35	-9.35	<=-1	Pass
	802.11ax (HEW40)	MIMO	6925	SU	/	-10.76	-12.39	-8.49	<=-1	Pass
			7005	SU	/	-11.45	-12.09	-8.75	<=-1	Pass
			7085	SU	/	-11.72	-12.10	-8.90	<=-1	Pass
	802.11ax (HEW80)	MIMO	6945	SU	/	-11.51	-12.18	-8.82	<=-1	Pass
			7025	SU	/	-12.43	-12.12	-9.26	<=-1	Pass



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 36 of 122

2.1.9 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	-4.11	-5.52	-2.09	/	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	-4.78	-7.12	-2.95	/	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	-5.19	-7.37	-3.23	/	Pass

2.1.10 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW20)	MIMO	6875	SU	/	-11.90	-11.96	-8.92	<=-1	Pass
	802.11ax (HEW40)	MIMO	6885	SU	/	-12.57	-13.56	-10.03	<=-1	Pass
	802.11ax (HEW80)	MIMO	6865	SU	/	-12.98	-13.81	-10.36	<=-1	Pass

2.1.11 PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	-7.50	-7.43	-4.48	/	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	-8.01	-6.60	-4.26	/	Pass

2.1.12 E.I.R.PSD

ENV	Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum E.I.R.PSD (dBm/MHz)				Verdict
						ANT2	ANT3	MIMO	Limit	
NTNV	802.11ax (HEW40)	MIMO	6525	SU	/	-17.52	-16.93	-14.20	<=-1	Pass
	802.11ax (HEW80)	MIMO	6545	SU	/	-18.03	-16.10	-13.95	<=-1	Pass




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 37 of 122

2.2 Test Graph


2.2.1 PSD

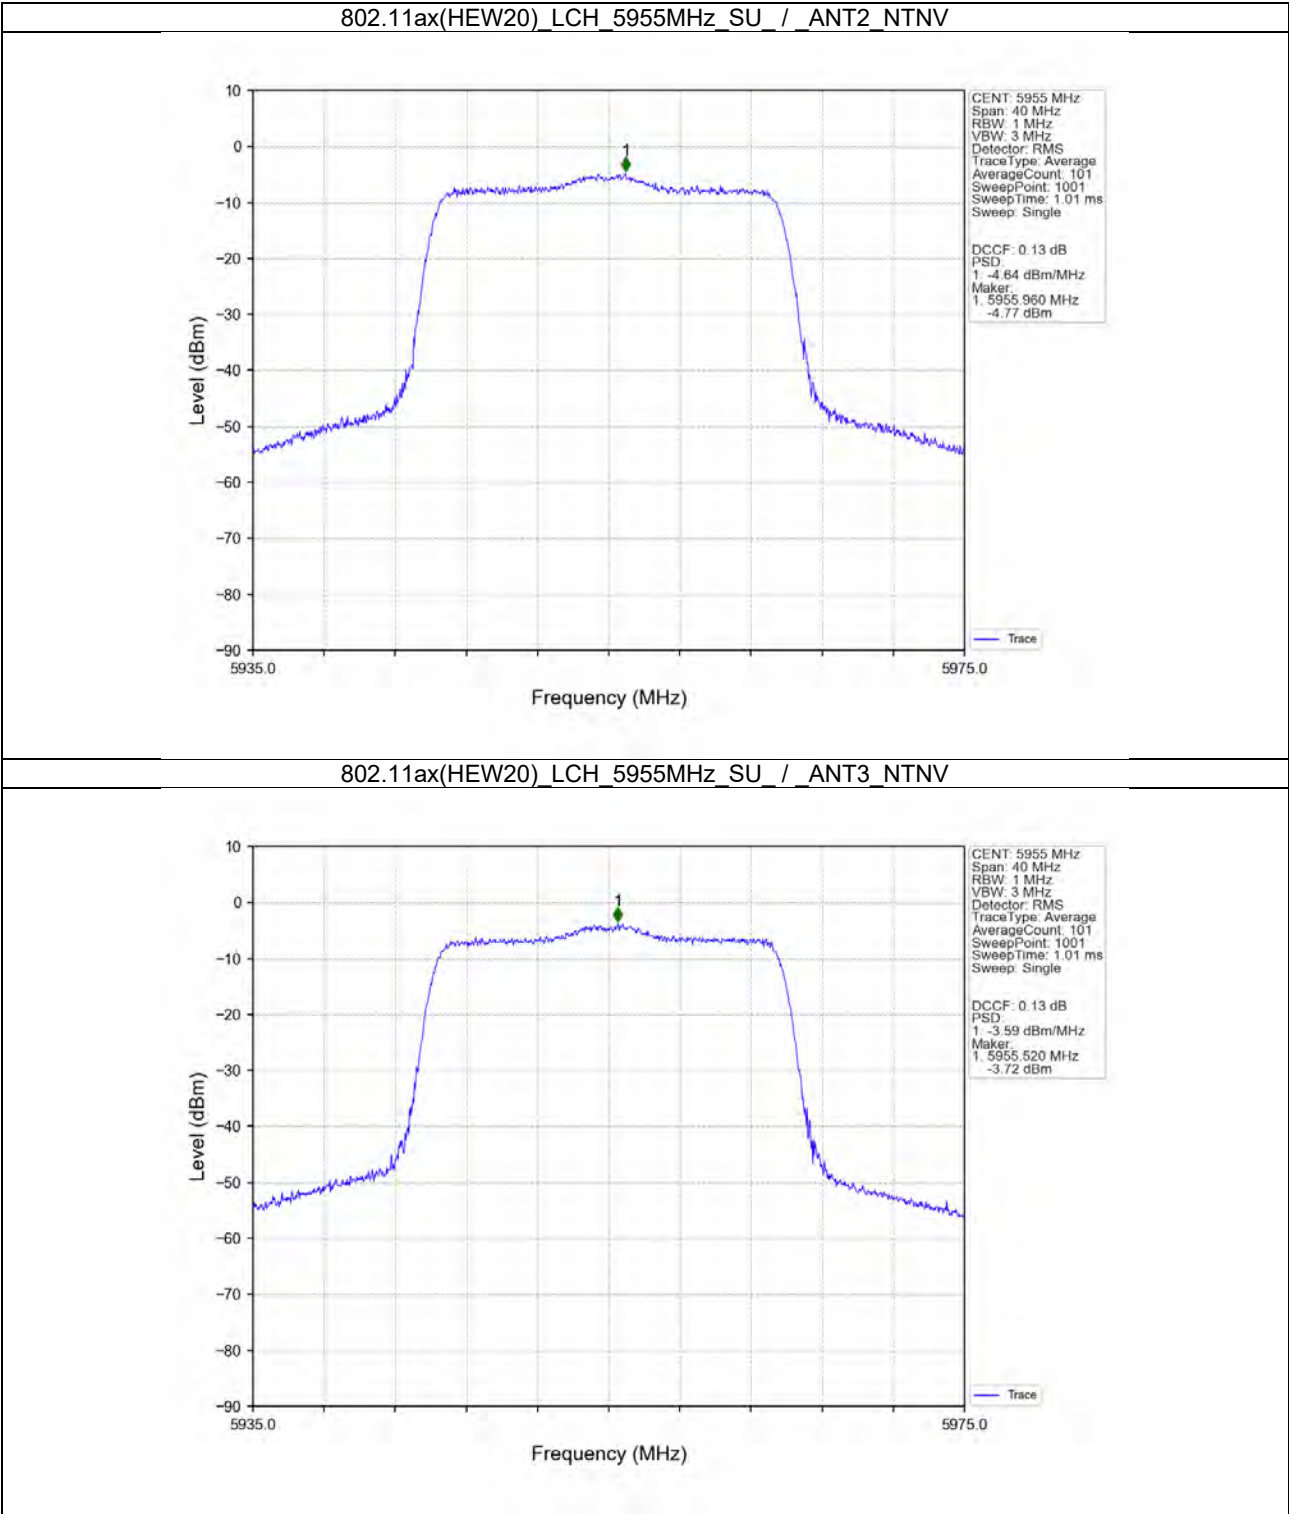



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 38 of 122

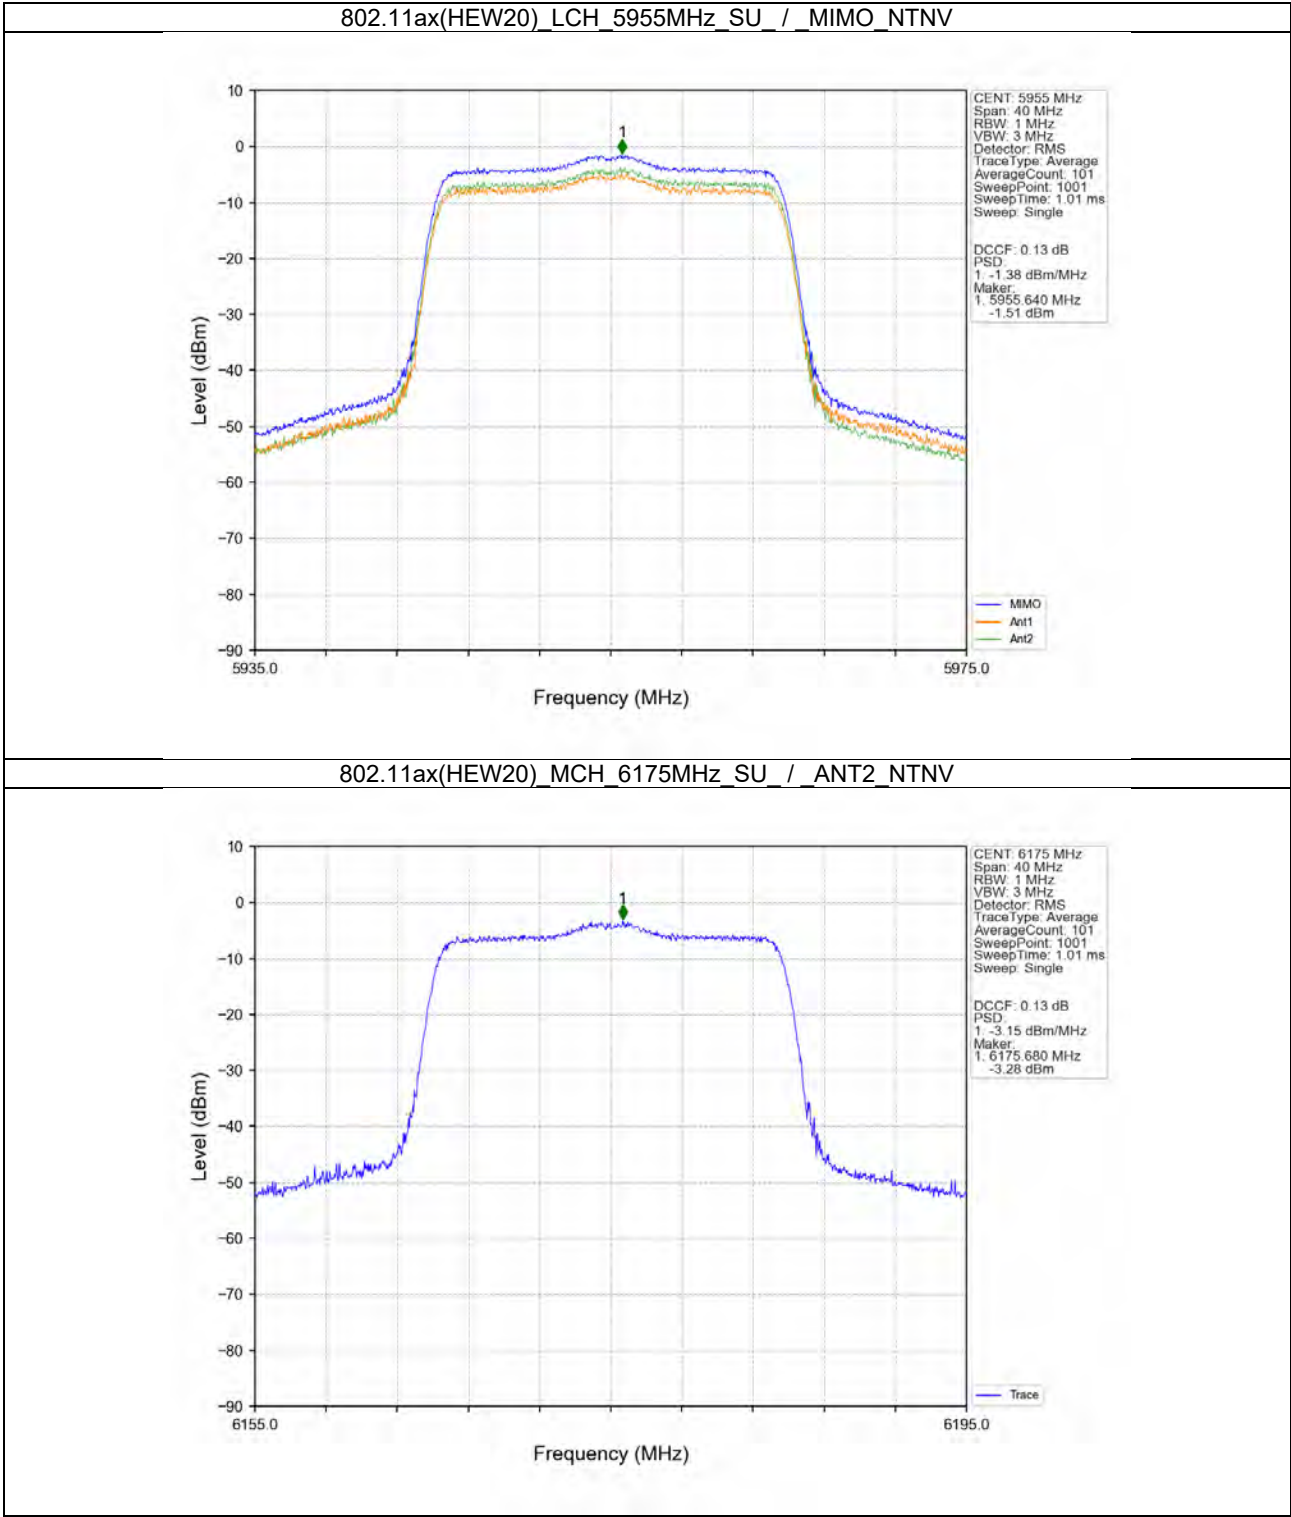



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 39 of 122

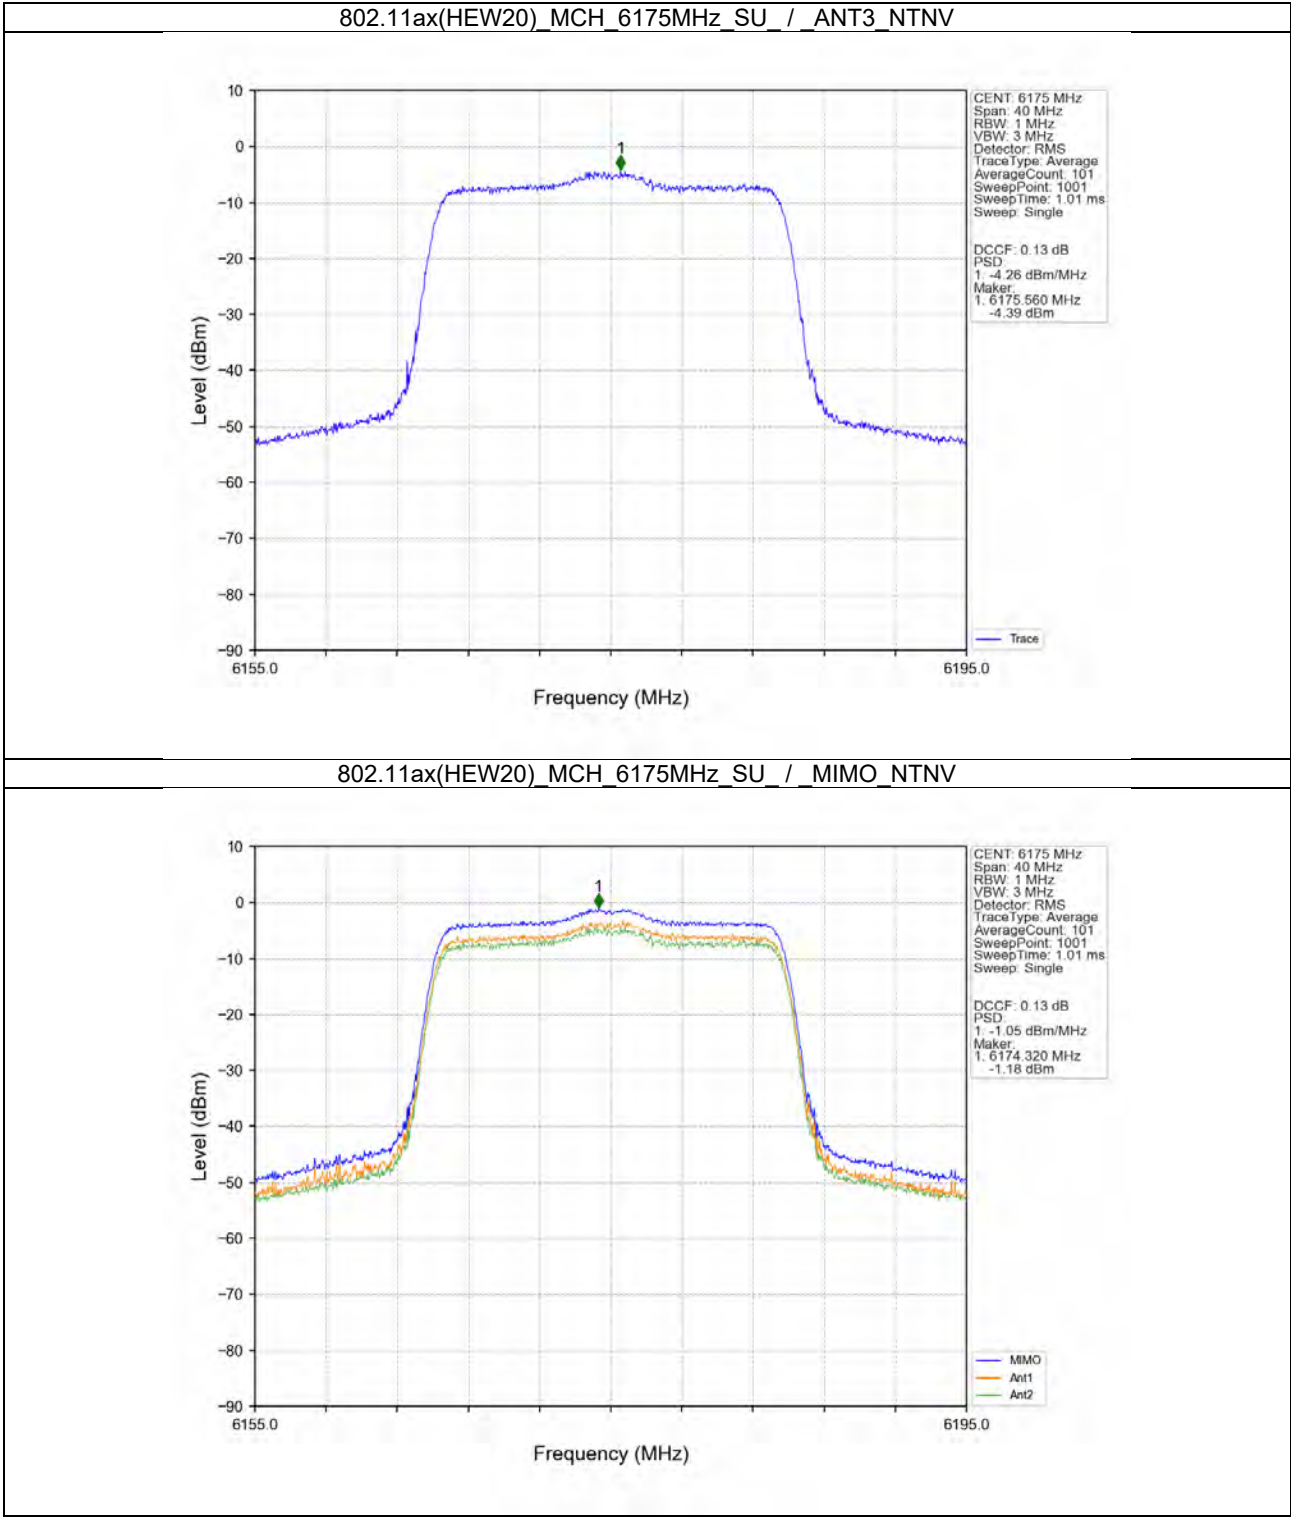



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 40 of 122

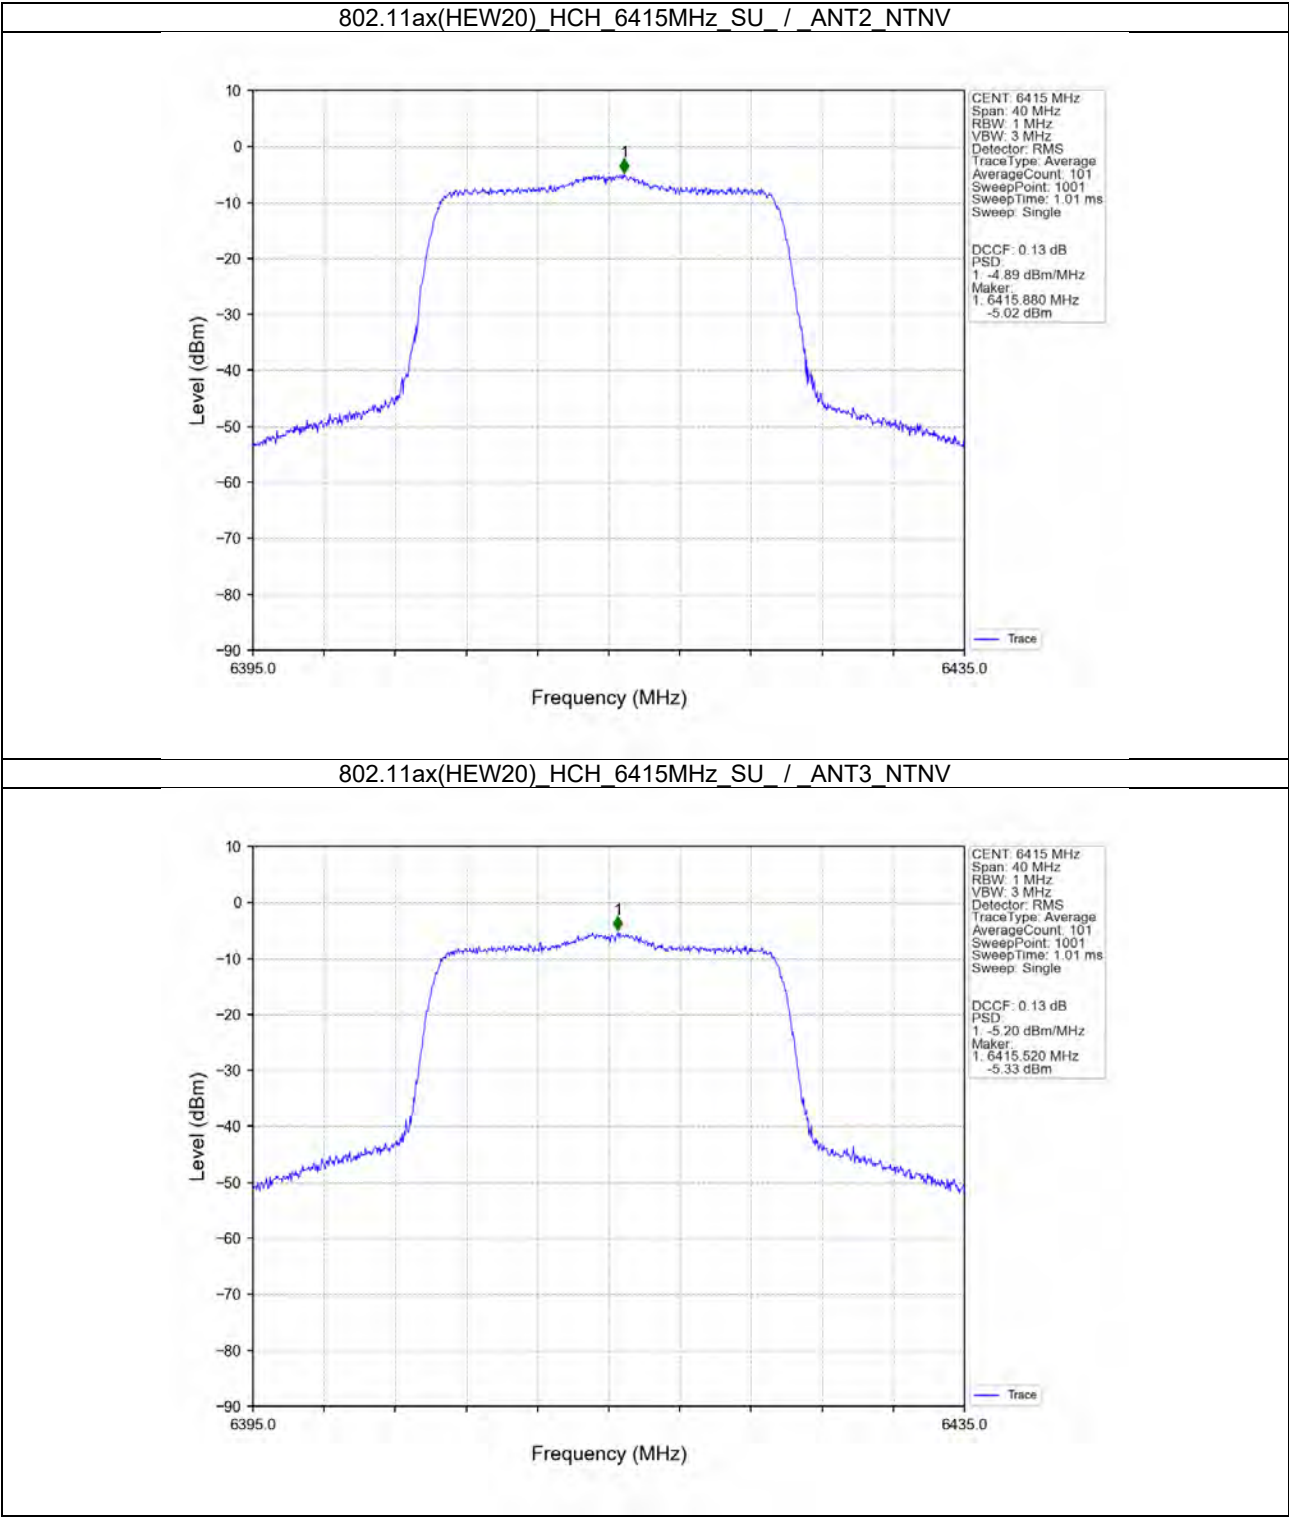



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 41 of 122

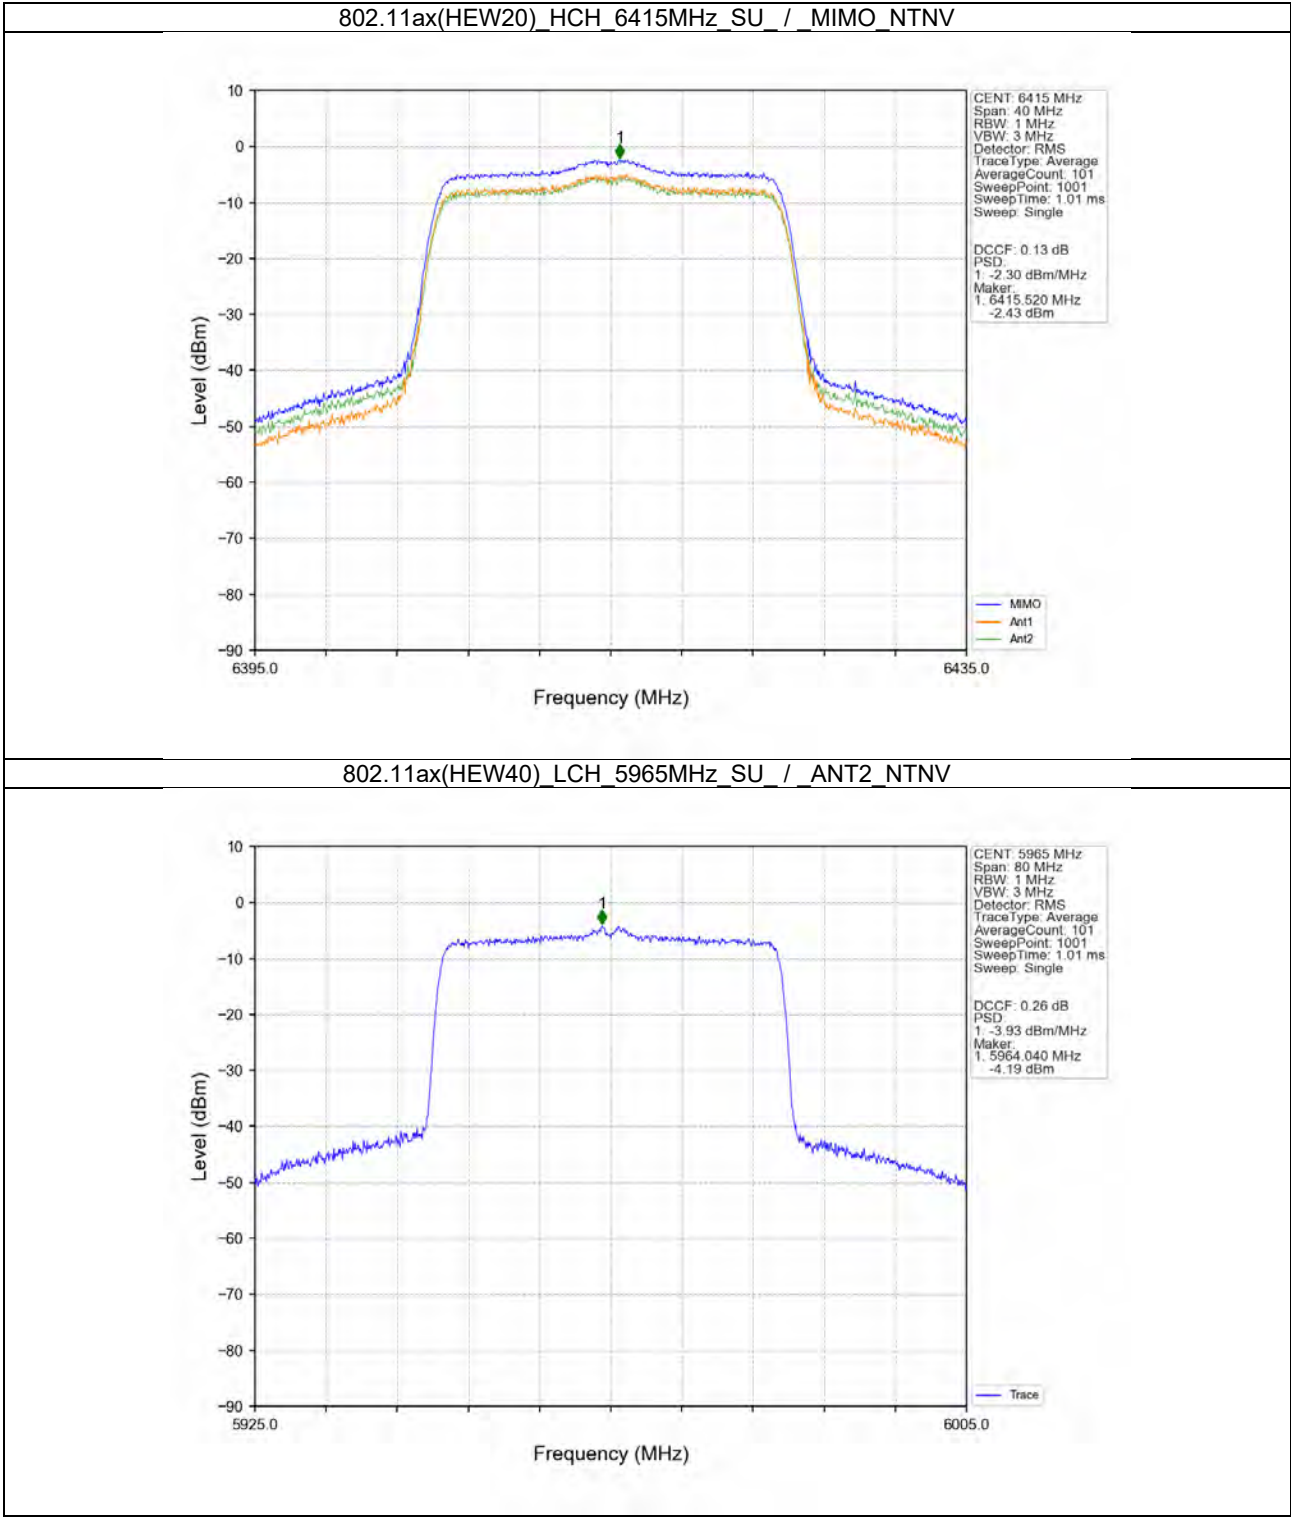



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 42 of 122

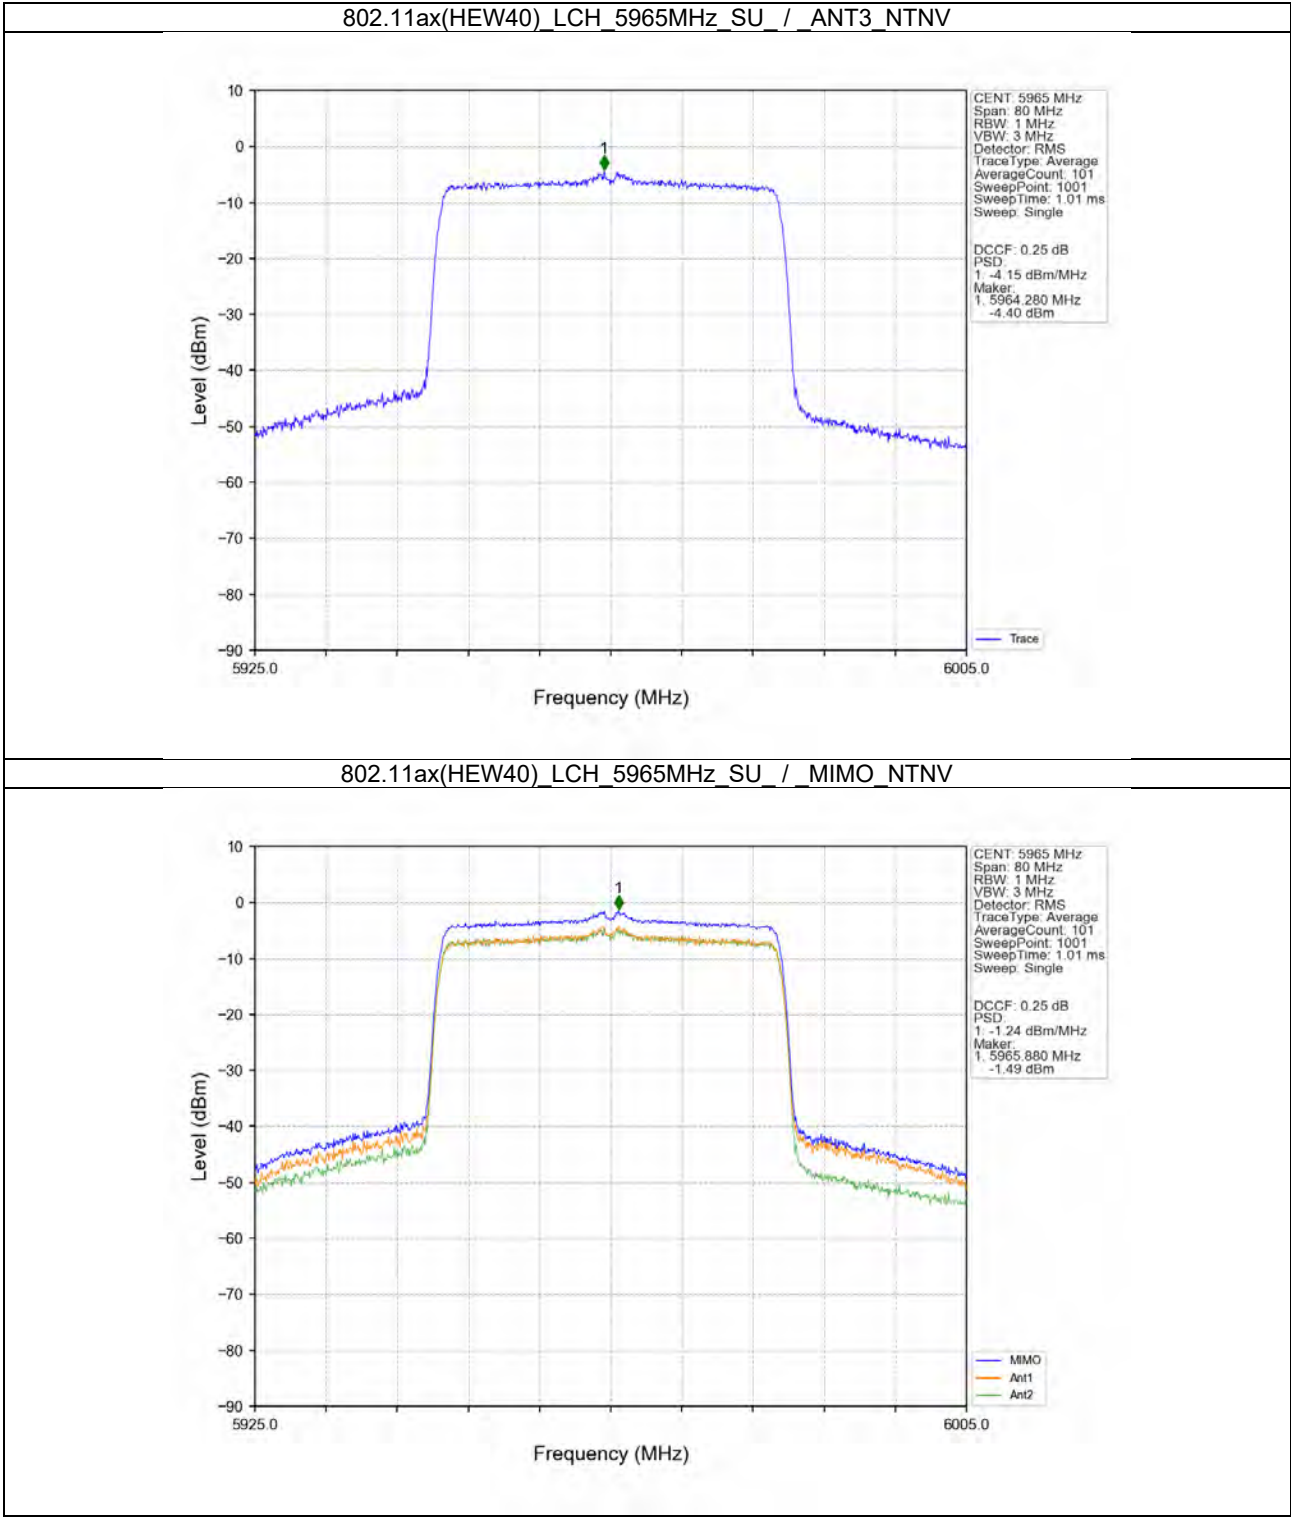



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 43 of 122

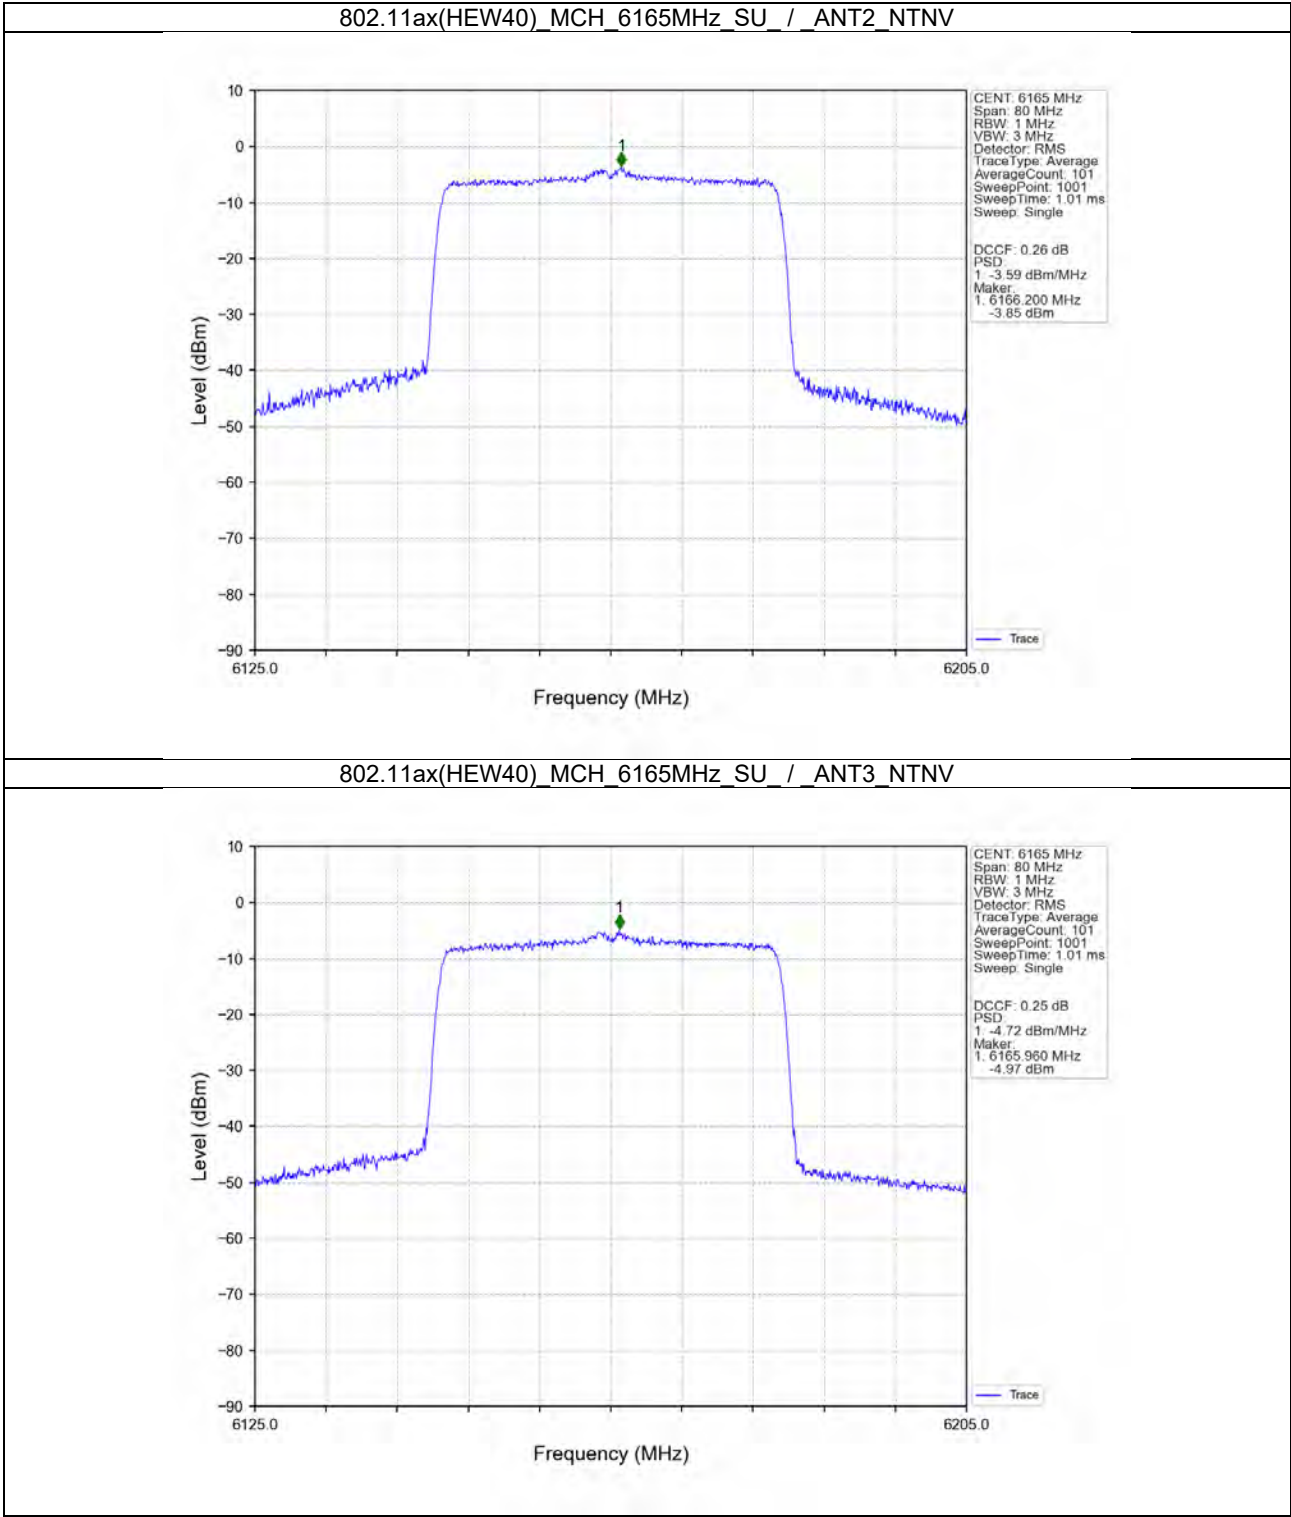



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 44 of 122

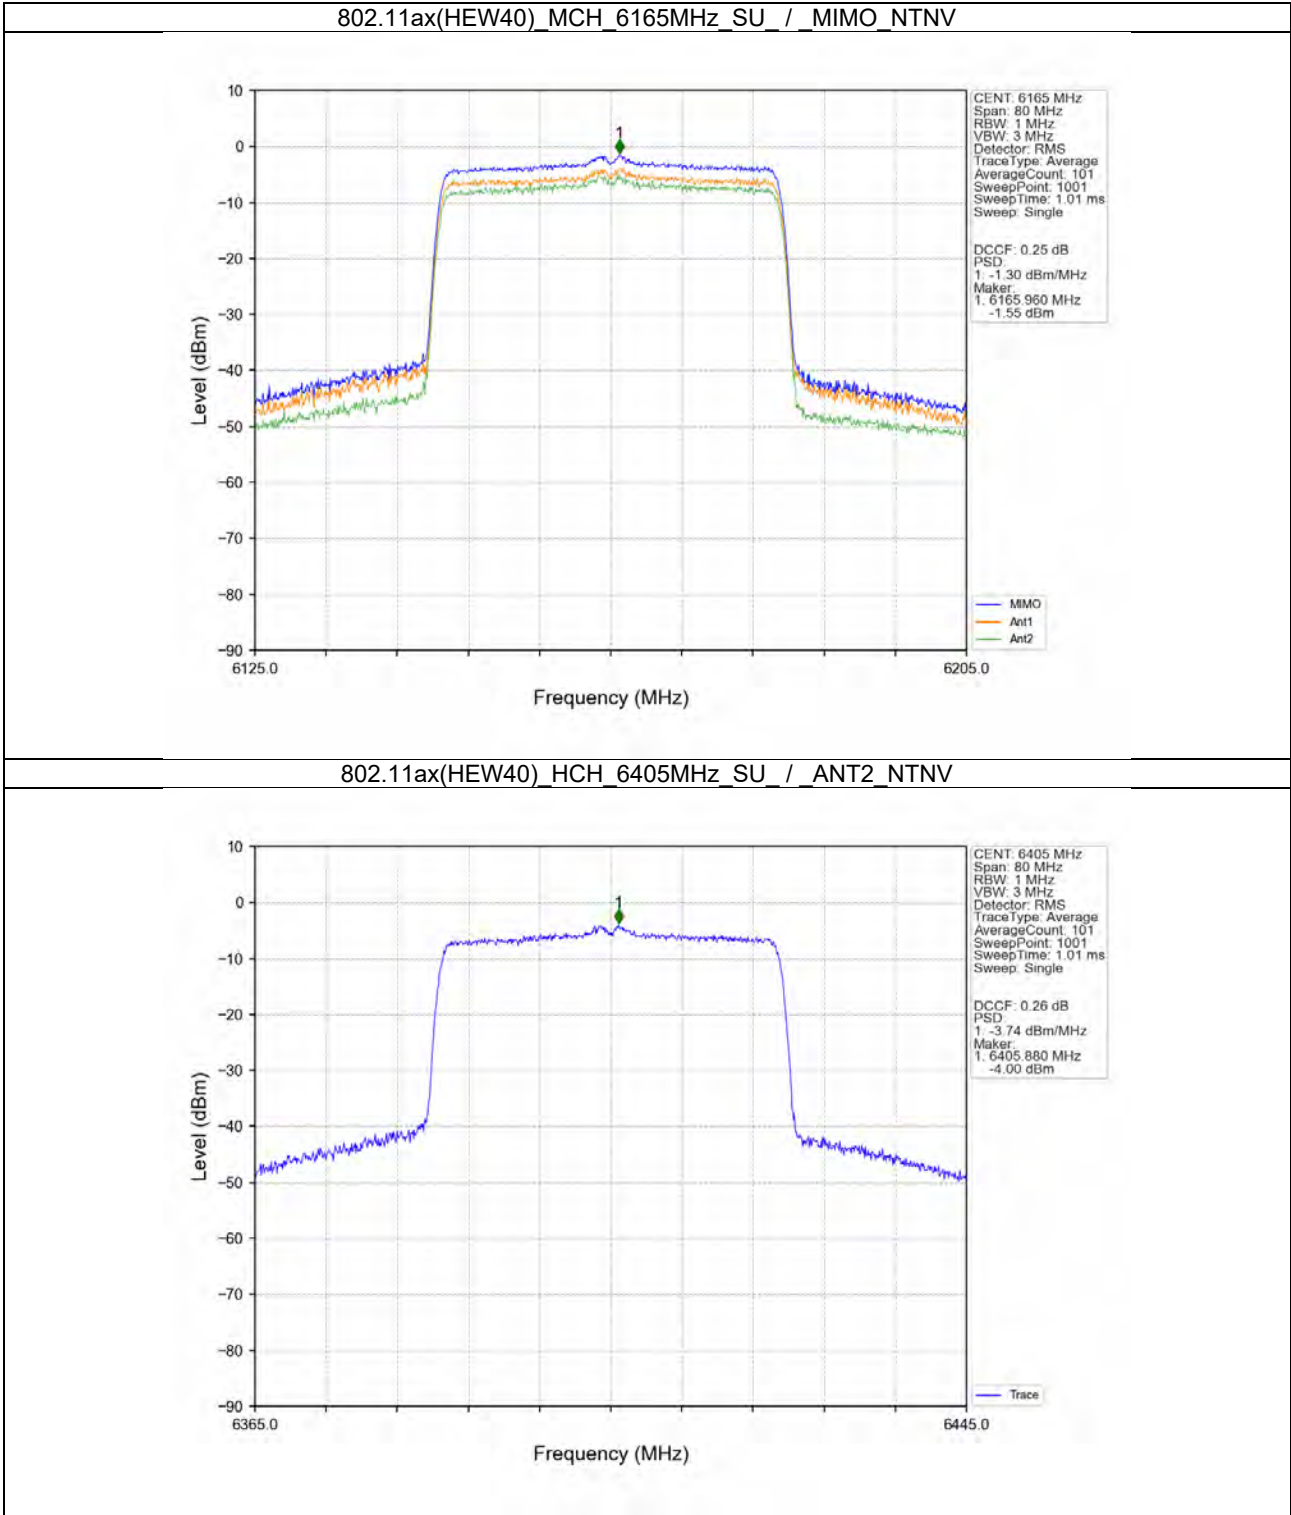



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 45 of 122

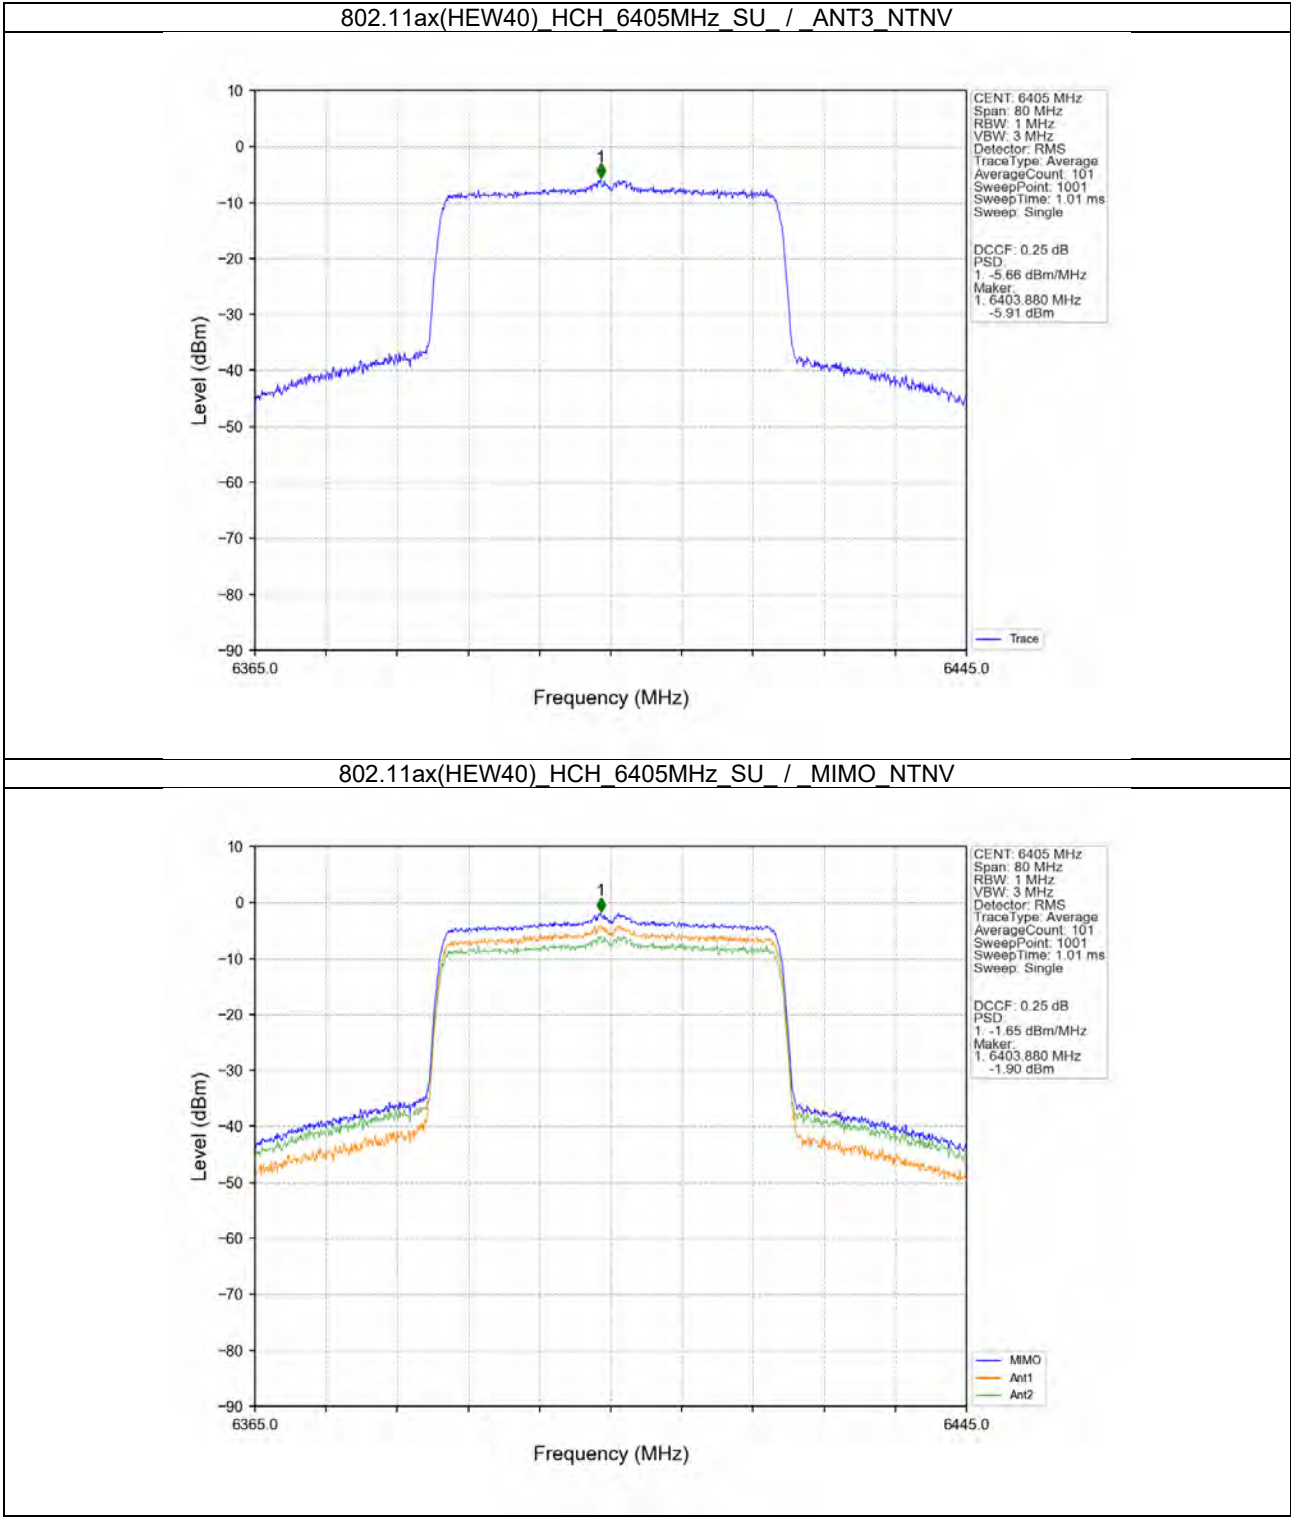




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 46 of 122

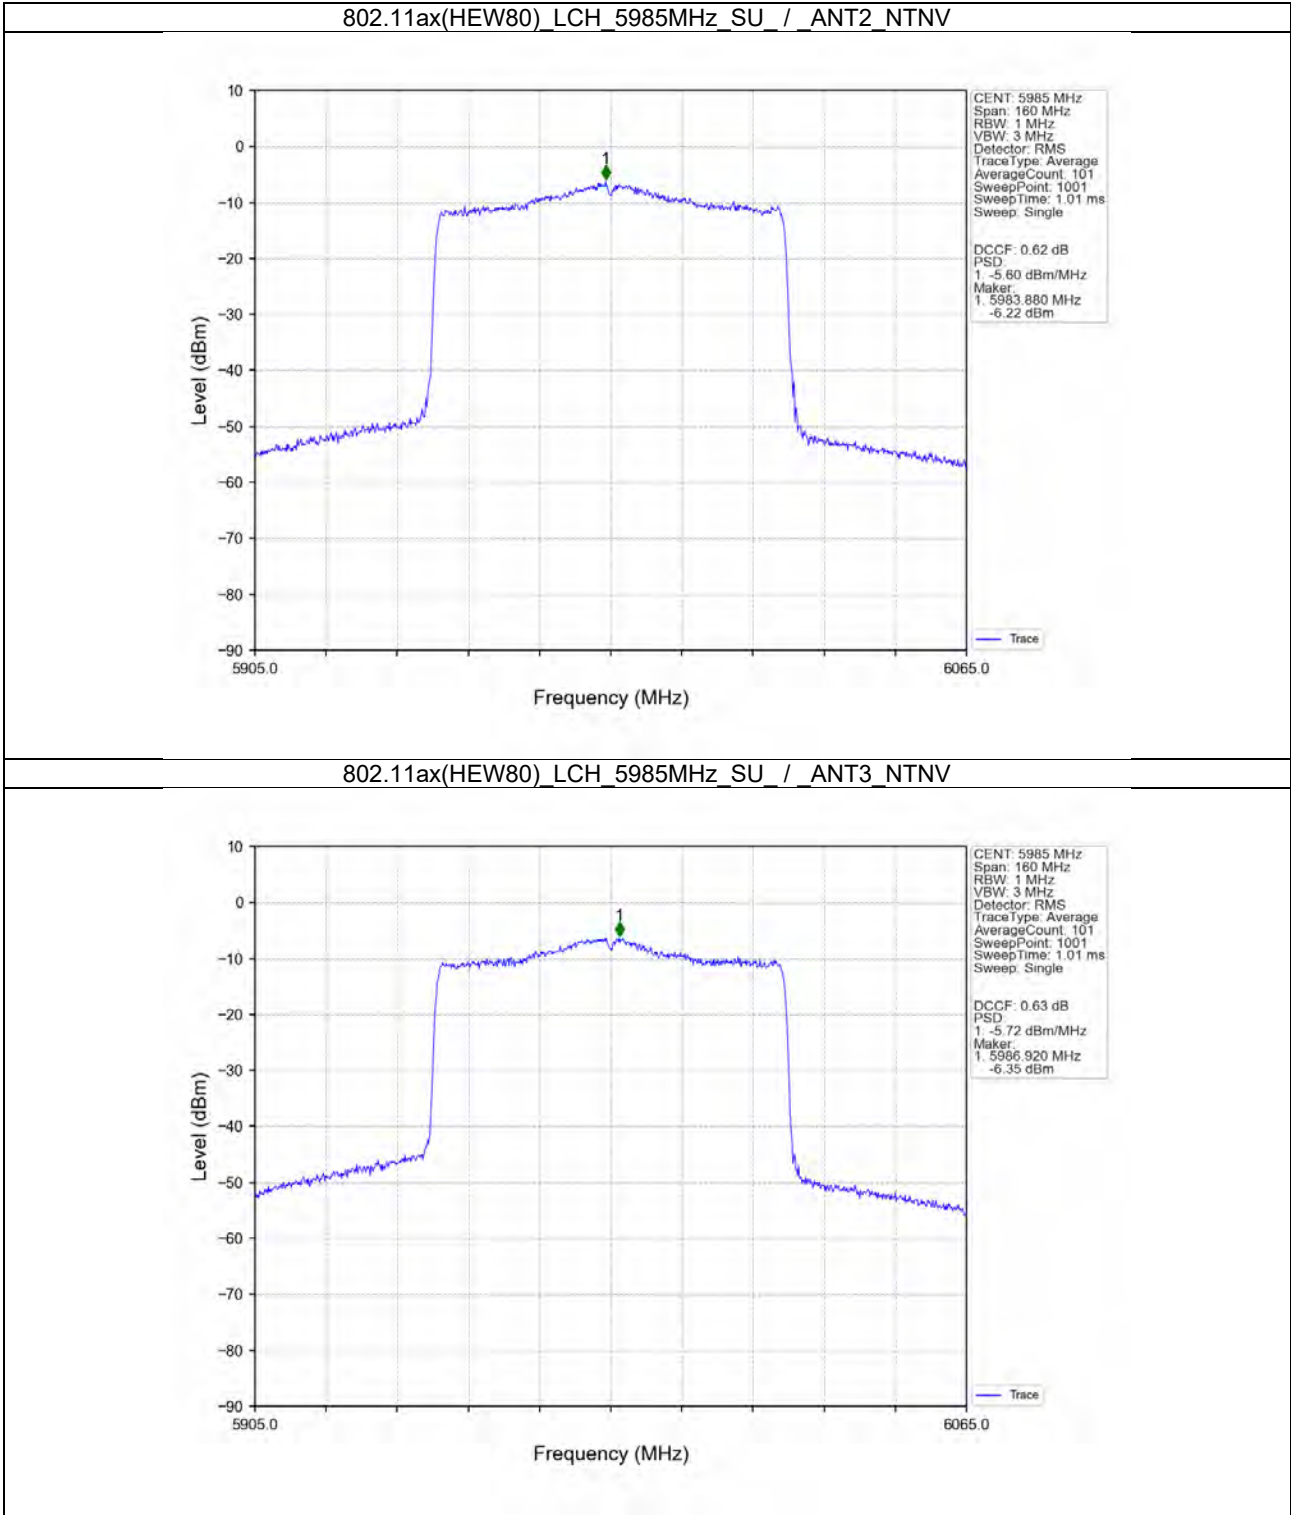

802.11ax(HEW80)_LCH_5985MHz_SU_ / MIMO_NTNV

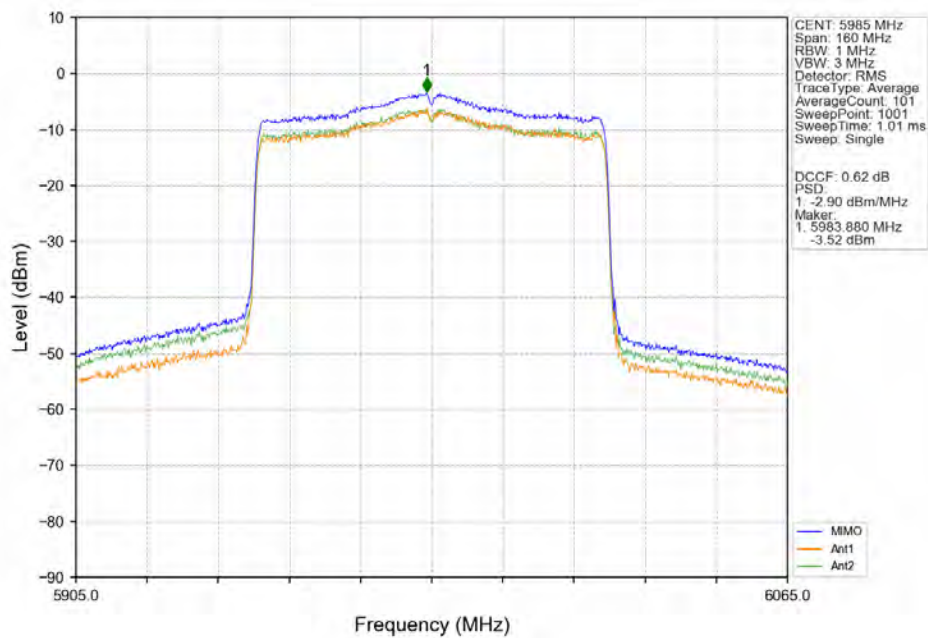


802.11ax(HEW80)_MCH_6145MHz_SU_ / ANT2_NTNV

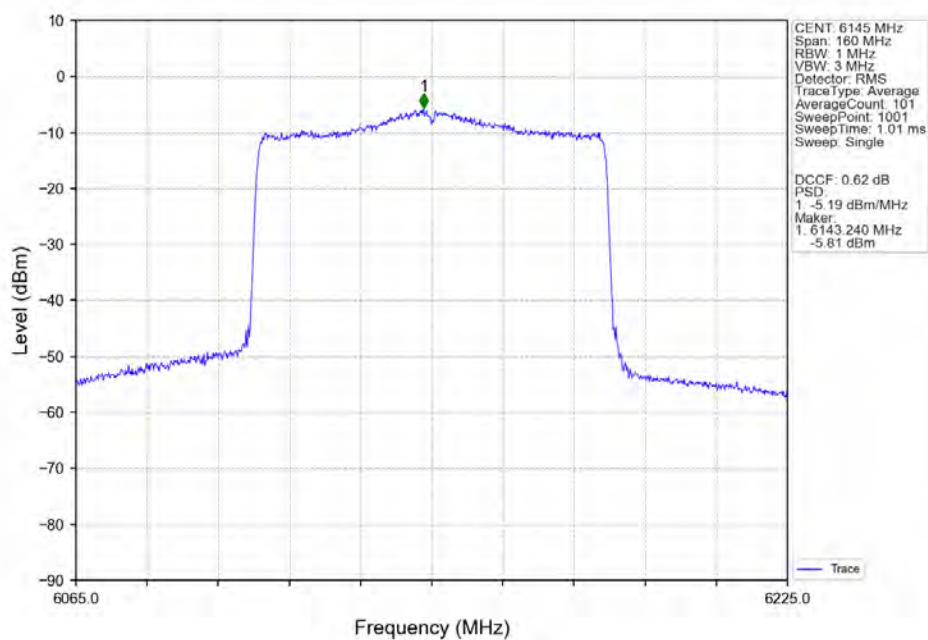



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 48 of 122

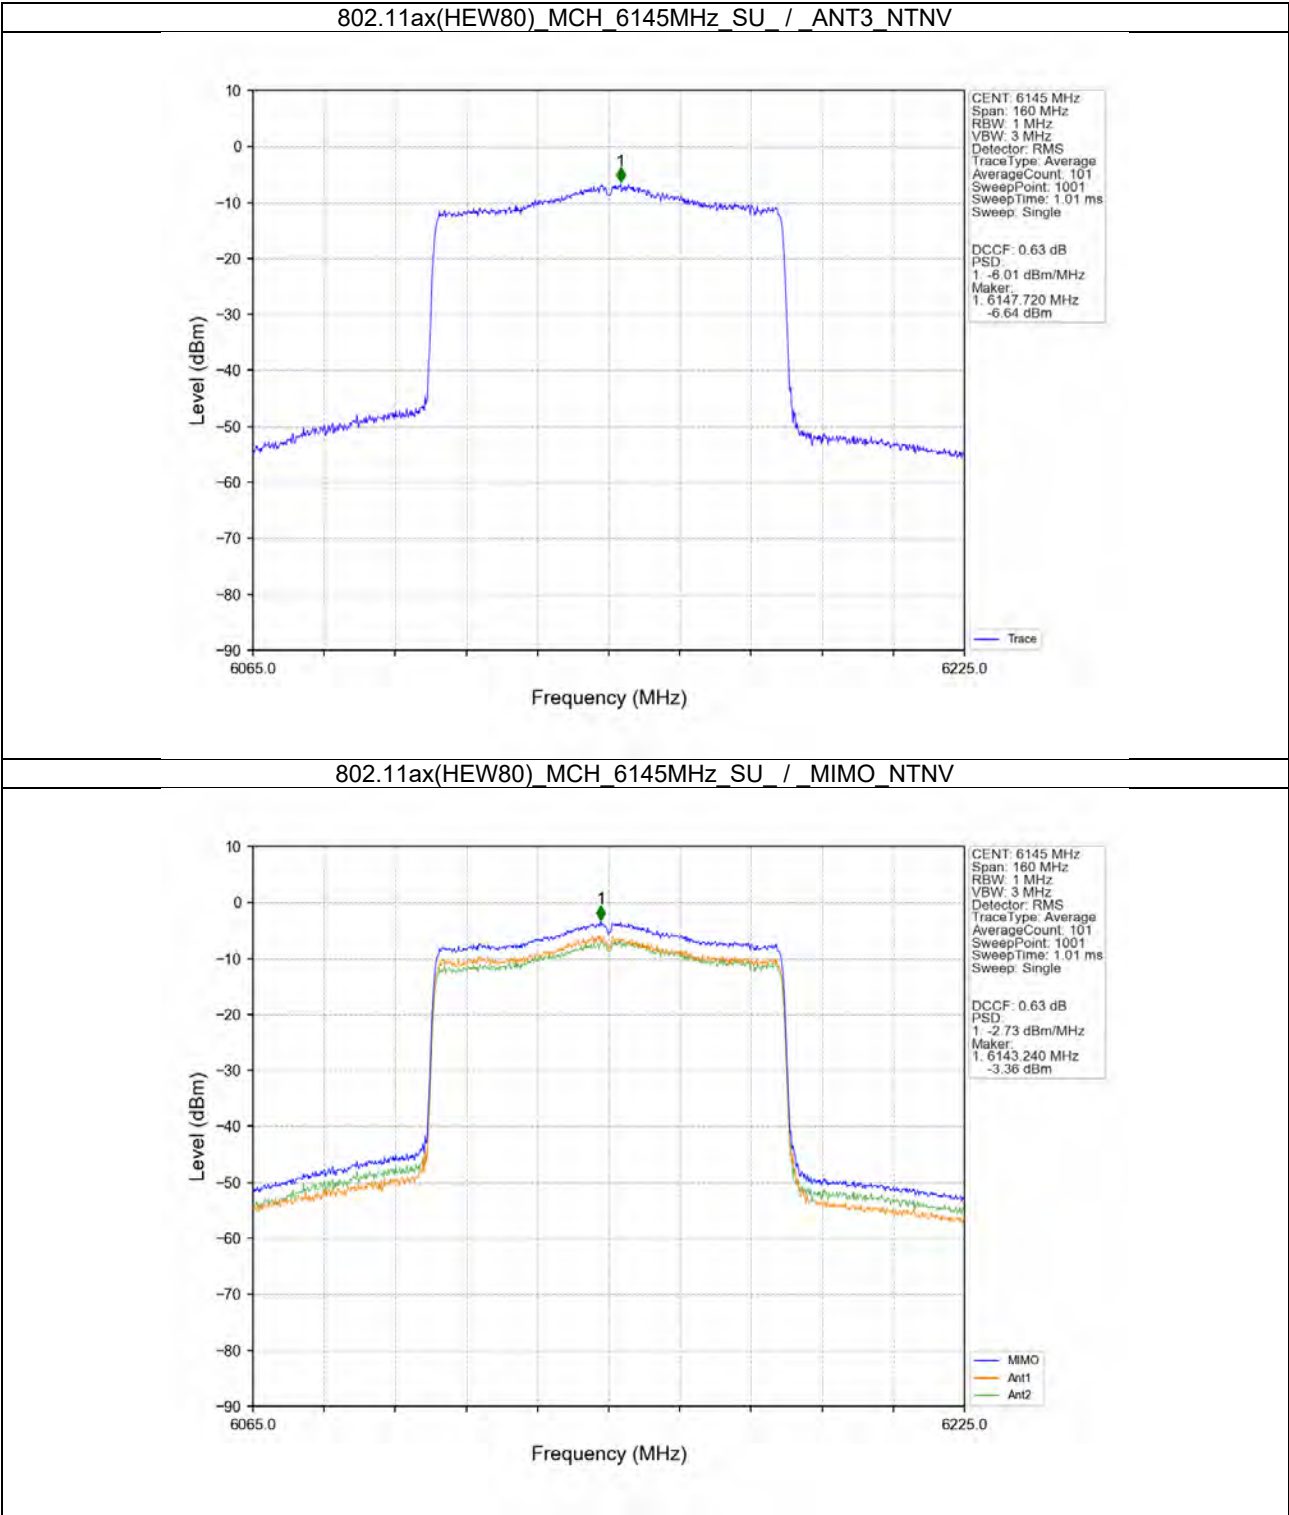



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 49 of 122

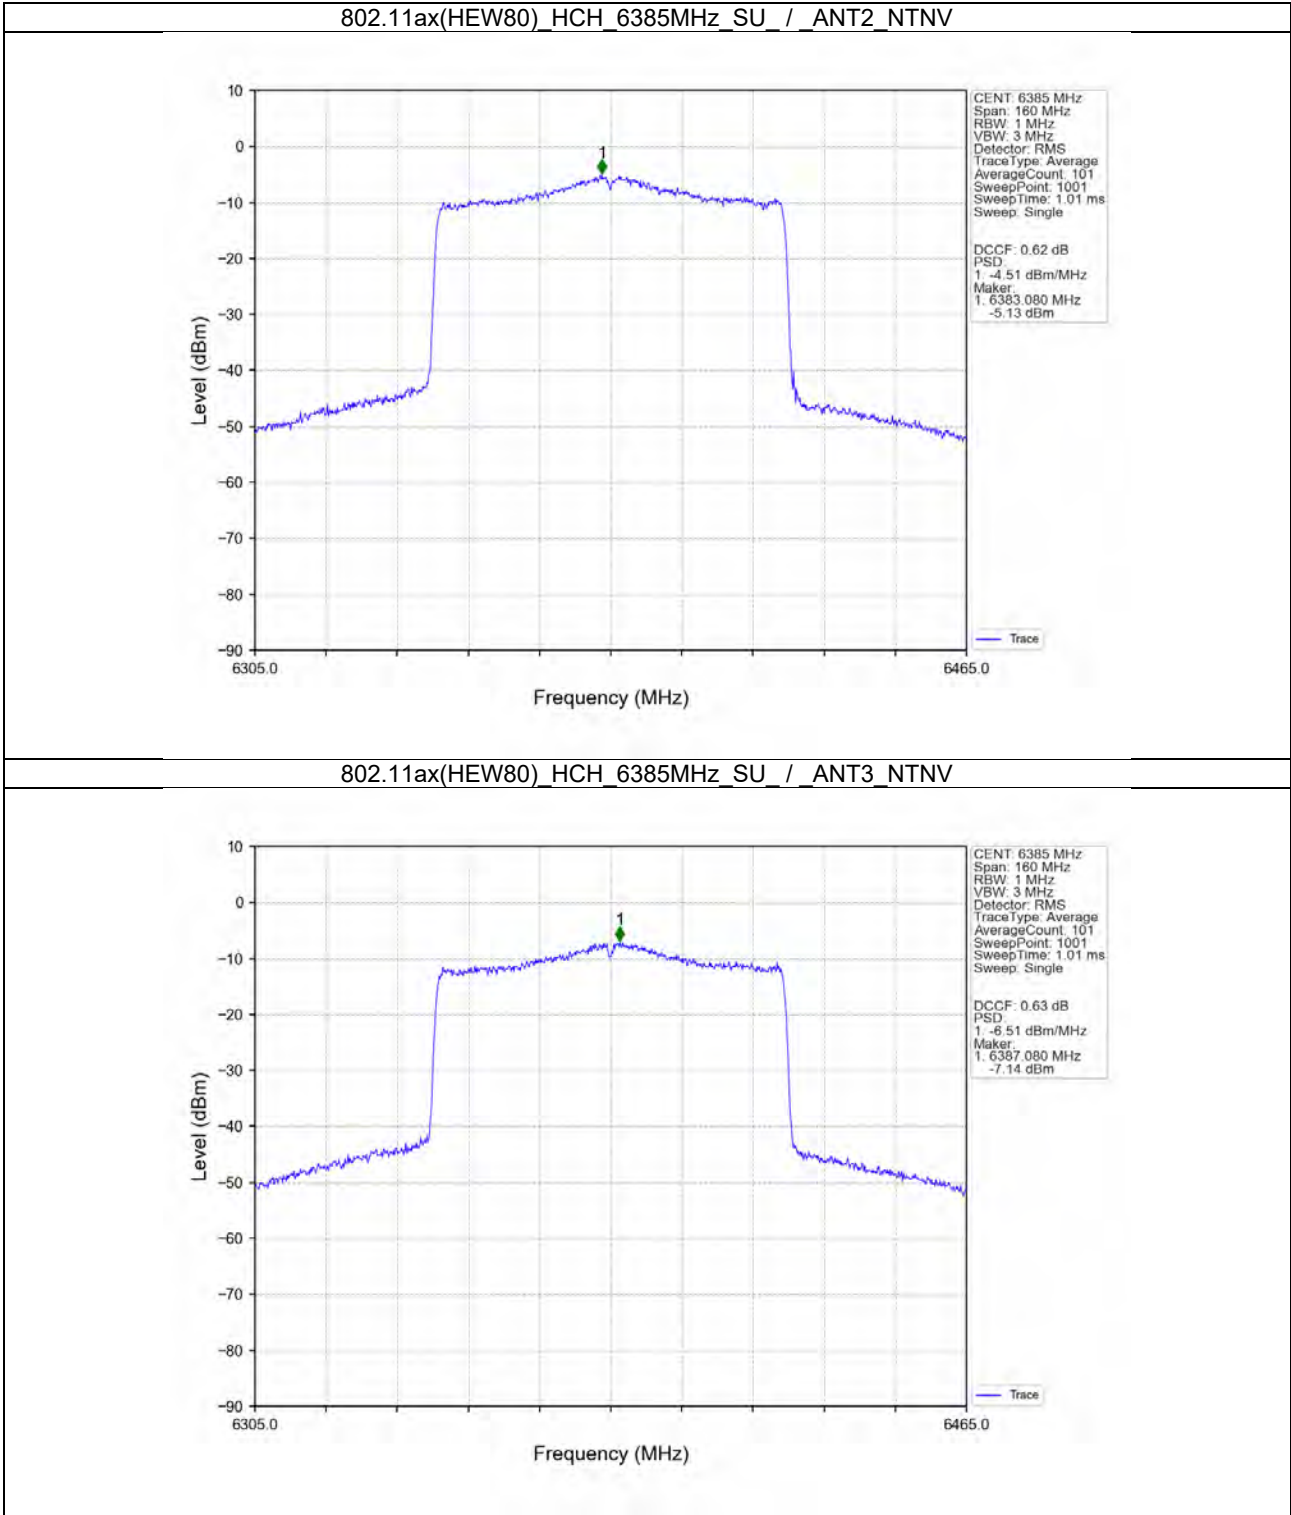



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 50 of 122

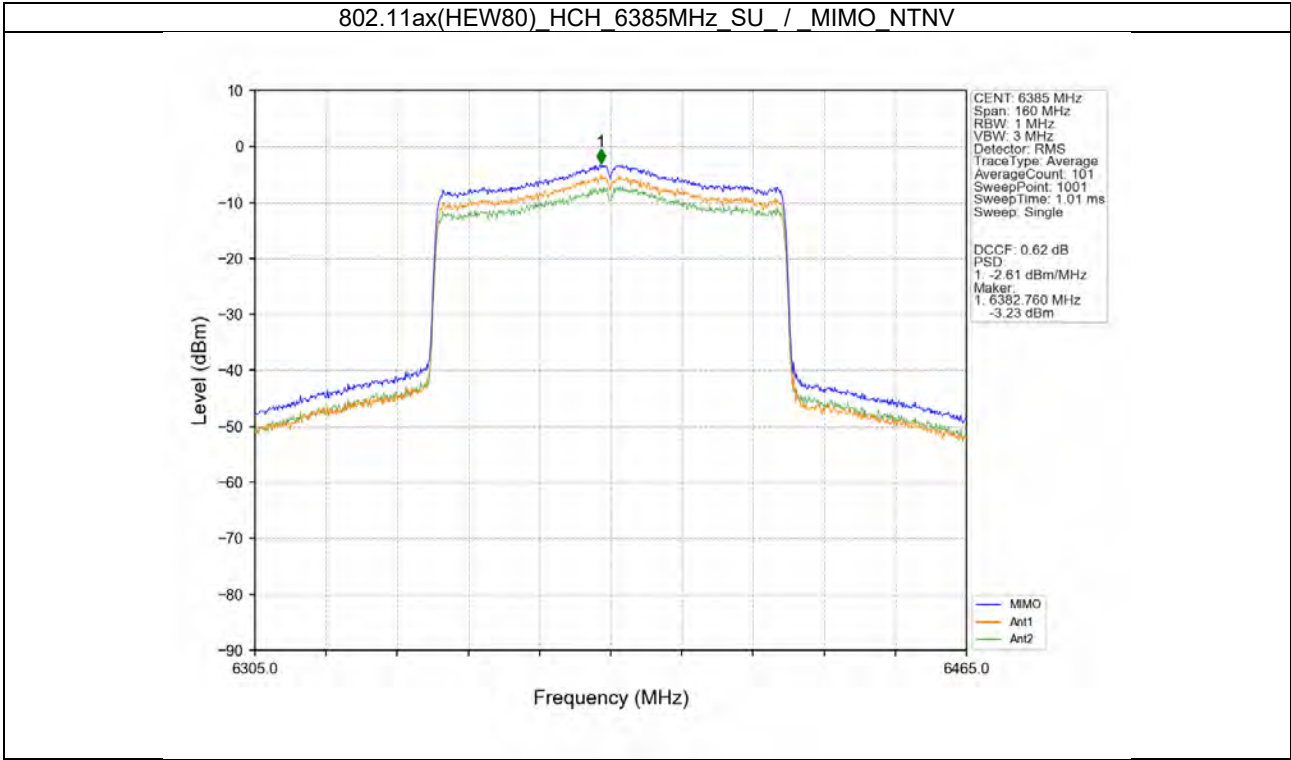




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 51 of 122


2.2.3 PSD

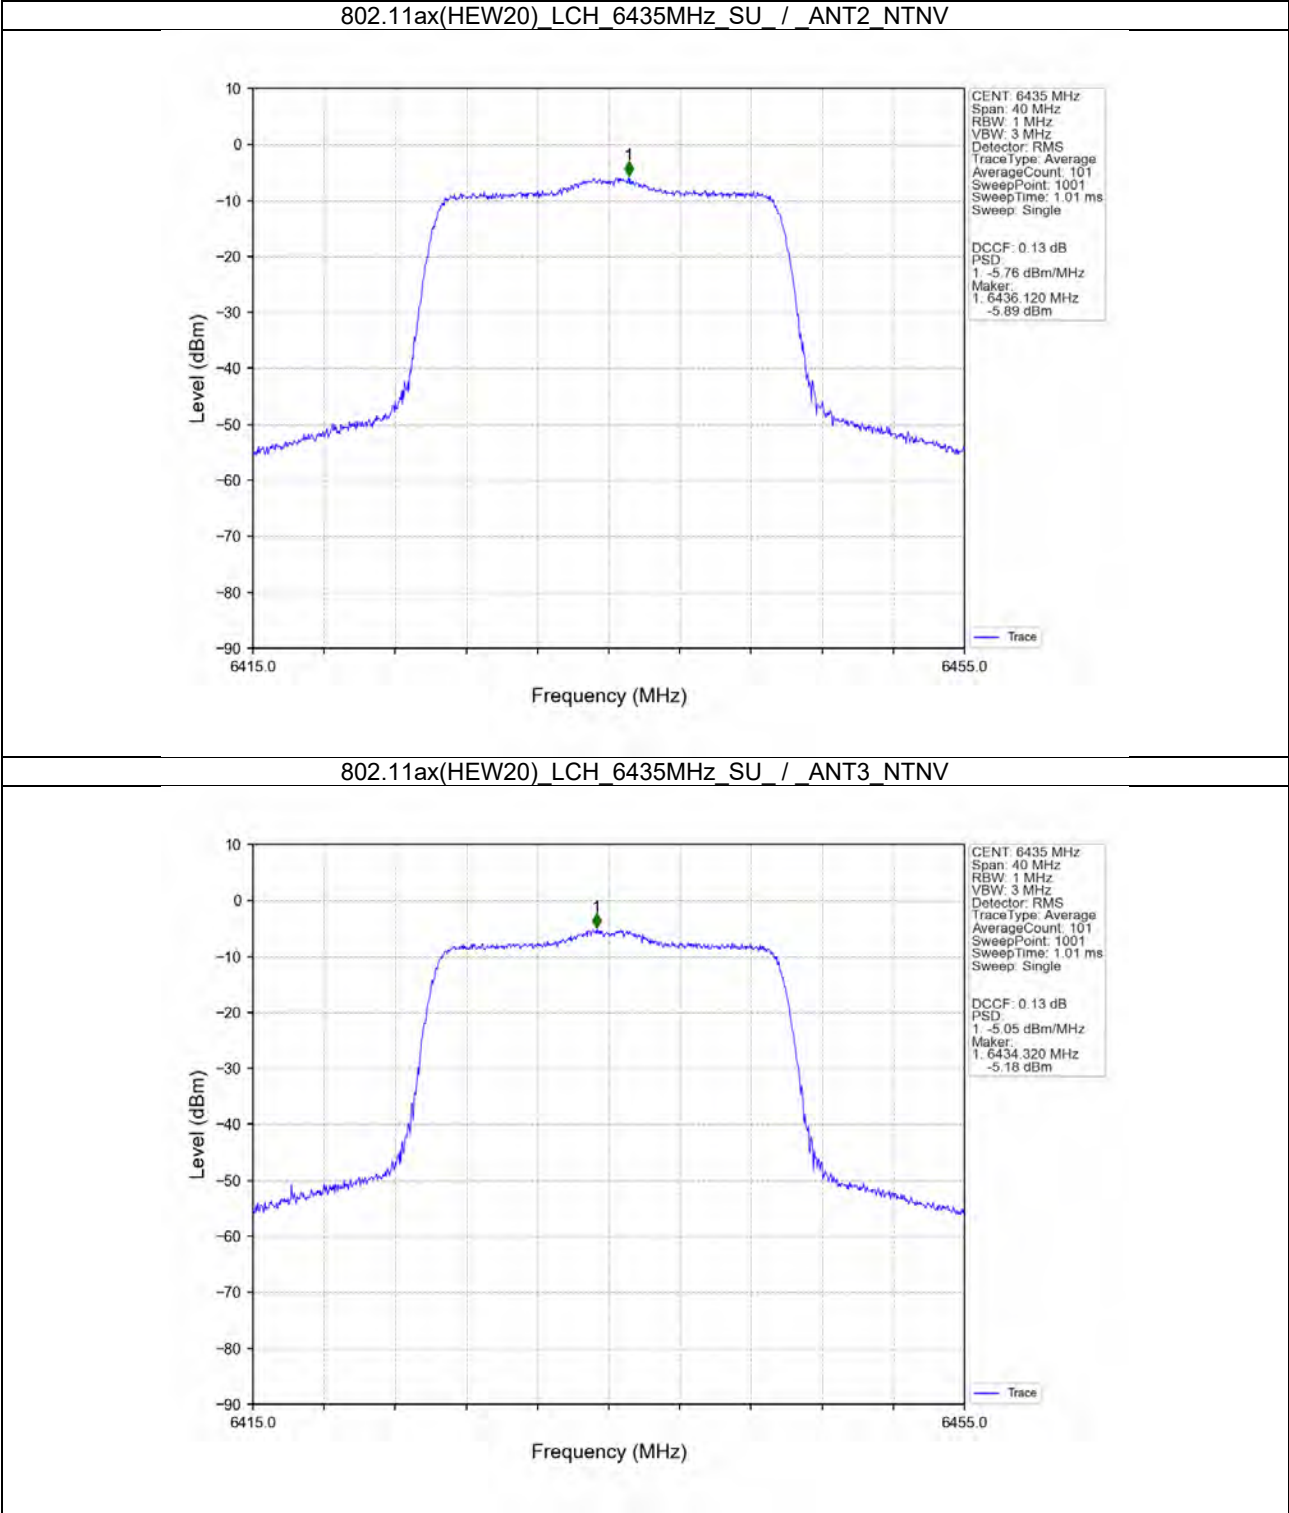



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 52 of 122

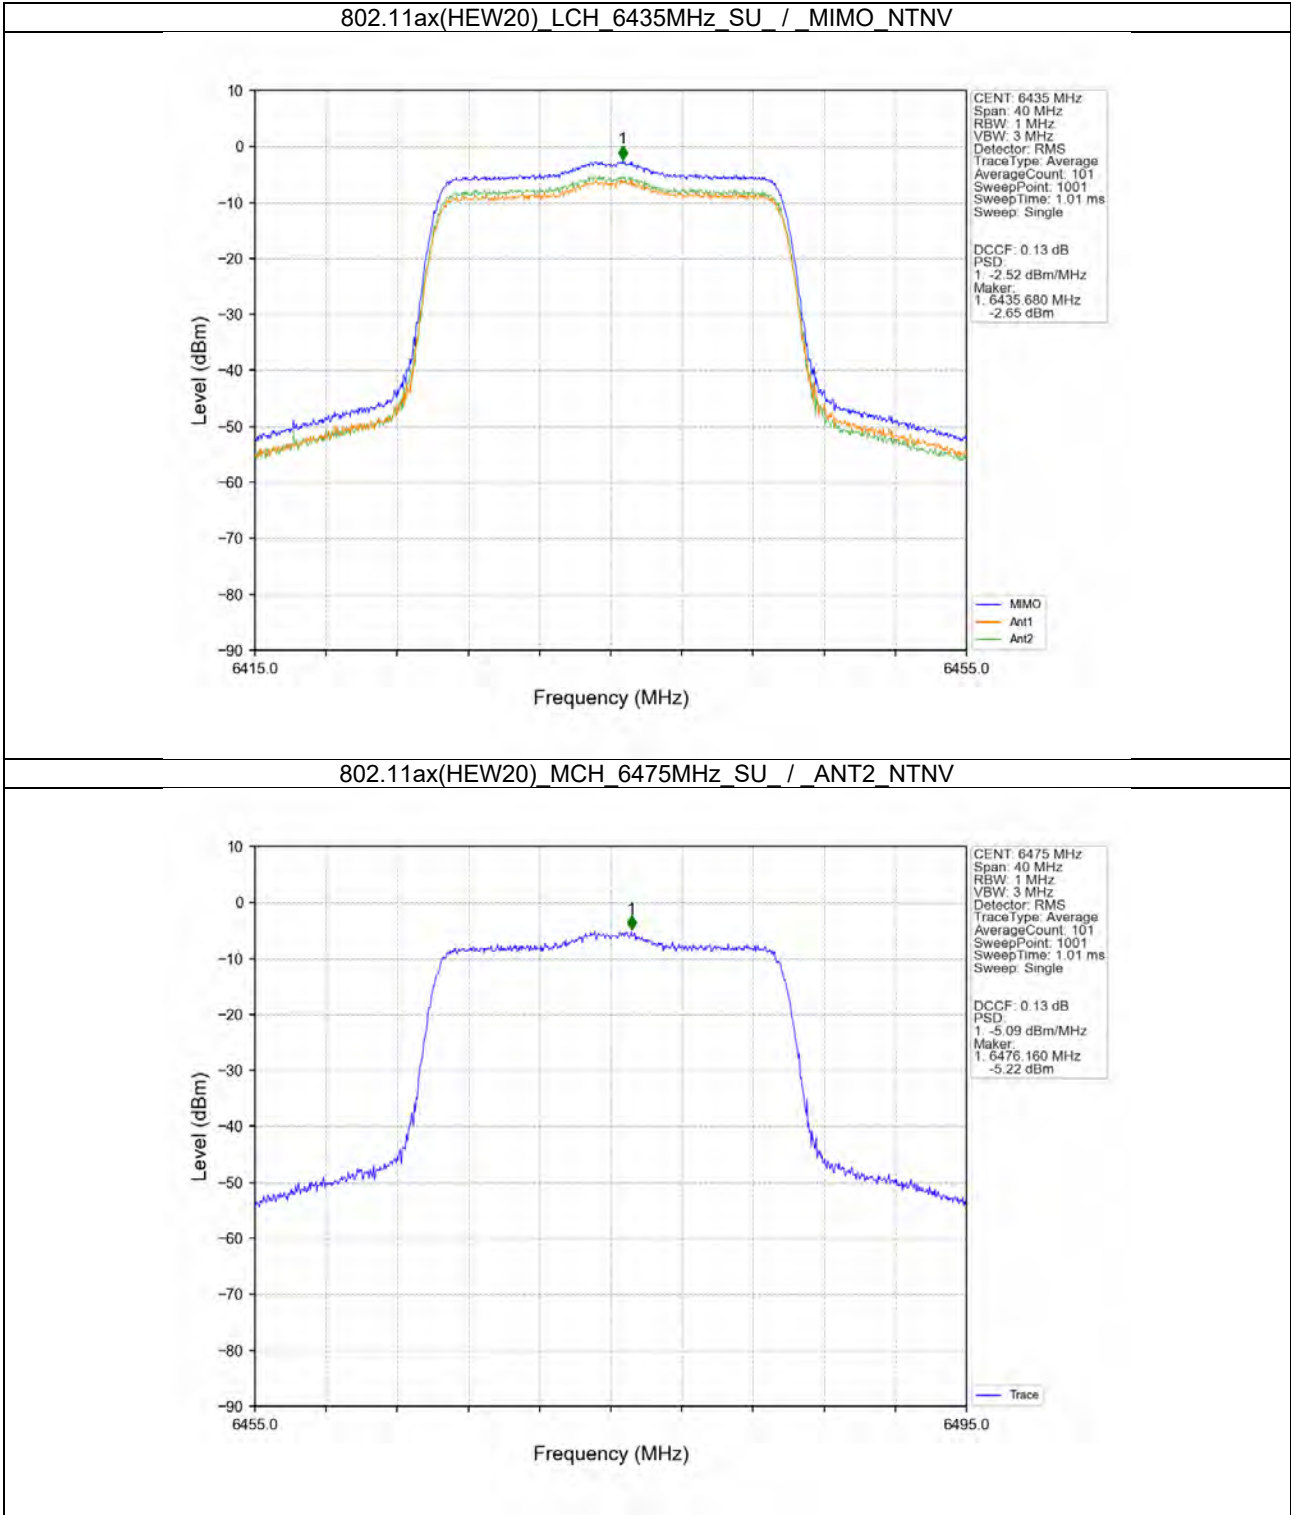



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 53 of 122

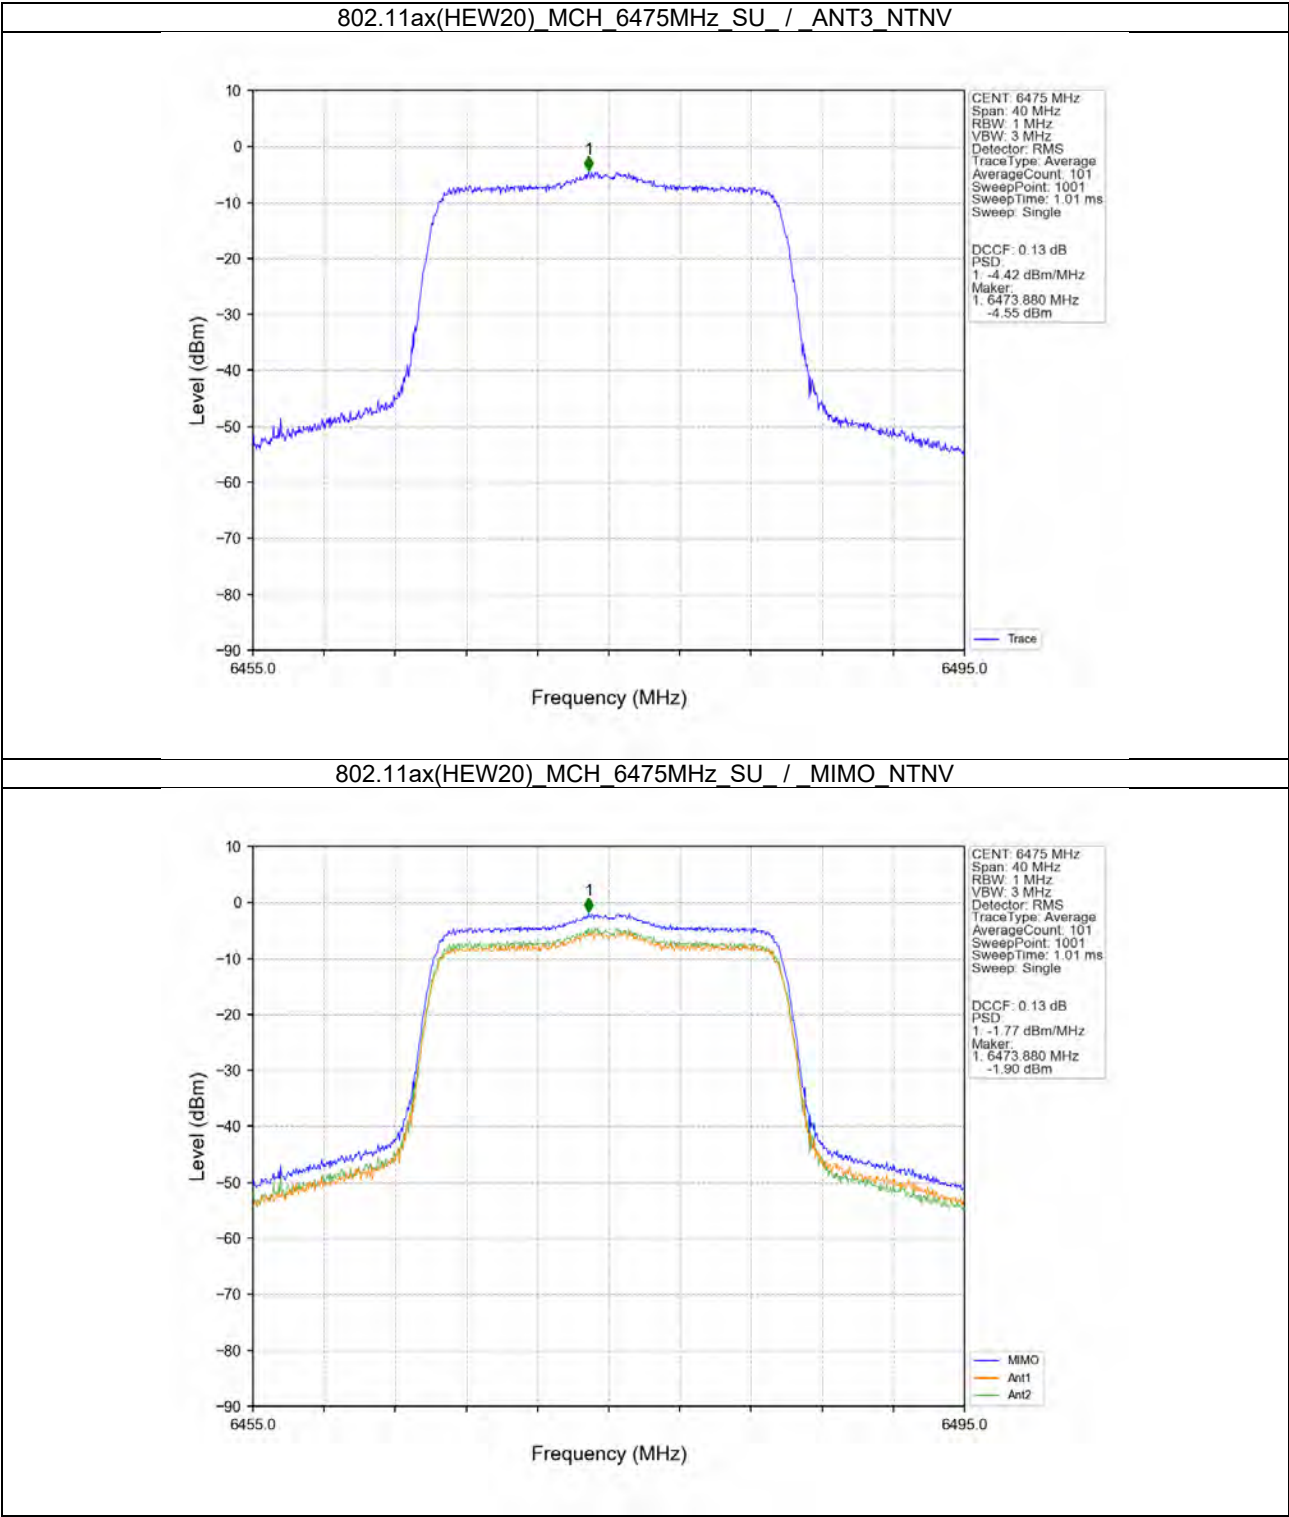



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 54 of 122

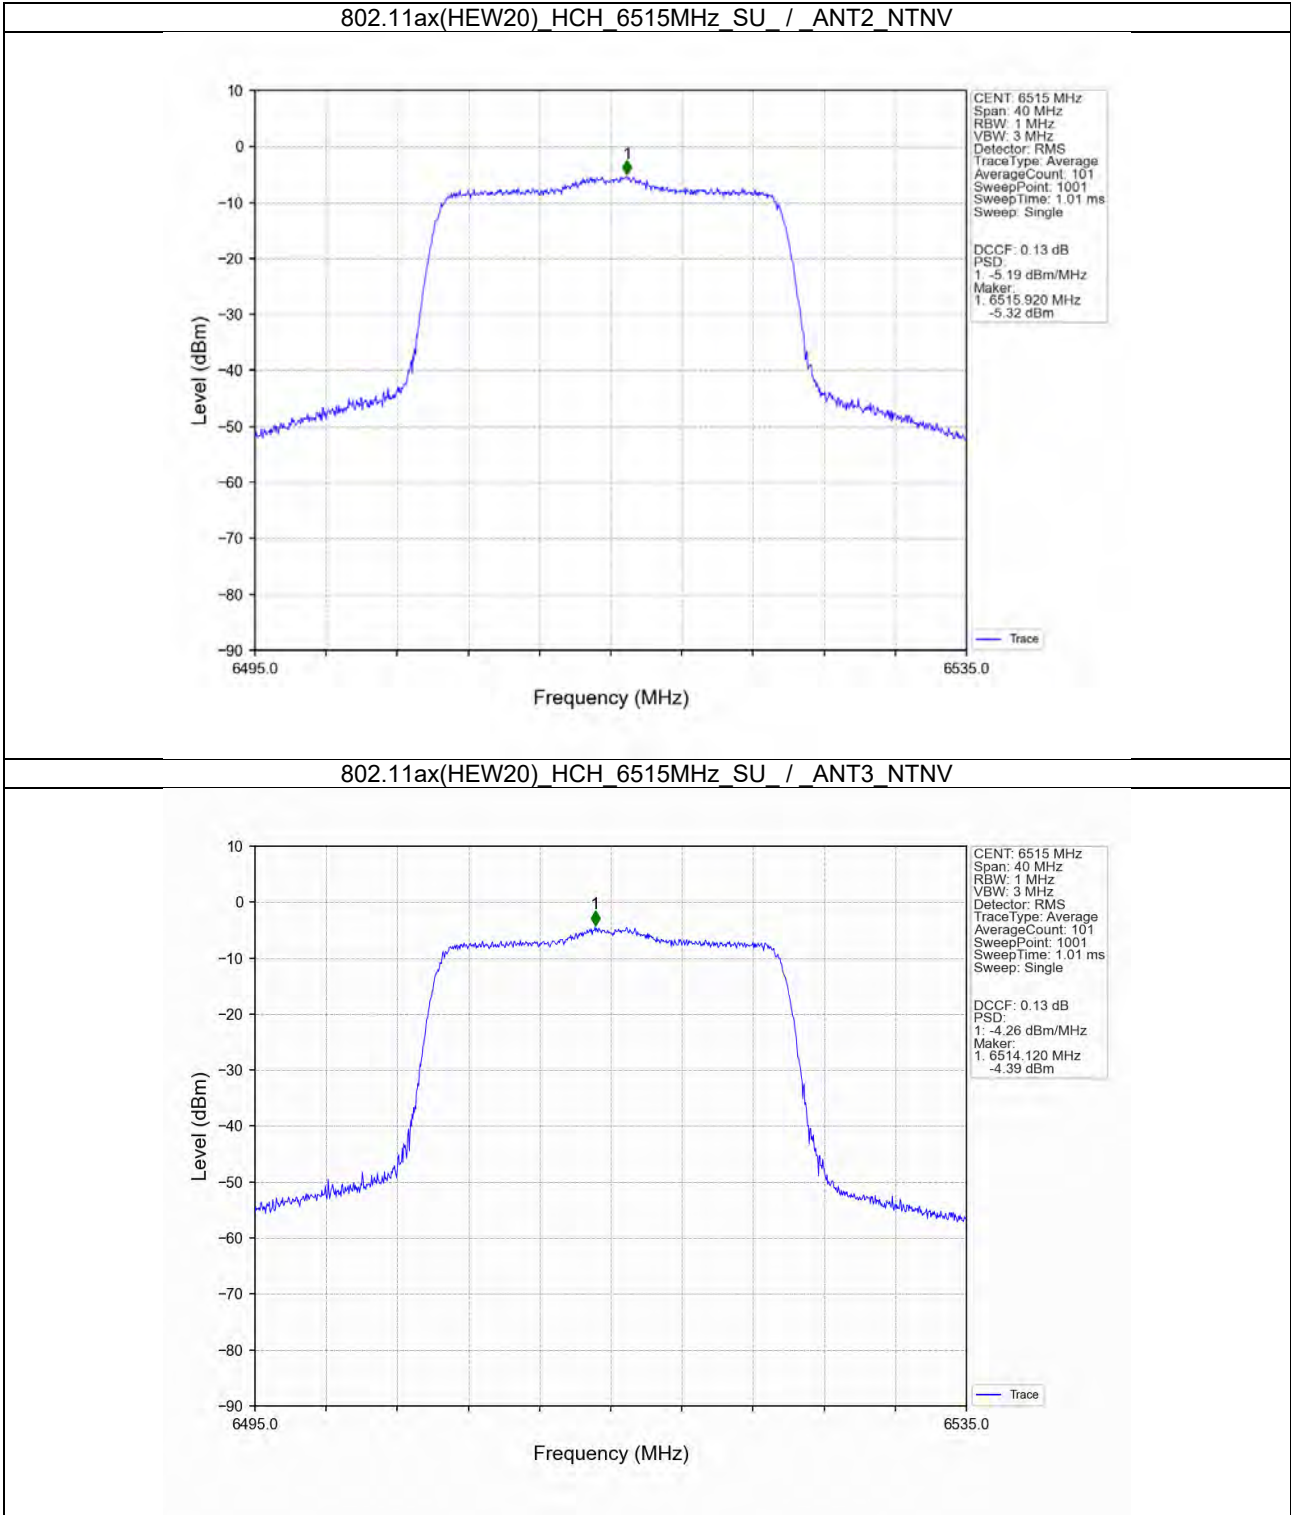



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 55 of 122

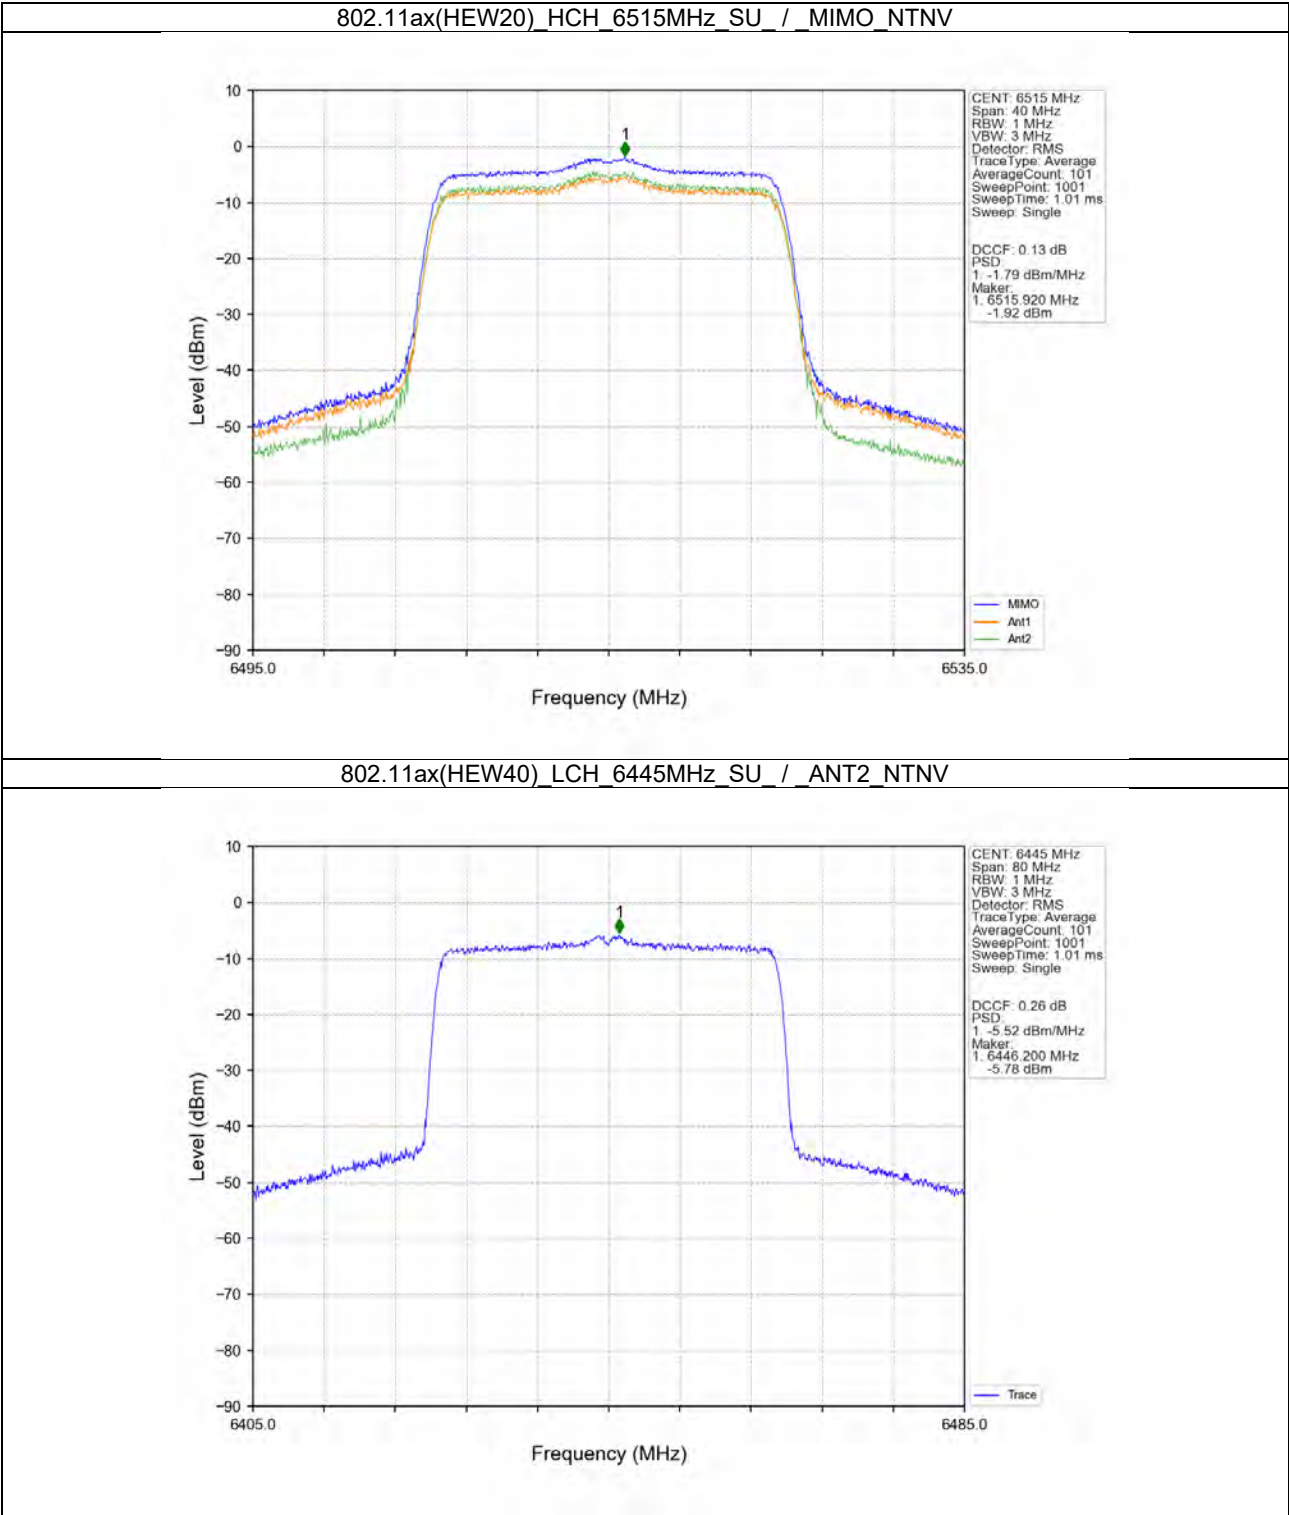



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 56 of 122

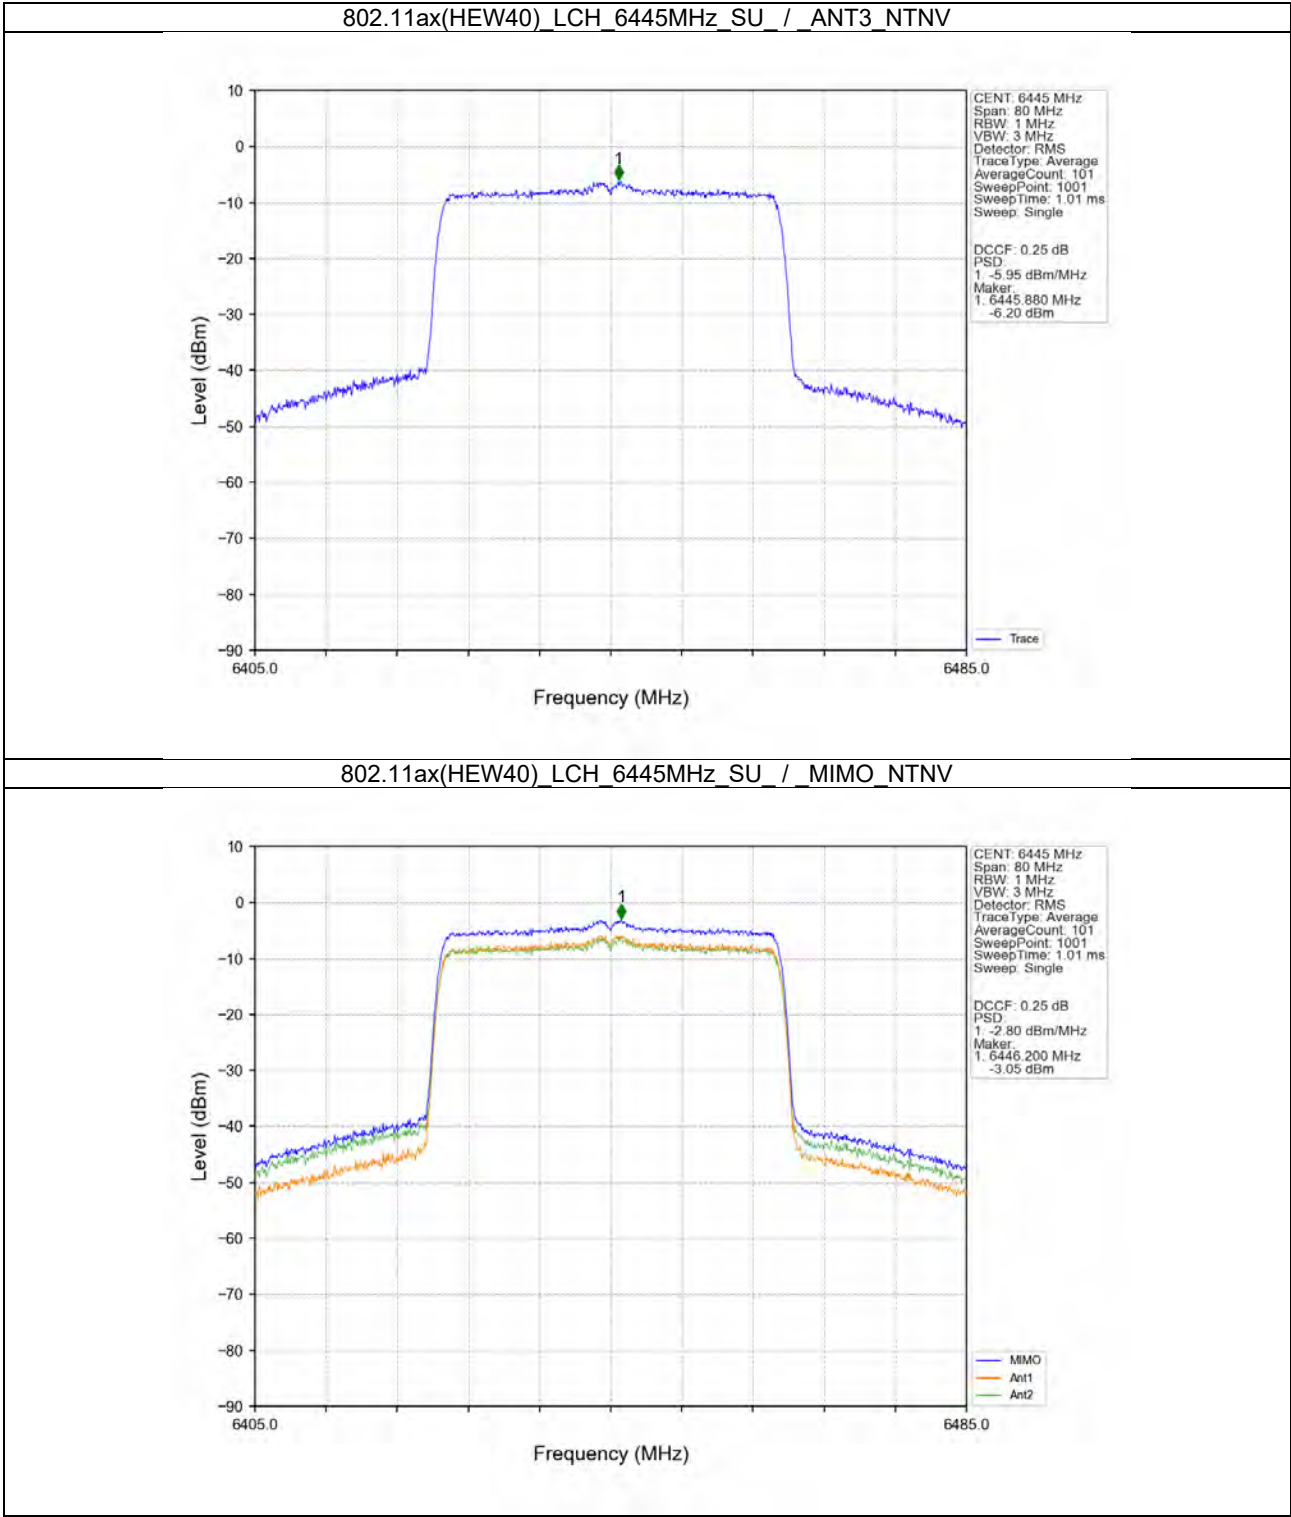



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 57 of 122

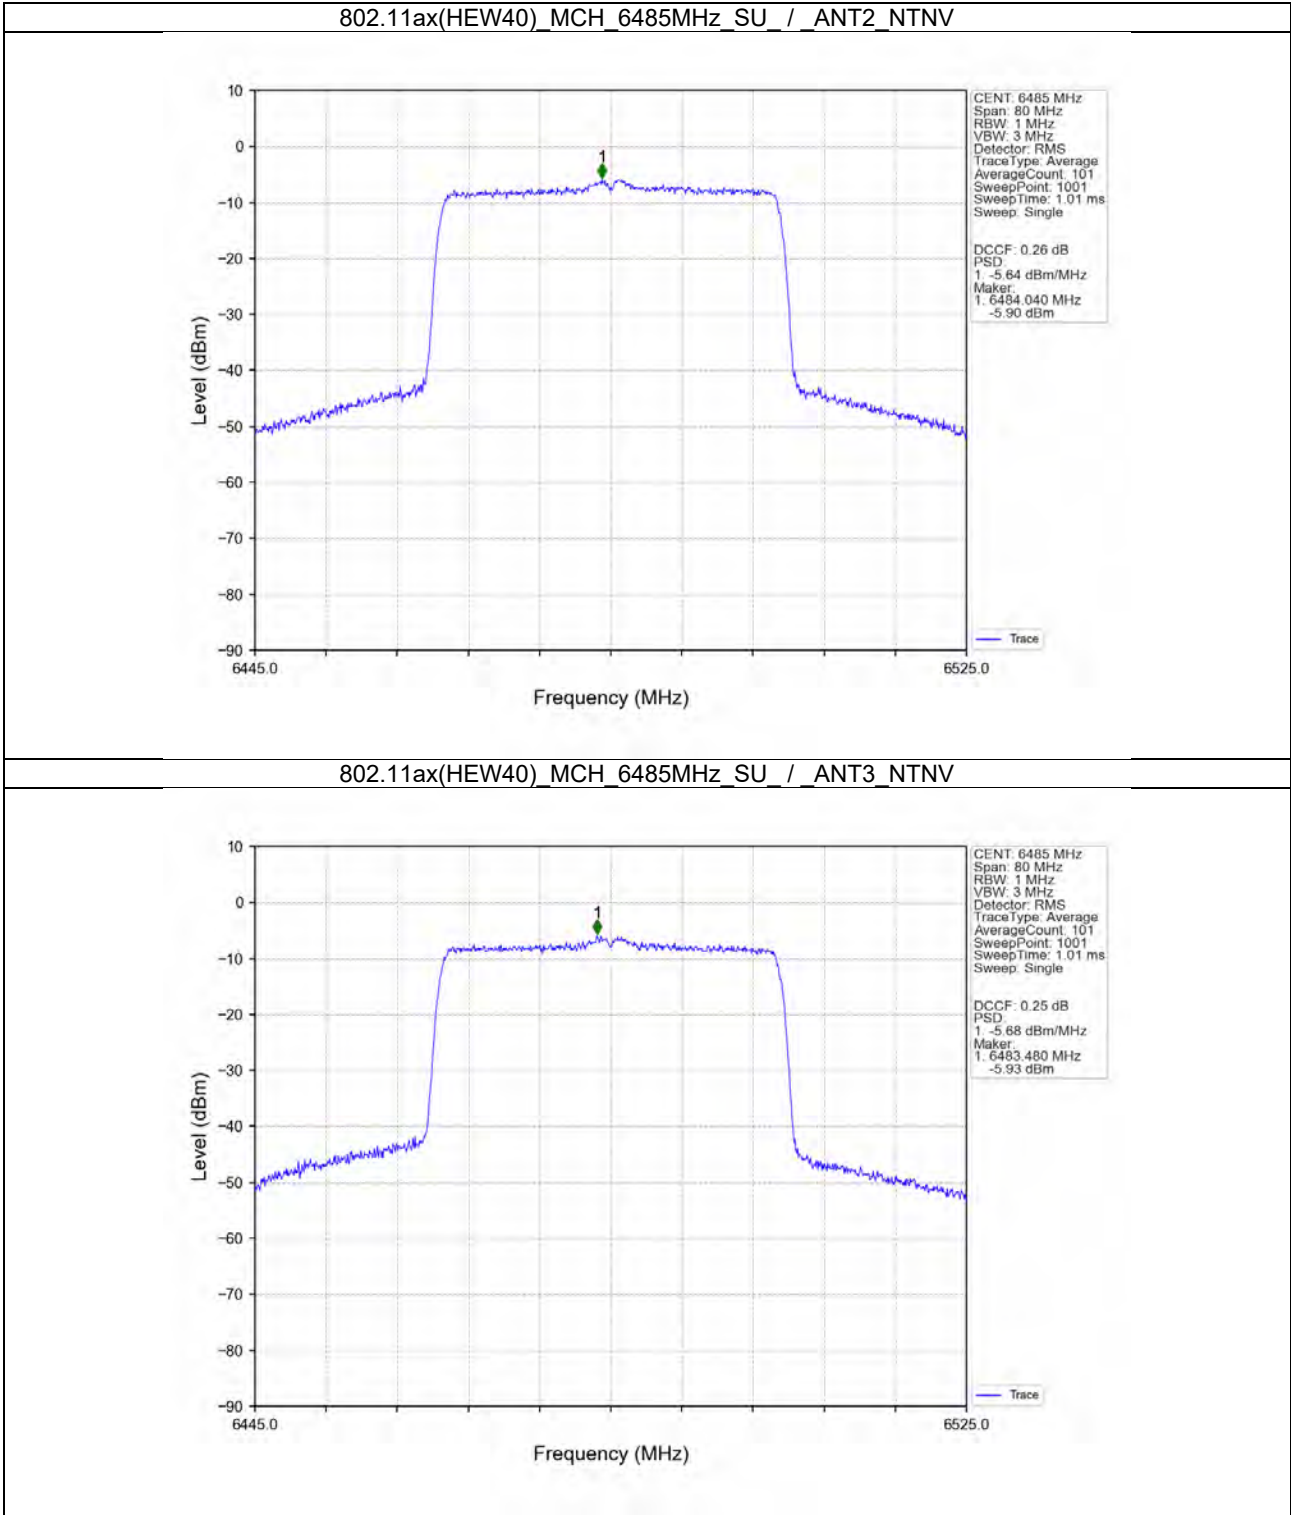



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 58 of 122

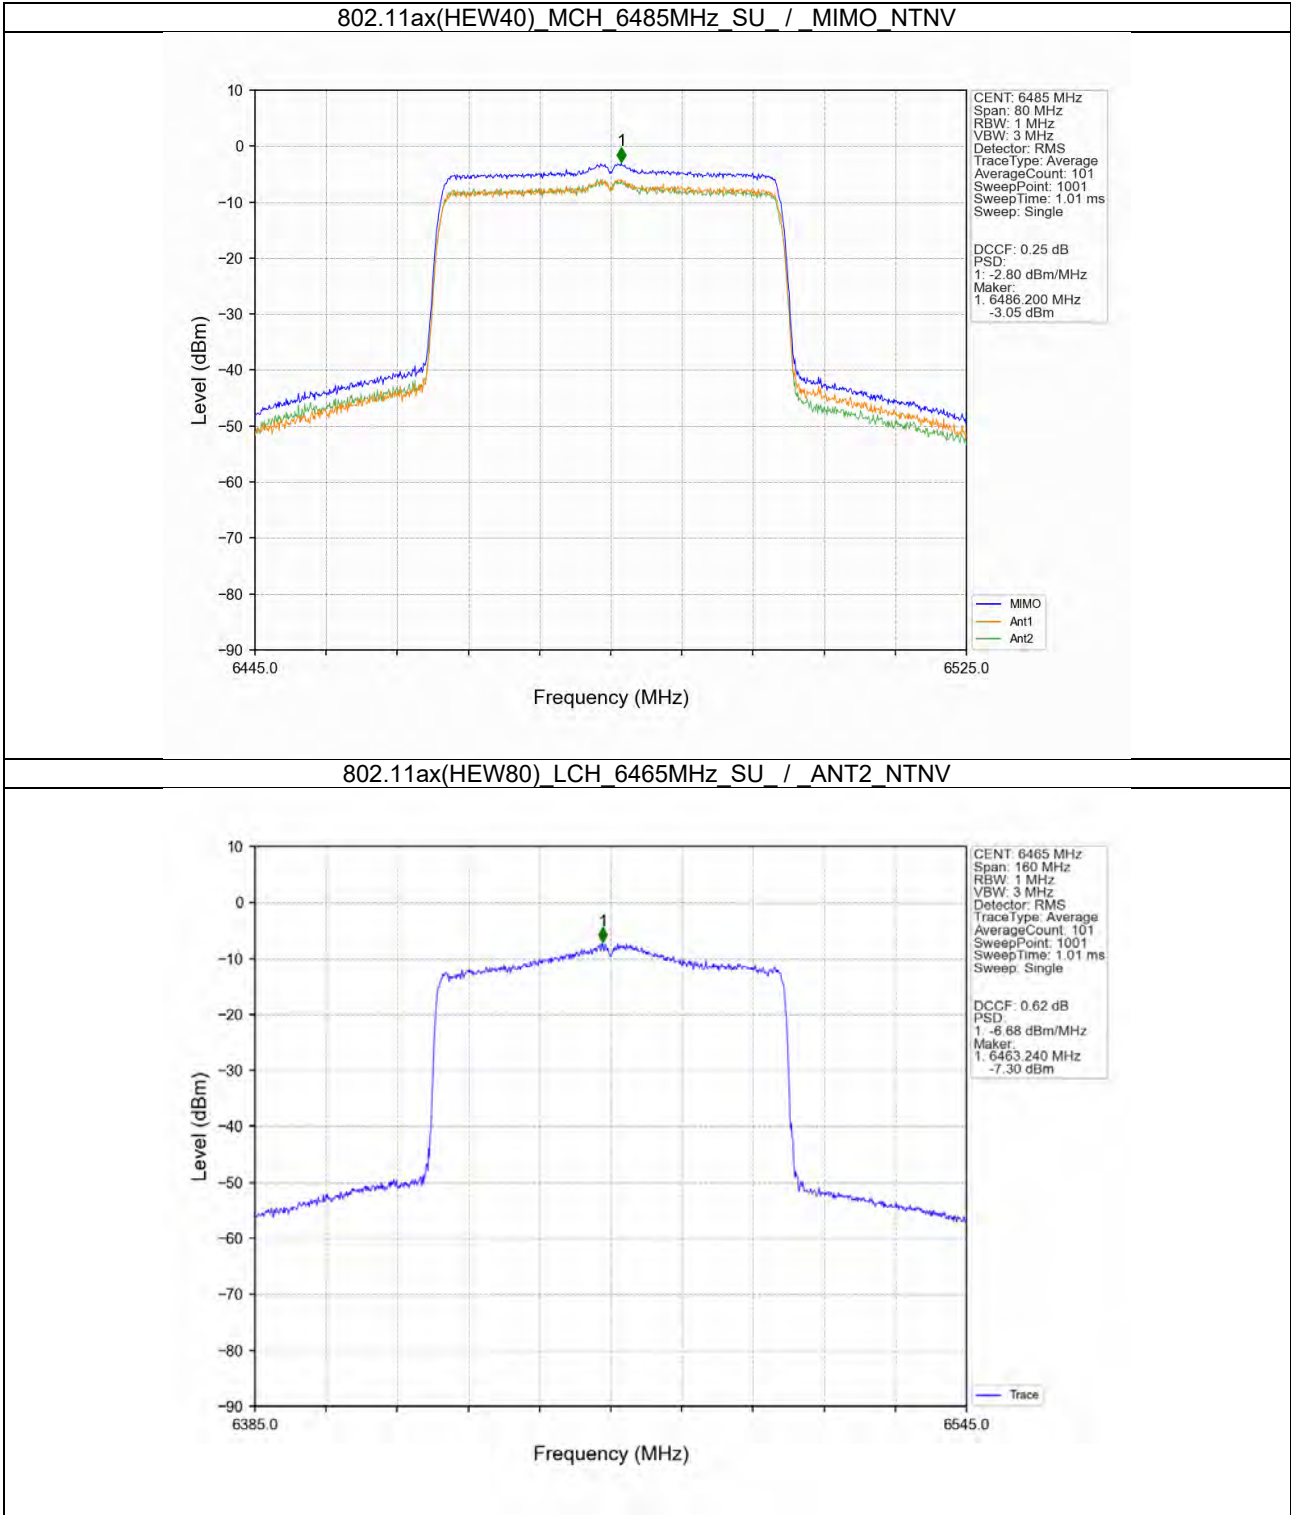



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 59 of 122

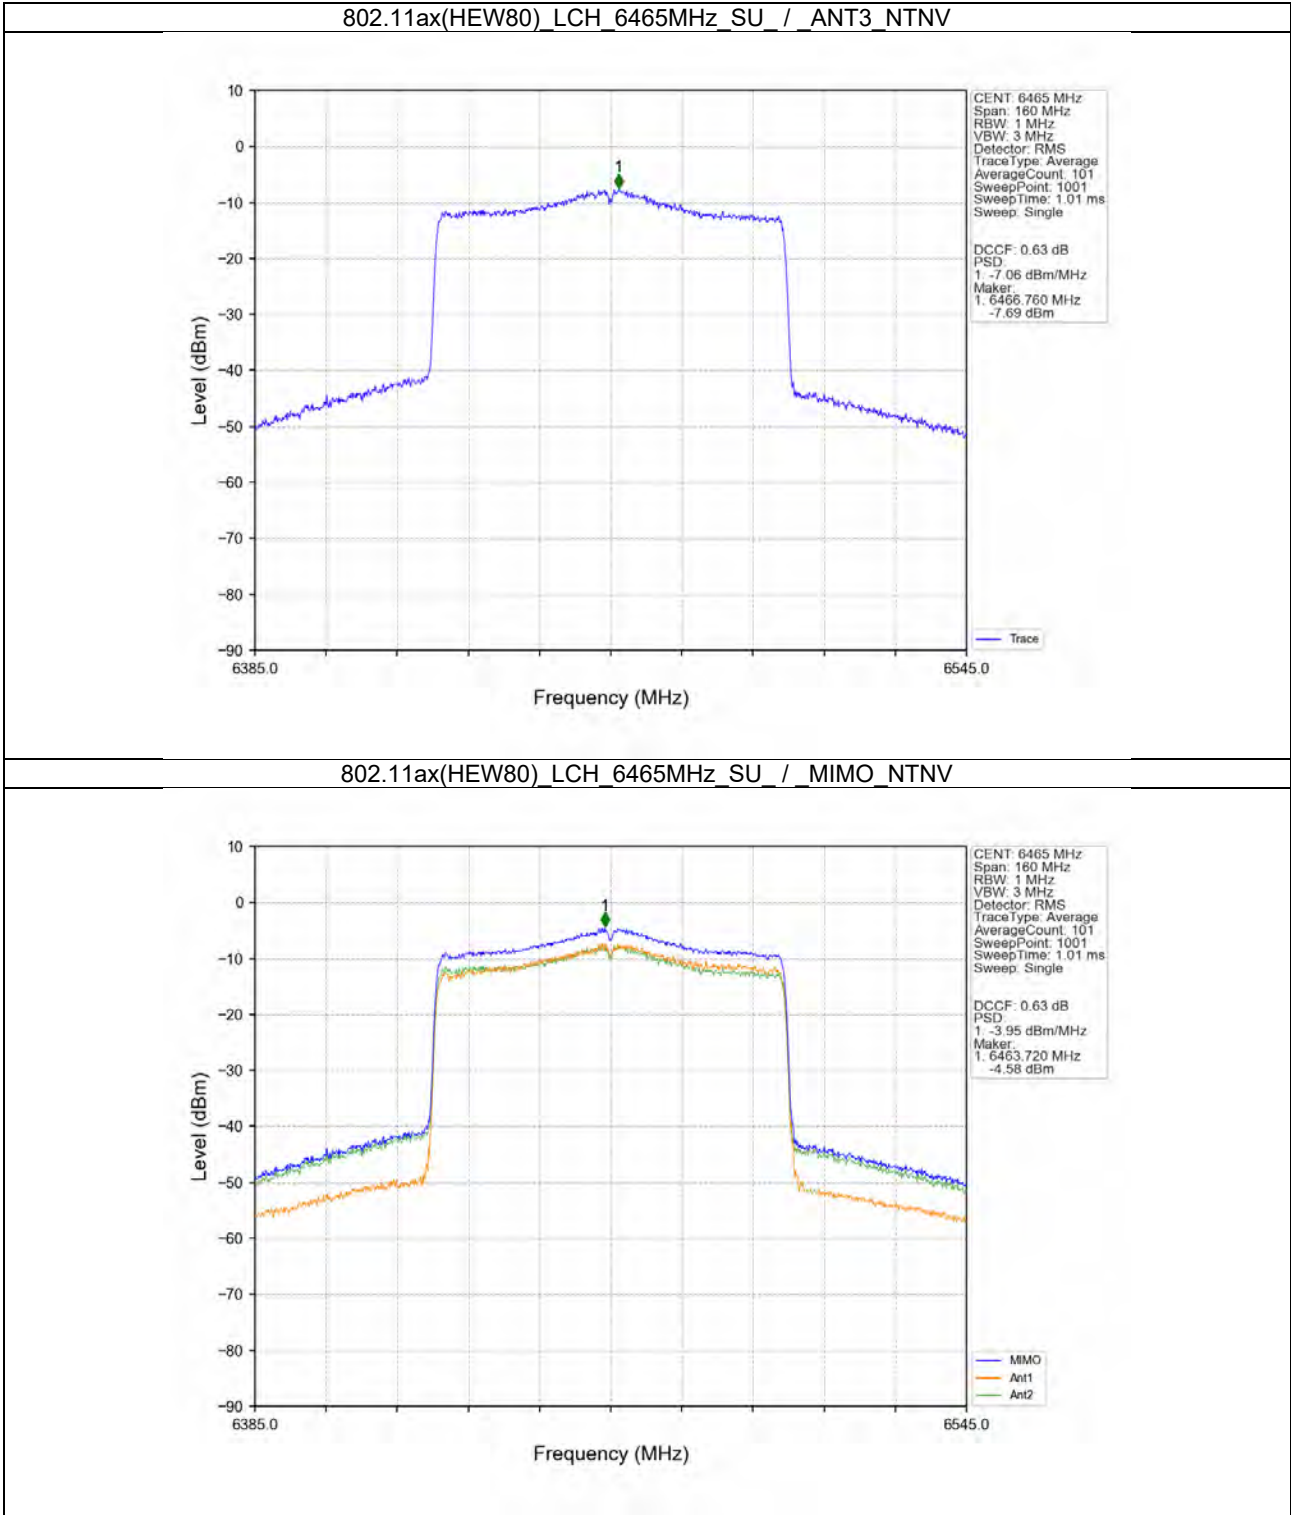




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 60 of 122


2.2.5 PSD

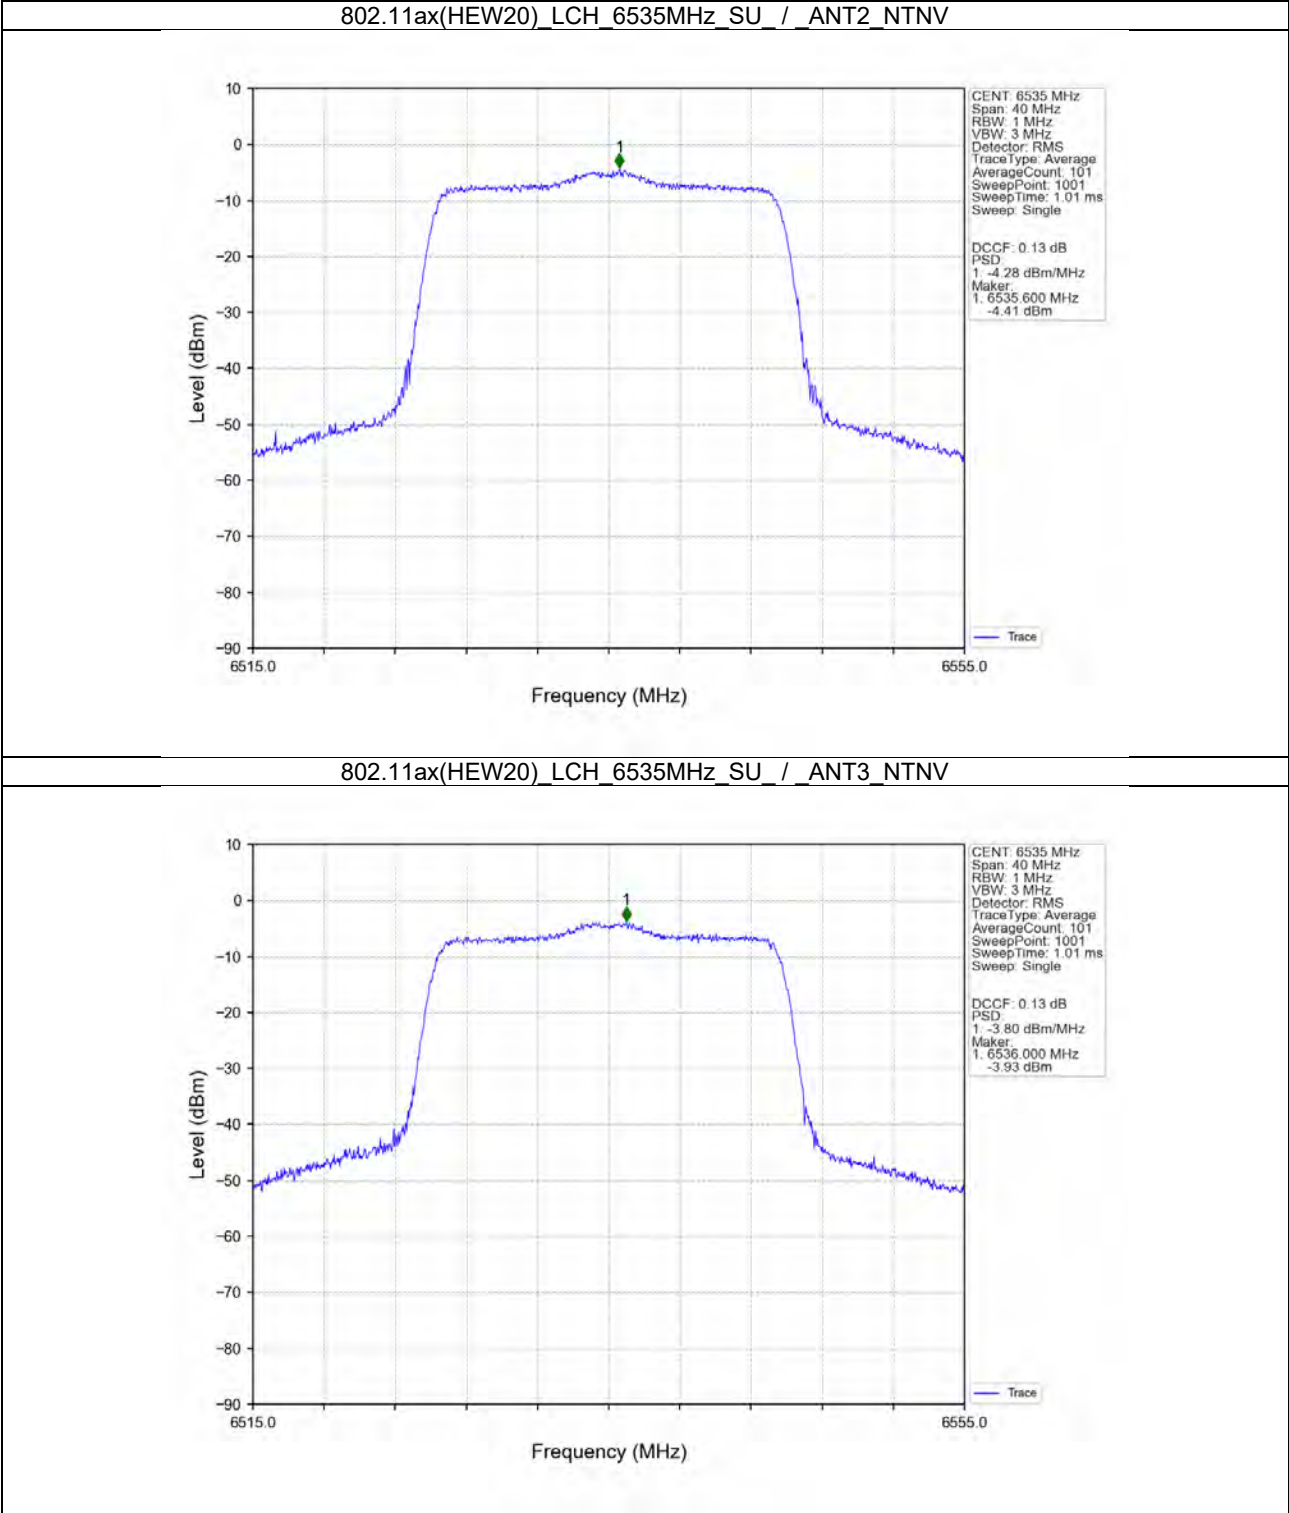




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 61 of 122

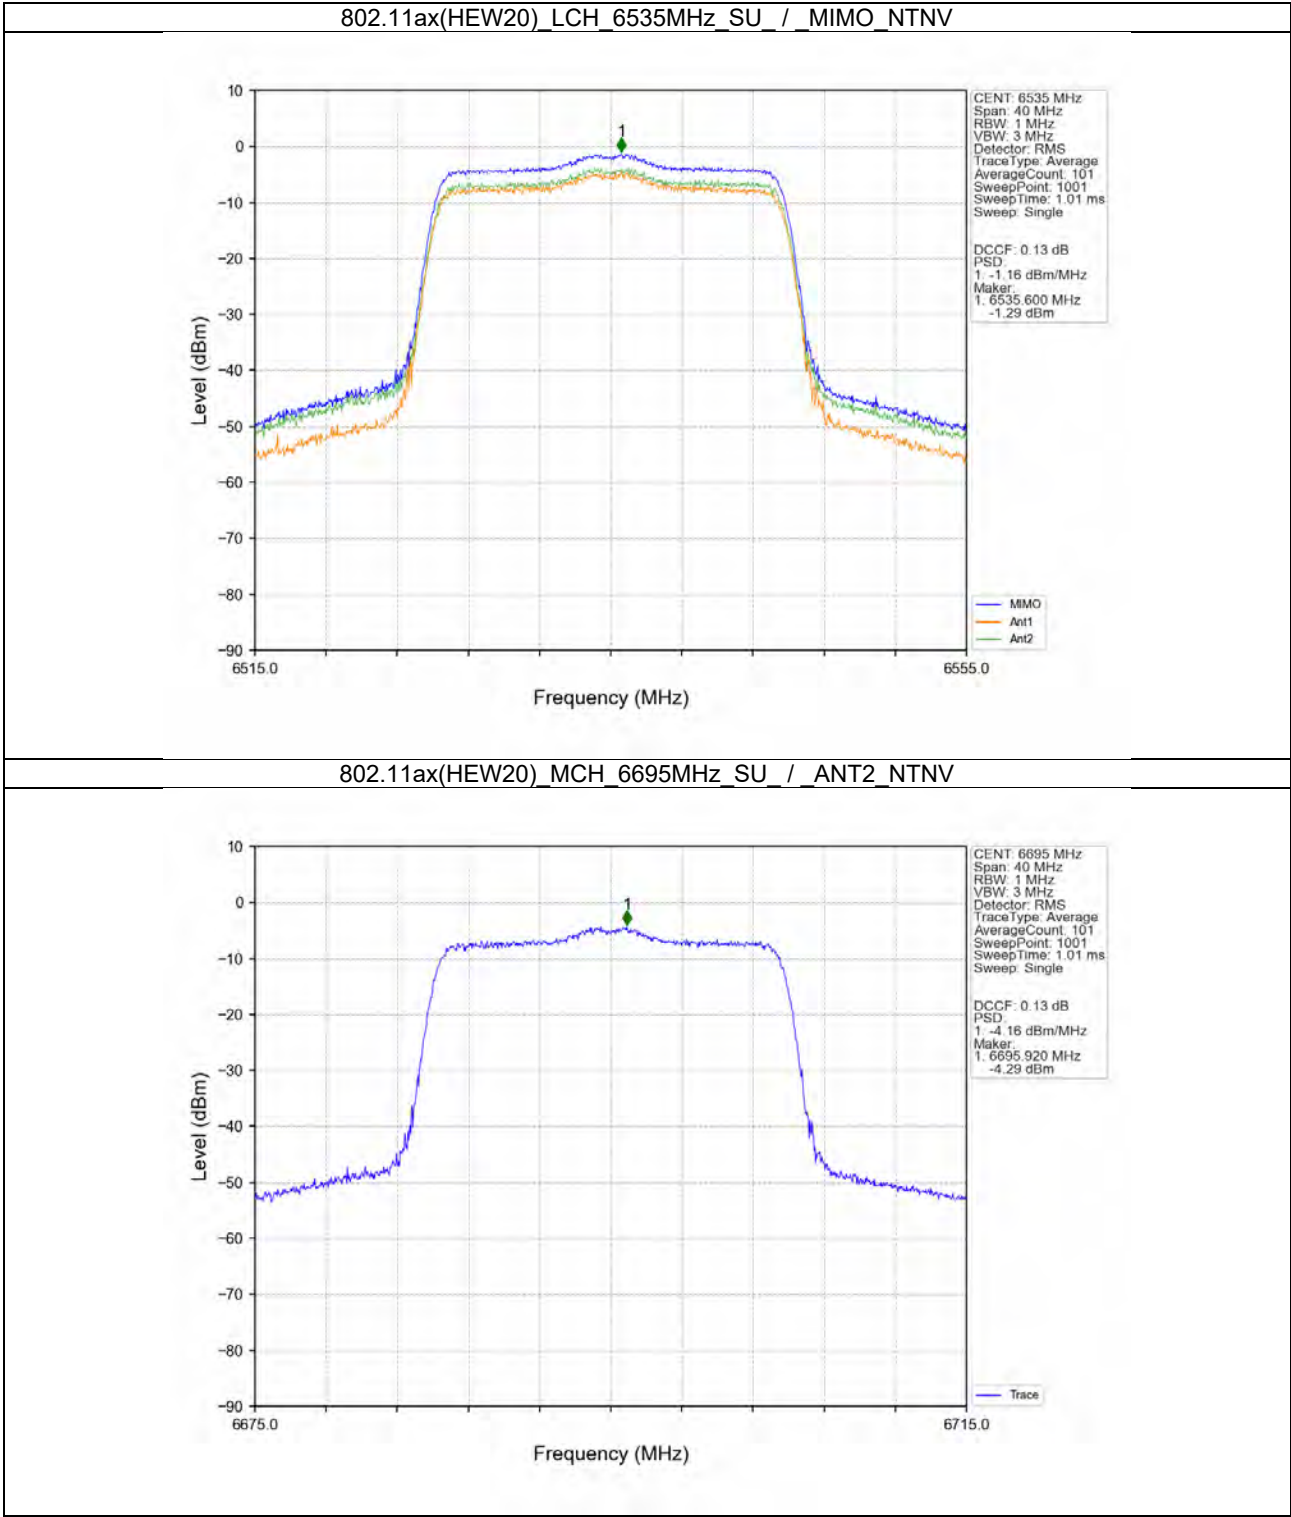

802.11ax(HEW20)_MCH_6695MHz_SU_/_ANT3_NTNV

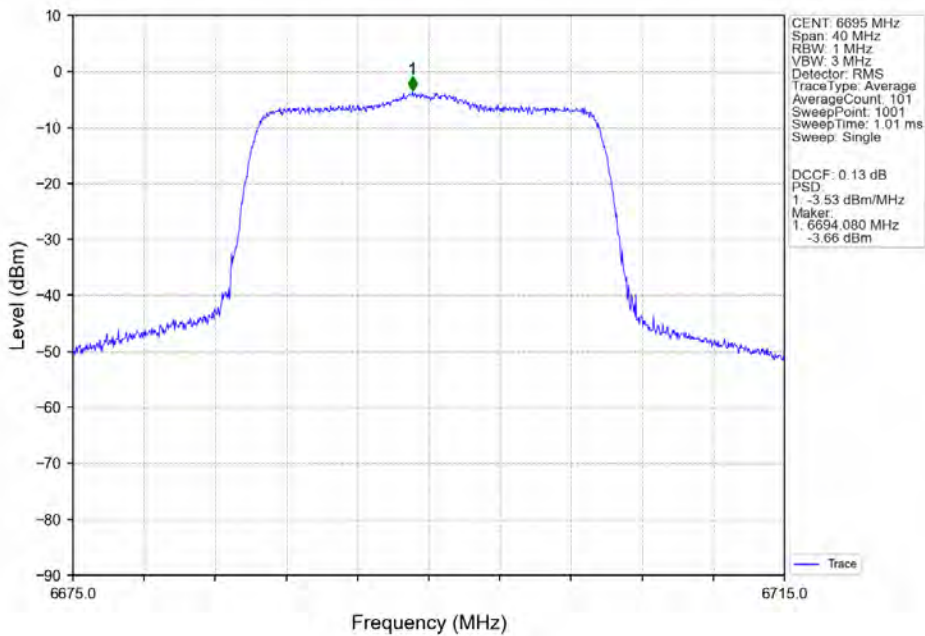

802.11ax(HEW20)_MCH_6695MHz_SU_/_MIMO_NTNV

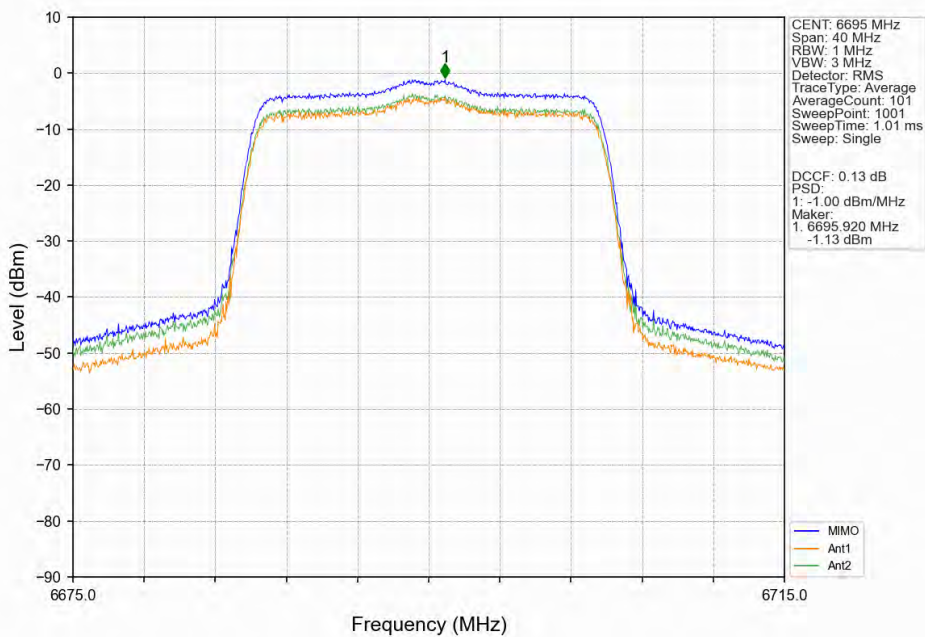





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 63 of 122

802.11ax(HEW20)_HCH_6855MHz_SU_/_ANT2_NTNV

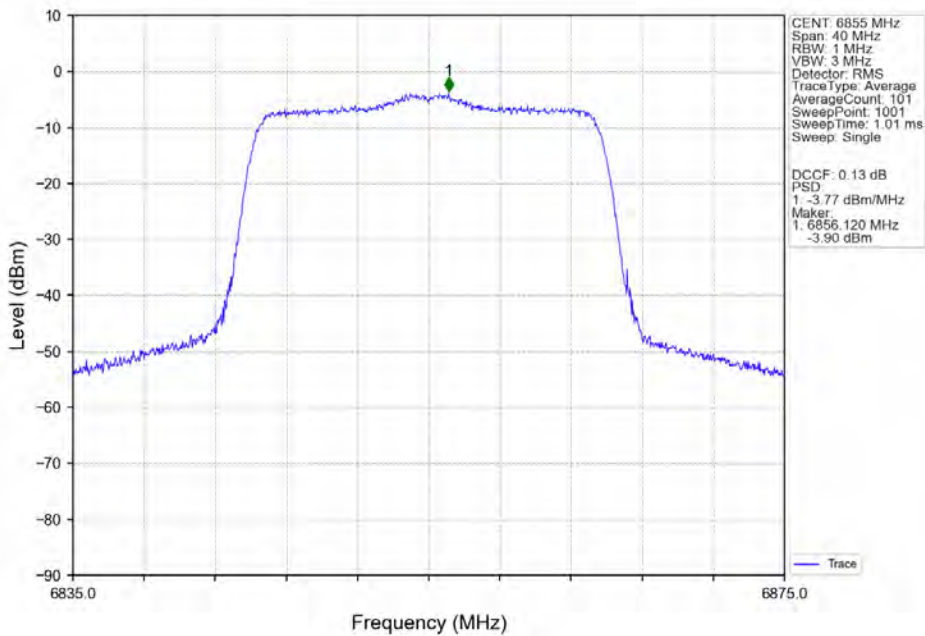


802.11ax(HEW20)_HCH_6855MHz_SU_/_ANT3_NTNV

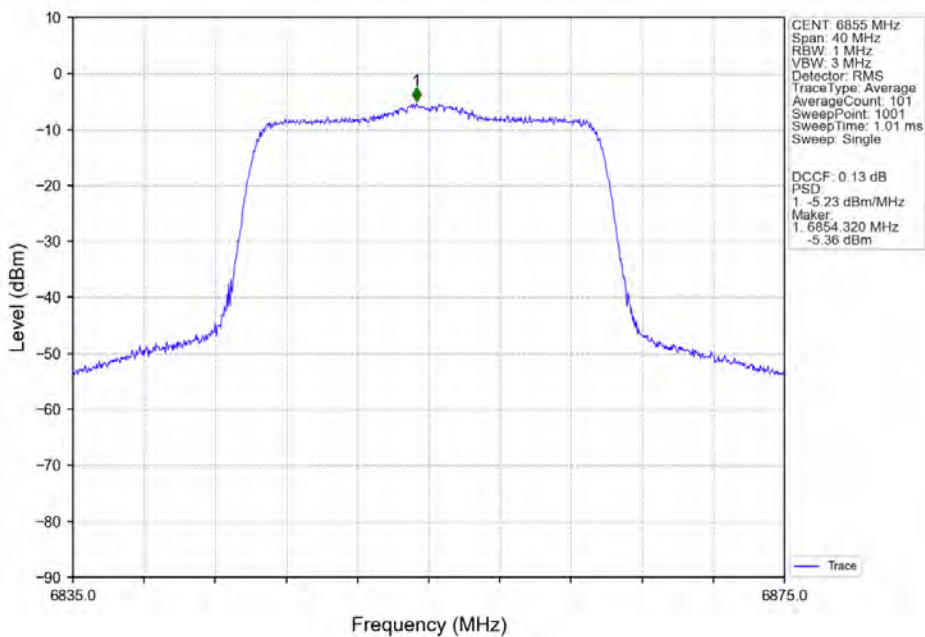



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 64 of 122

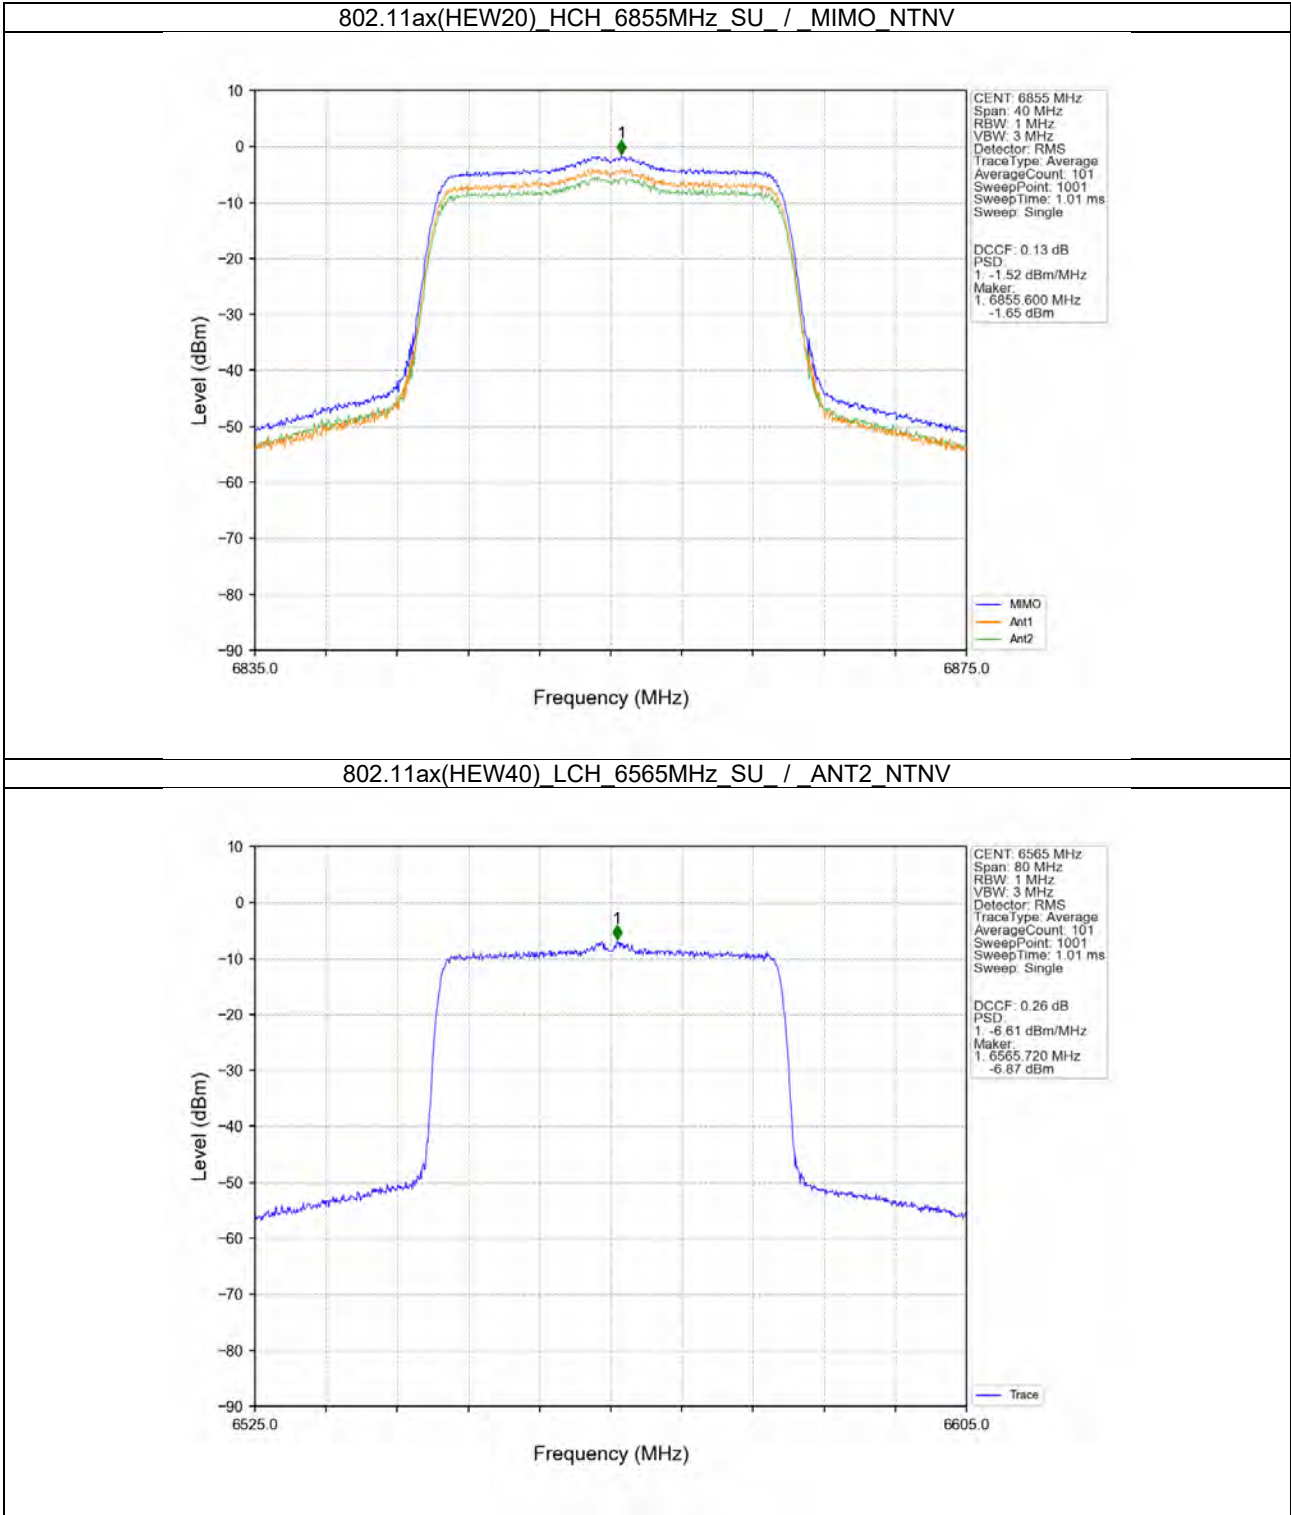



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 65 of 122

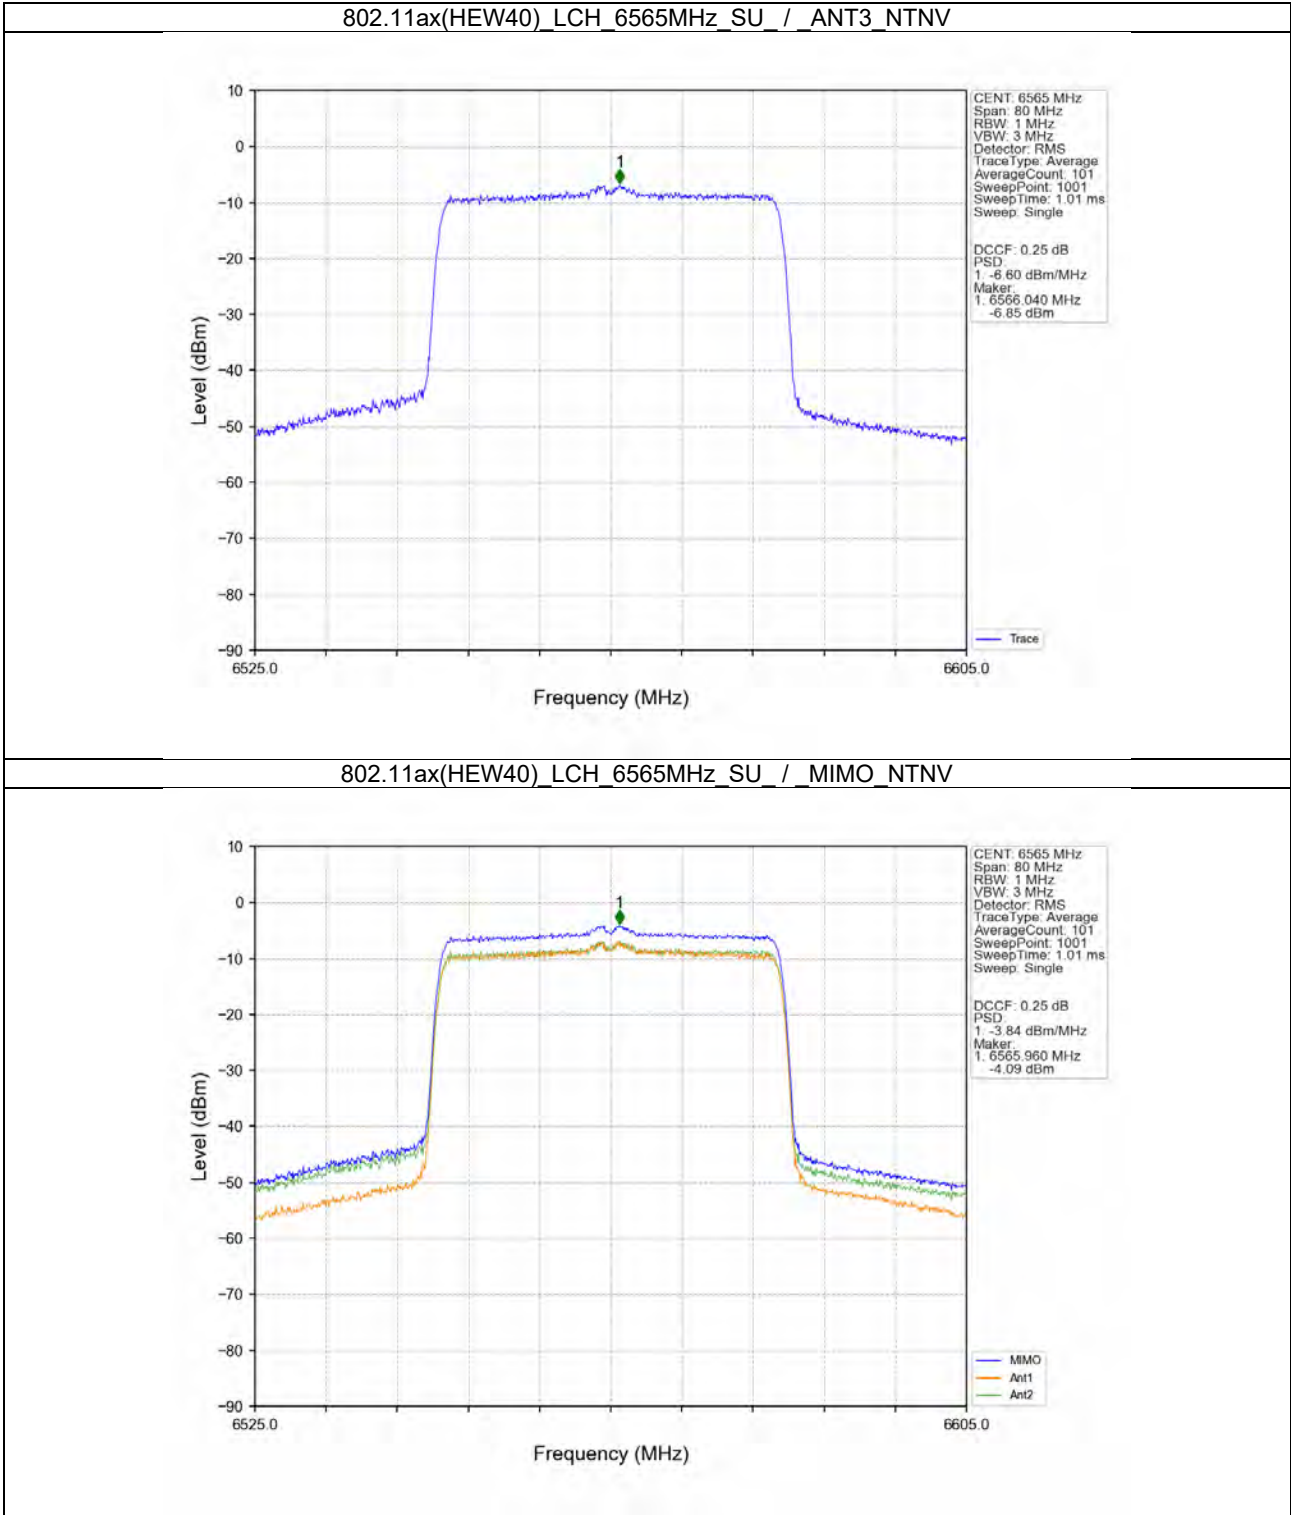



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 66 of 122

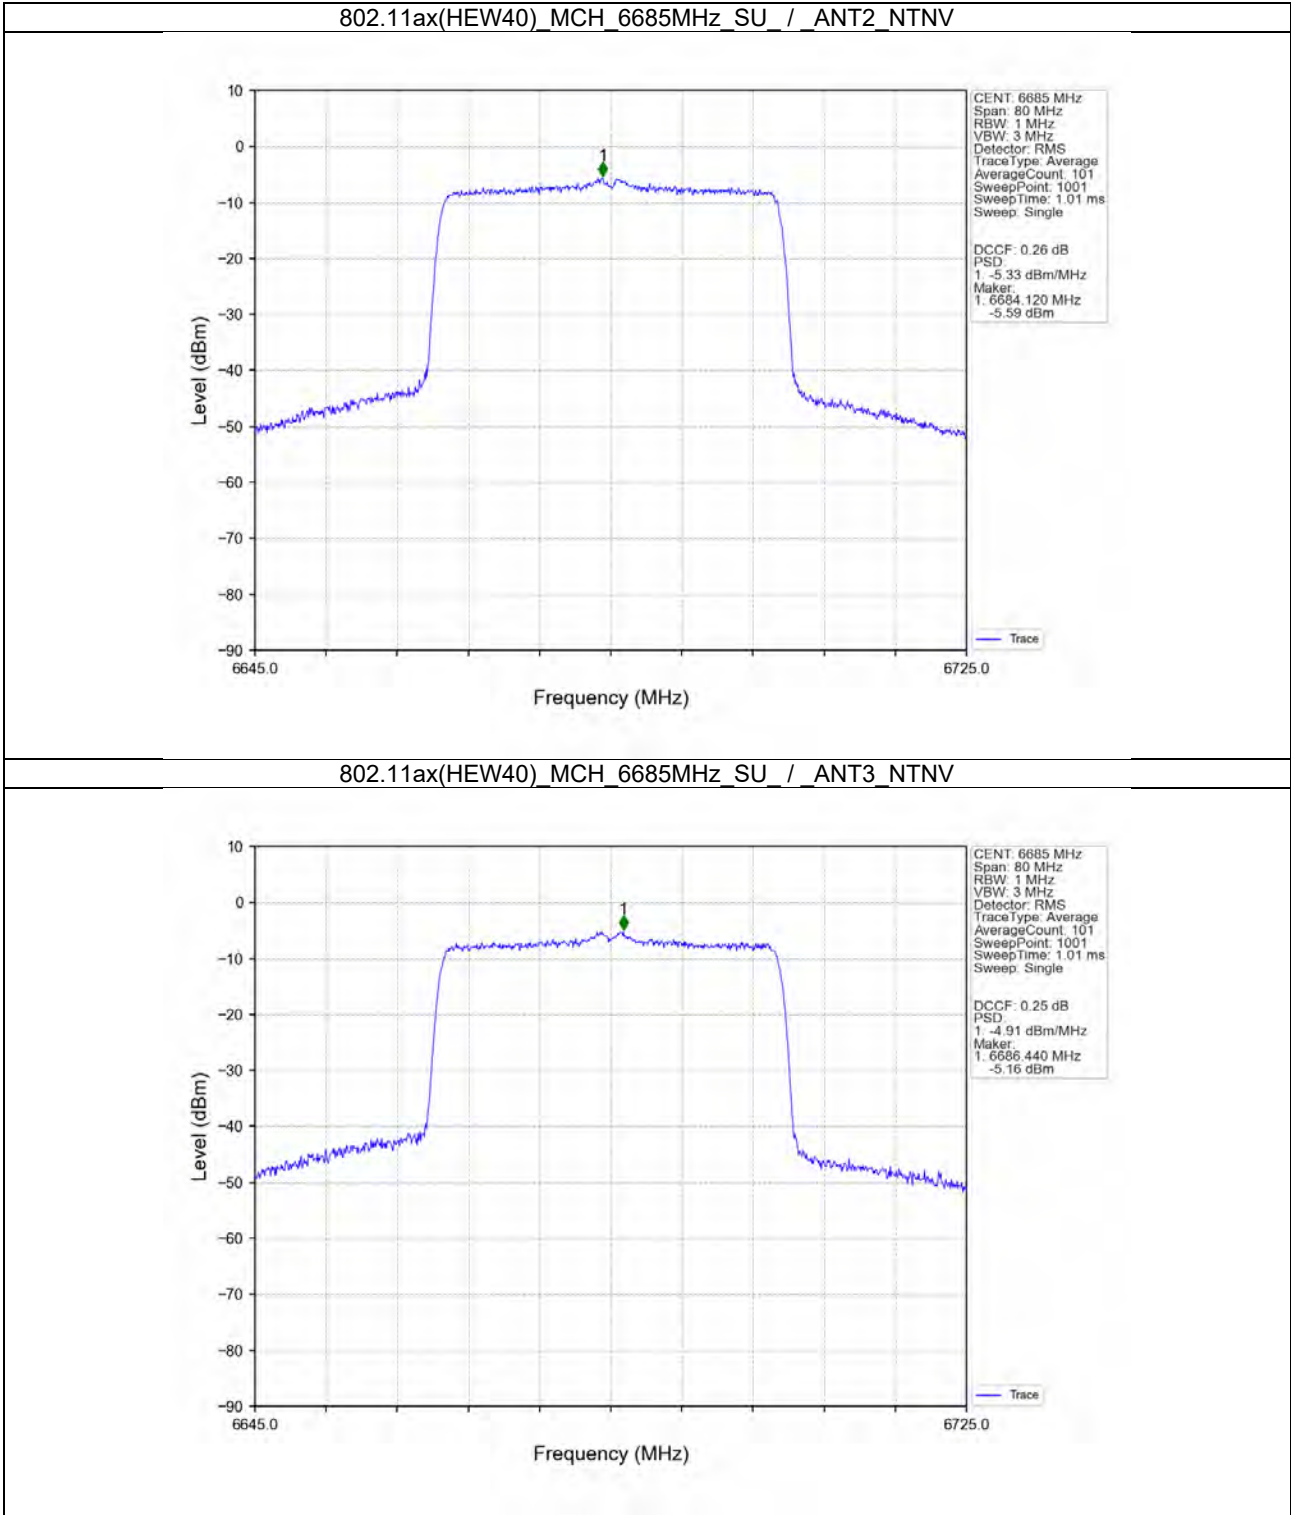



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 67 of 122

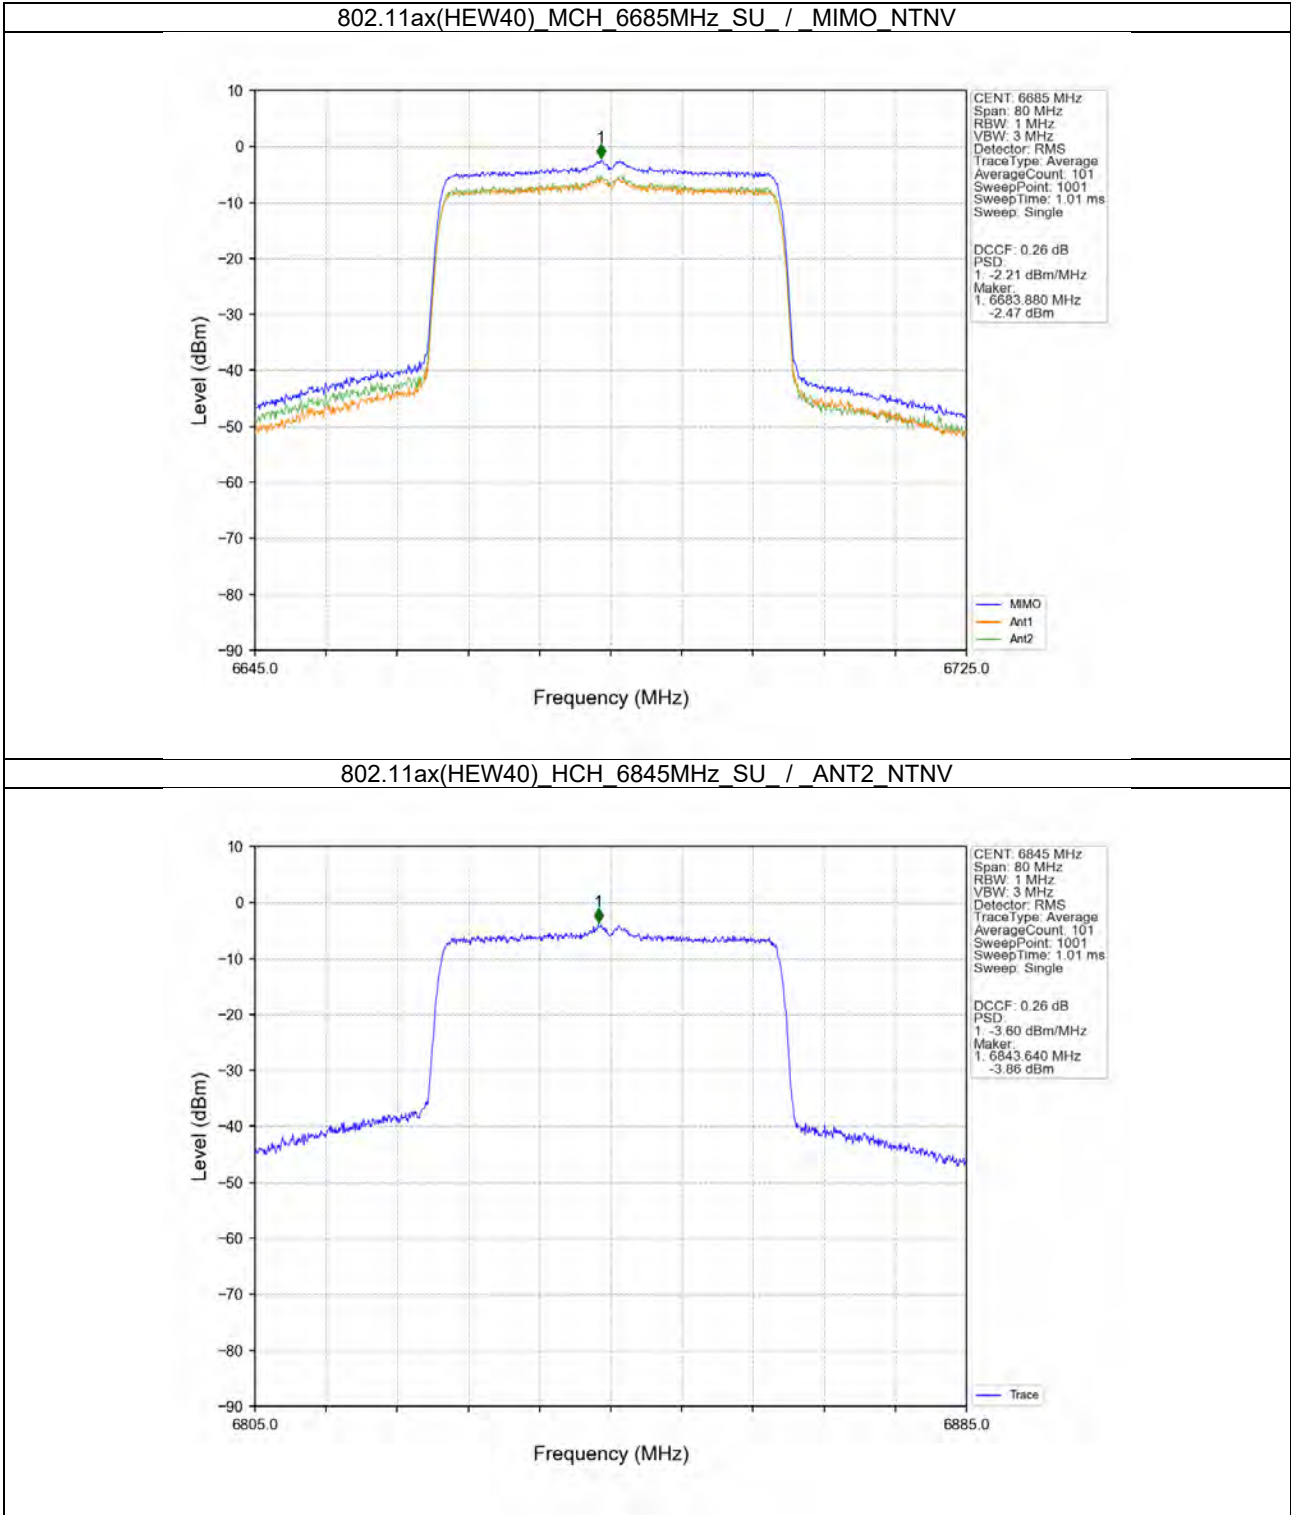



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 68 of 122

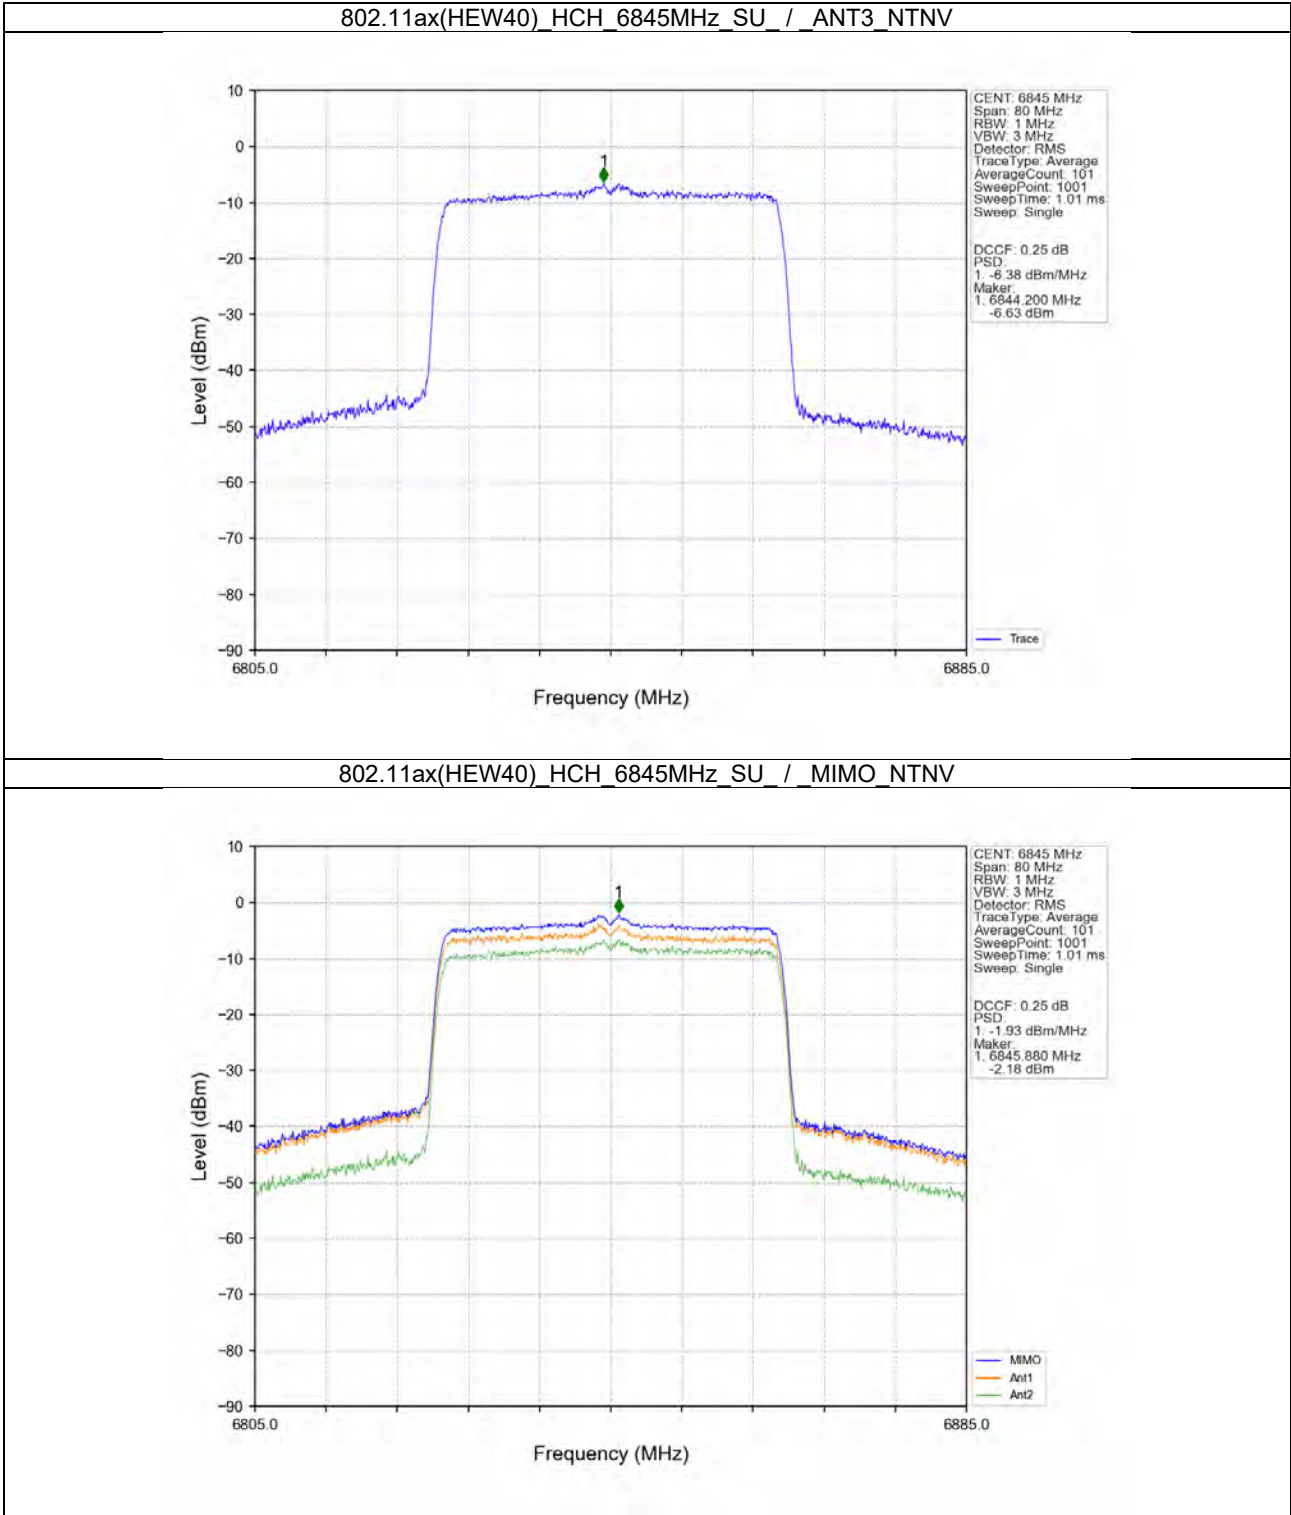



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 69 of 122

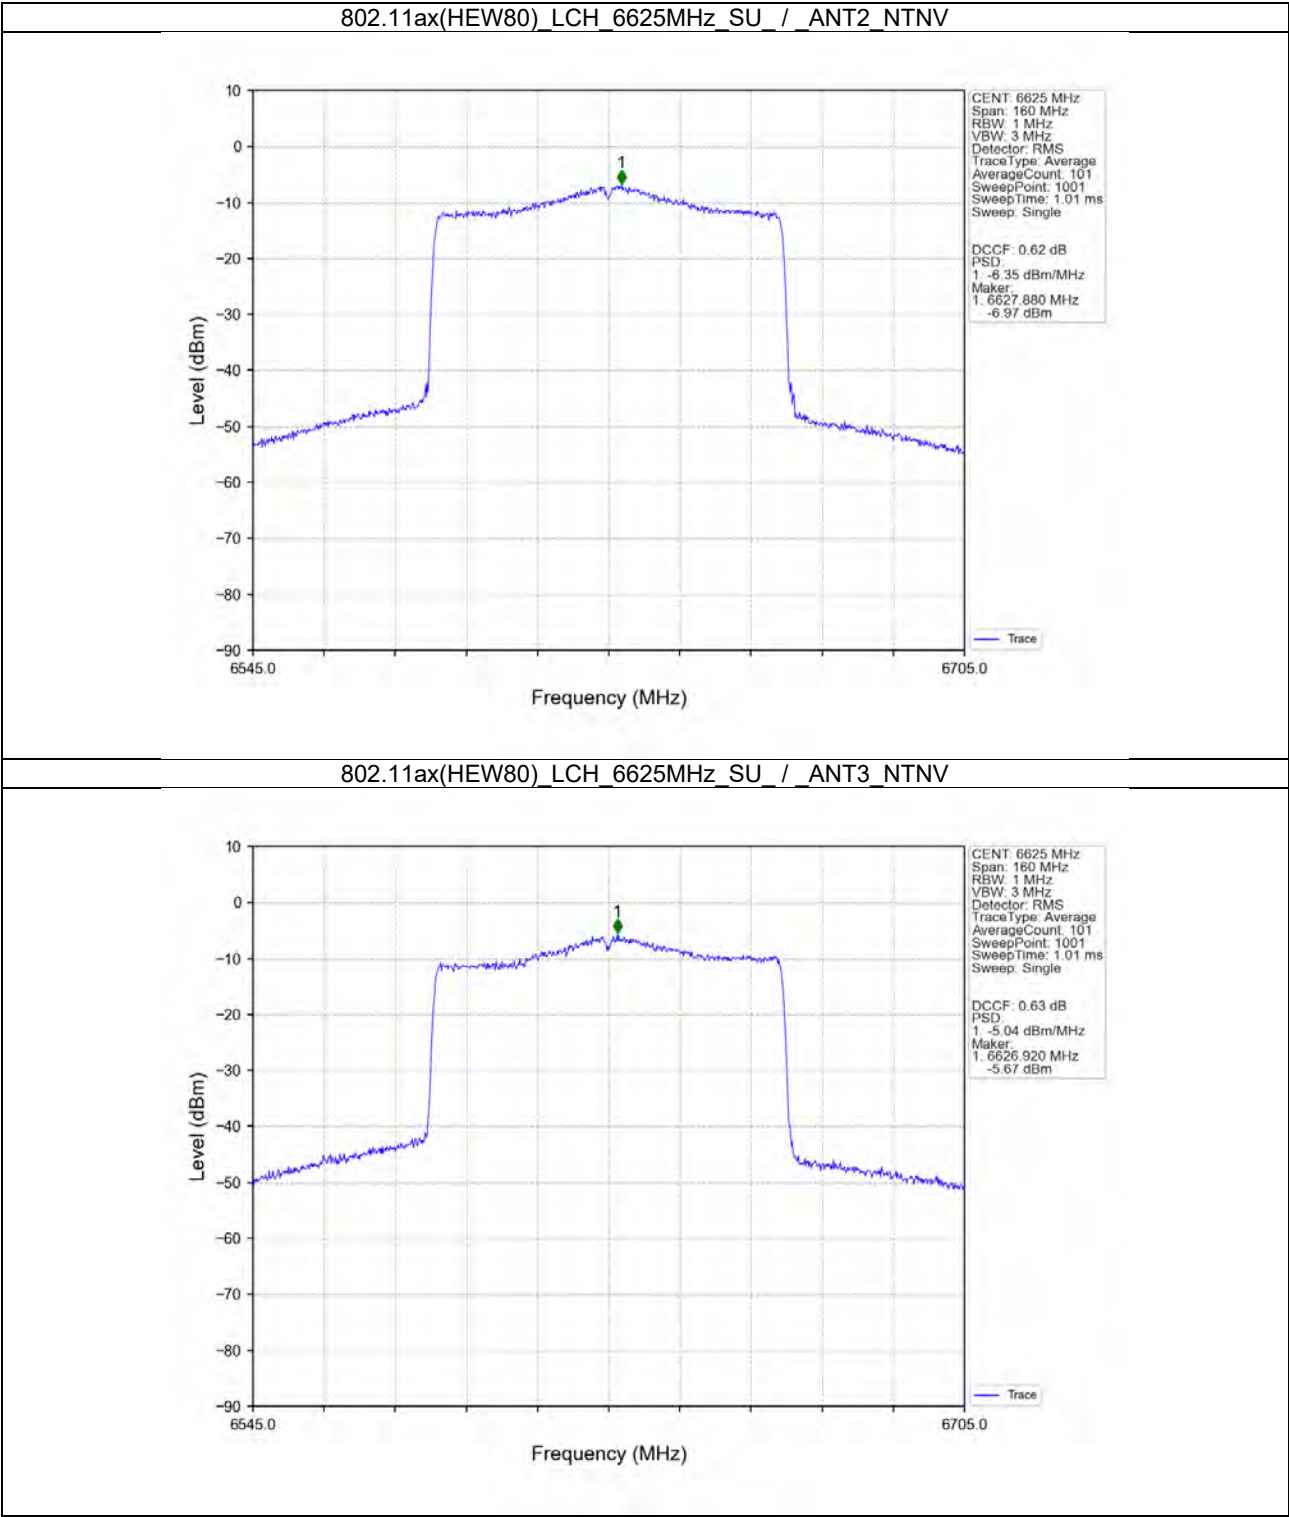




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 70 of 122

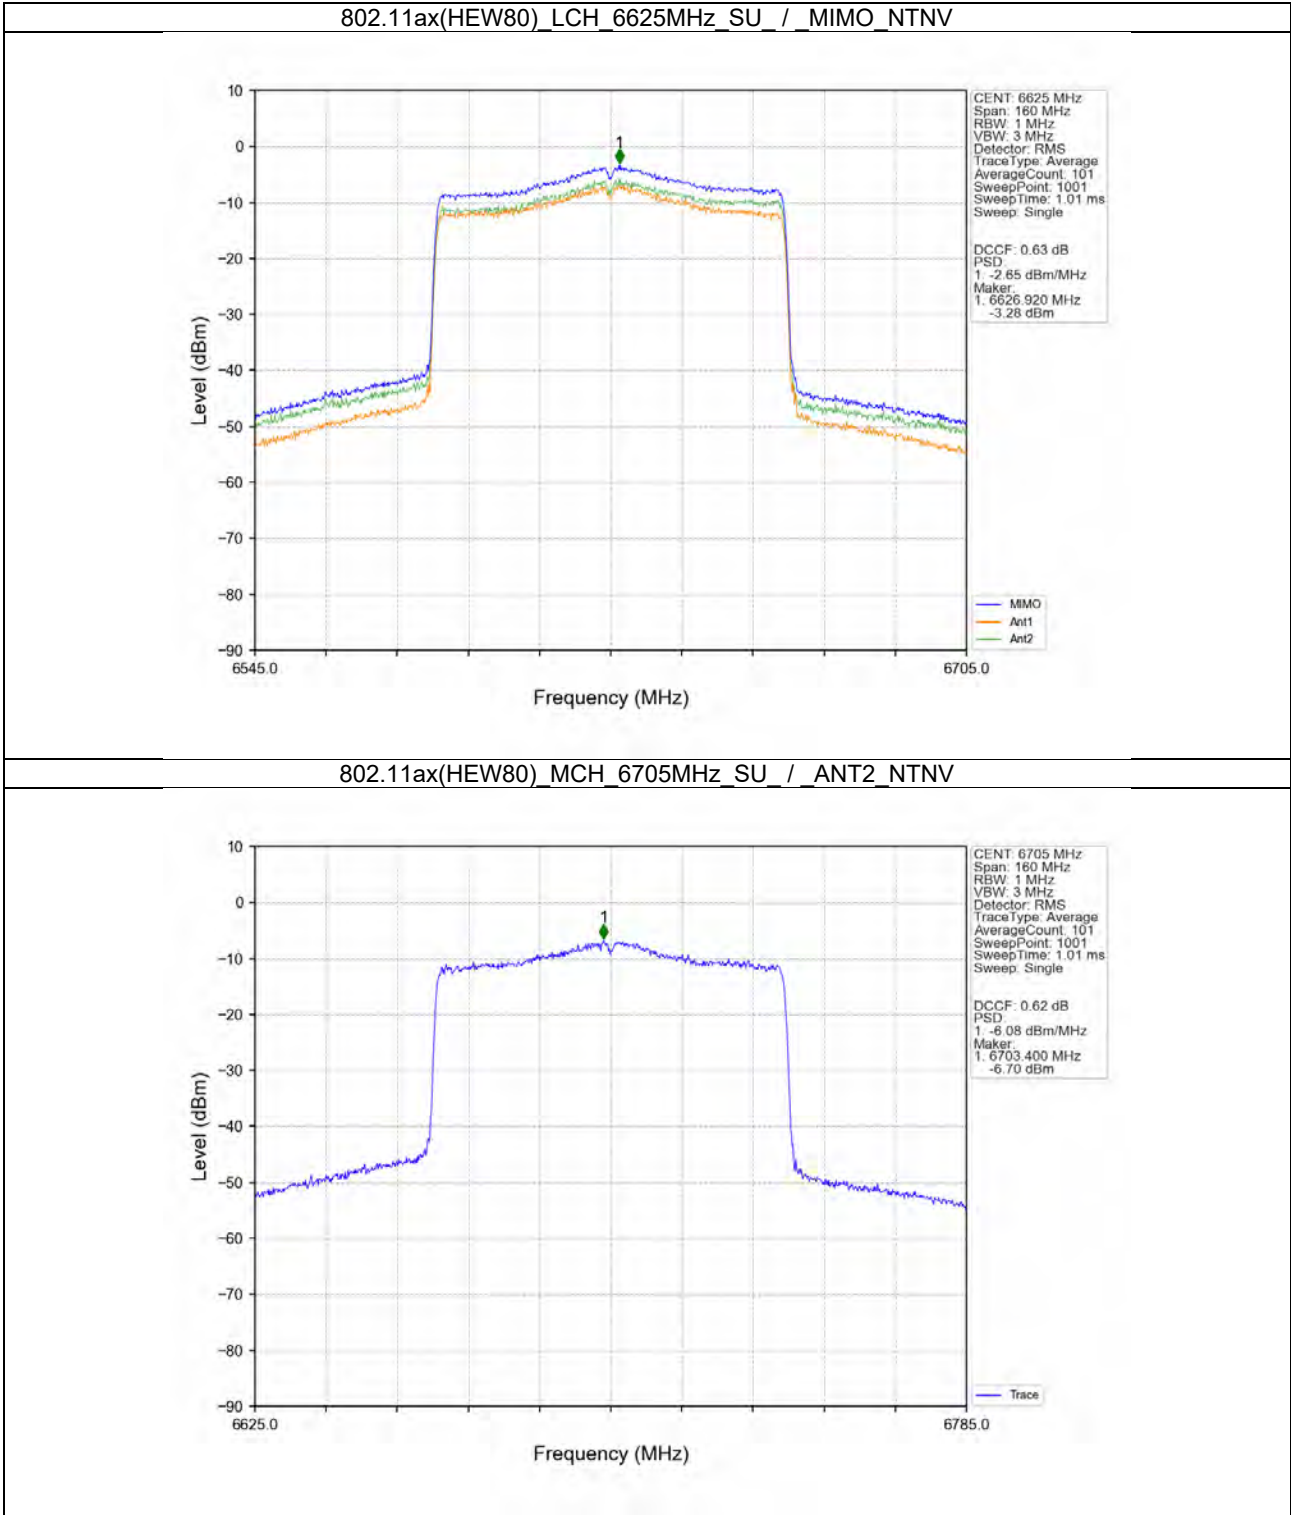

802.11ax(HEW80)_MCH_6705MHz_SU_/_ANT3_NTNV

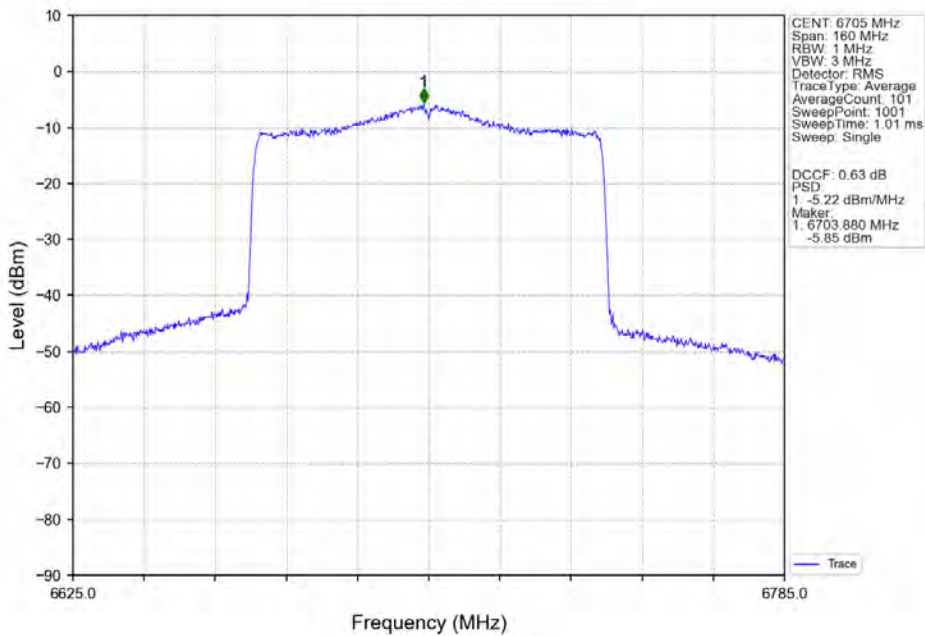

802.11ax(HEW80)_MCH_6705MHz_SU_/_MIMO_NTNV

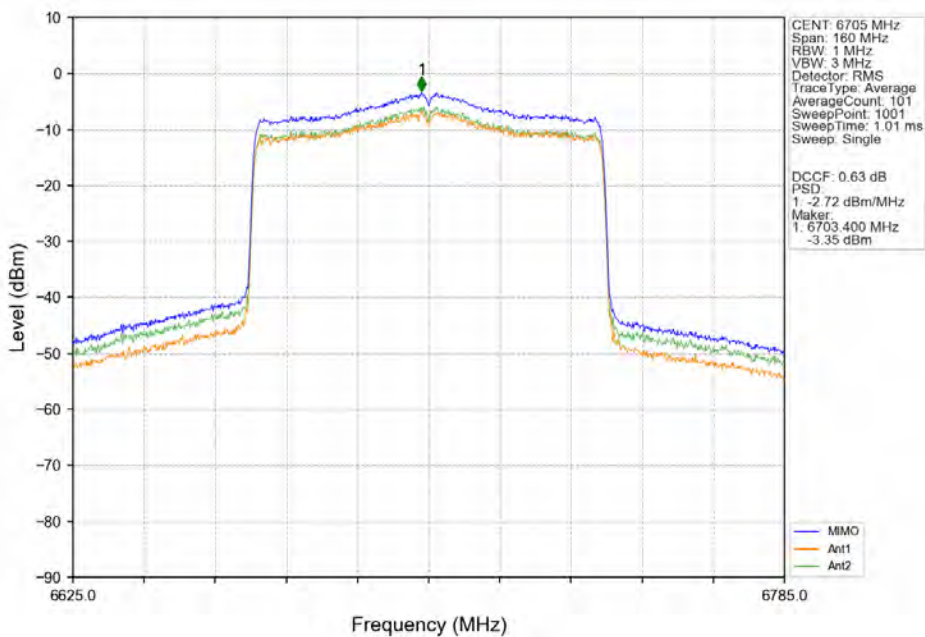





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 72 of 122

802.11ax(HEW80) HCH_6785MHz_SU_ / _ANT2_NTNV

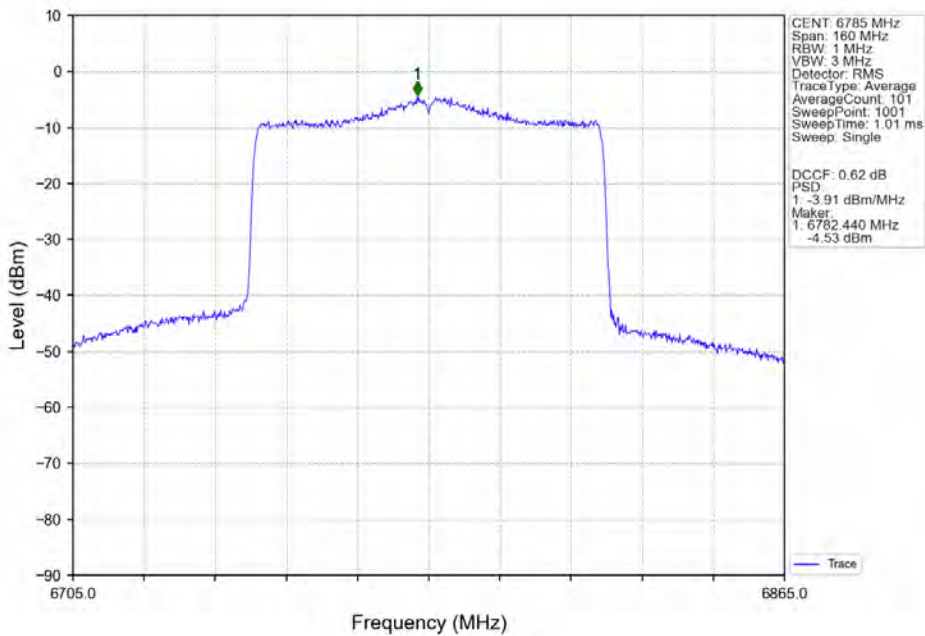


802.11ax(HEW80) HCH_6785MHz_SU_ / _ANT3_NTNV

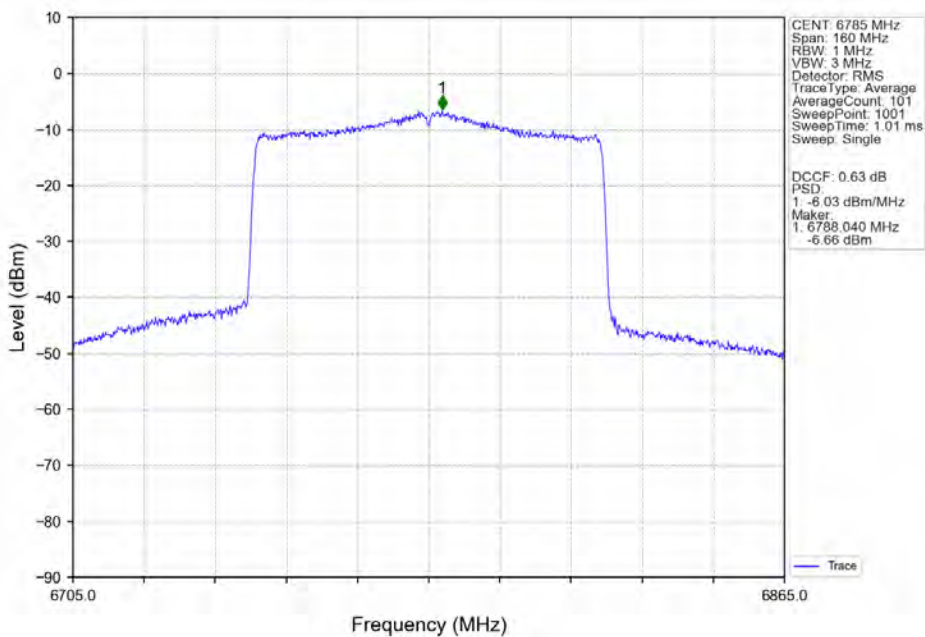



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 73 of 122

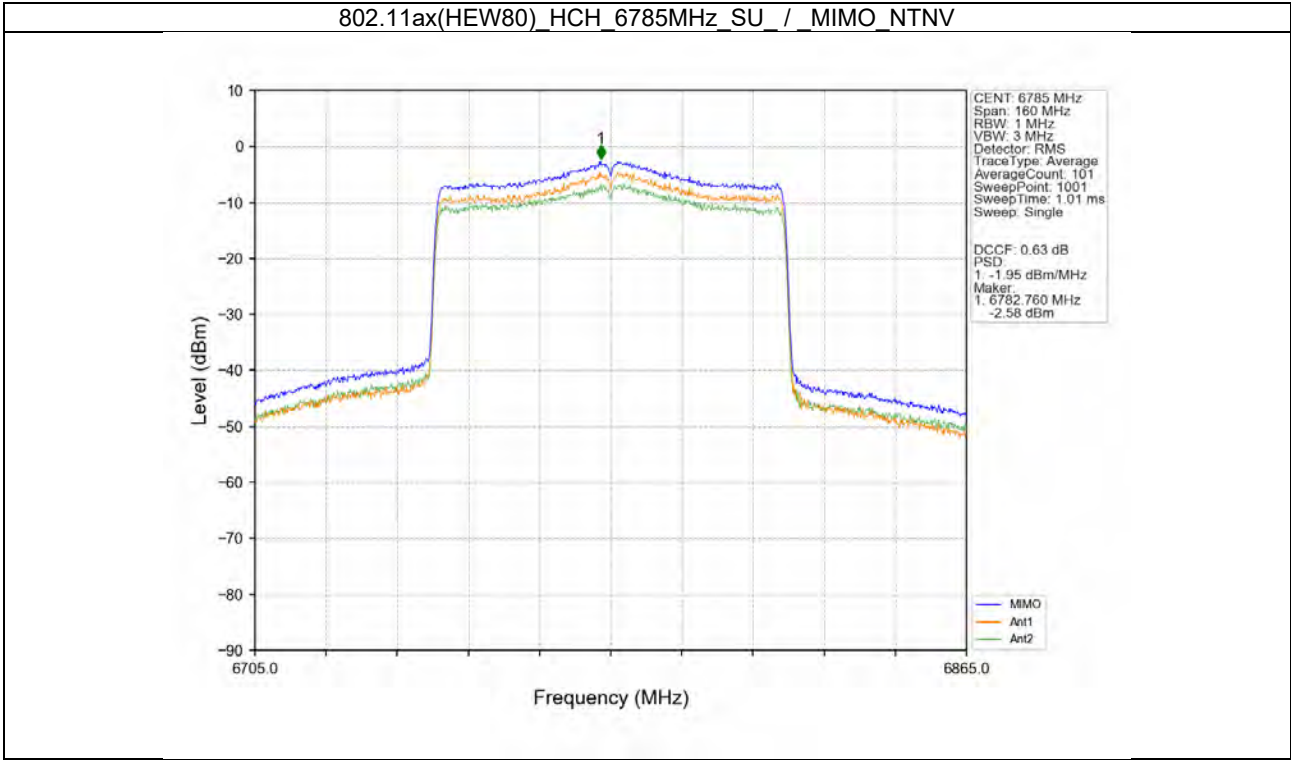




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 74 of 122


2.2.7 PSD

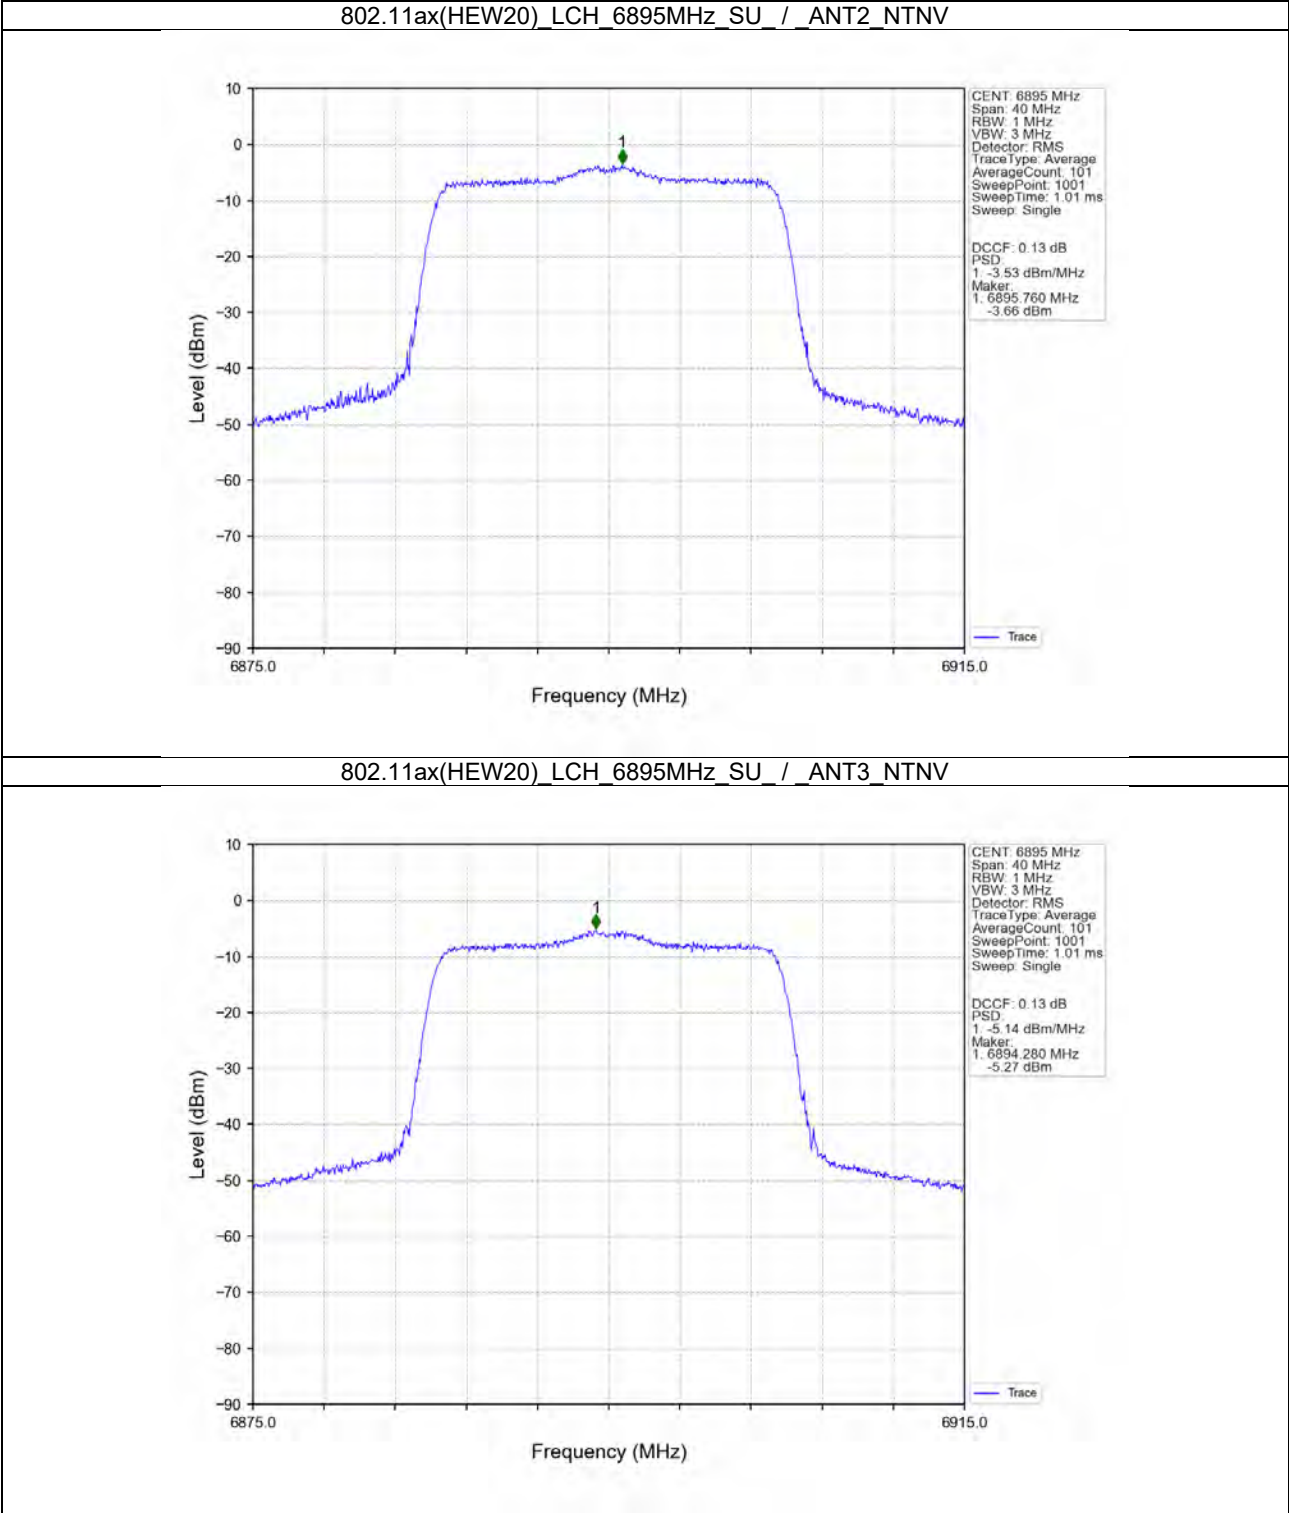



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 75 of 122

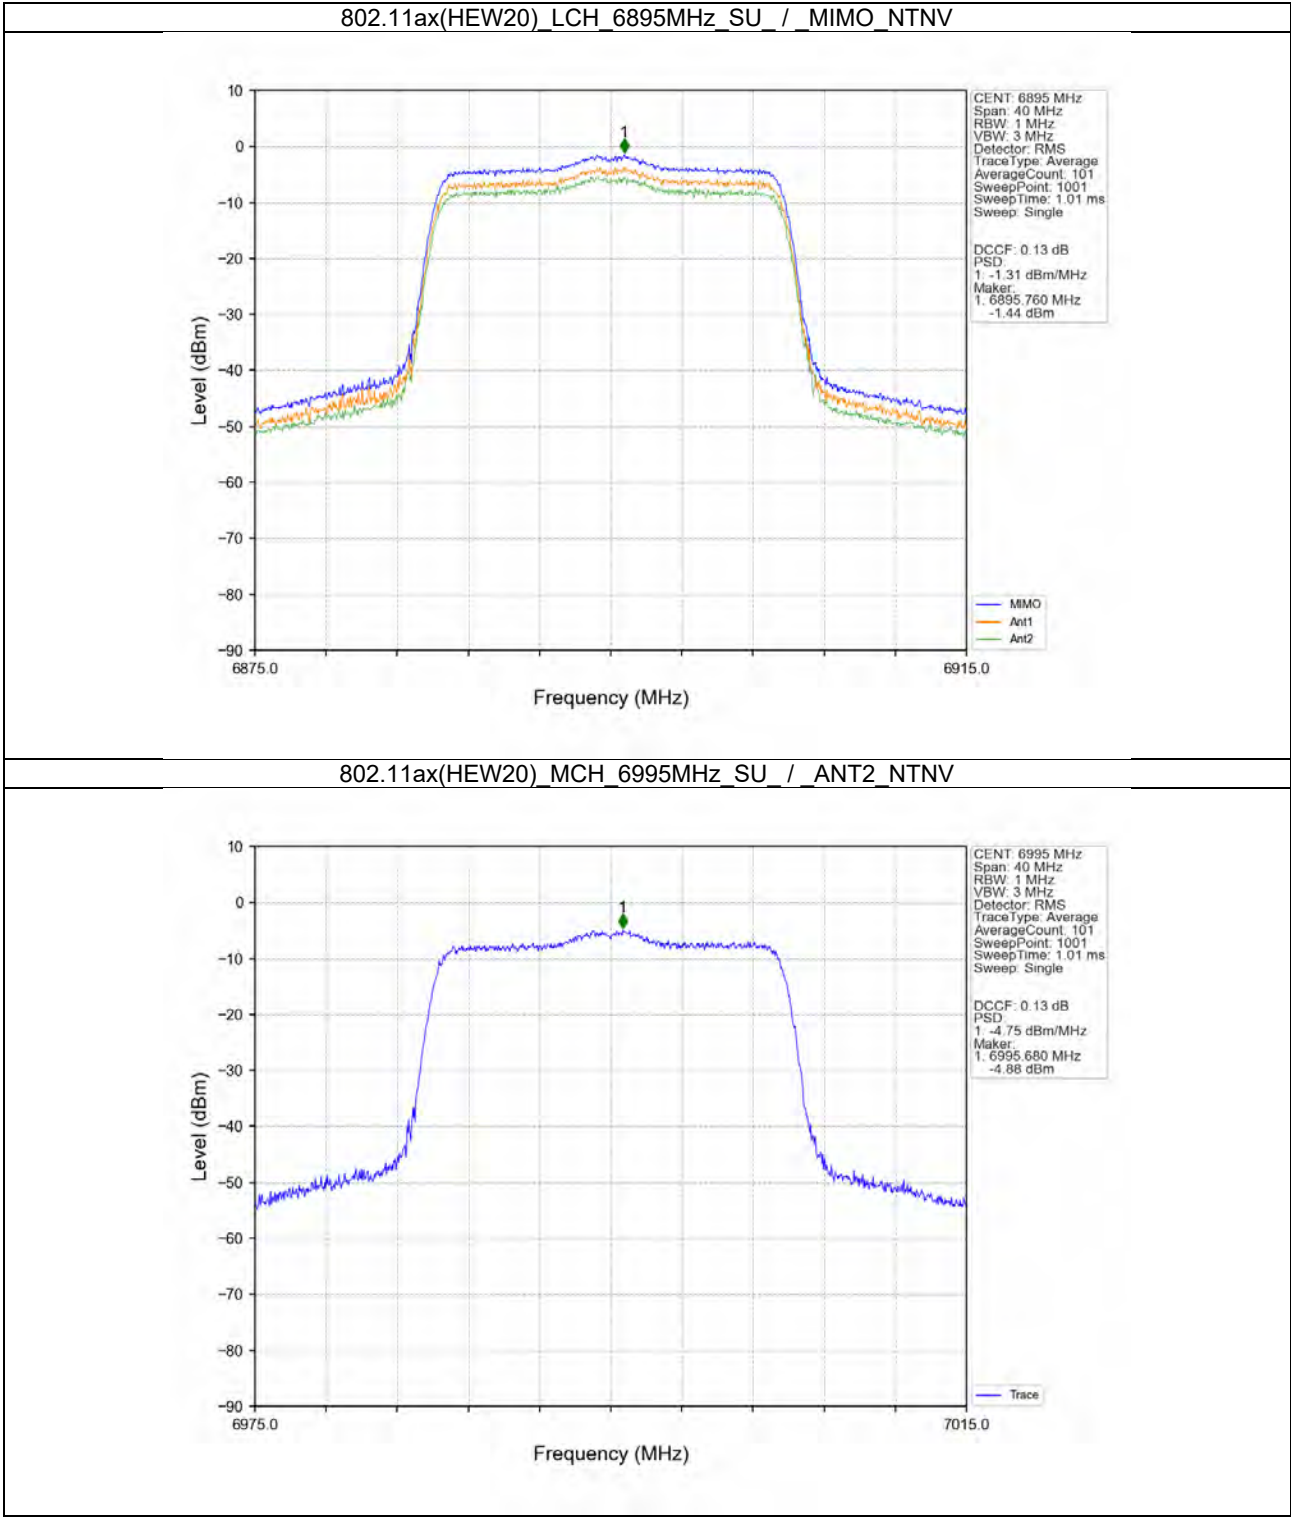



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 76 of 122

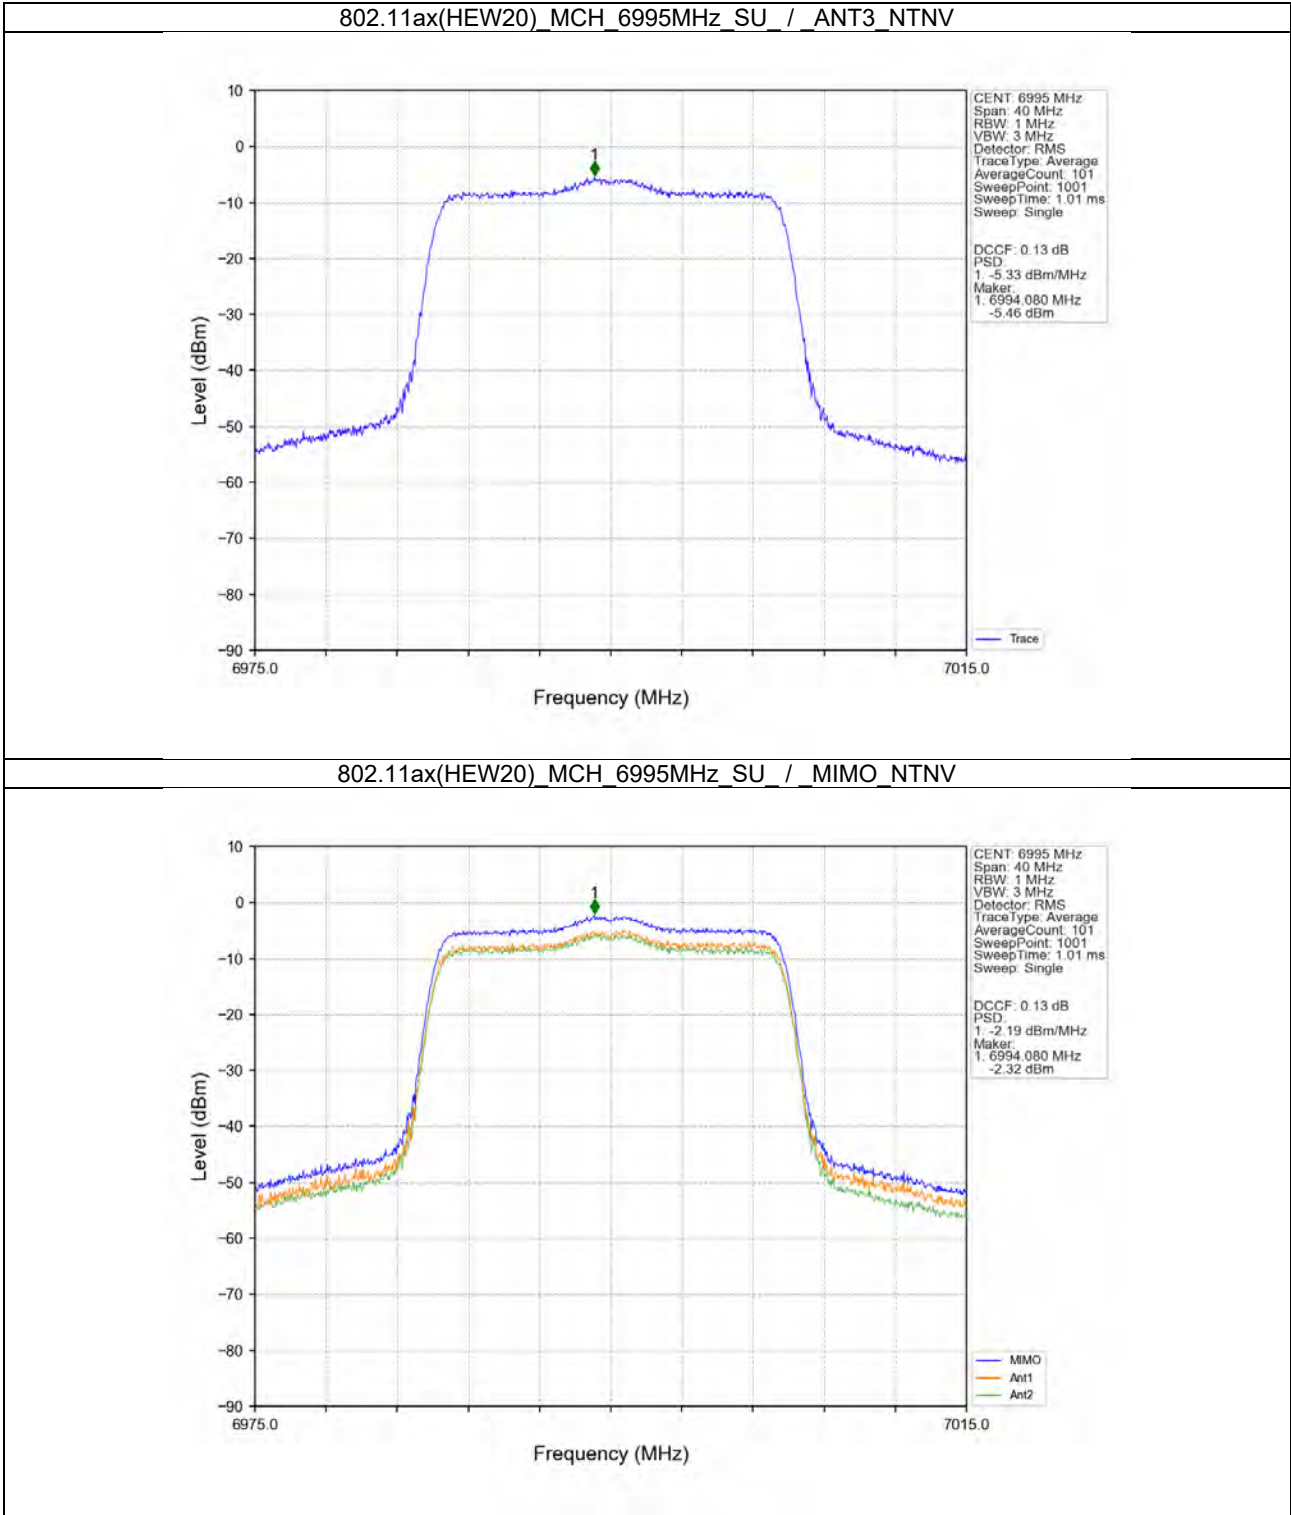



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 77 of 122

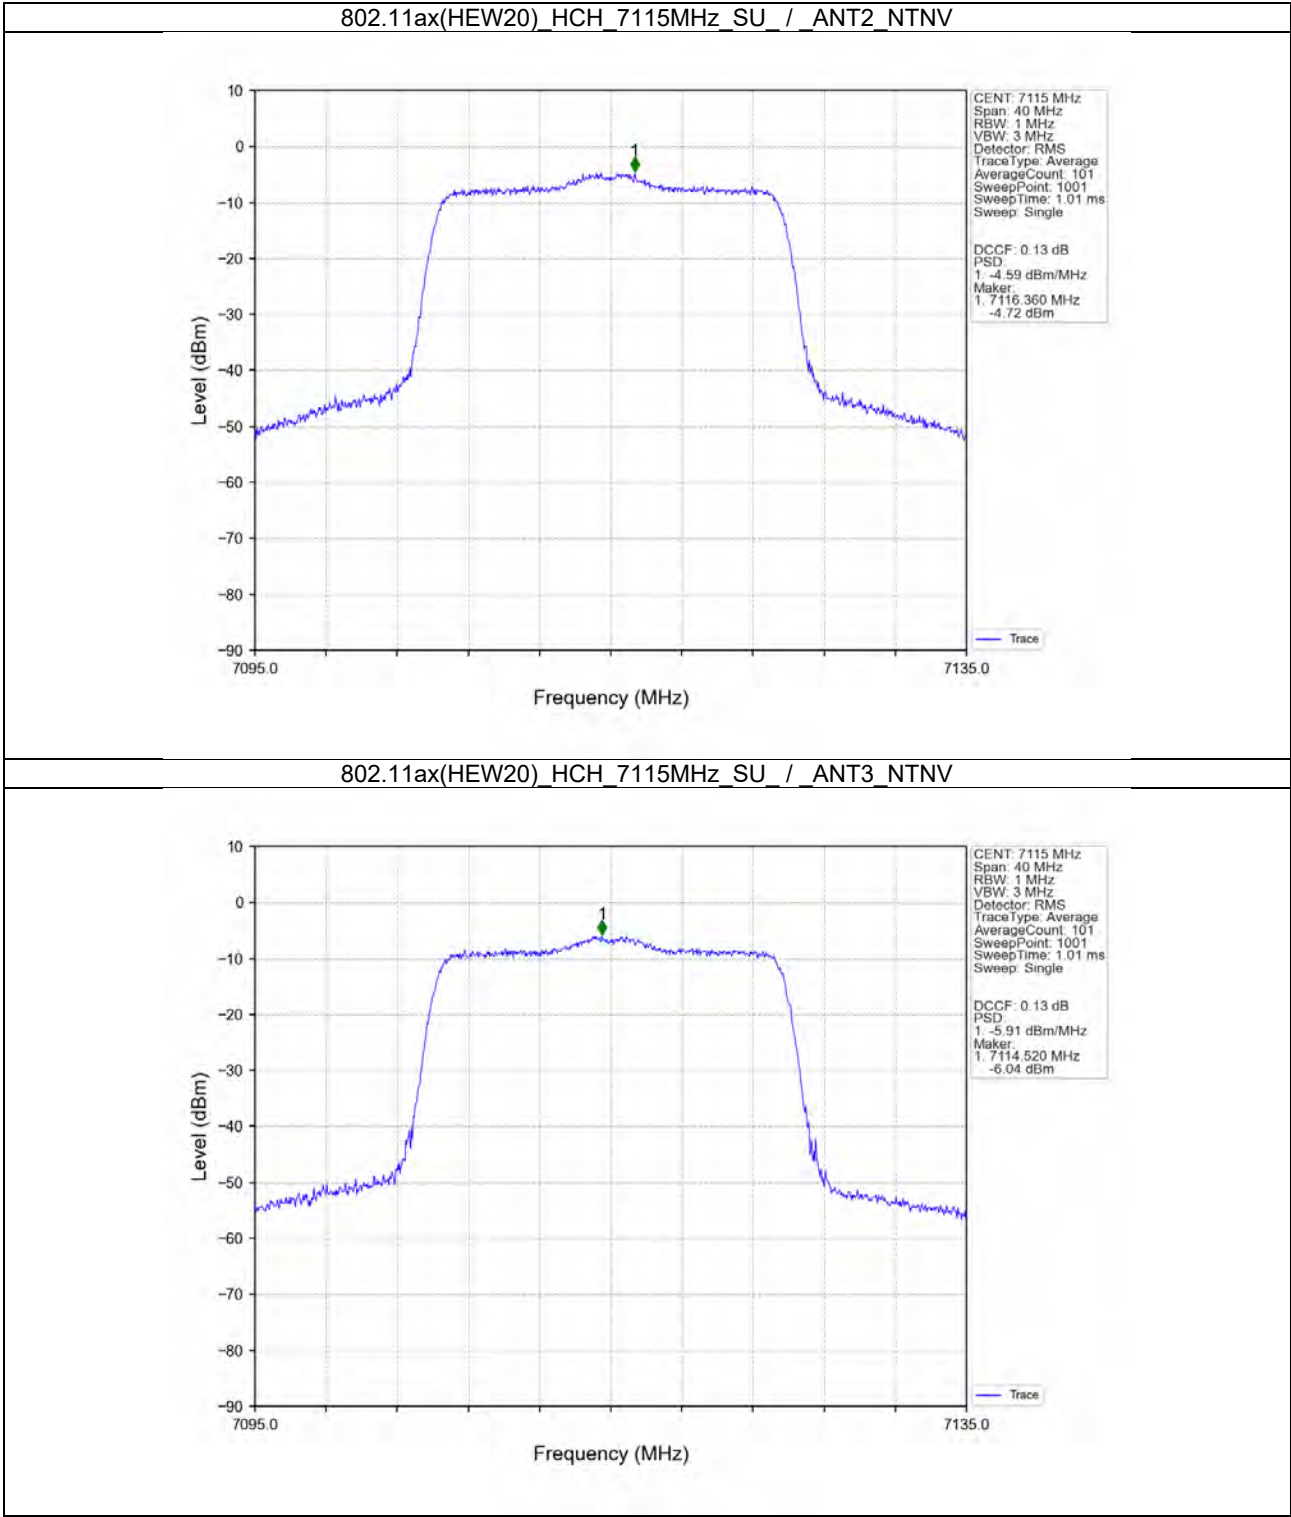



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 78 of 122

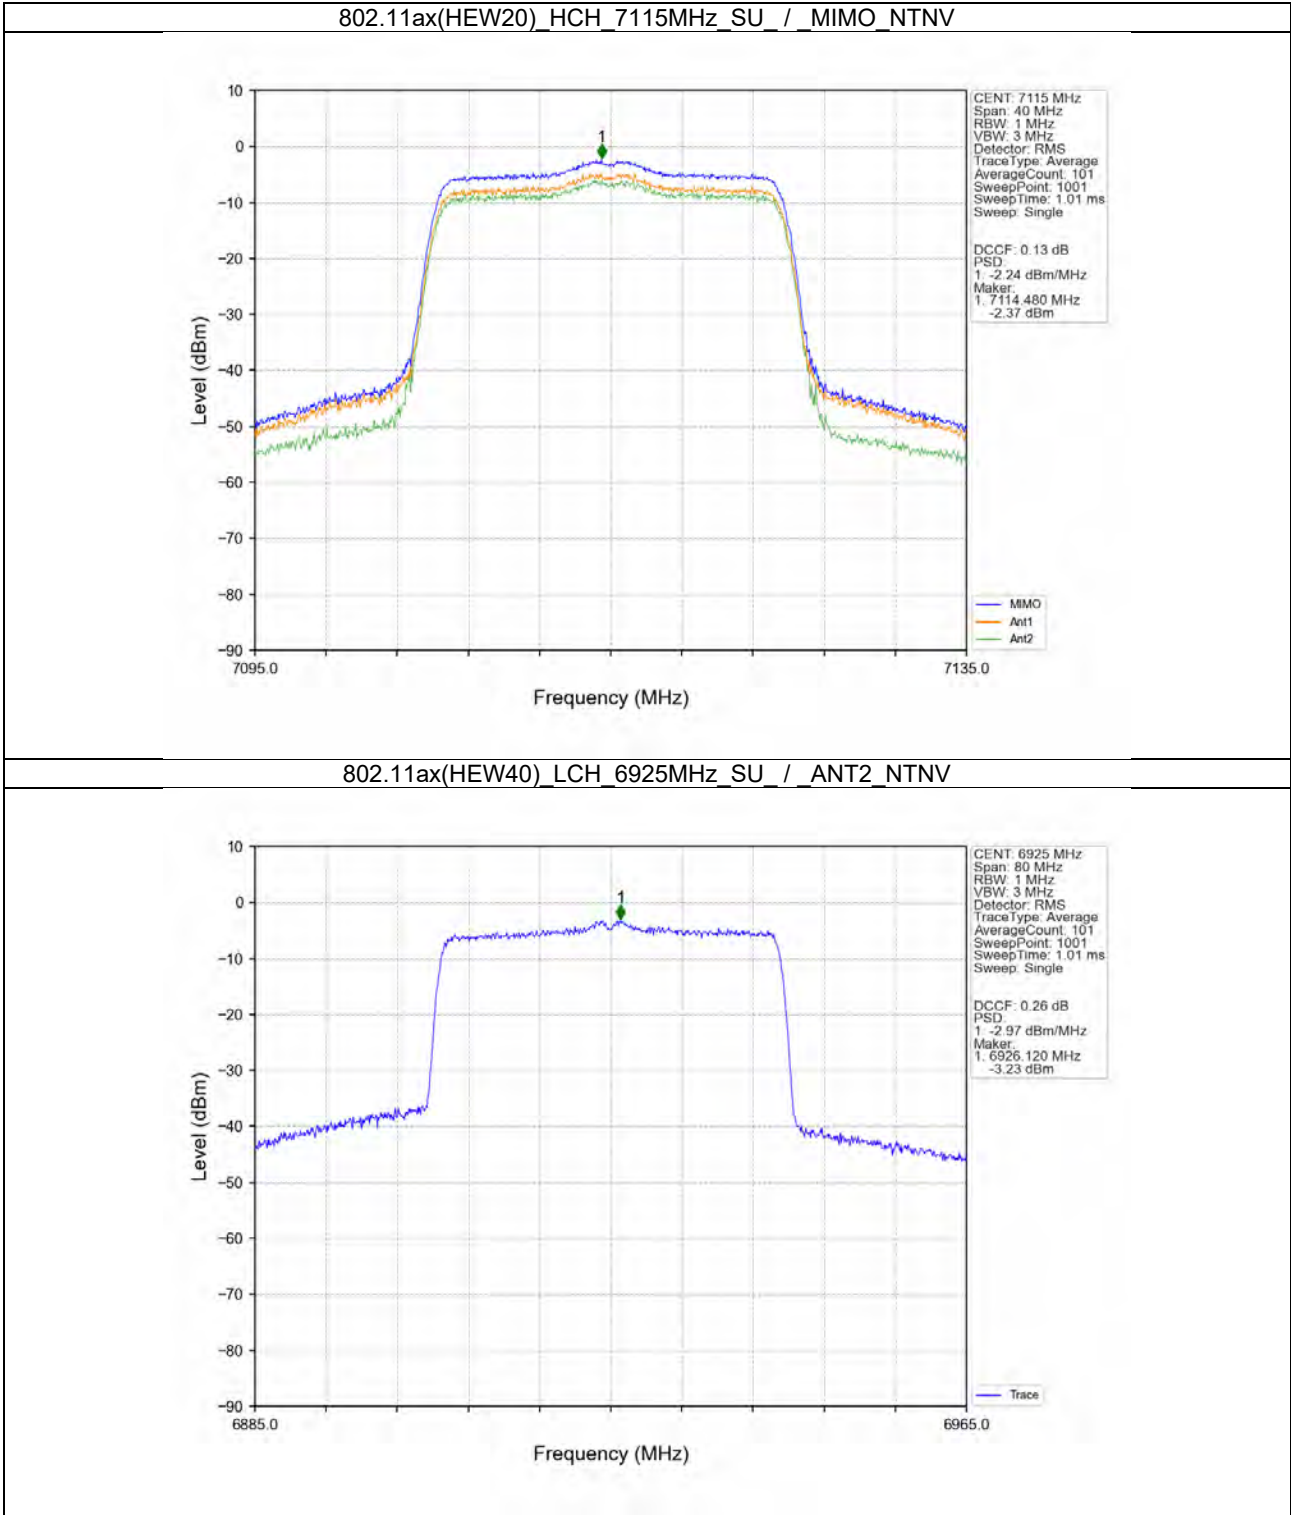



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 79 of 122

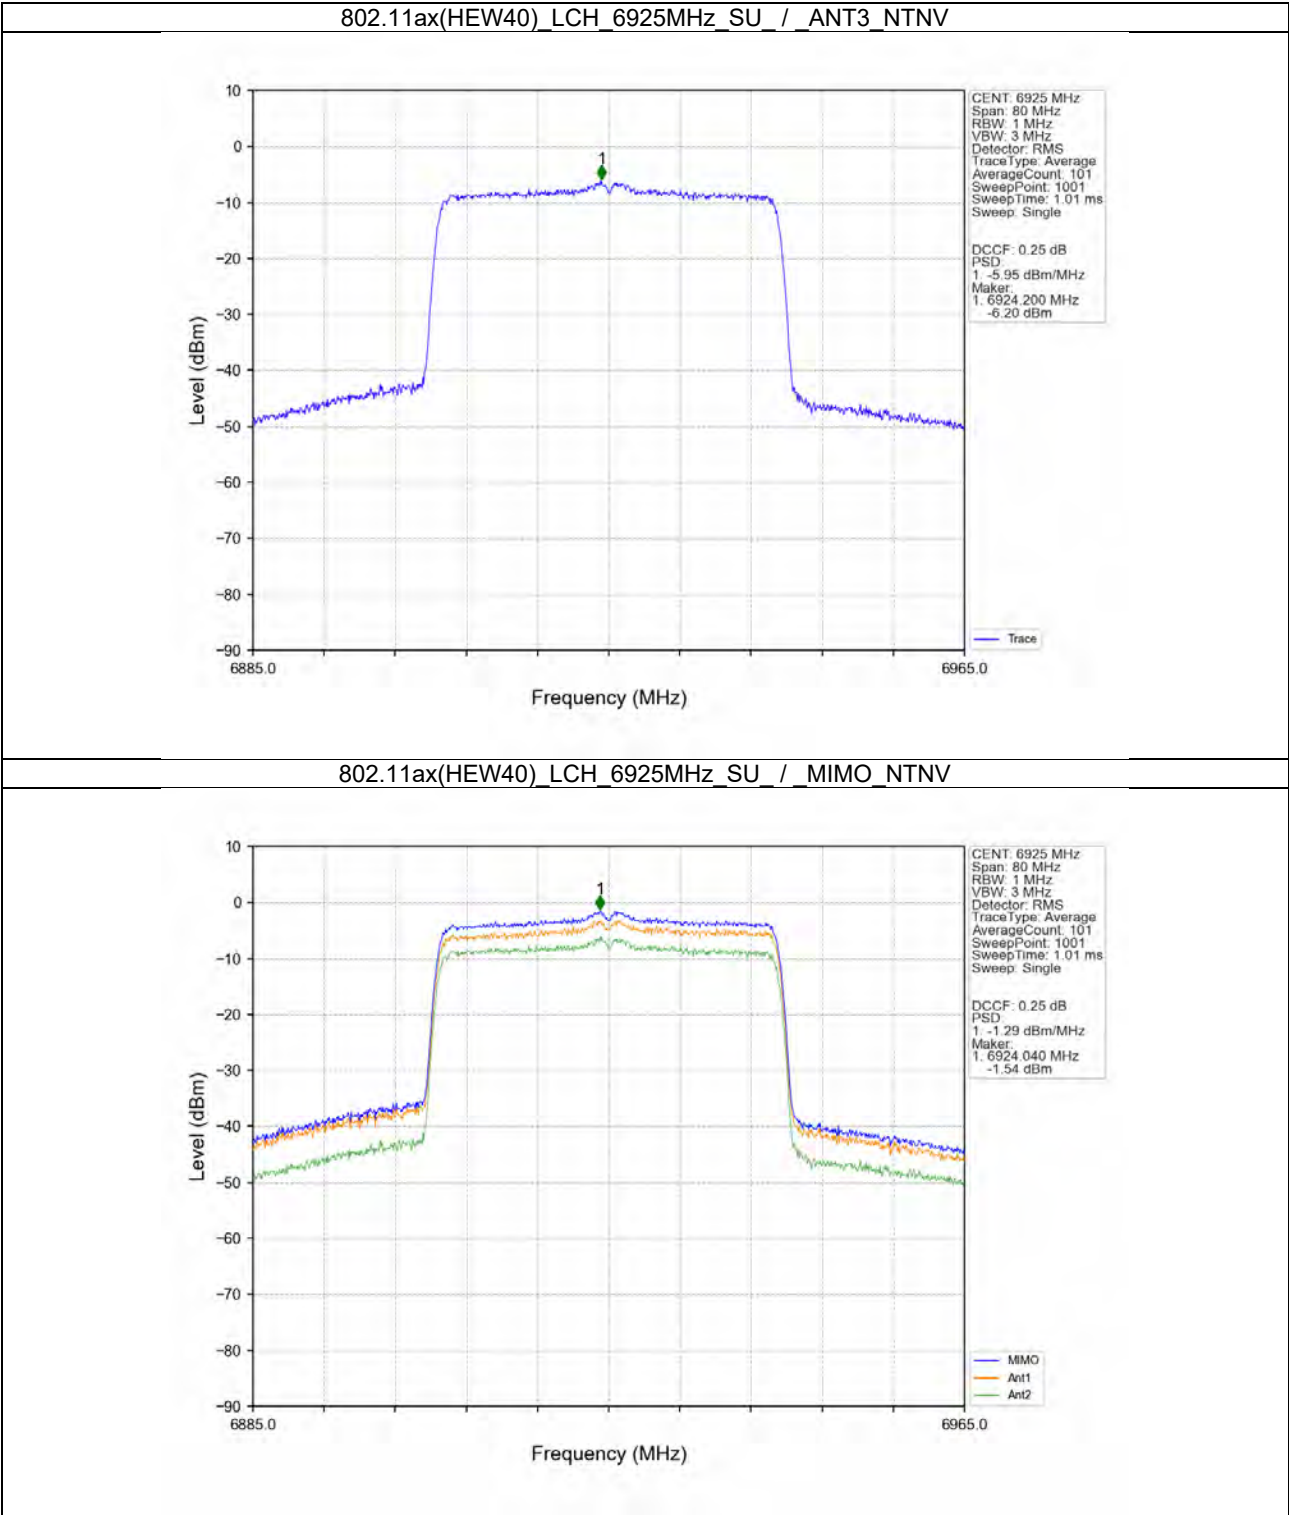



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 80 of 122

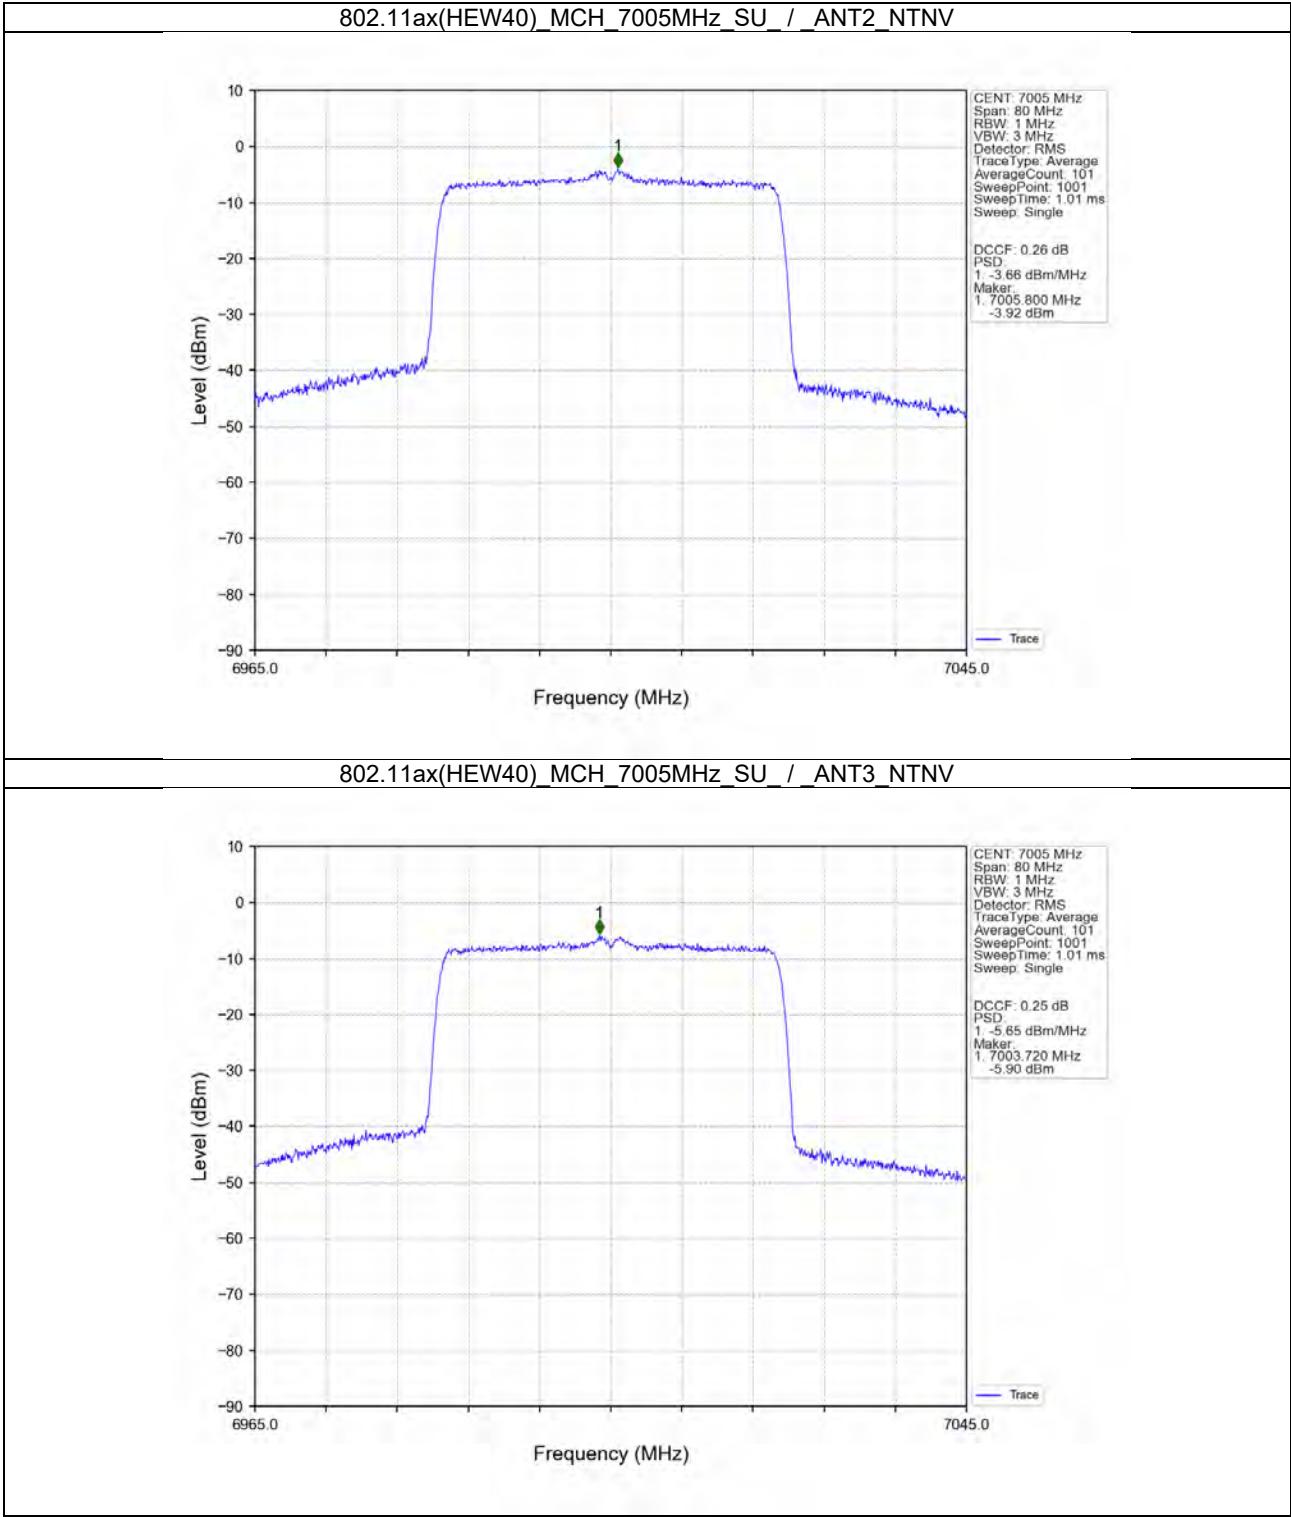




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 81 of 122

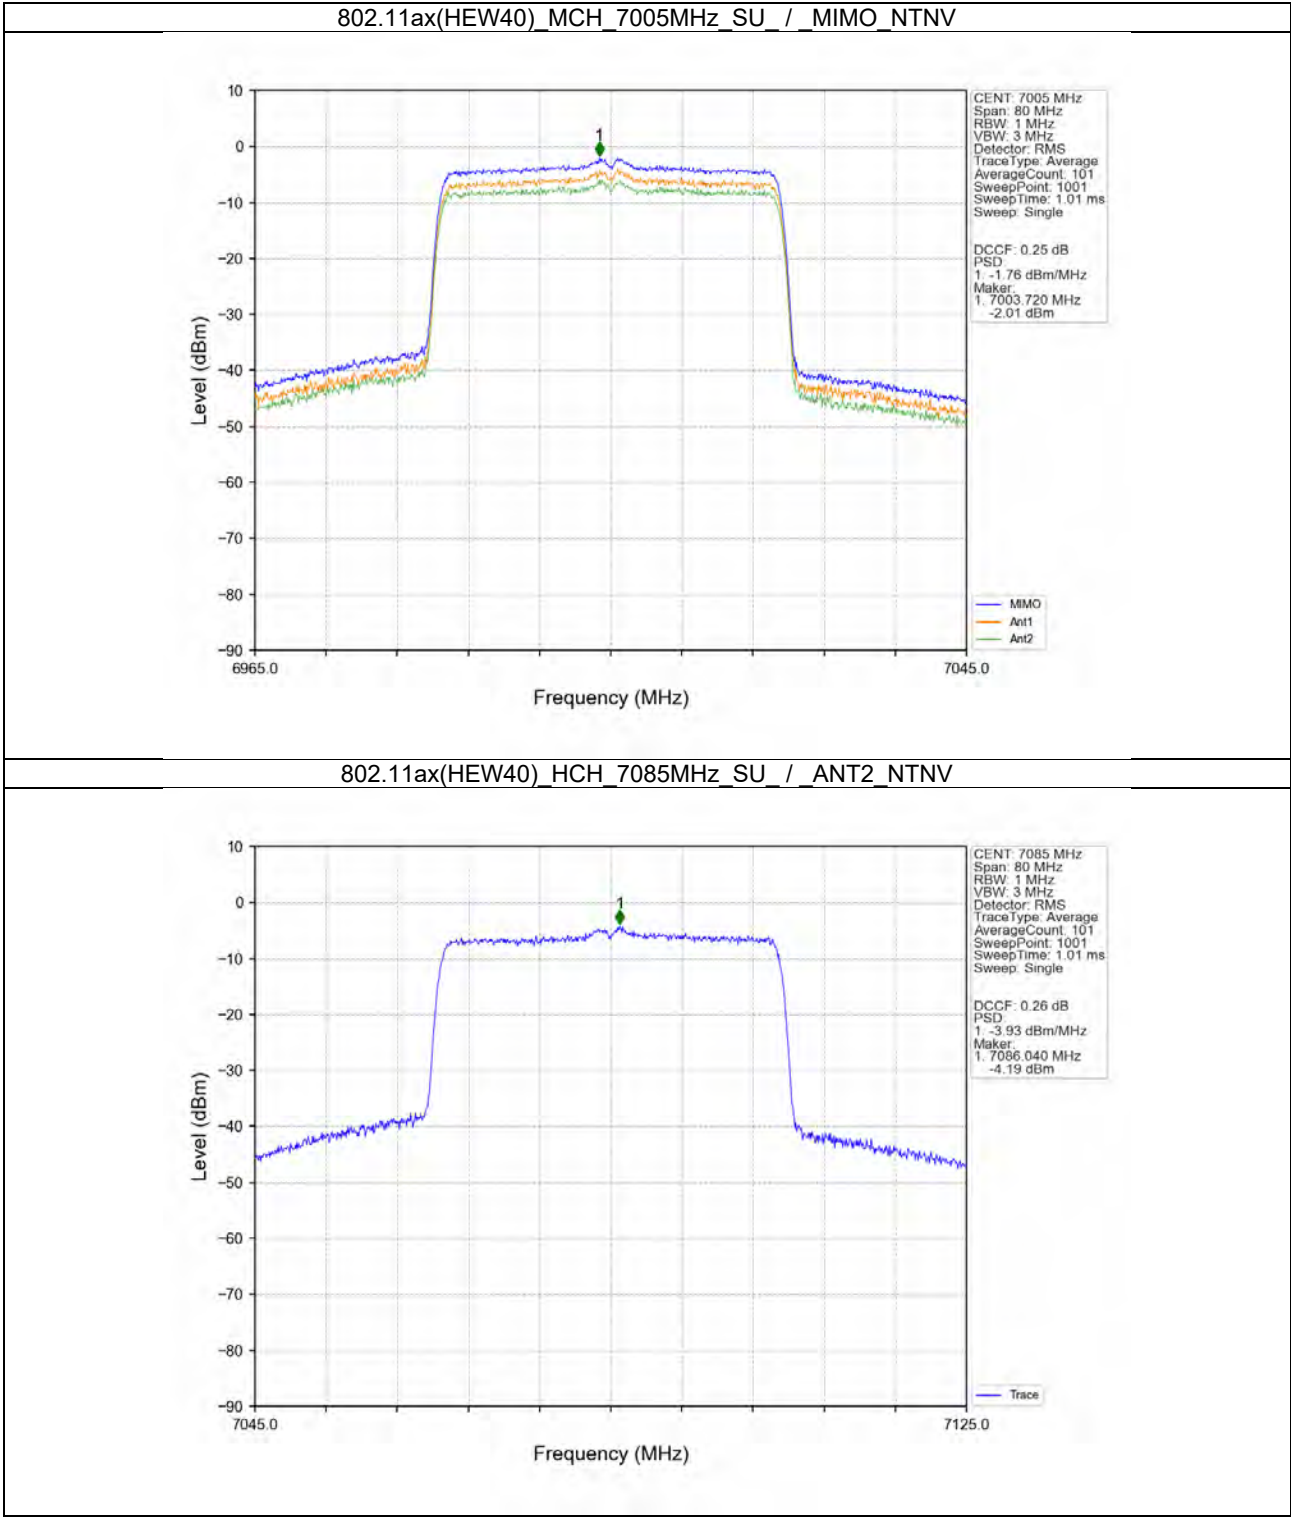

802.11ax(HEW40) HCH 7085MHz_SU / ANT3_NTNV

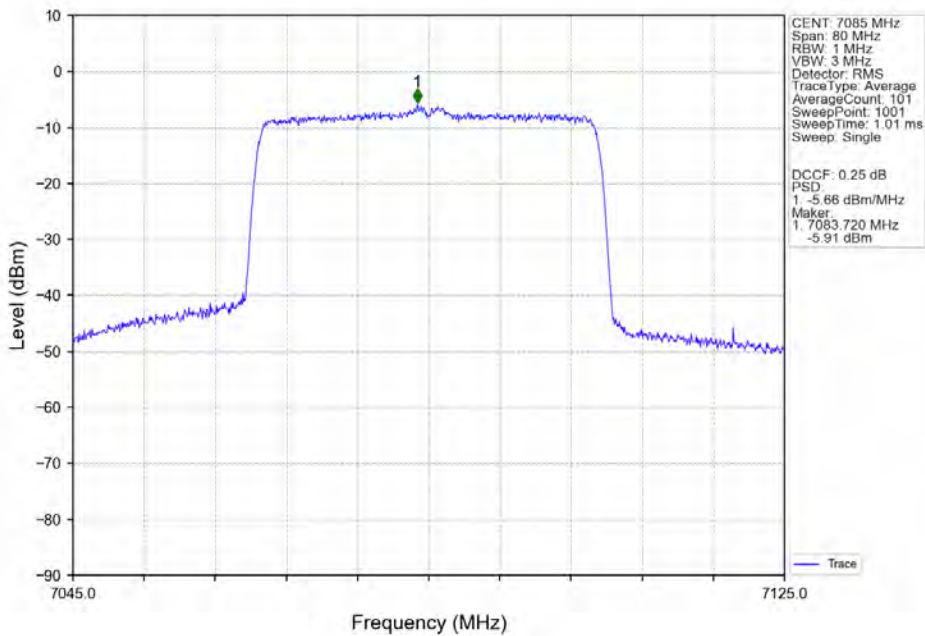


802.11ax(HEW40) HCH 7085MHz_SU / MIMO_NTNV

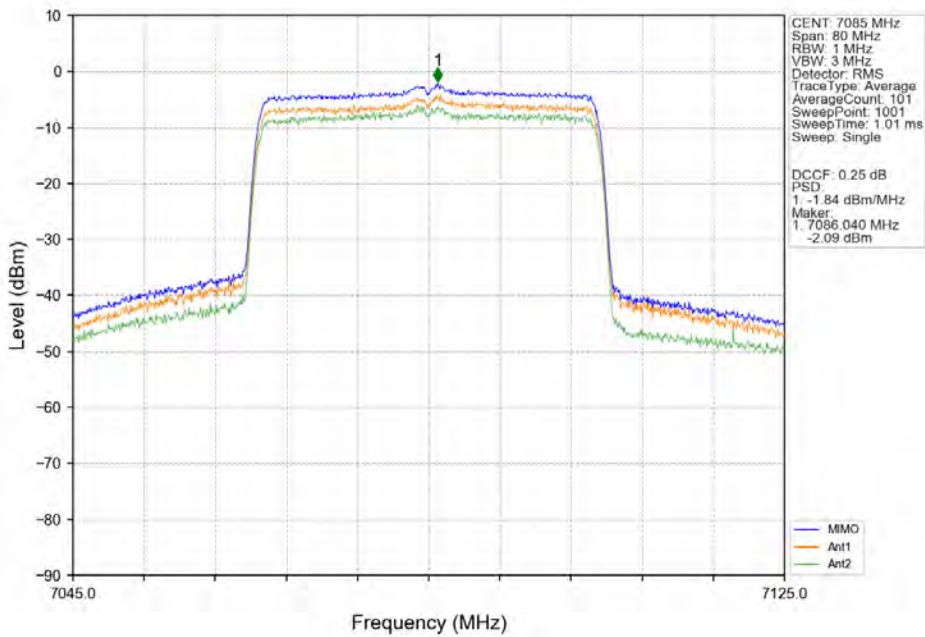



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 83 of 122

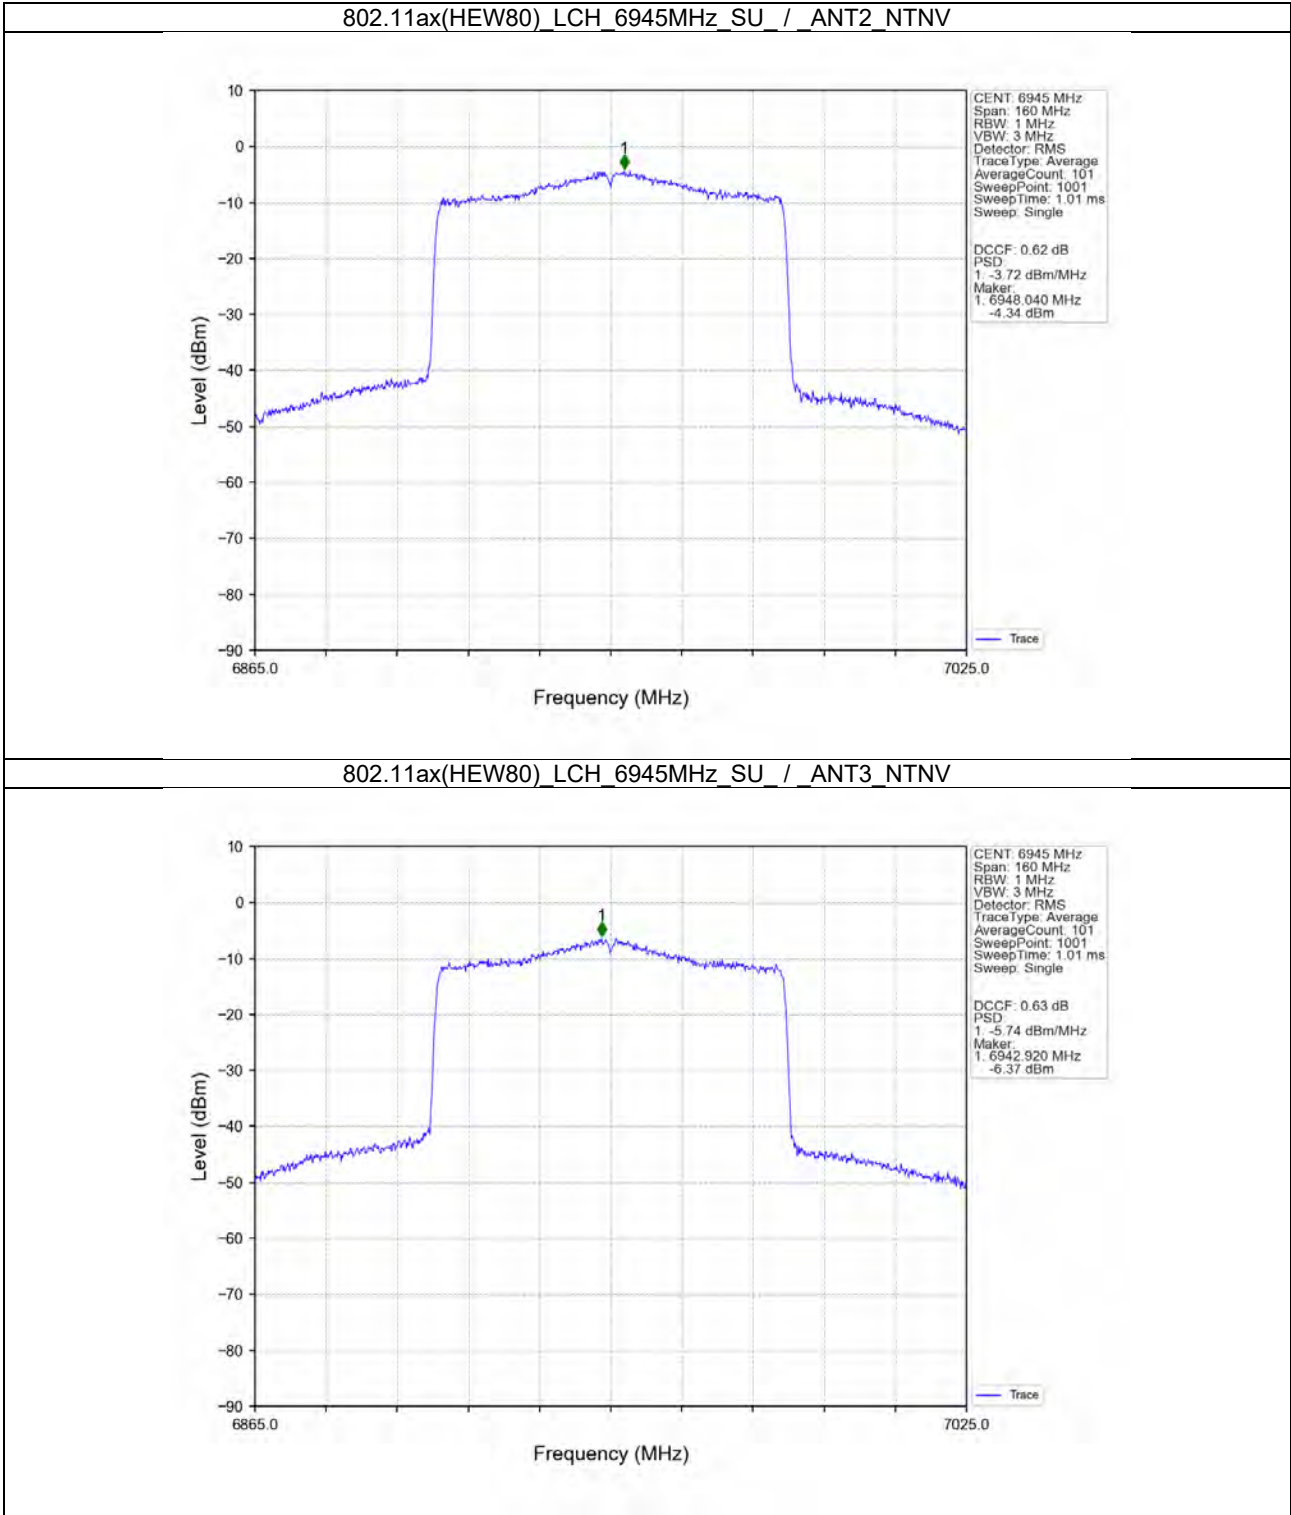



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 84 of 122

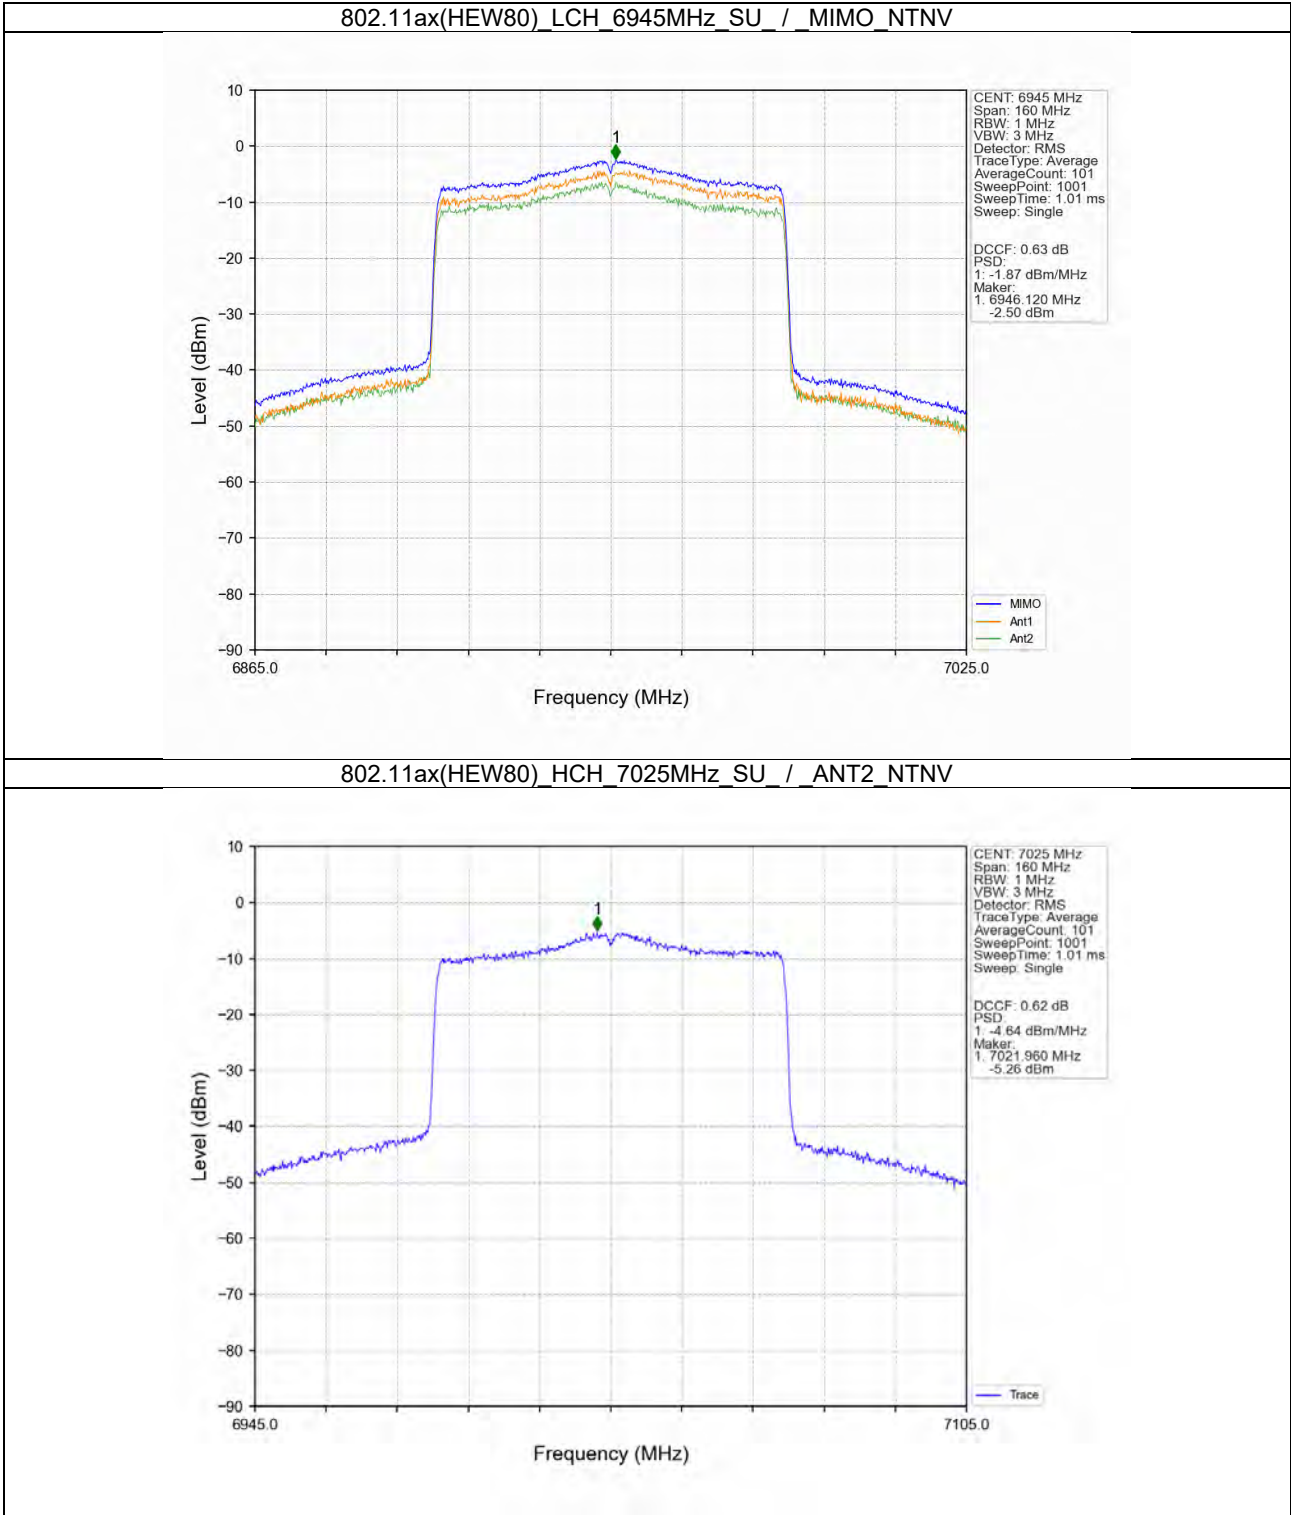



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 85 of 122

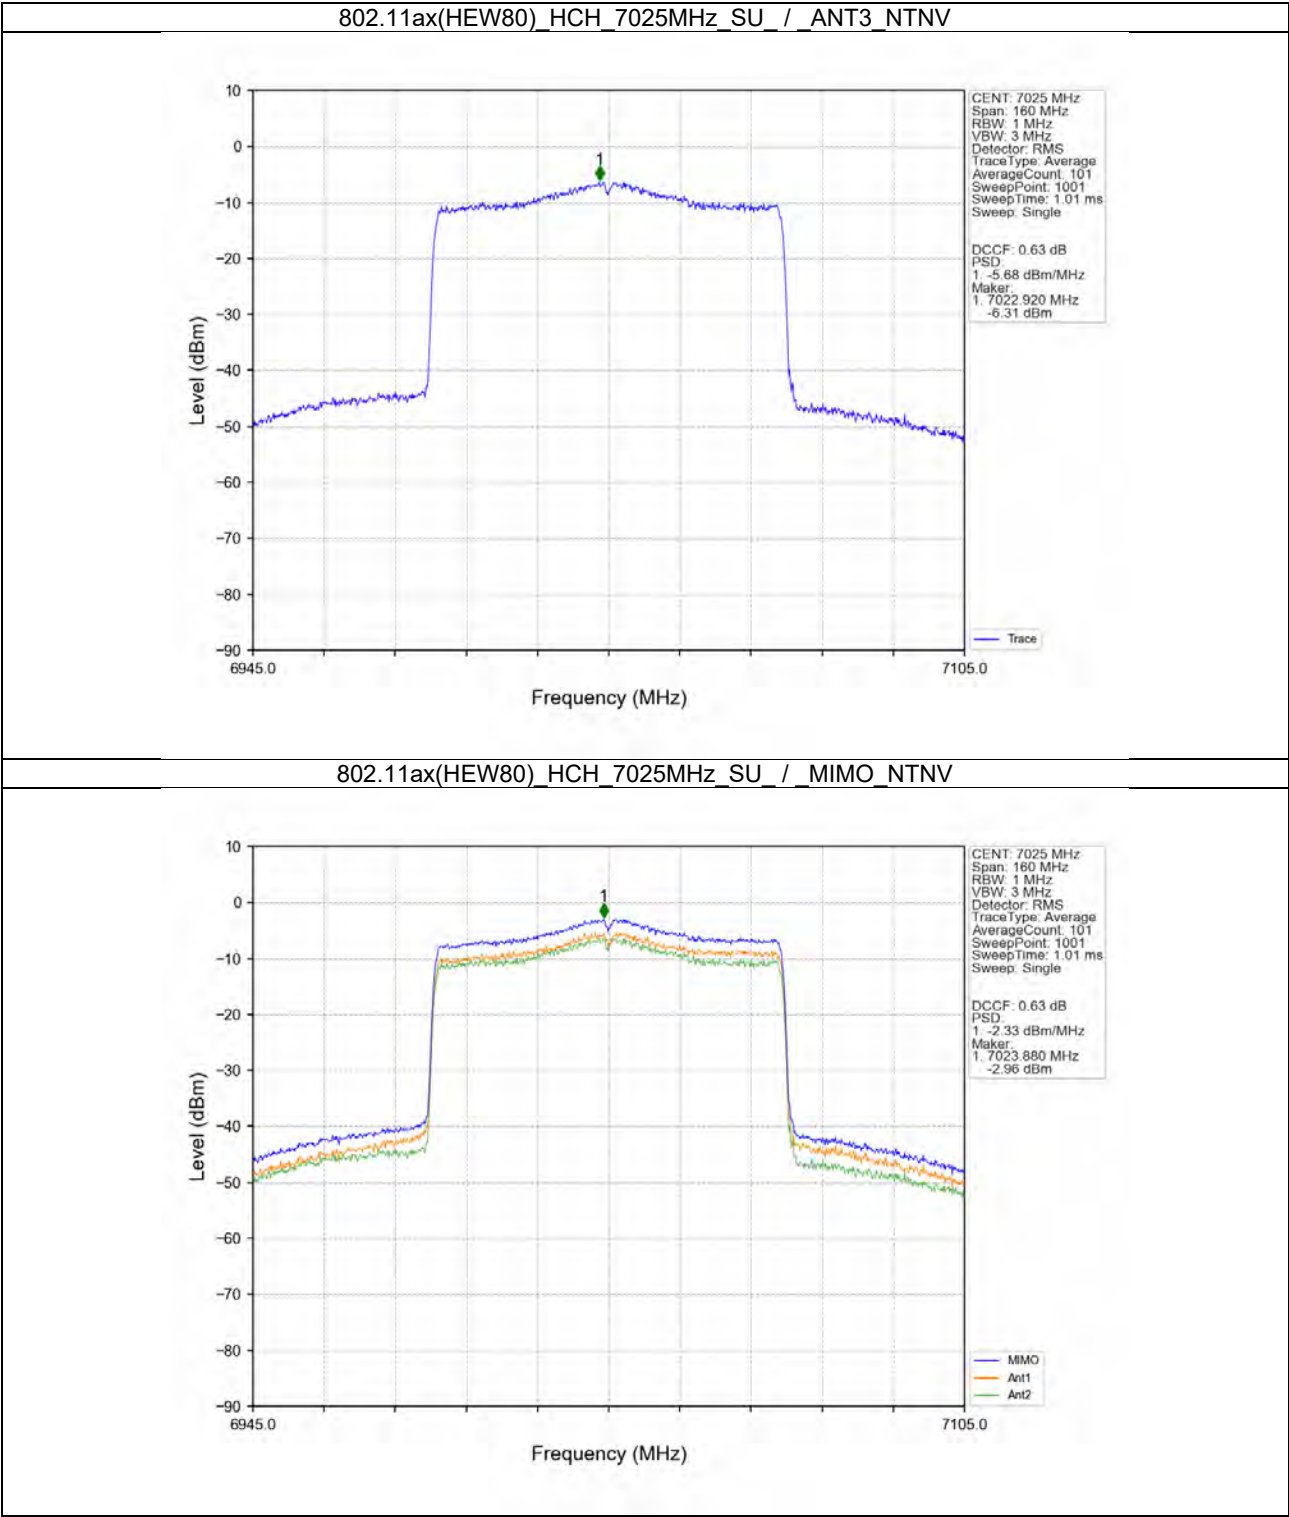




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 86 of 122


2.2.9 PSD

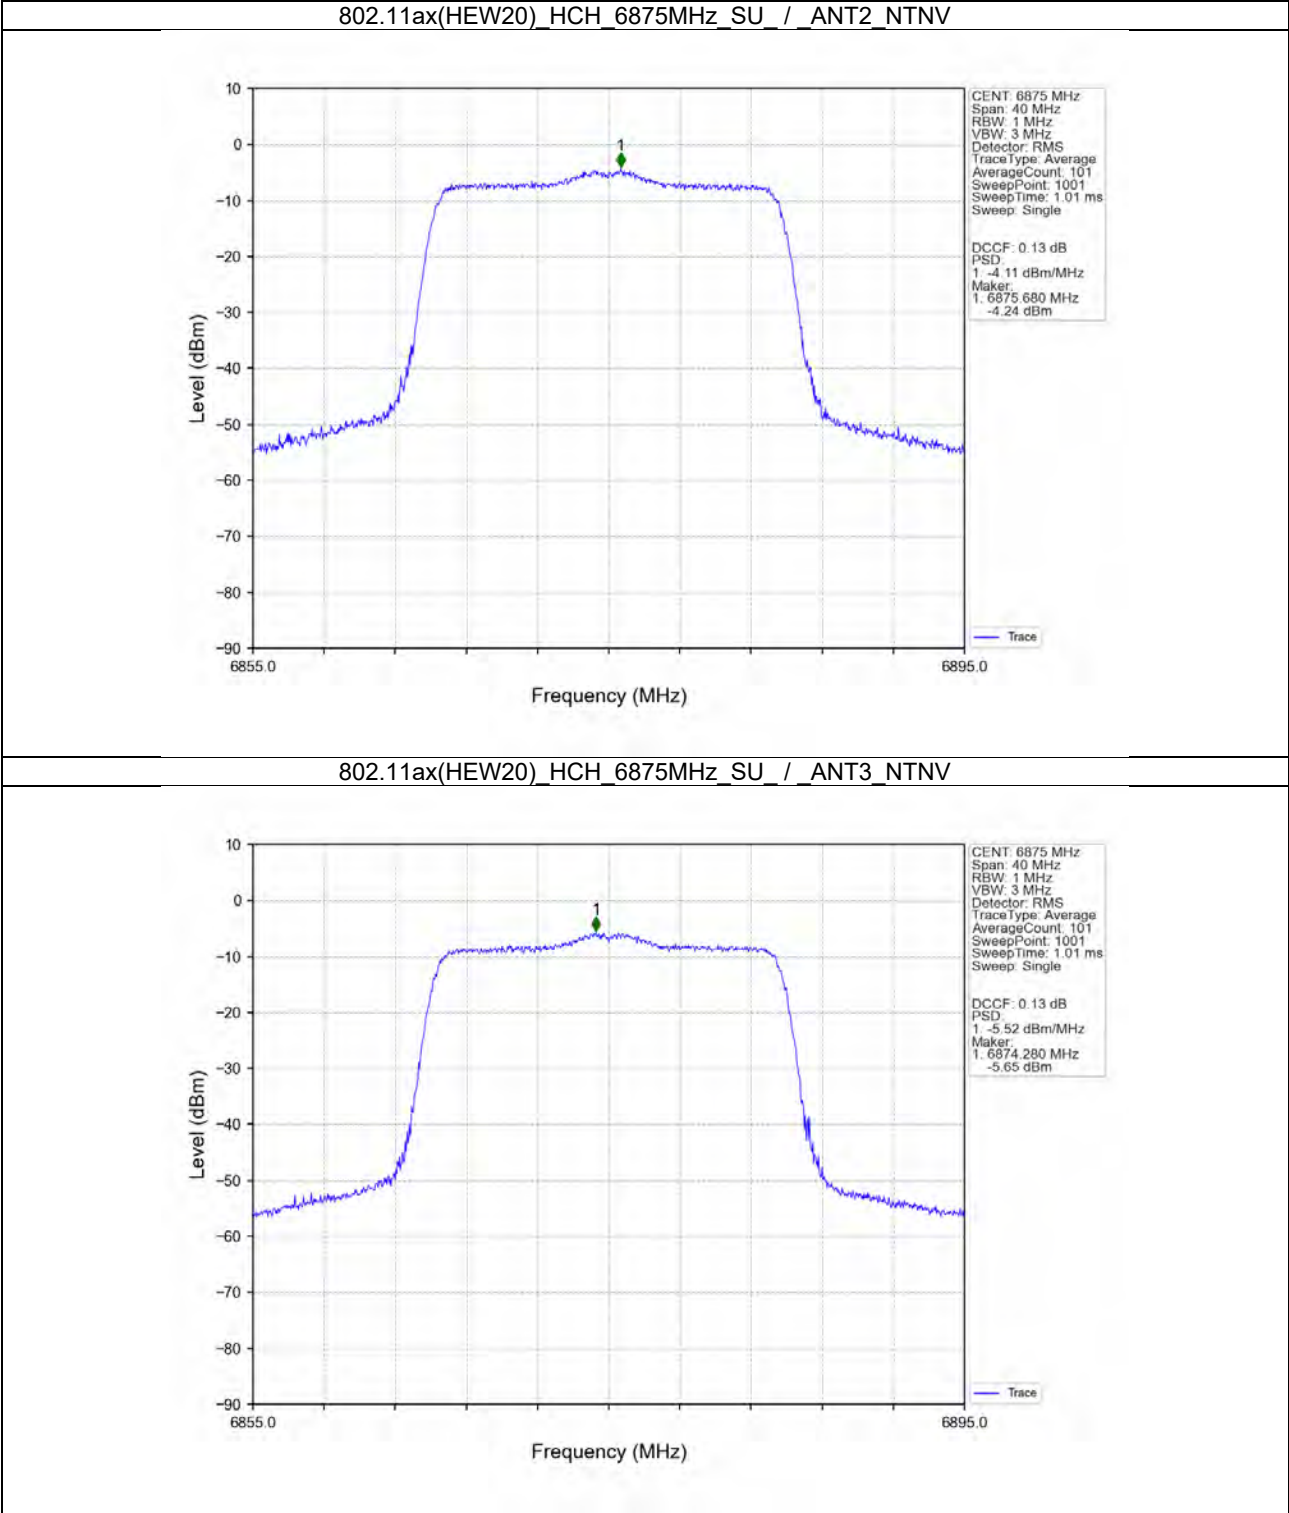



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 87 of 122

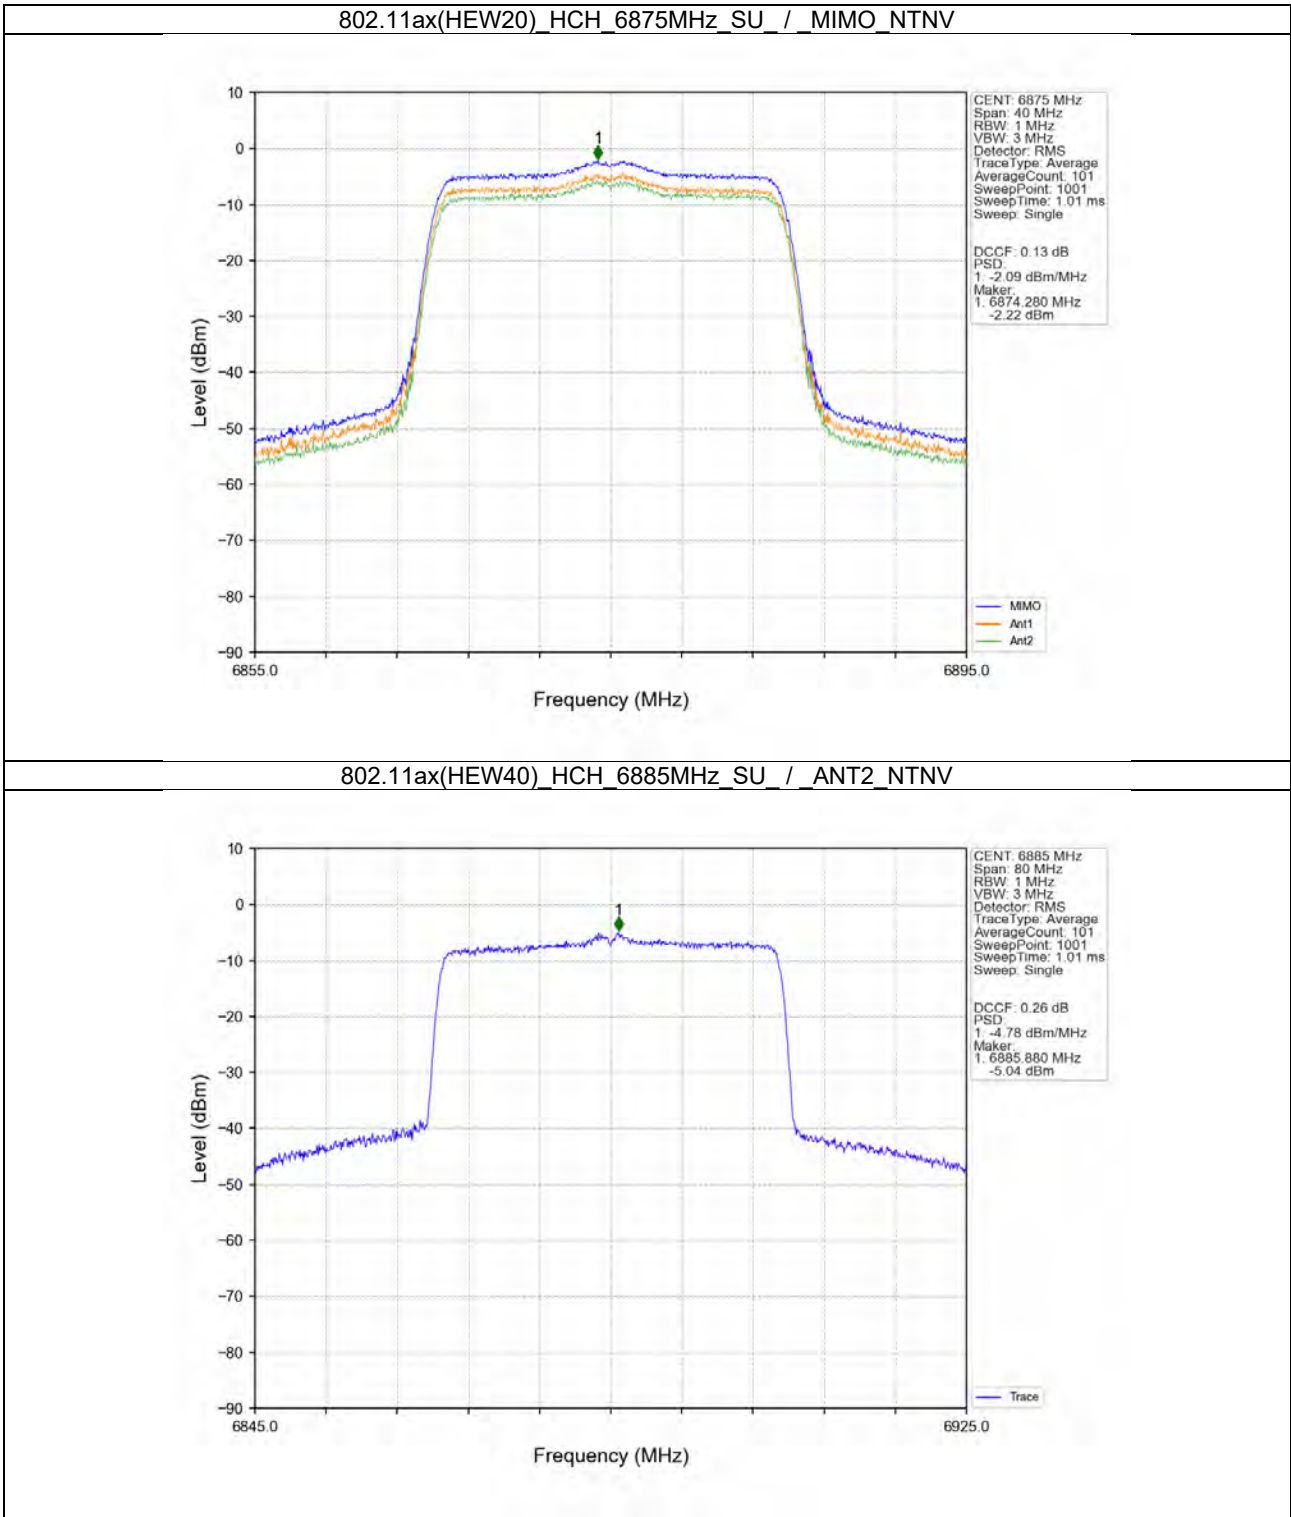



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 88 of 122

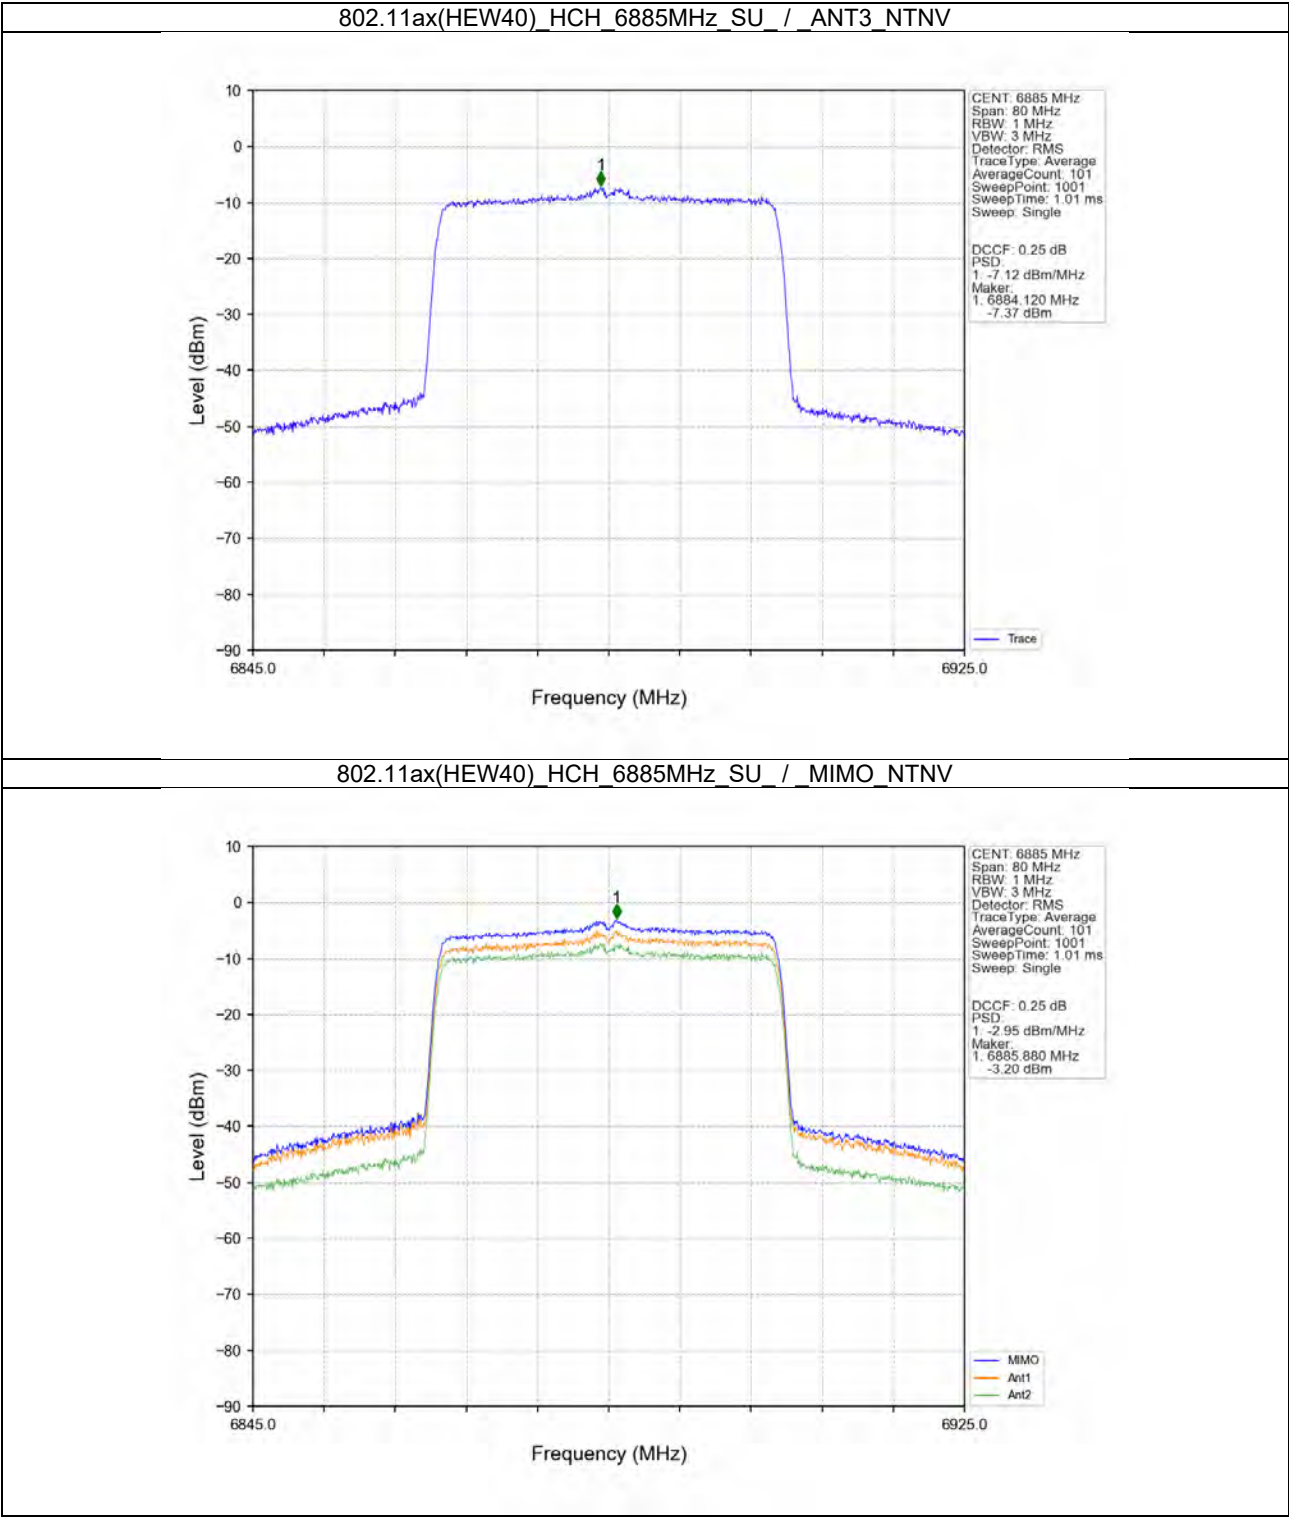



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 89 of 122

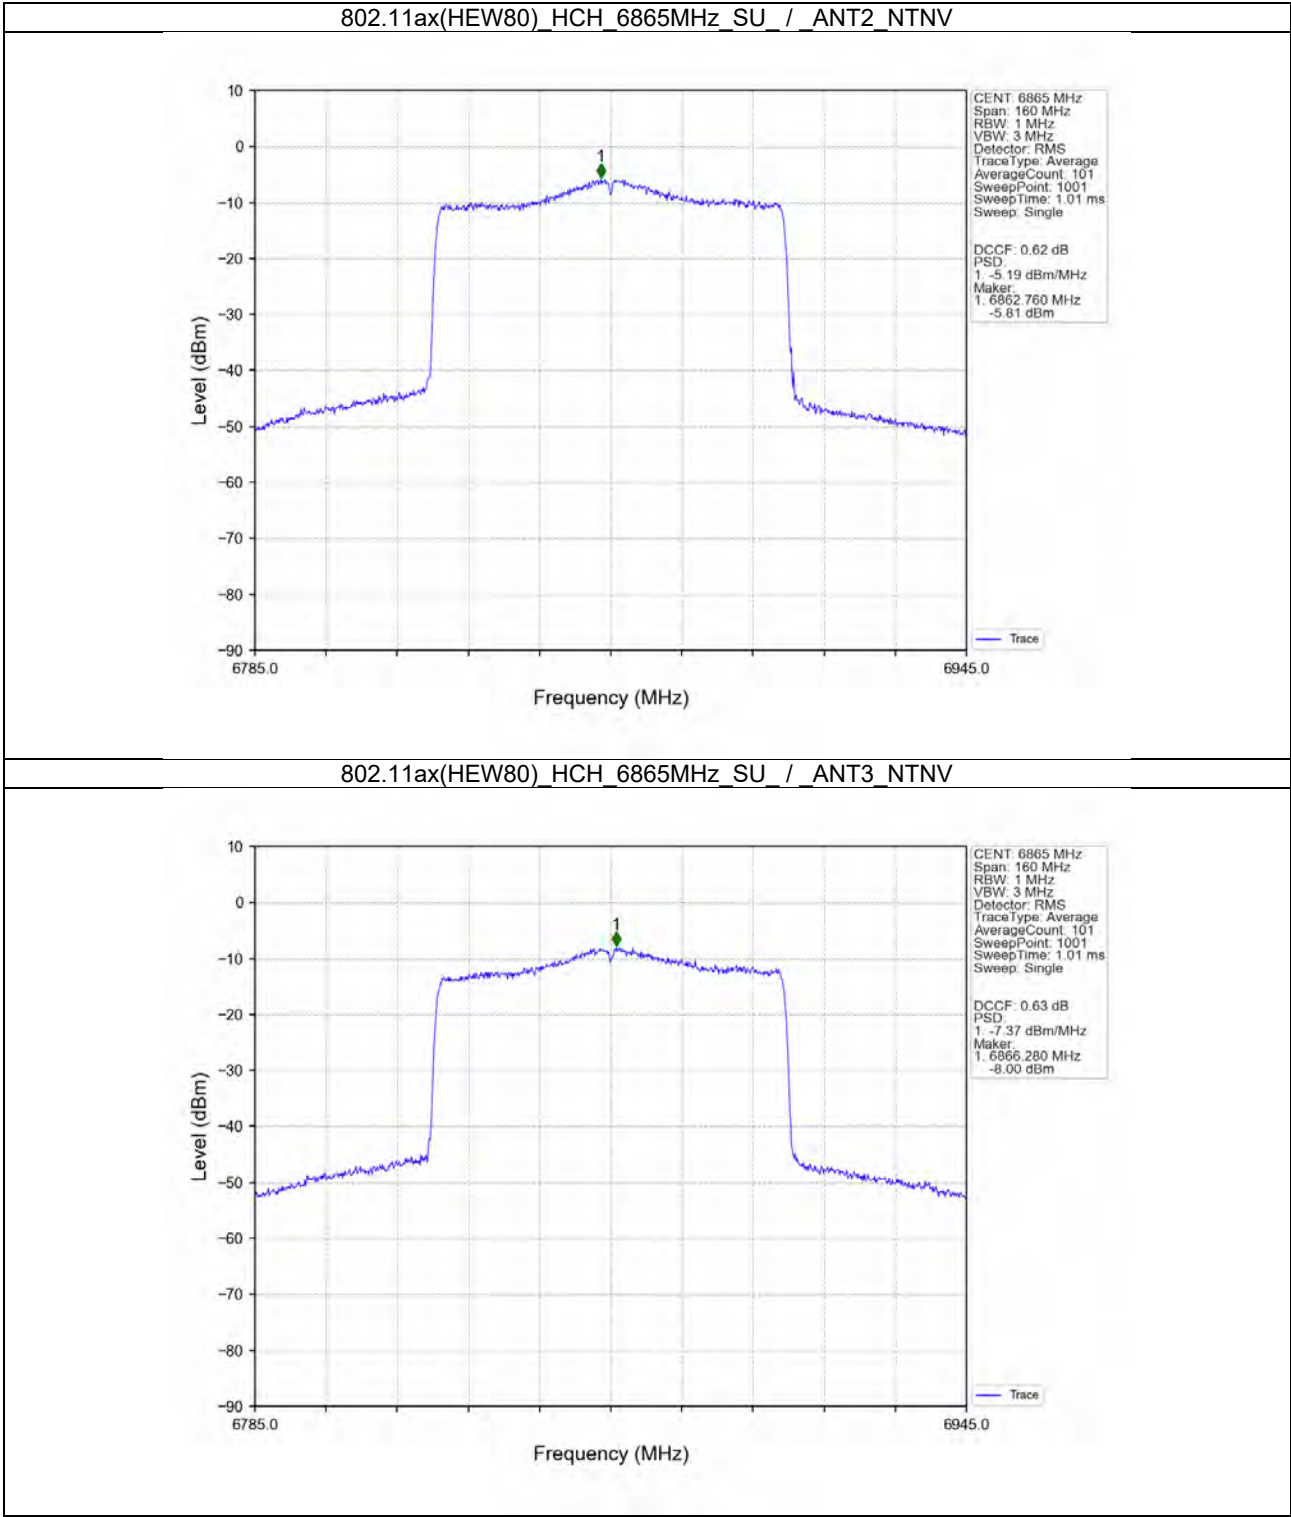



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 90 of 122

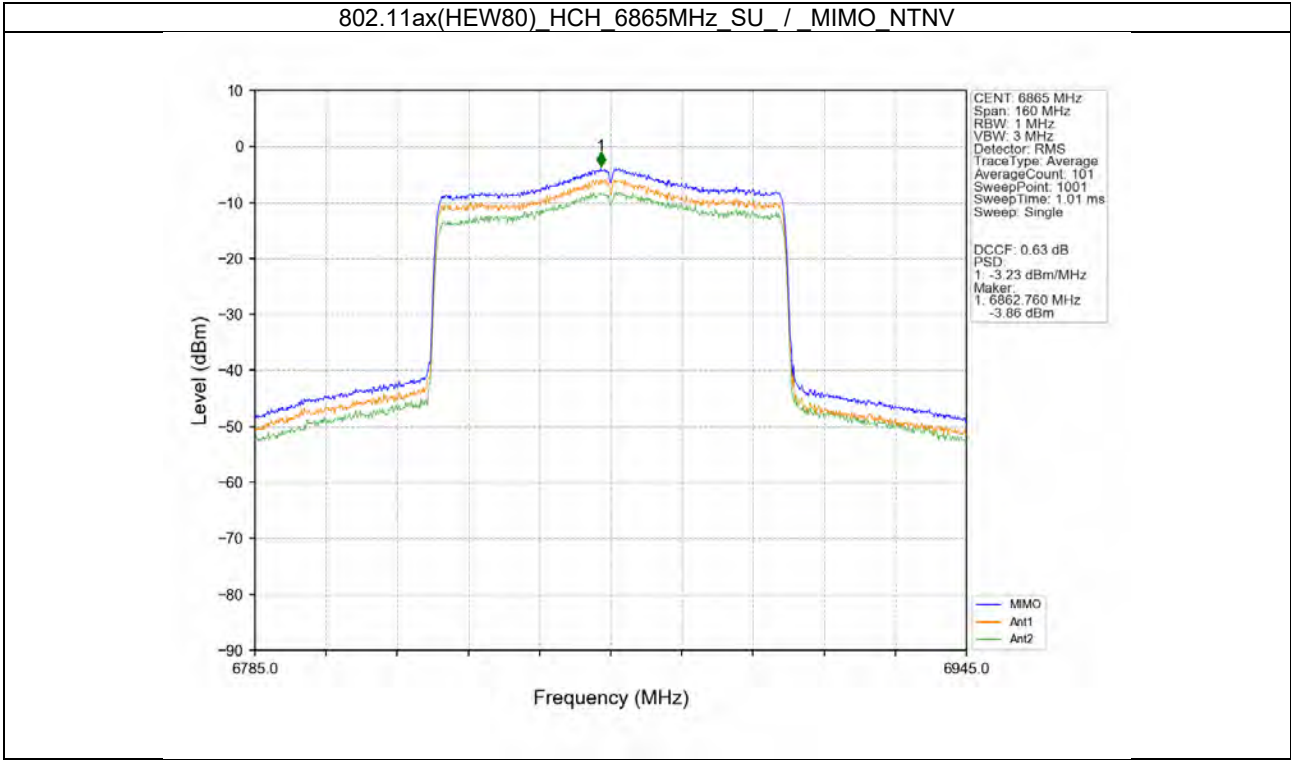




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 91 of 122


2.2.11 PSD

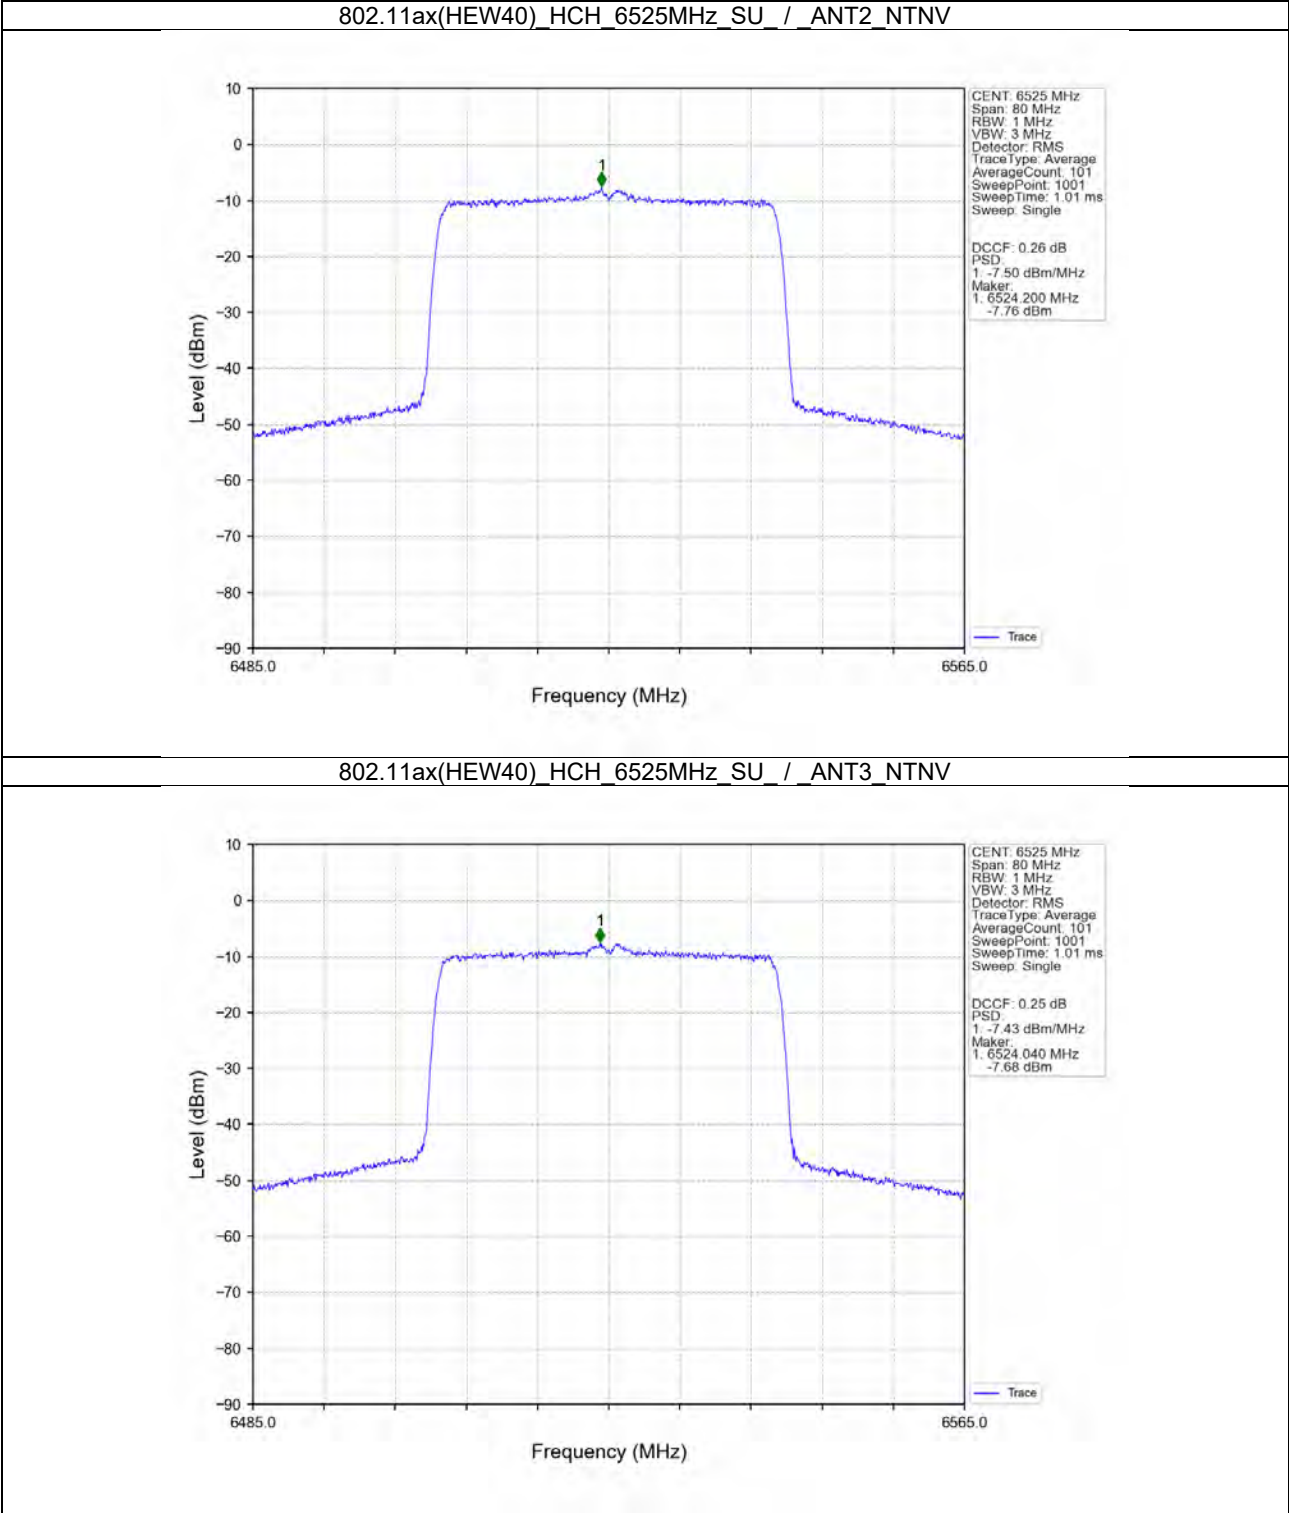


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
 Rev.: 01
 Page: 92 of 122

802.11ax(HEW40)_HCH_6525MHz_SU_/_MIMO_NTNV

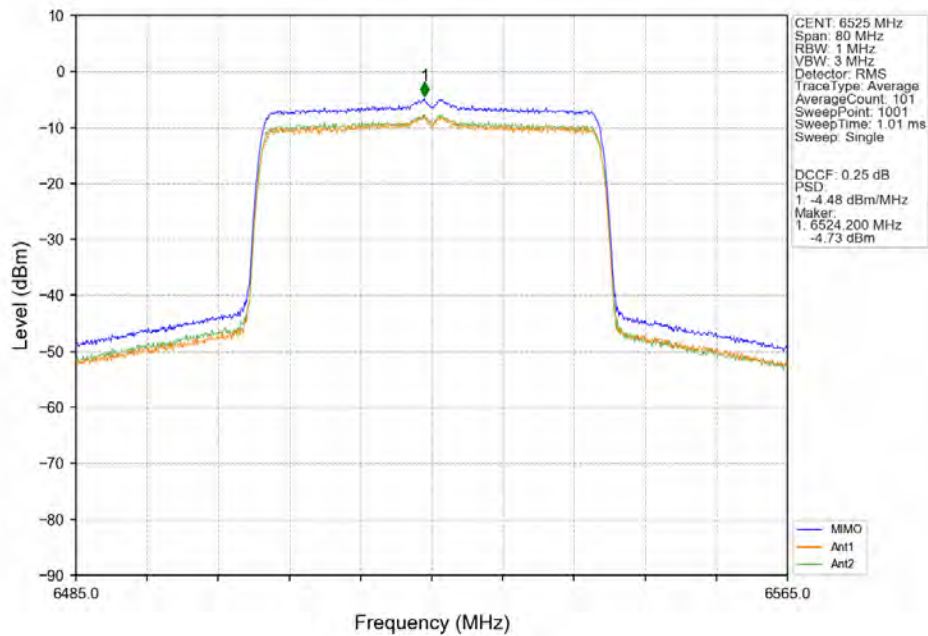


802.11ax(HEW80)_HCH_6545MHz_SU_/_ANT2_NTNV

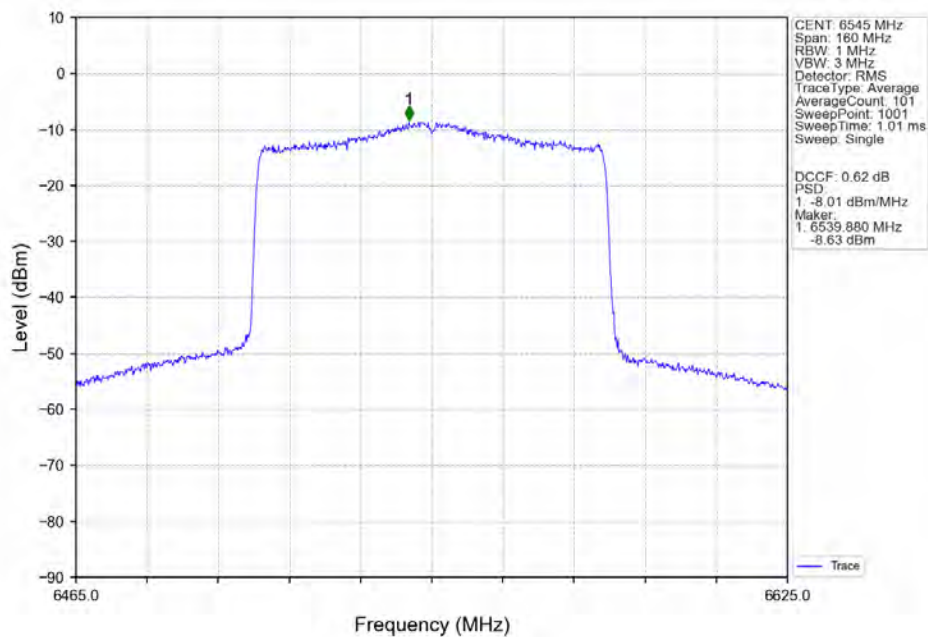



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 93 of 122

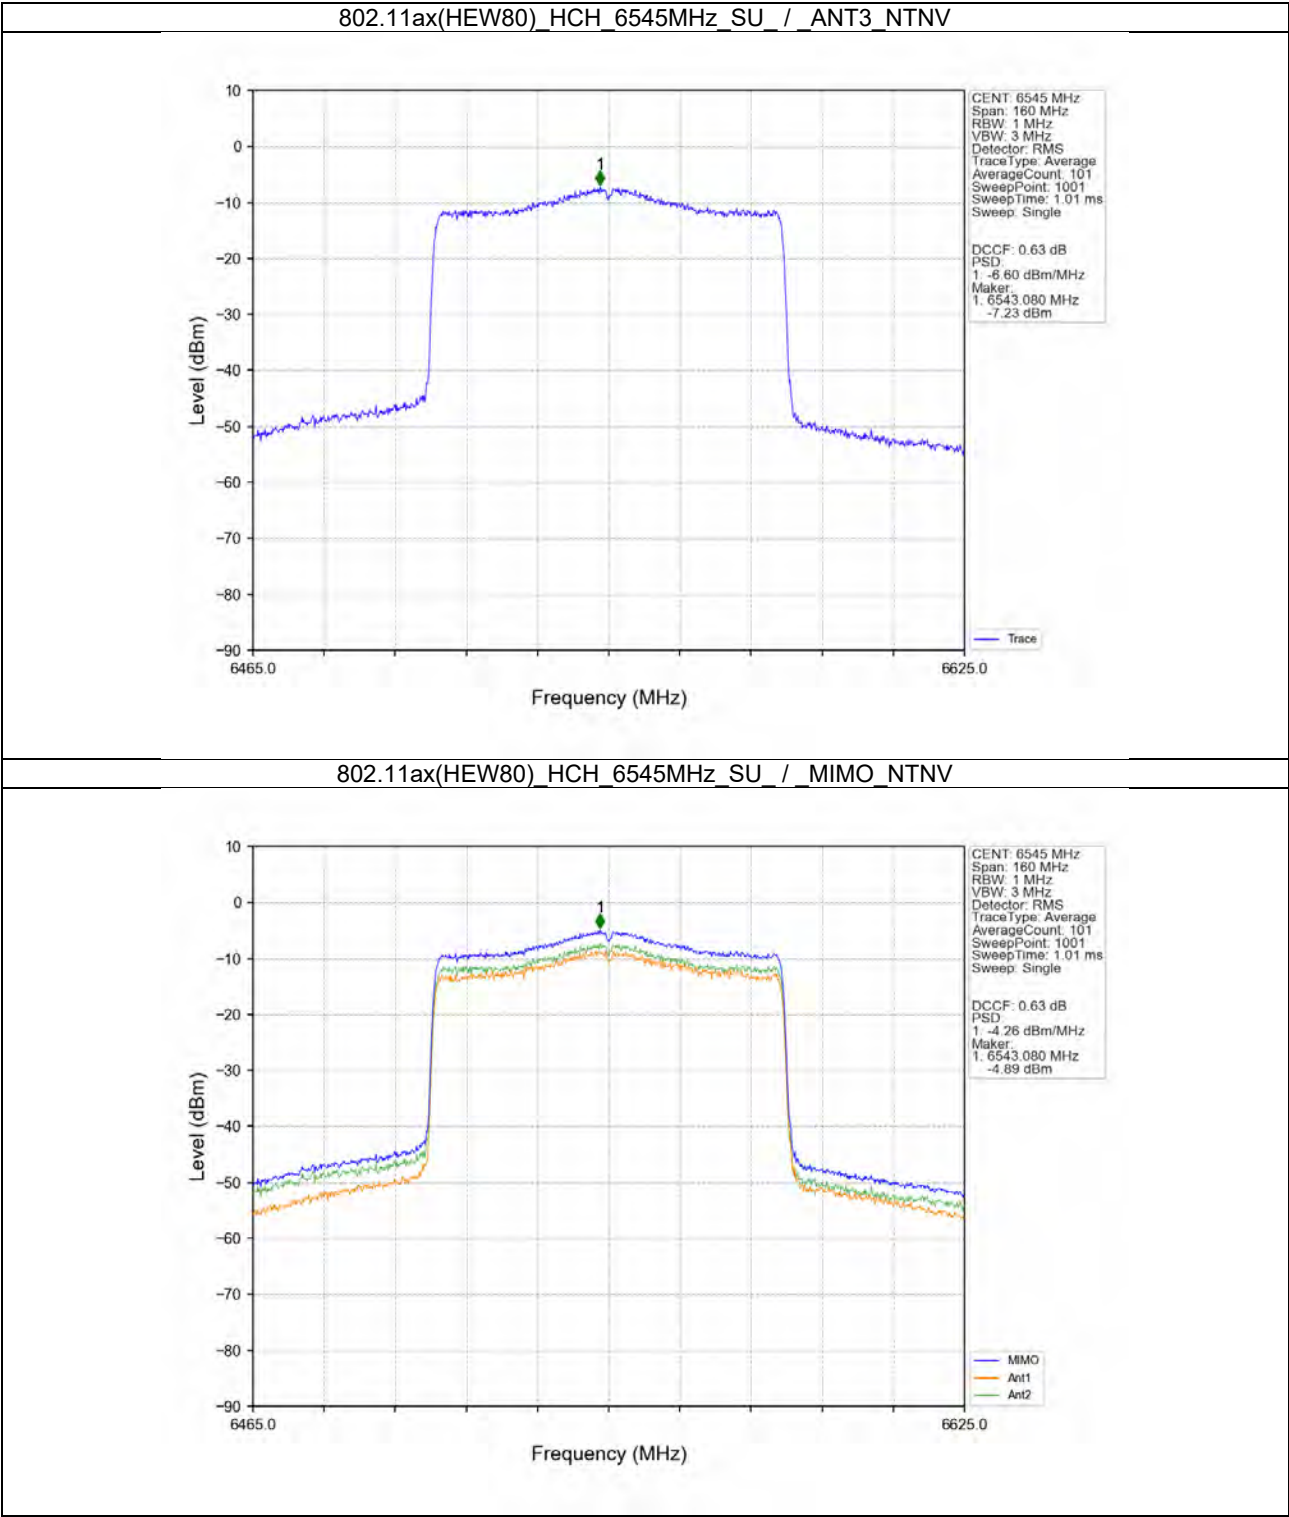



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 94 of 122

3. Contention Based Protocol

3.1 Test Result

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent Freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain (dBi)	Margin (dB)
UNII Band 5	6175	20	6175	-77.19	100	-62	-70.45	-6.74	8.45
						Result: Stop Transmission			
				-77.92	<90	-62	-71.18	-6.74	9.18
						Result: Minimal Operation			
				-78.62	0	-62	-71.88	-6.74	9.88
	6145	80	6110			Result: Normal Operation			
				-75.29	100	-62	-68.55	-6.74	6.55
						Result: Stop Transmission			
				-76.08	<90	-62	-69.34	-6.74	7.34
						Result: Minimal Operation			
			6145	-76.91	0	-62	-70.17	-6.74	8.17
						Result: Normal Operation			
				-76.15	100	-62	-69.41	-6.74	7.41
						Result: Stop Transmission			
				-76.93	<90	-62	-70.19	-6.74	8.19
						Result: Minimal Operation			
			6180	-77.75	0	-62	-71.01	-6.74	9.01
						Result: Normal Operation			
				-76.28	100	-62	-69.54	-6.74	7.54
						Result: Stop Transmission			
				-77.1	<90	-62	-70.36	-6.74	8.36
						Result: Minimal Operation			
				-77.86	0	-62	-71.12	-6.74	9.12
						Result: Normal Operation			

Note1: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

Note2: Margin (dB)= Regulated Threshold level (dBm) — Adjusted Power (dBm)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 95 of 122

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent Freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain (dBi)	Margin (dB)
UNII Band 6	6475	20	6475	-76.48	100	-62	-66.46	-10.02	4.46
				Result: Stop Transmission					
				-77.26	<90	-62	-67.24	-10.02	5.24
				Result: Minimal Operation					
				-77.99	0	-62	-67.97	-10.02	5.97
	6465	80	6430	Result: Normal Operation					
				-76.84	100	-62	-66.82	-10.02	4.82
				Result: Stop Transmission					
				-77.6	<90	-62	-67.58	-10.02	5.58
				Result: Minimal Operation					
			6465	-78.96	0	-62	-68.94	-10.02	6.94
				Result: Normal Operation					
				-75.23	100	-62	-65.21	-10.02	3.21
				Result: Stop Transmission					
				-76.92	<90	-62	-66.9	-10.02	4.9
				Result: Minimal Operation					
				-78.55	0	-62	-68.53	-10.02	6.53
				Result: Normal Operation					
			6500	-75.57	100	-62	-65.55	-10.02	3.55
				Result: Stop Transmission					
				-77.24	<90	-62	-67.22	-10.02	5.22
				Result: Minimal Operation					
				-78.73	0	-62	-68.71	-10.02	6.71
				Result: Normal Operation					

Note1: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

Note2: Margin (dB)= Regulated Threshold level (dBm) — Adjusted Power (dBm)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 96 of 122

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent Freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain (dBi)	Margin (dB)
UNII Band 7	6695	20	6695	-76.83	100	-62	-69.04	-7.79	7.04
						Result: Stop Transmission			
				-77.62	<90	-62	-69.83	-7.79	7.83
						Result: Minimal Operation			
				-78.31	0	-62	-70.52	-7.79	8.52
	6705	80	6670			Result: Normal Operation			
				-73.48	100	-62	-65.69	-7.79	3.69
						Result: Stop Transmission			
				-75.23	<90	-62	-67.44	-7.79	5.44
						Result: Minimal Operation			
			6705	-77.71	0	-62	-69.92	-7.79	7.92
						Result: Normal Operation			
				-75.24	100	-62	-67.45	-7.79	5.45
						Result: Stop Transmission			
				-76.06	<90	-62	-68.27	-7.79	6.27
						Result: Minimal Operation			
			6740	-77.64	0	-62	-69.85	-7.79	7.85
						Result: Normal Operation			
				-75.44	100	-62	-67.65	-7.79	5.65
						Result: Stop Transmission			
				-76.28	<90	-62	-68.49	-7.79	6.49
						Result: Minimal Operation			
				-77.84	0	-62	-70.05	-7.79	8.05
						Result: Normal Operation			

Note1: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

Note2: Margin (dB)= Regulated Threshold level (dBm) — Adjusted Power (dBm)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 97 of 122

Band	Channel Freq. (MHz)	Channel BW (MHz)	Incumbent Freq. (MHz)	Injected AWGN Level (dBm)	Detection Rate (%)	Regulated Threshold level (dBm)	Adjusted Power (dBm)	Antenna Gain (dBi)	Margin (dB)
UNII Band 8	6995	20	6995	-76.79	100	-62	-69	-7.79	7
						Result: Stop Transmission			
				-77.55	<90	-62	-69.76	-7.79	7.76
						Result: Minimal Operation			
				-78.32	0	-62	-70.53	-7.79	8.53
	7025	80	6990			Result: Normal Operation			
				-74.34	100	-62	-66.55	-7.79	4.55
						Result: Stop Transmission			
				-75.15	<90	-62	-67.36	-7.79	5.36
						Result: Minimal Operation			
			7025	-77.62	0	-62	-69.83	-7.79	7.83
						Result: Normal Operation			
				-73.8	100	-62	-66.01	-7.79	4.01
						Result: Stop Transmission			
				-74.63	<90	-62	-66.84	-7.79	4.84
						Result: Minimal Operation			
			7060	-76.37	0	-62	-68.58	-7.79	6.58
						Result: Normal Operation			
				-74.25	100	-62	-66.46	-7.79	4.46
						Result: Stop Transmission			
				-75.26	<90	-62	-67.47	-7.79	5.47
						Result: Minimal Operation			
				-77.6	0	-62	-69.81	-7.79	7.81
						Result: Normal Operation			

Note1: Adjusted Power (dBm)= Injected AWGN Level (dBm) — Antenna Gain (dBi)

Note2: Margin (dB)= Regulated Threshold level (dBm) — Adjusted Power (dBm)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 98 of 122





3.2 Test Graphs

Contention Based Protocol Result on U-NII 5 (AWGN Interference)			
802.11 ax (HE20) /6175MHz Threshold Level (TL)		802.11 ax (HE20) /6175MHz Test Result is pass due to no transmission occur.	
802.11 ax (HE20) /6175MHz Threshold Level (TL)		802.11 ax (HE20) /6175MHz Transmission when the interferer is Minimal Operation	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 99 of 122

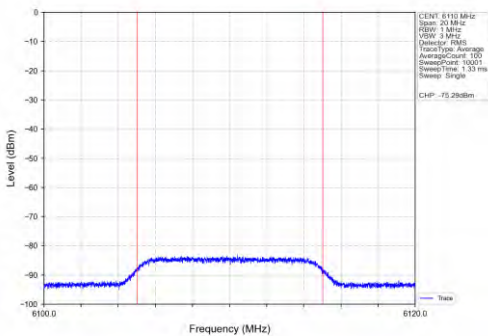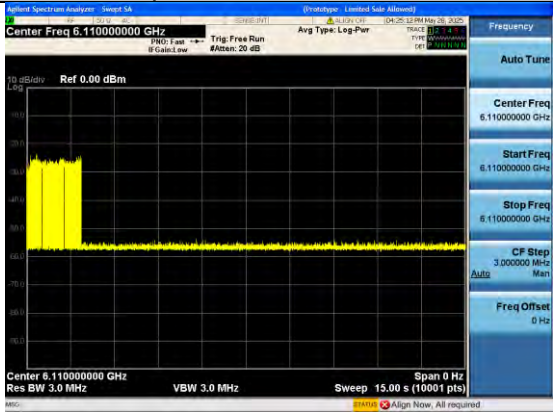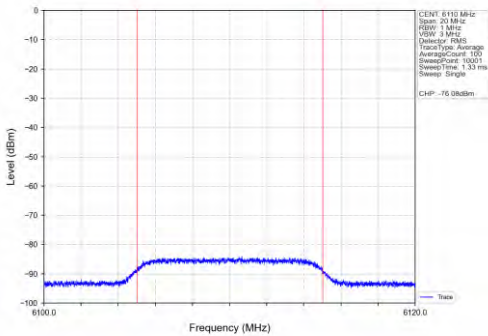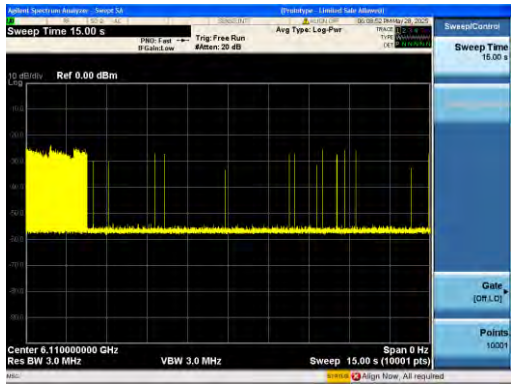Contention Based Protocol Result on U-NII 5 (AWGN Interference)	
802.11 ax (HE80) /6110MHz Threshold Level (TL)	802.11 ax (HE80) /6110MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6110MHz Threshold Level (TL)	802.11 ax (HE80) /6110MHz Transmission when the interferer is Minimal Operation
	







SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01





Page: 100 of 122

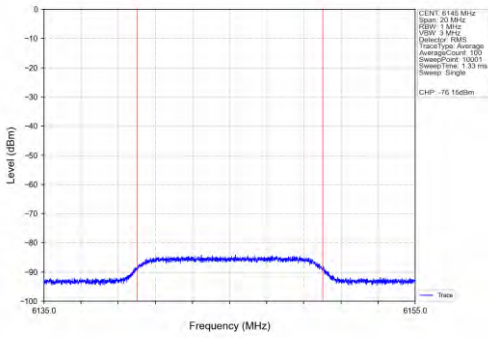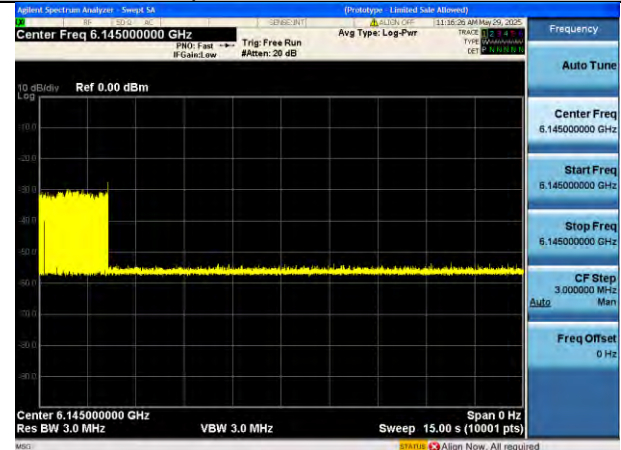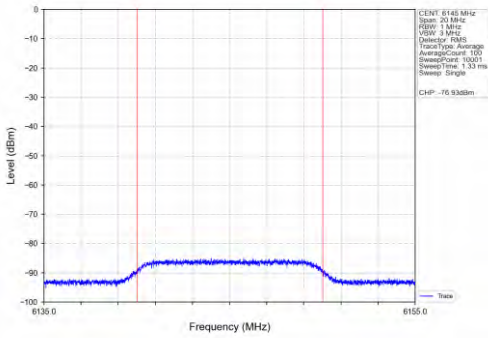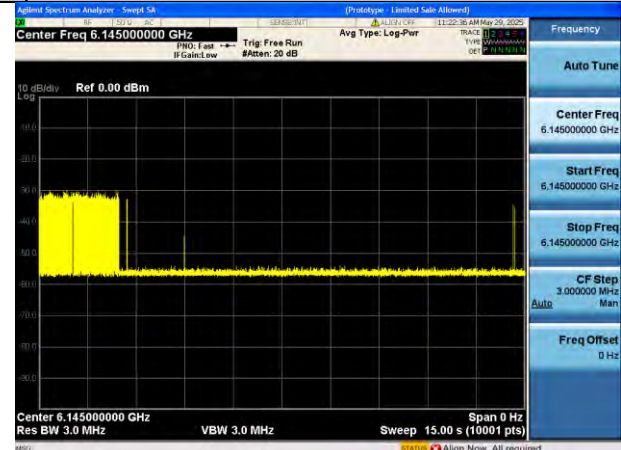Contention Based Protocol Result on U-NII 5 (AWGN Interference)	
802.11 ax (HE80) /6145MHz Threshold Level (TL)	802.11 ax (HE80) /6145MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6145MHz Threshold Level (TL)	802.11 ax (HE80) /6145MHz Transmission when the interferer is Minimal Operation
	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 101 of 122

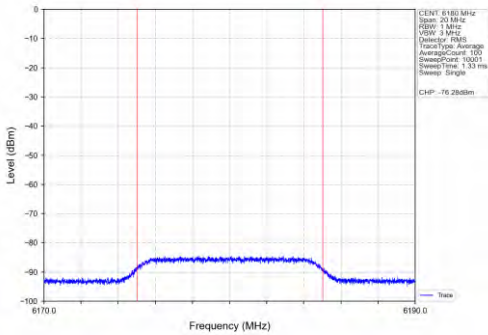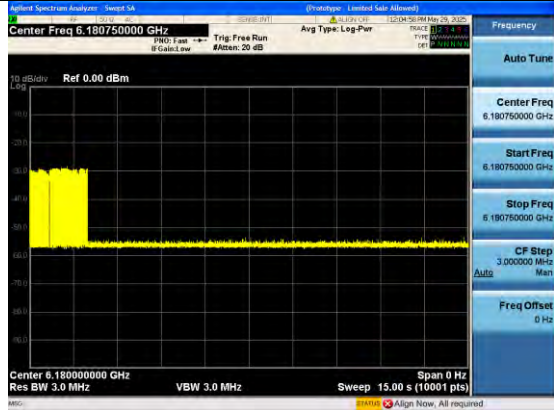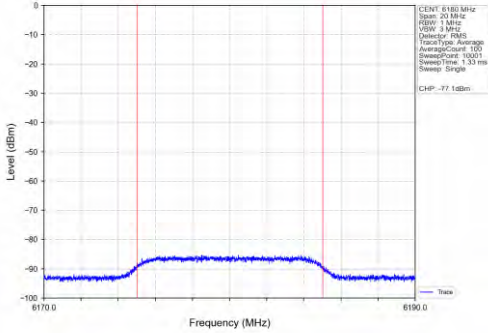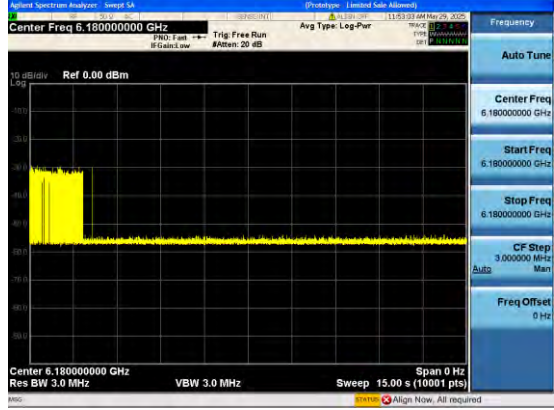Contention Based Protocol Result on U-NII 5 (AWGN Interference)	
802.11 ax (HE80) /6180MHz Threshold Level (TL)	802.11 ax (HE80) /6180MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6180MHz Threshold Level (TL)	802.11 ax (HE80) /6180MHz Transmission when the interferer is Minimal Operation
	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 102 of 122

Contention Based Protocol Result on U-NII 6 (AWGN Interference)


802.11 ax (HE20) /6475MHz
Threshold Level (TL)

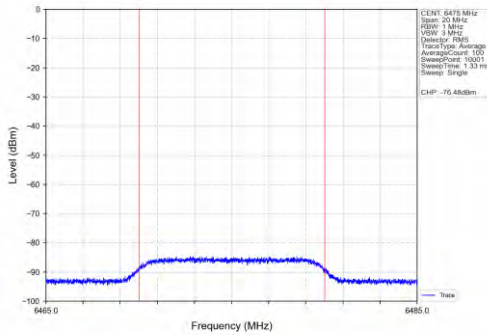


802.11 ax (HE20) 6475MHz
Test Result is pass due to no transmission occur.

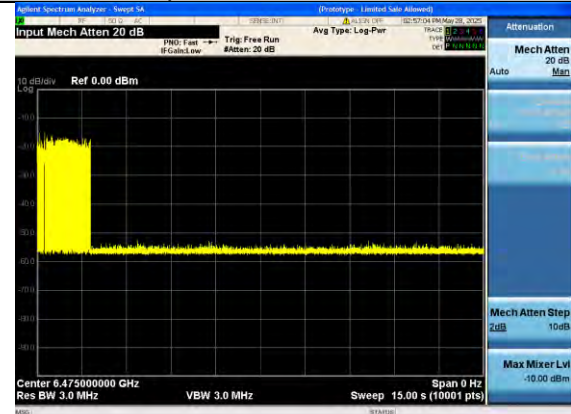

802.11 ax (HE20) /6475MHz
Threshold Level (TL)

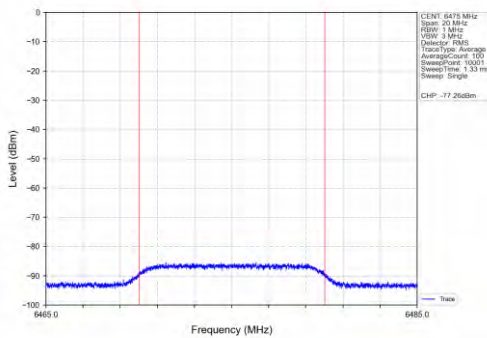





802.11 ax (HE20) /6475MHz
Transmission when the interferer is Minimal
Operation

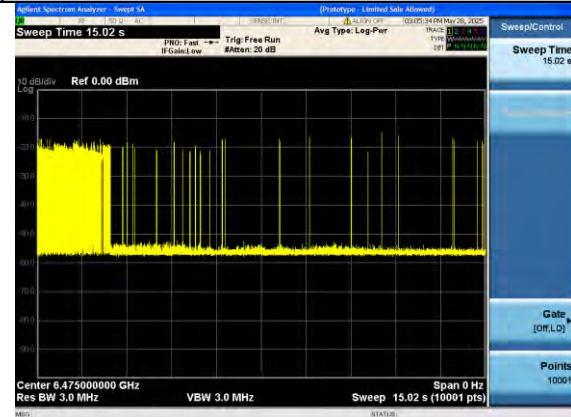



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 103 of 122

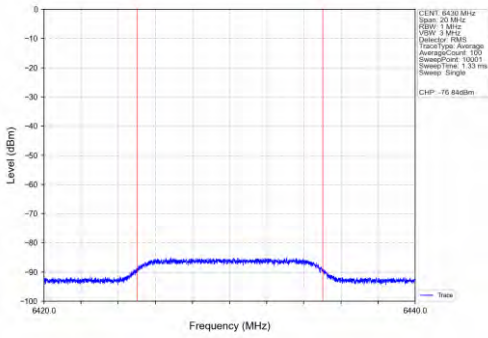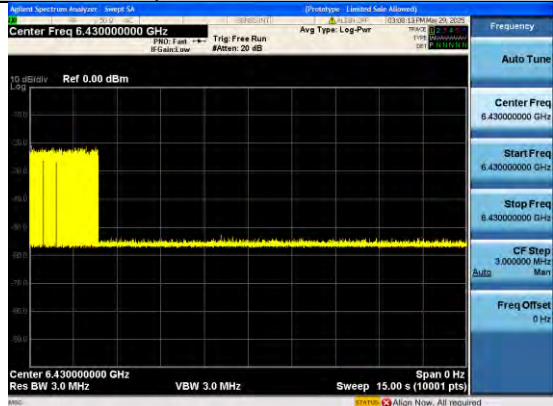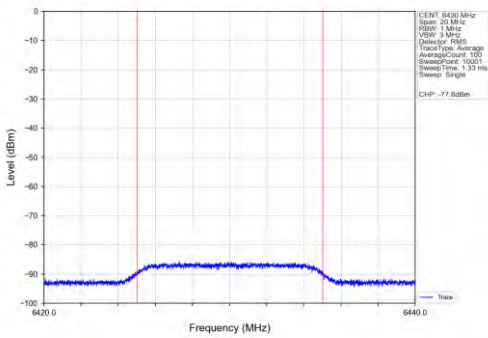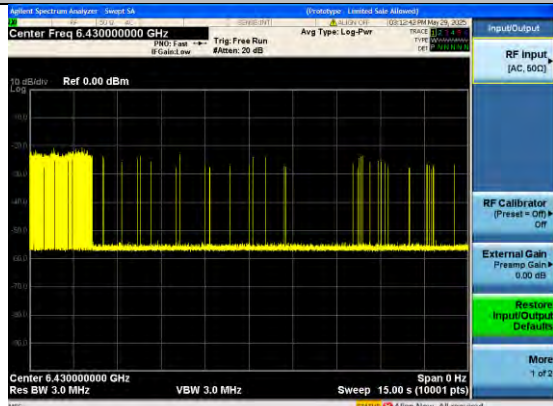Contention Based Protocol Result on U-NII 6 (AWGN Interference)	
802.11 ax (HE80) /6430MHz Threshold Level (TL)	802.11 ax (HE80) /6430MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6430MHz Threshold Level (TL)	802.11 ax (HE80) /6430MHz Transmission when the interferer is Minimal Operation
	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 104 of 122

Contention Based Protocol Result on U-NII 6 (AWGN Interference)


802.11 ax (HE80) /6465MHz
Threshold Level (TL)

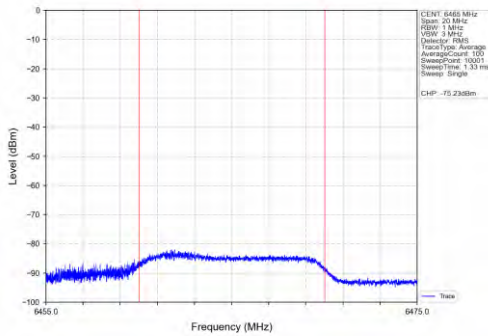


802.11 ax (HE80) /6465MHz
Test Result is pass due to no transmission occur.

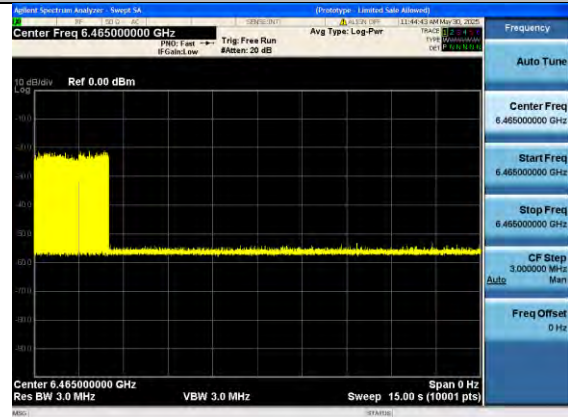

802.11 ax (HE80) /6465MHz
Threshold Level (TL)

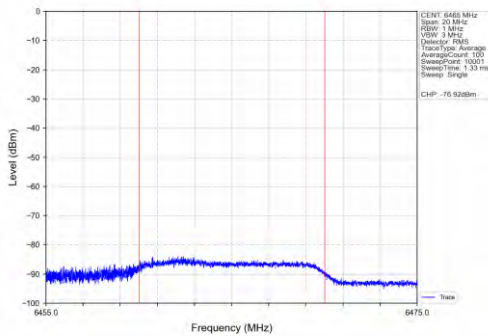





802.11 ax (HE80) /6465MHz
Transmission when the interferer is Minimal
Operation

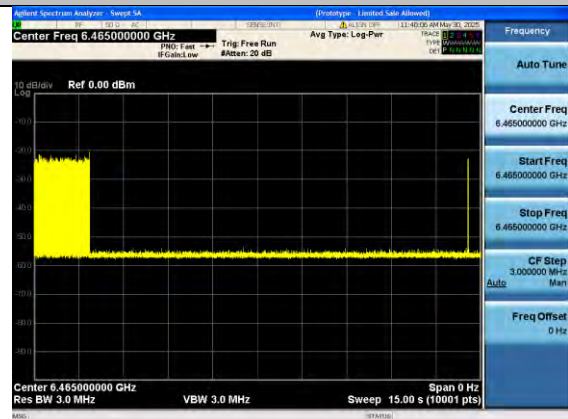



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 105 of 122

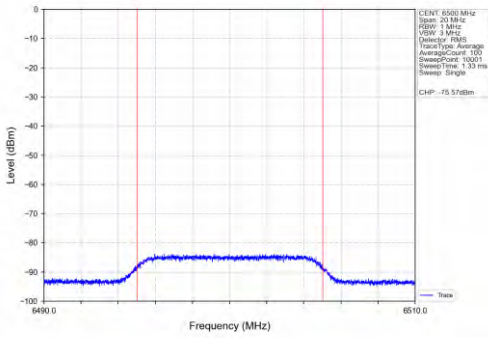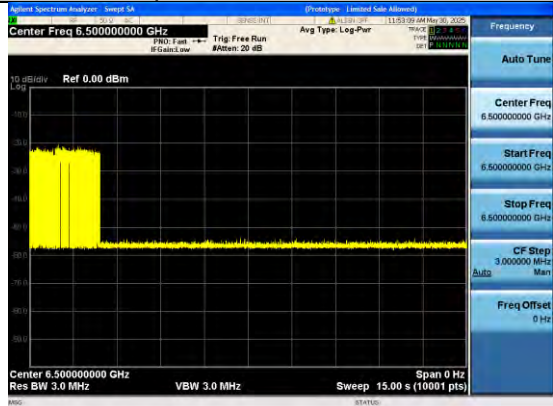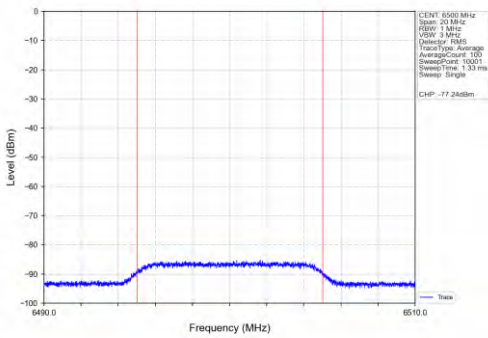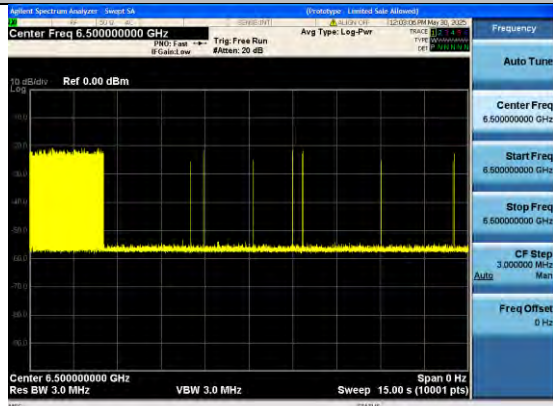Contention Based Protocol Result on U-NII 6 (AWGN Interference)	
802.11 ax (HE80) /6500MHz Threshold Level (TL)	802.11 ax (HE80) /6500MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6500MHz Threshold Level (TL)	802.11 ax (HE80) /6500MHz Transmission when the interferer is Minimal Operation
	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 106 of 122

Contention Based Protocol Result on U-NII 7 (AWGN Interference)


802.11 ax (HE20) /6695MHz
Threshold Level (TL)

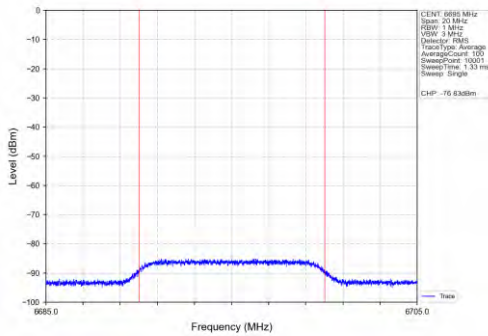


802.11 ax (HE20) /6695MHz
Test Result is pass due to no transmission occur.

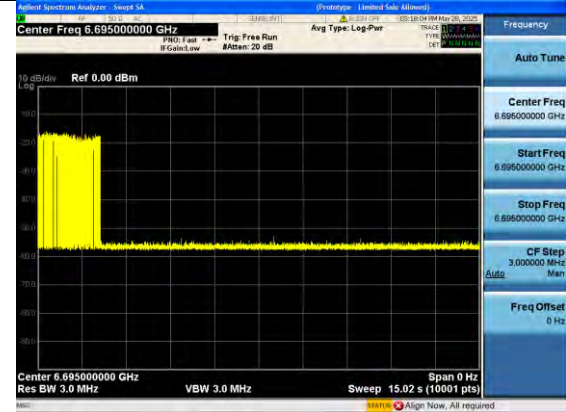

802.11 ax (HE20) /6695MHz
Threshold Level (TL)

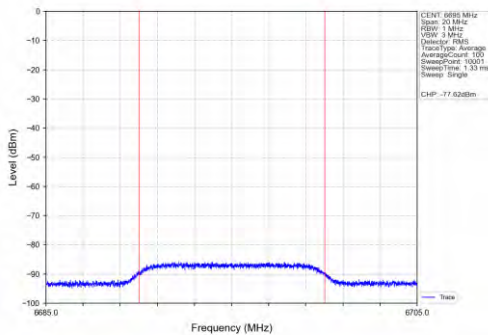

802.11 ax (HE20) /6695MHz
Transmission when the interferer is Minimal
Operation

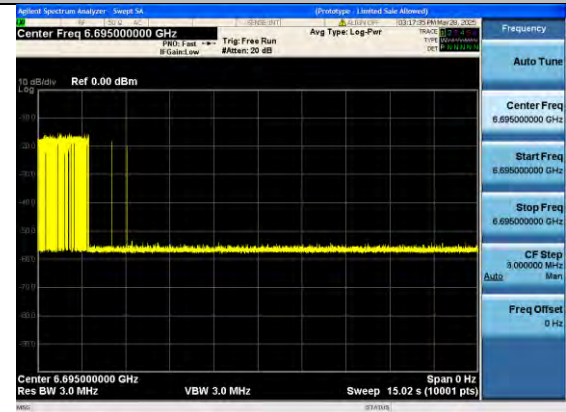



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 107 of 122

Contention Based Protocol Result on U-NII 7 (AWGN Interference)			
802.11 ax (HE80) /6670MHz Threshold Level (TL)		802.11 ax (HE80) /6670MHz Test Result is pass due to no transmission occur.	
802.11 ax (HE80) /6670MHz Threshold Level (TL)		802.11 ax (HE80) /6670MHz Transmission when the interferer is Minimal Operation	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 108 of 122

Contention Based Protocol Result on U-NII 7 (AWGN Interference)


802.11 ax (HE80) /6705MHz
Threshold Level (TL)

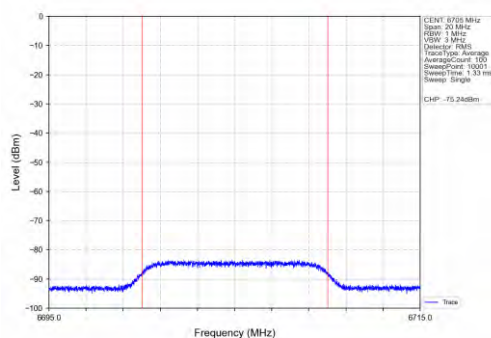


802.11 ax (HE80) /6705MHz
Test Result is pass due to no transmission occur.

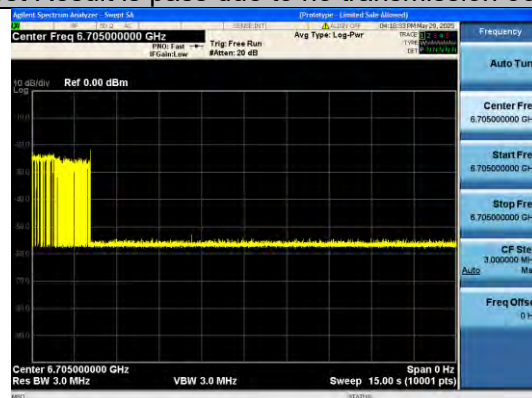

802.11 ax (HE80) /6705MHz
Threshold Level (TL)

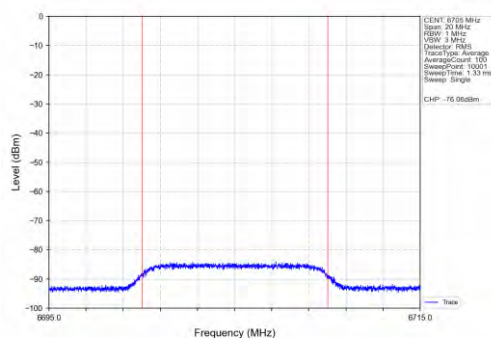





802.11 ax (HE80) /6705MHz
Transmission when the interferer is Minimal
Operation

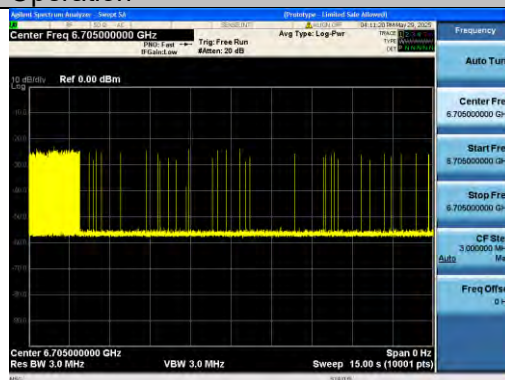



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 109 of 122

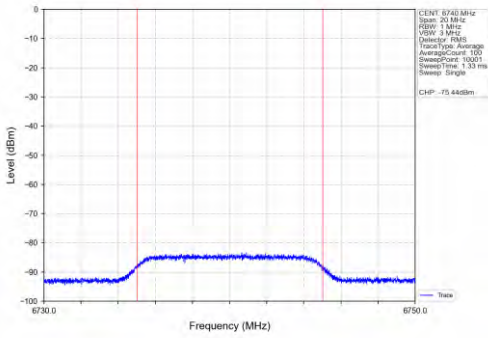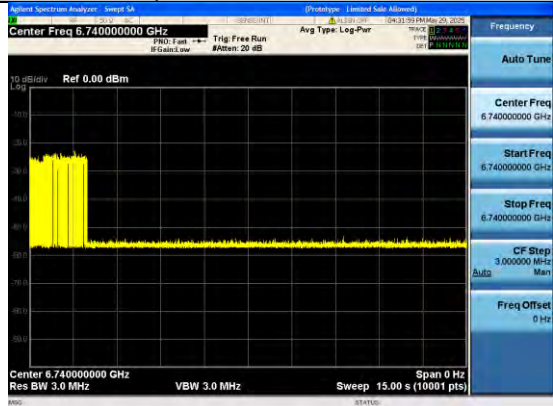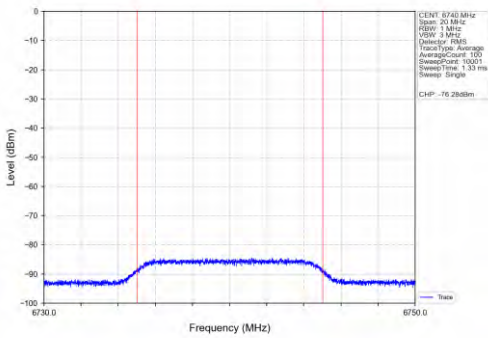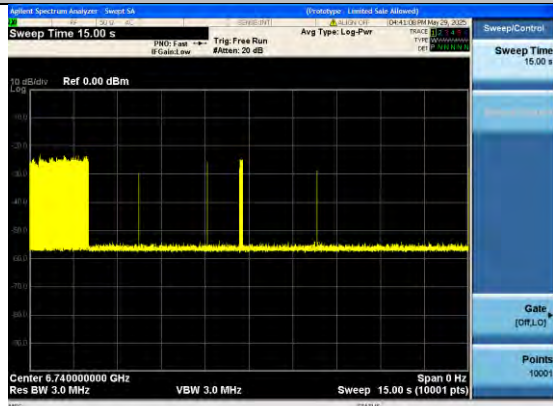Contention Based Protocol Result on U-NII 7 (AWGN Interference)	
802.11 ax (HE80) /6740MHz Threshold Level (TL)	802.11 ax (HE80) /6740MHz Test Result is pass due to no transmission occur.
	
802.11 ax (HE80) /6740MHz Threshold Level (TL)	802.11 ax (HE80) /6740MHz Transmission when the interferer is Minimal Operation
	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 110 of 122

Contention Based Protocol Result on U-NII 8 (AWGN Interference)			
802.11 ax (HE20) /6995MHz Threshold Level (TL)		802.11 ax (HE20) /6995MHz Test Result is pass due to no transmission occur.	
802.11 ax (HE20) /6995MHz Threshold Level (TL)		802.11 ax (HE20) /6995MHz Transmission when the interferer is Minimal Operation	



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 111 of 122

Contention Based Protocol Result on U-NII 8 (AWGN Interference)


802.11 ax (HE80) /6990MHz
Threshold Level (TL)

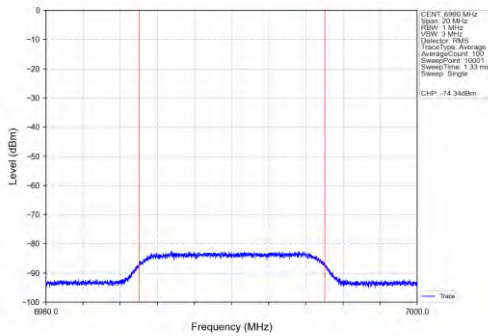


802.11 ax (HE80) /6990MHz
Test Result is pass due to no transmission occur.

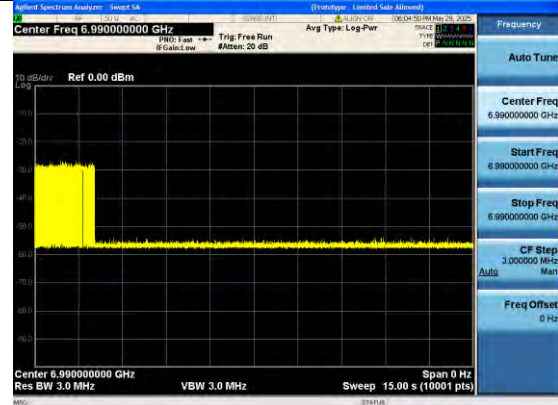

802.11 ax (HE80) /6990MHz
Threshold Level (TL)

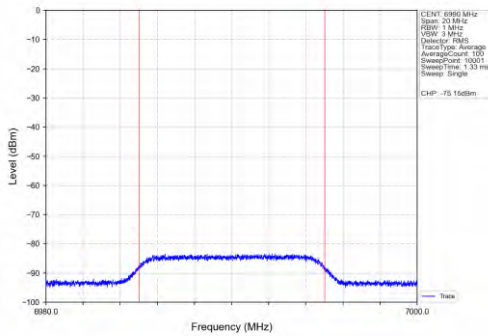

802.11 ax (HE80) /6990MHz
Transmission when the interferer is Minimal
Operation

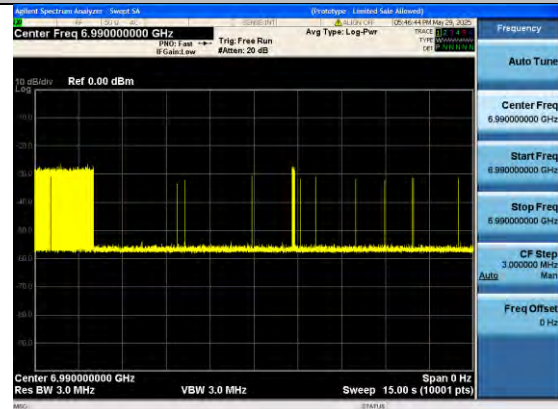



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01


Page: 112 of 122

Contention Based Protocol Result on U-NII 8 (AWGN Interference)


802.11 ax (HE80) /7025MHz
Threshold Level (TL)

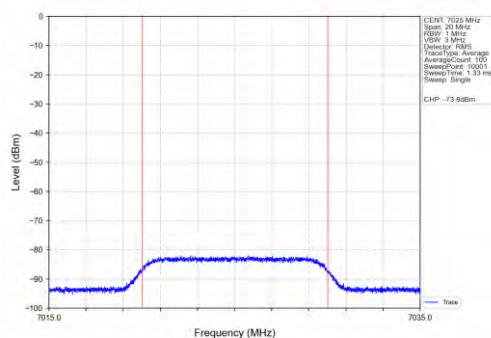


802.11 ax (HE80) /7025MHz
Test Result is pass due to no transmission occur.

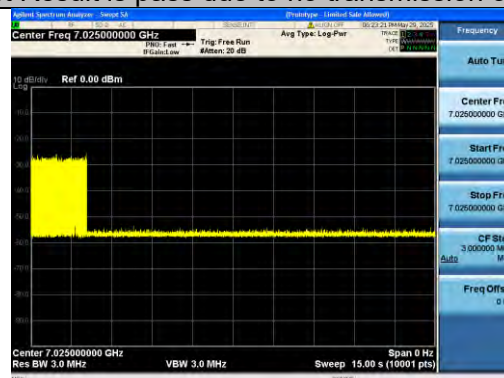

802.11 ax (HE80) /7025MHz
Threshold Level (TL)

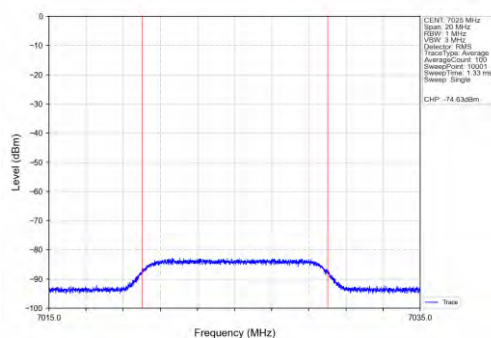

802.11 ax (HE80) /7025MHz
Transmission when the interferer is Minimal
Operation

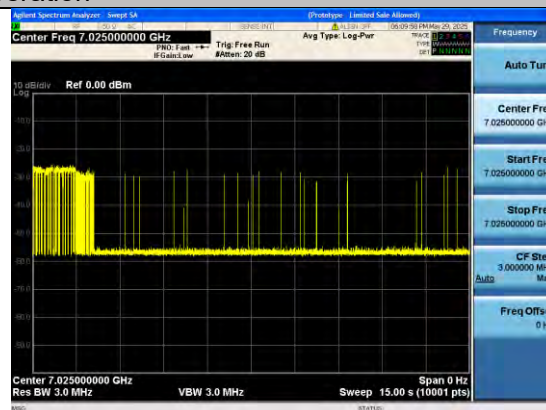



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506
Rev.: 01
Page: 113 of 122

Contention Based Protocol Result on U-NII 8 (AWGN Interference)	
802.11 ax (HE80) /7060MHz Threshold Level (TL)	802.11 ax (HE80) /7060MHz Test Result is pass due to no transmission occur.
802.11 ax (HE80) /7060MHz Threshold Level (TL)	802.11 ax (HE80) /7060MHz Transmission when the interferer is Minimal Operation



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 114 of 122

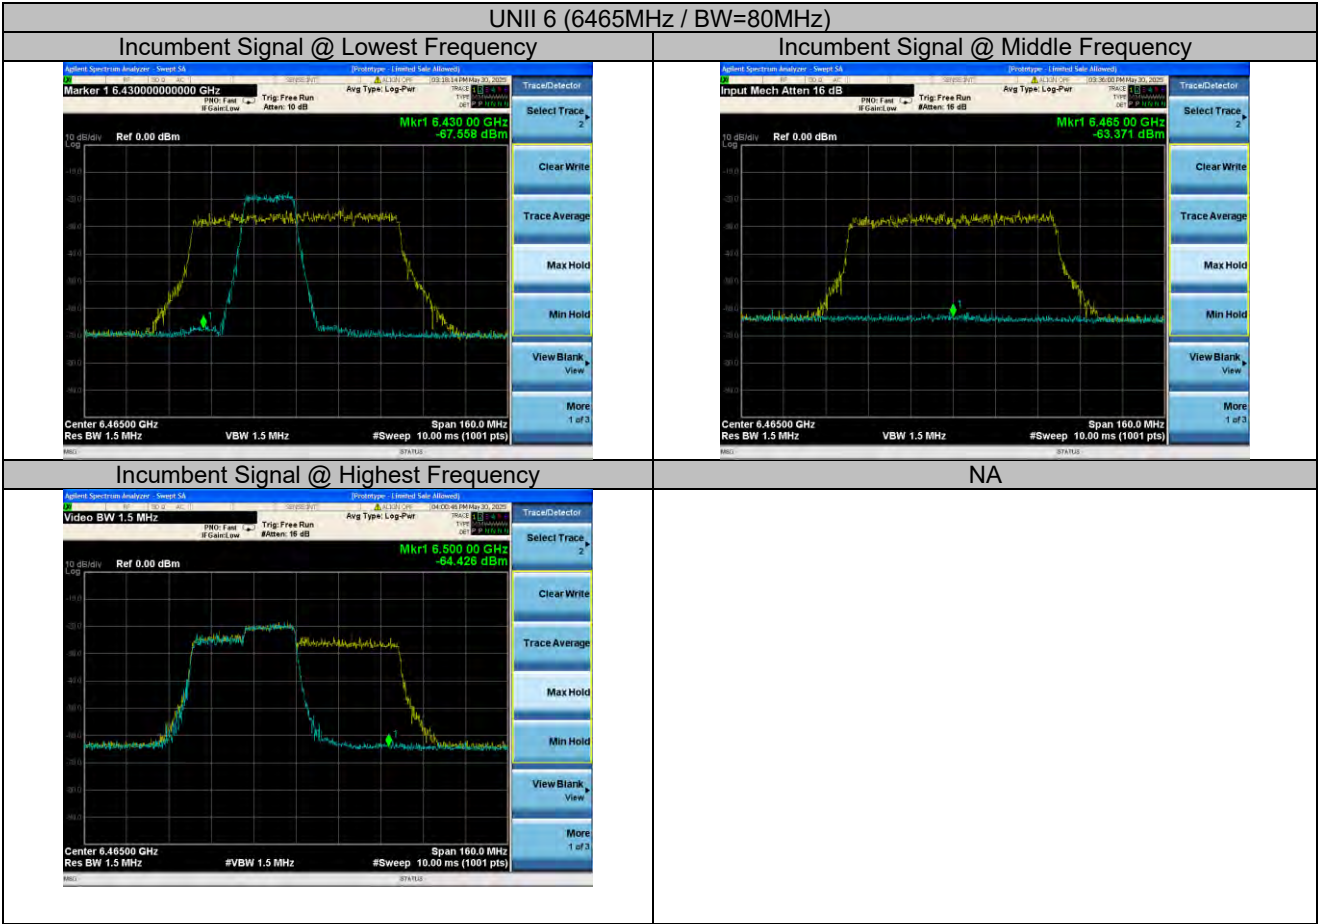

Note: The device does not support channel puncturing for CBP mode, the CBP mode empty channel reduction mechanism to protect incumbent operations.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506


Rev.: 01

Page: 115 of 122

Radiated Spurious Emissions

Radiated emission below 1GHz

Worst case Mode: 11ax40 MIMO_Channel 227

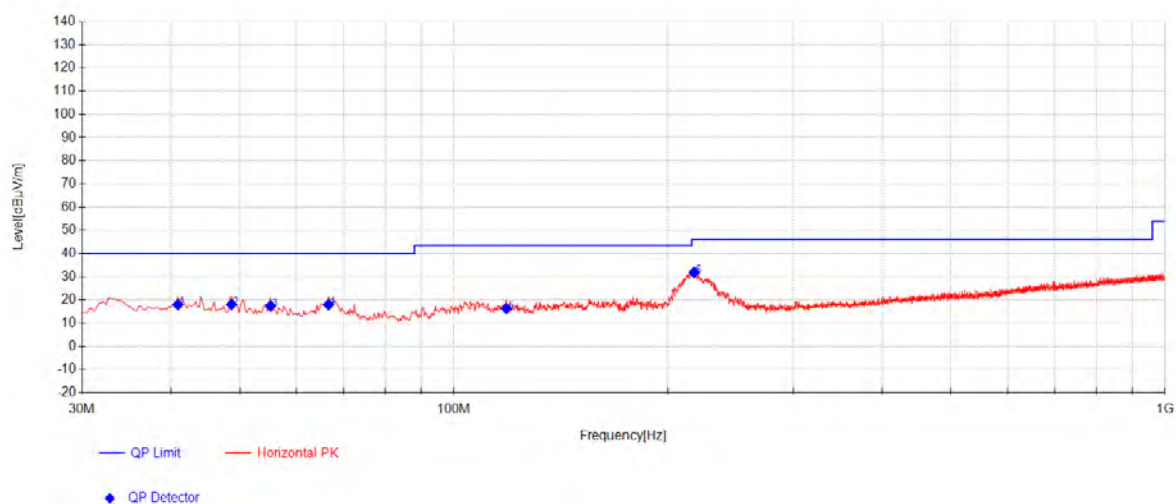

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	40.9125	33.05	-33.84	18.80	18.01	40.00	21.99	Horizontal
2	48.6725	32.96	-33.71	18.80	18.05	40.00	21.95	Horizontal
3	55.22	32.86	-33.62	18.20	17.44	40.00	22.56	Horizontal
4	66.6175	34.28	-33.47	17.18	17.99	40.00	22.01	Horizontal
5	118.5125	32.65	-32.93	16.55	16.28	43.50	27.22	Horizontal
6	217.695	48.35	-32.14	15.71	31.91	46.00	14.09	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 116 of 122

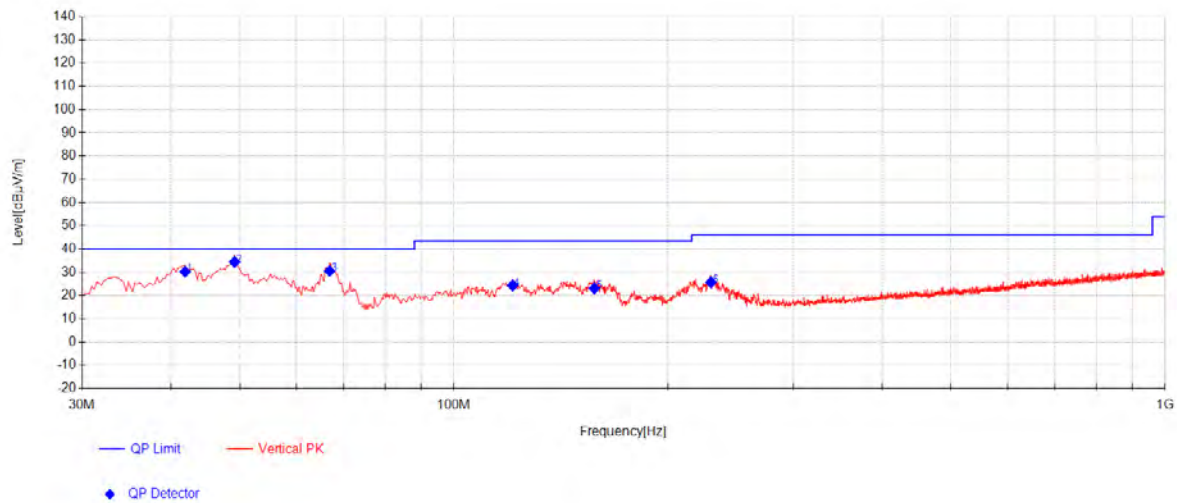

Final Data List

NO.	Frequency [MHz]	Reading [dBμV]	Factor [dB]	AF [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity
1	41.8825	45.35	-33.83	18.71	30.23	40.00	9.77	Vertical
2	49.1575	49.38	-33.70	18.77	34.44	40.00	5.56	Vertical
3	66.86	46.89	-33.46	17.13	30.56	40.00	9.44	Vertical
4	120.9375	40.05	-32.91	17.18	24.32	43.50	19.18	Vertical
5	157.555	36.57	-32.59	19.10	23.08	43.50	20.42	Vertical
6	229.82	41.28	-32.10	16.49	25.67	46.00	20.33	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
Value = Reading(dBμV) + AF(dB/m) + Factor(dB):
AF = Antenna Factor(dB/m)
Factor = Cable Factor(dB) - Preamplifier gain(dB)
Margin = Limit(dBμV/m) – Value(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01

Page: 117 of 122

Transmitter emission Above 1GHz

802.11ax40 MIMO_Channel 227

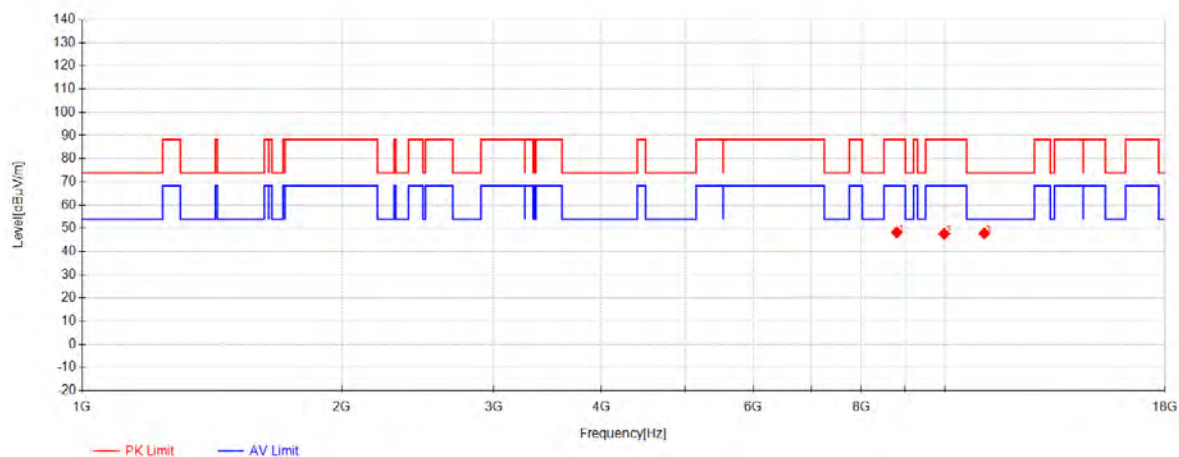

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8798	44.60	37.50	-33.90	48.20	88.30	40.10	Horizontal
2	9982.3333	41.58	37.89	-31.88	47.59	88.30	40.71	Horizontal
3	11109.3333	38.86	38.40	-29.47	47.79	74.00	26.21	Horizontal




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506

Rev.: 01

Page: 118 of 122

802.11ax40 MIMO_Channel 227

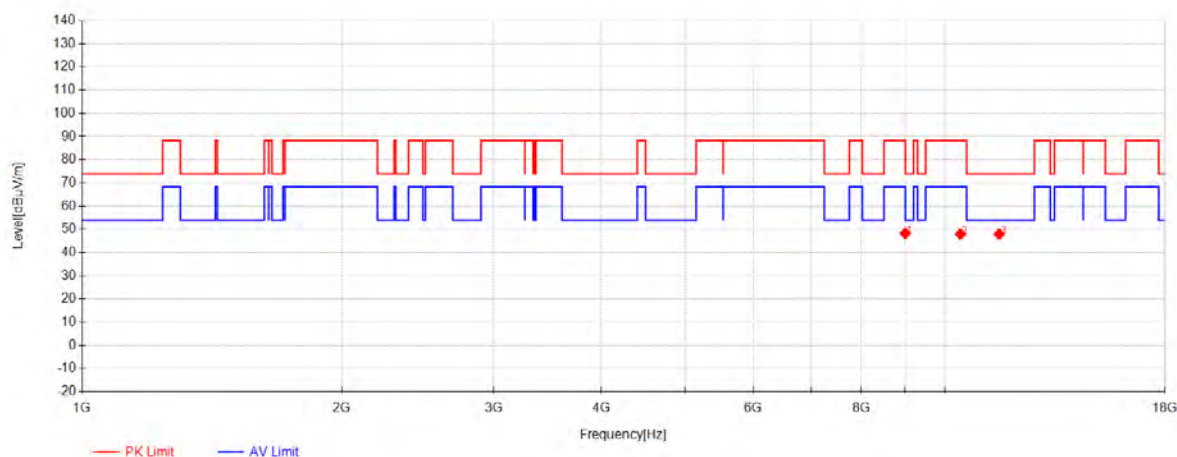

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	8998.3333	44.21	37.60	-33.58	48.23	88.30	40.07	Vertical
2	10423	40.51	38.11	-30.74	47.89	88.30	40.41	Vertical
3	11560	38.72	38.40	-29.21	47.91	74.00	26.09	Vertical

Remark:

- The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:
Level = Reading(dBμV) + AF(dB/m) + Factor(dB):
AF = Antenna Factor(dB/m)
Factor = Cable Factor(dB) - Preamplifier gain(dB)
Margin = Limit(dBμV/m) – Level(dBμV/m)
- All channels have been tested, but only the worst case data displayed in this report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250300025506

Rev.: 01

Page: 119 of 122

Restricted bands around fundamental frequency

802.11ax40 MIMO_Channel 227

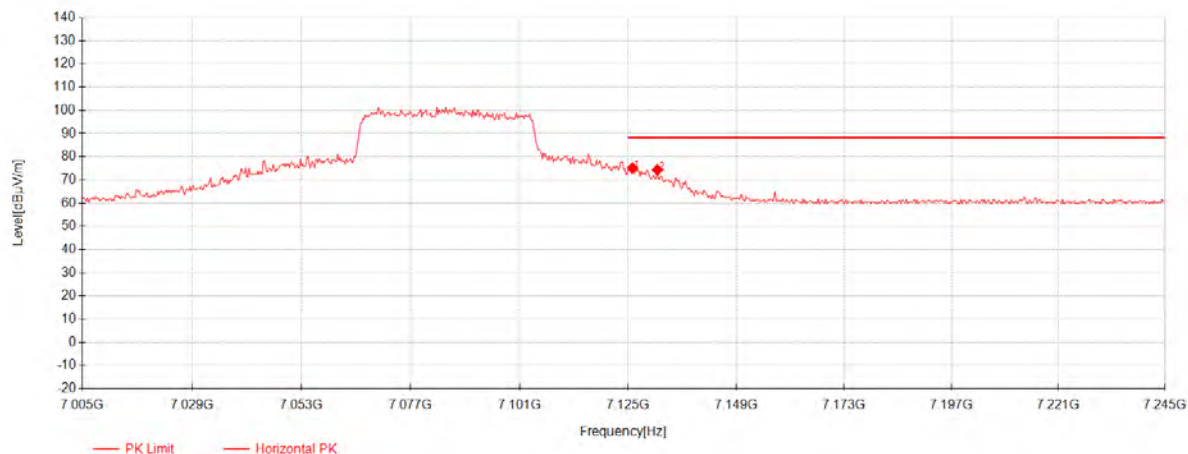


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125.96	53.41	36.15	-14.45	75.12	88.30	13.18	Horizontal
2	7131.48	52.57	36.16	-14.42	74.31	88.30	13.99	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 120 of 122

802.11ax40 MIMO_Channel 227

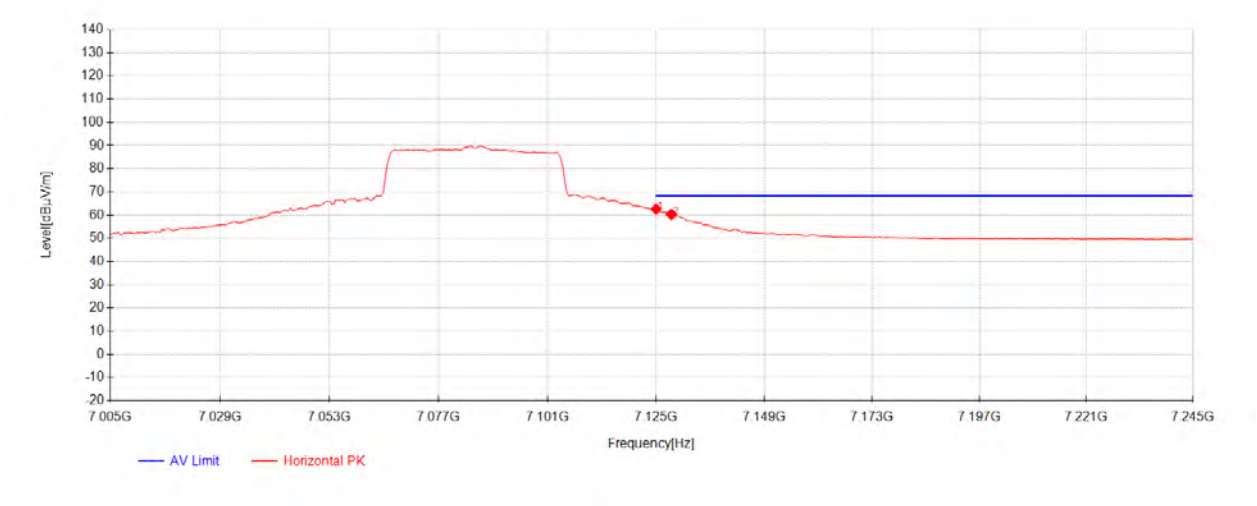


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7125	40.90	36.15	-14.45	62.60	68.30	5.70	Horizontal
2	7128.36	38.59	36.15	-14.44	60.31	68.30	7.99	Horizontal



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 121 of 122

802.11ax40 MIMO_Channel 227

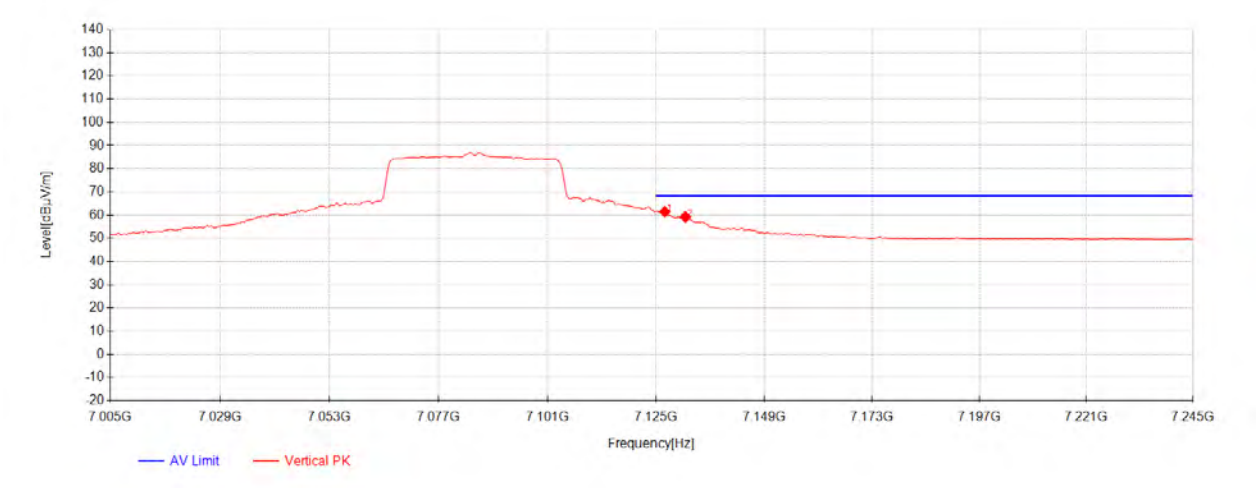


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7126.92	39.78	36.15	-14.44	61.49	68.30	6.81	Vertical
2	7131.48	37.45	36.16	-14.42	59.19	68.30	9.11	Vertical



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300025506
Rev.: 01
Page: 122 of 122

802.11ax40 MIMO_Channel 227

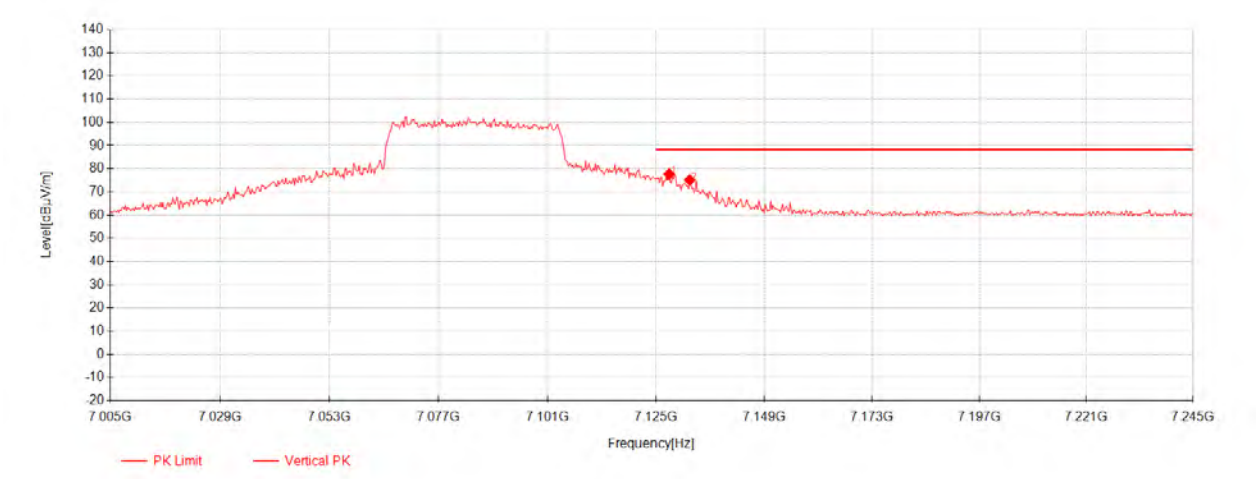

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	7127.88	55.95	36.15	-14.44	77.67	88.30	10.63	Vertical
2	7132.44	53.39	36.16	-14.42	75.13	88.30	13.17	Vertical

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier gain. The basic equation with a sample calculation is as follows:

Level = Reading(dBμV) + AF(dB/m) + Factor(dB):

AF = Antenna Factor(dB/m)

Factor = Cable Factor(dB) - Preamplifier gain(dB)

Margin = Limit(dBμV/m) – Level(dBμV/m)

---End of Report---