

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 1 of 92

FCC SAR TEST REPORT

Application No.: SUCR2505000405IT
Applicant: Shanghai Sunmi Technology Co.,Ltd.
Manufacturer: Shanghai Sunmi Technology Co.,Ltd.
Product Name: Wireless Data Terminal
Model No.(EUT): TF41B
Trade Mark: SUNMI
FCC ID: 2AH25M3L
Standards: FCC 47CFR §2.1093
Date of Receipt: 2025-05-09
Date of Test: 2025-05-18 to 2025-06-03
Date of Issue: 2025-06-23
Test conclusion: **PASS ***

* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 2 of 92

Revision Record			
Version	Description	Date	Remark
01	Original	2025/06/23	/

Authorized for issue by:		
Prepared By		Leon Liu Leon Liu/ Project Manager
Approved By		Nick Hu Nick Hu/ Technical Manager

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 3 of 92

TEST SUMMARY

Frequency Band	Maximum Reported SAR(W/kg)	
	Body	Product specific 10g SAR
GSM850	0.83	/
GSM1900	1.10	/
WCDMA Band II	0.59	/
WCDMA Band IV	1.00	/
WCDMA Band V	0.73	/
LTE Band 7	0.88	/
LTE Band 12(17)	0.59	/
LTE Band 13	0.62	/
LTE Band 25(2)	0.60	/
LTE Band 26(5)	0.53	/
LTE Band 30	0.63	/
LTE Band 41(38)	1.10	/
LTE Band 66(4)	1.08	/
LTE Band 71	0.77	/
WI-FI (2.4GHz)	1.01	/
WI-FI (5GHz)	0.98	/
WI-FI (6GHz)	0.79	/
BT	0.74	/
NFC	/	<0.10
SAR Limited(W/kg)	1.6	4.0
Maximum Simultaneous Transmission SAR (W/kg)		
Scenario	Body	Product specific 10g SAR
Sum SAR	1.59	<0.10
SPLSR	/	/
SPLSR Limited	0.04	0.10

Note: The Simultaneous transmission SAR is the same test position of the WWAN Antenna + WiFi/BT Antenna.

According to TCB workshop October,2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 2 (Frequency range:1850 - 1910 MHz)/LTE Band 4 (Frequency range:1710 - 1755 MHz)/LTE Band 5 (Frequency range:824 - 849 MHz)/ LTE band 17 (frequency range: 704-716 MHz)/LTE Band 38 (Frequency range:2570 - 2620 MHz) is respectively covered by LTE Band 25 (Frequency range:1850 - 1915 MHz)/LTE Band66 (Frequency range:1710 - 1780 MHz)/LTE Band26 (Frequency range:814 - 849 MHz)/LTE band 12 (frequency range: 699-716 MHz)/LTE Band41 (Frequency range:2496 - 2690 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth. Because the frequency range is similar, the maximum tuning limit is the same, and the channel bandwidth and other operating parameters for the smaller band is fully supported by the larger band.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 4 of 92

CONTENTS

1 GENERAL INFORMATION.....	6
1.1 Details of Client	6
1.2 Test Location.....	6
1.3 Test Facility	6
1.4 General Description of EUT	7
1.4.1 DUT Antenna Locations (Back View)	8
1.4.2 EUT side for SAR Testing.....	10
1.5 Test Specification	12
1.6 RF exposure limits.....	13
1.6.1 Power reduction specification	14
2 LABORATORY ENVIRONMENT.....	15
3 SAR MEASUREMENTS SYSTEM CONFIGURATION	16
3.1 The SAR Measurement System.....	16
3.2 Isotropic E-field Probe EX3DV4	18
3.3 Data Acquisition Electronics (DAE)	19
3.4 SAM Twin Phantom.....	19
3.5 ELI Phantom.....	20
3.6 Device Holder for Transmitters.....	21
3.7 Measurement procedure	22
3.7.1 Scanning procedure.....	22
3.7.2 Data Storage.....	24
3.7.3 Data Evaluation by SEMCAD	24
4 SAR MEASUREMENT VARIABILITY AND UNCERTAINTY	26
4.1 SAR measurement variability	26
4.2 SAR measurement uncertainty	26
5 DESCRIPTION OF TEST POSITION.....	27
5.1 Exposure Condition	27
5.1.1 The Body Test Position.....	27
5.2 Proximity Sensor Triggering Test.....	28
6 SAR SYSTEM VERIFICATION PROCEDURE.....	38
6.1 Tissue Simulate Liquid	38
6.1.1 Recipes for Tissue Simulate Liquid	38
6.1.2 Measurement for Tissue Simulate Liquid	39
6.2 SAR System Check.....	40
6.2.1 Justification for Extended SAR Dipole Calibrations	41
6.2.2 Summary System Check Result(s).....	42
6.2.3 Detailed System Check Results	42
7 TEST CONFIGURATION	43
7.1 Operation Configurations	43
7.1.1 GSM Test Configuration	43
7.1.2 WCDMA Test Configuration	43
7.1.3 WiFi Test Configuration	48
7.1.4 Duty cycle	48
7.1.5 LTE Test Configuration.....	57
8 TEST RESULT	60
8.1 Measurement of RF Conducted Power	60
8.2 Measurement of SAR Data	62
8.2.1 SAR Result of GSM850	63
8.2.2 SAR Result of GSM1900	64
8.2.3 SAR Result of WCDMA Band II	65
8.2.4 SAR Result of WCDMA Band IV	66



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 5 of 92

8.2.5 SAR Result of WCDMA Band V	67
8.2.6 SAR Result of LTE Band 7	68
8.2.7 SAR Result of LTE Band 12	69
8.2.8 SAR Result of LTE Band 13	70
8.2.9 SAR Result of LTE Band 25	71
8.2.10 SAR Result of LTE Band 26	72
8.2.11 SAR Result of LTE Band 30	73
8.2.12 SAR Result of LTE Band 41	74
8.2.13 SAR Result of LTE Band 66	76
8.2.14 SAR Result of LTE Band 71	78
8.2.15 SAR Result of WIFI 2.4G.....	79
8.2.16 SAR Result of WIFI 5G.....	80
8.2.17 SAR Result of WIFI 6G.....	82
8.2.18 SAR Result of BT.....	83
8.2.19 SAR Result of NFC.....	84
8.3 Multiple Transmitter Evaluation.....	85
8.3.1 Simultaneous SAR test evaluation	85
8.3.2 Simultaneous Transmission SAR Summation Scenario.....	86
9 EQUIPMENT LIST.....	90
10 CALIBRATION CERTIFICATE	92
11 PHOTOGRAPHS.....	92
APPENDIX A: DETAILED SYSTEM CHECK RESULTS.....	92
APPENDIX B: DETAILED TEST RESULTS	92
APPENDIX C: CALIBRATION CERTIFICATE.....	92
APPENDIX D: PHOTOGRAPHS	92
APPENDIX E: CONDUCTED RF OUTPUT POWER	92

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 6 of 92

1 General Information

1.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Zhang Alan; Liu Leon-I

1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 0031225543

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 7 of 92

1.4 General Description of EUT

Device Type :	portable device		
Exposure Category:	uncontrolled environment / general population		
Product Name:	Wireless Data Terminal		
Model No.(EUT):	TF41B		
Trade Mark:	SUNMI		
Product Phase:	Production Unit		
Hardware Version:	V1.2		
Software Version:	T602AA_EVT_14.0_SUNMI_202503131820.00-00		
IMEI:	861655070000087		
Device Operating Configurations :			
Modulation Mode:	GSM: GMSK, 8PSK; WCDMA: QPSK; LTE: QPSK,16QAM; WIFI: DSSS, OFDM, OFDMA; BT: GFSK, π /4DQPSK,8DPSK NFC: ASK		
Device Class:	B		
GPRS Multi-slots Class:	33	EGPRS Multi-slots Class:	33
HSDPA UE Category:	24	HSUPA UE Category	6
DC-HSDPA UE Category:	24		
Power Class	4,tested with power level 5(GSM850)		
	1,tested with power level 0(GSM1900)		
	3, tested with power control “all 1”(WCDMA Band)		
	3, tested with power control Max Power(LTE Band)		
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)
	GSM850	824 - 849	869 - 894
	GSM1900	1850 - 1910	1930 - 1990
	WCDMA Band II	1850 - 1910	1930 - 1990
	WCDMA Band IV	1710 - 1755	2110 - 2155
	WCDMA Band V	824 - 849	869 - 894
	LTE Band 2	1850 - 1910	1930 - 1990
	LTE Band 4	1710 - 1755	2110 - 2155
	LTE Band 5	824 - 849	869 - 894
	LTE Band 7	2500 - 2570	2620 - 2690
	LTE Band 12	699 - 716	729 - 746
	LTE Band 13	777 - 787	746 - 756
	LTE Band 17	704 - 716	734 - 746
	LTE Band 25	1850 - 1915	1930 - 1995
	LTE Band 26	814 - 849	859 - 894
	LTE Band 30	2305 - 2315	2350 - 2360
	LTE Band 66	1710 -1780	2110 - 2200
	LTE Band 71	663-698	617- 652
	LTE Band 38	2570 - 2620	2570 - 2620
	LTE Band 41	2496 - 2690	2496 - 2690
	Bluetooth	2400 - 2483.5	2400 - 2483.5
	Wi-Fi 2.4G	2412 - 2462	2412 - 2462
	Wi-Fi 5G	5150 - 5250	5150 - 5250
		5250 - 5350	5250 - 5350
		5470 - 5725	5470 - 5725
		5725 - 5850	5725 - 5850

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250500040509


Rev.: 01

Page: 8 of 92

	Wi-Fi 6E	5925 - 6425	5925 - 6425
		6425 - 6525	6425 - 6525
		6525 - 6875	6525 - 6875
		6875 - 7125	6875 - 7125
	NFC	13.56MHz	/
RF Cable:	☒ Provided by the applicant ☐ Provided by the laboratory		
Battery Information:	Model:	1ICP3/93/99-2	
	Normal Voltage:	3.87V	
	Rated capacity:	8000mAh	
	Manufacturer:	Guangdong Fenghua New Energy Co.,Ltd.	
Note: 1.Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion. 2.As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information. 3.The device does not support 802.11ax OFDMA Partial RU tones (26T, 52T, 106T, etc.)			

1.4.1 DUT Antenna Locations (Back View)

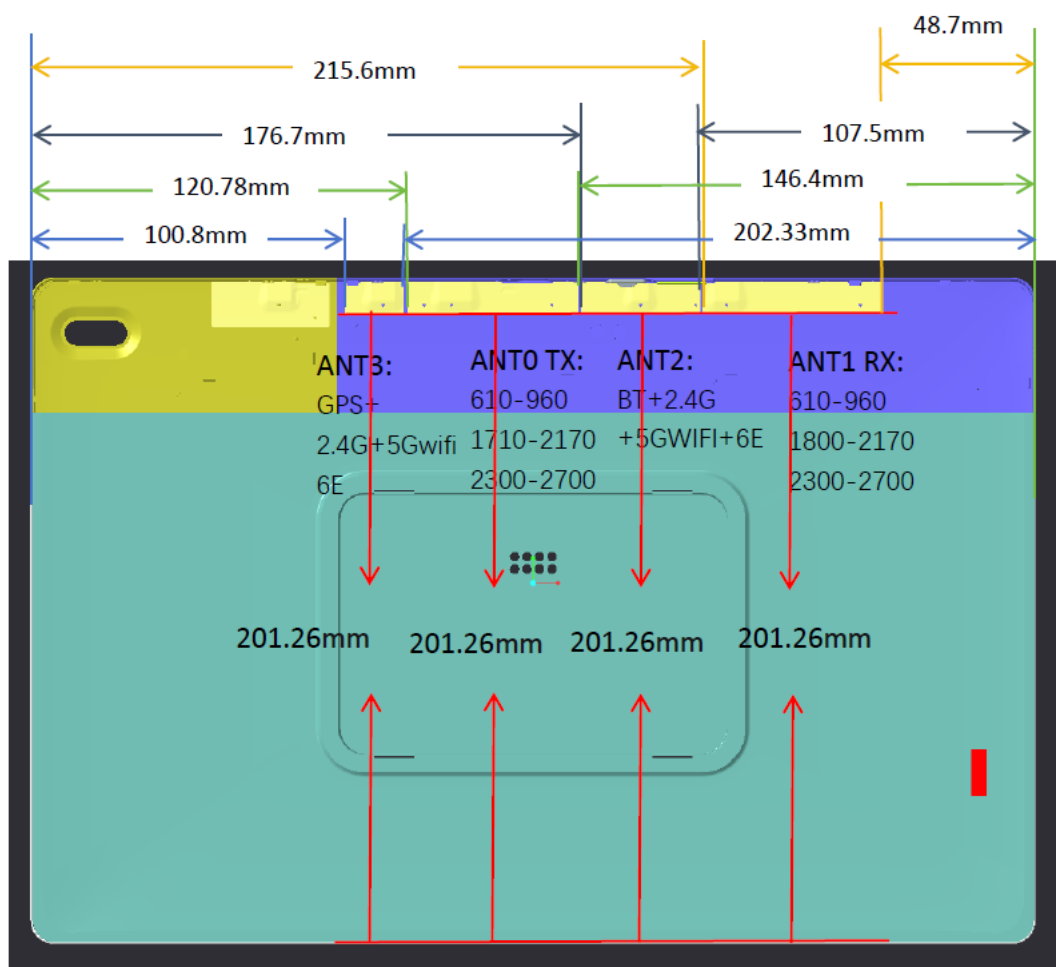

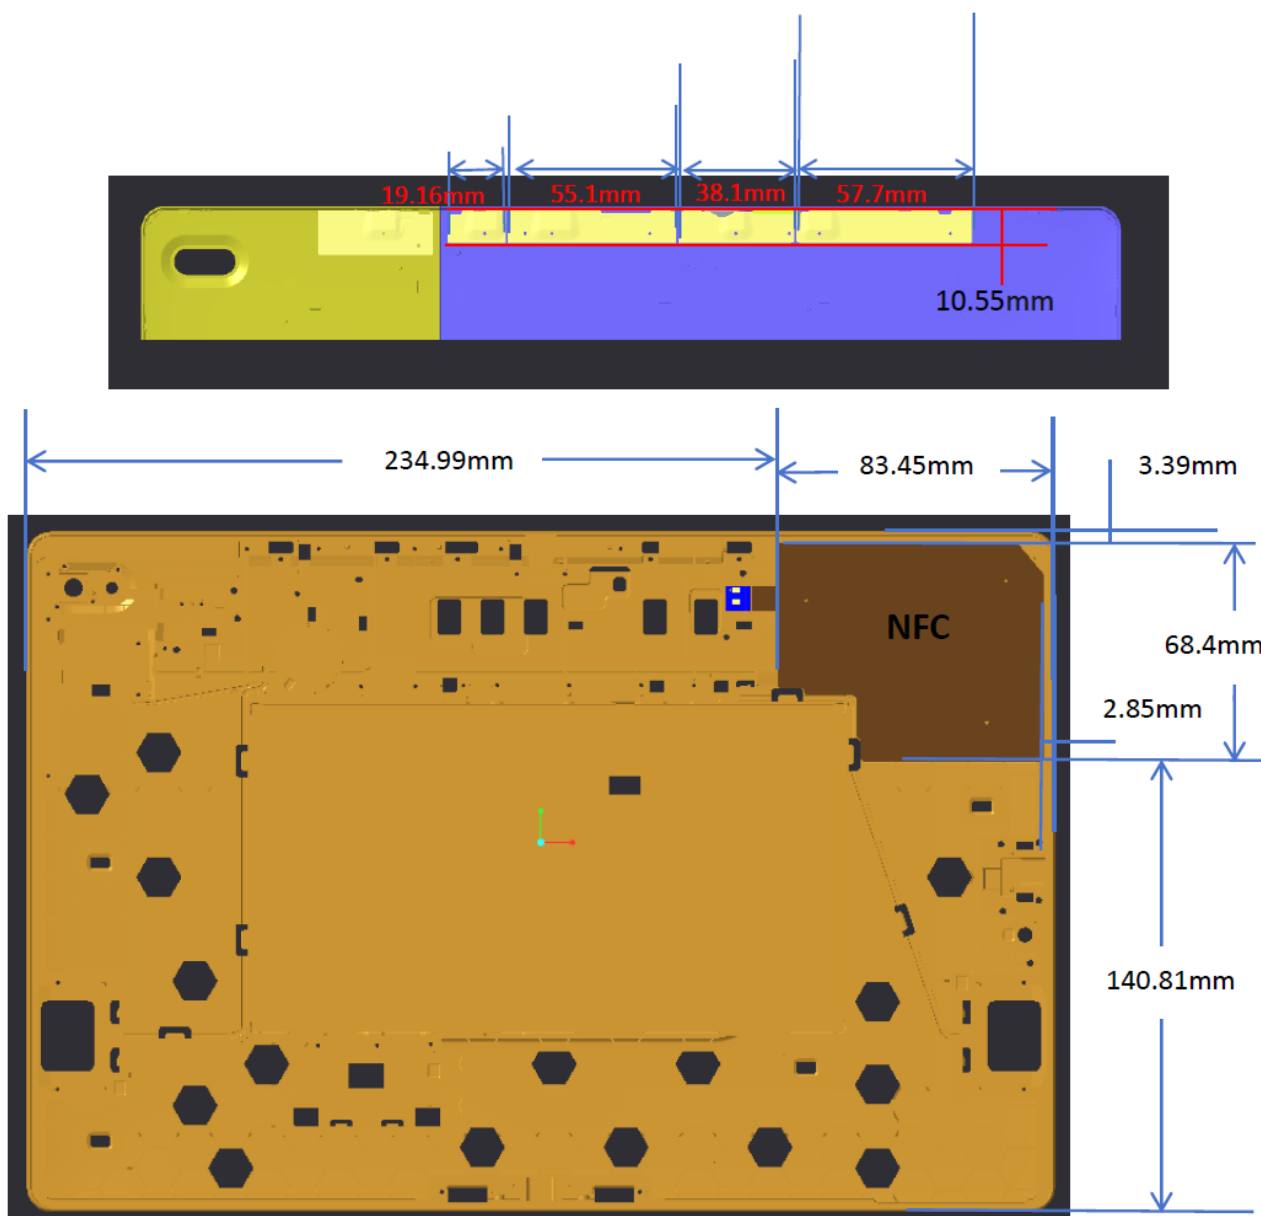

Ant	Band:
Ant0	GSM850/1900 WCDMA: B2/4/5 LTE: B2/4/5/7/12/13/17/25/26/30/66/71/38/41
Ant2	WIFI2.4G,WIFI5G,WIFI6G Bluetooth
Ant3	WIFI2.4G WIFI5G WIFI6G
Ant5	NFC

Note:

- 1) The test device is an android tablet. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens are generally not necessary.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 10 of 92

1.4.2 EUT side for SAR Testing

• Stand-alone SAR test evaluation

1) Per FCC KDB 447498 D01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\frac{[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}]}{3.0} \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$$

• $f(\text{GHz})$ is the RF channel transmit frequency in GHz

• Power and distance are rounded to the nearest mW and mm before calculation

• The result is rounded to one decimal place for comparison

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2) At 100 MHz to 6 GHz and for test separation distances > 50 mm, the SAR test exclusion threshold is determined according to the following:

a) [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · (f(MHz)/150)] mW, at 100 MHz to 1500 MHz

b) [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm) · 10] mW at > 1500 MHz and ≤ 6 GHz

Exposure Position	Wireless Interface	GPRS 850	GPRS 1900	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 17	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 30	LTE Band 7	LTE Band 38	LTE Band 41
	Calculated Frequency (MHz)	848	1909	846	1750	1907	695	715	784	713	848	848	1754	1779	1909	1914	2312	2567	2617	2687
	Maximum power (dBm)	31	28	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00
	Maximum rated power (mW)	1259.0	631.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0
Back side	Separation distance (mm)	5.0																		
	exclusion threshold	9.0	3.4	9.1	3.6	3.4	12.0	11.5	10.1	11.5	9.0	9.0	3.6	3.5	3.4	3.3	2.9	2.6	2.6	2.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Left side	Separation distance (mm)	120.8																		
	exclusion threshold	843.5	1204.9	842.2	1216.4	1205.0	738.0	752.2	800.2	750.8	843.5	843.5	1216.1	1214.2	1204.9	1204.6	1179.9	1166.4	1164.0	1160.6
	Testing required?	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Right side	Separation distance (mm)	146.4																		
	exclusion threshold	1109.4	1719.3	1107.3	1729.4	1719.4	946.7	968.4	1042.1	966.2	1109.4	1109.4	1729.2	1727.5	1719.3	1719.0	1697.1	1685.1	1682.9	1679.9
	Testing required?	Yes	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Top side	Separation distance (mm)	5.0																		
	exclusion threshold	9.0	3.4	9.1	3.6	3.4	12.0	11.5	10.1	11.5	9.0	9.0	3.6	3.5	3.4	3.3	2.9	2.6	2.6	2.5
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom side	Separation distance (mm)	201.3																		
	exclusion threshold	1729.9	3060.0	1725.8	3060.0	3060.0	1417.8	1458.6	1599.4	1454.5	1729.9	1729.9	3060.0	3060.0	3060.0	3060.0	3060.0	3060.0	3060.0	3060.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No

Table 1: Estimated SAR calculation for 2/3/4G

Note:

1) * - maximum possible output power declared by manufacturer



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 11 of 92

Exposure Position	Wireless Interface	BT ANT2	WIFI 2.4G ANT2	WIFI 5.2G ANT2	WIFI 5.3G ANT2	WIFI 5.5G ANT2	WIFI 5.8G ANT2	WIFI 6G ANT2	WIFI 2.4G ANT3	WIFI 5.2G ANT3	WIFI 5.3G ANT3	WIFI 5.5G ANT3	WIFI 5.8G ANT3	WIFI 6G ANT3
Exposure Position	Calculated Frequency (MHz)	2480	2462	5200	5300	5500	5825	6000	2462	5200	5300	5500	5825	6000
	Maximum power (dBm)	11	13	17	17	14	19	11	13	16	16	13	17	11
	Maximum rated power(mW)	13.0	20.0	50.0	50.0	25.0	79.0	13.0	20.0	40.0	40.0	20.0	50.0	13.0
Back side	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	2.7	2.7	1.5	1.5	1.4	1.4	1.4	2.7	1.5	1.5	1.4	1.4	1.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Left side	Separation distance(mm)	176.7	176.7	176.7	176.7	176.7	176.7	176.7	100.8	100.8	100.8	100.8	100.8	100.8
	exclusion threshold	2416.9	2417.4	2369.2	2368.0	2365.7	2362.0	1712.6	830.6	743.1	741.0	737.0	730.7	278.4
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Right side	Separation distance(mm)	107.5	107.5	107.5	107.5	107.5	107.5	107.5	202.3	202.3	202.3	202.3	202.3	202.3
	exclusion threshold	937.9	938.8	848.8	846.6	842.4	835.9	69.0	3060.0	3060.0	3060.0	3060.0	3060.0	1280.0
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No
Top side	Separation distance(mm)	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0
	exclusion threshold	2.7	2.7	1.5	1.5	1.4	1.4	1.4	2.7	1.5	1.5	1.4	1.4	1.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom side	Separation distance(mm)	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3	201.3
	exclusion threshold	3060.0	3060.0	3060.0	3060.0	3060.0	3060.0	1086.5	3060.0	3060.0	3060.0	3060.0	3060.0	1121.1
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No

Table 2: Estimated SAR calculation for WiFi and BT

Note:

1) * - maximum possible output power declared by manufacturer



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 12 of 92

1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices –Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 248227 D01	SAR Guidance for IEEE 802.11 Wi-Fi SAR v02r02
KDB 447498 D01	General RF Exposure Guidance v06
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR for laptop and tablets v01r02

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 13 of 92

1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
Spatial Peak SAR* (Brain*Trunk)	1.60 mW/g	8.00 mW/g
Spatial Average SAR** (Whole Body)	0.08 mW/g	0.40 mW/g
Spatial Peak SAR*** (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

Notes:

* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

** The Spatial Average value of the SAR averaged over the whole body.

*** The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 14 of 92

1.6.1 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation

- 1) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction
- 2) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance (Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217).

The detailed power reduction information can be referred to Appendix E.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 15 of 92

2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards.	
Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 3: The Ambient Conditions

3 SAR Measurements System Configuration

3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation $SAR = \sigma (|E|^2) / \rho$ where σ and ρ are the conductivity and mass density of the tissue-Simulate.


The DASY system for performing compliance tests consists of the following items:


A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

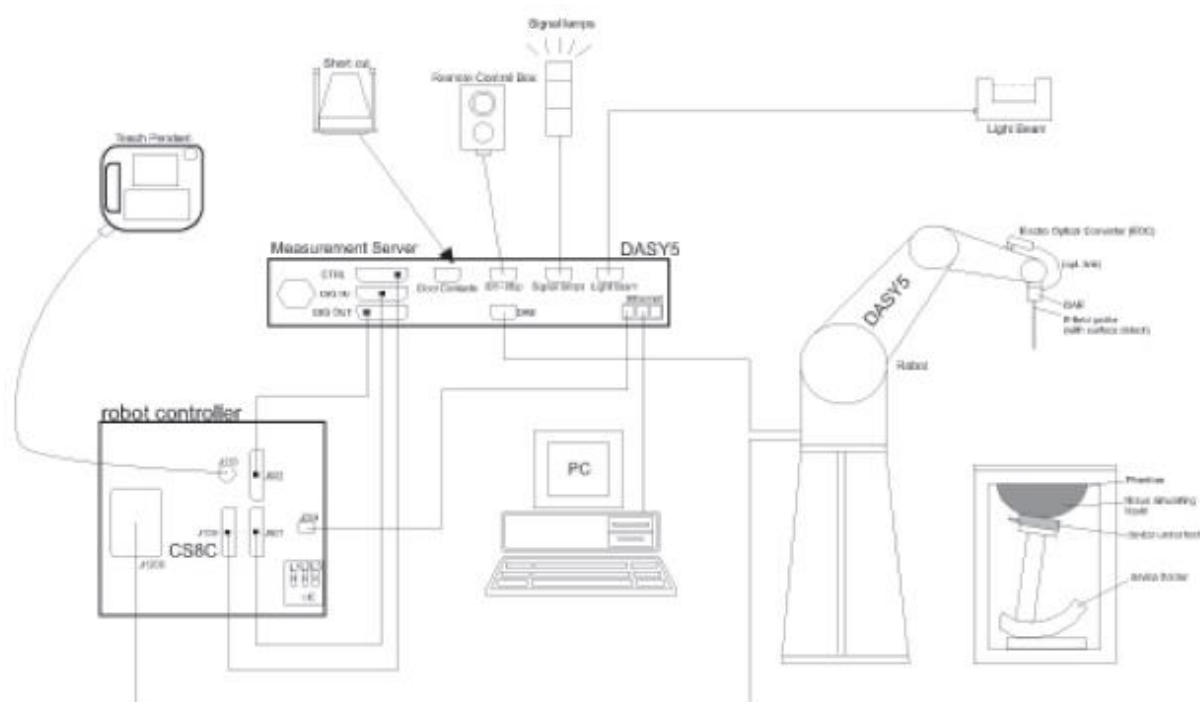

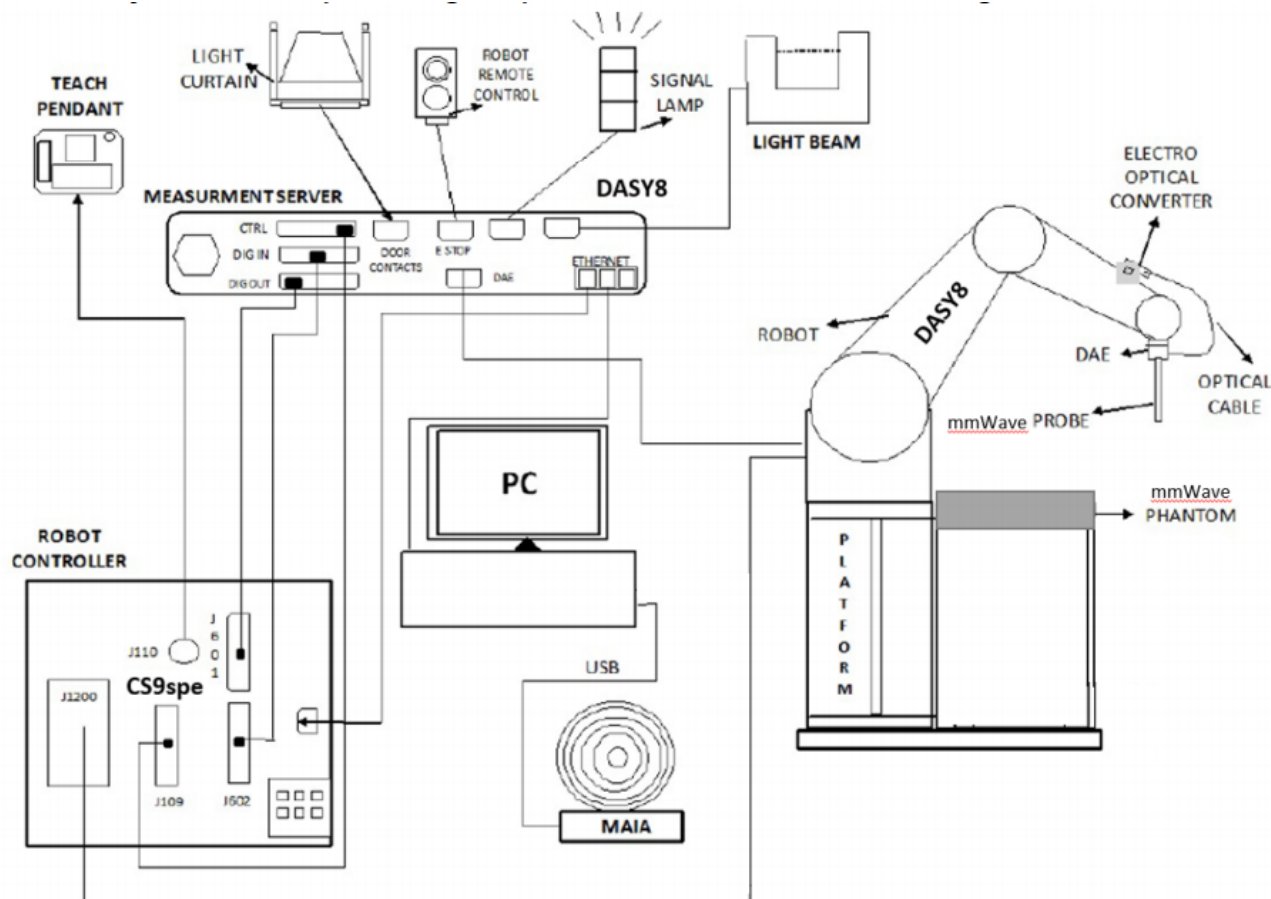

F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509


Rev.: 01

Page: 18 of 92

3.2 Isotropic E-field Probe EX3DV4

	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Calibration	ISO/IEC 17025 calibration service available.
Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μW/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μW/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY52 SAR and higher, EASY4/MRI

3.3 Data Acquisition Electronics (DAE)

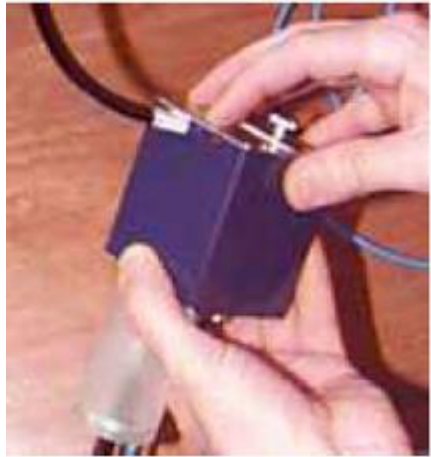Model	DAE	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
Input Offset Voltage	< 5μV (with auto zero)	
Input Bias Current	< 50 f A	
Dimensions	60 x 60 x 68 mm	

3.4 SAM Twin Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions (incl. Wooden Support)	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	
Wooden Support	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 20 of 92

3.5 ELI Phantom

Material	Vinylester, glass fiber reinforced (VE-GF)	
Liquid Compatibility	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	
Wooden Support	SPEAG standard phantom table	

Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEEE 1528 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.

3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon=3$ and loss tangent $\delta=0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

3.7 Measurement procedure

3.7.1 Scanning procedure

Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm*15mm or 12mm*12mm or 10mm*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

Step 3: Zoom scan

Around this point, a volume of 32mm*32mm*30mm ($f \leq 2\text{GHz}$), 30mm*30mm*30mm (f for 2-3GHz) and 24mm*24mm*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points ($f \leq 2\text{GHz}$), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straight-forward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 23 of 92

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max ± 5 %.

3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension “.DAE4”. The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm²], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	Dcpi	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	ε
- Density	ρ	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot cf / dcp_i$$

With V_i = compensated signal of channel i ($i = x, y, z$)

U_i = input signal of channel i ($i = x, y, z$)

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 25 of 92

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / \text{Norm}_i \cdot \text{ConvF})^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2) / f$$

With V_i = compensated signal of channel i ($i = x, y, z$)

Norm_i = sensor sensitivity of channel i ($i = x, y, z$)

[mV/(V/m)²] for E-field Probes

ConvF = sensitivity enhancement in solution

a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E_i = electric field strength of channel i in V/m

H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ϵ = equivalent tissue density in g/cm³

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P_{pwe} = equivalent power density of a plane wave in mW/cm²

E_{tot} = total electric field strength in V/m

H_{tot} = total magnetic field strength in A/m

4 SAR measurement variability and uncertainty

4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

4.2 SAR measurement uncertainty


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

5 Description of Test Position

5.1 Exposure Condition

5.1.1 The Body Test Position

The overall diagonal dimension of the display section of a tablet is > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens is generally not necessary. The SAR Exclusion Threshold in KDB 447498 D01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

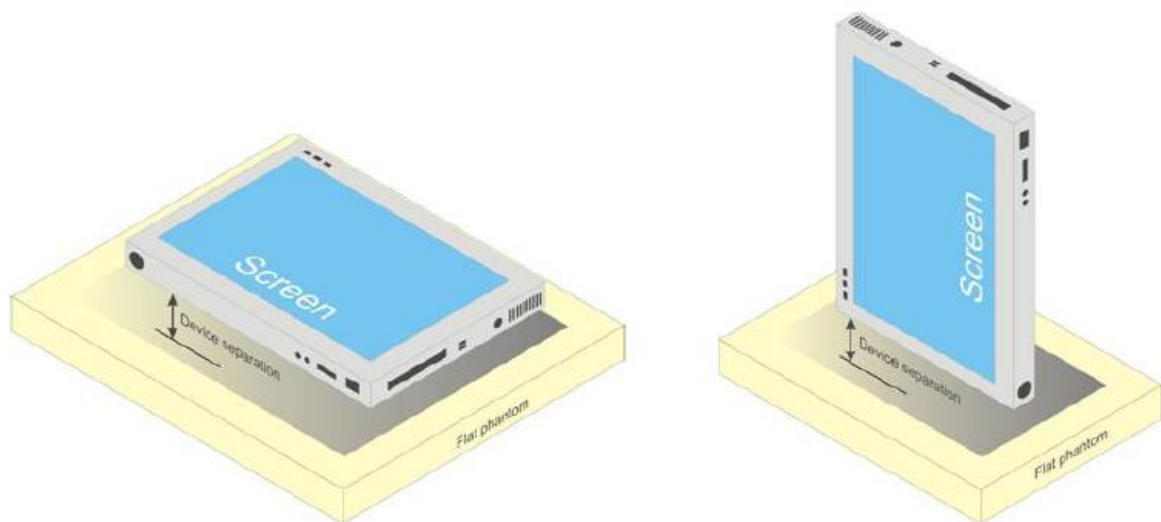


F-3. Tablet form factor portable computer.

5.2 Proximity Sensor Triggering Test

Proximity sensor triggering distances:

The Proximity sensor triggering was applied to WWAN antenna. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

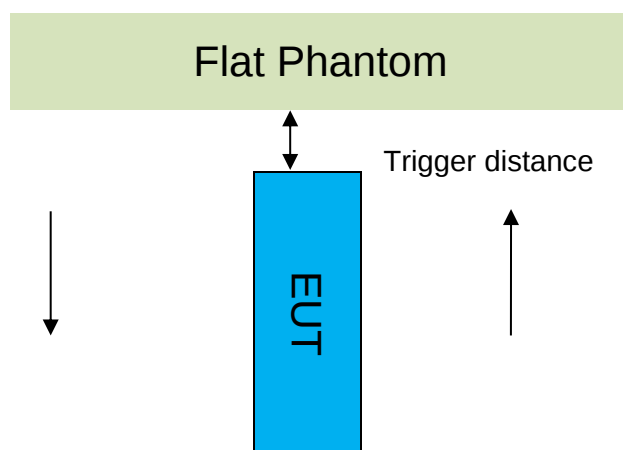



Proximity Sensor Triggering Distance(mm)		
Ant.0		
Position	Back side	Top side
Minimum	33	40
Required SAR Test	21	23
An.2		
Position	Back side	Top side
Minimum	19	21
Required SAR Test	18	20
Ant.3		
Position	Back side	Top side
Minimum	25	26
Required SAR Test	24	25

Note:


SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

● Ant 0 DUT Moving Toward (Trigger)the Phantom

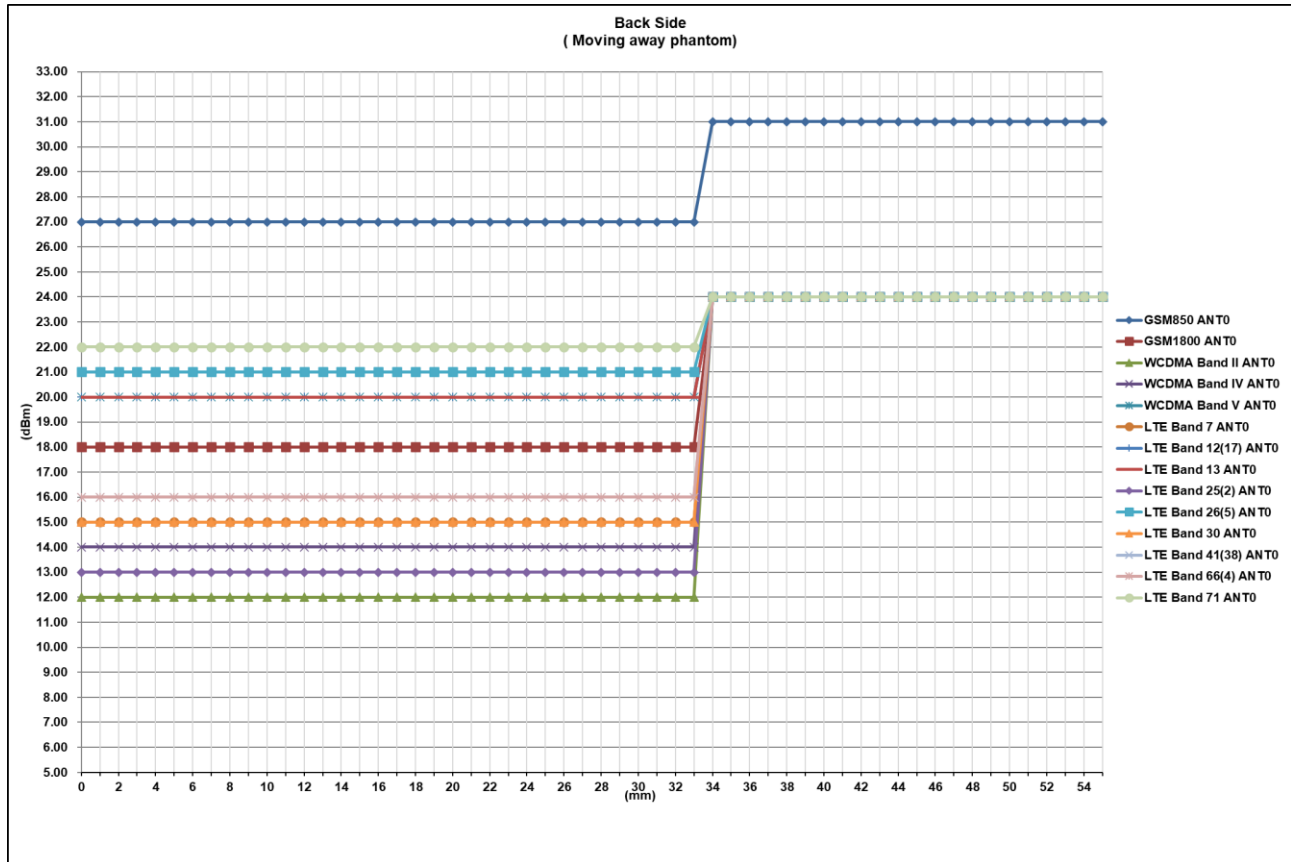

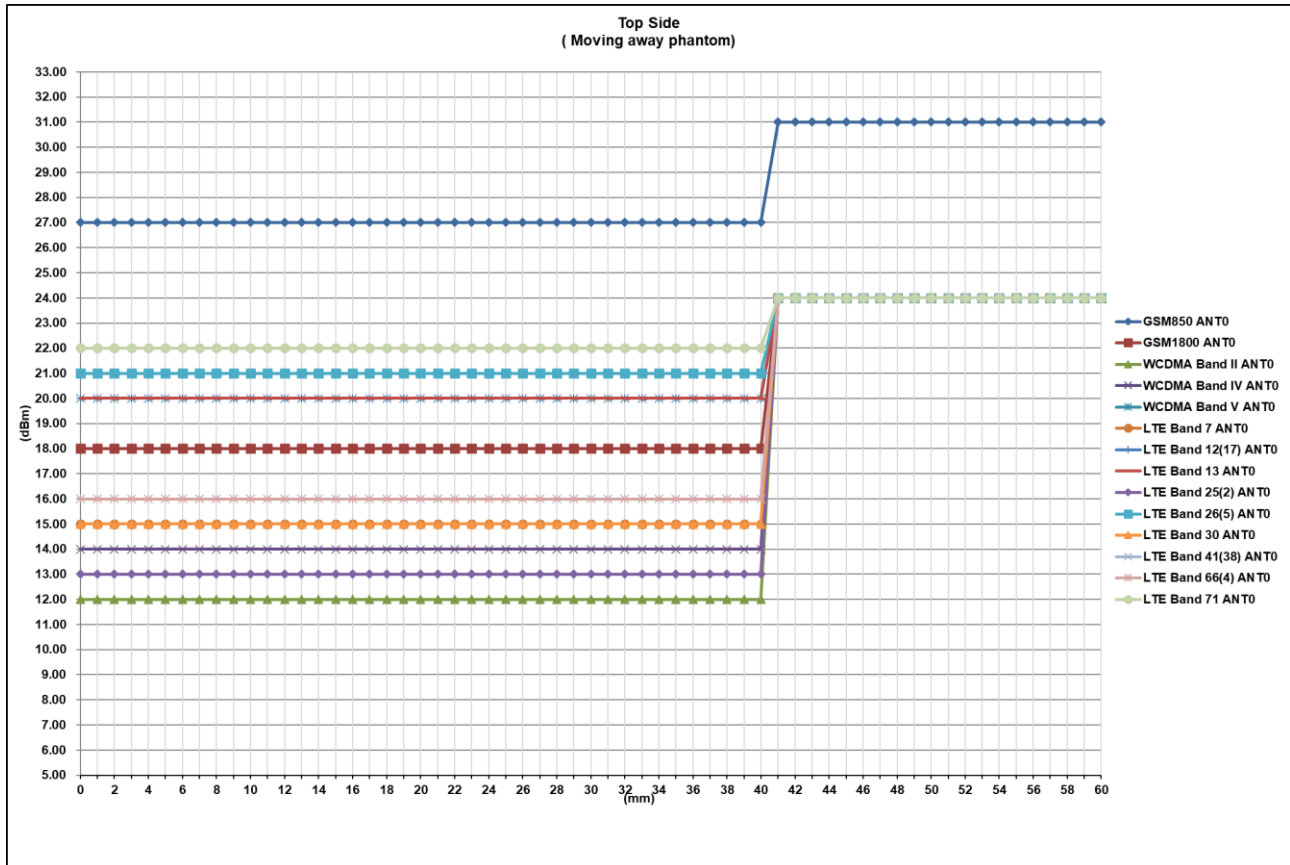

● Ant 0 DUT Moving Away (Release) from the Phantom

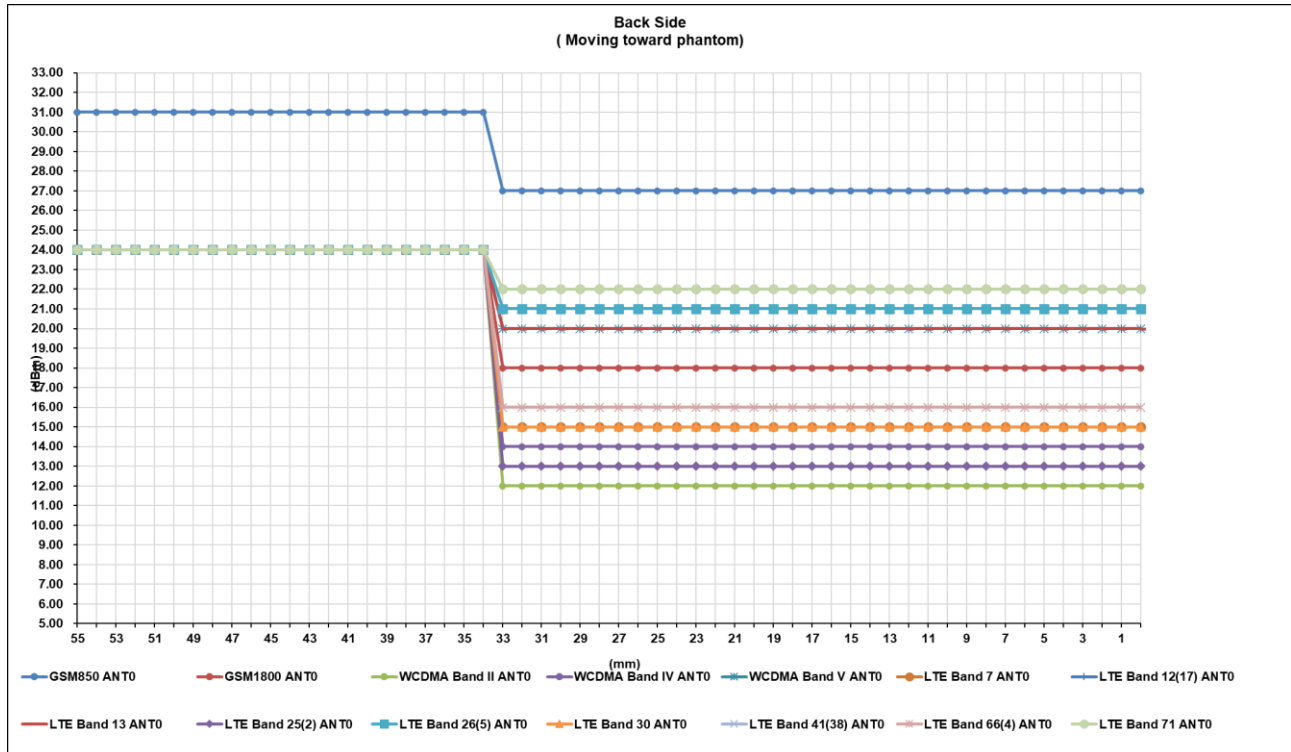


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250500040509


Rev.: 01

Page: 33 of 92

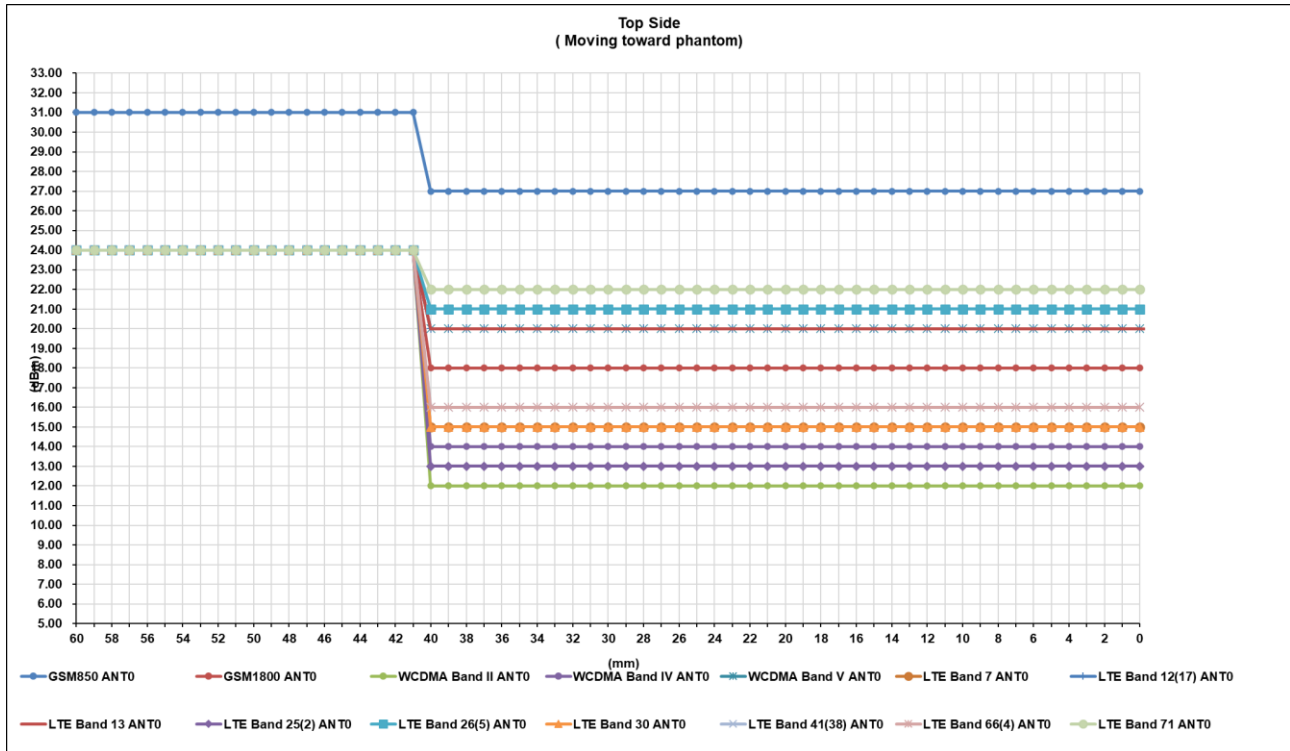


● Ant 2 DUT Moving Toward (Trigger)the Phantom

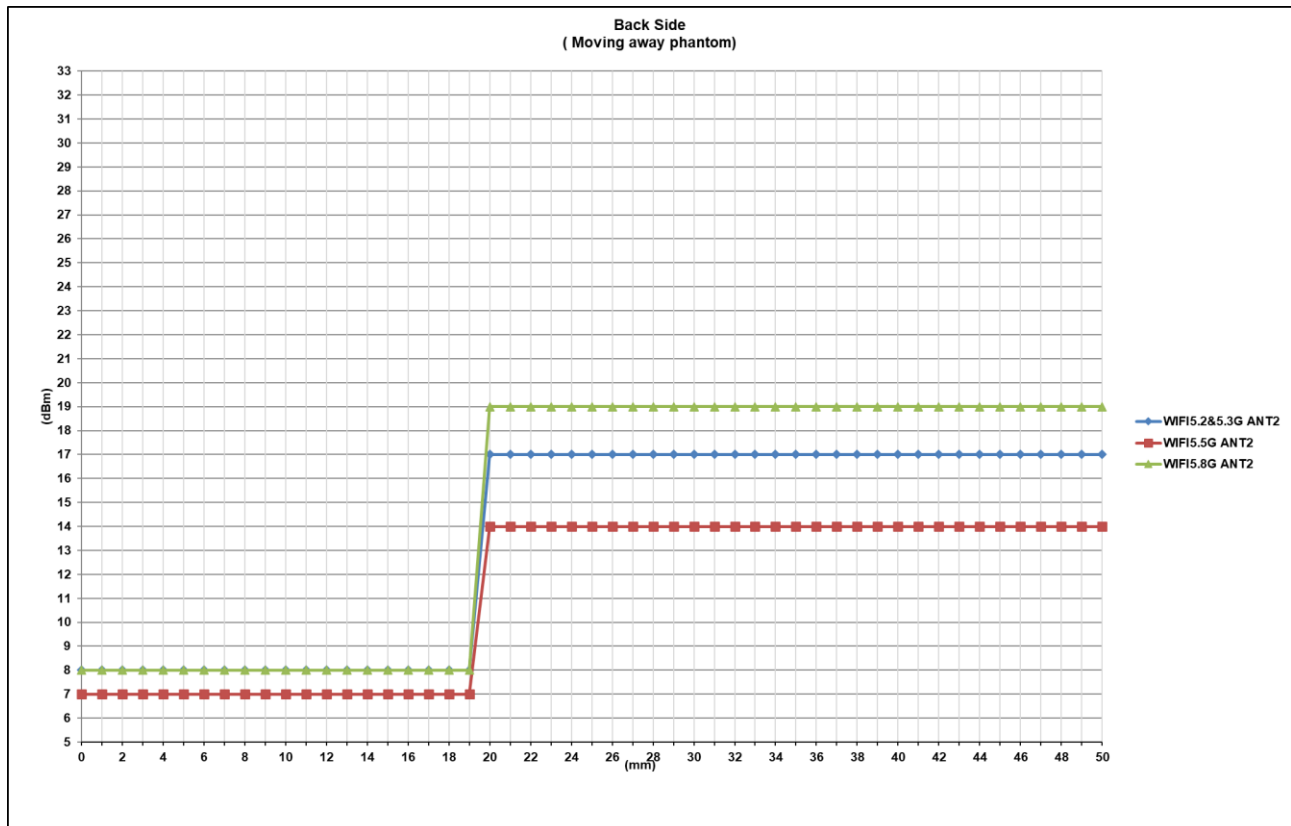

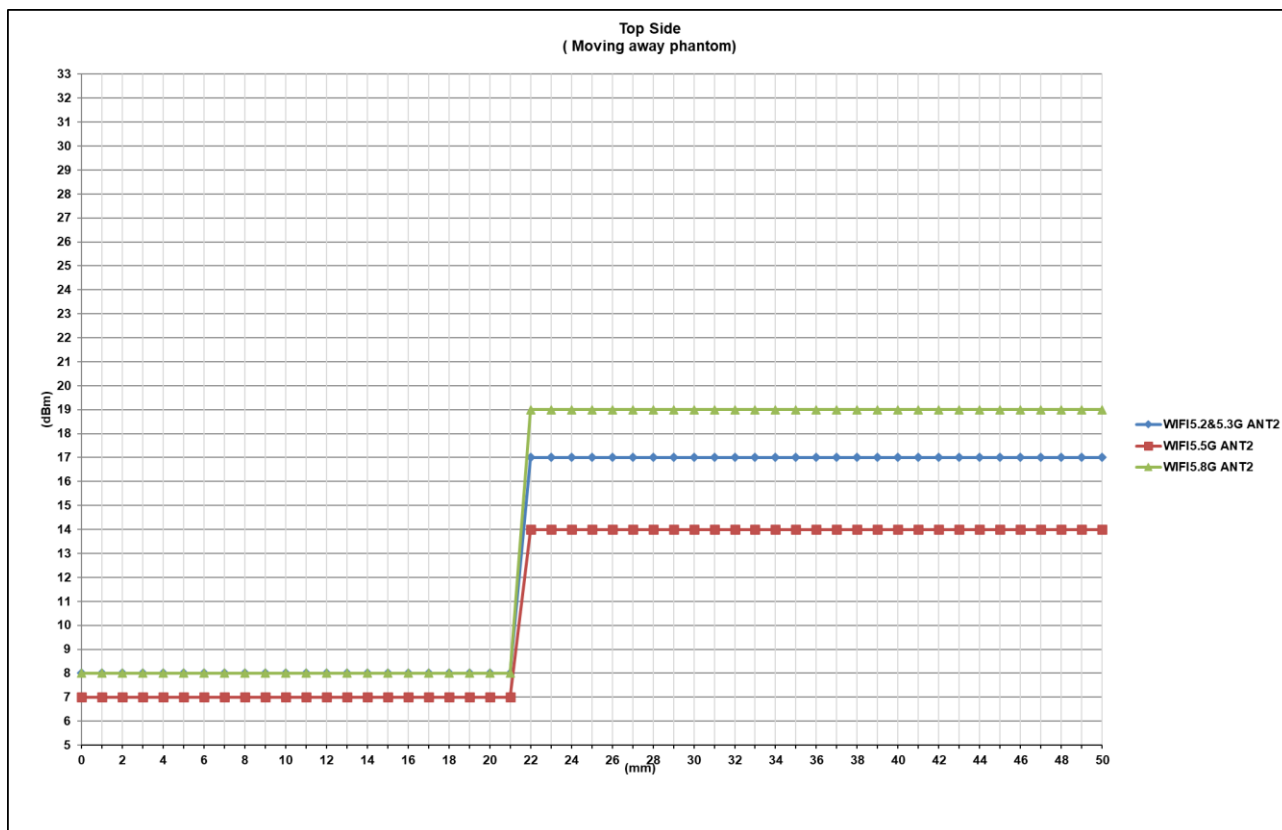

● Ant 2 DUT Moving Away (Release) from the Phantom

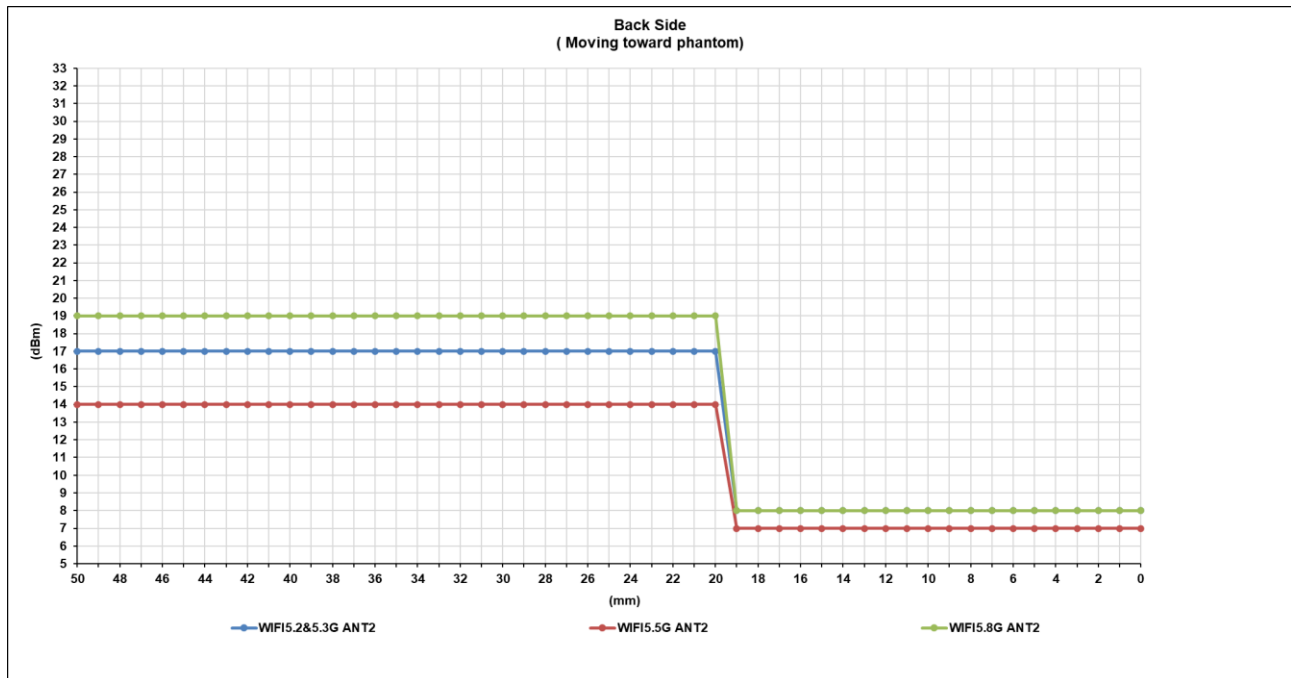


SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 37 of 92

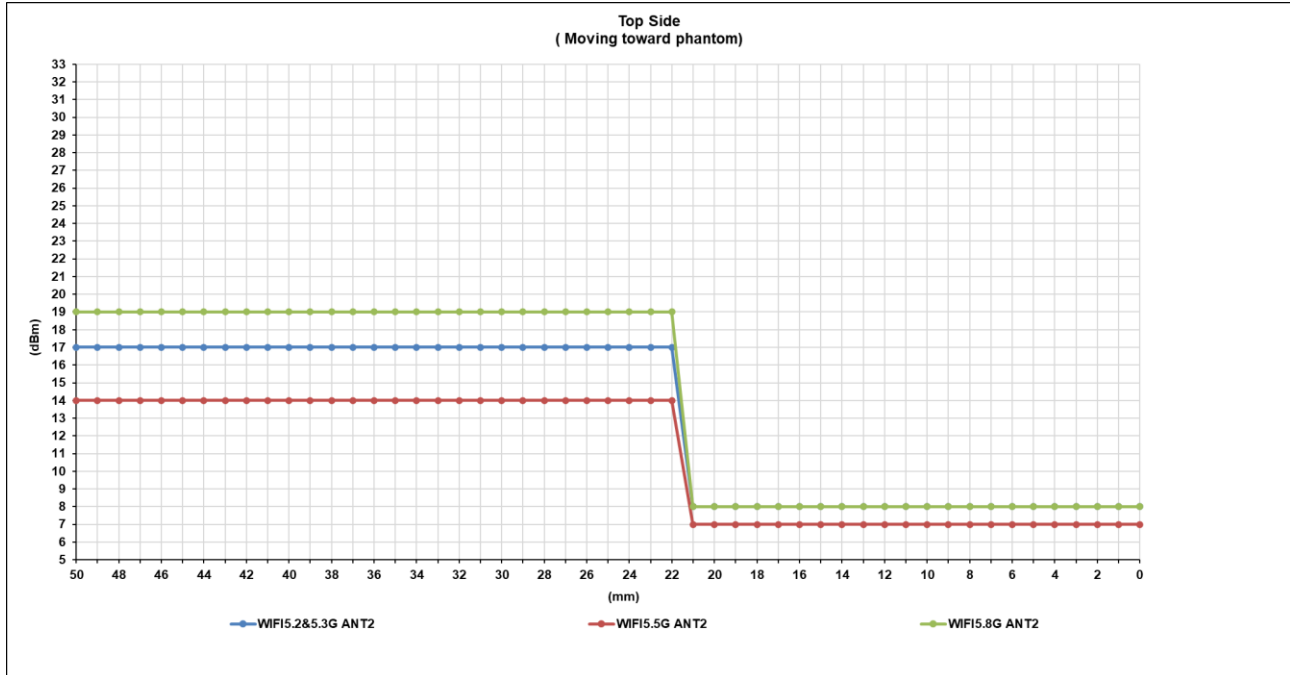

6 SAR System Verification Procedure

6.1 Tissue Simulate Liquid

6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)				
	450	700-900	1750-2000	2300-2500	2500-2700
Water	38.56	40.30	55.24	55.00	54.92
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23
Sucrose	56.32	57.90	0	0	0
HEC	0.98	0.24	0	0	0
Bactericide	0.19	0.18	0	0	0
Tween	0	0	44.45	44.80	44.85
Salt: 99+% Pure Sodium Chloride Sucrose: 98+% Pure Sucrose Water: De-ionized, 16 MΩ ⁺ resistivity HEC: Hydroxyethyl Cellulose Tween: Polyoxyethylene (20) sorbitan monolaurate					
HSL13MHz is composed of the following ingredients: Water: 50-90% Non-ionic detergents: 5-50% NaCl: 0-2% Preservative: 0.03-0.1% HSL5GHz is composed of the following ingredients: Water: 50-65% Mineral oil: 10-30% Emulsifiers: 8-25% Sodium salt: 0-1.5%					

Table 4: Recipe of Tissue Simulate Liquid



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 39 of 92

6.1.2 Measurement for Tissue Simulate Liquid


The Conductivity (σ) and Permittivity (ρ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was $22\pm 2^{\circ}\text{C}$.

Tissue Type	Measured Frequency (MHz)	Measured Tissue		Target Tissue ($\pm 5\%$)		Deviation (Within $\pm 5\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
		ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$	ϵ_r	$\sigma(\text{S/m})$		
13 Head	13	55.700	0.747	55.00	0.75	1.27%	-0.40%	22.9	2025/5/18
750 Head	750	42.560	0.890	41.90	0.89	1.58%	0.00%	23.1	2025/5/20
835 Head	835	41.737	0.900	41.50	0.90	0.57%	0.00%	22.7	2025/5/22
1750 Head	1750	40.313	1.376	40.10	1.37	0.53%	0.44%	22.6	2025/5/24
1950 Head	1950	40.032	1.422	40.00	1.40	0.08%	1.57%	22.9	2025/5/26
2300 Head	2300	38.705	1.641	39.50	1.67	-2.01%	-1.74%	22.8	2025/5/27
2450 Head	2450	38.251	1.801	39.20	1.80	-2.42%	0.06%	22.9	2025/5/30
2600 Head	2600	37.587	1.956	39.00	1.96	-3.62%	-0.20%	23.1	2025/5/31
5250 Head	5250	36.526	4.739	35.90	4.71	1.74%	0.62%	22.7	2025/6/1
5600 Head	5600	35.623	5.148	35.50	5.07	0.35%	1.54%	22.7	2025/6/1
5750 Head	5750	35.196	5.308	35.40	5.22	-0.58%	1.69%	22.7	2025/6/1
6500 Head	6500	34.100	6.240	34.50	6.07	-1.16%	2.80%	23.1	2025/6/3

Table 5: Measurement result of Tissue electric parameters.

6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-4. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within $\pm 10\%$ from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range $22\pm 2^\circ\text{C}$, the relative humidity was in the range 60% and the liquid depth above the ear reference points was above 15 ± 0.5 cm in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

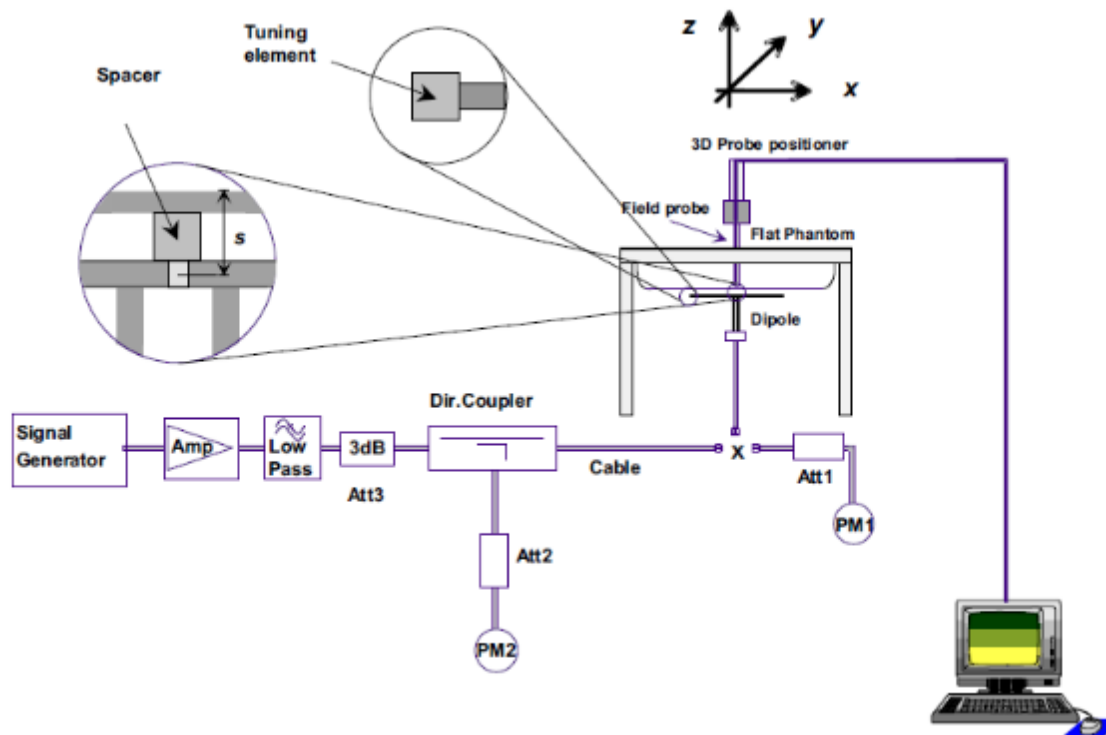

F-4. the microwave circuit arrangement used for SAR system check



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 41 of 92

6.2.1 Justification for Extended SAR Dipole Calibrations

1) Instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 20% of calibrated measurement;
- d) Impedance is within 5Ω from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 42 of 92

6.2.2 Summary System Check Result(s)

Validation Kit	Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
CLA-13_Head	0.10	0.07	0.41	0.26	0.42	0.27	-3.09%	-2.26%	22.9	2025/5/18
D750V3_Head	2.17	1.42	8.68	5.68	8.40	5.52	3.33%	2.90%	23.1	2025/5/20
D835V2_Head	2.50	1.52	10.00	6.08	9.60	6.16	4.17%	-1.30%	22.7	2025/5/22
D1750V2_Head	9.27	4.92	37.08	19.68	36.30	19.30	2.15%	1.97%	22.6	2025/5/24
D1950V3_Head	10.70	5.52	42.80	22.08	40.40	20.80	5.94%	6.15%	22.9	2025/5/26
D2300V2_Head	12.40	5.91	49.60	23.64	48.70	23.30	1.85%	1.46%	22.8	2025/5/27
D2450V2_Head	12.90	6.06	51.60	24.24	52.70	24.60	-2.09%	-1.46%	22.9	2025/5/30
D2600V2_Head	14.00	6.24	56.00	24.96	57.30	25.40	-2.27%	-1.73%	23.1	2025/5/31
Validation Kit	Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W)	Target SAR (normalized to 1W)	Deviation (Within $\pm 10\%$)		Liquid Temp. ($^{\circ}\text{C}$)	Test Date
	1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2_5.25G_Head	7.99	2.31	79.90	23.10	77.20	21.90	3.50%	5.48%	22.7	2025/6/1
D5GHzV2_5.6G_Head	8.13	2.25	81.30	22.50	81.10	22.80	0.25%	-1.32%	22.7	2025/6/1
D5GHzV2_5.75G_Head	7.87	2.25	78.70	22.50	77.80	21.70	1.16%	3.69%	22.7	2025/6/1
D6500V2_Head	28.30	5.39	283.00	53.90	291.00	53.90	-2.75%	0.00%	23.1	2025/6/3

Table 6: SAR System Check Result.

6.2.3 Detailed System Check Results

Please see the Appendix A

7 Test Configuration

7.1 Operation Configurations

7.1.1 GSM Test Configuration

SAR tests for GSM frequency band, a communication link is set up with a base station by air link. Using Radio Communication Analyzer, the power lever is set to “5” or “0” in SAR of GSM frequency band. The tests in the GSM frequency band are performed in the mode of GPRS/EGPRS function.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

For SAR the time based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:

Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8).

7.1.2 WCDMA Test Configuration

1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

2) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

3) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 44 of 92

a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors(β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	Bd	β_d (SF)	β_c/β_d	β_{hs}	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1: Δ_{ACK} , Δ_{NACK} and Δ_{CQI} = 8 Ahs = $\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15*\beta_c$
Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and Δ_{NACK} = 8 (Ahs=30/15) with $\beta_{hs}=30/15*\beta_c$, and Δ_{CQI} = 7 (Ahs=24/15) with $\beta_{hs}=24/15*\beta_c$.
Note3: CM=1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
Nominal average inf. bit rate	534 kbit/s
Inter-TTI Distance	3 TTI"s
Number of HARQ Processes	2 Processes
Information Bit Payload	3202 Bits
MAC-d PDU size	336 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	4800 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	9600 SMLs
Coding Rate	0.67
Number of Physical Channel Codes	5

Table 7: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 45 of 92

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	Maximum HS-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 8: HSDPA UE category

b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.

Sub-test ¹	β_c ²	β_d ³	β_d (SF) ⁴	β_o/β_d ⁵	β_{hs} (1) ⁶	β_{acc} ⁷	β_{ed} ⁸	β_c (SF) ⁹	β_{ed} (code) ¹⁰	CM (2) ¹¹	MP R (dB) ¹²	AG ¹⁴ Index ¹³	E-TFC I ¹⁴
1 ¹	11/15 ⁽³⁾	15/15 ⁽³⁾	64 ²	11/15 ⁽³⁾	22/15 ³	209/225 ⁴	1039/225 ⁵	4 ⁶	1 ⁷	1.0 ⁸	0.0 ⁹	20 ¹⁰	75 ¹¹
2 ¹	6/15 ²	15/15 ³	64 ²	6/15 ³	12/15 ³	12/15 ³	94/75 ⁴	4 ⁶	1 ⁷	3.0 ⁸	2.0 ⁹	12 ¹⁰	67 ¹¹
3 ¹	15/15 ²	9/15 ³	64 ²	15/9 ³	30/15 ³	30/15 ³	$\beta_{ed1}:47/15$ $\beta_{ed2}:47/15$	4 ⁶	2 ⁷	2.0 ⁸	1.0 ⁹	15 ¹⁰	92 ¹¹
4 ¹	2/15 ²	15/15 ³	64 ²	2/15 ³	4/15 ³	2/15 ³	56/75 ⁴	4 ⁶	1 ⁷	3.0 ⁸	2.0 ⁹	17 ¹⁰	71 ¹¹
5 ¹	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64 ²	15/15 ⁽⁴⁾	30/15 ³	24/15 ³	134/15 ⁴	4 ⁶	1 ⁷	1.0 ⁸	0.0 ⁹	21 ¹⁰	81 ¹¹
Note 1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs} = \beta_{hs}/\beta_c = 30/15$ $\beta_{hs} = 30/15 * \beta_c$ Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3 : For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$ Note 4 : For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$ Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g Note 6: β_{ed} can not be set directly; it is set by Absolute Grant Value.													

Table 9: Subtests for UMTS Release 6 HSUPA

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 46 of 92

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
6 (No DPDCH)	4	8	10	2SF2&2SF	11484	5.76
	4	4	2	4	20000	2.00
7 (No DPDCH)	4	8	2	2SF2&2SF	22996	?
	4	4	10	4	20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 10: HSUPA UE category

c) DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

Table E.5.0: Levels for HSDPA connection setup

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 47 of 92

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 11: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

Note:

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1,i.e.,retransmission is not allowed. The redundancy and constellation version 0 shall be used.

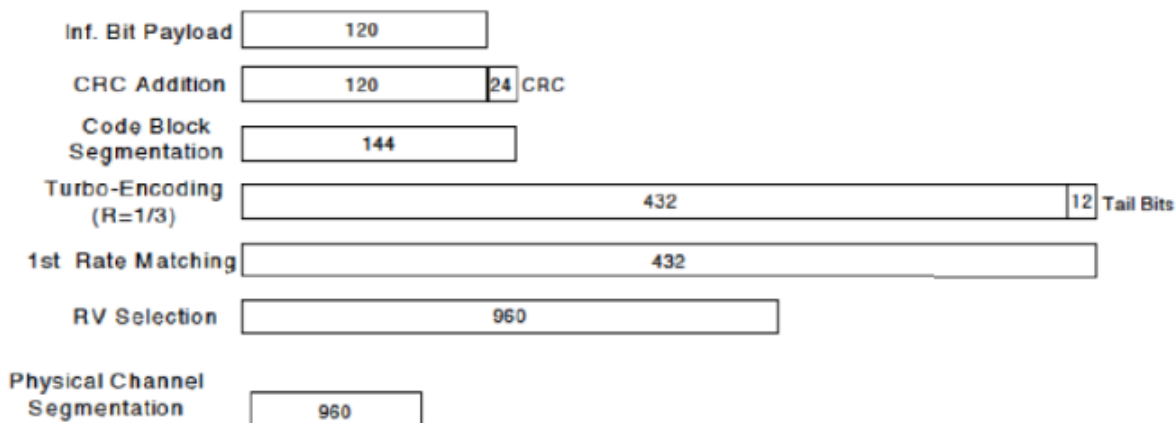


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test ^o	β_c ^o	β_d ^o	$\beta_d \cdot (SF)$ ^o	β_c / β_d ^o	$\beta_{hs}(1)$ ^o	CM(dB)(2) ^o	MPR (dB) ^o
1 ^o	2/15 ^o	15/15 ^o	64 ^o	2/15 ^o	4/15 ^o	0.0 ^o	0 ^o
2 ^o	12/15(3) ^o	15/15(3) ^o	64 ^o	12/15(3) ^o	24/15 ^o	1.0 ^o	0 ^o
3 ^o	15/15 ^o	8/15 ^o	64 ^o	15/8 ^o	30/15 ^o	1.5 ^o	0.5 ^o
4 ^o	15/15 ^o	4/15 ^o	64 ^o	15/4 ^o	30/15 ^o	1.5 ^o	0.5 ^o

Note1: ΔACK , $\Delta NACK$ and $\Delta CQI=8$ $A_{hs}=\beta_{hs}/\beta_c=30/15$ $\beta_{hs}=30/15 * \beta_c$
 Note2: CM=1 for $\beta_c/\beta_d=12/15$, $\beta_{hs}/\beta_c=24/15$. For all other combinations of DPDCH, DPCCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
 Note3: For subtest2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c=11/15$ and $\beta_d=15/15$

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.


Report No.: SUCR250500040509
Rev.: 01
Page: 48 of 92

7.1.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

7.1.4 Duty cycle

Wi-Fi 2.4GHz 802.11b (Ant2):
Duty cycle= 98.40%

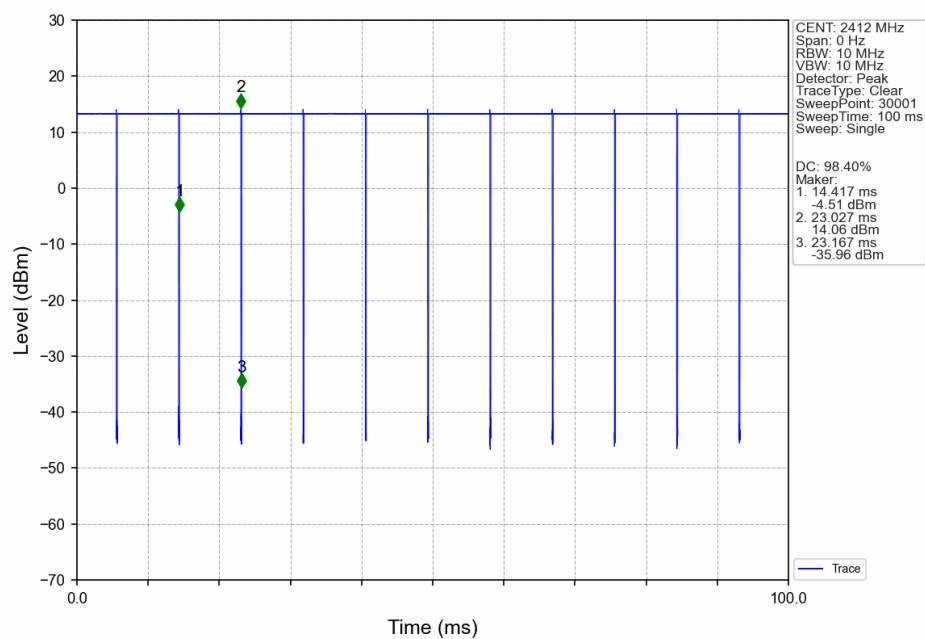





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 49 of 92

Wi-Fi 2.4GHz 802.11g (Ant3):
Duty cycle= 90.55%

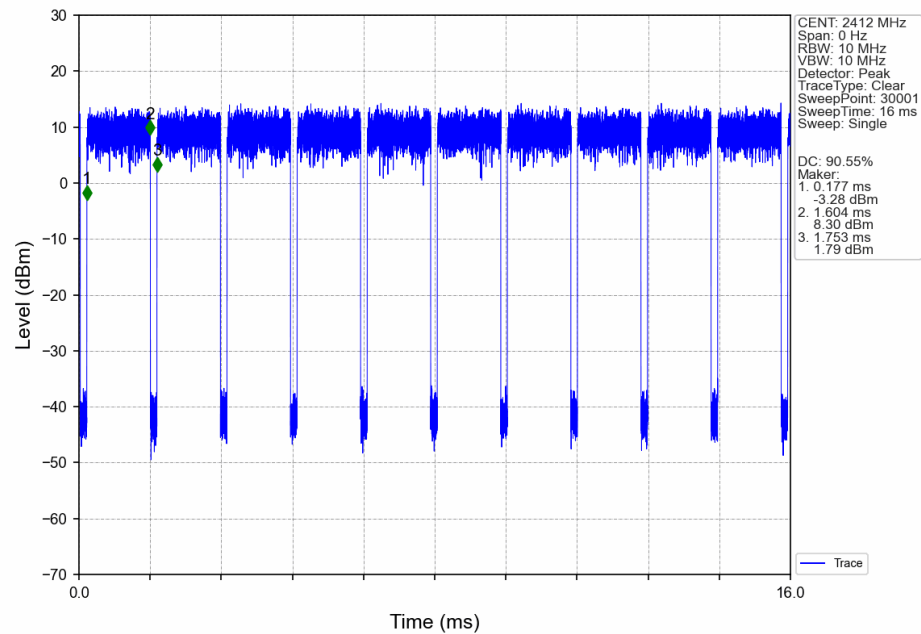

Wi-Fi 2.4GHz 802.11n (MIMO):
Duty cycle= 85.33%

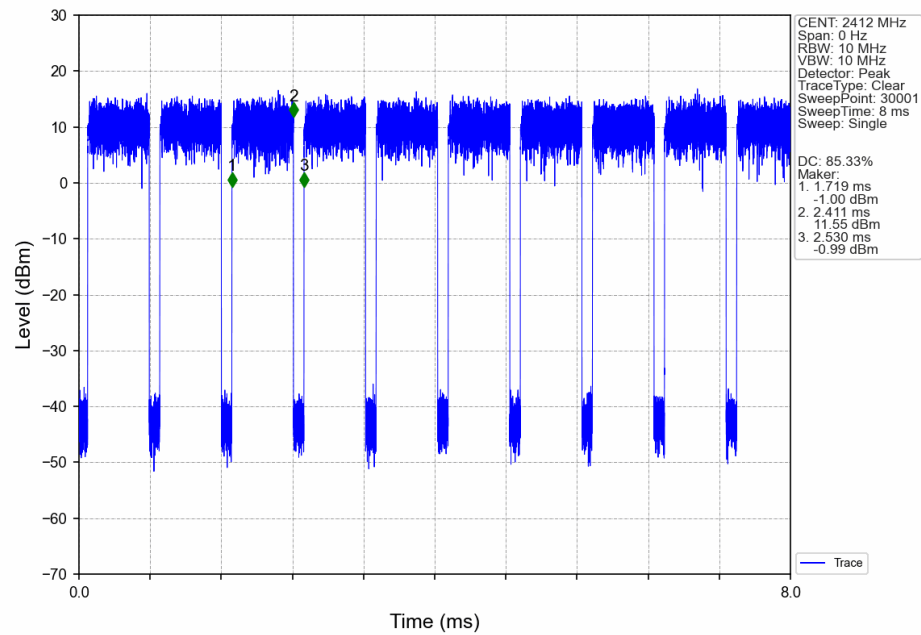





SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 50 of 92

Wi-Fi 5GHz 802.11a (Ant2/3):
Duty cycle=95.00%

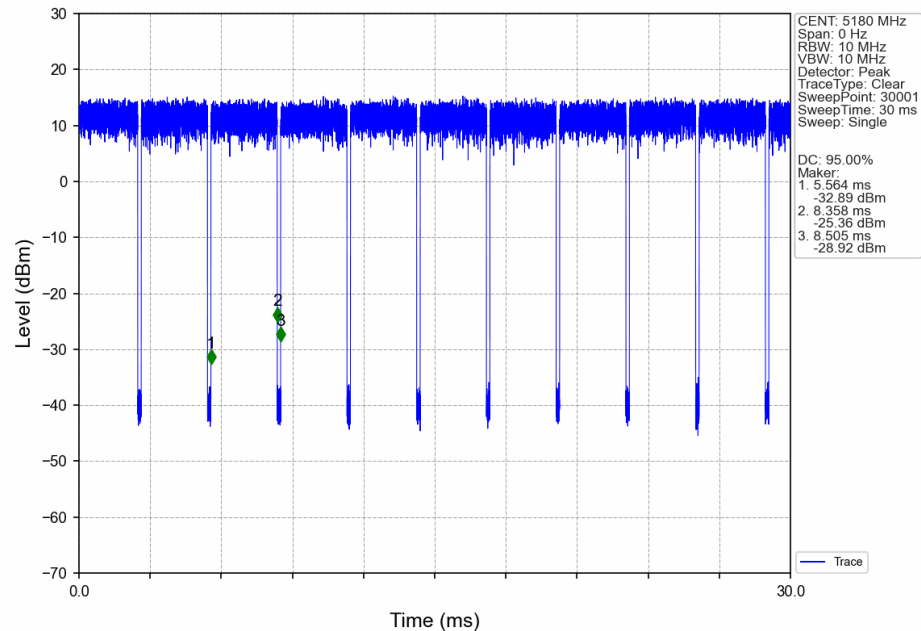

Wi-Fi 5GHz 802.11n 20 (MIMO):
Duty cycle=90.06%

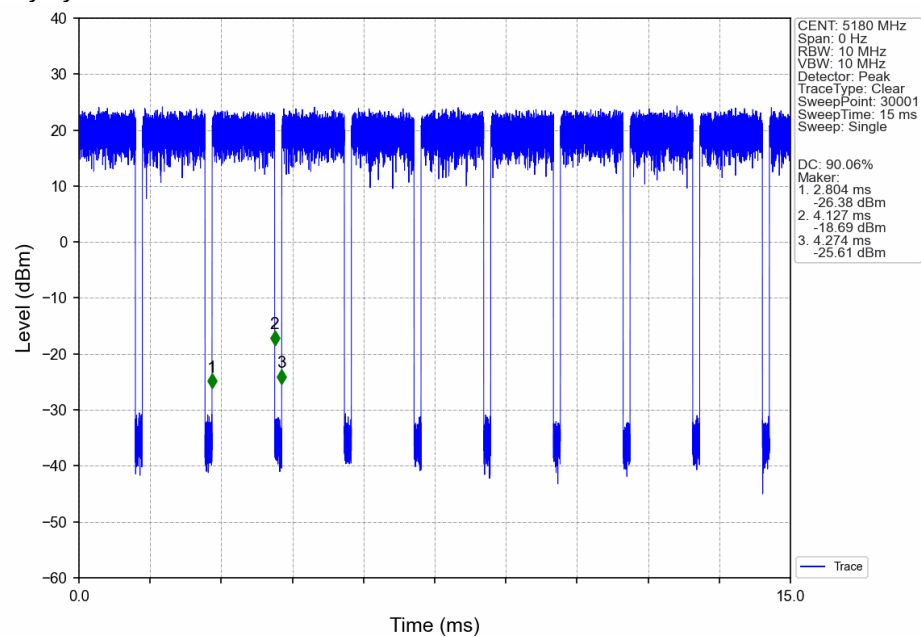




SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 51 of 92

Wi-Fi 6GHz 802.11ax 80 (Ant3):
Duty cycle=88.99%

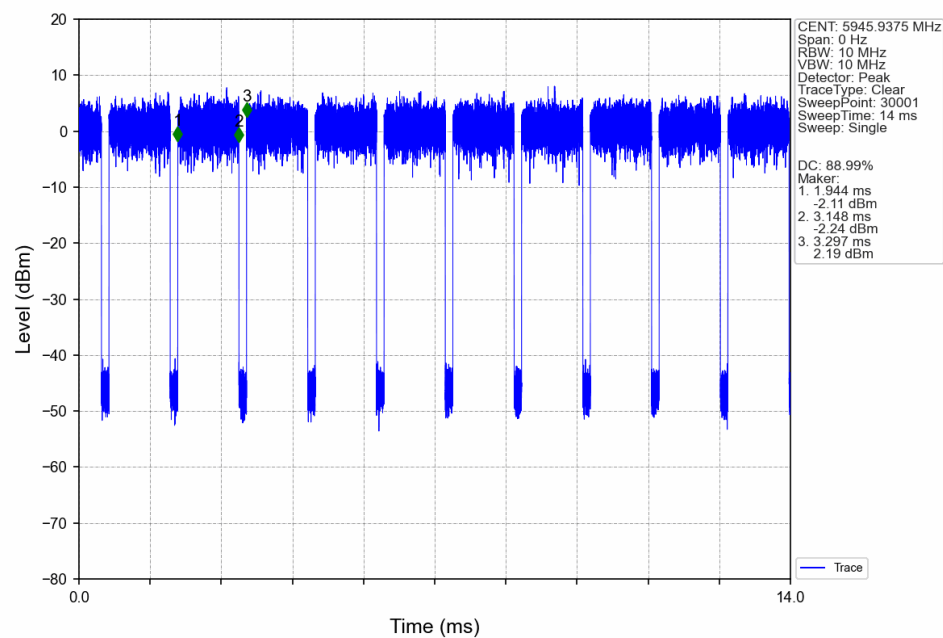

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 52 of 92

7.1.4.1 Initial Test Position SAR Test Reduction Procedure

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is ≤ 0.8 W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

7.1.4.2 Initial Test Configuration Procedures

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is > 0.8 W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is ≤ 1.2 W/kg or all required channels are tested.

7.1.4.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
 - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
 - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is > 1.2 W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
 - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
 - b) replace “initial test configuration” with “all tested higher output power configurations”

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 54 of 92

7.1.4.4 2.4 GHz WiFi SAR Procedures

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- **802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is > 0.8 W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

- **2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.

- **SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.1.4.5 WiFi 5G SAR Test Procedures**7.1.4.5.1 U-NII-1 and U-NII-2A Bands**

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest *reported* SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest *reported* SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is > 1.2 W/kg, SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

7.1.4.5.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.1.4.5.3 OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n. After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
 - The channel closest to mid-band frequency is selected for SAR measurement.
 - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

7.1.4.5.4 SAR Test Requirements for OFDM configurations

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

7.1.5 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

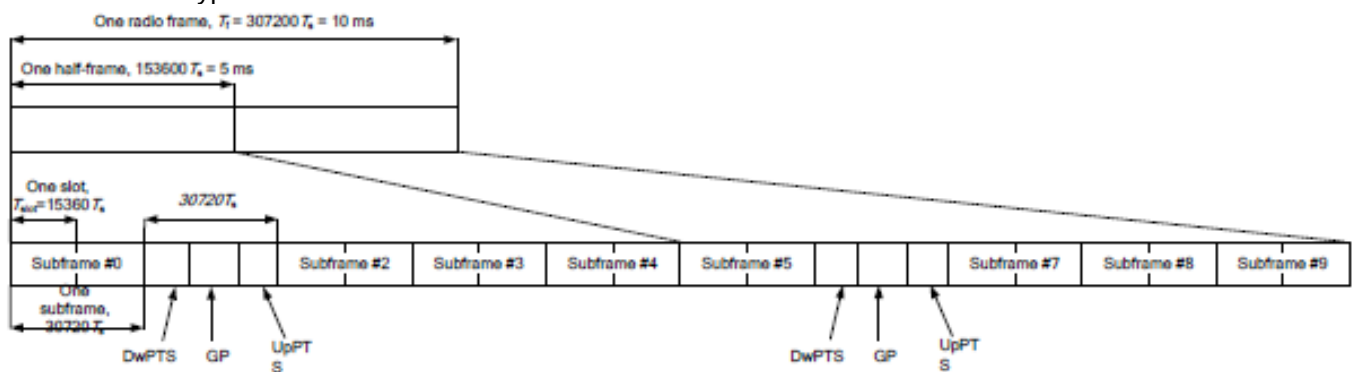

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts	2192.Ts	2560.Ts	7680.Ts	2192.Ts	2560.Ts
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts	4384.Ts	5120.Ts	7680.Ts	4384.Ts	5120.Ts
5	6592.Ts			20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-	-	-
9	13168.Ts			-	-	-

Uplink-downlink configurations.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 58 of 92

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth/Transmission bandwidth						MPR (dB)
	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	0
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1
16QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1
16QAM	> 5	> 4	> 8	> 12	> 16	> 18	2

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 59 of 92

C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

D) Largest channel bandwidth standalone SAR test requirements

1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> \frac{1}{2}$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is $> \frac{1}{2}$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

8 Test Result

8.1 Measurement of RF Conducted Power

The detailed conducted power table can refer to Appendix E.

Note:

- 1) . For GSM SAR the time-based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) . The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
Frame-averaged power = $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$
- 3) . When the maximum output power variation across the required test channels is $> \frac{1}{2}$ dB, instead of the middle channel, the highest output power channel must be used
- 4) . Conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than $\frac{1}{4}$ dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 61 of 92


5) . For conducted power of WIFI must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured. Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.

2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

6) . The conducted power of BT is measured with RMS detector.

BT DH5 Duty Cycle=76.93%

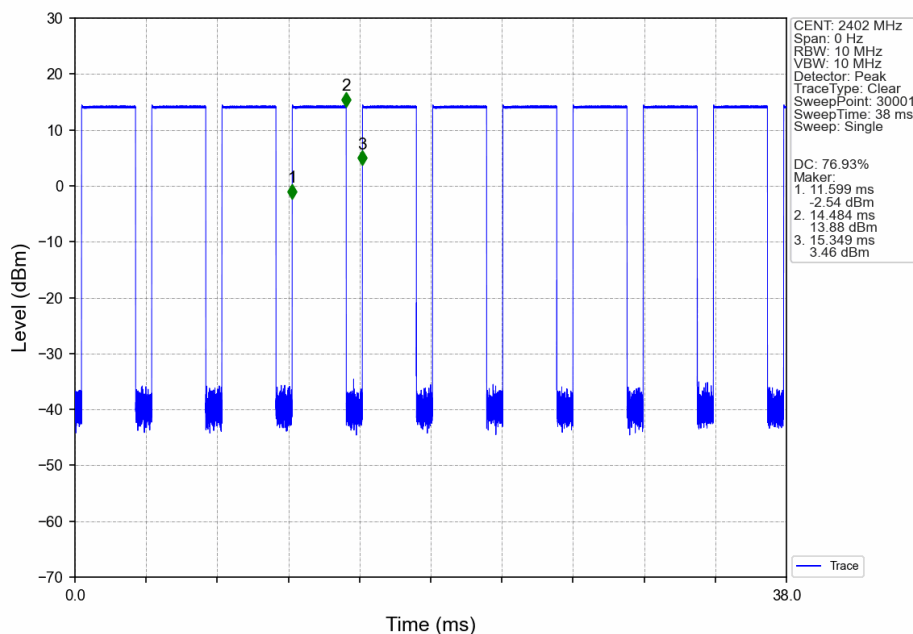



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 62 of 92

8.2 Measurement of SAR Data

Note:

- 1) The maximum Scaled SAR value is marked in bold. Graph results refer to Appendix B.
- 2) Per KDB447498 D01, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - $\leq 0.8\text{W/kg}$ for 1-g or 2.0W/kg for 10-g respectively, when the transmission band is $\leq 100\text{MHz}$.
 - $\leq 0.6\text{ W/kg}$ or 1.5 W/kg , for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz.
 - $\leq 0.4\text{ W/kg}$ or 1.0 W/kg , for 1-g or 10-g respectively, when the transmission band is $\geq 200\text{ MHz}$.
- 3) The device does not support DTM function.
- 4) For WiFi SAR test, as the highest reported SAR is smaller than 1.2 W/kg , and the tune-up of the other 802.11 modes are not higher than SAR measurement mode, therefore the adjusted SAR is $\leq 1.2\text{ W/kg}$ for other 802.11 modes, SAR test for the other 802.11 modes are not required.
- 5) NFC is different from the working scenario of WWAN/WIFI(Body) and does not participate in the simultaneous transmission.
- 6) The simultaneous transmission is reduced by XdB (the detailed power reduced can be referred to Conducted Power Appendix E), therefore, those SAR of simultaneous transmission mode are scaled based on standalone SAR results.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 63 of 92

8.2.1 SAR Result of GSM850

GSM850 SAR Test Record										
Ant 0 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm)										
Back side	GPRS 2TS	190/836.6	1:4.15	0.660	0.06	26.01	27.00	1.256	0.829	22.7
Back side	GPRS 2TS	128/824.2	1:4.15	0.618	0.02	25.80	27.00	1.318	0.815	22.7
Back side	GPRS 2TS	251/848.8	1:4.15	0.634	0.07	25.87	27.00	1.297	0.822	22.7
Top side	GPRS 2TS	190/836.6	1:4.15	0.334	0.03	26.01	27.00	1.256	0.420	22.7
Body Test data Sensor off										
Back side-21mm	GPRS 2TS	190/836.6	1:4.15	0.121	-0.07	29.59	31.00	1.384	0.167	22.7
Left side-0mm	GPRS 2TS	190/836.6	1:4.15	0.046	0.02	29.59	31.00	1.384	0.064	22.7
Right side-0mm	GPRS 2TS	190/836.6	1:4.15	0.007	-0.11	29.59	31.00	1.384	0.010	22.7
Top side-23mm	GPRS 2TS	190/836.6	1:4.15	0.044	0.03	29.59	31.00	1.384	0.061	22.7

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 65 of 92

8.2.3 SAR Result of WCDMA Band II

WCDMA Band II SAR Test Record										
Ant 0 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm)										
Back side	RMC	9400/1880	1:1	0.437	0.02	11.69	12.00	1.074	0.469	22.9
Top side	RMC	9400/1880	1:1	0.549	-0.03	11.69	12.00	1.074	0.590	22.9
Body Test data Sensor off										
Back side-21mm	RMC	9400/1880	1:1	0.323	0.11	23.15	24.00	1.216	0.393	22.9
Top side-23mm	RMC	9400/1880	1:1	0.232	0.09	23.15	24.00	1.216	0.282	22.9

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 66 of 92

8.2.4 SAR Result of WCDMA Band IV

WCDMA Band IV SAR Test Record										
Ant 0 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm)										
Back side	RMC	1412/1732.4	1:1	0.682	-0.02	13.37	14.00	1.156	0.788	22.6
Top side	RMC	1412/1732.4	1:1	0.868	0.05	13.37	14.00	1.156	1.004	22.6
Top side-Repeat SAR	RMC	1412/1732.4	1:1	0.863	0.13	13.37	14.00	1.156	0.998	22.6
Top side	RMC	1412/1732.4	1:1	0.821	0.07	13.15	14.00	1.216	0.998	22.6
Top side	RMC	1412/1732.4	1:1	0.836	0.05	13.35	14.00	1.161	0.971	22.6
Body Test data Sensor on For Simultaneous(Separate 0mm)										
Back side	RMC	1412/1732.4	1:1	0.682	-0.02	13.37	13.00	0.918	0.626	22.6
Top side	RMC	1412/1732.4	1:1	0.868	0.05	13.37	13.00	0.918	0.797	22.6
Top side	RMC	1412/1732.4	1:1	0.821	0.07	13.15	13.00	0.966	0.793	22.6
Top side	RMC	1412/1732.4	1:1	0.836	0.05	13.35	13.00	0.923	0.771	22.6
Body Test data Sensor off										
Back side-21mm	RMC	1412/1732.4	1:1	0.307	0.05	23.31	24.00	1.172	0.360	22.6
Top side-23mm	RMC	1412/1732.4	1:1	0.293	0.01	23.31	24.00	1.172	0.343	22.6

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Top side 0mm	1412/1732.4	0.868	0.863	1.006	N/A	N/A

Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 67 of 92

8.2.5 SAR Result of WCDMA Band V

WCDMA Band V SAR Test Record										
Ant 0 Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm)										
Back side	RMC	4182/836.4	1:1	0.543	-0.06	18.74	20.00	1.337	0.726	22.7
Top side	RMC	4182/836.4	1:1	0.302	0.11	18.74	20.00	1.337	0.404	22.7
Body Test data Sensor off										
Back side-21mm	RMC	4182/836.4	1:1	0.310	-0.13	22.85	24.00	1.303	0.404	22.7
Left side-0mm	RMC	4182/836.4	1:1	0.076	-0.15	22.85	24.00	1.303	0.099	22.7
Right side-0mm	RMC	4182/836.4	1:1	0.018	-0.06	22.85	24.00	1.303	0.023	22.7
Top side-23mm	RMC	4182/836.4	1:1	0.074	-0.07	22.85	24.00	1.303	0.096	22.7

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 68 of 92

8.2.6 SAR Result of LTE Band 7

LTE Band 7 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm 1RB)											
Back side	20	QPSK 1_0	21100/2535	1:1	0.702	0.06	14.04	15.00	1.247	0.876	23.1
Back side	20	QPSK 1_0	20850/2510	1:1	0.669	0.09	13.89	15.00	1.291	0.864	23.1
Back side	20	QPSK 1_0	21350/2560	1:1	0.675	-0.02	14.00	15.00	1.259	0.850	23.1
Top side	20	QPSK 1_0	21100/2535	1:1	0.633	0.13	14.04	15.00	1.247	0.790	23.1
Body Test data Sensor on (Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	21100/2535	1:1	0.675	0.15	13.91	15.00	1.285	0.868	23.1
Back side	20	QPSK 50_0	20850/2510	1:1	0.631	0.02	13.83	15.00	1.309	0.826	23.1
Back side	20	QPSK 50_0	21350/2560	1:1	0.645	-0.14	13.90	15.00	1.288	0.831	23.1
Top side	20	QPSK 50_0	21100/2535	1:1	0.618	-0.05	13.91	15.00	1.285	0.794	23.1
Body Test data Sensor on (Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	21100/2535	1:1	0.634	0.16	13.86	15.00	1.300	0.824	23.1
Body Test data Sensor on For Simultaneous(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	21100/2535	1:1	0.702	0.06	14.04	14.00	0.991	0.696	23.1
Back side	20	QPSK 1_0	20850/2510	1:1	0.669	0.09	13.89	14.00	1.026	0.686	23.1
Back side	20	QPSK 1_0	21350/2560	1:1	0.675	-0.02	14.00	14.00	1.000	0.675	23.1
Top side	20	QPSK 1_0	21100/2535	1:1	0.633	0.13	14.04	14.00	0.991	0.627	23.1
Body Test data Sensor on For Simultaneous(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	21100/2535	1:1	0.675	0.15	13.91	14.00	1.021	0.689	23.1
Back side	20	QPSK 50_0	20850/2510	1:1	0.631	0.02	13.83	14.00	1.040	0.656	23.1
Back side	20	QPSK 50_0	21350/2560	1:1	0.645	-0.14	13.90	14.00	1.023	0.660	23.1
Top side	20	QPSK 50_0	21100/2535	1:1	0.618	-0.05	13.91	14.00	1.021	0.631	23.1
Body Test data Sensor on For Simultaneous(Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	21100/2535	1:1	0.634	0.16	13.86	14.00	1.033	0.655	23.1
Body Test data Sensor off 1RB											
Back side-21mm	20	QPSK 1_0	21100/2535	1:1	0.608	-0.16	23.15	24.00	1.216	0.739	23.1
Top side-23mm	20	QPSK 1_0	21100/2535	1:1	0.623	0.10	23.15	24.00	1.216	0.758	23.1
Body Test data Sensor off 50%RB											
Back side-21mm	20	QPSK 50_0	21100/2535	1:1	0.554	0.11	22.08	23.00	1.236	0.685	23.1
Top side-23mm	20	QPSK 50_0	21100/2535	1:1	0.581	-0.16	22.08	23.00	1.236	0.718	23.1

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 69 of 92

8.2.7 SAR Result of LTE Band 12

LTE Band 12 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	10	QPSK 1_0	23095/707.5	1:1	0.474	0.03	19.05	20.00	1.245	0.590	23.1
Top side	10	QPSK 1_0	23095/707.5	1:1	0.176	0.14	19.05	20.00	1.245	0.219	23.1
Body Test data (Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	23095/707.5	1:1	0.451	-0.15	18.91	20.00	1.285	0.580	23.1
Top side	10	QPSK 25_0	23095/707.5	1:1	0.172	-0.02	18.91	20.00	1.285	0.221	23.1
Body Test data Sensor off 1RB											
Back side-21mm	10	QPSK 1_0	23095/707.5	1:1	0.206	-0.10	23.07	24.00	1.239	0.255	23.1
Left side-0mm	10	QPSK 1_0	23095/707.5	1:1	0.121	0.04	23.07	24.00	1.239	0.150	23.1
Right side-0mm	10	QPSK 1_0	23095/707.5	1:1	0.056	0.19	23.07	24.00	1.239	0.069	23.1
Top side-23mm	10	QPSK 1_0	23095/707.5	1:1	0.107	-0.14	23.07	24.00	1.239	0.133	23.1
Body Test data Sensor off 50%RB											
Back side-21mm	10	QPSK 25_0	23095/707.5	1:1	0.176	-0.12	21.90	23.00	1.288	0.227	23.1
Left side-0mm	10	QPSK 25_0	23095/707.5	1:1	0.094	0.17	21.90	23.00	1.288	0.121	23.1
Right side-0mm	10	QPSK 25_0	23095/707.5	1:1	0.032	0.15	21.90	23.00	1.288	0.041	23.1
Top side-23mm	10	QPSK 25_0	23095/707.5	1:1	0.087	0.12	21.90	23.00	1.288	0.112	23.1

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 70 of 92

8.2.8 SAR Result of LTE Band 13

LTE Band 13 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	10	QPSK 1_0	23230/782	1:1	0.471	0.02	18.83	20.00	1.309	0.617	23.1
Top side	10	QPSK 1_0	23230/782	1:1	0.221	-0.14	18.83	20.00	1.309	0.289	23.1
Body Test data (Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	23230/782	1:1	0.420	-0.06	18.59	20.00	1.384	0.581	23.1
Top side	10	QPSK 25_0	23230/782	1:1	0.186	0.19	18.59	20.00	1.384	0.257	23.1
Body Test data Sensor off 1RB											
Back side-21mm	10	QPSK 1_0	23230/782	1:1	0.237	-0.16	23.11	24.00	1.227	0.291	23.1
Left side-0mm	10	QPSK 1_0	23230/782	1:1	0.135	0.11	23.11	24.00	1.227	0.166	23.1
Right side-0mm	10	QPSK 1_0	23230/782	1:1	0.039	0.04	23.11	24.00	1.227	0.048	23.1
Top side-23mm	10	QPSK 1_0	23230/782	1:1	0.075	0.04	23.11	24.00	1.227	0.092	23.1
Body Test data Sensor off 50%RB											
Back side-21mm	10	QPSK 25_0	23230/782	1:1	0.187	-0.11	21.97	23.00	1.268	0.237	23.1
Left side-0mm	10	QPSK 25_0	23230/782	1:1	0.108	0.17	21.97	23.00	1.268	0.137	23.1
Right side-0mm	10	QPSK 25_0	23230/782	1:1	0.022	0.10	21.97	23.00	1.268	0.028	23.1
Top side-23mm	10	QPSK 25_0	23230/782	1:1	0.059	0.11	21.97	23.00	1.268	0.075	23.1

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 71 of 92

8.2.9 SAR Result of LTE Band 25

LTE Band 25 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	20	QPSK 1_0	26365/1882.5	1:1	0.377	0.19	12.24	13.00	1.191	0.449	22.9
Top side	20	QPSK 1_0	26365/1882.5	1:1	0.506	0.11	12.24	13.00	1.191	0.603	22.9
Body Test data (Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	26365/1882.5	1:1	0.263	0.16	12.04	13.00	1.247	0.328	22.9
Top side	20	QPSK 50_0	26365/1882.5	1:1	0.440	0.19	12.04	13.00	1.247	0.549	22.9
Body Test data Sensor off 1RB											
Back side-21mm	20	QPSK 1_0	26365/1882.5	1:1	0.254	0.07	23.12	24.00	1.225	0.311	22.9
Top side-23mm	20	QPSK 1_0	26365/1882.5	1:1	0.156	-0.04	23.12	24.00	1.225	0.191	22.9
Body Test data Sensor off 50%RB											
Back side-21mm	20	QPSK 50_0	26365/1882.5	1:1	0.197	0.01	21.95	23.00	1.274	0.251	22.9
Top side-23mm	20	QPSK 50_0	26365/1882.5	1:1	0.134	-0.13	21.95	23.00	1.274	0.171	22.9

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 72 of 92

8.2.10 SAR Result of LTE Band 26

LTE Band 26 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm 1RB)											
Back side	15	QPSK 1_0	26865/831.5	1:1	0.470	0.08	20.49	21.00	1.125	0.529	22.7
Top side	15	QPSK 1_0	26865/831.5	1:1	0.242	0.08	20.49	21.00	1.125	0.272	22.7
Body Test data Sensor on (Separate 0mm 50%RB)											
Back side	15	QPSK 36_0	26865/831.5	1:1	0.377	-0.18	20.23	21.00	1.194	0.450	22.7
Top side	15	QPSK 36_0	26865/831.5	1:1	0.158	-0.12	20.23	21.00	1.194	0.189	22.7
Body Test data Sensor off 1RB											
Back side-21mm	15	QPSK 1_0	26865/831.5	1:1	0.238	0.03	23.23	24.00	1.194	0.284	22.7
Left side-0mm	15	QPSK 1_0	26865/831.5	1:1	0.094	-0.08	23.23	24.00	1.194	0.112	22.7
Right side-0mm	15	QPSK 1_0	26865/831.5	1:1	0.025	0.17	23.23	24.00	1.194	0.030	22.7
Top side-23mm	15	QPSK 1_0	26865/831.5	1:1	0.066	-0.01	23.23	24.00	1.194	0.079	22.7
Body Test data Sensor off 50%RB											
Back side-21mm	15	QPSK 36_0	26865/831.5	1:1	0.180	0.00	21.95	23.00	1.274	0.229	22.7
Left side-0mm	15	QPSK 36_0	26865/831.5	1:1	0.077	0.15	21.95	23.00	1.274	0.098	22.7
Right side-0mm	15	QPSK 36_0	26865/831.5	1:1	0.016	-0.15	21.95	23.00	1.274	0.020	22.7
Top side-23mm	15	QPSK 36_0	26865/831.5	1:1	0.049	0.13	21.95	23.00	1.274	0.062	22.7



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 73 of 92

8.2.11 SAR Result of LTE Band 30

LTE Band 30 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	10	QPSK 1_0	27710/2310	1:1	0.502	0.05	14.04	15.00	1.247	0.626	22.8
Top side	10	QPSK 1_0	27710/2310	1:1	0.468	-0.16	14.04	15.00	1.247	0.584	22.8
Body Test data (Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	27710/2310	1:1	0.461	0.17	13.84	15.00	1.306	0.602	22.8
Top side	10	QPSK 25_0	27710/2310	1:1	0.417	-0.14	13.84	15.00	1.306	0.545	22.8
Body Test data Sensor off 1RB											
Back side-21mm	10	QPSK 1_0	27710/2310	1:1	0.290	-0.01	22.76	24.00	1.330	0.386	22.8
Top side-23mm	10	QPSK 1_0	27710/2310	1:1	0.307	0.12	22.76	24.00	1.330	0.408	22.8
Body Test data Sensor off 50%RB											
Back side-21mm	10	QPSK 25_0	27710/2310	1:1	0.239	-0.13	21.51	23.00	1.409	0.337	22.8
Top side-23mm	10	QPSK 25_0	27710/2310	1:1	0.302	0.06	21.51	23.00	1.409	0.426	22.8

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 74 of 92

8.2.12 SAR Result of LTE Band 41

LTE Band 41 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.890	0.17	15.20	16.00	1.202	1.070	23.1
Back side	20	QPSK 1_0	39750/2506	1:1.58	0.847	-0.19	15.02	16.00	1.253	1.061	23.1
Back side	20	QPSK 1_0	40185/2549.5	1:1.58	0.856	-0.06	15.06	16.00	1.242	1.063	23.1
Back side	20	QPSK 1_0	41055/2636.5	1:1.58	0.839	0.09	14.85	16.00	1.303	1.093	23.1
Back side	20	QPSK 1_0	41490/2680	1:1.58	0.824	-0.08	14.90	16.00	1.288	1.062	23.1
Top side	20	QPSK 1_0	40620/2593	1:1.58	0.918	0.06	15.20	16.00	1.202	1.104	23.1
Top side-Repeat SAR	20	QPSK 1_0	40620/2593	1:1.58	0.914	0.13	15.20	16.00	1.202	1.099	23.1
Top side	20	QPSK 1_0	39750/2506	1:1.58	0.874	-0.09	15.02	16.00	1.253	1.095	23.1
Top side	20	QPSK 1_0	40185/2549.5	1:1.58	0.883	0.18	15.06	16.00	1.242	1.096	23.1
Top side	20	QPSK 1_0	41055/2636.5	1:1.58	0.836	0.10	14.85	16.00	1.303	1.089	23.1
Top side	20	QPSK 1_0	41490/2680	1:1.58	0.850	-0.16	14.90	16.00	1.288	1.095	23.1
Body Test data (Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.725	0.07	15.10	16.00	1.230	0.892	23.1
Back side	20	QPSK 50_0	39750/2506	1:1.58	0.690	-0.13	15.04	16.00	1.247	0.861	23.1
Back side	20	QPSK 50_0	40185/2549.5	1:1.58	0.697	0.01	14.96	16.00	1.271	0.886	23.1
Back side	20	QPSK 50_0	41055/2636.5	1:1.58	0.684	-0.13	14.82	16.00	1.312	0.898	23.1
Back side	20	QPSK 50_0	41490/2680	1:1.58	0.671	-0.08	14.96	16.00	1.271	0.853	23.1
Top side	20	QPSK 50_0	40620/2593	1:1.58	0.732	0.18	15.10	16.00	1.230	0.901	23.1
Top side	20	QPSK 50_0	39750/2506	1:1.58	0.697	0.09	15.04	16.00	1.247	0.869	23.1
Top side	20	QPSK 50_0	40185/2549.5	1:1.58	0.704	-0.19	14.96	16.00	1.271	0.894	23.1
Top side	20	QPSK 50_0	41055/2636.5	1:1.58	0.690	-0.04	14.82	16.00	1.312	0.905	23.1
Top side	20	QPSK 50_0	41490/2680	1:1.58	0.678	-0.02	14.96	16.00	1.271	0.861	23.1
Body Test data (Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	40620/2593	1:1.58	0.689	-0.14	14.98	16.00	1.265	0.871	23.1
Top side	20	QPSK 100_0	40620/2593	1:1.58	0.695	-0.06	14.98	16.00	1.265	0.879	23.1
Body Test data Sensor on For Simultaneous(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.890	0.17	15.20	14.00	0.759	0.675	23.1
Back side	20	QPSK 1_0	39750/2506	1:1.58	0.847	-0.19	15.02	14.00	0.791	0.670	23.1
Back side	20	QPSK 1_0	40185/2549.5	1:1.58	0.856	-0.06	15.06	14.00	0.783	0.671	23.1
Back side	20	QPSK 1_0	41055/2636.5	1:1.58	0.839	0.09	14.85	14.00	0.822	0.690	23.1
Back side	20	QPSK 1_0	41490/2680	1:1.58	0.824	-0.08	14.90	14.00	0.813	0.670	23.1
Top side	20	QPSK 1_0	40620/2593	1:1.58	0.918	0.06	15.20	14.00	0.759	0.696	23.1
Top side	20	QPSK 1_0	39750/2506	1:1.58	0.874	-0.09	15.02	14.00	0.791	0.691	23.1
Top side	20	QPSK 1_0	40185/2549.5	1:1.58	0.883	0.18	15.06	14.00	0.783	0.692	23.1
Top side	20	QPSK 1_0	41055/2636.5	1:1.58	0.836	0.10	14.85	14.00	0.822	0.687	23.1
Top side	20	QPSK 1_0	41490/2680	1:1.58	0.850	-0.16	14.90	14.00	0.813	0.691	23.1
Body Test data Sensor on For Simultaneous(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.725	0.07	15.10	14.00	0.776	0.563	23.1
Back side	20	QPSK 50_0	39750/2506	1:1.58	0.690	-0.13	15.04	14.00	0.787	0.543	23.1
Back side	20	QPSK 50_0	40185/2549.5	1:1.58	0.697	0.01	14.96	14.00	0.802	0.559	23.1
Back side	20	QPSK 50_0	41055/2636.5	1:1.58	0.684	-0.13	14.82	14.00	0.828	0.566	23.1
Back side	20	QPSK 50_0	41490/2680	1:1.58	0.671	-0.08	14.96	14.00	0.802	0.538	23.1
Top side	20	QPSK 50_0	40620/2593	1:1.58	0.732	0.18	15.10	14.00	0.776	0.568	23.1

5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 76 of 92

8.2.13 SAR Result of LTE Band 66

LTE Band 66 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm 1RB)											
Back side	20	QPSK 1_0	132322/1745	1:1	0.765	-0.05	15.35	16.00	1.161	0.889	22.6
Back side	20	QPSK 1_0	132072/1720	1:1	0.733	0.17	15.15	16.00	1.216	0.891	22.6
Back side	20	QPSK 1_0	132572/1770	1:1	0.751	-0.15	15.26	16.00	1.186	0.891	22.6
Top side	20	QPSK 1_0	132322/1745	1:1	0.927	0.15	15.35	16.00	1.161	1.077	22.6
Top side-Repeat SAR	20	QPSK 1_0	132322/1745	1:1	0.925	0.01	15.35	16.00	1.161	1.074	22.6
Top side	20	QPSK 1_0	132072/1720	1:1	0.881	0.05	15.15	16.00	1.216	1.071	22.6
Top side	20	QPSK 1_0	132572/1770	1:1	0.905	-0.15	15.26	16.00	1.186	1.073	22.6
Body Test data (Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	132322/1745	1:1	0.652	0.08	15.27	16.00	1.183	0.771	22.6
Top side	20	QPSK 50_0	132322/1745	1:1	0.763	0.04	15.27	16.00	1.183	0.903	22.6
Top side	20	QPSK 50_0	132072/1720	1:1	0.719	-0.07	15.10	16.00	1.230	0.885	22.6
Top side	20	QPSK 50_0	132572/1770	1:1	0.736	0.15	15.02	16.00	1.253	0.922	22.6
Body Test data (Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	132322/1745	1:1	0.618	0.15	15.06	16.00	1.242	0.767	22.6
Top side	20	QPSK 100_0	132322/1745	1:1	0.722	0.11	15.06	16.00	1.242	0.896	22.6
Body Test data Sensor on For Simultaneous(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	132322/1745	1:1	0.765	-0.05	15.35	14.00	0.733	0.561	22.6
Back side	20	QPSK 1_0	132072/1720	1:1	0.733	0.17	15.15	14.00	0.767	0.562	22.6
Back side	20	QPSK 1_0	132572/1770	1:1	0.751	-0.15	15.26	14.00	0.748	0.562	22.6
Top side	20	QPSK 1_0	132322/1745	1:1	0.927	0.15	15.35	14.00	0.733	0.679	22.6
Top side	20	QPSK 1_0	132072/1720	1:1	0.881	0.05	15.15	14.00	0.767	0.676	22.6
Top side	20	QPSK 1_0	132572/1770	1:1	0.905	-0.15	15.26	14.00	0.748	0.677	22.6
Body Test data Sensor on For Simultaneous(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	132322/1745	1:1	0.652	0.08	15.27	14.00	0.746	0.487	22.6
Top side	20	QPSK 50_0	132322/1745	1:1	0.763	0.04	15.27	14.00	0.746	0.570	22.6
Top side	20	QPSK 50_0	132072/1720	1:1	0.719	-0.07	15.10	14.00	0.776	0.558	22.6
Top side	20	QPSK 50_0	132572/1770	1:1	0.736	0.15	15.02	14.00	0.791	0.582	22.6
Body Test data Sensor on For Simultaneous(Separate 0mm 100%RB)											
Back side	20	QPSK 100_0	132322/1745	1:1	0.618	0.15	15.06	14.00	0.783	0.484	22.6
Top side	20	QPSK 100_0	132322/1745	1:1	0.722	0.11	15.06	14.00	0.783	0.566	22.6
Body Test data Sensor off 1RB											
Back side-21mm	20	QPSK 1_0	132322/1745	1:1	0.286	-0.19	23.30	24.00	1.175	0.336	22.6
Top side-23mm	20	QPSK 1_0	132322/1745	1:1	0.263	0.05	23.30	24.00	1.175	0.309	22.6
Body Test data Sensor off 50%RB											
Back side-21mm	20	QPSK 50_0	132322/1745	1:1	0.217	-0.12	22.07	23.00	1.239	0.269	22.6
Top side-23mm	20	QPSK 50_0	132322/1745	1:1	0.207	-0.08	22.07	23.00	1.239	0.256	22.6



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 77 of 92

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Top side 0mm	132322/1745	0.927	0.925	1.002	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg ($\sim 10\%$ from the 1-g SAR limit).						
3) A third repeated measurement was preformed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						
5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.						

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 78 of 92

8.2.14 SAR Result of LTE Band 71

LTE Band 71 SAR Test Record											
Ant 0 Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data Sensor on (Separate 0mm 1RB)											
Back side	20	QPSK 1_0	133322/683	1:1	0.596	0.04	20.91	22.00	1.285	0.766	23.1
Top side	20	QPSK 1_0	133322/683	1:1	0.237	-0.18	20.91	22.00	1.285	0.305	23.1
Body Test data Sensor on (Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	133322/683	1:1	0.449	0.05	20.48	22.00	1.419	0.637	23.1
Top side	20	QPSK 50_0	133322/683	1:1	0.199	-0.05	20.48	22.00	1.419	0.282	23.1
Body Test data Sensor off 1RB											
Back side-21mm	20	QPSK 1_0	133322/683	1:1	0.300	0.14	23.14	24.00	1.219	0.366	23.1
Left side-0mm	20	QPSK 1_0	133322/683	1:1	0.171	0.11	23.14	24.00	1.219	0.208	23.1
Right side-0mm	20	QPSK 1_0	133322/683	1:1	0.049	-0.01	23.14	24.00	1.219	0.060	23.1
Top side-23mm	20	QPSK 1_0	133322/683	1:1	0.095	0.03	23.14	24.00	1.219	0.116	23.1
Body Test data Sensor off 50%RB											
Back side-21mm	20	QPSK 50_0	133322/683	1:1	0.237	0.17	21.98	23.00	1.265	0.300	23.1
Left side-0mm	20	QPSK 50_0	133322/683	1:1	0.137	0.08	21.98	23.00	1.265	0.173	23.1
Right side-0mm	20	QPSK 50_0	133322/683	1:1	0.028	0.13	21.98	23.00	1.265	0.035	23.1
Top side-23mm	20	QPSK 50_0	133322/683	1:1	0.075	-0.01	21.98	23.00	1.265	0.095	23.1

Wi-Fi 5G SAR Test Record											
Ant2 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Body Test data Sensor on of U-NII-1&U-NII-2A(Separate 0mm)											
Back side	802.11a	60/5300	95.00%	1.053	0.301	0.18	7.52	8.00	1.117	0.354	22.7
Top side	802.11a	60/5300	95.00%	1.053	0.322	0.04	7.52	8.00	1.117	0.379	22.7
Body Test data Sensor on of U-NII-2C(Separate 0mm)											
Back side	802.11a	116/5580	95.00%	1.053	0.305	0.15	6.55	7.00	1.109	0.356	22.7
Top side	802.11a	116/5580	95.00%	1.053	0.339	0.05	6.55	7.00	1.109	0.396	22.7
Body Test data Sensor on of U-NII-3(Separate 0mm)											
Back side	802.11n-HT40	151/5755	89.53%	1.117	0.308	-0.14	7.58	8.00	1.102	0.379	22.7
Top side	802.11n-HT40	151/5755	89.53%	1.117	0.347	-0.08	7.58	8.00	1.102	0.427	22.7
Body Test data Sensor off of U-NII-1&U-NII-2A											
Back side-18mm	802.11a	64/5320	95.00%	1.053	0.259	0.00	16.72	17.00	1.067	0.291	22.7
Top side-20mm	802.11a	64/5320	95.00%	1.053	0.270	0.16	16.72	17.00	1.067	0.303	22.7
Body Test data Sensor off of U-NII-2C											
Back side-18mm	802.11a	116/5580	95.00%	1.053	0.249	0.19	13.69	14.00	1.074	0.281	22.7
Top side-20mm	802.11a	116/5580	95.00%	1.053	0.262	-0.06	13.69	14.00	1.074	0.296	22.7
Body Test data Sensor off of U-NII-3											
Back side-18mm	802.11n-HT40	151/5755	89.53%	1.117	0.508	0.16	18.62	19.00	1.091	0.619	22.7
Top side-20mm	802.11n-HT40	151/5755	89.53%	1.117	0.586	0.09	18.62	19.00	1.091	0.714	22.7
Body Test data Sensor off of U-NII-3 For Simultaneous											
Back side-18mm	802.11n-HT40	151/5755	89.53%	1.117	0.508	0.16	18.62	16.00	0.547	0.310	22.7
Top side-20mm	802.11n-HT40	151/5755	89.53%	1.117	0.586	0.09	18.62	16.00	0.547	0.358	22.7
Ant3 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(℃)
Body Test data of U-NII-1&U-NII-2A(Separate 0mm)											
Back side	802.11a	60/5300	95.00%	1.053	0.871	0.01	15.70	16.00	1.072	0.982	22.7
Back side-Repeat SAR	802.11a	60/5300	95.00%	1.053	0.866	-0.15	15.70	16.00	1.072	0.977	22.7
Back side	802.11a	52/5260	95.00%	1.053	0.809	0.05	15.40	16.00	1.148	0.978	22.7
Back side	802.11a	64/5320	95.00%	1.053	0.836	-0.14	15.62	16.00	1.091	0.960	22.7
Top side	802.11a	60/5300	95.00%	1.053	0.703	-0.06	15.70	16.00	1.072	0.793	22.7
Body Test data of U-NII-1&U-NII-2A(Separate 0mm) For Simultaneous											
Back side	802.11a	60/5300	95.00%	1.053	0.871	0.01	15.70	13.00	0.537	0.492	22.7
Back side	802.11a	52/5260	95.00%	1.053	0.809	0.05	15.40	13.00	0.575	0.490	22.7
Back side	802.11a	64/5320	95.00%	1.053	0.836	-0.14	15.62	13.00	0.547	0.481	22.7
Top side	802.11a	60/5300	95.00%	1.053	0.703	-0.06	15.70	13.00	0.537	0.397	22.7
Body Test data of U-NII-2C(Separate 0mm)											
Back side	802.11a	116/5580	95.00%	1.053	0.099	-0.18	12.25	13.00	1.189	0.124	22.7
Top side	802.11a	116/5580	95.00%	1.053	0.097	-0.06	12.25	13.00	1.189	0.121	22.7
Body Test data of U-NII-3(Separate 0mm)											

Test Position	Test ch./Freq.	Measured SAR (W/kg)	1 st Repeated	Ratio	2 nd Repeated	3 rd Repeated
Back side 0mm	60/5300	0.871	0.866	1.006	N/A	N/A
Note: 1) When the original highest measured SAR is ≥ 0.80 W/kg, the measurement was repeated once.						
2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was > 1.20 or when the original or repeated measurement was ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).						
3) A third repeated measurement was performed only if the original, first or second repeated measurement was ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .						
4) Repeated measurements are not required when the original highest measured SAR is < 0.80 W/kg						
5) The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds. The repeated measurement results must be clearly identified in the SAR report.						

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 82 of 92

8.2.17 SAR Result of WIFI 6G

Wi-Fi 6G SAR Test Record													
Ant2 Test Record													
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	APD (W/m ²)	Scaled APD (W/m ²)	Liquid Temp.(°C)
Body Test data(Separate 0mm)													
Back side	802.11ax 80M	103/6465	99.64%	1.004	0.201	0.04	8.09	9.00	1.233	0.249	0.94	1.16	23.1
Top side	802.11ax 80M	103/6465	99.64%	1.004	0.366	0.02	8.09	9.00	1.233	0.453	1.71	2.12	23.1
Top side	802.11ax 80M	7/5985	99.64%	1.004	0.524	0.05	8.03	9.00	1.250	0.658	2.45	3.07	23.1
Top side	802.11ax 80M	151/6705	99.64%	1.004	0.509	-0.05	7.89	9.00	1.291	0.660	2.38	3.08	23.1
Top side	802.11ax 80M	199/6945	99.64%	1.004	0.533	0.16	7.66	9.00	1.361	0.728	2.50	3.42	23.1
Top side	802.11ax 80M	215/7025	99.64%	1.004	0.325	0.15	7.47	9.00	1.422	0.464	1.52	2.17	23.1
Body Test data(Separate 0mm) For Simultaneous													
Back side	802.11ax 80M	103/6465	99.64%	1.004	0.201	0.04	8.09	5.00	0.491	0.099	0.94	0.46	23.1
Top side	802.11ax 80M	103/6465	99.64%	1.004	0.366	0.02	8.09	5.00	0.491	0.180	1.71	0.84	23.1
Top side	802.11ax 80M	7/5985	99.64%	1.004	0.524	0.05	8.03	5.00	0.498	0.262	2.45	1.22	23.1
Top side	802.11ax 80M	151/6705	99.64%	1.004	0.509	-0.05	7.89	5.00	0.514	0.263	2.38	1.23	23.1
Top side	802.11ax 80M	199/6945	99.64%	1.004	0.533	0.16	7.66	5.00	0.542	0.290	2.50	1.36	23.1
Top side	802.11ax 80M	215/7025	99.64%	1.004	0.325	0.15	7.47	5.00	0.566	0.185	1.52	0.86	23.1
Ant3 Test Record													
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	APD (W/m ²)	Scaled APD (W/m ²)	Liquid Temp.(°C)
Body Test data(Separate 0mm)													
Back side	802.11ax 80M	103/6465	99.68%	1.003	0.078	-0.09	8.61	9.00	1.094	0.086	0.37	0.41	23.1
Top side	802.11ax 80M	103/6465	99.68%	1.003	0.164	-0.01	8.61	9.00	1.094	0.180	0.77	0.85	23.1
Top side	802.11ax 80M	7/5985	99.68%	1.003	0.211	-0.10	8.25	9.00	1.189	0.252	0.99	1.18	23.1
Top side	802.11ax 80M	151/6705	99.68%	1.003	0.234	0.10	8.48	9.00	1.127	0.265	1.10	1.24	23.1
Top side	802.11ax 80M	199/6945	99.68%	1.003	0.215	0.11	8.52	9.00	1.117	0.241	1.01	1.13	23.1
Top side	802.11ax 80M	215/7025	99.68%	1.003	0.188	0.18	8.59	9.00	1.099	0.207	0.88	0.97	23.1
MIMO Test Record													
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	APD (W/m ²)	Scaled APD (W/m ²)	Liquid Temp.(°C)
Body Test data(Separate 0mm)													
Back side	802.11ax 80M	103/6465	99.68%	1.003	0.243	0.17	11.37	12.00	1.157	0.282	1.14	1.32	23.1
Top side	802.11ax 80M	103/6465	99.68%	1.003	0.414	-0.03	11.37	12.00	1.157	0.480	1.94	2.25	23.1
Top side	802.11ax 80M	7/5985	99.68%	1.003	0.636	-0.17	11.15	12.00	1.216	0.776	2.98	3.63	23.1
Top side	802.11ax 80M	151/6705	99.68%	1.003	0.615	-0.02	11.21	12.00	1.201	0.741	2.88	3.47	23.1
Top side	802.11ax 80M	199/6945	99.68%	1.003	0.645	0.03	11.12	12.00	1.224	0.792	3.02	3.71	23.1
Top side	802.11ax 80M	215/7025	99.68%	1.003	0.330	-0.12	11.08	12.00	1.237	0.410	1.55	1.92	23.1
Body Test data(Separate 0mm) For Simultaneous													
Back side	802.11ax 80M	103/6465	99.68%	1.003	0.243	0.17	11.37	8.00	0.460	0.112	1.14	0.53	23.1
Top side	802.11ax 80M	103/6465	99.68%	1.003	0.414	-0.03	11.37	8.00	0.460	0.191	1.94	0.90	23.1
Top side	802.11ax 80M	7/5985	99.68%	1.003	0.636	-0.17	11.15	8.00	0.484	0.309	2.98	1.45	23.1
Top side	802.11ax 80M	151/6705	99.68%	1.003	0.615	-0.02	11.21	8.00	0.478	0.295	2.88	1.38	23.1
Top side	802.11ax 80M	199/6945	99.68%	1.003	0.645	0.03	11.12	8.00	0.487	0.315	3.02	1.48	23.1
Top side	802.11ax 80M	215/7025	99.68%	1.003	0.330	-0.12	11.08	8.00	0.492	0.163	1.55	0.77	23.1



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 83 of 92

8.2.18 SAR Result of BT

Bluetooth SAR Test Record											
Ant2 Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Body Test data (Separate 0mm)											
Back side	DH5	39/2441	76.93%	1.3	0.305	0.15	10.92	11.00	1.019	0.404	22.9
Top side	DH5	39/2441	76.93%	1.3	0.555	0.03	10.92	11.00	1.019	0.735	22.9
Body Test data (Separate 0mm) For Simultaneous											
Back side	DH5	39/2441	76.93%	1.3	0.305	0.15	10.92	8.00	0.511	0.202	22.9
Top side	DH5	39/2441	76.93%	1.3	0.555	0.03	10.92	8.00	0.511	0.368	22.9



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 84 of 92

8.2.19 SAR Result of NFC

NFC SAR Test Record									
Ant5 Test Record									
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
NFC Test data (Separate 0mm)									
Front side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.9
Back side	NFC	13.56MHz	100.00%	1.000	0.035	0.03	1.000	0.035	22.9
Left side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.9
Right side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.9
Top side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.9
Bottom side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.9



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 85 of 92

8.3 Multiple Transmitter Evaluation

8.3.1 Simultaneous SAR test evaluation

•Simultaneous Transmission Possibilities

No.	Simultaneous Tx Combination	Body
1	WWAN + WLAN 2.4GHz Ant2	Yes
2	WWAN + WLAN 2.4GHz Ant3	Yes
3	WWAN + WLAN 2.4GHz MIMO	Yes
4	WLAN 2.4GHz Ant2 + WLAN 2.4GHz Ant3	Yes
5	WLAN 5GHz Ant2 + WLAN 5GHz Ant3 + BT	Yes
6	WWAN + WLAN 5GHz Ant2 + BT	Yes
7	WWAN + WLAN 5GHz Ant3 + BT	Yes
8	WWAN + WLAN 5GHz MIMO + BT	Yes
9	BT+ WLAN 6G Ant2 + WLAN 6G Ant3	Yes
10	WWAN + BT+ WLAN 6G Ant2	Yes
11	WWAN + BT+ WLAN 6G Ant3	Yes
12	WWAN + BT+ WLAN 6G MIMO	Yes

Test position		SARmax (W/kg)										
		Main Ant0	WiFi 2.4G Ant2	WiFi 2.4G Ant3	WiFi 2.4G MIMO	WiFi 5G Ant2	WiFi 5G Ant3	WiFi 5G MIMO	BT Ant2	WiFi 6E Ant2	WiFi 6E Ant3	WiFi 6E MIMO
		1	2	3	4	5	6	7	8	9	10	11
GSM850	Back side	0.829	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.064	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.010	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.420	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
GSM1900	Back side	0.485	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.102	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.025	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.691	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band II	Back side	0.469	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.590	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band IV	Back side	0.626	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.797	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band V	Back side	0.726	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.099	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.023	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.404	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 7	Back side	0.739	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.758	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 12(17)	Back side	0.590	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.150	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.069	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.221	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 13	Back side	0.617	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.166	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.048	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.289	0.400	0.235	0.793	0.427	0.397	0.409	0.368	0.290	0.265	0.315
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 25(2)	Back side	0.449	0.306	0.512	0.619	0.379	0.492	0.387	0.202	0.099	0.086	0.112
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000



Report No.: SUCR250500040509

Rev.: 01

Page: 87 of 92

[illegible]

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 88 of 92

Test position		Summed SAR											
		2+3	1+2	1+3	1+4	5+6+8	1+5+8	1+6+8	1+7+8	8+9+10	1+8+9	1+8+10	1+8+11
GSM850	Back side	0.818	1.135	1.341	1.448	1.073	1.410	1.523	1.418	0.425	1.142	1.143	1.167
	Left side	0.000	0.064	0.064	0.064	0.000	0.064	0.064	0.064	0.000	0.064	0.064	0.064
	Right side	0.000	0.010	0.010	0.010	0.000	0.010	0.010	0.010	0.000	0.010	0.010	0.010
	Top side	0.635	0.820	0.655	1.213	1.192	1.215	1.185	1.197	1.083	1.126	1.165	1.216
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
GSM1900	Back side	0.818	0.791	0.997	1.104	1.073	1.066	1.179	1.074	0.425	0.798	0.799	0.823
	Left side	0.000	0.102	0.102	0.102	0.000	0.102	0.102	0.102	0.000	0.102	0.102	0.102
	Right side	0.000	0.025	0.025	0.025	0.000	0.025	0.025	0.025	0.000	0.025	0.025	0.025
	Top side	0.635	1.091	0.926	1.484	1.192	1.486	1.456	1.468	1.083	1.397	1.436	1.487
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band II	Back side	0.818	0.775	0.981	1.088	1.073	1.050	1.163	1.058	0.425	0.782	0.783	0.807
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.635	0.990	0.825	1.383	1.192	1.385	1.355	1.367	1.083	1.296	1.335	1.386
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band IV	Back side	0.818	0.932	1.138	1.245	1.073	1.207	1.320	1.215	0.425	0.939	0.940	0.964
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.635	1.197	1.032	1.590	1.192	1.592	1.562	1.574	1.083	1.503	1.542	1.593
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
WCDMA Band V	Back side	0.818	1.032	1.238	1.345	1.073	1.307	1.420	1.315	0.425	1.039	1.040	1.064
	Left side	0.000	0.099	0.099	0.099	0.000	0.099	0.099	0.099	0.000	0.099	0.099	0.099
	Right side	0.000	0.023	0.023	0.023	0.000	0.023	0.023	0.023	0.000	0.023	0.023	0.023
	Top side	0.635	0.804	0.639	1.197	1.192	1.199	1.169	1.181	1.083	1.110	1.149	1.200
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 7	Back side	0.818	1.045	1.251	1.358	1.073	1.320	1.433	1.328	0.425	1.052	1.053	1.077
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.635	1.158	0.993	1.551	1.192	1.553	1.523	1.535	1.083	1.464	1.503	1.554
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 12(17)	Back side	0.818	0.896	1.102	1.209	1.073	1.171	1.284	1.179	0.425	0.903	0.904	0.928
	Left side	0.000	0.150	0.150	0.150	0.000	0.150	0.150	0.150	0.000	0.150	0.150	0.150
	Right side	0.000	0.069	0.069	0.069	0.000	0.069	0.069	0.069	0.000	0.069	0.069	0.069
	Top side	0.635	0.621	0.456	1.014	1.192	1.016	0.986	0.998	1.083	0.927	0.966	1.017
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 13	Back side	0.818	0.923	1.129	1.236	1.073	1.198	1.311	1.206	0.425	0.930	0.931	0.955
	Left side	0.000	0.166	0.166	0.166	0.000	0.166	0.166	0.166	0.000	0.166	0.166	0.166
	Right side	0.000	0.048	0.048	0.048	0.000	0.048	0.048	0.048	0.000	0.048	0.048	0.048
	Top side	0.635	0.689	0.524	1.082	1.192	1.084	1.054	1.066	1.083	0.995	1.034	1.085
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
LTE Band 25(2)	Back side	0.818	0.755	0.961	1.068	1.073	1.030	1.143	1.038	0.425	0.762	0.763	0.787
	Left side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Right side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Top side	0.635	1.003	0.838	1.396	1.192	1.398	1.368	1.380	1.083	1.309	1.348	1.399
	Bottom side	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000	0.000
	Back side	0.818	0.835	1.041	1.148	1.073	1.110	1.223	1.118	0.425	0.842	0.843	0.867



Report No.: SUCR250500040509

Rev.: 01

Page: 89 of 92

[illegible]

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509

Rev.: 01

Page: 90 of 92

9 Equipment list

Test Platform		SPEAG DASY5 Professional				
		SPEAG DASY8 Professional				
Description		SAR Test System				
Software Reference		DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)				
		cDASY8 V16.2.0.1425				
		cDASY8 V16.4.0.5005				
Hardware Reference						
Equipment		Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration
☒	Twin Phantom	SPEAG	ELI V5.0	1239	NCR	NCR
☒	Twin Phantom	SPEAG	ELI V8.0	2217	NCR	NCR
☒	DAE	SPEAG	DAE4	1245	2024-06-05	2025-06-04
☒	DAE	SPEAG	DAE4ip	1826	2025-02-17	2026-02-16
☒	E-Field Probe	SPEAG	EX3DV4	7735	2025-01-29	2026-01-28
☒	E-Field Probe	SPEAG	EX3DV4	3923	2024-11-04	2025-11-03
☒	Validation Kits	SPEAG	CLA13	1032	2023-02-09	2026-02-08
☒	Validation Kits	SPEAG	D750V3	1214	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24
☒	Validation Kits	SPEAG	D1750V2	1105	2023-11-03	2026-11-02
☒	Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03
☒	Validation Kits	SPEAG	D2300V2	1096	2025-04-01	2028-03-31
☒	Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27
☒	Validation Kits	SPEAG	D2600V2	1158	2025-03-31	2028-03-30
☒	Validation Kits	SPEAG	D5GHzV2	1174	2023-08-23	2026-08-22
☒	Validation Kits	SPEAG	D6.5GHzV2	1102	2023-09-11	2026-09-10
☒	Dielectric parameter probes	SPEAG	DAKS-3.5	1120	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R140	50920	2024-08-19	2025-08-18
☒	Dielectric parameter probes	SPEAG	DAKS-12	1043	2024-08-20	2025-08-19
☒	Vector Network Analyzer and Vector Reflectometer	SPEAG	DAKS_VNA R60	21423005	2024-08-20	2025-08-19
☒	Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-12	2025-09-11
☒	RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR
☒	Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04
☒	Preamplifier	Qiji	YX28980933	202104001	NCR	NCR
☒	USB Average Power Sensor	Keysight	U2002H	MY5639004	2024-09-10	2025-09-09
☒	USB Average Power Sensor	Agilent	U2002H	MY48200110	2024-11-21	2025-11-20
☒	Average Power Sensor	R&S	NRP6A	103953	2024-11-20	2025-11-19
☒	Average Power Sensor	R&S	NRP6A	103954	2024-11-20	2025-11-19



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 91 of 92

☒	Attenuator	SHX	TS2-3dB	30704	NCR	NCR
☒	Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR
☒	Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR
☒	DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR
☒	Speed reading thermometer	LKM	DTM3000	NA	2024-09-14	2025-09-13
☒	Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-09-16	2025-09-15

Note: All the equipments are within the valid period when the tests are performed.



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250500040509
Rev.: 01
Page: 92 of 92

10 Calibration certificate

Please see the Appendix C

11 Photographs

Please see the Appendix D

Appendix A: Detailed System Check Results

Appendix B: Detailed Test Results

Appendix C: Calibration certificate

Appendix D: Photographs

Appendix E: Conducted RF Output Power

---END---
