

WA-F-S6G2R0R0-02-001 Specification

1. Explanation of part number :

WA - E - S6G2R0R0 - 02 - 001
(1) (2) (3) (4) (5)

(1) Product Type : Wireless Antenna

(2) Material:: NFC+Plastic+FPCB+Cu+Cable

(3) Frequency : 2400~2500MHz, 5150~5850MHz, 13.56MHz

(4) Coaxial Cable Type : 02

(5) Suffix : 001

2. Storage Condition:

Temperature -40 to +70℃
Humidity 20 to 65 %RH

3. Operating Condition:

Temperature -40 to +70℃
Humidity 10 to 85 %RH

4. Electrical Specification :

Those specifications were specially defined for T3 model, and all characteristics were measured under the model's handset testing jig .

4-1. Frequency Band:

Frequency Band	MHz
WIFI	2400~2500, 5150~5850
NFC	13.56

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=± 0.15 X.X=±0.1 X.XX=±0.05
ANGLES=± 1 HOLEDIA=±0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm
DRAWN BY: 尹猛 张涛 CHECKED BY: 李志强
DESIGNED BY: 周煜 余超 APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT NO.	PAGE REV.
	P0

4-2. Impedance

50 ohm nominal

4-3. Matching circuit

None

4-4. VSWR

4-4.1 Measuring Method


1.A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR

2.Keeping this jig away from metal at least 20cm

4-4.2 Measurement frequency points and VSWR value

Frequency (Unit MHz)	Spec	Ant-main	Ant-aux
2400	≤ 2.5	1.3	
2500	≤ 3.0	1.6	
5150	≤ 3.5	1.4	
5850	≤ 3.5	1.3	
Judgement		ok	ok

Ant-main

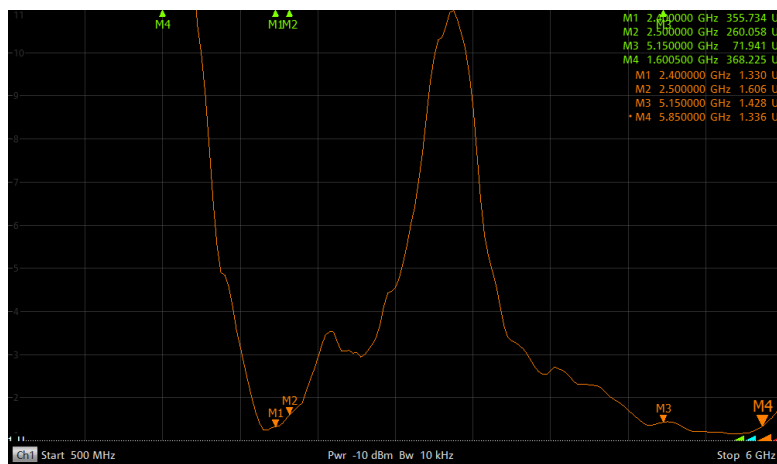

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=± 0.15 X.X=±0.1 X.XX=±0.05
ANGLES=± 1 HOLEDIA=±0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY: 尹猛 张涛

CHECKED BY: 李志强

DESIGNED BY: 周煜 余超

APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT
NO.

PAGE REV.
P0

4-5. Efficiency and Gain

4-5.1 Measuring equipment

Measuring instrument:


Microwave chamber, Network analyzer, and standard antenna.

Instructions for microwave chamber:

This is a microwave chamber set up by our company in Suzhou, This microwave chamber belongs to a set of near-field measurement system. The size of the chamber is 2.95M * 3M * 3M.



RayZone2800 Test Setup

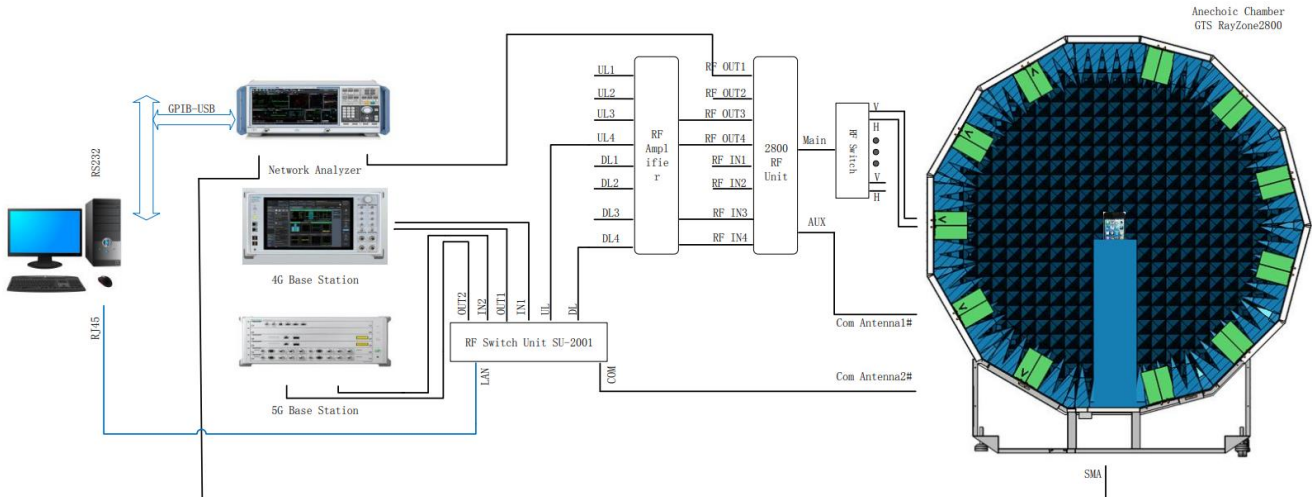

The microwave chamber, shown above, using a unique multi-probe technique, The aim is to reduce the measurement time of the whole measurement system. The measuring system use multi-probe array instead of single probe to scan the measured surface of the antenna under test, a single probe has the capability of measuring orthogonal polarization amplitude and phase, it also has a wide frequency range, the corresponding multi-probe array is switched quickly by electronic switch, greatly improved the measurement efficiency.

The probe model: MA186960A(400MHz~7.5GHz) . Because of its capability of broadband frequency and the orthogonal polarization function, the number of probes needed to be equipped with the system is reduced; The small size of the probe reduces the coupling between the probes, make it is possible to insert probes of other frequency bands between probes, then a single system can support a wider frequency range.

UNLESS OTHER SPECIFIED TOLERANCES ON : X=± 0.15 X.X=±0.1 X.XX=±0.05 ANGLES=± 1 HOLEDIA=±0.1		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 尹猛 张涛	CHECKED BY: 李志强		
DESIGNED BY : 周煜 余超	APPROVED BY : 唐龙		
TITLE : WA-F-S6G2R0R0-02-001		DOCUMENT NO.	PAGE REV. P0

4-5.2 Passive Efficiency and Gain

Antenna gain is marked (dBi) and is based on STANDARD HORN antenna. The data shows Peak Gain and Average Gain.

天线效率			
Freq(MHz)	Efficiency_ dB	Efficiency_ Pcent	Gain
2400	-5.2	30.3	1.3
2410	-5.7	27.1	1.2
2420	-5.4	29.0	0.9
2430	-5.3	29.3	1.2
2440	-5.0	31.4	1.5
2450	-5.1	31.1	2.1
2460	-5.5	27.9	2.2
2470	-5.6	27.3	1.6
2480	-5.3	29.3	1.5
2500	-5.4	28.5	2.0
5150	-5.9	25.6	1.5
5200	-6.1	24.4	2.2
5250	-5.7	27.2	2.1
5300	-5.4	29.0	2.4
5350	-5.2	30.5	2.9
5400	-5.2	30.5	3.2
5450	-4.6	34.7	3.2
5470	-4.2	37.7	2.7
5500	-3.6	43.5	3.1
5550	-3.6	43.4	3.2
5600	-3.5	44.5	3.7
5650	-3.6	43.5	3.4
5700	-3.5	44.8	3.4
5725	-3.4	45.9	3.2
5745	-3.5	45.0	3.3
5750	-3.5	44.6	3.9
5797	-4.2	37.7	3.8
5800	-4.0	39.5	2.9
5850	-4.7	34.1	2.8

UNLESS OTHER SPECIFIED TOLERANCES ON :
 $X = \pm 0.15$ $X.X = \pm 0.1$ $X.XX = \pm 0.05$
 ANGLES = ± 1 HOLEDIA = ± 0.1



佳邦科技股份有限公司
 INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm
 DRAWN BY: 尹猛 张涛 CHECKED BY: 李志强
 DESIGNED BY: 周煜 余超 APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION


TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT NO.	PAGE REV.
	P0

4-5.3 Active test data

		信道	SPEC	OTA-
WIFI 11b (11M)	TRP	1	12	12.0
		7	12	12.3
		11	12	12.1
	TIS	1		
		7		
		11	-83	-83.4
WIFI 11g (54M)	TRP	1	10	10.7
		7	10	10.8
		11	10	10.8
	TIS	1		
		7		
		11	-69	-69.1
WIFI 11 n (MCS7-65M)	TRP	1	9	10.0
		7	9	10.2
		11	9	10.6
	TIS	1		
		7		
		11	-67	-67.2
WIFI 11 a (54M)	TRP	36	9	10.0
		64	9	11.2
		165	9	13.7
	TIS	36		
		64		
		165	-69	-70.4

4-5.4 Antenna 3D Radiation Pattern

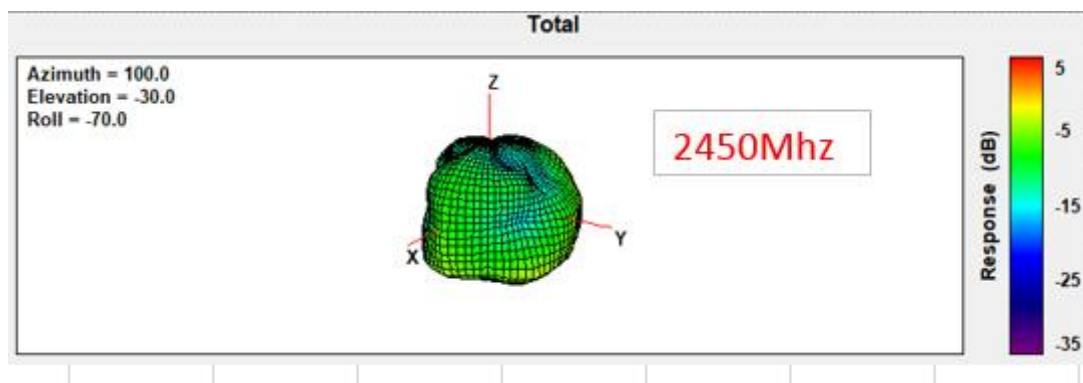

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=± 0.15 X.X=±0.1 X.XX=±0.05
ANGLES=± 1 HOLEDIA=±0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


SCALE : UNIT : mm
DRAWN BY: 尹猛 张涛 CHECKED BY: 李志强
DESIGNED BY: 周煜 余超 APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT
NO.


PAGE REV.
P0

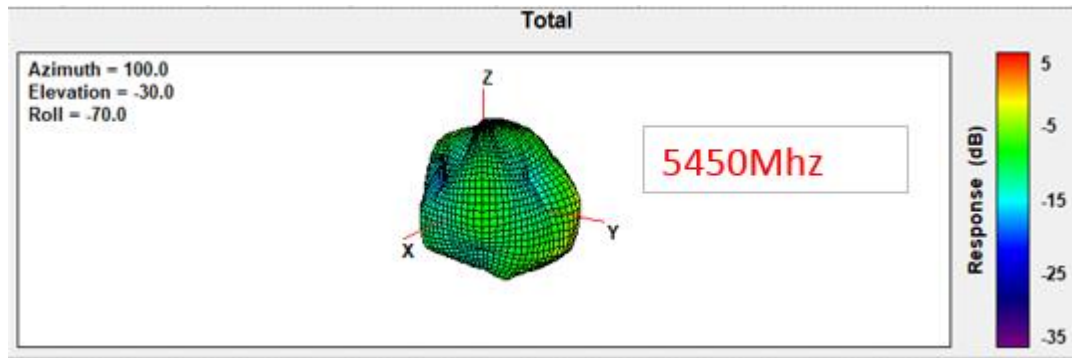

5. Recognition Distance

Chip name		Ultralight -C	Ultralight	M1-S50	S70	Mifare-Plus	Des fire	18092	ISO 15693	Type B
Recognition Distance	左	20↑	30↑	36↑	35↑	33↑	36↑	23↑	39↑	19↑
	右	20↑	30↑	36↑	35↑	32↑	35↑	23↑	38↑	19↑

6 · NFC Antenna Reader Mode Load Impedance

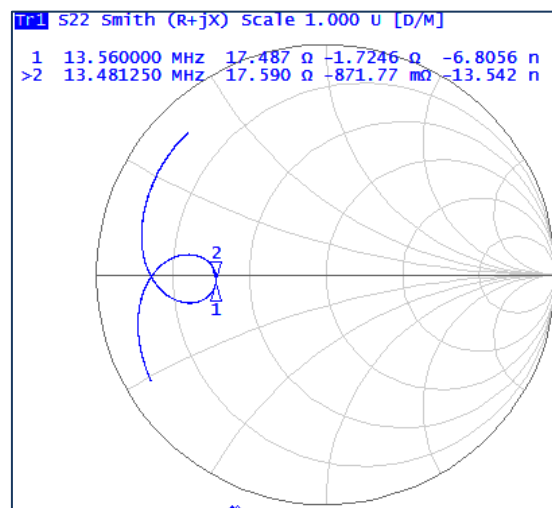

UNLESS OTHER SPECIFIED TOLERANCES ON :
 X=± 0.15 X.X=±0.1 X.XX=±0.05
 ANGLES=± 1 HOLEDIA=±0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE : UNIT : mm
 DRAWN BY: 尹猛 张涛 CHECKED BY: 李志强
 DESIGNED BY: 周煜 余超 APPROVED BY: 唐龙


THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT NO.		PAGE REV.
		P0


7. Mechanical Specification:

Mechanical Configuration: (“#” 为出货检验尺寸， “*” 为生产管控尺寸)

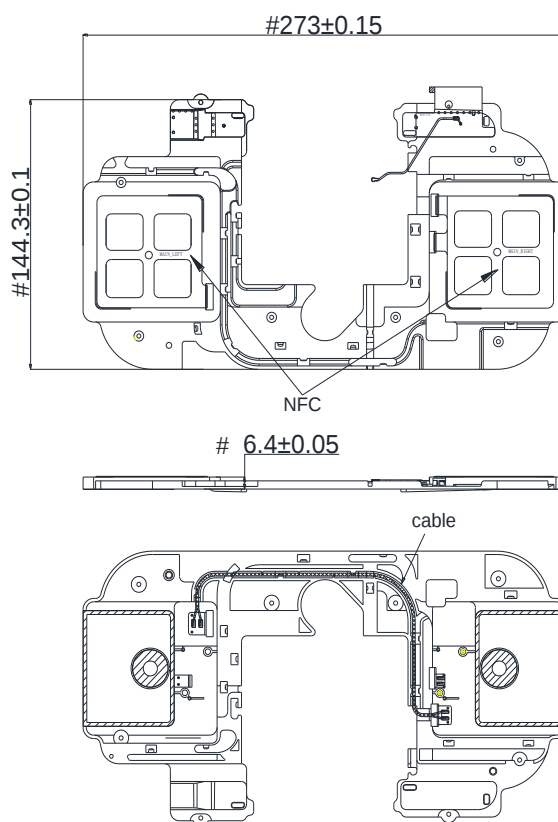


UNLESS OTHER SPECIFIED TOLERANCES ON :		 佳邦科技股份有限公司 INPAQ TECHNOLOGY CO., LTD.	
X=± 0.15 X.X=±0.1 X.XX=±0.05 ANGLES=± 1 HOLEDIA=±0.1			
SCALE :	UNIT : mm	THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION	
DRAWN BY: 尹猛 张涛	CHECKED BY: 李志强		
DESIGNED BY : 周煜 余超	APPROVED BY : 唐龙		
TITLE : WA-F-S6G2R0R0-02-001		DOCUMENT NO.	PAGE REV.
			P0

FPCB WIFI

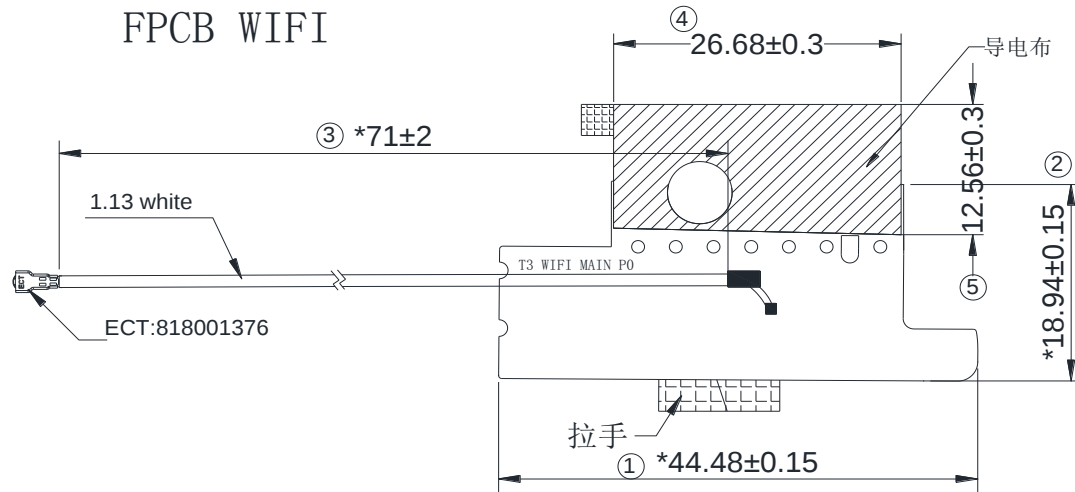

NFC MAIN_RIGHT

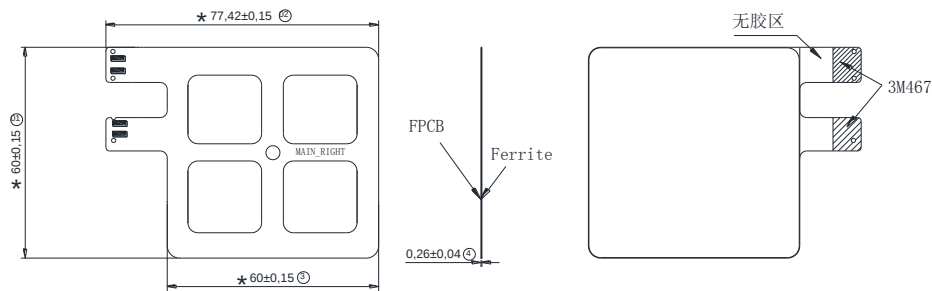

UNLESS OTHER SPECIFIED TOLERANCES ON :
X=± 0.15 X.X=±0.1 X.XX=±0.05
ANGLES=± 1 HOLEDIA=±0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.


SCALE : UNIT : mm
DRAWN BY: 尹猛 张涛 CHECKED BY: 李志强
DESIGNED BY: 周煜 余超 APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT NO.	PAGE REV.
	P0

NFC
MAIN_LEFT

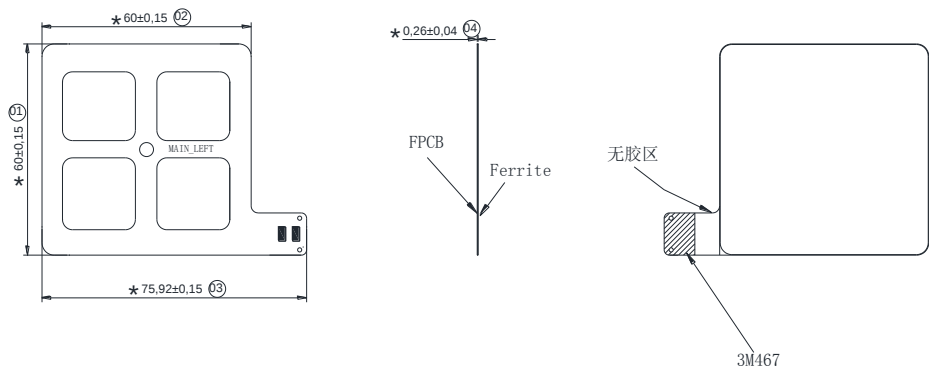

UNLESS OTHER SPECIFIED TOLERANCES ON :
 $X = \pm 0.15$ $X.X = \pm 0.1$ $X.XX = \pm 0.05$
ANGLES = ± 1 HOLEDIA = ± 0.1



佳邦科技股份有限公司
INPAQ TECHNOLOGY CO., LTD.

SCALE :

UNIT : mm

DRAWN BY: 尹猛 张涛

CHECKED BY: 李志强

DESIGNED BY: 周煜 余超

APPROVED BY: 唐龙

THIS DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INPAQ TECHNOLOGY CO.,LTD.AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS OR DEVICES WITHOUT PERMISSION

TITLE : WA-F-S6G2R0R0-02-001

DOCUMENT
NO.

PAGE REV.
P0