



**中认信通**

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



# TEST REPORT

**Applicant:** Shanghai Sunmi Technology Co.,Ltd.

**Address:** Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China

**FCC ID:** 2AH25T5810

**Product Name:** Smart POS system

**Model Number:** T5810

**Standard(s):** 47 CFR Part 15, Subpart C(15.247)  
ANSI C63.10-2013  
KDB 558074 D01 15.247 Meas Guidance v05r02

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

**Report Number:** CR21100085-00B

**Date Of Issue:** 2022-03-24

**Reviewed By:** Sun Zhong

*Sun Zhong*

**Title:** Manager

**Test Laboratory:** China Certification ICT Co., Ltd (Dongguan)

No. 113, Pingkang Road, Dalang Town, Dongguan,  
Guangdong, China  
Tel: +86-769-82016888

**Test Facility**

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

**Declarations**

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

# CONTENTS

|                                                                     |           |
|---------------------------------------------------------------------|-----------|
| <b>TEST FACILITY .....</b>                                          | <b>2</b>  |
| <b>DECLARATIONS.....</b>                                            | <b>2</b>  |
| <b>1. GENERAL INFORMATION .....</b>                                 | <b>5</b>  |
| <b>1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....</b> | <b>5</b>  |
| <b>1.2 DESCRIPTION OF TEST CONFIGURATION.....</b>                   | <b>8</b>  |
| 1.2.2 Support Equipment List and Details .....                      | 8         |
| 1.2.3 Support Cable List and Details .....                          | 8         |
| 1.2.4 Block Diagram of Test Setup.....                              | 9         |
| <b>1.3 MEASUREMENT UNCERTAINTY .....</b>                            | <b>11</b> |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                             | <b>12</b> |
| <b>3. REQUIREMENTS AND TEST PROCEDURES .....</b>                    | <b>13</b> |
| <b>3.1 AC LINE CONDUCTED EMISSIONS.....</b>                         | <b>13</b> |
| 3.1.1 Applicable Standard.....                                      | 13        |
| 3.1.2 EUT Setup.....                                                | 14        |
| 3.1.3 EMI Test Receiver Setup .....                                 | 14        |
| 3.1.4 Test Procedure .....                                          | 15        |
| 3.1.5 Corrected Amplitude & Margin Calculation.....                 | 15        |
| <b>3.2 RADIATION SPURIOUS EMISSIONS.....</b>                        | <b>16</b> |
| 3.2.1 Applicable Standard.....                                      | 16        |
| 3.2.2 EUT Setup.....                                                | 16        |
| 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup .....             | 17        |
| 3.2.4 Test Procedure .....                                          | 18        |
| 3.2.5 Corrected Amplitude & Margin Calculation.....                 | 18        |
| <b>3.3 6 DB EMISSION BANDWIDTH:.....</b>                            | <b>19</b> |
| 3.3.1 Applicable Standard.....                                      | 19        |
| 3.3.2 EUT Setup.....                                                | 19        |
| 3.3.3 Test Procedure .....                                          | 19        |
| <b>3.4 MAXIMUM PEAK CONDUCTED OUTPUT POWER:.....</b>                | <b>19</b> |
| 3.4.1 Applicable Standard.....                                      | 19        |
| 3.4.2 EUT Setup.....                                                | 19        |
| 3.4.3 Test Procedure .....                                          | 20        |
| <b>3.5 MAXIMUM POWER SPECTRAL DENSITY: .....</b>                    | <b>20</b> |
| 3.5.1 Applicable Standard.....                                      | 20        |
| 3.5.2 EUT Setup.....                                                | 20        |
| 3.5.3 Test Procedure .....                                          | 20        |
| <b>3.6 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE: .....</b>          | <b>21</b> |
| 3.6.1 Applicable Standard.....                                      | 21        |
| 3.6.2 EUT Setup.....                                                | 21        |
| 3.6.3 Test Procedure .....                                          | 21        |
| <b>3.7 DUTY CYCLE:.....</b>                                         | <b>22</b> |
| 3.7.1 EUT Setup.....                                                | 22        |

|                                               |           |
|-----------------------------------------------|-----------|
| 3.7.2 Test Procedure .....                    | 22        |
| <b>3.8 ANTENNA REQUIREMENT .....</b>          | <b>22</b> |
| 3.8.1 Applicable Standard .....               | 22        |
| 3.8.2 Judgment .....                          | 22        |
| <b>4. Test DATA AND RESULTS .....</b>         | <b>23</b> |
| 4.1 AC LINE CONDUCTED EMISSIONS .....         | 23        |
| 4.2 RADIATION SPURIOUS EMISSIONS .....        | 28        |
| 4.3 MAXIMUM PEAK CONDUCTED OUTPUT POWER ..... | 49        |
| <b>5. RF EXPOSURE EVALUATION .....</b>        | <b>51</b> |
| 5.1 APPLICABLE STANDARD .....                 | 51        |
| 5.2 PROCEDURE .....                           | 51        |
| 5.3 MEASUREMENT RESULT .....                  | 51        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment under Test (EUT)

|                                                                                                                                                                                                                                                                                                                                                                                 |                                                                                   |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| <b>EUT Name:</b>                                                                                                                                                                                                                                                                                                                                                                | Smart POS system                                                                  |
| <b>EUT Model:</b>                                                                                                                                                                                                                                                                                                                                                               | T5810                                                                             |
| <b>Operation Frequency:</b>                                                                                                                                                                                                                                                                                                                                                     | 2412-2462 MHz(802.11b/g/n ht20), 2422-2452 MHz(802.11n ht40)<br>2402-2480MHz(BLE) |
| <b>Maximum Peak Output Power (Conducted):</b>                                                                                                                                                                                                                                                                                                                                   | 27.55 dBm(802.11b/g/n)<br>3.52 dBm(BLE)                                           |
| <b>Modulation Type:</b>                                                                                                                                                                                                                                                                                                                                                         | DSSS, OFDM(802.11b/g/n)<br>GFSK(BLE)                                              |
| <b>Rated Input Voltage:</b>                                                                                                                                                                                                                                                                                                                                                     | DC 5V from adapter and DC 3.8V from battery                                       |
| <b>Serial Number:</b>                                                                                                                                                                                                                                                                                                                                                           | CR21100085-RF-S2(Type-1)<br>CR21100085-RF-S1(Type-2)                              |
| <b>EUT Received Date:</b>                                                                                                                                                                                                                                                                                                                                                       | 2021.11.15                                                                        |
| <b>EUT Received Status:</b>                                                                                                                                                                                                                                                                                                                                                     | Good                                                                              |
| Note:<br>The EUT model has two configurations that Type-1 is none code scanner and Type-2 is added code scanner.<br>The adapter 1# power mode was reported for Radiation Below 1GHz test, since adapter 1# and adapter 2# power mode were proved to be compliance with 15.207&15.209 emission requirements in BT report CR21100085-00A, and the worst is adapter 1# power mode. |                                                                                   |

#### Operation Frequency Detail:

##### For 802.11b/g/n ht20:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 1       | 2412            | 7       | 2442            |
| 2       | 2417            | 8       | 2447            |
| 3       | 2422            | 9       | 2452            |
| 4       | 2427            | 10      | 2457            |
| 5       | 2432            | 11      | 2462            |
| 6       | 2437            | /       | /               |

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

| Test Channel | Frequency (MHz) |
|--------------|-----------------|
| Lowest       | 2412            |
| Middle       | 2437            |
| Highest      | 2462            |

##### For 802.11n ht40:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 3       | 2422            | 7       | 2442            |
| 4       | 2427            | 8       | 2447            |
| 5       | 2432            | 9       | 2452            |
| 6       | 2437            | /       | /               |

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

| Test Channel | Frequency (MHz) |
|--------------|-----------------|
| Lowest       | 2422            |
| Middle       | 2437            |
| Highest      | 2452            |

**For BLE:**

| Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|
| 0       | 2402            | 20      | 2442            |
| 1       | 2404            | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ...     | ...             | ...     | ...             |
| ..      | ...             | 38      | 2478            |
| 19      | 2440            | 39      | 2480            |

Per section 15.31(m), the lowest frequency, middle frequency, and highest frequency were performed the test as below:

| Test Channel | Frequency (MHz) |
|--------------|-----------------|
| Lowest       | 2402            |
| Middle       | 2440            |
| Highest      | 2480            |

**Antenna Information Detail ▲:**

**For Type-2:**

| Antenna Manufacturer                                                                                                                                                                                                                                                                                                                                                                             | Antenna Type | input impedance (Ohm) | Antenna Gain /Frequency Range | §15.203 Requirement |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|-------------------------------|---------------------|
| Shanghai Sunmi Technology Co.,Ltd.                                                                                                                                                                                                                                                                                                                                                               | FPC          | 50                    | 2.4 dBi/2.4~2.5GHz            | Compliance          |
| The Method of §15.203 Compliance:<br><input checked="" type="checkbox"/> Antenna must be permanently attached to the unit.<br><input type="checkbox"/> Antenna must use a unique type of connector to attach to the EUT.<br><input type="checkbox"/> Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. |              |                       |                               |                     |

**For Type-1:**

| Antenna Manufacturer                                                                                                                                                                                                                                                                                                                                                                             | Antenna Type | input impedance (Ohm) | Antenna Gain /Frequency Range | §15.203 Requirement |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|-----------------------|-------------------------------|---------------------|
| Shanghai Sunmi Technology Co.,Ltd.                                                                                                                                                                                                                                                                                                                                                               | FPC          | 50                    | 1.5 dBi/2.4~2.5GHz            | Compliance          |
| The Method of §15.203 Compliance:<br><input checked="" type="checkbox"/> Antenna must be permanently attached to the unit.<br><input type="checkbox"/> Antenna must use a unique type of connector to attach to the EUT.<br><input type="checkbox"/> Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit. |              |                       |                               |                     |

**Accessory Information:**

| <b>Accessory Description</b> | <b>Manufacturer</b>                  | <b>Model</b>      | <b>Parameters</b>                                 |
|------------------------------|--------------------------------------|-------------------|---------------------------------------------------|
| USB Cable                    | Unknown                              | Unknown           | Un-shield, 1 m                                    |
| Adapter 1#                   | SHENZHEN TIANYIN ELECTRONICS Co.,Ltd | TPA-23A050200UU01 | Input: 100-240V~50/60Hz<br>0.3A<br>Output: 5V/2A  |
| Adapter 2#                   | Jiangsu Chenyang Eletron Co.,Ltd     | UC13US            | Input: 100-240V~50/60Hz<br>0.35A<br>Output: 5V/2A |

## 1.2 Description of Test Configuration

### 1.2.1 EUT Operation Condition:

#### For 802.11b/g/n:

| <b>EUT Operation Mode:</b>                                                                                                                                                                       |           | The system was configured for testing in Engineering Mode, which was provided by the manufacturer. |                |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|----------------------------------------------------------------------------------------------------|----------------|-----------------|
| <b>Equipment Modifications:</b>                                                                                                                                                                  |           | No                                                                                                 |                |                 |
| <b>EUT Exercise Software:</b>                                                                                                                                                                    |           | engineering mode                                                                                   |                |                 |
| The software " engineering mode "was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲：                                                |           |                                                                                                    |                |                 |
| Test Modes                                                                                                                                                                                       | Data Rate | Power Level Setting                                                                                |                |                 |
|                                                                                                                                                                                                  |           | Lowest Channel                                                                                     | Middle Channel | Highest Channel |
| 802.11b                                                                                                                                                                                          | 1Mbps     | 20                                                                                                 | 20             | 20              |
| 802.11g                                                                                                                                                                                          | 6Mbps     | 22                                                                                                 | 22             | 22              |
| 802.11n ht20                                                                                                                                                                                     | MCS0      | 18                                                                                                 | 18             | 18              |
| 802.11n ht40                                                                                                                                                                                     | MCS0      | 16                                                                                                 | 16             | 16              |
| The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations. |           |                                                                                                    |                |                 |

#### For BLE:

|                                                                                                                                                   |                                                                                                    |                |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------|----------------|-----------------|
| EUT Operation Mode:                                                                                                                               | The system was configured for testing in Engineering Mode, which was provided by the manufacturer. |                |                 |
| Equipment Modifications:                                                                                                                          | No                                                                                                 |                |                 |
| EUT Exercise Software:                                                                                                                            | engineering mode                                                                                   |                |                 |
| The software " engineering mode "was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲: |                                                                                                    |                |                 |
| Test Modes                                                                                                                                        | Power Level Setting                                                                                |                |                 |
|                                                                                                                                                   | Lowest Channel                                                                                     | Middle Channel | Highest Channel |
| 1Mbps                                                                                                                                             | Default                                                                                            | Default        | Default         |
| 2Mbps                                                                                                                                             | Default                                                                                            | Default        | Default         |

### 1.2.2 Support Equipment List and Details

| Manufacturer | Description | Model   | Serial Number |
|--------------|-------------|---------|---------------|
| Unknown      | Earphone    | Unknown | Earphone 02   |


### 1.2.3 Support Cable List and Details

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From Port | To            |
|-------------------|----------------|--------------|------------|-----------|---------------|
| AC power cable    | No             | No           | 1          | Adapter   | LISN/AC Mains |
| USB cable         | No             | No           | 1          | EUT       | Adapter       |
| Earphone Cable    | No             | No           | 1.2        | EUT       | Earphone      |




### 1.2.4 Block Diagram of Test Setup


AC line conducted emissions:

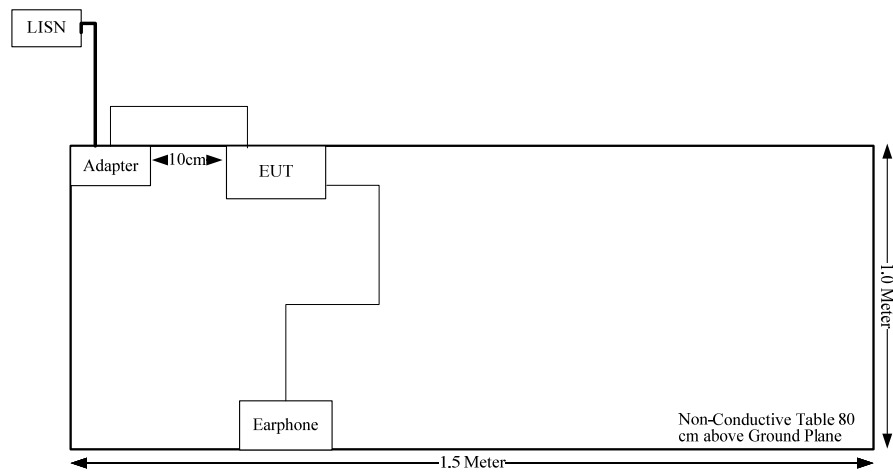

Spurious emissions Below 1GHz:

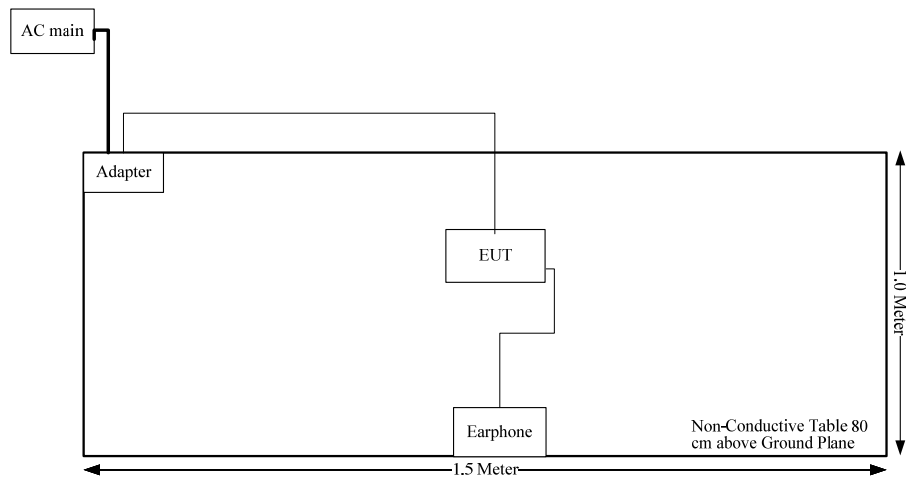

Spurious emissions Above 1GHz:

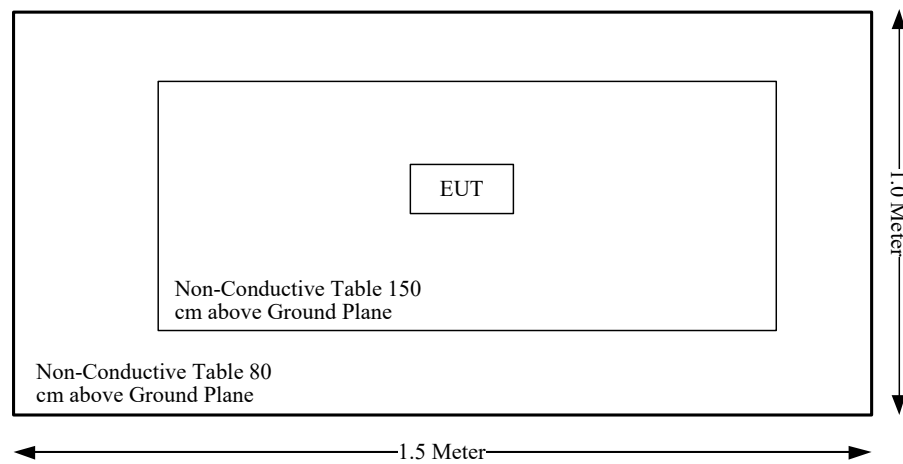

### 1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

| Parameter                         | Measurement Uncertainty                                                                                                 |
|-----------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                                    |
| RF output power, conducted        | ±0.61dB                                                                                                                 |
| Power Spectral Density, conducted | ±0.61 dB                                                                                                                |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.15 dB, 200M~1GHz: 5.61 dB, 1G~6GHz: 5.14 dB,<br>6G~18GHz: 5.93 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB |
| Unwanted Emissions, conducted     | ±1.26 dB                                                                                                                |
| Temperature                       | ±1 °C                                                                                                                   |
| Humidity                          | ±5%                                                                                                                     |
| DC and low frequency voltages     | ±0.4%                                                                                                                   |
| Duty Cycle                        | 1%                                                                                                                      |
| AC Power Lines Conducted Emission | 2.8 dB (150 kHz to 30 MHz)                                                                                              |

## 2. SUMMARY OF TEST RESULTS

| Standard(s) Section                | Test Items                               | Result      |
|------------------------------------|------------------------------------------|-------------|
| §15.207(a)                         | AC line conducted emissions              | Compliance  |
| §15.205, §15.209,<br>§15.247(d)    | Spurious Emissions                       | Compliance  |
| §15.247 (a)(2)                     | 6 dB Bandwidth                           | Compliance* |
| §15.247(b)(3)                      | Maximum Conducted Output Power           | Compliance* |
| §15.247(d)                         | 100 kHz Bandwidth of Frequency Band Edge | Compliance* |
| §15.247(e)                         | Power Spectral Density                   | Compliance* |
| §15.203                            | Antenna Requirement                      | Compliance  |
| §15.247 (i) & §1.1310 &<br>§2.1093 | RF Exposure                              | Compliance  |

Note:

Compliance\*:

The device was changed based on the certified device, FCC ID: 2AH25T5810, the changes as below:

- Added scan code function, and changed WLAN and GPS antenna.  
Original WLAN and GPS antenna model: SH19453IB83-1.  
New WLAN and GPS antenna model is: SH-045-016-OK-A.  
And the product without scan coder's WLAN and GPS antenna model is: SH19453IB83-1.
- Changed the GSM/WCDMA/LTE main antenna.
- The product with scan coder changed the LTE DIV antenna.  
Original LTE DIV Antenna: SH19453IA68  
New LTE DIV Antenna: SH-045-017-10-OK-A
- Changed the CPU from "MT6761D" to "MT8766".
- Changed MCU/CPU from "MH1902" to "MH1902T".
- Add two adapters

Per check with the RF output power, the RF parameters are same with the certified device. So the changes are not affect the test result of RF conducted tests. Therefore, the AC Line conducted test, Radiation Below 1GHz test, Radiation above 1GHz test were performed. The data not affect please refer to the original FCC ID report: RKSA200924004-00B, issued by Bay Area Compliance Laboratories Corp. (Kunshan).

### 3. REQUIREMENTS AND TEST PROCEDURES

#### 3.1 AC Line Conducted Emissions

##### 3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50  $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

| Frequency of emission (MHz) | Conducted limit (dB $\mu$ V) |           |
|-----------------------------|------------------------------|-----------|
|                             | Quasi-peak                   | Average   |
| 0.15-0.5                    | 66 to 56*                    | 56 to 46* |
| 0.5-5                       | 56                           | 46        |
| 5-30                        | 60                           | 50        |

\*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000  $\mu$ V within the frequency band 535-1705 kHz, as measured using a 50  $\mu$ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

### 3.1.2 EUT Setup

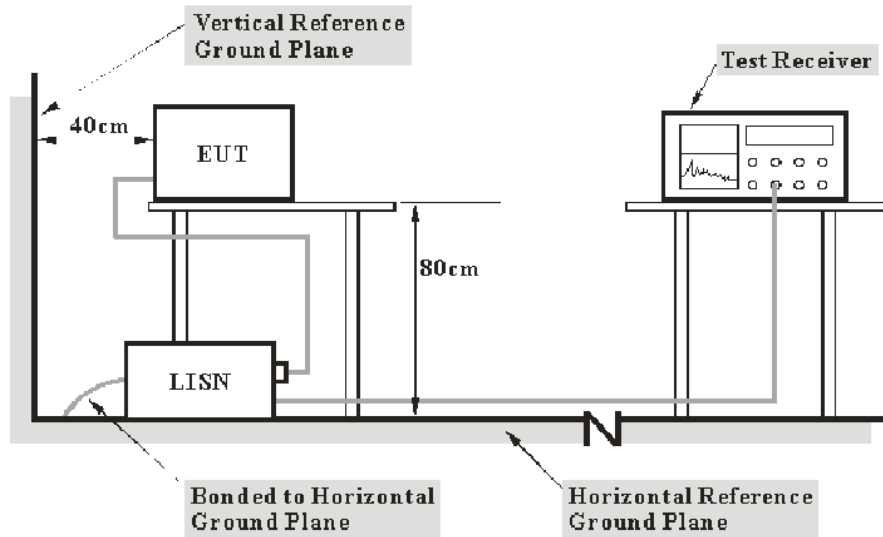

Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

### 3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### 3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

### 3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

## 3.2 Radiation Spurious Emissions


### 3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 3.2.2 EUT Setup

**Below 1GHz:**

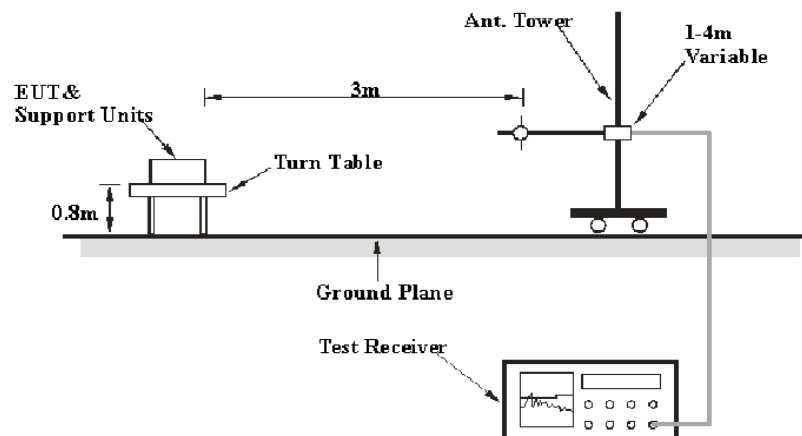

**Above 1GHz:**

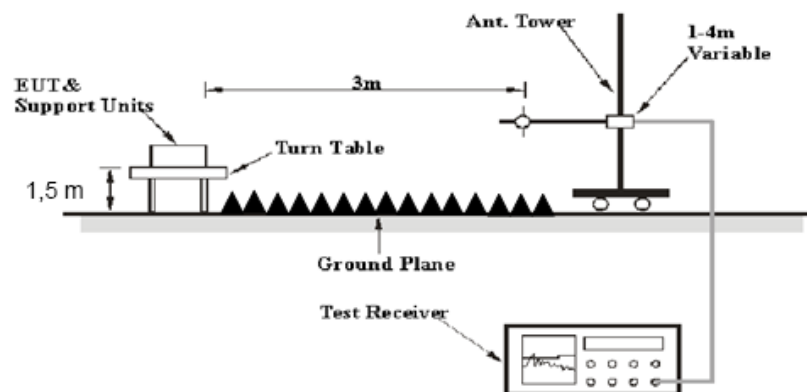

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.



The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

For portable device, test should be performed at X.Y.Z Axis:

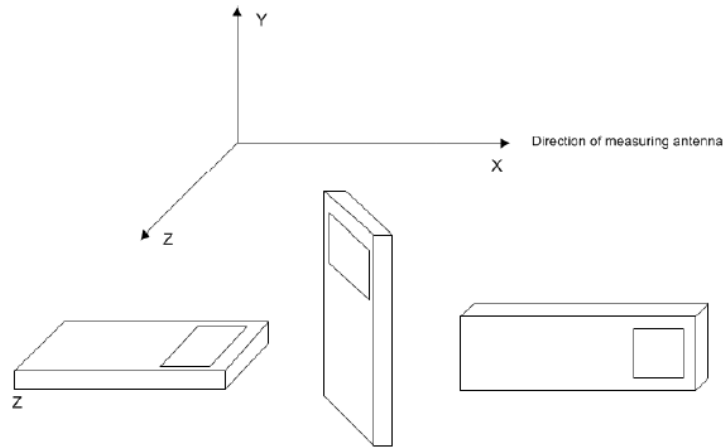


Figure 8—EUT configuration positions (see 6.3.1)

### 3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

30MHz-1000MHz:

| Measurement | RBW     | Video B/W | IF B/W |
|-------------|---------|-----------|--------|
| QP          | 120 kHz | 300 kHz   | 120kHz |

1GHz- 25GHz:

| Measurement | Duty cycle | RBW  | Video B/W |
|-------------|------------|------|-----------|
| PK          | Any        | 1MHz | 3 MHz     |
| AV          | >98%       | 1MHz | 10 Hz     |
|             | <98%       | 1MHz | 1/T       |

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

### 3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

### 3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

### 3.3 6 dB Emission Bandwidth:

#### 3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

#### 3.3.2 EUT Setup



#### 3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 11.8

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times \text{RBW}$ .
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


### 3.4 Maximum peak conducted output power:

#### 3.4.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

#### 3.4.2 EUT Setup



### 3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 11.9.1.3

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

- a) Set the EUT in transmitting mode.
- b) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- c) Add a correction factor to the display.
- d) Set the power meter to test peak output power, record the result.

## 3.5 Maximum power spectral density:

### 3.5.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

### 3.5.2 EUT Setup



### 3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 11.10.2

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq [3 \cdot \text{RBW}]$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


### 3.6 100 kHz Bandwidth of Frequency Band Edge:

#### 3.6.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

#### 3.6.2 EUT Setup



#### 3.6.3 Test Procedure


According to ANSI C63.10-2013 Section 11.11

- Set the center frequency and span to encompass frequency range to be measured.
- Set the RBW = 100 kHz.
- Set the VBW  $\geq [3 \times \text{RBW}]$ .
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

### 3.7 Duty Cycle:

#### 3.7.1 EUT Setup



#### 3.7.2 Test Procedure

According to ANSI C63.10-2013 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set  $RBW \geq OBW$  if possible; otherwise, set RBW to the largest available value.
- 3) Set  $VBW \geq RBW$ . Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are  $> 50/T$  and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if  $T \leq 16.7 \mu s$ .)

### 3.8 Antenna Requirement

#### 3.8.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

#### 3.8.2 Judgment

Please refer to the Antenna Information detail in Section 1.

## 4. Test DATA AND RESULTS

### 4.1 AC Line Conducted Emissions

|                |                                                      |              |                                                        |
|----------------|------------------------------------------------------|--------------|--------------------------------------------------------|
| Serial Number: | CR21100085-RF-S2(Type-1)<br>CR21100085-RF-S1(Type-2) | Test Date:   | 2021-11-27~2022-03-22                                  |
| Test Site:     | CE                                                   | Test Mode:   | Transmitting<br>(802.11b Middle channel was the worst) |
| Tester:        | Allen Wu                                             | Test Result: | Pass                                                   |

| Environmental Conditions: |           |                           |       |                        |             |
|---------------------------|-----------|---------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C)      | 21.8~24.8 | Relative Humidity:<br>(%) | 63~67 | ATM Pressure:<br>(kPa) | 100.5~101.5 |


#### Test Equipment List and Details:

| Manufacturer | Description       | Model   | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|---------|---------------|------------------|----------------------|
| R&S          | LISN              | ENV216  | 101134        | 2021-04-25       | 2022-04-24           |
| R&S          | EMI Test Receiver | ESR3    | 102726        | 2021-07-22       | 2022-07-21           |
| MICRO-COAX   | Coaxial Cable     | UTIFLEX | C-0200-01     | 2021-08-08       | 2022-08-07           |
| Audix        | Test Software     | E3      | 190306 (V9)   | N/A              | N/A                  |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Type-2 Adapter 1#:


Line:

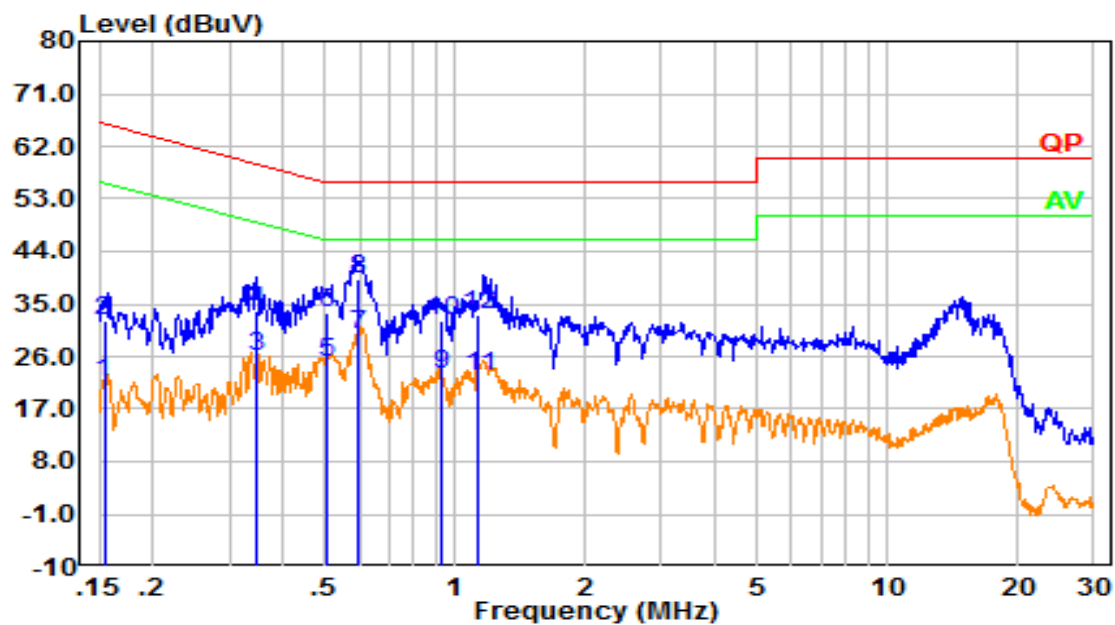

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.154              | 11.84             | 9.61           | 21.45            | 55.78           | 34.34          | Average  |
| 2   | 0.154              | 22.65             | 9.61           | 32.26            | 65.78           | 33.52          | QP       |
| 3   | 0.348              | 16.48             | 9.61           | 26.09            | 49.01           | 22.93          | Average  |
| 4   | 0.348              | 24.08             | 9.61           | 33.69            | 59.01           | 25.33          | QP       |
| 5   | 0.504              | 15.33             | 9.61           | 24.94            | 46.00           | 21.06          | Average  |
| 6   | 0.504              | 23.84             | 9.61           | 33.45            | 56.00           | 22.55          | QP       |
| 7   | 0.600              | 20.00             | 9.62           | 29.62            | 46.00           | 16.38          | Average  |
| 8   | 0.600              | 29.58             | 9.62           | 39.20            | 56.00           | 16.80          | QP       |
| 9   | 0.929              | 13.29             | 9.62           | 22.91            | 46.00           | 23.09          | Average  |
| 10  | 0.929              | 22.50             | 9.62           | 32.12            | 56.00           | 23.88          | QP       |
| 11  | 1.132              | 13.09             | 9.62           | 22.72            | 46.00           | 23.28          | Average  |
| 12  | 1.132              | 23.41             | 9.62           | 33.03            | 56.00           | 22.97          | QP       |




Neutral:

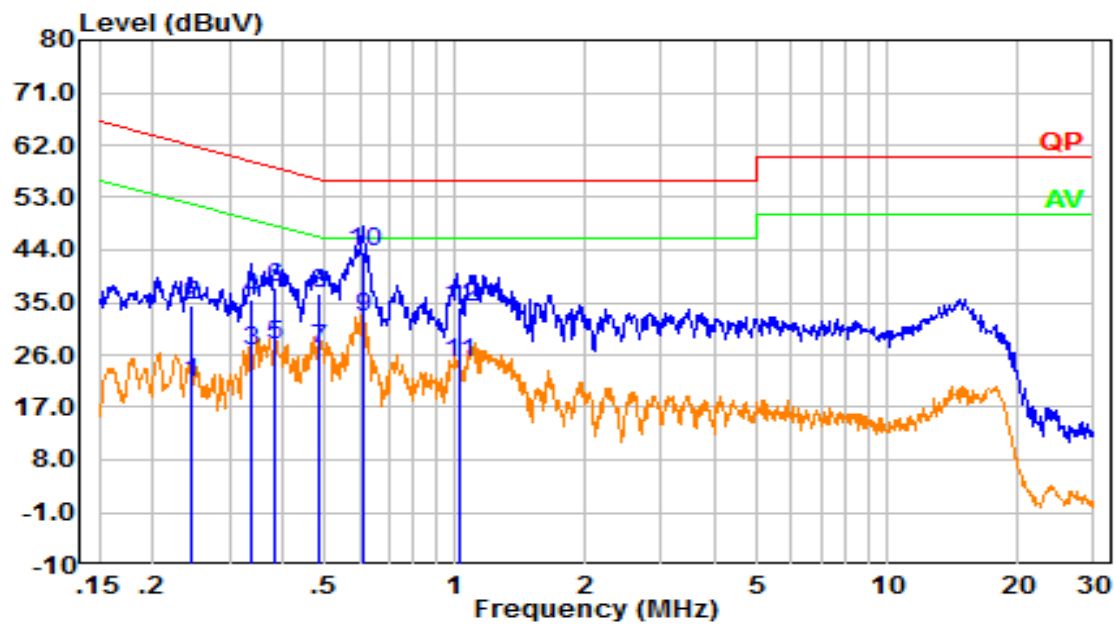

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.244              | 11.64             | 9.61           | 21.25            | 51.95           | 30.70          | Average  |
| 2   | 0.244              | 24.89             | 9.61           | 34.50            | 61.95           | 27.45          | QP       |
| 3   | 0.335              | 17.19             | 9.61           | 26.80            | 49.31           | 22.51          | Average  |
| 4   | 0.335              | 25.79             | 9.61           | 35.40            | 59.31           | 23.92          | QP       |
| 5   | 0.384              | 17.95             | 9.61           | 27.56            | 48.18           | 20.63          | Average  |
| 6   | 0.384              | 27.86             | 9.61           | 37.47            | 58.18           | 20.72          | QP       |
| 7   | 0.482              | 17.33             | 9.61           | 26.94            | 46.30           | 19.36          | Average  |
| 8   | 0.482              | 26.75             | 9.61           | 36.36            | 56.30           | 19.94          | QP       |
| 9   | 0.612              | 22.96             | 9.62           | 32.58            | 46.00           | 13.42          | Average  |
| 10  | 0.612              | 34.03             | 9.62           | 43.65            | 56.00           | 12.35          | QP       |
| 11  | 1.019              | 14.87             | 9.62           | 24.49            | 46.00           | 21.51          | Average  |
| 12  | 1.019              | 24.53             | 9.62           | 34.15            | 56.00           | 21.85          | QP       |


Type-1 Adapter 1#:

Line:

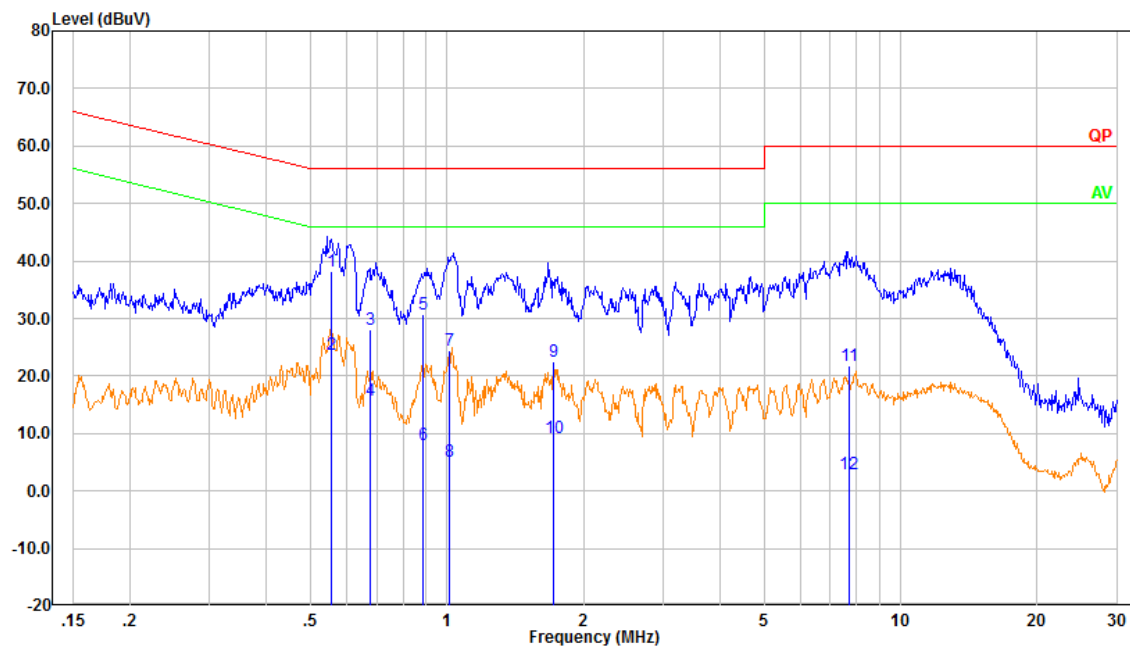

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.555              | 28.62             | 9.62           | 38.23            | 56.00           | 17.77          | QP       |
| 2   | 0.555              | 14.20             | 9.62           | 23.81            | 46.00           | 22.19          | Average  |
| 3   | 0.679              | 18.52             | 9.62           | 28.14            | 56.00           | 27.86          | QP       |
| 4   | 0.679              | 6.08              | 9.62           | 15.70            | 46.00           | 30.30          | Average  |
| 5   | 0.884              | 21.22             | 9.62           | 30.84            | 56.00           | 25.16          | QP       |
| 6   | 0.884              | -1.60             | 9.62           | 8.02             | 46.00           | 37.98          | Average  |
| 7   | 1.014              | 14.74             | 9.62           | 24.36            | 56.00           | 31.64          | QP       |
| 8   | 1.014              | -4.44             | 9.62           | 5.18             | 46.00           | 40.82          | Average  |
| 9   | 1.718              | 12.77             | 9.63           | 22.40            | 56.00           | 33.60          | QP       |
| 10  | 1.718              | -0.46             | 9.63           | 9.17             | 46.00           | 36.83          | Average  |
| 11  | 7.676              | 12.08             | 9.67           | 21.75            | 60.00           | 38.25          | QP       |
| 12  | 7.676              | -6.65             | 9.67           | 3.01             | 50.00           | 46.99          | Average  |

Neutral:

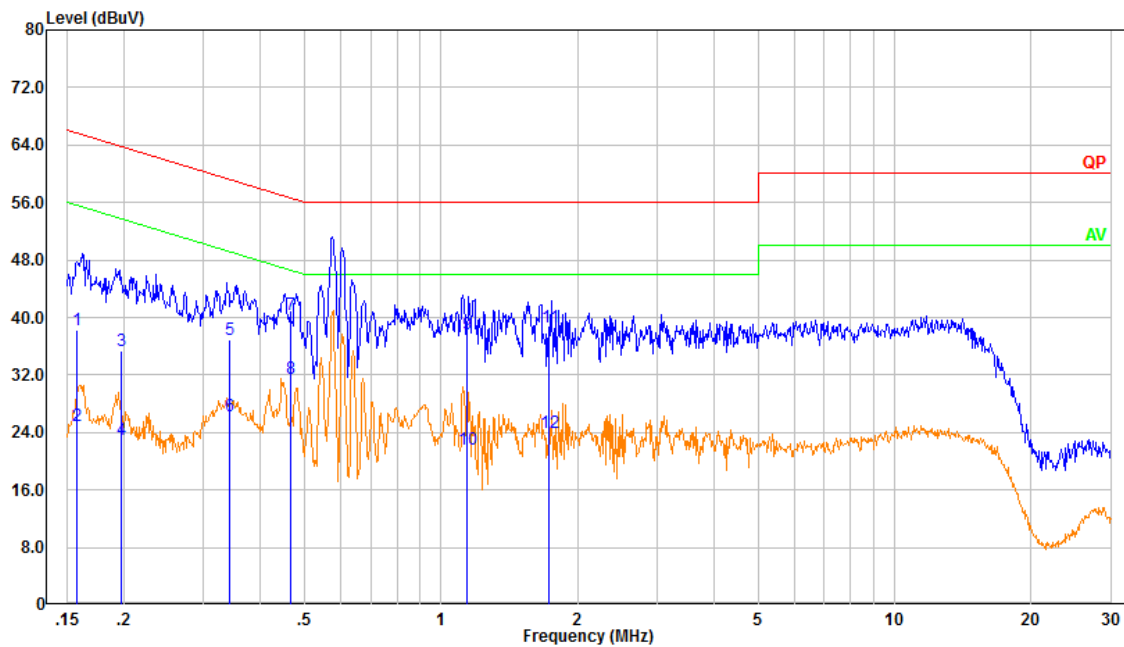

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB) | Result<br>(dBμV) | Limit<br>(dBμV) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|----------------|------------------|-----------------|----------------|----------|
| 1   | 0.157              | 28.56             | 9.61           | 38.17            | 65.60           | 27.43          | QP       |
| 2   | 0.157              | 15.41             | 9.61           | 25.02            | 55.60           | 30.58          | Average  |
| 3   | 0.197              | 25.66             | 9.61           | 35.27            | 63.72           | 28.45          | QP       |
| 4   | 0.197              | 13.44             | 9.61           | 23.05            | 53.72           | 30.67          | Average  |
| 5   | 0.343              | 27.31             | 9.61           | 36.92            | 59.13           | 22.21          | QP       |
| 6   | 0.343              | 16.62             | 9.61           | 26.23            | 49.13           | 22.90          | Average  |
| 7   | 0.466              | 30.85             | 9.61           | 40.46            | 56.58           | 16.12          | QP       |
| 8   | 0.466              | 21.97             | 9.61           | 31.58            | 46.58           | 15.00          | Average  |
| 9   | 1.143              | 28.13             | 9.62           | 37.75            | 56.00           | 18.25          | QP       |
| 10  | 1.143              | 11.96             | 9.62           | 21.59            | 46.00           | 24.41          | Average  |
| 11  | 1.732              | 29.03             | 9.63           | 38.66            | 56.00           | 17.34          | QP       |
| 12  | 1.732              | 14.29             | 9.63           | 23.91            | 46.00           | 22.09          | Average  |

## 4.2 Radiation Spurious Emissions

|                |                                                      |              |                       |
|----------------|------------------------------------------------------|--------------|-----------------------|
| Serial Number: | CR21100085-RF-S2(Type-1)<br>CR21100085-RF-S1(Type-2) | Test Date:   | 2021-11-15~2022-03-23 |
| Test Site:     | 966-1, 966-2                                         | Test Mode:   | Transmitting          |
| Tester:        | Allen Wu                                             | Test Result: | Pass                  |

### Environmental Conditions:

|                      |           |                              |       |                        |             |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|
| Temperature:<br>(°C) | 20.1~23.6 | Relative<br>Humidity:<br>(%) | 49~56 | ATM Pressure:<br>(kPa) | 100.7~101.5 |
|----------------------|-----------|------------------------------|-------|------------------------|-------------|

### Test Equipment List and Details:


| Manufacturer    | Description           | Model                 | Serial Number | Calibration Date | Calibration Due Date |
|-----------------|-----------------------|-----------------------|---------------|------------------|----------------------|
| Sunol Sciences  | Antenna               | JB6                   | A082520-5     | 2020-10-19       | 2023-10-18           |
| R&S             | EMI Test Receiver     | ESR3                  | 102724        | 2021-07-22       | 2022-07-21           |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0470-02     | 2021-07-18       | 2022-07-17           |
| TIMES MICROWAVE | Coaxial Cable         | LMR-600-UltraFlex     | C-0780-01     | 2021-07-18       | 2022-07-17           |
| Sonoma          | Amplifier             | 310N                  | 186165        | 2021-07-18       | 2022-07-17           |
| ETS-Lindgren    | Horn Antenna          | 3115                  | 9912-5985     | 2020-10-13       | 2023-10-12           |
| PASTERNAK       | Horn Antenna          | PE9852/2F-20          | 112002        | 2021-02-05       | 2024-02-04           |
| R&S             | Spectrum Analyzer     | FSV40                 | 101591        | 2021-07-22       | 2022-07-21           |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-1200-70U300 | 217423-008    | 2021-08-08       | 2022-08-07           |
| MICRO-COAX      | Coaxial Cable         | UFA210A-1-2362-300300 | 235780-001    | 2021-08-08       | 2022-08-07           |
| MICRO-COAX      | Coaxial Cable         | UFB142A-1-2362-200200 | 235772-001    | 2021-08-08       | 2022-08-07           |
| Mini            | Pre-amplifier         | ZVA-183-S+            | 5969001149    | 2021-11-10       | 2022-11-09           |
| AH              | Preamplifier          | PAM-1840VH            | 190           | 2021-11-19       | 2022-11-20           |
| Audix           | Test Software         | E3                    | 201021 (V9)   | N/A              | N/A                  |
| E-Microwave     | Band Rejection Filter | 2400-2483.5MHz        | OE01902424    | 2021-08-08       | 2022-08-07           |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


1) 30MHz-1GHz(802.11b Low channel was the worst)

Type-2 Adapter 1#:

Horizontal:

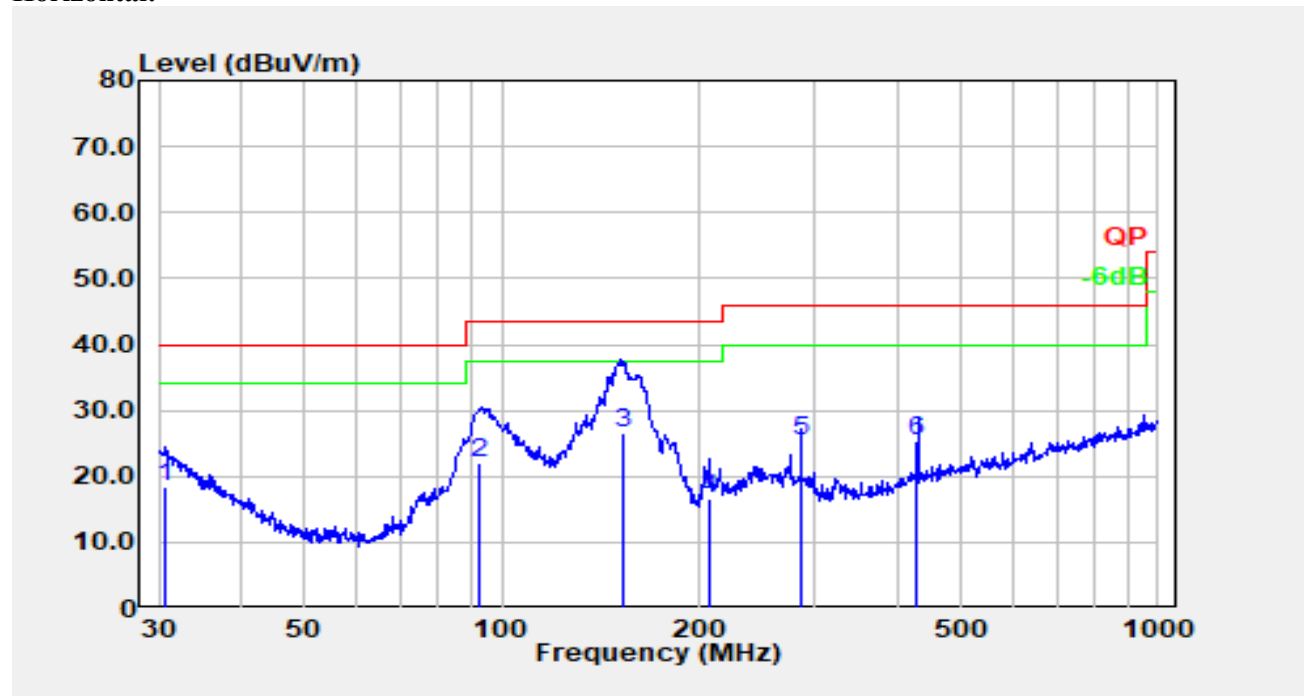


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.594             | 22.64             | -4.25            | 18.39              | 40.00             | 21.61          | QP       |
| 2   | 92.613             | 38.51             | -16.52           | 21.99              | 43.50             | 21.51          | QP       |
| 3   | 152.639            | 38.98             | -12.29           | 26.68              | 43.50             | 16.82          | QP       |
| 4   | 208.008            | 29.13             | -12.57           | 16.56              | 43.50             | 26.94          | QP       |
| 5   | 285.989            | 36.95             | -11.47           | 25.47              | 46.00             | 20.53          | QP       |
| 6   | 429.998            | 33.00             | -7.71            | 25.29              | 46.00             | 20.71          | QP       |

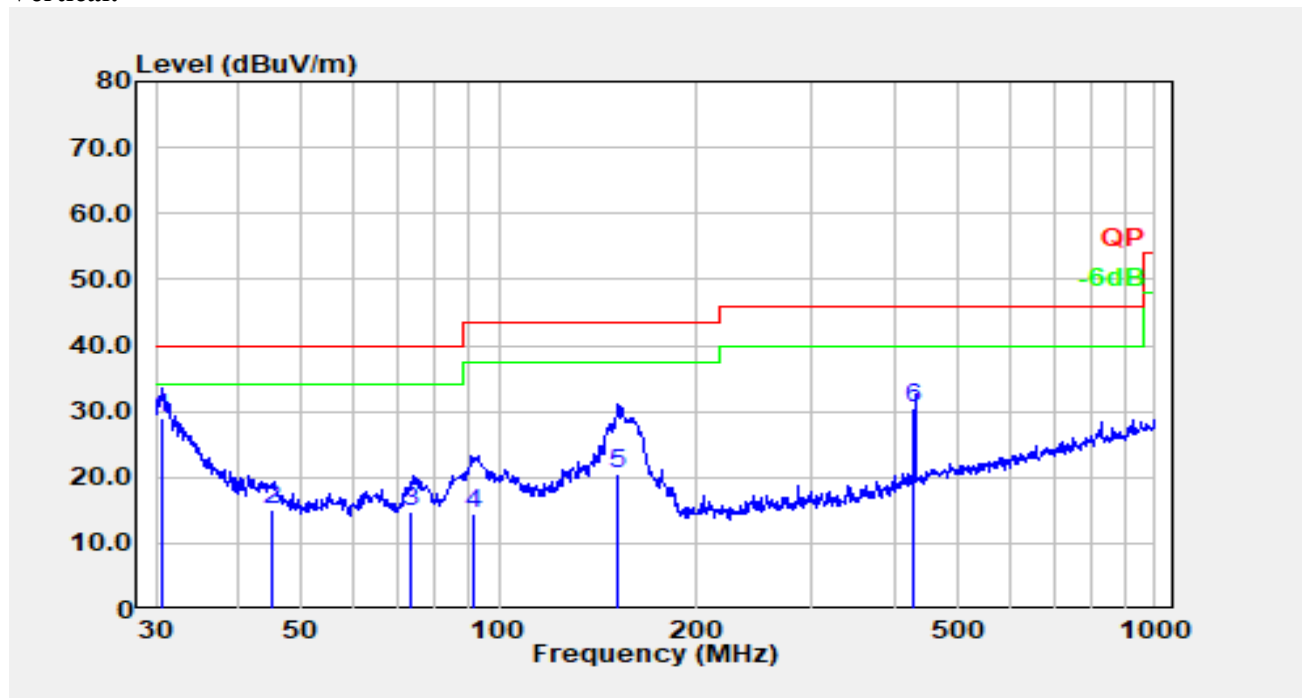**Vertical:**


| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.597             | 33.25             | -4.25            | 29.00              | 40.00             | 11.00          | QP       |
| 2   | 45.258             | 29.60             | -14.60           | 14.99              | 40.00             | 25.01          | QP       |
| 3   | 73.700             | 31.91             | -17.10           | 14.81              | 40.00             | 25.19          | QP       |
| 4   | 91.556             | 31.31             | -16.80           | 14.50              | 43.50             | 29.00          | QP       |
| 5   | 151.291            | 32.88             | -12.30           | 20.58              | 43.50             | 22.92          | QP       |
| 6   | 430.015            | 38.18             | -7.71            | 30.47              | 46.00             | 15.53          | QP       |

## Type-1 Adapter 1#:

## Horizontal:

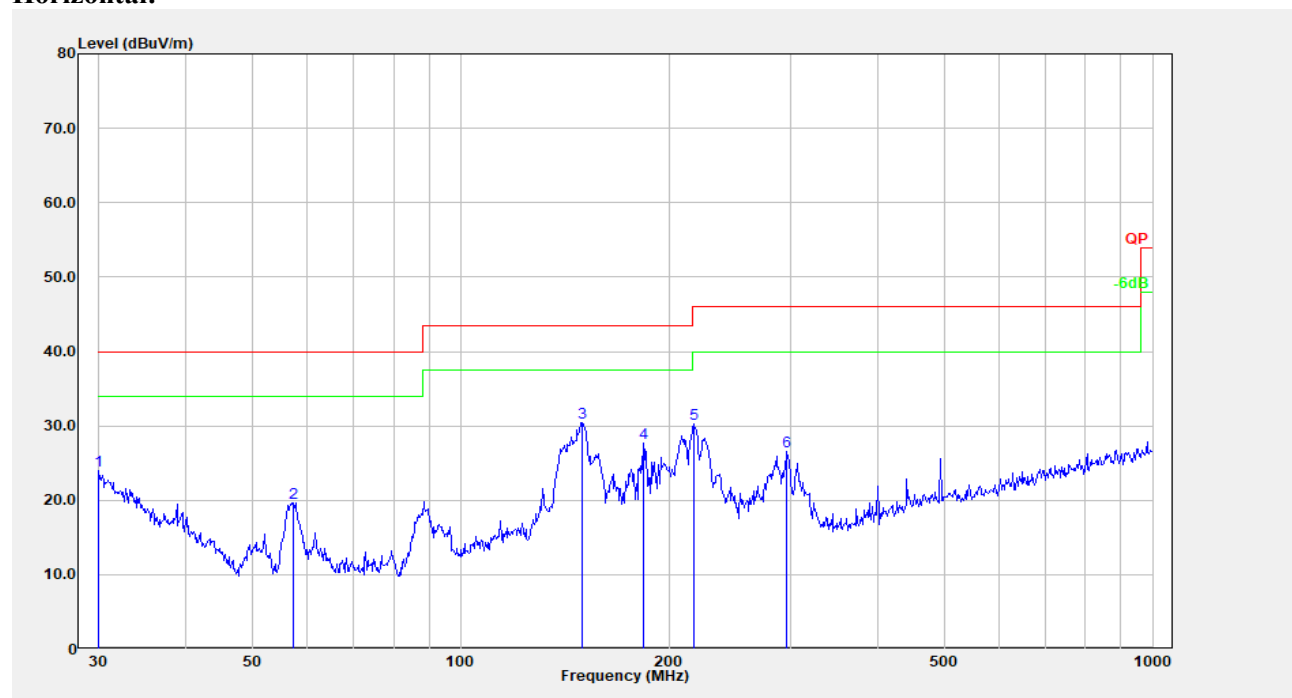

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 30.000             | 27.71             | -3.79            | 23.92              | 40.00             | 16.08          | Peak     |
| 2   | 57.392             | 37.25             | -17.55           | 19.71              | 40.00             | 20.29          | Peak     |
| 3   | 150.011            | 42.73             | -12.26           | 30.47              | 43.50             | 13.03          | Peak     |
| 4   | 183.844            | 41.48             | -13.72           | 27.76              | 43.50             | 15.74          | Peak     |
| 5   | 217.544            | 43.09             | -12.88           | 30.21              | 46.00             | 15.79          | Peak     |
| 6   | 296.184            | 37.45             | -10.91           | 26.54              | 46.00             | 19.46          | Peak     |

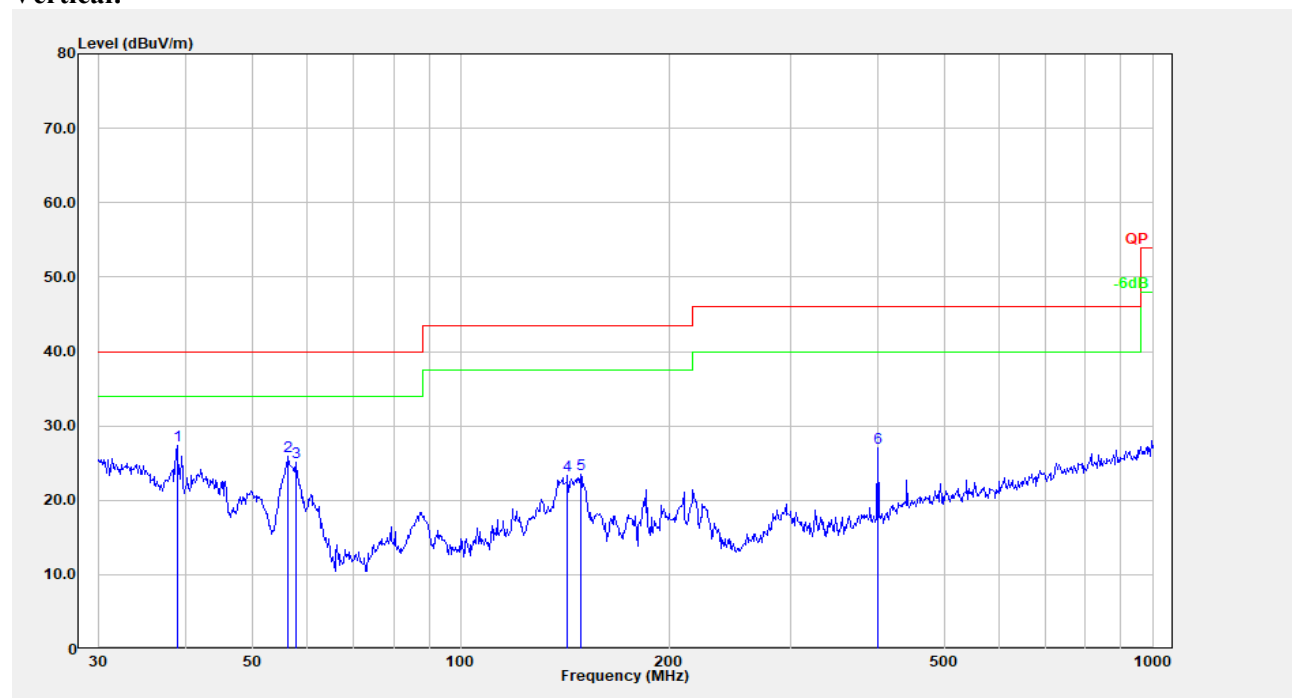**Vertical:**

| No. | Frequency<br>(MHz) | Reading<br>(dBμV) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) | Detector |
|-----|--------------------|-------------------|------------------|--------------------|-------------------|----------------|----------|
| 1   | 38.888             | 38.02             | -10.63           | 27.39              | 40.00             | 12.61          | Peak     |
| 2   | 56.197             | 43.39             | -17.53           | 25.86              | 40.00             | 14.14          | Peak     |
| 3   | 57.796             | 42.67             | -17.56           | 25.11              | 40.00             | 14.89          | Peak     |
| 4   | 142.824            | 35.56             | -12.16           | 23.40              | 43.50             | 20.10          | Peak     |
| 5   | 148.963            | 35.82             | -12.26           | 23.56              | 43.50             | 19.94          | Peak     |
| 6   | 400.432            | 35.99             | -9.00            | 26.99              | 46.00             | 19.01          | Peak     |



**2) 1-25GHz:**  
**Type-2 Adapter 1#:**

**802.11b Mode:**

Channel Model

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 66.51             | PK       | H              | 31.53            | 98.04              | N/A               | N/A            |
| 2412.00                  | 63.45             | AV       | H              | 31.53            | 94.98              | N/A               | N/A            |
| 2412.00                  | 73.94             | PK       | V              | 31.53            | 105.47             | N/A               | N/A            |
| 2412.00                  | 71.38             | AV       | V              | 31.53            | 102.91             | N/A               | N/A            |
| 2390.00                  | 29.16             | PK       | V              | 31.46            | 60.62              | 74.00             | 13.38          |
| 2390.00                  | 16.92             | AV       | V              | 31.46            | 48.38              | 54.00             | 5.62           |
| 4824.00                  | 49.22             | PK       | V              | 10.94            | 60.16              | 74.00             | 13.84          |
| 4824.00                  | 41.36             | AV       | V              | 10.94            | 52.30              | 54.00             | 1.70           |
| 7236.00                  | 40.69             | PK       | V              | 14.44            | 55.13              | 74.00             | 18.87          |
| 7236.00                  | 30.98             | AV       | V              | 14.44            | 45.42              | 54.00             | 8.58           |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 67.03             | PK       | H              | 31.60            | 98.63              | N/A               | N/A            |
| 2437.00                  | 62.91             | AV       | H              | 31.60            | 94.51              | N/A               | N/A            |
| 2437.00                  | 73.03             | PK       | V              | 31.60            | 104.63             | N/A               | N/A            |
| 2437.00                  | 69.33             | AV       | V              | 31.60            | 100.93             | N/A               | N/A            |
| 4874.00                  | 47.51             | PK       | V              | 11.05            | 58.56              | 74.00             | 15.44          |
| 4874.00                  | 41.01             | AV       | V              | 11.05            | 52.06              | 54.00             | 1.94           |
| 7311.00                  | 38.75             | PK       | V              | 14.80            | 53.55              | 74.00             | 20.45          |
| 7311.00                  | 28.95             | AV       | V              | 14.80            | 43.75              | 54.00             | 10.25          |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 67.85             | PK       | H              | 31.63            | 99.48              | N/A               | N/A            |
| 2462.00                  | 64.75             | AV       | H              | 31.63            | 96.38              | N/A               | N/A            |
| 2462.00                  | 76.10             | PK       | V              | 31.63            | 107.73             | N/A               | N/A            |
| 2462.00                  | 73.08             | AV       | V              | 31.63            | 104.71             | N/A               | N/A            |
| 2483.50                  | 31.74             | PK       | V              | 31.64            | 63.38              | 74.00             | 10.62          |
| 2483.50                  | 20.90             | AV       | V              | 31.64            | 52.54              | 54.00             | 1.46           |
| 4924.00                  | 46.76             | PK       | V              | 11.18            | 57.94              | 74.00             | 16.06          |
| 4924.00                  | 40.28             | AV       | V              | 11.18            | 51.46              | 54.00             | 2.54           |
| 7386.00                  | 39.69             | PK       | V              | 14.89            | 54.58              | 74.00             | 19.42          |
| 7386.00                  | 29.57             | AV       | V              | 14.89            | 44.46              | 54.00             | 9.54           |

**802.11g Mode:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 62.86             | PK       | H              | 31.53            | 94.39              | N/A               | N/A            |
| 2412.00                  | 59.74             | AV       | H              | 31.53            | 91.27              | N/A               | N/A            |
| 2412.00                  | 69.81             | PK       | V              | 31.53            | 101.34             | N/A               | N/A            |
| 2412.00                  | 66.69             | AV       | V              | 31.53            | 98.22              | N/A               | N/A            |
| 2390.00                  | 28.85             | PK       | V              | 31.46            | 60.31              | 74.00             | 13.69          |
| 2390.00                  | 16.75             | AV       | V              | 31.46            | 48.21              | 54.00             | 5.79           |
| 4824.00                  | 45.11             | PK       | V              | 10.94            | 56.05              | 74.00             | 17.95          |
| 4824.00                  | 39.35             | AV       | V              | 10.94            | 50.29              | 54.00             | 3.71           |
| 7236.00                  | 37.29             | PK       | V              | 14.44            | 51.73              | 74.00             | 22.27          |
| 7236.00                  | 26.67             | AV       | V              | 14.44            | 41.11              | 54.00             | 12.89          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 63.28             | PK       | H              | 31.60            | 94.88              | N/A               | N/A            |
| 2437.00                  | 60.13             | AV       | H              | 31.60            | 91.73              | N/A               | N/A            |
| 2437.00                  | 69.93             | PK       | V              | 31.60            | 101.53             | N/A               | N/A            |
| 2437.00                  | 66.38             | AV       | V              | 31.60            | 97.98              | N/A               | N/A            |
| 4874.00                  | 44.06             | PK       | V              | 11.05            | 55.11              | 74.00             | 18.89          |
| 4874.00                  | 37.24             | AV       | V              | 11.05            | 48.29              | 54.00             | 5.71           |
| 7311.00                  | 37.08             | PK       | V              | 14.80            | 51.88              | 74.00             | 22.12          |
| 7311.00                  | 24.70             | AV       | V              | 14.80            | 39.50              | 54.00             | 14.50          |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 62.66             | PK       | H              | 31.63            | 94.29              | N/A               | N/A            |
| 2462.00                  | 59.32             | AV       | H              | 31.63            | 90.95              | N/A               | N/A            |
| 2462.00                  | 71.49             | PK       | V              | 31.63            | 103.12             | N/A               | N/A            |
| 2462.00                  | 68.72             | AV       | V              | 31.63            | 100.35             | N/A               | N/A            |
| 2483.50                  | 28.39             | PK       | V              | 31.64            | 60.03              | 74.00             | 13.97          |
| 2483.50                  | 17.17             | AV       | V              | 31.64            | 48.81              | 54.00             | 5.19           |
| 4924.00                  | 44.54             | PK       | V              | 11.18            | 55.72              | 74.00             | 18.28          |
| 4924.00                  | 37.34             | AV       | V              | 11.18            | 48.52              | 54.00             | 5.48           |
| 7386.00                  | 36.91             | PK       | V              | 14.89            | 51.80              | 74.00             | 22.20          |
| 7386.00                  | 24.65             | AV       | V              | 14.89            | 39.54              | 54.00             | 14.46          |

**802.11n ht20 Mode:**

2412 MHz Mode:

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 63.81             | PK       | H              | 31.53            | 95.34              | N/A               | N/A            |
| 2412.00                  | 54.63             | AV       | H              | 31.53            | 86.16              | N/A               | N/A            |
| 2412.00                  | 71.44             | PK       | V              | 31.53            | 102.97             | N/A               | N/A            |
| 2412.00                  | 62.02             | AV       | V              | 31.53            | 93.55              | N/A               | N/A            |
| 2390.00                  | 32.45             | PK       | V              | 31.46            | 63.91              | 74.00             | 10.09          |
| 2390.00                  | 17.02             | AV       | V              | 31.46            | 48.48              | 54.00             | 5.52           |
| 4824.00                  | 43.31             | PK       | V              | 10.94            | 54.25              | 74.00             | 19.75          |
| 4824.00                  | 27.19             | AV       | V              | 10.94            | 38.13              | 54.00             | 15.87          |
| 7236.00                  | 37.62             | PK       | V              | 14.44            | 52.06              | 74.00             | 21.94          |
| 7236.00                  | 24.31             | AV       | V              | 14.44            | 38.75              | 54.00             | 15.25          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 64.84             | PK       | H              | 31.60            | 96.44              | N/A               | N/A            |
| 2437.00                  | 55.39             | AV       | H              | 31.60            | 86.99              | N/A               | N/A            |
| 2437.00                  | 71.91             | PK       | V              | 31.60            | 103.51             | N/A               | N/A            |
| 2437.00                  | 62.30             | AV       | V              | 31.60            | 93.90              | N/A               | N/A            |
| 4874.00                  | 42.57             | PK       | V              | 11.05            | 53.62              | 74.00             | 20.38          |
| 4874.00                  | 26.49             | AV       | V              | 11.05            | 37.54              | 54.00             | 16.46          |
| 7311.00                  | 36.49             | PK       | V              | 14.80            | 51.29              | 74.00             | 22.71          |
| 7311.00                  | 24.12             | AV       | V              | 14.80            | 38.92              | 54.00             | 15.08          |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 63.56             | PK       | H              | 31.63            | 95.19              | N/A               | N/A            |
| 2462.00                  | 54.44             | AV       | H              | 31.63            | 86.07              | N/A               | N/A            |
| 2462.00                  | 70.21             | PK       | V              | 31.63            | 101.84             | N/A               | N/A            |
| 2462.00                  | 61.30             | AV       | V              | 31.63            | 92.93              | N/A               | N/A            |
| 2483.50                  | 37.44             | PK       | V              | 31.64            | 69.08              | 74.00             | 4.92           |
| 2483.50                  | 18.11             | AV       | V              | 31.64            | 49.75              | 54.00             | 4.25           |
| 4924.00                  | 44.81             | PK       | V              | 11.18            | 55.99              | 74.00             | 18.01          |
| 4924.00                  | 26.18             | AV       | V              | 11.18            | 37.36              | 54.00             | 16.64          |
| 7386.00                  | 36.24             | PK       | V              | 14.89            | 51.13              | 74.00             | 22.87          |
| 7386.00                  | 23.67             | AV       | V              | 14.89            | 38.56              | 54.00             | 15.44          |

**802.11n ht40 Mode:**

02.FH H46 Mode:

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2422 MHz    |                   |          |                |                  |                    |                   |                |
| 2422.00                  | 69.67             | PK       | H              | 31.56            | 101.23             | N/A               | N/A            |
| 2422.00                  | 60.29             | AV       | H              | 31.56            | 91.85              | N/A               | N/A            |
| 2422.00                  | 69.83             | PK       | V              | 31.56            | 101.39             | N/A               | N/A            |
| 2422.00                  | 60.67             | AV       | V              | 31.56            | 92.23              | N/A               | N/A            |
| 2390.00                  | 28.95             | PK       | V              | 31.46            | 60.41              | 74.00             | 13.59          |
| 2390.00                  | 17.24             | AV       | V              | 31.46            | 48.70              | 54.00             | 5.30           |
| 4844.00                  | 37.85             | PK       | V              | 10.96            | 48.81              | 74.00             | 25.19          |
| 4844.00                  | 24.98             | AV       | V              | 10.96            | 35.94              | 54.00             | 18.06          |
| 7266.00                  | 37.37             | PK       | V              | 14.63            | 52.00              | 74.00             | 22.00          |
| 7266.00                  | 24.15             | AV       | V              | 14.63            | 38.78              | 54.00             | 15.22          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 69.94             | PK       | H              | 31.60            | 101.54             | N/A               | N/A            |
| 2437.00                  | 60.67             | AV       | H              | 31.60            | 92.27              | N/A               | N/A            |
| 2437.00                  | 70.12             | PK       | V              | 31.60            | 101.72             | N/A               | N/A            |
| 2437.00                  | 61.21             | AV       | V              | 31.60            | 92.81              | N/A               | N/A            |
| 4874.00                  | 37.63             | PK       | V              | 11.05            | 48.68              | 74.00             | 25.32          |
| 4874.00                  | 25.18             | AV       | V              | 11.05            | 36.23              | 54.00             | 17.77          |
| 7311.00                  | 36.87             | PK       | V              | 14.80            | 51.67              | 74.00             | 22.33          |
| 7311.00                  | 24.14             | AV       | V              | 14.80            | 38.94              | 54.00             | 15.06          |
| High Channel: 2452MHz    |                   |          |                |                  |                    |                   |                |
| 2452.00                  | 69.03             | PK       | H              | 31.63            | 100.66             | N/A               | N/A            |
| 2452.00                  | 59.66             | AV       | H              | 31.63            | 91.29              | N/A               | N/A            |
| 2452.00                  | 69.64             | PK       | V              | 31.63            | 101.27             | N/A               | N/A            |
| 2452.00                  | 60.37             | AV       | V              | 31.63            | 92.00              | N/A               | N/A            |
| 2483.50                  | 38.86             | PK       | V              | 31.64            | 70.50              | 74.00             | 3.50           |
| 2483.50                  | 18.88             | AV       | V              | 31.64            | 50.52              | 54.00             | 3.48           |
| 4904.00                  | 37.52             | PK       | V              | 11.14            | 48.66              | 74.00             | 25.34          |
| 4904.00                  | 25.10             | AV       | V              | 11.14            | 36.24              | 54.00             | 17.76          |
| 7356.00                  | 36.70             | PK       | V              | 14.80            | 51.50              | 74.00             | 22.50          |
| 7356.00                  | 23.74             | AV       | V              | 14.80            | 38.54              | 54.00             | 15.46          |

**LE 1 Mbps:**

LE 1 Mbps.

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                  |                    |                   |                |
| 2402.00                  | 64.38             | PK       | H              | 31.51            | 95.89              | N/A               | N/A            |
| 2402.00                  | 63.78             | AV       | H              | 31.51            | 95.29              | N/A               | N/A            |
| 2402.00                  | 67.40             | PK       | V              | 31.51            | 98.91              | N/A               | N/A            |
| 2402.00                  | 66.87             | AV       | V              | 31.51            | 98.38              | N/A               | N/A            |
| 2390.00                  | 27.69             | PK       | V              | 31.46            | 59.15              | 74.00             | 14.85          |
| 2390.00                  | 17.49             | AV       | V              | 31.46            | 48.95              | 54.00             | 5.05           |
| 4804.00                  | 37.73             | PK       | V              | 10.91            | 48.64              | 74.00             | 25.36          |
| 4804.00                  | 25.42             | AV       | V              | 10.91            | 36.33              | 54.00             | 17.67          |
| 7206.00                  | 38.53             | PK       | V              | 14.22            | 52.75              | 74.00             | 21.25          |
| 7206.00                  | 29.18             | AV       | V              | 14.22            | 43.40              | 54.00             | 10.60          |
| Middle Channel: 2440 MHz |                   |          |                |                  |                    |                   |                |
| 2440.00                  | 64.78             | PK       | H              | 31.60            | 96.38              | N/A               | N/A            |
| 2440.00                  | 63.85             | AV       | H              | 31.60            | 95.45              | N/A               | N/A            |
| 2440.00                  | 68.31             | PK       | V              | 31.60            | 99.91              | N/A               | N/A            |
| 2440.00                  | 67.45             | AV       | V              | 31.60            | 99.05              | N/A               | N/A            |
| 4880.00                  | 37.21             | PK       | V              | 11.07            | 48.28              | 74.00             | 25.72          |
| 4880.00                  | 25.39             | AV       | V              | 11.07            | 36.46              | 54.00             | 17.54          |
| 7320.00                  | 36.93             | PK       | V              | 14.80            | 51.73              | 74.00             | 22.27          |
| 7320.00                  | 27.50             | AV       | V              | 14.80            | 42.30              | 54.00             | 11.70          |
| High Channel: 2480 MHz   |                   |          |                |                  |                    |                   |                |
| 2480.00                  | 64.76             | PK       | H              | 31.64            | 96.40              | N/A               | N/A            |
| 2480.00                  | 63.44             | AV       | H              | 31.64            | 95.08              | N/A               | N/A            |
| 2480.00                  | 68.33             | PK       | V              | 31.64            | 99.97              | N/A               | N/A            |
| 2480.00                  | 67.64             | AV       | V              | 31.64            | 99.28              | N/A               | N/A            |
| 2483.50                  | 28.42             | PK       | V              | 31.64            | 60.06              | 74.00             | 13.94          |
| 2483.50                  | 17.94             | AV       | V              | 31.64            | 49.58              | 54.00             | 4.42           |
| 4960.00                  | 37.23             | PK       | V              | 11.23            | 48.46              | 74.00             | 25.54          |
| 4960.00                  | 25.28             | AV       | V              | 11.23            | 36.51              | 54.00             | 17.49          |
| 7440.00                  | 36.16             | PK       | V              | 15.26            | 51.42              | 74.00             | 22.58          |
| 7440.00                  | 23.90             | AV       | V              | 15.26            | 39.16              | 54.00             | 14.84          |




**LE 2 Mbps:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                  |                    |                   |                |
| 2402.00                  | 64.12             | PK       | H              | 31.51            | 95.63              | N/A               | N/A            |
| 2402.00                  | 62.62             | AV       | H              | 31.51            | 94.13              | N/A               | N/A            |
| 2402.00                  | 67.52             | PK       | V              | 31.51            | 99.03              | N/A               | N/A            |
| 2402.00                  | 65.81             | AV       | V              | 31.51            | 97.32              | N/A               | N/A            |
| 2390.00                  | 28.09             | PK       | V              | 31.46            | 59.55              | 74.00             | 14.45          |
| 2390.00                  | 17.19             | AV       | V              | 31.46            | 48.65              | 54.00             | 5.35           |
| 4804.00                  | 37.59             | PK       | V              | 10.91            | 48.50              | 74.00             | 25.50          |
| 4804.00                  | 25.48             | AV       | V              | 10.91            | 36.39              | 54.00             | 17.61          |
| 7206.00                  | 37.69             | PK       | V              | 14.22            | 51.91              | 74.00             | 22.09          |
| 7206.00                  | 30.00             | AV       | V              | 14.22            | 44.22              | 54.00             | 9.78           |
| Middle Channel: 2440 MHz |                   |          |                |                  |                    |                   |                |
| 2440.00                  | 64.61             | PK       | H              | 31.60            | 96.21              | N/A               | N/A            |
| 2440.00                  | 62.31             | AV       | H              | 31.60            | 93.91              | N/A               | N/A            |
| 2440.00                  | 67.82             | PK       | V              | 31.60            | 99.42              | N/A               | N/A            |
| 2440.00                  | 66.22             | AV       | V              | 31.60            | 97.82              | N/A               | N/A            |
| 4880.00                  | 37.92             | PK       | V              | 11.07            | 48.99              | 74.00             | 25.01          |
| 4880.00                  | 25.42             | AV       | V              | 11.07            | 36.49              | 54.00             | 17.51          |
| 7320.00                  | 37.14             | PK       | V              | 14.80            | 51.94              | 74.00             | 22.06          |
| 7320.00                  | 27.74             | AV       | V              | 14.80            | 42.54              | 54.00             | 11.46          |
| High Channel: 2480 MHz   |                   |          |                |                  |                    |                   |                |
| 2480.00                  | 64.65             | PK       | H              | 31.64            | 96.29              | N/A               | N/A            |
| 2480.00                  | 62.74             | AV       | H              | 31.64            | 94.38              | N/A               | N/A            |
| 2480.00                  | 68.29             | PK       | V              | 31.64            | 99.93              | N/A               | N/A            |
| 2480.00                  | 66.69             | AV       | V              | 31.64            | 98.33              | N/A               | N/A            |
| 2483.50                  | 28.60             | PK       | V              | 31.64            | 60.24              | 74.00             | 13.76          |
| 2483.50                  | 18.00             | AV       | V              | 31.64            | 49.64              | 54.00             | 4.36           |
| 4960.00                  | 37.76             | PK       | V              | 11.23            | 48.99              | 74.00             | 25.01          |
| 4960.00                  | 25.38             | AV       | V              | 11.23            | 36.61              | 54.00             | 17.39          |
| 7440.00                  | 35.98             | PK       | V              | 15.26            | 51.24              | 74.00             | 22.76          |
| 7440.00                  | 24.07             | AV       | V              | 15.26            | 39.33              | 54.00             | 14.67          |

**Worst Test plots(802.11b Low channel was the worst)**




**Horizontal:**

Fundamental  
Test with Band  
Rejection Filter

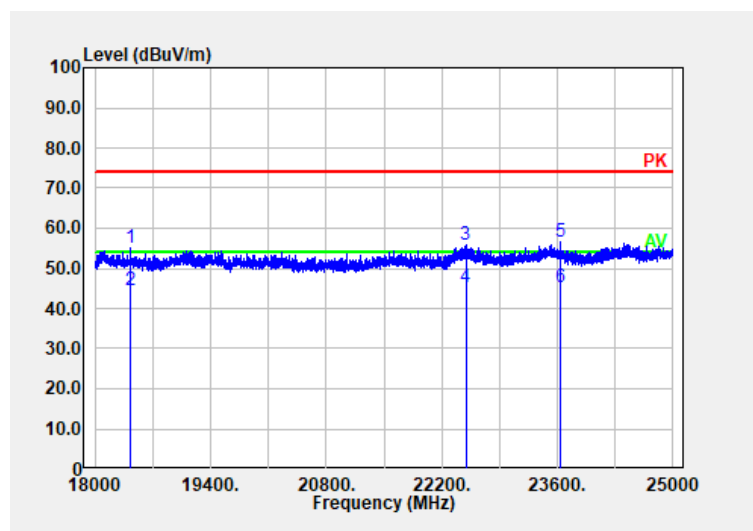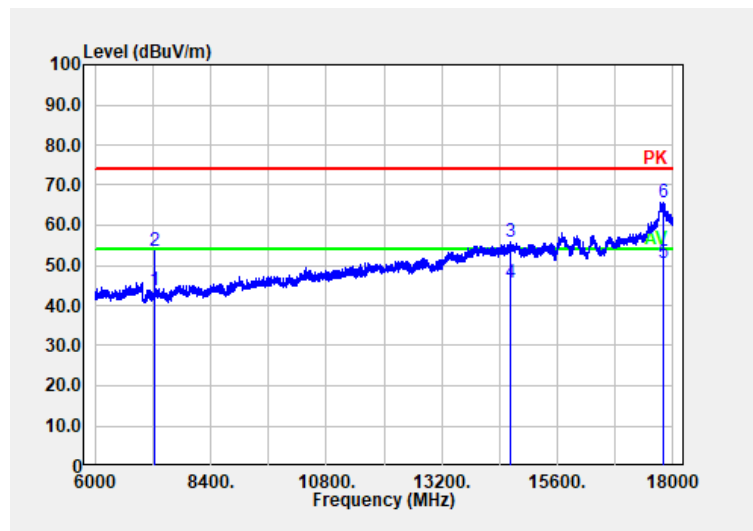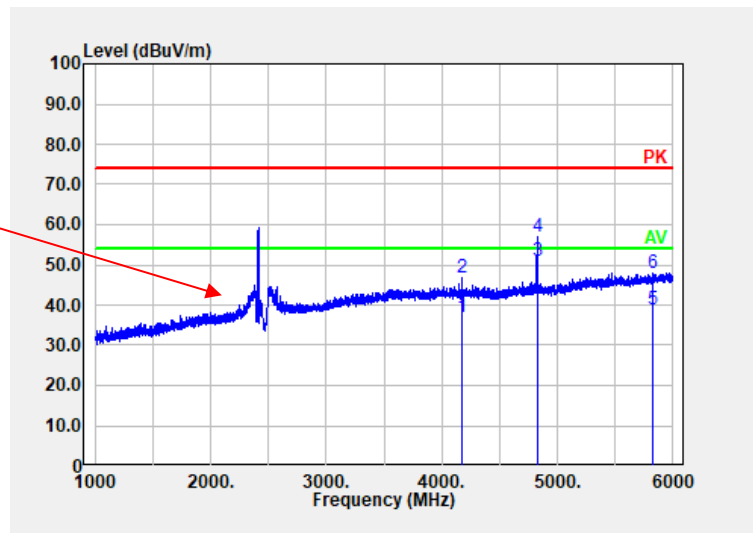

**Vertical:**

Fundamental  
Test with Band  
Rejection Filter

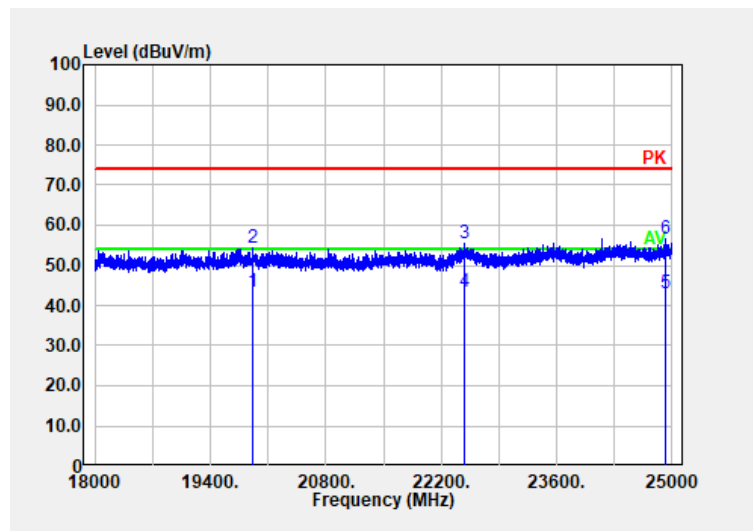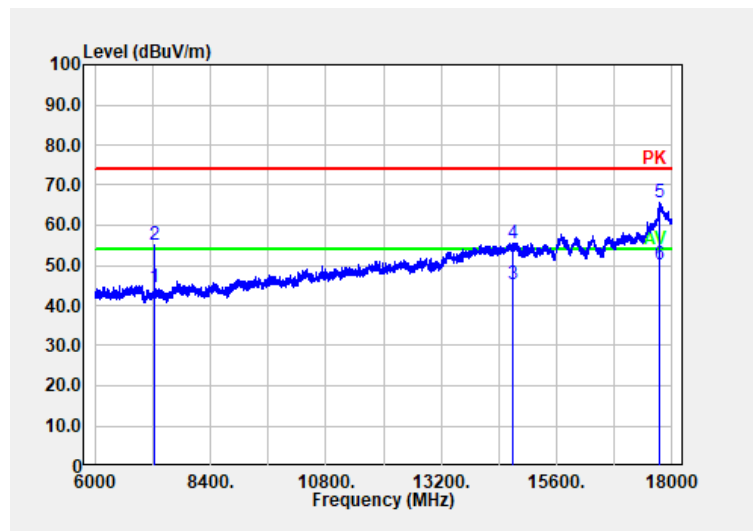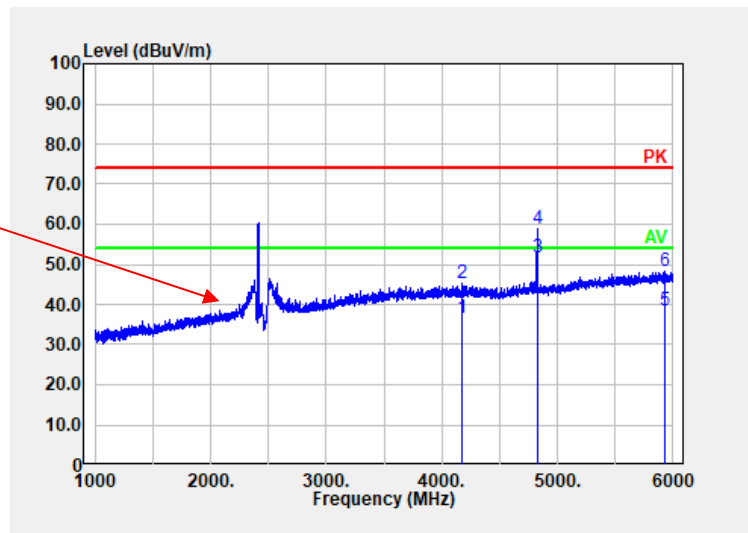



**Type-1 Adapter 1#:****802.11b Mode:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 66.72             | PK       | H              | 31.53            | 98.25              | N/A               | N/A            |
| 2412.00                  | 63.44             | AV       | H              | 31.53            | 94.97              | N/A               | N/A            |
| 2412.00                  | 73.77             | PK       | V              | 31.53            | 105.30             | N/A               | N/A            |
| 2412.00                  | 71.05             | AV       | V              | 31.53            | 102.58             | N/A               | N/A            |
| 2390.00                  | 29.56             | PK       | V              | 31.46            | 61.02              | 74.00             | 12.98          |
| 2390.00                  | 16.26             | AV       | V              | 31.46            | 47.72              | 54.00             | 6.28           |
| 4824.00                  | 48.65             | PK       | V              | 10.94            | 59.59              | 74.00             | 14.41          |
| 4824.00                  | 40.89             | AV       | V              | 10.94            | 51.83              | 54.00             | 2.17           |
| 7236.00                  | 40.87             | PK       | V              | 14.44            | 55.31              | 74.00             | 18.69          |
| 7236.00                  | 31.27             | AV       | V              | 14.44            | 45.71              | 54.00             | 8.29           |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 66.76             | PK       | H              | 31.60            | 98.36              | N/A               | N/A            |
| 2437.00                  | 62.62             | AV       | H              | 31.60            | 94.22              | N/A               | N/A            |
| 2437.00                  | 73.27             | PK       | V              | 31.60            | 104.87             | N/A               | N/A            |
| 2437.00                  | 69.44             | AV       | V              | 31.60            | 101.04             | N/A               | N/A            |
| 4874.00                  | 47.49             | PK       | V              | 11.05            | 58.54              | 74.00             | 15.46          |
| 4874.00                  | 40.80             | AV       | V              | 11.05            | 51.85              | 54.00             | 2.15           |
| 7311.00                  | 39.03             | PK       | V              | 14.80            | 53.83              | 74.00             | 20.17          |
| 7311.00                  | 29.26             | AV       | V              | 14.80            | 44.06              | 54.00             | 9.94           |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 68.00             | PK       | H              | 31.63            | 99.63              | N/A               | N/A            |
| 2462.00                  | 64.66             | AV       | H              | 31.63            | 96.29              | N/A               | N/A            |
| 2462.00                  | 76.07             | PK       | V              | 31.63            | 107.70             | N/A               | N/A            |
| 2462.00                  | 73.39             | AV       | V              | 31.63            | 105.02             | N/A               | N/A            |
| 2483.50                  | 31.39             | PK       | V              | 31.64            | 63.03              | 74.00             | 10.97          |
| 2483.50                  | 20.27             | AV       | V              | 31.64            | 51.91              | 54.00             | 2.09           |
| 4924.00                  | 47.07             | PK       | V              | 11.18            | 58.25              | 74.00             | 15.75          |
| 4924.00                  | 40.51             | AV       | V              | 11.18            | 51.69              | 54.00             | 2.31           |
| 7386.00                  | 39.38             | PK       | V              | 14.89            | 54.27              | 74.00             | 19.73          |
| 7386.00                  | 29.27             | AV       | V              | 14.89            | 44.16              | 54.00             | 9.84           |

**802.11g Mode:**

0211g Mode:

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 63.23             | PK       | H              | 31.53            | 94.76              | N/A               | N/A            |
| 2412.00                  | 59.82             | AV       | H              | 31.53            | 91.35              | N/A               | N/A            |
| 2412.00                  | 69.96             | PK       | V              | 31.53            | 101.49             | N/A               | N/A            |
| 2412.00                  | 65.97             | AV       | V              | 31.53            | 97.50              | N/A               | N/A            |
| 2390.00                  | 28.65             | PK       | V              | 31.46            | 60.11              | 74.00             | 13.89          |
| 2390.00                  | 15.42             | AV       | V              | 31.46            | 46.88              | 54.00             | 7.12           |
| 4824.00                  | 44.91             | PK       | V              | 10.94            | 55.85              | 74.00             | 18.15          |
| 4824.00                  | 38.37             | AV       | V              | 10.94            | 49.31              | 54.00             | 4.69           |
| 7236.00                  | 37.16             | PK       | V              | 14.44            | 51.60              | 74.00             | 22.40          |
| 7236.00                  | 26.28             | AV       | V              | 14.44            | 40.72              | 54.00             | 13.28          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 63.47             | PK       | H              | 31.60            | 95.07              | N/A               | N/A            |
| 2437.00                  | 60.12             | AV       | H              | 31.60            | 91.72              | N/A               | N/A            |
| 2437.00                  | 70.10             | PK       | V              | 31.60            | 101.70             | N/A               | N/A            |
| 2437.00                  | 66.53             | AV       | V              | 31.60            | 98.13              | N/A               | N/A            |
| 4874.00                  | 43.76             | PK       | V              | 11.05            | 54.81              | 74.00             | 19.19          |
| 4874.00                  | 37.57             | AV       | V              | 11.05            | 48.62              | 54.00             | 5.38           |
| 7311.00                  | 36.84             | PK       | V              | 14.80            | 51.64              | 74.00             | 22.36          |
| 7311.00                  | 24.56             | AV       | V              | 14.80            | 39.36              | 54.00             | 14.64          |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 62.41             | PK       | H              | 31.63            | 94.04              | N/A               | N/A            |
| 2462.00                  | 58.95             | AV       | H              | 31.63            | 90.58              | N/A               | N/A            |
| 2462.00                  | 71.79             | PK       | V              | 31.63            | 103.42             | N/A               | N/A            |
| 2462.00                  | 68.66             | AV       | V              | 31.63            | 100.29             | N/A               | N/A            |
| 2483.50                  | 28.18             | PK       | V              | 31.64            | 59.82              | 74.00             | 14.18          |
| 2483.50                  | 15.54             | AV       | V              | 31.64            | 47.18              | 54.00             | 6.82           |
| 4924.00                  | 44.70             | PK       | V              | 11.18            | 55.88              | 74.00             | 18.12          |
| 4924.00                  | 37.95             | AV       | V              | 11.18            | 49.13              | 54.00             | 4.87           |
| 7386.00                  | 36.99             | PK       | V              | 14.89            | 51.88              | 74.00             | 22.12          |
| 7386.00                  | 24.75             | AV       | V              | 14.89            | 39.64              | 54.00             | 14.36          |

**802.11n ht20 Mode:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2412 MHz    |                   |          |                |                  |                    |                   |                |
| 2412.00                  | 64.09             | PK       | H              | 31.53            | 95.62              | N/A               | N/A            |
| 2412.00                  | 54.86             | AV       | H              | 31.53            | 86.39              | N/A               | N/A            |
| 2412.00                  | 71.56             | PK       | V              | 31.53            | 103.09             | N/A               | N/A            |
| 2412.00                  | 62.04             | AV       | V              | 31.53            | 93.57              | N/A               | N/A            |
| 2390.00                  | 32.17             | PK       | V              | 31.46            | 63.63              | 74.00             | 10.37          |
| 2390.00                  | 16.84             | AV       | V              | 31.46            | 48.30              | 54.00             | 5.70           |
| 4824.00                  | 43.48             | PK       | V              | 10.94            | 54.42              | 74.00             | 19.58          |
| 4824.00                  | 26.96             | AV       | V              | 10.94            | 37.90              | 54.00             | 16.10          |
| 7236.00                  | 37.74             | PK       | V              | 14.44            | 52.18              | 74.00             | 21.82          |
| 7236.00                  | 24.14             | AV       | V              | 14.44            | 38.58              | 54.00             | 15.42          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 64.73             | PK       | H              | 31.60            | 96.33              | N/A               | N/A            |
| 2437.00                  | 55.40             | AV       | H              | 31.60            | 87.00              | N/A               | N/A            |
| 2437.00                  | 72.18             | PK       | V              | 31.60            | 103.78             | N/A               | N/A            |
| 2437.00                  | 62.29             | AV       | V              | 31.60            | 93.89              | N/A               | N/A            |
| 4874.00                  | 42.93             | PK       | V              | 11.05            | 53.98              | 74.00             | 20.02          |
| 4874.00                  | 26.87             | AV       | V              | 11.05            | 37.92              | 54.00             | 16.08          |
| 7311.00                  | 36.32             | PK       | V              | 14.80            | 51.12              | 74.00             | 22.88          |
| 7311.00                  | 24.06             | AV       | V              | 14.80            | 38.86              | 54.00             | 15.14          |
| High Channel: 2462MHz    |                   |          |                |                  |                    |                   |                |
| 2462.00                  | 63.87             | PK       | H              | 31.63            | 95.50              | N/A               | N/A            |
| 2462.00                  | 54.33             | AV       | H              | 31.63            | 85.96              | N/A               | N/A            |
| 2462.00                  | 70.69             | PK       | V              | 31.63            | 102.32             | N/A               | N/A            |
| 2462.00                  | 61.38             | AV       | V              | 31.63            | 93.01              | N/A               | N/A            |
| 2483.50                  | 37.23             | PK       | V              | 31.64            | 68.87              | 74.00             | 5.13           |
| 2483.50                  | 17.99             | AV       | V              | 31.64            | 49.63              | 54.00             | 4.37           |
| 4924.00                  | 44.64             | PK       | V              | 11.18            | 55.82              | 74.00             | 18.18          |
| 4924.00                  | 28.23             | AV       | V              | 11.18            | 39.41              | 54.00             | 14.59          |
| 7386.00                  | 35.96             | PK       | V              | 14.89            | 50.85              | 74.00             | 23.15          |
| 7386.00                  | 23.93             | AV       | V              | 14.89            | 38.82              | 54.00             | 15.18          |

**802.11n ht40 Mode:**

02.FH H40 Mode:

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2422 MHz    |                   |          |                |                  |                    |                   |                |
| 2422.00                  | 69.59             | PK       | H              | 31.56            | 101.15             | N/A               | N/A            |
| 2422.00                  | 60.17             | AV       | H              | 31.56            | 91.73              | N/A               | N/A            |
| 2422.00                  | 69.93             | PK       | V              | 31.56            | 101.49             | N/A               | N/A            |
| 2422.00                  | 60.56             | AV       | V              | 31.56            | 92.12              | N/A               | N/A            |
| 2390.00                  | 29.00             | PK       | V              | 31.46            | 60.46              | 74.00             | 13.54          |
| 2390.00                  | 16.87             | AV       | V              | 31.46            | 48.33              | 54.00             | 5.67           |
| 4844.00                  | 37.69             | PK       | V              | 10.96            | 48.65              | 74.00             | 25.35          |
| 4844.00                  | 25.22             | AV       | V              | 10.96            | 36.18              | 54.00             | 17.82          |
| 7266.00                  | 37.44             | PK       | V              | 14.63            | 52.07              | 74.00             | 21.93          |
| 7266.00                  | 24.82             | AV       | V              | 14.63            | 39.45              | 54.00             | 14.55          |
| Middle Channel: 2437 MHz |                   |          |                |                  |                    |                   |                |
| 2437.00                  | 69.81             | PK       | H              | 31.60            | 101.41             | N/A               | N/A            |
| 2437.00                  | 60.55             | AV       | H              | 31.60            | 92.15              | N/A               | N/A            |
| 2437.00                  | 70.11             | PK       | V              | 31.60            | 101.71             | N/A               | N/A            |
| 2437.00                  | 60.81             | AV       | V              | 31.60            | 92.41              | N/A               | N/A            |
| 4874.00                  | 37.28             | PK       | V              | 11.05            | 48.33              | 74.00             | 25.67          |
| 4874.00                  | 25.29             | AV       | V              | 11.05            | 36.34              | 54.00             | 17.66          |
| 7311.00                  | 36.93             | PK       | V              | 14.80            | 51.73              | 74.00             | 22.27          |
| 7311.00                  | 24.19             | AV       | V              | 14.80            | 38.99              | 54.00             | 15.01          |
| High Channel: 2452MHz    |                   |          |                |                  |                    |                   |                |
| 2452.00                  | 69.47             | PK       | H              | 31.63            | 101.10             | N/A               | N/A            |
| 2452.00                  | 59.98             | AV       | H              | 31.63            | 91.61              | N/A               | N/A            |
| 2452.00                  | 69.55             | PK       | V              | 31.63            | 101.18             | N/A               | N/A            |
| 2452.00                  | 60.14             | AV       | V              | 31.63            | 91.77              | N/A               | N/A            |
| 2483.50                  | 39.05             | PK       | V              | 31.64            | 70.69              | 74.00             | 3.31           |
| 2483.50                  | 19.51             | AV       | V              | 31.64            | 51.15              | 54.00             | 2.85           |
| 4904.00                  | 37.62             | PK       | V              | 11.14            | 48.76              | 74.00             | 25.24          |
| 4904.00                  | 24.96             | AV       | V              | 11.14            | 36.10              | 54.00             | 17.90          |
| 7356.00                  | 36.53             | PK       | V              | 14.80            | 51.33              | 74.00             | 22.67          |
| 7356.00                  | 23.42             | AV       | V              | 14.80            | 38.22              | 54.00             | 15.78          |

**LE 1 Mbps:**

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                  |                    |                   |                |
| 2402.00                  | 63.88             | PK       | H              | 31.51            | 95.39              | N/A               | N/A            |
| 2402.00                  | 62.81             | AV       | H              | 31.51            | 94.32              | N/A               | N/A            |
| 2402.00                  | 66.41             | PK       | V              | 31.51            | 97.92              | N/A               | N/A            |
| 2402.00                  | 65.17             | AV       | V              | 31.51            | 96.68              | N/A               | N/A            |
| 2390.00                  | 27.64             | PK       | V              | 31.46            | 59.10              | 74.00             | 14.90          |
| 2390.00                  | 14.23             | AV       | V              | 31.46            | 45.69              | 54.00             | 8.31           |
| 4804.00                  | 37.29             | PK       | V              | 10.91            | 48.20              | 74.00             | 25.80          |
| 4804.00                  | 25.39             | AV       | V              | 10.91            | 36.30              | 54.00             | 17.70          |
| 7206.00                  | 38.42             | PK       | V              | 14.22            | 52.64              | 74.00             | 21.36          |
| 7206.00                  | 28.03             | AV       | V              | 14.22            | 42.25              | 54.00             | 11.75          |
| Middle Channel: 2440 MHz |                   |          |                |                  |                    |                   |                |
| 2440.00                  | 64.04             | PK       | H              | 31.60            | 95.64              | N/A               | N/A            |
| 2440.00                  | 63.24             | AV       | H              | 31.60            | 94.84              | N/A               | N/A            |
| 2440.00                  | 67.21             | PK       | V              | 31.60            | 98.81              | N/A               | N/A            |
| 2440.00                  | 66.59             | AV       | V              | 31.60            | 98.19              | N/A               | N/A            |
| 4880.00                  | 36.53             | PK       | V              | 11.07            | 47.60              | 74.00             | 26.40          |
| 4880.00                  | 25.13             | AV       | V              | 11.07            | 36.20              | 54.00             | 17.80          |
| 7320.00                  | 36.52             | PK       | V              | 14.80            | 51.32              | 74.00             | 22.68          |
| 7320.00                  | 25.36             | AV       | V              | 14.80            | 40.16              | 54.00             | 13.84          |
| High Channel: 2480 MHz   |                   |          |                |                  |                    |                   |                |
| 2480.00                  | 64.30             | PK       | H              | 31.64            | 95.94              | N/A               | N/A            |
| 2480.00                  | 62.71             | AV       | H              | 31.64            | 94.35              | N/A               | N/A            |
| 2480.00                  | 67.45             | PK       | V              | 31.64            | 99.09              | N/A               | N/A            |
| 2480.00                  | 66.67             | AV       | V              | 31.64            | 98.31              | N/A               | N/A            |
| 2483.50                  | 28.29             | PK       | V              | 31.64            | 59.93              | 74.00             | 14.07          |
| 2483.50                  | 15.56             | AV       | V              | 31.64            | 47.20              | 54.00             | 6.80           |
| 4960.00                  | 37.16             | PK       | V              | 11.23            | 48.39              | 74.00             | 25.61          |
| 4960.00                  | 25.80             | AV       | V              | 11.23            | 37.03              | 54.00             | 16.97          |
| 7440.00                  | 35.54             | PK       | V              | 15.26            | 50.80              | 74.00             | 23.20          |
| 7440.00                  | 23.79             | AV       | V              | 15.26            | 39.05              | 54.00             | 14.95          |




**LE 2 Mbps:**

2.7 Mbps

| Frequency<br>(MHz)       | Receiver          |          | Polar<br>(H/V) | Factor<br>(dB/m) | Result<br>(dBµV/m) | Limit<br>(dBµV/m) | Margin<br>(dB) |
|--------------------------|-------------------|----------|----------------|------------------|--------------------|-------------------|----------------|
|                          | Reading<br>(dBµV) | Detector |                |                  |                    |                   |                |
| Low Channel: 2402 MHz    |                   |          |                |                  |                    |                   |                |
| 2402.00                  | 63.62             | PK       | H              | 31.51            | 95.13              | N/A               | N/A            |
| 2402.00                  | 62.16             | AV       | H              | 31.51            | 93.67              | N/A               | N/A            |
| 2402.00                  | 66.91             | PK       | V              | 31.51            | 98.42              | N/A               | N/A            |
| 2402.00                  | 65.20             | AV       | V              | 31.51            | 96.71              | N/A               | N/A            |
| 2390.00                  | 27.88             | PK       | V              | 31.46            | 59.34              | 74.00             | 14.66          |
| 2390.00                  | 14.83             | AV       | V              | 31.46            | 46.29              | 54.00             | 7.71           |
| 4804.00                  | 36.84             | PK       | V              | 10.91            | 47.75              | 74.00             | 26.25          |
| 4804.00                  | 25.33             | AV       | V              | 10.91            | 36.24              | 54.00             | 17.76          |
| 7206.00                  | 37.33             | PK       | V              | 14.22            | 51.55              | 74.00             | 22.45          |
| 7206.00                  | 27.48             | AV       | V              | 14.22            | 41.70              | 54.00             | 12.30          |
| Middle Channel: 2440 MHz |                   |          |                |                  |                    |                   |                |
| 2440.00                  | 63.53             | PK       | H              | 31.60            | 95.13              | N/A               | N/A            |
| 2440.00                  | 61.42             | AV       | H              | 31.60            | 93.02              | N/A               | N/A            |
| 2440.00                  | 66.95             | PK       | V              | 31.60            | 98.55              | N/A               | N/A            |
| 2440.00                  | 65.35             | AV       | V              | 31.60            | 96.95              | N/A               | N/A            |
| 4880.00                  | 37.26             | PK       | V              | 11.07            | 48.33              | 74.00             | 25.67          |
| 4880.00                  | 24.73             | AV       | V              | 11.07            | 35.80              | 54.00             | 18.20          |
| 7320.00                  | 36.47             | PK       | V              | 14.80            | 51.27              | 74.00             | 22.73          |
| 7320.00                  | 27.71             | AV       | V              | 14.80            | 42.51              | 54.00             | 11.49          |
| High Channel: 2480 MHz   |                   |          |                |                  |                    |                   |                |
| 2480.00                  | 64.13             | PK       | H              | 31.64            | 95.77              | N/A               | N/A            |
| 2480.00                  | 62.07             | AV       | H              | 31.64            | 93.71              | N/A               | N/A            |
| 2480.00                  | 67.75             | PK       | V              | 31.64            | 99.39              | N/A               | N/A            |
| 2480.00                  | 65.83             | AV       | V              | 31.64            | 97.47              | N/A               | N/A            |
| 2483.50                  | 28.55             | PK       | V              | 31.64            | 60.19              | 74.00             | 13.81          |
| 2483.50                  | 15.06             | AV       | V              | 31.64            | 46.70              | 54.00             | 7.30           |
| 4960.00                  | 37.57             | PK       | V              | 11.23            | 48.80              | 74.00             | 25.20          |
| 4960.00                  | 24.99             | AV       | V              | 11.23            | 36.22              | 54.00             | 17.78          |
| 7440.00                  | 35.29             | PK       | V              | 15.26            | 50.55              | 74.00             | 23.45          |
| 7440.00                  | 24.10             | AV       | V              | 15.26            | 39.36              | 54.00             | 14.64          |




**Worst Test plots(802.11b Middle channel was the worst)**  
**Horizontal:**

Fundamental  
Test with Band  
Rejection Filter

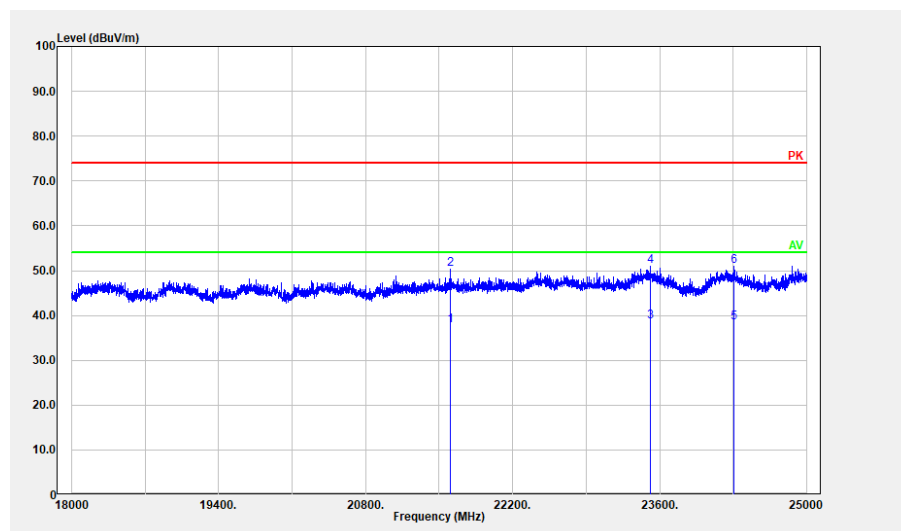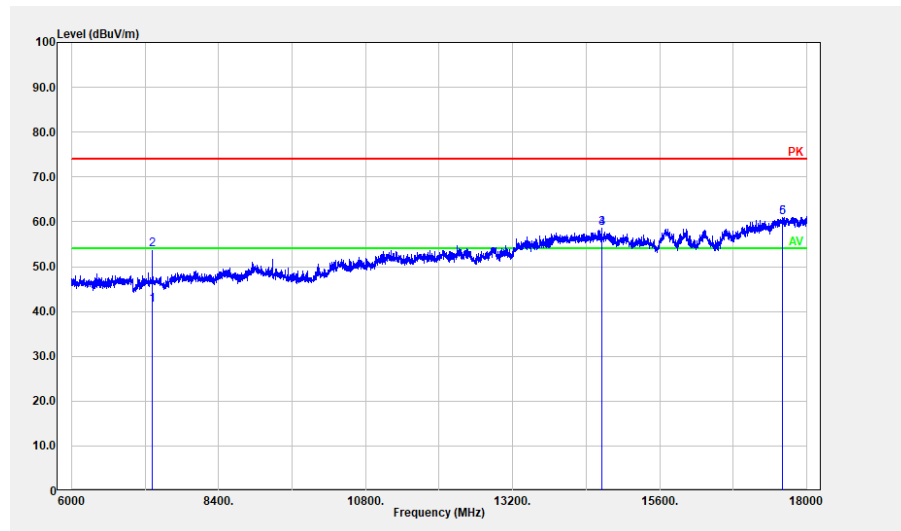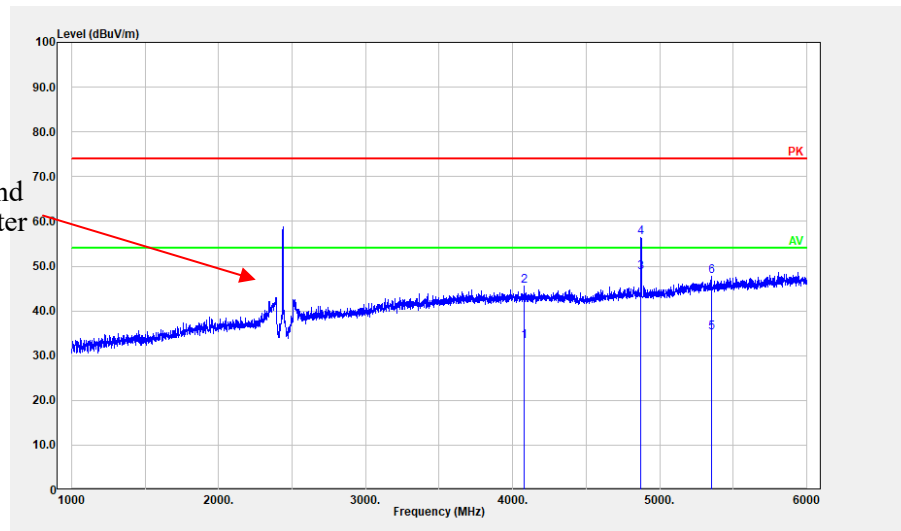

**Vertical:**

Fundamental  
Test with Band  
Rejection Filter

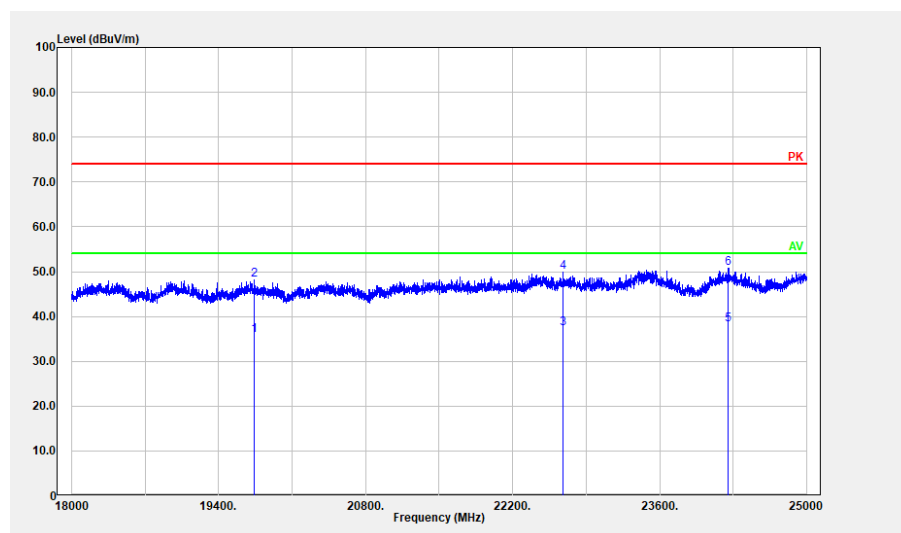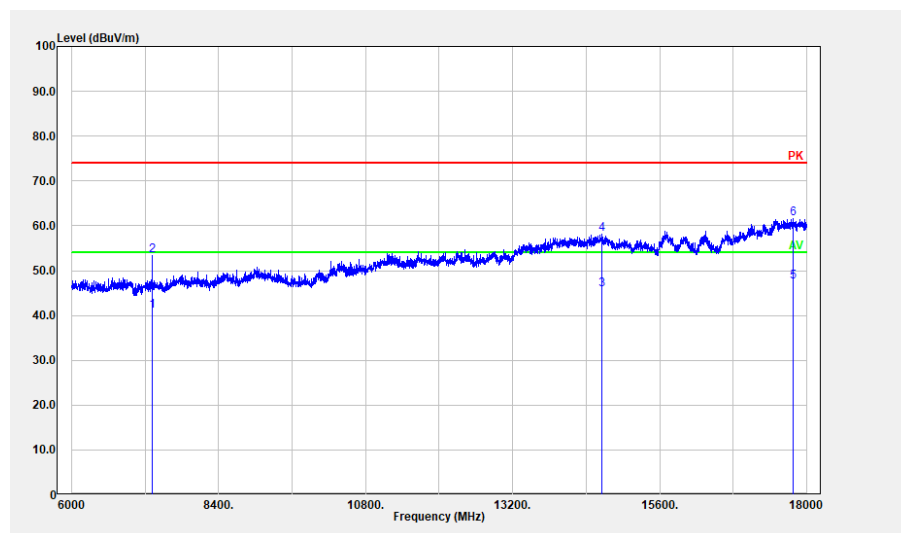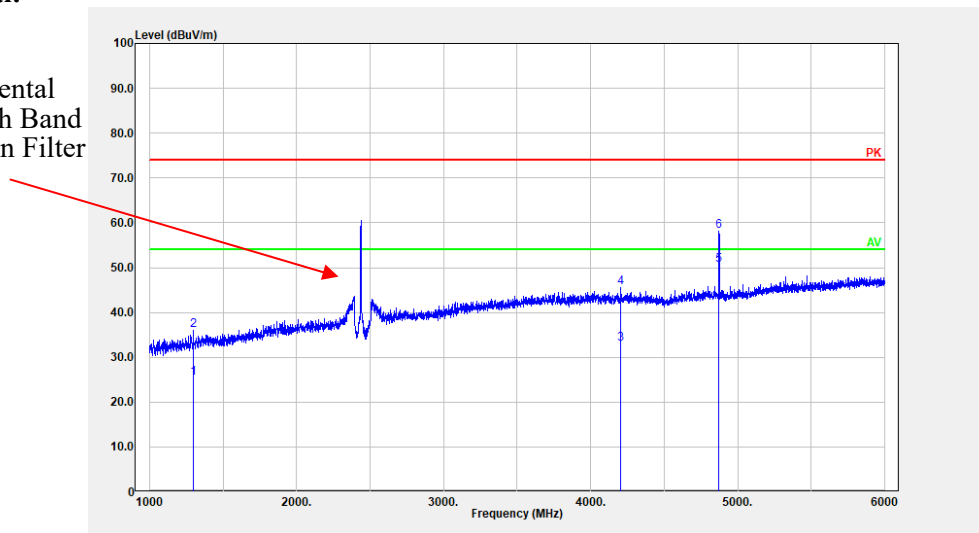



### 4.3 Maximum Peak Conducted Output Power

|                |                  |              |              |
|----------------|------------------|--------------|--------------|
| Serial Number: | CR21100085-RF-S1 | Test Date:   | 2021-11-19   |
| Test Site:     | RF               | Test Mode:   | Transmitting |
| Tester:        | Carl Liang       | Test Result: | Pass         |

#### Environmental Conditions:

|                      |      |                              |    |                        |       |
|----------------------|------|------------------------------|----|------------------------|-------|
| Temperature:<br>(°C) | 23.7 | Relative<br>Humidity:<br>(%) | 50 | ATM Pressure:<br>(kPa) | 101.5 |
|----------------------|------|------------------------------|----|------------------------|-------|

#### Test Equipment List and Details:

| Manufacturer  | Description               | Model         | Serial Number | Calibration Date | Calibration Due Date |
|---------------|---------------------------|---------------|---------------|------------------|----------------------|
| Agilent       | USB Wideband Power Sensor | U2021XA       | MY54080015    | 2021-07-22       | 2022-07-21           |
| zhuoxiang     | Coaxial Cable             | SMA-178       | 211002        | Each time        | N/A                  |
| Mini-Circuits | DC Block                  | BLK-18-S+     | 1554403       | 2021-08-08       | 2022-08-07           |
| eastsheep     | Coaxial Attenuator        | 2W-SMA-JK-18G | 21060301      | 2021-08-08       | 2022-08-07           |

\* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

#### Test Data:

##### 802.11b/g/n:

| Test Modes   | Test Channel | Test Frequency (MHz) | Maximum Conducted Peak Output Power (dBm) | Maximum Conducted Average Output Power (dBm) | Limit (dBm) |
|--------------|--------------|----------------------|-------------------------------------------|----------------------------------------------|-------------|
| 802.11b      | Lowest       | 2412                 | 23.18                                     | 19.37                                        | 30          |
|              | Middle       | 2437                 | 23.17                                     | 19.30                                        | 30          |
|              | Highest      | 2462                 | 23.03                                     | 19.16                                        | 30          |
| 802.11g      | Lowest       | 2412                 | 27.76                                     | 19.06                                        | 30          |
|              | Middle       | 2437                 | 27.63                                     | 18.94                                        | 30          |
|              | Highest      | 2462                 | 27.43                                     | 18.73                                        | 30          |
| 802.11n ht20 | Lowest       | 2412                 | 25.75                                     | 17.07                                        | 30          |
|              | Middle       | 2437                 | 25.62                                     | 17.01                                        | 30          |
|              | Highest      | 2462                 | 25.45                                     | 16.81                                        | 30          |
| 802.11n ht40 | Lowest       | 2422                 | 24.13                                     | 15.27                                        | 30          |
|              | Middle       | 2437                 | 23.99                                     | 15.21                                        | 30          |
|              | Highest      | 2452                 | 23.94                                     | 15.14                                        | 30          |

Note: the result is consistent with original test result.

**BLE:**

| Test Modes                                                | Test Frequency (MHz) | Maximum Conducted Peak Output Power (dBm) | Limit (dBm) |
|-----------------------------------------------------------|----------------------|-------------------------------------------|-------------|
| BLE 1Mbps                                                 | 2402                 | 3.54                                      | $\leq 30$   |
|                                                           | 2440                 | 3.58                                      | $\leq 30$   |
|                                                           | 2480                 | 2.96                                      | $\leq 30$   |
| BLE 2Mbps                                                 | 2402                 | 3.34                                      | $\leq 30$   |
|                                                           | 2440                 | 3.51                                      | $\leq 30$   |
|                                                           | 2480                 | 2.99                                      | $\leq 30$   |
| Note: the result is consistent with original test result. |                      |                                           |             |

## 5. RF EXPOSURE EVALUATION

### 5.1 Applicable Standard

FCC §15.247 (i)

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess of the Commission's guidelines. See §1.1307(b)(1) of this chapter.

### 5.2 Procedure

According to KDB447498 D01 General RF Exposure Guidance v06:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$  for 1-g SAR and  $\leq 7.5$  for 10-g extremity SAR, where

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- 3.0 and 7.5 are referred to as the numeric thresholds in the step 2 below

The test exclusions are applicable only when the minimum test separation distance is  $\leq 50$  mm and for transmission frequencies between 100 MHz and 6 GHz. When the minimum test separation distance is  $< 5$  mm, a distance of 5 mm according to 5) in section 4.1 is applied to determine SAR test exclusion.

### 5.3 Measurement Result

For BLE:

The max conducted power including tune-up tolerance is 4.0 dBm (2.51 mW).  
 $[(\text{max. power of channel, mW})/(\text{min. test separation distance, mm})][\sqrt{f(\text{GHz})}]$   
 $= 2.51/5 \cdot (\sqrt{2.480}) = 0.8 < 3.0$

**Result: Compliance. The stand-alone SAR evaluation is not necessary.**

For Wi-Fi:

**Result: Compliance.** Please refer to the SAR report: RXZ211214003SA01.

===== END OF REPORT =====