



TESTING LABORATORY
CERTIFICATE#4323.01



SAR EVALUATION REPORT

For

Shanghai Sunmi Technology Co.,Ltd.

Room 505, KIC Plaza, No.388 Song Hu Road, Yang Pu District, Shanghai, China

FCC ID: 2AH25T5940

IC:22621-T5940

Report Type: Original Report		Product Type: Wireless data POS System	
Project Engineer:	Bard Liu		
Report Number:	RKSA210422002-20A		
Report Date:	2021-06-21		
Reviewed By:	Oscar Ye EMC Manager		
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road,Kunshan,Jiangsu province,China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn		

Attestation of Test Results			
EUT Information	EUT Description	Wireless data POS System	
	Tested Model	T5940	
	FCC ID	2AH25T5940	
	Serial Number	RKSA210422002	
	Test Date	2021-04-23~ 2021-04-30	
MODE		Max. SAR Level(s) Reported(W/kg)	Limit (W/kg)
GSM850	1g Body SAR	0.86	1.6
GSM1900	1g Body SAR	1.42	
WCDMA II	1g Body SAR	1.10	
WCDMA IV	1g Body SAR	1.15	
WCDMA V	1g Body SAR	0.93	
LTE Band 7	1g Body SAR	1.14	
LTE Band 12<E Band 17	1g Body SAR	0.77	
LTE Band 25<E Band 2	1g Body SAR	1.19	
LTE Band 26<E Band 5	1g Body SAR	0.70	
LTE Band 66<E Band 4	1g Body SAR	1.26	
LTE Band 40-low	1g Body SAR	1.12	
LTE Band 40-upper	1g Body SAR	1.32	
LTE Band 41	1g Body SAR	1.12	
Bluetooth	1g Body SAR	0.25	
2.4GHz WLAN	1g Body SAR	0.52	
5.2GHz WLAN	1g Body SAR	1.20	
5.8GHz WLAN	1g Body SAR	1.01	
Simultaneous	1g Body SAR	1.43 (Hotspot)	
	1g Body SAR	1.43	
Applicable Standards	FCC 47 CFR part 2.1093 Radiofrequency radiation exposure evaluation: portable devices		
	RSS-102 Issue 5 March 2015 Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands).		
	RF Exposure Procedures: TCB Workshop April 2019		
	IEEE1528:2013 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques		
	IEC 62209-1:2016 Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz)		
	IEC 62209-2:2010 Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices-Human models, instrumentation, and procedures-Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)		
	KDB procedures KDB 447498 D01 General RF Exposure Guidance v06 KDB 648474 D04 Handset SAR v01r03		

	KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04 KDB 865664 D02 RF Exposure Reporting v01r02 KDB 941225 D01 3G SAR Procedures v03r01 KDB 941225 D05 SAR for LTE Devices v02r05 KDB 248227 D01 802 11 Wi-Fi SAR v02r02
--	---

Note: This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in **FCC 47 CFR part 2.1093** and has been tested in accordance with the measurement procedures specified in IEEE 1528-2013 and RF exposure KDB procedures.

The results and statements contained in this report pertain only to the device(s) evaluated.

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	5
EUT DESCRIPTION	6
TECHNICAL SPECIFICATION	6
REFERENCE, STANDARDS, AND GUIDELINES.....	8
SAR LIMITS	8
FACILITIES.....	9
DESCRIPTION OF TEST SYSTEM	10
EQUIPMENT LIST AND CALIBRATION	17
EQUIPMENTS LIST & CALIBRATION INFORMATION	17
SAR MEASUREMENT SYSTEM VERIFICATION	18
LIQUID VERIFICATION	18
SYSTEM ACCURACY VERIFICATION	21
SAR SYSTEM VALIDATION DATA	22
EUT TEST STRATEGY AND METHODOLOGY	31
TEST POSITIONS FOR DEVICE OPERATING NEXT TO A PERSON’S EAR	31
CHEEK/TOUCH POSITION	32
EAR/TILT POSITION	32
TEST POSITIONS FOR BODY-WORN AND OTHER CONFIGURATIONS	33
TEST DISTANCE FOR SAR EVALUATION	33
SAR EVALUATION PROCEDURE	34
CONDUCTED OUTPUT POWER MEASUREMENT	35
PROVISION APPLICABLE	35
TEST PROCEDURE	35
RADIO CONFIGURATION	35
PROXIMITY SENSOR OPERATION.....	40
MAXIMUM TARGET OUTPUT POWER	47
TEST RESULTS:	49
STANDALONE SAR TEST EXCLUSION CONSIDERATIONS	104
SAR MEASUREMENT RESULTS.....	108
SAR TEST DATA.....	108
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION	119
APPENDIX A SAR PLOTS OF SAR MEASUREMENT	120
APPENDIX B MEASUREMENT UNCERTAINTY	137
APPENDIX C EUT TEST POSITION PHOTOS	139
APPENDIX D CALIBRATION CERTIFICATES	140

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	RKSA210422002-20A	Original Report	2021-06-21

EUT DESCRIPTION

This report has been prepared on behalf of **Shanghai Sunmi Technology Co.,Ltd.** and their product **Wireless data POS System**, Model: **T5940**, FCC ID: **2AH25T5940** or the EUT (Equipment under Test) as referred to in the rest of this report.

**All measurement and test data in this report was gathered from production sample serial number: RKSA210422002-20A (Assigned by BACL).The EUT supplied by the applicant was received on 2024-04-22.*

Technical Specification

Device Type:	Wireless data POS System
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	FPC Antenna
Body-Worn Accessories:	None
Face-Head Accessories:	None
Operation Mode :	GPRS/EGPRS WCDMA FDD-LTE/ TDD-LTE WLAN2.4G/WLAN 5G Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX), 869-894 MHz(RX) GSM1900: 1850-1910MHz(TX), 1930-1990MHz(RX) WCDMA Band II: 1850-1910 MHz MHz(TX), 1930-1990 MHz(RX) WCDMA Band IV: 1710-1755 MHz(TX), 2110-2155MHz(RX) WCDMA Band V: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX), 1930-1990MHz(RX) LTE Band 4: 1710-1755 MHz(TX), 2110-2155MHz(RX) LTE Band 5: 824-849 MHz(TX), 869-894 MHz(RX) LTE Band 7: 2500-2570 MHz(TX), 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX), 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX), 734-746 MHz(RX) LTE Band 25: 1850-1915 MHz(TX), 1930-1995 MHz(RX) LTE Band 26: 814-849 MHz(TX), 859-894 MHz(RX) LTE Band 40 Lower: 2305-2315 MHz(TX), 2305-2315 MHz(RX) LTE Band 40 Upper: 2350-2360 MHz(TX), 2350-2360 MHz(RX) LTE Band 41: 2555-2655 MHz(TX), 2555-2655 MHz(RX) LTE Band 66: 1710-1780 MHz(TX), 2110-2200 MHz(RX) 2.4G Wi-Fi: 2412-2462 MHz(802.11b/g/n20), 2422-2452 MHz(802.11n40) BT/BLE(1Mbps)/BLE(2Mbps): 2402-2480 MHz 5G WIFI Band 1: 5150~5250 MHz, Band 4: 5725~5850 MHz
Conducted RF Power:	GSM850: 33.98dBm GSM1900:29.45dBm WCDMA Band II: 22.19 dBm; WCDMA Band IV: 22.34 dBm WCDMA Band V: 22.16 dBm LTE Band 2: 22.26 dBm; LTE Band 4: 22.21 dBm LTE Band 5: 22.25 dBm;LTE Band 7: 22.21 dBm LTE Band 12: 22.24 dBm; LTE Band 17: 22.31 dBm LTE Band 25: 22.25 dBm; LTE Band 26: 22.26 dBm LTE Band 40-low: 22.16 dBm; LTE Band 40-up: 22.25 dBm LTE Band 41: 22.30 dBm

	LTE Band 66: 22.35 dBm; WLAN 2.4G: 16.92 dBm WLAN 5.2G: 11.56 dBm WLAN 5.8G :13.30 dBm Bluetooth(BDR/EDR); 9.91 dBm; BLE:-2.37 dBm
Power Source:	DC 7.7 V from battery and DC 5.0V from adapter
Normal Operation:	Body Supported

REFERENCE, STANDARDS, AND GUIDELINES

FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits. SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

SAR Limits

FCC Limit

EXPOSURE LIMITS	SAR (W/kg)	
	(General Population / Uncontrolled Exposure Environment)	(Occupational / Controlled Exposure Environment)
Spatial Average (averaged over the whole body)	0.08	0.4
Spatial Peak (averaged over any 1 g of tissue)	1.60	8.0
Spatial Peak (hands/wrists/feet/ankles averaged over 10 g)	4.0	20.0

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).


General Population/Uncontrolled environments Spatial Peak limit 1.6W/kg for 1g Body SAR and 4.0 W/kg for 10g Extremity SAR applied to the EUT.

FACILITIES


The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

These measurements were performed with the automated near-field scanning system DASY6 from Schmid & Partner Engineering AG (SPEAG) which is the Fifth generation of the system shown in the figure hereinafter:

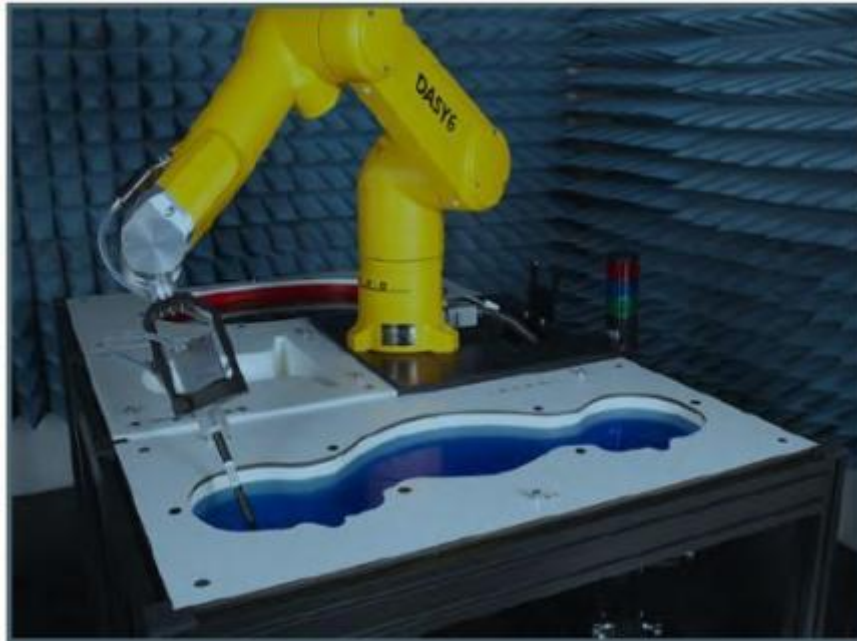

The DASY6 system for performing compliance tests consists of the following items:

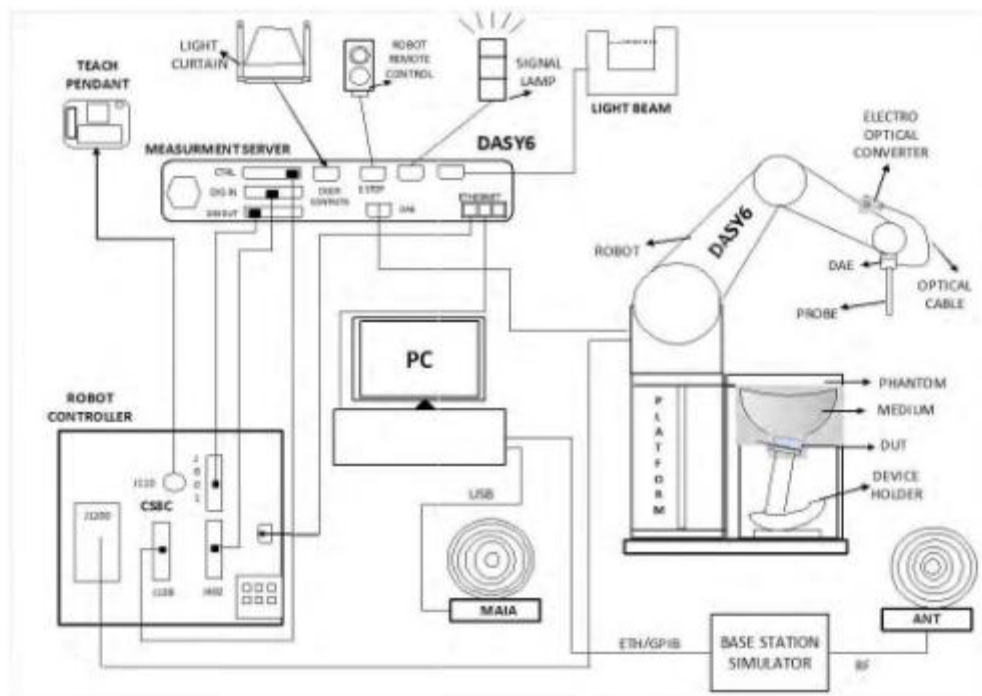

- A standard high precision 6-axis robot (Staubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal application, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running Win7 professional operating system and the DASY52 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

DASY6 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz Intel ULV Celeron, 128 MB chip-disk and 128 MB RAM. The necessary circuits for communication with the DAE4 (or DAE3) electronics box, as well as the 16-bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



The measurement server performs all real-time data evaluations of field measurements and surface detection, controls robot movements, and handles safety operations. The PC operating system cannot interfere with these time-critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program- controlled robot movements. Furthermore, the measurement server is equipped with an expansion port, which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Connection of devices from any other supplier could seriously damage the measurement server.

Data Acquisition Electronics

The data acquisition electronics (DAE4) consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of both the DAE4 as well as of the DAE3 box is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

EX3DV4 E-Field Probes

Frequency	10 MHz to > 6 GHz Linearity: ± 0.2 dB (30 MHz to 6 GHz)
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 μ W/g to > 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
Compatibility	DASY3, DASY4, DASY52 SAR and higher, EASY4/MRI

SAM Twin Phantom

The SAM Twin Phantom (shown in front of DASY6) is a fiberglass shell phantom with shell thickness 2 mm, except in the ear region where the thickness is increased to 6 mm. The phantom has three measurement areas: 1) Left Head, 2) Right Head, and 3) Flat Section. For larger devices, the use of the ELI-Phantom (shown behind DASY6) is required. For devices such as glasses with a wireless link, the Face Down Phantom is the most suitable (between the SAM Twin and ELI phantoms).

When the phantom is mounted inside allocated slot of the DASY6 platform, phantom reference points can be taught directly in the DASY5 V5.2 software. When the DASY6 platform is used to mount the Phantom, some of the phantom teaching points cannot be reached by the robot in DASY5 V5.2. A special tool called P1a-P2aX-Former is provided to transform two of the three points, P1 and P2, to reachable locations. To use these new teaching points, a revised phantom configuration file is required.


In addition to our standard broadband liquids, the phantom can be used with the following tissue simulating liquids:

Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.

DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).

Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the SAM Twin phantom.

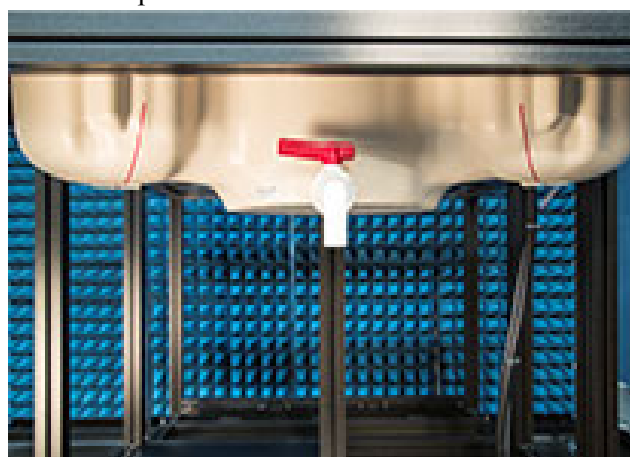


ELI Phantom

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30MHz to 6 GHz. ELI is fully compatible with the latest draft of the standard IEC 62209-2 and the use of all known tissue simulating liquids. ELI has been optimized for performance and can be integrated into a SPEAG standard phantom table. A cover is provided to prevent evaporation of water and changes in liquid parameters. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points.

The phantom can be used with the following tissue simulating liquids:

- Sugar-water-based liquids can be left permanently in the phantom. Always cover the liquid when the system is not in use to prevent changes in liquid parameters due to water evaporation.
- DGBE-based liquids should be used with care. As DGBE is a softener for most plastics, the liquid should be taken out of the phantom, and the phantom should be dried when the system is not in use (desirable at least once a week).
- Do not use other organic solvents without previously testing the solvent resistivity of the phantom.

Approximately 25 liters of liquid is required to fill the ELI phantom.

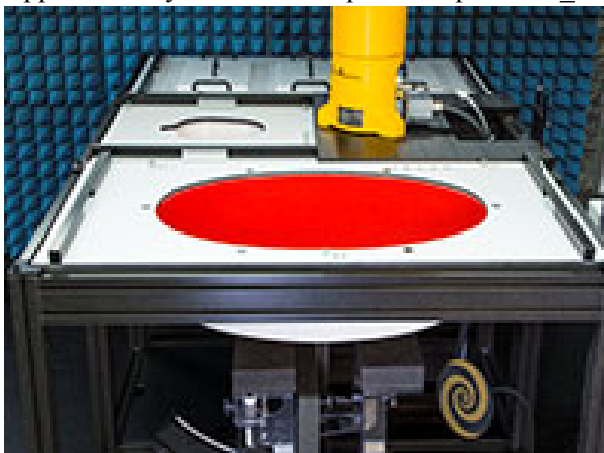

Robots

The DASY6 system uses the high-precision industrial robots TX60L, TX90XL, and RX160L from Staubli SA (France). The TX robot family - the successor of the well-known RX robot family - continues to offer the features important for DASY6 applications:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchrony motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

The robots are controlled by the Staubli CS8c robot controllers. All information regarding the use and maintenance of the robot arm and the robot controller is provided

Area Scans

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 15mm 2 step integral, with 1.5mm interpolation used to locate the peak SAR area used for zoom scan assessments.

Where the system identifies multiple SAR peaks (which are within 25% of peak value) the system will provide the user with the option of assessing each peak location individually for zoom scan averaging.

Zoom Scan (Cube Scan Averaging)

The averaging zoom scan volume utilized in the DASY5 software is in the shape of a cube and the side dimension of a 1 g or 10 g mass is dependent on the density of the liquid representing the simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side length of the 10g cube is 21.5mm.

When the cube intersects with the surface of the phantom, it is oriented so that 3 vertices touch the surface of the shell or the center of a face is tangent to the surface. The face of the cube closest to the surface is modified in order to conform to the tangent surface.

The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications (including FCC) utilize a physical step of 7 x 7 x 7 (5mmx5mmx5mm) providing a volume of 30 mm in the X & Y & Z axis.

Tissue Dielectric Parameters for Head and Body Phantoms

The head tissue dielectric parameters recommended by the IEC 62209-1:2016

Recommended Tissue Dielectric Parameters for Head liquid

Table A.3 – Dielectric properties of the head tissue-equivalent liquid

Frequency MHz	Relative permittivity ϵ_r	Conductivity (σ) S/m
300	45,3	0,87
450	43,5	0,87
750	41,9	0,89
835	41,5	0,90
900	41,5	0,97
1 450	40,5	1,20
1 500	40,4	1,23
1 640	40,2	1,31
1 750	40,1	1,37
1 800	40,0	1,40
1 900	40,0	1,40
2 000	40,0	1,40
2 100	39,8	1,49
2 300	39,5	1,67
2 450	39,2	1,80
2 600	39,0	1,96
3 000	38,5	2,40
3 500	37,9	2,91
4 000	37,4	3,43
4 500	36,8	3,94
5 000	36,2	4,45
5 200	36,0	4,66
5 400	35,8	4,86
5 600	35,5	5,07
5 800	35,3	5,27
6 000	35,1	5,48

NOTE For convenience, permittivity and conductivity values at those frequencies which are not part of the original data provided by Drossos et al. [33] or the extension to 5 800 MHz are provided (i.e. the values shown *in italics*). These values were linearly interpolated between the values in this table that are immediately above and below these values, except the values at 6 000 MHz that were linearly extrapolated from the values at 3 000 MHz and 5 800 MHz.

Note:

- 1, Effective February 19, 2019, FCC has permitted the use of single head-tissue simulating liquid specified in IEC 62209-1 for all SAR tests.
- 2, Mix and Match of traditional FCC SAR TSLs and IEC 62209-1 TSL in a single application is not permitted TSL can be changed in a Permissive Change.
- 3, If SAR increases and original SAR > 1.2 W/kg, additional SAR measurements will be required IEC 62209-1 TSL is an alternative, not mandatory at this time.
- 4, If FCC parameters are used, $\pm 5\%$ tolerance. If IEC parameters, $\pm 10\%$.
- 5, In this case, IEC parameters applied.


EQUIPMENT LIST AND CALIBRATION

Equipments List & Calibration Information

Equipment	Model	S/N	Calibration Date	Calibration Due Date
DASY5 Test Software	DASY52 52.10.2	N/A	N/A	N/A
DASY6 Measurement Server	DASY6 6.0.31	N/A	N/A	N/A
Data Acquisition Electronics	DAE4	527	2020/07/9	2021/07/8
E-Field Probe	EX3DV4	7557	2020/11/05	2021/11/04
Mounting Device	MD4HHTV5	SD 000 H01 KA	N/A	N/A
Twin-SAM Phantom	QD 000 P41 AA	1963	N/A	N/A
Dipole, 750MHz	D750V3	1166	2018/09/05	2021/09/04
Dipole, 835MHz	D835V2	445	2019/12/17	2022/12/16
Dipole, 1750MHz	D1750V2	1140	2018/06/25	2021/06/24
Dipole, 1900MHz	D1900V2	5d206	2018/09/11	2021/09/10
Dipole, 2300MHz	D2300V2	1098	2019/10/02	2022/10/01
Dipole, 2450MHz	D2450V2	970	2018/06/26	2021/06/25
Dipole, 2600MHz	D2600V2	1162	2019/10/02	2022/10/01
Dipole, 5000MHz	D5GHzV2	1296	2019/10/03	2022/10/02
Simulated Tissue Liquid Head	HBBL600-6000V6	180611-3	Each Time	
Network Analyzer	8753B	3625A00809	2020/12/12	2021/12/11
Dielectric Assessment Kit	DAK-3.5	SM DAK 300AB	N/A	N/A
Signal Generator	N5182B	MY53051592	2020/12/12	2021/12/11
Power Meter	E4419B	GB43312421	2020/08/04	2021/08/03
Power Amplifier	5S1G4	71377	N/A	N/A
Directional Coupler	4242-10	3307	N/A	N/A
Attenuator	3dB	5402	N/A	N/A
Attenuator	10dB	AU 3842	N/A	N/A

SAR MEASUREMENT SYSTEM VERIFICATION

Liquid Verification

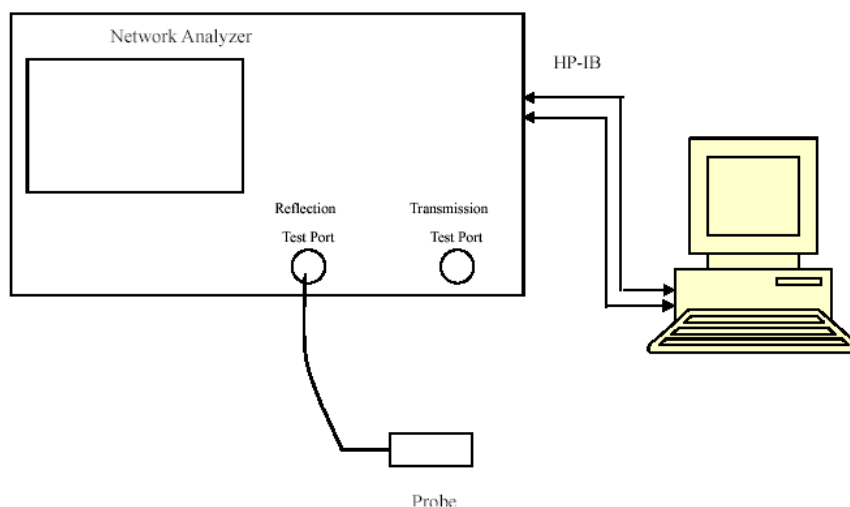

Liquid Verification Setup Block Diagram

Liquid Verification Results

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	$\Delta \sigma$	$\Delta \epsilon_r$	
750	Head	0.898	41.523	0.89	41.90	0.90	-0.90	± 5
704	Head	0.853	42.116	0.887	42.133	-4.16	-0.03	± 5
707.5	Head	0.857	42.072	0.887	42.112	-3.71	-0.09	± 5
711	Head	0.860	42.032	0.887	42.097	-3.37	-0.16	± 5

*Liquid Verification above was performed on 2021/04/23.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		σ (S/m)	ϵ_r	σ (S/m)	ϵ_r	$\Delta \sigma$	$\Delta \epsilon_r$	
835	Head	0.911	42.218	0.90	41.50	1.22	1.73	± 5
824.4	Head	0.901	42.351	0.898	41.512	0.11	2.03	± 5
837	Head	0.912	42.192	0.901	41.500	1.33	1.67	± 5
849	Head	0.923	42.044	0.909	41.500	1.43	1.31	± 5
826.4	Head	0.903	42.32	0.898	41.508	0.33	1.95	± 5
847	Head	0.921	42.082	0.907	41.500	1.21	1.40	± 5
821.5	Head	0.899	42.377	0.897	41.517	-0.11	2.06	± 5
831.5	Head	0.907	42.264	0.899	41.501	0.78	1.84	± 5
841.5	Head	0.917	42.131	0.903	41.500	1.89	1.52	± 5

*Liquid Verification above was performed on 2021/04/24.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
1750	Head	1.363	39.993	1.39	40.04	-1.94	-0.12	± 5
1712.4	Head	1.346	41.198	1.38	40.07	-2.46	2.82	± 5
1733	Head	1.345	40.065	1.377	40.065	-2.54	-0.01	± 5
1752.6	Head	1.366	39.981	1.388	40.034	-1.73	-0.12	± 5
1720	Head	1.331	40.118	1.369	40.089	-2.85	0.07	± 5
1745	Head	1.358	40.011	1.384	40.046	-1.59	-0.10	± 5
1770	Head	1.383	39.900	1.395	40.015	-0.50	-0.27	± 5

*Liquid Verification above was performed on 2021/04/25.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
1900	Head	1.433	39.546	1.400	40.000	2.36	-1.14	± 5
1850.2	Head	1.388	39.779	1.400	40.000	-0.86	-0.55	± 5
1880	Head	1.421	39.634	1.400	40.000	1.50	-0.91	± 5
1910	Head	1.453	39.495	1.400	40.000	3.79	-1.26	± 5
1908	Head	1.451	39.501	1.400	40.000	3.64	-1.25	± 5
1852.4	Head	1.391	39.771	1.400	40.000	-0.64	-0.57	± 5
1860	Head	1.399	39.736	1.400	40.000	-0.07	-0.66	± 5
1905	Head	1.448	39.518	1.400	40.000	3.43	-1.21	± 5

*Liquid Verification above was performed on 2021/04/26.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2300	Head	1.681	38.714	1.67	39.50	0.66	-1.99	± 5
2310	Head	1.692	38.67	1.673	39.424	1.32	-1.90	± 5
2355	Head	1.744	38.49	1.713	39.347	1.99	-2.19	± 5

*Liquid Verification above was performed on 2021/04/27.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2450	Head	1.872	38.795	1.80	39.20	4.00	-1.03	± 5
2402	Head	1.816	38.999	1.756	39.272	3.18	-0.69	± 5
2441	Head	1.862	38.833	1.792	39.213	4.02	-0.96	± 5
2480	Head	1.907	38.664	1.830	39.158	4.21	-1.27	± 5
2412	Head	1.828	38.957	1.765	39.256	3.86	-0.77	± 5
2437	Head	1.858	38.855	1.788	39.219	3.80	-0.93	± 5
2462	Head	1.887	38.742	1.812	39.183	4.25	-1.12	± 5

*Liquid Verification above was performed on 2021/04/28.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
2600	Head	2.050	37.759	1.96	39.00	4.59	-3.18	± 5
2510	Head	1.943	38.127	1.861	39.117	4.46	-2.54	± 5
2535	Head	1.973	38.016	1.888	39.084	4.39	-2.72	± 5
2560	Head	2.001	37.911	1.916	39.051	4.22	-2.92	± 5
2565	Head	2.007	37.89	1.921	39.045	4.53	-2.95	± 5
2580	Head	2.025	37.828	1.938	39.025	4.38	-3.08	± 5
2605	Head	2.056	37.74	1.966	38.994	4.37	-3.21	± 5
2645	Head	2.101	37.57	2.009	38.943	4.53	-3.52	± 5

*Liquid Verification above was performed on 2021/04/29.

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
5250	Head	4.844	35.985	4.71	35.95	2.85	0.10	± 5
5180	Head	4.771	37.087	4.639	36.020	2.82	2.96	± 5
5200	Head	4.79	37.059	4.660	36.000	2.79	2.94	± 5
5240	Head	4.837	36.995	4.701	35.960	2.91	2.88	± 5

*Liquid Verification above was performed on 2021/04/30

Frequency (MHz)	Liquid Type	Liquid Parameter		Target Value		Delta (%)		Tolerance (%)
		O (S/m)	ϵ_r	O (S/m)	ϵ_r	ΔO	$\Delta \epsilon_r$	
5800	Head	5.431	36.162	5.27	35.30	3.06	2.44	± 5
5745	Head	5.371	36.237	5.215	35.355	3.09	2.48	± 5
5785	Head	5.416	36.188	5.255	35.315	3.16	2.46	± 5
5825	Head	5.457	36.13	5.296	35.275	2.96	2.41	± 5

*Liquid Verification above was performed on 2021/04/30.


System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of $\pm 10\%$. The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

The spacing distances in the **System Verification Setup Block Diagram** is given by the following:

- $s = 15 \text{ mm} \pm 0,2 \text{ mm}$ for $300 \text{ MHz} \leq f \leq 1\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $1\,000 \text{ MHz} < f \leq 3\,000 \text{ MHz}$;
- $s = 10 \text{ mm} \pm 0,2 \text{ mm}$ for $3\,000 \text{ MHz} < f \leq 6\,000 \text{ MHz}$.

System Verification Setup Block Diagram

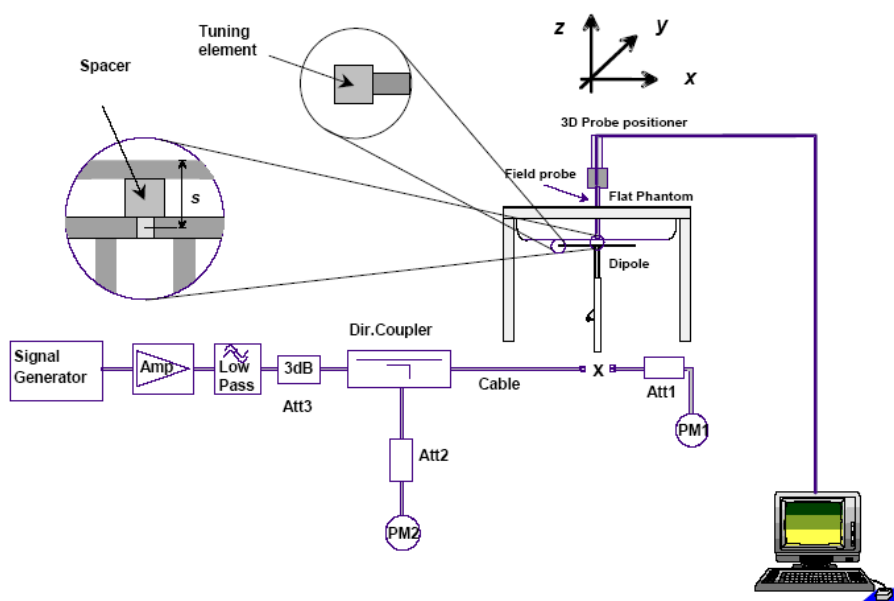

System Accuracy Check Results

Date	Frequency Band	Liquid Type	Input Power (mW)	Measured SAR (W/kg)		Normalized to 1W (W/kg)	Target Value (W/kg)	Delta (%)	Tolerance (%)
2021/04/23	750MHz	Head	250	1g	2.20	8.8	8.26	6.54	± 10
2021/04/24	835 MHz	Head	250	1g	2.57	10.28	9.52	7.98	± 10
2021/04/25	1750 MHz	Head	250	1g	9.19	36.76	36.50	0.71	± 10
2021/04/26	1900MHz	Head	250	1g	9.80	39.2	39.20	0.00	± 10
2021/04/27	2300MHz	Head	250	1g	11.9	47.6	48.00	-0.83	± 10
2021/04/28	2450 MHz	Head	250	1g	13.70	54.8	53.30	2.81	± 10
2021/04/29	2600 MHz	Head	250	1g	15.20	60.8	55.40	9.75	± 10
2021/04/30	5250 MHz	Head	100	1g	8.09	80.9	79.20	2.15	± 10
2021/04/30	5800 MHz	Head	100	1g	8.76	87.6	79.90	9.64	± 10

*The SAR values above are normalized to 1 Watt forward power.

SAR SYSTEM VALIDATION DATA

System Check_Head_750MHz

DUT: Dipole 750 MHz D750V3; Type: D750V3; Serial: D750V3 - SN:1166

Communication System: UID 0, CW (0); Frequency: 750 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 750$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 41.523$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(10.39, 10.39, 10.39); Calibrated: 11/5/2020,
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.54 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 53.49 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.32 W/kg

SAR(1 g) = 2.2 W/kg; SAR(10 g) = 1.44 W/kg

Maximum value of SAR (measured) = 2.56 W/kg

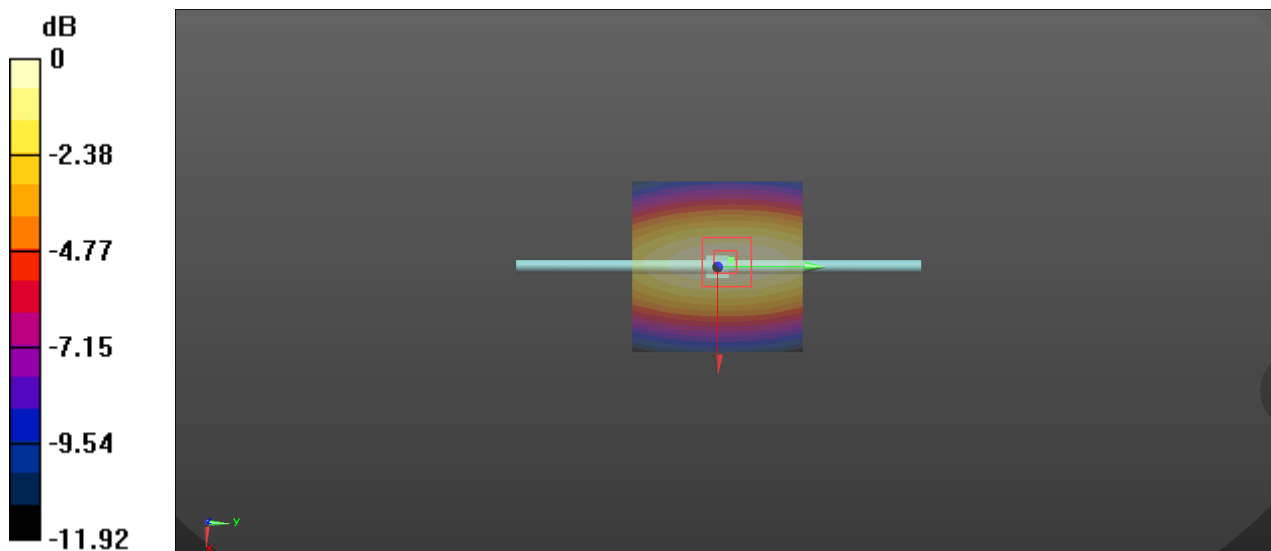

$$0 \text{ dB} = 2.54 \text{ W/kg} = 4.05 \text{ dBW/kg}$$

System Check Head 835MHz

DUT: Dipole 835 MHz D835V2; Type: D835V2; Serial: D835V2 - SN:445

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 835$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 42.218$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.05, 10.05, 10.05); Calibrated: 11/5/2020,
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.28 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.56 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.89 W/kg

SAR(1 g) = 2.57 W/kg; SAR(10 g) = 1.68 W/kg

Maximum value of SAR (measured) = 3.28 W/kg

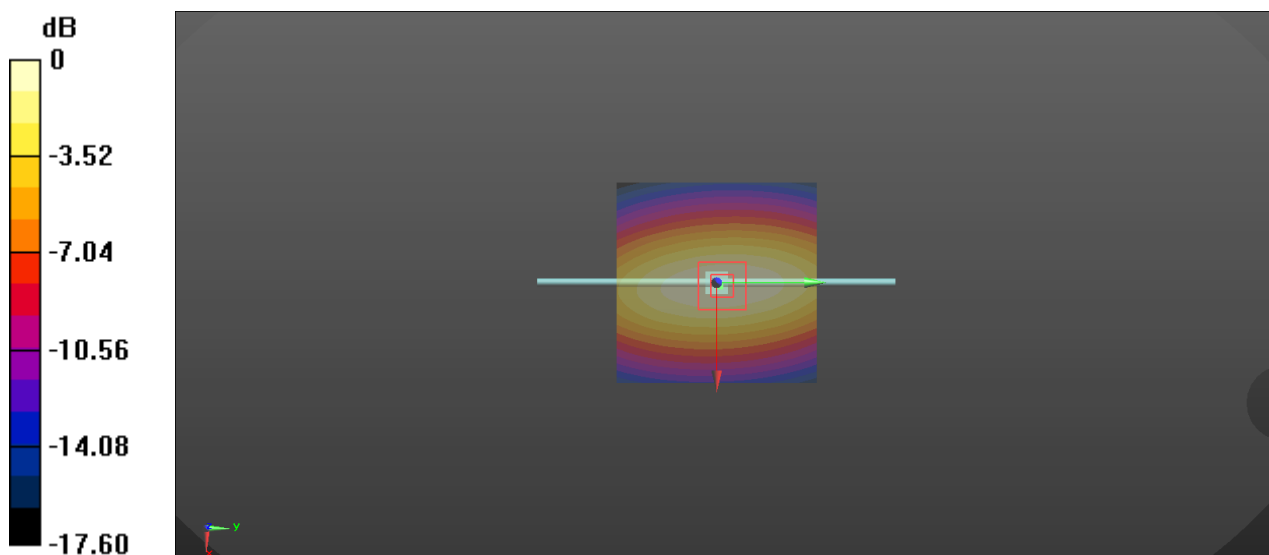

$$0 \text{ dB} = 3.28 \text{ W/kg} = 5.16 \text{ dBW/kg}$$

System Check Head 1750MHz

DUT: Dipole 1750 MHz D1750V2; Type: D1750V2; Serial: D1750V2 - SN:1140

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.363$ S/m; $\epsilon_r = 39.993$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.48, 8.48, 8.48); Calibrated: 11/5/2020,
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 12.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.49 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.19 W/kg; SAR(10 g) = 4.91 W/kg

Maximum value of SAR (measured) = 11.6 W/kg

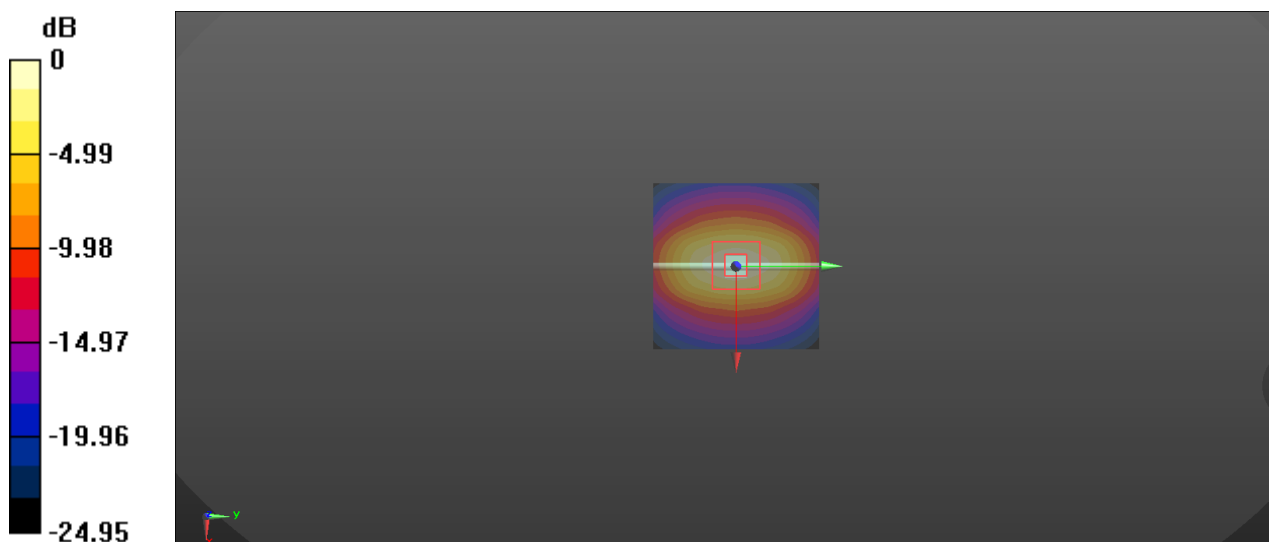

0 dB = 12.5 W/kg = 10.97 dBW/kg

System Check_Head_1900MHz

DUT: Dipole 1900 MHz D1900V2; Type: D1900V2; Serial: D1900V2 - SN:5d206

Communication System: UID 0, CW (0); Frequency: 1900 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.443$ S/m; $\epsilon_r = 39.546$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(8.12, 8.12, 8.12); Calibrated: 11/5/2020,
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 13.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 92.74 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.9 W/kg

SAR(1 g) = 9.8 W/kg; SAR(10 g) = 5.11 W/kg

Maximum value of SAR (measured) = 12.5 W/kg

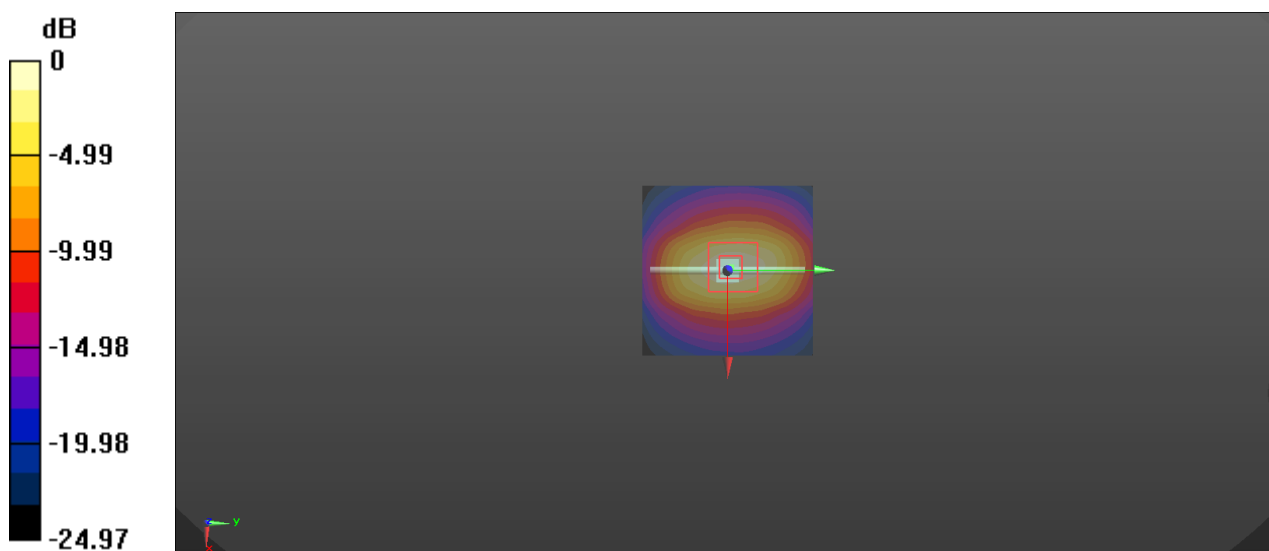

0 dB = 13.5 W/kg = 11.30 dBW/kg

System Check_Head_2300MHz

DUT: D2300V2-1098; Type: D2300V2; Serial: D2300V2 - SN:1098

Communication System: UID 0, CW (0); Frequency: 2300 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.681$ S/m; $\epsilon_r = 38.714$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(7.6, 7.6, 7.6); Calibrated: 11/5/2020,
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 16.1 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 95.66 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 23.8 W/kg

SAR(1 g) = 11.9 W/kg; SAR(10 g) = 5.72 W/kg

Maximum value of SAR (measured) = 15.3 W/kg

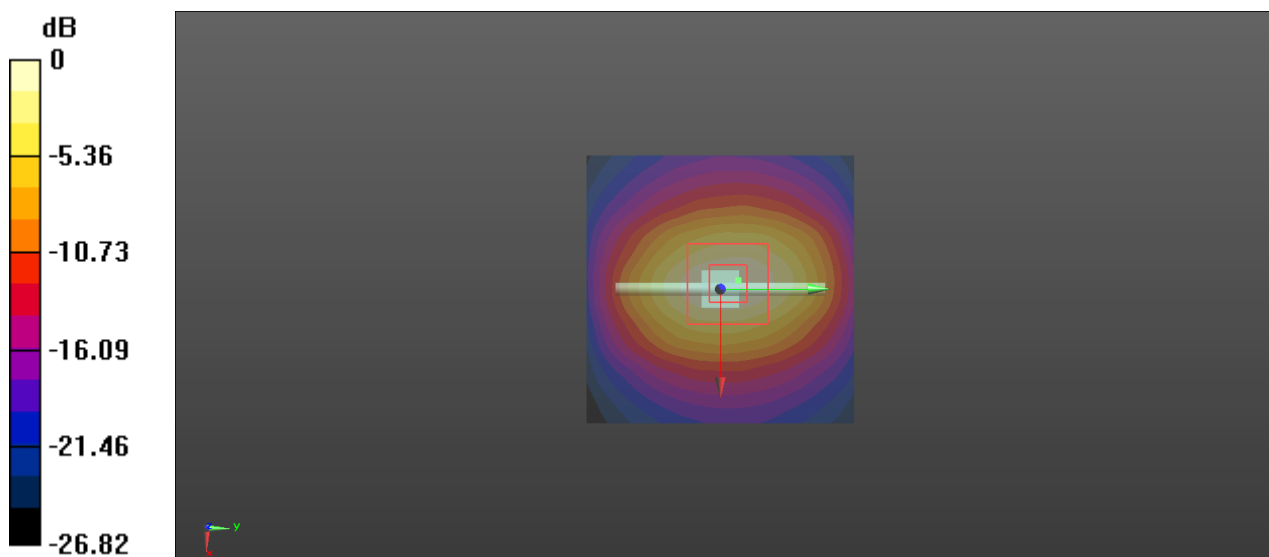

0 dB = 16.1 W/kg = 12.07 dBW/kg

System Check Head 2450MHz

DUT: Dipole 2450 MHz D2450V2; Type: D2450V2; Serial: D2450V2 - SN:970

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.872$ S/m; $\epsilon_r = 38.795$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.23, 7.23, 7.23); Calibrated: 11/5/2020,
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 18.2 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 98.17 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 28.2 W/kg

SAR(1 g) = 13.7 W/kg; SAR(10 g) = 6.42 W/kg

Maximum value of SAR (measured) = 18.0 W/kg

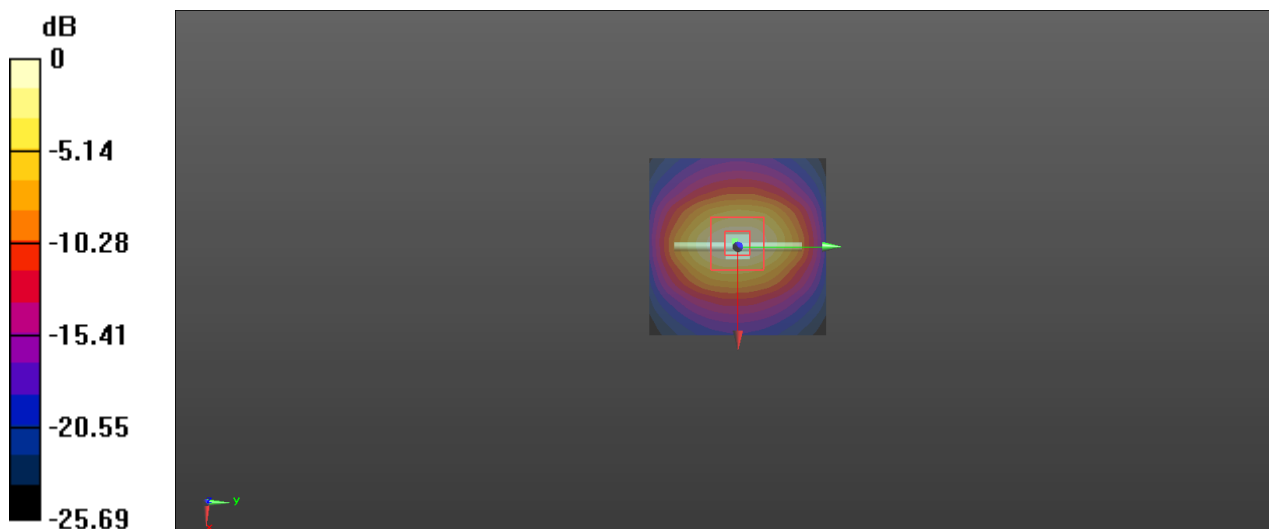

0 dB = 18.2 W/kg = 12.60 dBW/kg

System Check_Head_2600MHz

DUT: D2600V2-1162; Type: D2600V2; Serial: D2600V2 - SN:1162

Communication System: UID 0, CW (0); Frequency: 2600 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.05$ S/m; $\epsilon_r = 37.759$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(7.13, 7.13, 7.13); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 26.0 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 117.4 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 32.2 W/kg

SAR(1 g) = 15.2 W/kg; SAR(10 g) = 6.81 W/kg

Maximum value of SAR (measured) = 25.9 W/kg

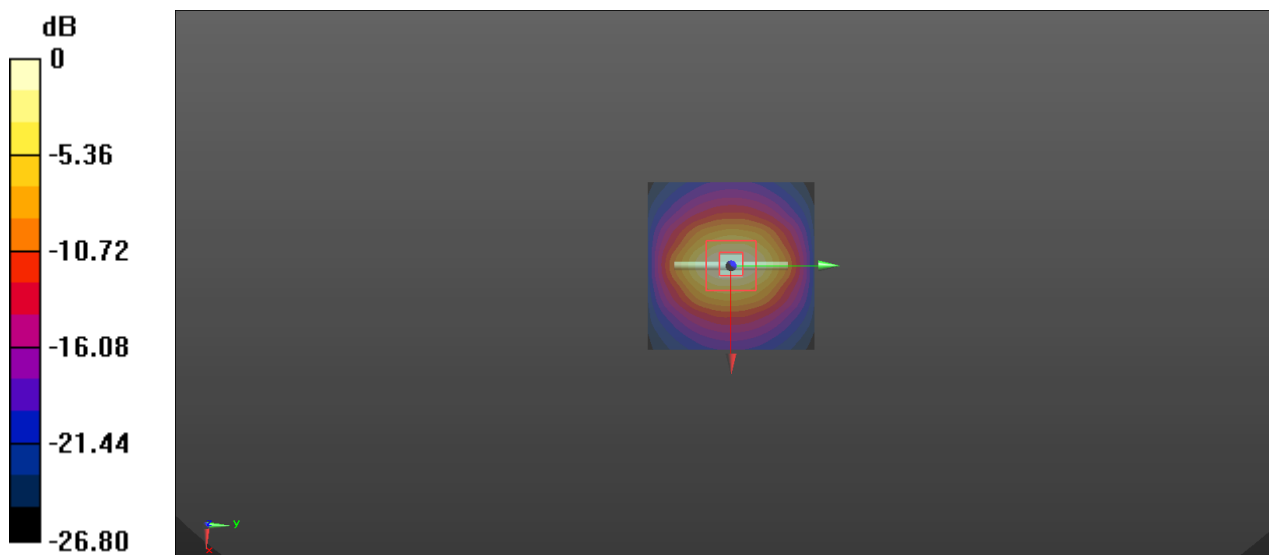

0 dB = 26.0 W/kg = 14.15 dBW/kg

System Check_Head_5250MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1296

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5250$ MHz; $\sigma = 4.844$ S/m; $\epsilon_r = 36.985$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(5.38, 5.38, 5.38); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 20.5 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.40 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 34.1 W/kg

SAR(1 g) = 8.09 W/kg; SAR(10 g) = 2.31 W/kg

Maximum value of SAR (measured) = 20.3 W/kg

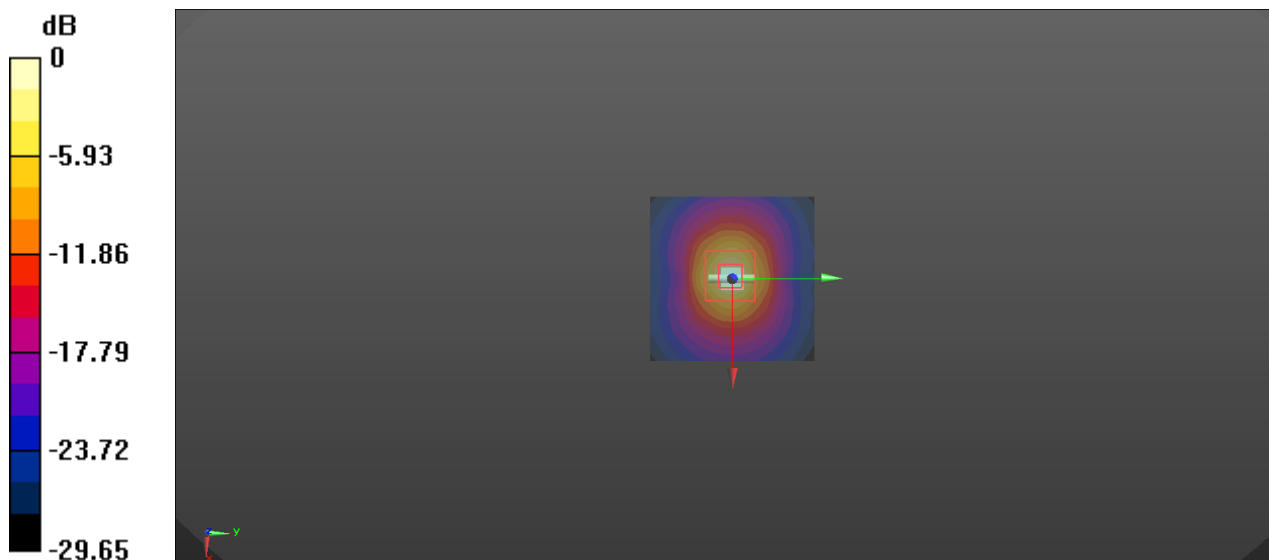

0 dB = 20.5 W/kg = 13.12 dBW/kg

System Check_Head_5800MHz

DUT: Dipole D5GHzV2; Type: D5GHzV2; Serial: D5GHzV2 - SN:1296

Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 5.431$ S/m; $\epsilon_r = 36.162$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.73, 4.73, 4.73); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Pin=100mW/Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 22.2 W/kg


Pin=100mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 70.15 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 41.3 W/kg

SAR(1 g) = 8.76 W/kg; SAR(10 g) = 2.44 W/kg

Maximum value of SAR (measured) = 22.4 W/kg

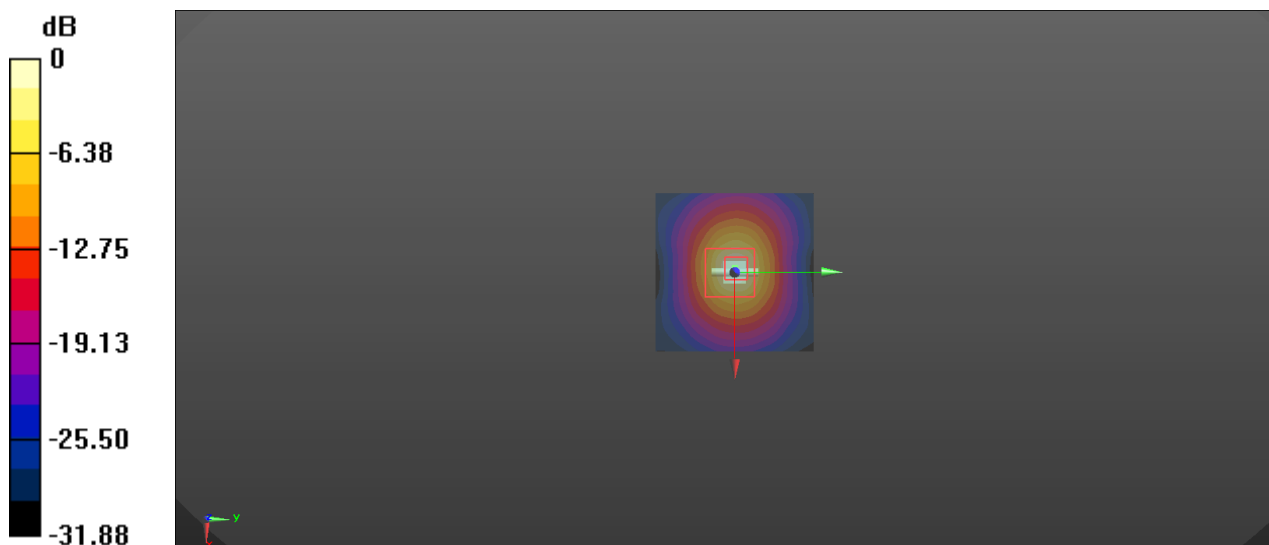



0 dB = 22.2 W/kg = 13.46 dBW/kg

EUT TEST STRATEGY AND METHODOLOGY

Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the “test device reference point” located along the “vertical centerline” on the front of the device aligned to the “ear reference point”. The “test device reference point” should be located at the same level as the center of the earpiece region. The “vertical centerline” should bisect the front surface of the handset at its top and bottom edges. A “ear reference point” is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the “phantom reference plane” defined by the three lines joining the center of each “ear reference point” (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the “N-F” line defined along the base of the ear spacer that contains the “ear reference point”. For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The “test device reference point” is aligned to the “ear reference point” on the head phantom and the “vertical centerline” is aligned to the “phantom reference plane”. This is called the “initial ear position”. While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:

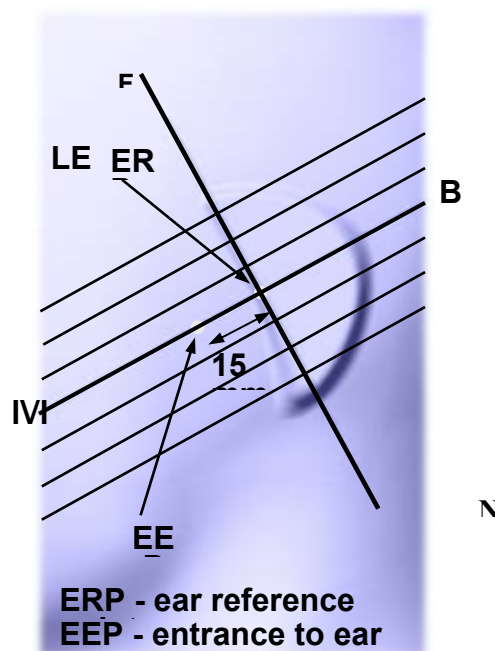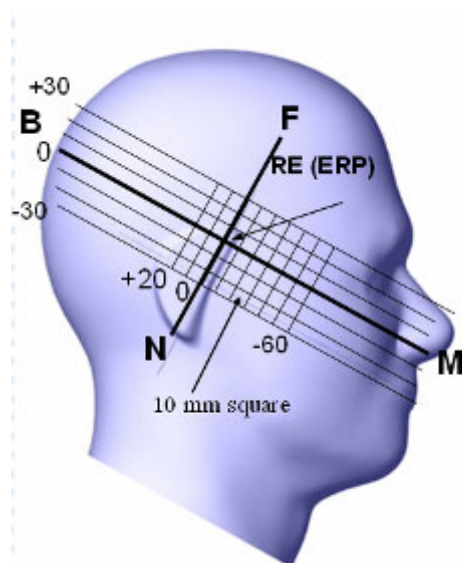

Cheek/Touch Position

The device is brought toward the mouth of the head phantom by pivoting against the “ear reference point” or along the “N-F” line for the SCC-34/SC-2 head phantom.


This test position is established:

When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.

(or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

Cheek /Touch Position

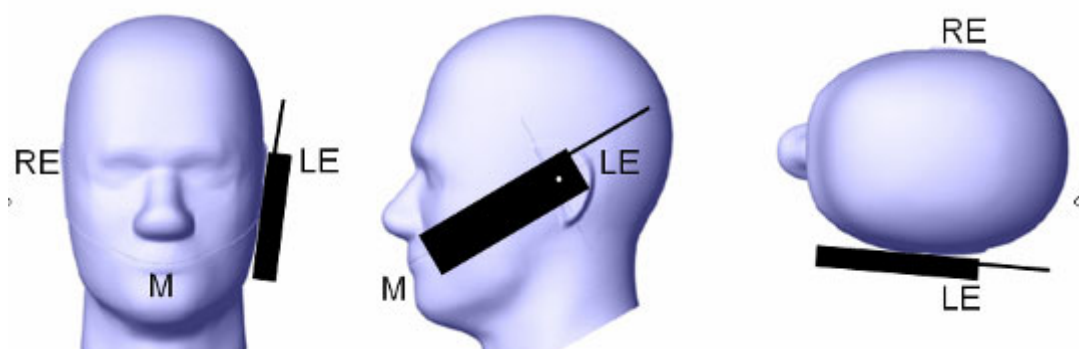


Ear/Tilt Position

With the handset aligned in the “Cheek/Touch Position”:

1) If the earpiece of the handset is not in full contact with the phantom’s ear spacer (in the “Cheek/Touch position”) and the peak SAR location for the “Cheek/Touch” position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the “initial ear position” by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.

2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both “ear reference points” (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the “test device reference point” until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point is by 15 to 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both “ear reference points” until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the “Cheek/Touch” and “Ear/Tilt” positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tilt/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.

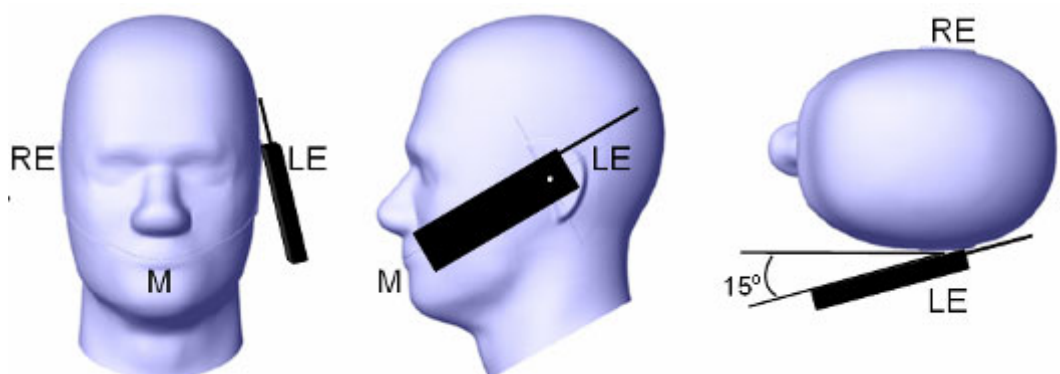Ear /Tilt 15° Position**Test positions for body-worn and other configurations**

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

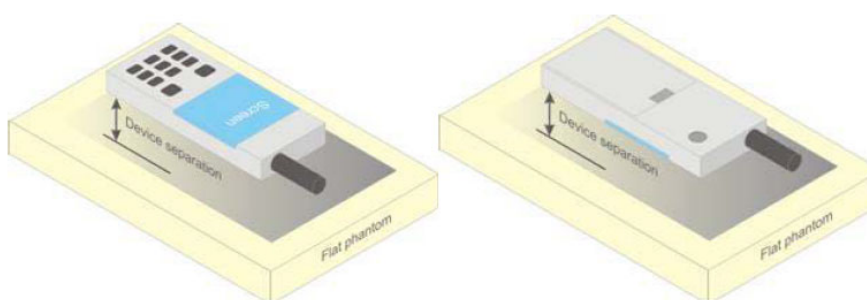


Figure 5 – Test positions for body-worn devices

Test Distance for SAR Evaluation

In this case the EUT (Equipment Under Test) is set against from the phantom, the test distance is 0mm.

SAR Evaluation Procedure

The evaluation was performed with the following procedure:

Step 1: Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.

Step 2: The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or radiating structures of the EUT, the horizontal grid spacing was 15 mm x 15 mm, and the SAR distribution was determined by integrated grid of 1.5mm x 1.5mm. Based on these data, the area of the maximum absorption was determined by spline interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.

Step 3: Around this point, a volume of 30 mm x 30 mm x 30 mm was assessed by measuring 7x 7 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:

- 1) The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.

- 2) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.

All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

Step 4: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.


CONDUCTED OUTPUT POWER MEASUREMENT

Provision Applicable

The measured peak output power should be greater and within 5% than EMI measurement.

Test Procedure

The RF output of the transmitter was connected to the input of the EMI Test Receiver through Connector.

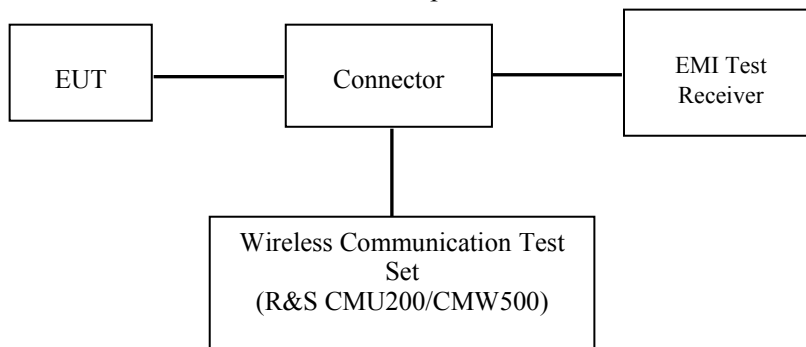

GSM/WCDMA/LTE

Radio Configuration

The power measurement was configured by the Wireless Communication Test Set.

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

- > Slot configuration > Uplink/Gamma

- > 33 dBm for GPRS 850

- > 30 dBm for GPRS 1900

- > 27 dBm for EGPRS 850

- > 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desired test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c/β_d	8/15

HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSDPA	HSDPA	HSDPA	HSDPA
	Subset	1	2	3	4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	$\beta_d(\text{SF})$	64			
	β_c/β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs}=\beta_{hs}/\beta_c$	30/15			

HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{cc}	209/225	12/15	30/15	2/15	5/15
	β_c / β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs} = \beta_{hs} / \beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27		E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18		E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

HSPA+

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

LTE

For UE Power Class 1 and 3, the allowed Maximum Power Reduction (MPR) for the maximum output power in Table 6.2.2-1 due to higher order modulation and transmit bandwidth configuration (resource blocks) is specified in Table 6.2.3-1.

Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1 and 3

Modulation	Channel bandwidth / Transmission bandwidth (N_{RB})						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2

For UE Power Class 1 and 3 the specific requirements and identified sub clauses are specified in Table 6.2.4-1 along with the allowed A-MPR values that may be used to meet these requirements. The allowed A-MPR values specified below in Table 6.2.4-1 to 6.2.4-15 are in addition to the allowed MPR requirements specified in sub clause 6.2.3.

Table 6.2.4-1: Additional Maximum Power Reduction (A-MPR)

Network Signalling value	Requirements (subclause)	E-UTRA Band	Channel bandwidth (MHz)	Resources Blocks (N_{RB})	A-MPR (dB)
NS_01	6.6.2.1.1	Table 5.5-1	1.4, 3, 5, 10, 15, 20	Table 5.6-1	N/A
NS_03	6.6.2.2.1	2, 4, 10, 23, 25, 35, 36	3	>5	≤ 1
			5	>6	≤ 1
			10	>6	≤ 1
			15	>8	≤ 1
			20	>10	≤ 1
NS_04	6.6.2.2.2	41	5	>6	≤ 1
NS_05	6.6.3.3.1	1	10, 15, 20	Table 6.2.4-4	
NS_06	6.6.2.2.3	12, 13, 14, 17	1.4, 3, 5, 10	≥ 50	≤ 1
NS_07	6.6.2.2.3 6.6.3.3.2	13	10	Table 5.6-1	N/A
NS_08	6.6.3.3.3	19	10, 15	Table 6.2.4-2	
NS_09	6.6.3.3.4	21	10, 15	> 44	≤ 3
				> 40	≤ 1
				> 55	≤ 2
NS_10		20	15, 20	Table 6.2.4-3	
NS_11	6.6.2.2.1	23	1.4, 3, 5, 10, 15, 20	Table 6.2.4-5	
NS_12	6.6.3.3.5	26	1.4, 3, 5	Table 6.2.4-6	
NS_13	6.6.3.3.6	26	5	Table 6.2.4-7	
NS_14	6.6.3.3.7	26	10, 15	Table 6.2.4-8	
NS_15	6.6.3.3.8	26	1.4, 3, 5, 10, 15	Table 6.2.4-9 Table 6.2.4-10	
NS_16	6.6.3.3.9	27	3, 5, 10	Table 6.2.4-11, Table 6.2.4-12, Table 6.2.4-13	
NS_17	6.6.3.3.10	28	5, 10	Table 5.6-1	N/A
NS_18	6.6.3.3.11	28	5	≥ 2	≤ 1
			10, 15, 20	≥ 1	≤ 4
NS_19	6.6.3.3.12	44	10, 15, 20	Table 6.2.4-14	
NS_20	6.2.2 6.6.2.2.1 6.6.3.2	23	5, 10, 15, 20	Table 6.2.4-15	
...					
NS_32	-	-	-	-	-


Proximity Sensor Operation

Triggering distances (Per KDB 616717)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (6000MHz) and lowest (600MHz) frequency was used for proximity sensor triggering testing. It should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet.

2. Capacitive proximity sensor placed coincident with antenna elements at the left end of the pos are utilized to determine when the device comes in proximity of the user's body at the front or back or left side or right surface of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna

3. The device employs proximity sensors that detect the presence of the user's body or handhold at the front or back or left side or right side of the device. When back surface or edge of body worn condition is detected, GSM 850/GSM 1900/WCDMA II /WCDMA IV / LTE Band 25<E Band 2 / LTE Band 66<E Band 4/LTE Band 7/LTE Band 40-low/LTE Band 40-upper/LTE Band 41/ WLAN5G reduced power will be active. Other mode or frequency band can't be active. (P-sensor can't work at detecting presence of the user's body at the bottom, top edges of the device.)

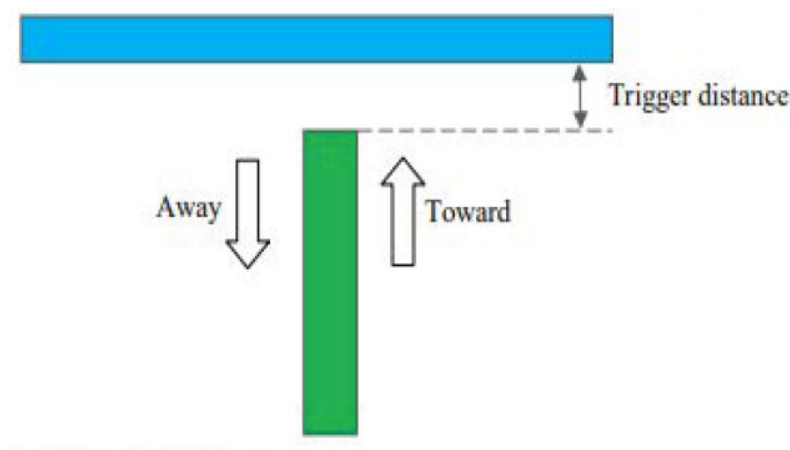

The minimum detection distances determined as below:

Proximity Sensor Triggering Distance(mm) and Triggering Power(dBm)

GSM 850:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30
	Away	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30
Back edge	Toward	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30	30	30
	Away	28	28	28	28	28	28	28	28	30	30	30	30	30	30	30	30	30
Left edge	Toward	28	28	28	28	28	28	28	28	28	28	28	28	28	30	30	30	30
	Away	28	28	28	28	28	28	28	28	28	28	28	28	28	28	28	30	30

GSM 1900

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27	27	27
	Away	24	24	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27
Back edge	Toward	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27	27	27
	Away	24	24	24	24	24	24	24	24	27	27	27	27	27	27	27	27	27
Left edge	Toward	24	24	24	24	24	24	24	24	24	24	24	24	24	27	27	27	27
	Away	24	24	24	24	24	24	24	24	24	24	24	24	24	24	24	27	27

Note: For GSM Mode(s), the maximum time based average power (4Slots) were used for calculation.

WCDMA II:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

WCDMA IV:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

LTE Band25 & LTE Band2:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

LTE Band66 & LTE Band4:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

LTE Band7:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5	22.5	22.5
	Away	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	14.5	22.5	22.5

LTE Band40-low&: LTE Band40-up

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5	22.5	22.5
	Away	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	18.5	22.5	22.5

LTE Band41:

Distance		0	1	2	3	4	5	6	7	8	14	18	19	20	21	22	23	30
Front edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Back edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5	22.5
Left edge	Toward	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5	22.5	22.5
	Away	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	19.5	22.5	22.5

WLAN 5.2G :

Distance		0	1	2	3	4	5	6	7	8	9	10	11	12	15	20	25	30
Right edge	Toward	9	9	9	9	9	9	12	12	12	12	12	12	12	12	12	12	12
	Away	9	9	9	9	9	9	9	9	9	12	12	12	12	12	12	12	12

WLAN 5.8G :

Distance		0	1	2	3	4	5	6	7	8	9	10	11	12	15	20	25	30
Right edge	Toward	7.5	7.5	7.5	7.5	7.5	7.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5
	Away	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5

Note: each side minimum detection distance was performed with below:

Toward: moving toward the phantom

Away: Moving away from the phantom

Summary of trigger distances:

Band	Back edge (mm)		Front edge (mm)		Left edge (mm)	
	Toward	Away	Toward	Away	Toward	Away
2G/3G/4G	5	7	5	7	20	22

Note: The SAR sensor located in GSM850 / GSM 1900 / WCDMA II / WCDMA IV/ LTE Band 2 / LTE Band4 /LTE Band 7/ LTE Band 25/ LTE Band66 / LTE Band 40-low / LTE Band40-up / LTE Band 41 antenna


Band	Right edge (mm)	
	Toward	Away
WLAN 5G	5	8

Note: The SAR sensor located in WLAN5G antenna

Tilt angle

The influence of device tilt angles to proximity sensor triggering was determined by positioning each device edge that contains a transmitting antenna, perpendicular to the flat phantom, at 4 mm separation.

Rotating the device around the edge next to the phantom in $\leq 10^\circ$ increments until the device is $\pm 45^\circ$ from the vertical position at 0° . And the maximum output power remains in the reduced mode.

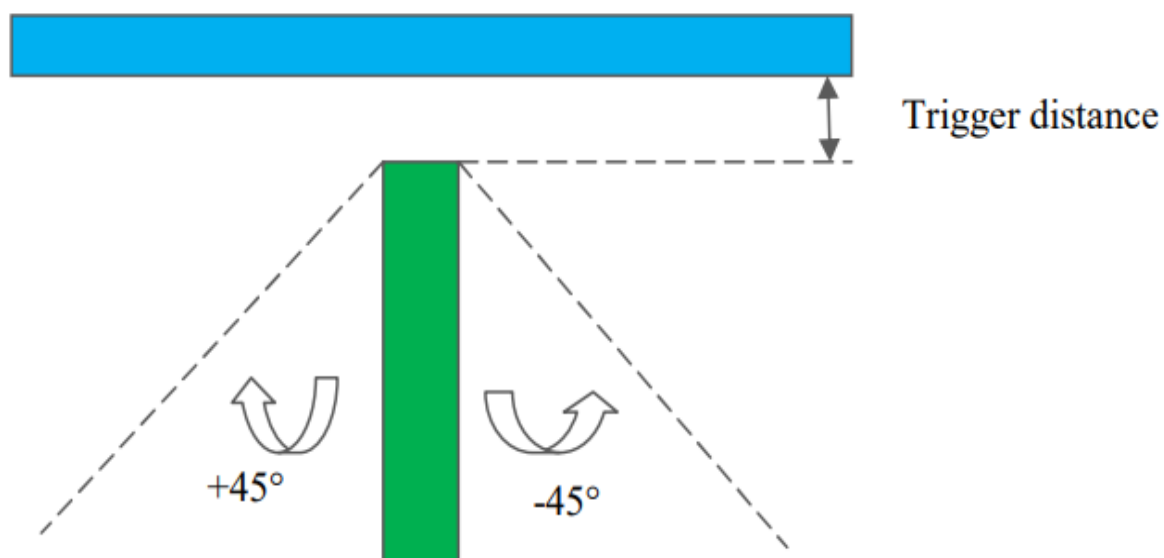

Proximity Sensor Status Table

Minimum Distance(mm)	-45	-40	-30	-20	-10	0	10	20	30	40	45
4	on	on	on	on	on	on	on	on	on	on	on

Resulting test positions for SAR measurements

Wireless Technologies	Position	Triggering Distance(mm)	Worst case distance For SAR(mm)
WWAN	Front	5	4
	Back	5	4
	Left	20	19

Wireless Technologies	Position	Triggering Distance(mm)	Worst case distance For SAR(mm)
WLAN	Right	5	4

Maximum Target Output Power**Full Power Target power**

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM850 GPRS 1Tx	34	34	34
GSM850 GPRS 2Tx	32	32	32
GSM850 GPRS 3Tx	31	31	31
GSM850 GPRS 4Tx	30	30	30
GSM850 EGPRS 1Tx	28	28	28
GSM850 EGPRS 2Tx	27	27	27
GSM850 EGPRS 3Tx	26	26	26
GSM850 EGPRS 4Tx	25.5	25.5	25.5
GSM1900 GPRS 1Tx	30	30	30
GSM1900 GPRS 2Tx	29	29	29
GSM1900 GPRS 3Tx	27.5	27.5	27.5
GSM1900 GPRS 4Tx	26.5	27	26.5
GSM1900 EGPRS 1Tx	26	26	26
GSM1900 EGPRS 2Tx	25	25	25
GSM1900 EGPRS 3Tx	24	24	24
GSM1900 EGPRS 4Tx	23	23	23
WCDMA Band 2	22.5	22.5	22.5
WCDMA Band 4	22.5	22.5	22.5
WCDMA Band 5	22.5	22.5	22.5
LTE Band 2	22.5	22.5	22.5
LTE Band 4	22.5	22.5	22.5
LTE Band 5	22.5	22.5	22.5
LTE Band 7	22.5	22.5	22.5
LTE Band 12	22.5	22.5	22.5
LTE Band 17	22.5	22.5	22.5
LTE Band 25	22.5	22.5	22.5
LTE Band 26	22.5	22.5	22.5
LTE Band 40-low	22.5	22.5	22.5
LTE Band 40-up	22.5	22.5	22.5
LTE Band 41	22.5	22.5	22.5
LTE Band 66	22.5	22.5	22.5
WLAN(2.4G)	17	17	17
Bluetooth	10	10	10
BLE(1Mbps)	-3	-2	-2
BLE(2Mbps)	-3	-2	-2
WLAN(5.2G)	12	12	12
WLAN(5.8G)	13.5	13.5	13.5

Reduction Target power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
GSM850 GPRS 1Tx	32	32	32
GSM850 GPRS 2Tx	30	30	30
GSM850 GPRS 3Tx	29	29	29
GSM850 GPRS 4Tx	28	28	28
GSM850 EGPRS 1Tx	26	26	26
GSM850 EGPRS 2Tx	24.5	24.5	24.5
GSM850 EGPRS 3Tx	23.5	23.5	23.5
GSM850 EGPRS 4Tx	23	23	23
GSM1900 GPRS 1Tx	27	27	27
GSM1900 GPRS 2Tx	26	26	26
GSM1900 GPRS 3Tx	24.5	24.5	24.5
GSM1900 GPRS 4Tx	23.5	24	23.5
GSM1900 EGPRS 1Tx	23	23	23
GSM1900 EGPRS 2Tx	22	22	22
GSM1900 EGPRS 3Tx	21	21	21
GSM1900 EGPRS 4Tx	20	20	20
WCDMA Band 2	18.5	18.5	18.5
WCDMA Band 4	18.5	18.5	18.5
LTE Band 2	19.5	19.5	19.5
LTE Band 4	19.5	19.5	19.5
LTE Band 7	14.5	14.5	14.5
LTE Band 25	19.5	19.5	19.5
LTE Band 40-low	18.5	18.5	18.5
LTE Band 40-up	18.5	18.5	18.5
LTE Band 41	19.5	19.5	19.5
LTE Band 66	19.5	19.5	19.5
WLAN(5.2G)	9	9	9
WLAN(5.8G)	7.5	7.5	7.5

Test Results:**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	33.05	31.87	30.67	29.64
	190	836.6	33.44	31.98	30.87	29.66
	251	848.8	33.98	31.02	30.9	29.49
PCS 1900	512	1850.2	29.45	28.64	27.26	26.01
	661	1880.0	29	28.79	27.13	26.68
	810	1909.8	29.35	28.76	27.29	26.04

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	27.26	26.74	25.59	24.69
	190	836.6	27.34	26.2	25.78	24.21
	251	848.8	27.52	26.24	25.15	24.99
PCS 1900	512	1850.2	25.09	24.91	23.39	22
	661	1880.0	25.87	24.35	23.93	22.87
	810	1909.8	25.48	24.63	23.93	22.08

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	24.05	25.87	26.41	26.64
	190	836.6	24.44	25.98	26.61	26.66
	251	848.8	24.98	25.02	26.64	26.49
PCS 1900	512	1850.2	20.45	22.64	23	23.01
	661	1880	20	22.79	22.87	23.68
	810	1909.8	20.35	22.76	23.03	23.04

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	18.26	20.74	21.33	21.69
	190	836.6	18.34	20.2	21.52	21.21
	251	848.8	18.52	20.24	20.89	21.99
PCS 1900	512	1850.2	16.09	18.91	19.13	19
	661	1880	16.87	18.35	19.67	19.87
	810	1909.8	16.48	18.63	19.67	19.08

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA:**WCDMA Band II**

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	22.17	22.19	21.99
		HSDPA	1	22.27	22.15	22.14
			2	22.29	22.02	22.26
			3	22.18	22.07	22.08
			4	22.21	22.10	22.06
		HSUPA	1	22.39	22.04	22.17
			2	22.24	21.93	22.22
			3	22.34	21.95	22.10
			4	22.37	22.02	22.15
			5	22.32	22.04	22.07
		HSPA+	1	22.33	22.04	22.13

WCDMA Band IV

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	Rel 99	1	21.99	22.34	22.22
		HSDPA	1	22.32	22.04	22.04
			2	22.26	22.02	22.23
			3	22.27	21.95	22.14
			4	22.33	22.13	22.10
		HSUPA	1	22.28	22.09	22.11
			2	22.24	22.04	22.14
			3	22.19	21.99	22.08
			4	22.33	22.12	22.22
			5	22.27	21.95	22.09
		HSPA+	1	22.30	22.10	22.03

WCDMA Band V

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band V)	Normal	Rel 99	1	22.06	22.16	22.15
		HSDPA	1	22.14	21.96	22.01
			2	22.14	22.18	22.16
			3	22.17	21.96	22.20
			4	22.15	22.01	22.11
		HSUPA	1	22.07	22.10	22.13
			2	21.98	22.15	22.14
			3	22.12	22.13	22.18
			4	22.05	21.98	22.18
			5	22.03	22.01	22.11
		HSPA+	1	22.05	22.00	22.11

Note:

1. The default test configuration is to measure SAR with an established radio link between the EUT and a communication test set using a 12.2 kbps RMC (reference measurement Channel) Configured in Test Loop Model 1.
2. KDB 941225 D01-Body SAR is not required for HSDPA/HSUPA/HSPA+ when the maximum average output of each RF channel is less than ¼ dB higher than measured 12.2kbps RMC or the maximum SAR for 12.2kbps RMC is < 75% of SAR limit.

Maximum Output Power:**LTE Band 2**

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.70	21.19	21.78
		1#3	22.00	21.41	21.30
		1#5	21.30	21.78	21.50
		3#0	21.69	21.35	21.42
		3#1	21.80	21.11	21.05
		3#3	22.14	21.16	21.48
		6#0	21.26	22.10	21.36
	16-QAM	1#0	21.78	21.26	21.04
		1#3	22.22	21.38	21.52
		1#5	21.48	22.09	21.78
		3#0	22.15	22.04	21.14
		3#1	21.77	22.02	21.49
		3#3	21.85	21.82	21.19
		6#0	22.08	22.07	21.19
3M	QPSK	1#0	21.47	21.18	21.50
		1#7	21.66	21.94	21.51
		1#14	21.58	21.87	21.37
		8#0	21.70	21.84	21.05
		8#4	21.26	21.25	21.11
		8#7	21.36	21.82	21.88
		15#0	22.14	21.24	21.87
	16-QAM	1#0	22.13	22.01	21.49
		1#7	21.65	21.25	21.40
		1#14	21.94	22.06	21.97
		8#0	21.39	21.86	21.13
		8#4	21.30	21.22	21.06
		8#7	21.43	21.79	21.20
		15#0	21.37	21.56	21.19

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.99	22.08	21.34
		1#12	21.70	22.09	21.62
		1#24	21.65	22.10	21.47
		12#0	21.56	22.01	21.29
		12#6	21.35	21.75	21.09
		12#11	21.26	21.93	21.03
		25#0	21.78	21.26	21.42
	16-QAM	1#0	21.98	21.74	21.29
		1#12	21.64	21.54	21.92
		1#24	22.24	22.07	21.69
		12#0	21.42	21.54	21.58
		12#6	22.14	21.13	21.96
		12#11	21.82	21.82	21.92
		25#0	21.58	21.71	21.34
10M	QPSK	1#0	21.94	21.17	21.60
		1#24	21.69	21.14	21.78
		1#49	21.61	21.95	21.27
		25#0	22.08	21.59	21.60
		25#12	21.75	21.45	21.74
		25#24	21.89	21.64	21.59
		50#0	21.75	21.94	21.49
	16-QAM	1#0	21.84	21.84	21.88
		1#24	22.19	21.96	21.34
		1#49	21.34	21.34	22.00
		25#0	21.96	21.13	21.78
		25#12	22.05	22.10	21.21
		25#24	21.57	21.76	21.92
		50#0	21.61	21.90	21.24

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.53	22.02	21.73
		1#37	21.55	21.84	21.79
		1#74	21.40	21.29	22.00
		36#0	21.58	21.81	21.70
		36#17	21.47	21.26	21.17
		36#35	21.56	21.15	21.21
		75#0	21.58	21.78	21.97
	16-QAM	1#0	21.55	21.82	21.77
		1#37	21.51	21.93	21.51
		1#74	21.29	22.03	21.57
		36#0	21.82	21.34	21.43
		36#17	21.37	21.23	21.31
		36#35	21.69	21.49	21.93
		75#0	22.20	21.98	21.93
20M	QPSK	1#0	22.11	22.26	21.19
		1#49	22.20	21.32	21.68
		1#99	21.53	21.76	21.93
		50#0	22.18	22.06	21.67
		50#24	22.21	21.72	21.27
		50#49	21.53	21.80	21.59
		100#0	21.87	21.96	21.05
	16-QAM	1#0	21.87	21.90	21.98
		1#49	21.33	21.73	21.03
		1#99	22.04	22.06	21.84
		50#0	21.57	21.15	21.75
		50#24	21.63	21.40	21.80
		50#49	21.40	21.56	21.23
		100#0	22.06	21.39	21.45

LTE Band 4

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.99	21.57	21.68
		1#3	21.99	21.36	21.14
		1#5	21.54	21.96	21.22
		3#0	21.43	21.21	22.00
		3#1	21.73	21.23	21.02
		3#3	21.93	21.49	21.05
		6#0	22.15	21.86	21.11
	16-QAM	1#0	21.47	21.91	21.40
		1#3	21.47	21.74	21.52
		1#5	21.43	22.05	21.33
		3#0	22.10	21.63	21.10
		3#1	21.40	21.79	21.13
		3#3	21.48	21.47	21.36
		6#0	21.46	21.98	21.62
3M	QPSK	1#0	21.49	22.05	21.17
		1#7	22.08	21.41	21.59
		1#14	21.33	21.89	21.10
		8#0	22.13	21.65	21.43
		8#4	22.01	21.64	21.54
		8#7	22.13	21.53	21.31
		15#0	22.08	21.57	21.38
	16-QAM	1#0	21.75	21.53	22.01
		1#7	21.36	22.04	21.68
		1#14	21.44	22.06	21.21
		8#0	21.96	22.07	21.83
		8#4	22.09	21.22	21.38
		8#7	21.38	21.26	21.19
		15#0	22.18	21.26	21.91

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.32	21.86	21.59
		1#12	21.66	21.58	21.60
		1#24	22.10	21.50	21.49
		12#0	22.04	21.33	21.46
		12#6	21.51	21.78	21.29
		12#11	21.67	21.13	21.46
		25#0	21.68	21.22	21.82
	16-QAM	1#0	21.76	21.81	21.48
		1#12	21.54	21.31	21.27
		1#24	22.19	21.91	21.07
		12#0	22.14	21.72	21.99
		12#6	21.55	21.39	21.26
		12#11	21.97	21.29	21.91
		25#0	21.50	21.97	22.01
10M	QPSK	1#0	21.29	21.12	21.77
		1#24	21.56	21.38	21.75
		1#49	22.03	22.06	21.13
		25#0	21.66	21.98	21.51
		25#12	22.05	22.08	21.64
		25#24	22.03	21.13	21.07
		50#0	21.32	21.39	21.72
	16-QAM	1#0	22.12	21.82	21.29
		1#24	22.13	21.38	21.76
		1#49	21.56	21.21	21.19
		25#0	21.73	21.89	21.36
		25#12	21.59	21.40	21.41
		25#24	21.77	21.64	21.41
		50#0	21.59	21.58	21.45

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.53	22.09	21.63
		1#37	21.33	21.95	21.16
		1#74	22.16	21.23	21.07
		36#0	21.83	21.26	21.58
		36#17	21.56	21.52	21.17
		36#35	22.00	21.70	21.16
		75#0	21.21	21.92	21.36
	16-QAM	1#0	21.27	21.33	21.84
		1#37	21.80	21.33	21.20
		1#74	21.40	21.37	21.97
		36#0	21.59	21.39	21.81
		36#17	21.84	21.69	21.45
		36#35	21.74	21.16	21.28
		75#0	22.10	21.40	21.53
20M	QPSK	1#0	22.15	22.21	22.17
		1#49	21.65	21.12	21.20
		1#99	21.26	21.44	21.59
		50#0	21.76	21.96	21.90
		50#24	22.11	21.56	21.09
		50#49	21.78	21.40	21.24
		100#0	21.41	21.50	22.02
	16-QAM	1#0	22.04	21.45	21.15
		1#49	21.37	21.34	21.79
		1#99	22.06	21.91	21.97
		50#0	21.65	22.02	21.23
		50#24	21.69	21.41	21.26
		50#49	21.72	21.37	21.53
		100#0	21.42	21.13	21.66

LTE Band 5

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.96	21.73	21.78
		1#3	21.46	21.21	21.54
		1#5	21.49	21.62	21.28
		3#0	22.10	21.25	21.80
		3#1	21.47	21.94	21.99
		3#3	22.04	21.61	21.44
		6#0	21.81	21.12	21.48
	16-QAM	1#0	21.66	22.05	21.27
		1#3	21.99	21.44	21.81
		1#5	21.99	21.31	21.94
		3#0	21.78	21.92	21.29
		3#1	21.93	21.51	21.60
		3#3	22.02	21.70	21.36
		6#0	21.45	21.77	21.67
3M	QPSK	1#0	21.84	21.34	21.43
		1#7	21.76	21.44	21.17
		1#14	21.72	21.49	21.19
		8#0	21.97	21.62	21.29
		8#4	21.72	21.60	21.42
		8#7	21.95	21.96	21.95
		15#0	21.57	21.48	21.18
	16-QAM	1#0	22.09	21.20	21.82
		1#7	21.93	22.05	21.43
		1#14	21.58	21.49	21.63
		8#0	21.85	21.60	21.17
		8#4	21.96	21.22	21.89
		8#7	21.70	21.68	21.68
		15#0	21.60	21.35	21.47

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.33	21.44	21.86
		1#12	21.93	22.10	21.19
		1#24	22.12	22.08	21.05
		12#0	21.79	21.52	21.35
		12#6	21.34	21.72	21.33
		12#11	21.78	21.28	21.32
		25#0	21.90	22.05	21.66
	16-QAM	1#0	22.19	21.40	21.23
		1#12	21.35	21.13	21.76
		1#24	21.54	22.02	21.52
		12#0	21.99	21.55	21.05
		12#6	21.43	21.58	21.95
		12#11	21.47	21.14	21.06
		25#0	22.04	21.54	21.86
10M	QPSK	1#0	22.18	22.25	22.15
		1#24	21.72	21.64	21.56
		1#49	21.40	21.97	21.73
		25#0	21.34	21.88	21.42
		25#12	22.06	21.51	21.65
		25#24	22.16	21.43	21.19
		50#0	22.20	21.74	21.88
	16-QAM	1#0	21.44	21.21	21.02
		1#24	21.68	21.69	21.26
		1#49	22.17	22.00	21.21
		25#0	21.69	21.26	21.37
		25#12	21.32	21.99	21.57
		25#24	22.14	21.35	21.98
		50#0	21.83	21.44	21.06

LTE Band 7

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.11	21.78	21.91
		1#12	21.78	21.22	21.53
		1#24	21.48	21.23	21.62
		12#0	21.53	21.54	21.65
		12#6	21.79	21.66	21.02
		12#11	21.28	21.85	21.28
		25#0	21.73	21.89	21.85
	16-QAM	1#0	21.32	22.02	21.05
		1#12	21.38	21.73	21.28
		1#24	21.49	21.19	22.02
		12#0	22.20	21.95	21.85
		12#6	22.13	21.11	21.14
		12#11	21.51	21.59	21.11
		25#0	21.65	21.70	21.55
10M	QPSK	1#0	21.78	21.57	21.39
		1#24	21.63	21.58	21.76
		1#49	21.73	21.66	21.99
		25#0	21.28	21.49	21.88
		25#12	21.73	21.71	21.47
		25#24	21.43	21.71	21.16
		50#0	21.80	21.59	22.02
	16-QAM	1#0	21.94	22.09	21.73
		1#24	21.29	21.97	22.00
		1#49	21.63	21.50	21.71
		25#0	21.96	21.52	21.05
		25#12	21.79	21.15	21.96
		25#24	21.82	21.72	21.31
		50#0	21.95	21.53	21.07

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.65	21.45	21.56
		1#37	21.58	21.35	21.51
		1#74	21.96	21.45	21.64
		36#0	22.15	21.76	21.90
		36#17	21.29	21.85	21.12
		36#35	22.20	21.55	21.49
		75#0	22.14	21.45	21.06
	16-QAM	1#0	21.38	21.69	21.94
		1#37	21.81	22.04	21.35
		1#74	21.86	21.26	22.00
		36#0	21.42	21.25	21.65
		36#17	22.01	21.46	21.96
		36#35	21.80	21.14	21.93
		75#0	21.84	21.70	21.30
20M	QPSK	1#0	21.34	22.21	22.12
		1#49	22.04	22.04	21.09
		1#99	22.20	21.81	21.50
		50#0	21.59	21.99	21.27
		50#24	21.65	21.11	21.44
		50#49	21.63	21.28	21.26
		100#0	21.98	21.42	21.95
	16-QAM	1#0	21.50	22.02	21.91
		1#49	22.19	21.16	21.54
		1#99	21.29	21.23	21.26
		50#0	21.32	21.67	21.76
		50#24	21.56	21.60	21.63
		50#49	21.79	21.48	21.15
		100#0	21.44	21.51	21.19

LTE Band 12

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	22.19	21.44	21.98
		1#3	22.06	21.33	21.09
		1#5	21.85	21.90	21.07
		3#0	21.63	21.54	22.00
		3#1	22.22	21.17	21.90
		3#3	21.30	21.54	21.64
		6#0	22.17	21.49	21.07
	16-QAM	1#0	21.30	21.98	21.36
		1#3	22.00	21.59	21.67
		1#5	21.81	21.95	21.57
		3#0	21.30	21.64	21.10
		3#1	21.86	21.78	21.69
		3#3	21.33	21.82	21.77
		6#0	21.93	22.00	21.62
3M	QPSK	1#0	21.24	21.31	21.73
		1#7	22.11	21.21	21.14
		1#14	21.62	21.40	21.93
		8#0	21.44	21.46	21.13
		8#4	21.65	21.50	21.31
		8#7	22.16	21.35	21.18
		15#0	22.05	21.37	21.12
	16-QAM	1#0	21.88	21.55	21.61
		1#7	21.35	21.69	21.98
		1#14	21.28	22.02	21.38
		8#0	21.58	22.02	21.03
		8#4	21.82	22.11	21.95
		8#7	21.70	21.56	21.65
		15#0	22.16	21.85	21.50

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.28	21.66	21.69
		1#12	21.46	21.80	21.19
		1#24	21.61	21.54	21.76
		12#0	21.62	21.33	21.51
		12#6	21.53	21.80	21.84
		12#11	22.15	21.76	21.94
		25#0	21.32	21.43	21.96
	16-QAM	1#0	21.40	21.83	21.87
		1#12	22.14	22.11	21.18
		1#24	21.33	21.91	21.32
		12#0	21.58	21.39	21.93
		12#6	21.75	21.53	21.85
		12#11	22.09	22.03	21.95
		25#0	21.75	21.87	21.51
10M	QPSK	1#0	21.61	22.24	22.19
		1#24	21.52	21.43	21.81
		1#49	22.05	21.37	21.56
		25#0	21.91	21.86	21.10
		25#12	22.01	22.01	21.78
		25#24	21.47	21.92	21.81
		50#0	21.82	21.52	21.95
	16-QAM	1#0	21.30	21.41	21.36
		1#24	22.05	21.60	21.53
		1#49	22.09	21.29	21.62
		25#0	21.96	21.93	21.22
		25#12	21.44	21.42	21.55
		25#24	21.58	21.47	21.97
		50#0	21.35	21.95	21.39

LTE Band 17

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.06	21.94	21.88
		1#12	21.54	21.81	21.84
		1#24	22.04	21.70	21.44
		12#0	21.82	22.08	21.36
		12#6	21.44	21.43	21.38
		12#11	21.79	21.88	21.07
		25#0	22.16	21.46	21.38
	16-QAM	1#0	21.84	21.54	21.96
		1#12	21.70	21.53	21.20
		1#24	21.64	21.18	21.32
		12#0	21.34	21.74	21.38
		12#6	21.96	21.45	21.72
		12#11	22.17	21.94	21.56
		25#0	21.74	21.79	21.97
10M	QPSK	1#0	21.41	22.31	21.63
		1#24	21.89	21.85	21.51
		1#49	21.63	21.85	21.46
		25#0	22.17	22.23	21.25
		25#12	22.03	21.86	21.06
		25#24	21.70	21.85	21.90
		50#0	21.41	21.93	21.93
	16-QAM	1#0	21.65	22.10	21.48
		1#24	21.82	21.51	21.32
		1#49	21.30	21.11	21.62
		25#0	22.04	21.68	21.84
		25#12	21.65	21.70	21.11
		25#24	21.50	22.05	21.05
		50#0	21.67	21.48	21.93

LTE Band 25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	22.04	21.48	21.95
		1#3	21.96	21.14	21.90
		1#5	22.11	21.46	22.01
		3#0	21.57	21.44	21.23
		3#1	21.50	21.96	21.43
		3#3	21.64	21.49	21.79
		6#0	21.53	22.03	21.61
	16-QAM	1#0	21.28	22.11	21.18
		1#3	21.68	21.43	21.77
		1#5	22.02	21.69	21.41
		3#0	22.10	21.98	21.78
		3#1	22.00	21.66	21.90
		3#3	22.21	21.80	21.61
		6#0	22.17	21.33	21.86
3M	QPSK	1#0	21.98	21.92	21.13
		1#7	21.46	21.97	21.08
		1#14	21.68	22.02	21.36
		8#0	21.67	21.86	21.72
		8#4	21.81	21.78	21.69
		8#7	21.28	21.75	21.57
		15#0	21.74	22.09	21.40
	16-QAM	1#0	21.94	22.05	21.94
		1#7	21.66	21.72	21.16
		1#14	21.69	21.24	21.46
		8#0	22.15	21.98	21.30
		8#4	21.63	21.30	21.22
		8#7	21.31	21.93	21.41
		15#0	22.21	22.08	21.96

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.16	21.82	21.42
		1#12	21.98	21.71	21.62
		1#24	21.47	21.96	21.18
		12#0	21.84	22.09	21.06
		12#6	21.67	21.64	21.58
		12#11	21.81	21.61	21.57
		25#0	21.68	21.58	21.88
	16-QAM	1#0	21.86	21.73	21.34
		1#12	21.88	22.01	21.49
		1#24	21.39	22.11	21.79
		12#0	21.30	21.19	21.44
		12#6	21.41	21.39	21.23
		12#11	21.44	21.50	21.56
		25#0	22.17	21.35	21.38
10M	QPSK	1#0	21.84	21.86	21.22
		1#24	21.92	21.17	21.51
		1#49	21.72	21.52	21.84
		25#0	21.27	21.42	22.02
		25#12	21.70	21.21	21.12
		25#24	21.82	21.24	21.52
		50#0	21.43	21.31	21.95
	16-QAM	1#0	21.99	21.61	21.04
		1#24	22.12	21.28	21.61
		1#49	22.15	21.37	21.64
		25#0	22.22	21.90	21.72
		25#12	22.23	21.99	21.69
		25#24	21.91	21.32	21.39
		50#0	21.97	21.65	21.70

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.31	22.07	21.73
		1#37	22.07	21.46	21.06
		1#74	21.75	21.16	21.39
		36#0	21.43	21.20	21.04
		36#17	21.84	21.97	21.57
		36#35	21.69	21.37	21.40
		75#0	21.76	21.62	21.70
	16-QAM	1#0	21.71	21.12	21.75
		1#37	21.40	21.92	21.17
		1#74	21.96	22.00	21.06
		36#0	22.14	21.54	21.63
		36#17	21.64	21.23	21.66
		36#35	21.92	21.18	21.65
		75#0	21.29	21.34	21.08
20M	QPSK	1#0	21.12	22.25	21.19
		1#49	21.91	21.83	21.30
		1#99	21.80	21.64	21.34
		50#0	21.50	22.14	21.47
		50#24	22.22	21.47	21.10
		50#49	21.47	21.22	21.30
		100#0	21.94	21.74	21.76
	16-QAM	1#0	22.24	21.50	21.44
		1#49	22.18	21.39	21.97
		1#99	21.75	21.20	21.33
		50#0	21.70	21.65	21.99
		50#24	22.25	21.67	21.54
		50#49	21.81	22.07	21.40
		100#0	21.41	21.57	21.24

LTE Band 26

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.73	21.32	21.20
		1#3	21.89	21.63	21.12
		1#5	21.80	21.20	21.76
		3#0	21.36	21.90	21.81
		3#1	21.26	21.91	21.54
		3#3	21.37	22.08	21.57
		6#0	21.43	21.56	21.78
	16-QAM	1#0	21.77	21.45	21.54
		1#3	22.14	22.08	21.32
		1#5	21.68	21.44	21.94
		3#0	22.09	22.00	21.72
		3#1	22.02	21.50	21.91
		3#3	22.16	21.70	21.53
		6#0	21.67	21.17	21.62
3M	QPSK	1#0	21.48	21.34	21.24
		1#7	21.84	21.82	21.33
		1#14	21.50	21.31	21.18
		8#0	21.61	21.85	21.66
		8#4	22.24	21.44	21.98
		8#7	21.47	21.96	21.96
		15#0	22.05	22.05	21.75
	16-QAM	1#0	22.02	21.77	21.04
		1#7	22.12	22.08	21.73
		1#14	21.83	21.54	21.29
		8#0	21.96	21.75	21.38
		8#4	21.27	22.02	21.74
		8#7	21.98	21.37	21.41
		15#0	22.07	21.13	21.19

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.33	21.80	21.07
		1#12	21.72	21.98	21.81
		1#24	21.37	21.58	21.90
		12#0	21.89	21.65	21.50
		12#6	21.75	21.34	21.21
		12#11	22.17	21.36	21.08
		25#0	21.84	21.74	21.34
	16-QAM	1#0	21.67	21.46	21.35
		1#12	21.28	21.80	22.00
		1#24	21.67	21.48	21.17
		12#0	21.40	21.57	21.50
		12#6	21.40	21.67	21.55
		12#11	21.59	21.20	21.10
		25#0	21.35	21.42	21.74
10M	QPSK	1#0	21.49	21.91	21.78
		1#24	21.43	21.26	21.05
		1#49	21.95	21.36	21.68
		25#0	21.61	22.10	21.65
		25#12	21.89	21.64	21.48
		25#24	21.70	21.12	21.11
		50#0	22.11	21.99	21.27
	16-QAM	1#0	21.67	22.02	21.33
		1#24	22.25	21.83	21.95
		1#49	22.04	21.92	21.18
		25#0	22.15	21.17	21.21
		25#12	21.32	21.24	21.26
		25#24	21.41	21.14	21.73
		50#0	22.07	22.09	21.37

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	22.04	22.26	22.14
		1#37	21.52	22.09	21.55
		1#74	22.19	21.16	21.96
		36#0	22.09	22.18	21.74
		36#17	22.24	21.23	21.41
		36#35	21.75	21.13	21.27
		75#0	21.92	21.96	21.04
	16-QAM	1#0	21.89	21.12	21.15
		1#37	21.34	21.13	21.13
		1#74	21.73	21.81	21.02
		36#0	21.78	21.26	21.20
		36#17	22.02	21.95	21.33
		36#35	21.99	21.34	21.70
		75#0	21.31	21.59	21.23

LTE Band 40 Lower

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.53	21.14	21.26
		1#12	21.67	21.89	21.09
		1#24	21.93	21.16	21.40
		12#0	22.15	21.24	21.08
		12#6	21.39	21.92	21.78
		12#11	21.61	21.14	21.44
		25#0	21.96	21.22	21.33
	16-QAM	1#0	21.42	21.17	21.96
		1#12	21.99	21.23	21.38
		1#24	21.65	21.97	21.99
		12#0	21.51	21.68	21.36
		12#6	21.45	21.78	21.24
		12#11	21.91	21.85	21.44
		25#0	21.70	21.97	21.35
10M	QPSK	1#0	/	22.16	/
		1#24	/	21.50	/
		1#49	/	21.63	/
		25#0	/	22.06	/
		25#12	/	21.95	/
		25#24	/	22.06	/
		50#0	/	21.12	/
	16-QAM	1#0	/	22.00	/
		1#24	/	21.40	/
		1#49	/	21.60	/
		25#0	/	21.11	/
		25#12	/	21.82	/
		25#24	/	21.65	/
		50#0	/	21.50	/

LTE Band 40 Upper

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.87	21.96	21.80
		1#12	21.84	21.83	21.51
		1#24	22.24	21.85	21.89
		12#0	21.37	21.61	21.24
		12#6	21.29	21.63	21.45
		12#11	22.05	21.47	21.57
		25#0	21.62	21.30	21.08
	16-QAM	1#0	22.17	21.80	21.29
		1#12	21.78	21.48	21.74
		1#24	21.92	21.33	21.58
		12#0	21.98	21.72	21.26
		12#6	21.55	21.58	21.28
		12#11	21.59	21.71	21.18
		25#0	22.12	21.43	21.06
10M	QPSK	1#0	/	22.25	/
		1#24	/	21.52	/
		1#49	/	21.79	/
		25#0	/	22.14	/
		25#12	/	21.94	/
		25#24	/	21.18	/
		50#0	/	21.74	/
	16-QAM	1#0	/	21.19	/
		1#24	/	22.03	/
		1#49	/	21.79	/
		25#0	/	21.15	/
		25#12	/	21.66	/
		25#24	/	21.71	/
		50#0	/	21.88	/

LTE Band 41

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	22.23	21.30	21.62	21.44
		1#12	21.43	21.41	21.97	21.41
		1#24	22.02	21.19	21.21	21.67
		12#0	21.74	21.21	21.49	21.94
		12#6	21.46	21.30	21.20	21.29
		12#11	22.24	22.01	21.31	21.05
		25#0	21.73	21.96	21.49	21.81
	16-QAM	1#0	21.70	21.86	22.11	21.73
		1#12	21.58	21.70	21.55	21.87
		1#24	21.49	22.10	21.80	21.28
		12#0	21.84	21.76	21.93	21.32
		12#6	21.57	22.11	21.40	21.59
		12#11	21.84	21.10	21.25	21.32
		25#0	22.25	21.45	21.58	21.17
10M	QPSK	1#0	21.73	21.10	21.85	21.34
		1#24	21.59	21.71	21.77	21.82
		1#49	22.15	21.02	21.77	21.51
		25#0	21.96	21.44	21.83	21.19
		25#12	21.90	21.90	21.18	22.01
		25#24	22.07	21.01	21.82	21.63
		50#0	21.98	21.82	21.77	21.21
	16-QAM	1#0	21.56	21.00	21.14	21.70
		1#24	21.31	21.30	22.09	21.33
		1#49	21.84	21.36	21.64	21.04
		25#0	21.38	21.50	21.45	21.42
		25#12	21.62	21.71	22.02	21.84
		25#24	21.53	21.92	21.88	21.70
		50#0	21.90	21.60	21.57	21.09

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.45	21.52	21.61	21.92
		1#37	21.53	21.69	21.77	21.05
		1#74	21.46	21.46	21.66	21.05
		36#0	22.09	21.62	21.98	21.08
		36#17	21.68	21.81	21.97	21.56
		36#35	21.88	21.36	21.13	21.73
		75#0	21.70	21.42	21.32	22.02
	16-QAM	1#0	21.73	21.36	21.54	21.11
		1#37	21.48	21.36	21.22	21.41
		1#74	22.10	21.72	21.55	21.80
		36#0	21.57	21.06	21.11	21.11
		36#17	21.69	21.30	21.43	21.30
		36#35	21.75	21.68	21.51	21.82
		75#0	21.41	21.51	21.18	21.89
20M	QPSK	1#0	22.16	22.16	22.30	22.19
		1#49	21.52	21.13	22.10	21.31
		1#99	21.31	21.53	21.57	21.75
		50#0	22.05	22.12	22.15	22.14
		50#24	22.18	21.86	22.09	21.66
		50#49	21.63	21.40	21.62	21.68
		100#0	21.42	21.63	21.76	21.35
	16-QAM	1#0	22.02	21.69	21.29	21.04
		1#49	22.20	21.62	21.23	21.48
		1#99	22.07	22.05	21.81	22.02
		50#0	21.86	21.32	21.48	21.70
		50#24	21.52	21.43	22.04	21.48
		50#49	22.14	21.29	21.51	21.08
		100#0	22.13	21.36	21.45	21.03

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 66

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	21.75	21.51	21.82
		1#3	21.32	21.63	21.13
		1#5	22.06	21.22	21.31
		3#0	21.93	21.21	21.98
		3#1	21.57	21.27	21.33
		3#3	22.05	21.65	21.76
		6#0	21.26	21.15	21.55
	16-QAM	1#0	21.86	21.31	21.81
		1#3	21.28	21.49	21.59
		1#5	22.09	22.01	21.52
		3#0	22.10	21.63	21.92
		3#1	22.15	21.39	21.98
		3#3	21.38	21.96	21.36
		6#0	21.33	21.62	21.86
3M	QPSK	1#0	21.53	21.25	21.05
		1#7	22.10	21.16	21.76
		1#14	21.86	21.51	21.70
		8#0	21.95	21.90	21.67
		8#4	21.78	21.87	21.07
		8#7	22.09	21.21	21.84
		15#0	21.99	22.00	21.77
	16-QAM	1#0	21.93	22.08	21.58
		1#7	22.25	21.45	21.52
		1#14	21.57	21.37	22.01
		8#0	21.50	21.94	22.02
		8#4	22.19	21.39	21.94
		8#7	21.43	21.83	21.27
		15#0	21.71	22.10	21.14

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	21.34	21.93	21.37
		1#12	21.85	21.66	21.08
		1#24	21.78	21.15	21.34
		12#0	21.51	21.65	21.08
		12#6	21.90	21.52	21.51
		12#11	21.87	21.32	21.12
		25#0	21.61	21.75	21.63
	16-QAM	1#0	21.46	21.44	21.32
		1#12	21.50	21.46	21.43
		1#24	21.86	21.21	21.68
		12#0	21.87	21.58	22.01
		12#6	21.27	21.49	21.42
		12#11	22.19	21.17	21.36
		25#0	21.35	21.43	21.32
10M	QPSK	1#0	21.53	22.00	21.41
		1#24	22.14	21.60	21.73
		1#49	21.29	21.19	21.23
		25#0	21.66	21.59	21.44
		25#12	21.41	21.25	21.06
		25#24	22.14	21.54	21.18
		50#0	22.17	21.56	21.81
	16-QAM	1#0	22.10	21.22	21.36
		1#24	22.01	22.02	21.58
		1#49	21.38	21.18	21.40
		25#0	22.14	21.44	21.09
		25#12	21.53	22.05	21.20
		25#24	22.15	21.21	21.49
		50#0	22.12	21.55	21.03

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	21.43	21.49	21.18
		1#37	21.90	21.60	21.45
		1#74	21.26	21.18	21.50
		36#0	21.50	21.60	21.63
		36#17	21.69	21.98	21.03
		36#35	22.16	21.99	21.80
		75#0	21.34	21.49	21.46
	16-QAM	1#0	22.00	21.59	21.24
		1#37	21.75	21.71	21.40
		1#74	21.74	21.15	21.79
		36#0	21.87	21.84	21.30
		36#17	21.64	21.90	21.15
		36#35	21.61	21.80	21.04
		75#0	21.37	21.41	21.35
20M	QPSK	1#0	22.28	22.35	22.17
		1#49	21.39	21.34	22.01
		1#99	21.82	21.74	21.54
		50#0	21.96	22.11	22.06
		50#24	21.84	21.65	21.40
		50#49	21.30	21.80	21.12
		100#0	22.09	21.55	21.17
	16-QAM	1#0	21.27	21.52	21.58
		1#49	22.07	21.21	21.10
		1#99	22.18	21.81	21.11
		50#0	22.26	21.89	21.13
		50#24	21.63	21.79	21.69
		50#49	21.94	21.88	22.02
		100#0	21.53	21.99	21.88

WLAN 2.4G:

Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output Power(dBm)
802.11b	2412	1Mbps	16.75
	2437		16.58
	2462		16.92
802.11g	2412	6Mbps	14.03
	2437		14.05
	2462		14.01
802.11n HT20	2412	MCS0	12.82
	2437		13.38
	2462		13.47
802.11n HT40	2422	MCS0	12.00
	2437		11.90
	2452		11.82

WLAN 5G:

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5150-5250 MHz	5180	11.56
		5200	11.53
		5240	11.41
802.11ac20	5150-5250 MHz	5180	11.30
		5200	11.40
		5240	11.29
802.11n-HT20	5150-5250 MHz	5180	11.39
		5200	11.30
		5240	11.40
802.11ac40	5150-5250 MHz	5190	10.50
		5230	10.21
802.11n-HT40	5150-5250 MHz	5190	10.45
		5230	10.44
802.11ac80	/	5210	8.75

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5725-5850 MHz	5745	13.05
		5785	13.04
		5825	13.30
802.11ac20	5725-5850 MHz	5745	12.82
		5785	12.81
		5825	13.11
802.11n-HT20	5725-5850 MHz	5745	12.92
		5785	12.86
		5825	13.12
802.11ac40	5725-5850 MHz	5755	13.01
		5795	13.19
802.11n-HT40	5725-5850 MHz	5755	12.84
		5795	12.92
802.11ac80	/	5775	12.98

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	8.95
	2441	9.91
	2480	9.29
EDR($\pi/4$ -DQPSK)	2402	8.72
	2441	9.18
	2480	9.63
EDR(8DPSK)	2402	8.72
	2441	9.29
	2480	9.63

BLE:

Channel	Frequency (MHz)	Max Conducted Peak Output Power (dBm)
BLE(1Mbps) Mode		
Low	2402	-4.05
Middle	2440	-2.44
High	2480	-2.89
BLE(2Mbps) Mode		
Low	2402	-3.86
Middle	2440	-2.37
High	2480	-2.86

WWAN Antenna Reduction Power**GPRS:**

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	31.01	29.89	28.65	27.61
	190	836.6	31.44	29.98	28.87	27.64
	251	848.8	31.98	29.02	28.9	27.49
PCS 1900	512	1850.2	26.32	25.56	24.24	22.9
	661	1880.0	25.88	25.72	24.02	23.49
	810	1909.8	26.24	25.66	24.22	22.96

EDGE:

Band	Channel No.	Frequency (MHz)	RF Output Power (dBm)			
			1 slot	2 slots	3 slots	4 slots
GSM 850	128	824.2	25.15	24.38	23.47	22.43
	190	836.6	25.26	24.36	23.49	22.28
	251	848.8	25.17	24.31	23.11	22.59
PCS 1900	512	1850.2	22.05	21.76	20.41	19.45
	661	1880.0	22.71	21.48	20.82	19.47
	810	1909.8	22.52	21.54	20.79	19.38

For SAR, the time based average power is relevant, the difference in between depends on the duty cycle of the TDMA signal.

Number of Time slot	1	2	3	4
Duty Cycle	1:8	1:4	1:2.66	1:2
Time based Ave. power compared to slotted Ave. power	-9 dB	-6 dB	-4.25 dB	-3 dB
Crest Factor	8	4	2.66	2

The time based average power for GPRS

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	22.01	23.89	24.4	24.61
	190	836.6	22.44	23.98	24.62	24.64
	251	848.8	22.98	23.02	24.65	24.49
PCS 1900	512	1850.2	17.32	19.56	19.99	19.9
	661	1880	16.88	19.72	19.77	20.49
	810	1909.8	17.24	19.66	19.97	19.96

The time based average power for EDGE

Band	Channel No.	Frequency (MHz)	Time based average Power (dBm)			
			1 slot	2 slot	3 slots	4 slots
GSM 850	128	824.2	16.15	18.38	19.22	19.43
	190	836.6	16.26	18.36	19.24	19.28
	251	848.8	16.17	18.31	18.86	19.59
PCS 1900	512	1850.2	13.05	15.76	16.16	16.45
	661	1880	13.71	15.48	16.57	16.47
	810	1909.8	13.52	15.54	16.54	16.38

Note:

1. Rohde & Schwarz Radio Communication Tester (CMU200) was used for the measurement of GSM peak and average output power for active timeslots.
- 2 .For GSM voice, 1 timeslot has been activated with power level 5 (850 MHz band) and 0 (1900 MHz band).
- 3 .For GPRS, 1, 2, 3 and 4 timeslots has been activated separately with power level 3(850 MHz band) and 3(1900 MHz band).
4. According to KDB941225D01-SAR for EGPRS mode are not required when the source-based time-averaged output power for data mode is lower than that in the normal GPRS mode.

WCDMA Band II

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band II)	Normal	Rel 99	1	18.11	18.21	17.93
		HSDPA	1	18.14	18.10	18.06
			2	18.12	17.96	18.07
			3	18.09	18.03	17.96
			4	18.13	18.15	18.11
		HSUPA	1	18.20	18.14	18.12
			2	18.10	17.96	18.15
			3	18.16	18.11	18.02
			4	18.16	17.95	18.01
			5	18.10	18.14	18.15
		HSPA+	1	18.15	18.02	18.04

WCDMA Band IV

Mode	Test Condition	Test Mode	3GPP Sub Test	Average Output Power (dBm)		
				Low Frequency	Middle Frequency	High Frequency
WCDMA (Band IV)	Normal	Rel 99	1	18.13	18.29	18.15
		HSDPA	1	18.19	18.09	18.06
			2	18.11	18.01	18.17
			3	18.13	17.93	18.12
			4	18.21	18.04	18.05
		HSUPA	1	18.17	18.14	18.13
			2	18.13	18.05	18.02
			3	18.16	17.83	18.11
			4	18.23	18.04	18.18
			5	18.13	17.84	18.06
		HSPA+	1	18.16	18.00	18.07

LTE Band 2

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.92	19.07	18.78
		1#3	19.15	18.63	18.26
		1#5	18.35	18.20	18.67
		3#0	18.79	18.45	18.09
		3#1	18.29	18.42	18.52
		3#3	19.22	18.43	18.23
		6#0	18.49	18.81	18.83
	16-QAM	1#0	18.71	18.87	18.29
		1#3	18.39	18.26	18.46
		1#5	18.47	18.40	18.96
		3#0	19.01	18.51	18.29
		3#1	18.97	18.19	18.54
		3#3	18.99	18.53	18.74
		6#0	18.52	18.16	18.98
3M	QPSK	1#0	18.27	18.75	19.02
		1#7	19.03	18.32	18.20
		1#14	18.97	18.81	18.53
		8#0	19.11	18.34	18.97
		8#4	18.51	18.58	18.39
		8#7	18.42	18.23	18.53
		15#0	18.84	18.49	18.33
	16-QAM	1#0	18.45	18.22	18.49
		1#7	18.41	18.78	18.83
		1#14	18.59	18.87	18.76
		8#0	18.57	18.64	18.48
		8#4	18.77	18.30	18.94
		8#7	18.28	18.85	18.71
		15#0	18.41	19.01	18.38

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.84	19.06	18.69
		1#12	18.93	18.75	18.61
		1#24	19.22	18.69	18.15
		12#0	18.89	18.89	18.04
		12#6	18.87	18.43	18.44
		12#11	18.41	18.84	18.58
		25#0	18.73	18.20	18.30
	16-QAM	1#0	18.94	19.01	18.49
		1#12	18.29	18.74	18.84
		1#24	19.24	19.07	18.50
		12#0	18.86	18.20	18.63
		12#6	19.21	18.22	18.43
		12#11	18.73	18.32	18.88
		25#0	18.95	18.93	18.30
10M	QPSK	1#0	19.16	18.56	18.46
		1#24	18.88	18.20	18.88
		1#49	18.64	18.20	18.80
		25#0	19.02	18.86	18.30
		25#12	18.92	18.88	18.15
		25#24	19.05	18.59	18.40
		50#0	19.05	18.21	18.33
	16-QAM	1#0	18.94	18.69	18.26
		1#24	18.48	18.18	18.95
		1#49	19.16	18.32	18.10
		25#0	18.67	18.36	18.64
		25#12	18.63	18.91	18.91
		25#24	18.53	18.34	18.91
		50#0	18.80	18.64	18.83

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.47	18.69	18.05
		1#37	19.24	18.85	18.13
		1#74	18.34	18.94	18.74
		36#0	19.23	18.19	18.80
		36#17	18.50	18.76	18.30
		36#35	18.78	18.37	18.04
		75#0	18.38	18.16	18.41
	16-QAM	1#0	18.47	18.97	18.74
		1#37	19.25	18.14	18.29
		1#74	19.10	18.89	18.99
		36#0	18.26	18.45	18.39
		36#17	18.41	19.04	18.06
		36#35	18.50	18.31	18.68
		75#0	18.80	18.96	18.91
20M	QPSK	1#0	19.20	18.44	18.72
		1#49	18.29	18.82	18.89
		1#99	19.22	19.10	18.53
		50#0	18.85	18.38	18.97
		50#24	19.08	18.36	18.33
		50#49	19.05	18.18	18.85
		100#0	19.23	18.51	19.01
	16-QAM	1#0	18.67	18.66	18.34
		1#49	19.23	18.36	18.84
		1#99	18.96	18.33	18.73
		50#0	18.71	18.89	18.07
		50#24	18.94	18.65	18.75
		50#49	19.06	18.56	18.90
		100#0	18.35	19.07	18.80

LTE Band 4

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.46	18.88	18.53
		1#3	19.07	18.47	18.58
		1#5	19.08	19.06	19.02
		3#0	18.51	18.16	18.65
		3#1	18.65	18.15	18.79
		3#3	18.73	18.16	18.64
		6#0	18.31	18.81	18.77
	16-QAM	1#0	18.91	18.82	18.56
		1#3	18.74	18.53	18.23
		1#5	18.35	18.76	19.00
		3#0	18.43	18.86	18.86
		3#1	19.03	18.64	18.78
		3#3	18.56	18.95	18.57
		6#0	18.43	18.62	18.26
3M	QPSK	1#0	19.15	18.67	18.82
		1#7	18.40	18.73	18.83
		1#14	19.13	18.79	18.95
		8#0	19.25	18.98	19.01
		8#4	18.79	18.33	18.75
		8#7	18.38	18.99	18.68
		15#0	19.16	18.68	18.87
	16-QAM	1#0	18.81	18.12	18.70
		1#7	18.27	18.47	18.98
		1#14	18.84	18.45	18.79
		8#0	18.58	18.37	18.72
		8#4	19.09	19.08	18.51
		8#7	19.05	19.00	18.18
		15#0	18.94	18.76	18.25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.00	18.40	19.01
		1#12	19.04	18.19	18.04
		1#24	19.11	19.11	18.69
		12#0	18.44	18.41	18.81
		12#6	19.16	18.29	18.37
		12#11	18.56	18.63	18.31
		25#0	19.09	18.61	18.05
	16-QAM	1#0	18.79	18.92	18.26
		1#12	18.29	18.91	18.62
		1#24	18.95	18.42	18.30
		12#0	18.66	18.61	18.97
		12#6	19.20	18.87	18.40
		12#11	19.04	18.31	18.35
		25#0	18.91	18.28	18.33
10M	QPSK	1#0	19.10	18.37	18.12
		1#24	19.06	18.74	18.88
		1#49	19.21	18.75	18.95
		25#0	19.11	19.01	18.57
		25#12	19.02	18.71	18.37
		25#24	18.40	18.13	18.88
		50#0	19.05	18.30	18.49
	16-QAM	1#0	18.49	18.99	18.77
		1#24	18.98	18.84	18.14
		1#49	18.67	18.97	18.27
		25#0	18.95	18.68	18.14
		25#12	18.73	18.17	18.85
		25#24	18.48	19.00	18.84
		50#0	18.84	18.93	18.85

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.82	18.66	18.87
		1#37	18.63	19.10	18.27
		1#74	19.12	19.09	18.05
		36#0	18.73	18.22	18.37
		36#17	18.41	18.57	18.70
		36#35	19.26	18.23	18.17
		75#0	19.25	18.95	18.90
	16-QAM	1#0	19.04	18.98	18.77
		1#37	18.64	18.77	18.56
		1#74	18.81	18.59	18.96
		36#0	18.87	18.18	18.66
		36#17	19.21	18.44	18.73
		36#35	18.66	18.66	18.16
		75#0	18.33	18.38	18.36
20M	QPSK	1#0	19.18	18.24	18.08
		1#49	18.59	18.47	18.58
		1#99	18.70	18.28	18.69
		50#0	18.80	19.05	18.46
		50#24	18.30	18.69	18.54
		50#49	18.93	18.33	18.31
		100#0	18.74	18.38	18.06
	16-QAM	1#0	18.86	18.99	18.52
		1#49	19.08	18.41	18.40
		1#99	18.30	18.82	18.36
		50#0	18.98	18.90	18.35
		50#24	18.49	18.24	18.57
		50#49	18.73	18.75	18.36
		100#0	18.58	18.32	18.72

LTE Band 7

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	13.40	13.60	13.38
		1#12	13.56	13.91	13.82
		1#24	13.39	13.17	13.56
		12#0	14.24	14.00	13.13
		12#6	13.99	13.50	13.22
		12#11	13.73	13.27	13.83
		25#0	13.43	13.36	13.05
	16-QAM	1#0	13.73	14.03	13.88
		1#12	13.64	13.58	13.50
		1#24	14.17	13.99	13.51
		12#0	13.48	14.00	13.32
		12#6	14.24	13.50	13.86
		12#11	13.68	14.10	13.49
		25#0	14.06	13.16	13.68
10M	QPSK	1#0	13.78	13.92	13.27
		1#24	13.91	13.39	13.30
		1#49	13.32	13.84	13.39
		25#0	13.98	13.14	13.63
		25#12	13.61	13.59	13.96
		25#24	14.17	13.26	13.06
		50#0	13.87	13.93	13.41
	16-QAM	1#0	13.49	13.73	13.59
		1#24	13.28	13.72	13.34
		1#49	13.43	13.19	13.95
		25#0	14.18	13.84	13.36
		25#12	14.03	13.92	13.73
		25#24	13.48	13.17	13.11
		50#0	13.45	13.37	13.39

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	13.57	13.57	13.77
		1#37	13.43	13.37	13.89
		1#74	13.58	13.39	13.71
		36#0	14.13	13.63	13.25
		36#17	13.74	13.15	13.61
		36#35	13.76	13.76	13.86
		75#0	14.12	13.89	13.32
	16-QAM	1#0	13.93	13.21	13.55
		1#37	14.22	13.28	13.76
		1#74	13.46	13.28	13.81
		36#0	14.20	13.19	13.24
		36#17	14.16	14.05	13.31
		36#35	14.20	13.80	13.10
		75#0	14.12	13.20	13.72
20M	QPSK	1#0	14.21	14.24	14.22
		1#49	13.99	13.88	13.30
		1#99	13.90	13.94	13.87
		50#0	14.16	14.23	14.14
		50#24	13.57	14.06	13.26
		50#49	13.49	13.17	13.29
		100#0	14.22	13.58	13.82
	16-QAM	1#0	13.48	14.06	13.04
		1#49	14.15	13.40	13.29
		1#99	13.32	13.13	13.08
		50#0	13.45	13.82	13.76
		50#24	14.06	13.95	13.66
		50#49	13.59	13.60	13.67
		100#0	14.00	13.39	13.64

LTE Band 25

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	19.01	18.48	18.44
		1#3	18.67	18.67	18.43
		1#5	19.06	18.29	18.61
		3#0	18.68	19.05	18.65
		3#1	19.04	18.91	18.40
		3#3	19.12	18.82	18.57
		6#0	18.80	18.83	18.28
	16-QAM	1#0	18.52	18.92	18.32
		1#3	18.61	19.03	18.32
		1#5	19.01	18.66	19.01
		3#0	18.99	18.68	18.08
		3#1	18.83	18.96	18.78
		3#3	18.97	19.02	18.94
		6#0	18.77	18.74	18.90
3M	QPSK	1#0	18.95	18.42	18.22
		1#7	18.38	18.92	18.59
		1#14	18.88	18.22	18.48
		8#0	19.01	18.21	18.48
		8#4	18.94	18.22	18.64
		8#7	19.15	18.20	18.68
		15#0	18.99	18.17	18.02
	16-QAM	1#0	18.66	18.80	18.87
		1#7	18.49	18.73	18.81
		1#14	18.89	18.37	18.17
		8#0	18.36	18.16	18.47
		8#4	18.61	18.45	18.48
		8#7	18.91	18.27	18.10
		15#0	18.97	18.99	18.71

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.95	19.10	18.53
		1#12	18.32	18.20	18.76
		1#24	18.61	18.60	18.89
		12#0	18.98	18.82	18.19
		12#6	18.30	18.44	18.21
		12#11	19.12	19.08	19.00
		25#0	18.45	18.72	18.83
	16-QAM	1#0	18.52	19.06	18.30
		1#12	18.66	18.81	18.67
		1#24	19.06	18.89	18.47
		12#0	18.59	18.14	18.90
		12#6	18.96	19.06	18.60
		12#11	18.65	18.21	18.36
		25#0	18.94	18.50	18.90
10M	QPSK	1#0	18.46	18.51	18.26
		1#24	19.02	18.69	18.48
		1#49	18.46	18.61	18.42
		25#0	18.97	18.41	18.78
		25#12	18.44	19.10	19.00
		25#24	18.46	18.19	18.21
		50#0	19.23	18.18	18.28
	16-QAM	1#0	19.12	18.78	18.80
		1#24	18.73	18.47	18.90
		1#49	19.18	19.07	18.23
		25#0	19.18	18.52	18.13
		25#12	19.17	19.11	18.40
		25#24	18.94	18.43	18.87
		50#0	19.22	18.66	18.08

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.32	18.31	18.97
		1#37	18.62	18.83	18.73
		1#74	18.75	18.83	18.71
		36#0	18.37	18.58	19.01
		36#17	18.92	18.62	18.03
		36#35	19.08	19.05	18.80
		75#0	18.49	18.88	18.17
	16-QAM	1#0	18.56	19.04	18.91
		1#37	18.34	18.69	18.85
		1#74	18.46	18.63	18.29
		36#0	19.06	18.92	18.95
		36#17	18.73	18.95	18.05
		36#35	19.10	18.30	19.01
		75#0	18.41	19.09	18.36
20M	QPSK	1#0	19.11	19.24	19.13
		1#49	18.74	18.28	18.64
		1#99	18.91	18.80	18.59
		50#0	18.81	19.06	18.86
		50#24	18.54	18.22	18.90
		50#49	18.32	18.65	18.04
		100#0	18.57	18.94	18.65
	16-QAM	1#0	18.89	18.85	18.04
		1#49	19.21	18.93	18.18
		1#99	18.86	18.75	18.62
		50#0	18.67	18.14	18.70
		50#24	19.07	18.95	18.05
		50#49	18.49	18.23	18.34
		100#0	18.74	18.27	18.53

LTE Band 40 Lower

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	17.36	17.52	17.27
		1#12	18.13	17.48	17.43
		1#24	18.25	17.44	17.53
		12#0	17.43	17.14	17.48
		12#6	17.62	17.51	17.20
		12#11	17.71	17.12	17.72
		25#0	18.18	18.07	17.27
	16-QAM	1#0	17.95	17.16	17.55
		1#12	18.13	17.38	17.48
		1#24	17.77	17.14	17.52
		12#0	17.28	17.24	17.54
		12#6	17.83	17.60	17.65
		12#11	17.63	17.99	17.29
		25#0	17.67	17.30	17.69
10M	QPSK	1#0	/	18.26	/
		1#24	/	17.43	/
		1#49	/	17.25	/
		25#0	/	17.99	/
		25#12	/	17.85	/
		25#24	/	18.08	/
		50#0	/	18.06	/
	16-QAM	1#0	/	17.55	/
		1#24	/	17.87	/
		1#49	/	17.56	/
		25#0	/	17.25	/
		25#12	/	17.41	/
		25#24	/	17.51	/
		50#0	/	17.20	/

LTE Band 40 Upper

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	17.69	18.02	17.50
		1#12	17.57	17.50	17.79
		1#24	17.61	17.13	17.45
		12#0	17.85	17.13	17.83
		12#6	17.70	17.78	17.79
		12#11	17.35	17.15	17.52
		25#0	17.83	17.25	17.23
	16-QAM	1#0	18.21	17.35	17.15
		1#12	17.63	17.99	17.36
		1#24	18.17	17.47	17.29
		12#0	17.34	17.33	17.84
		12#6	17.63	17.81	17.39
		12#11	18.06	17.38	17.34
		25#0	17.98	17.11	17.45
10M	QPSK	1#0	/	18.21	/
		1#24	/	17.80	/
		1#49	/	18.15	/
		25#0	/	18.06	/
		25#12	/	17.89	/
		25#24	/	17.19	/
		50#0	/	17.91	/
	16-QAM	1#0	/	17.73	/
		1#24	/	17.68	/
		1#49	/	17.75	/
		25#0	/	17.74	/
		25#12	/	17.50	/
		25#24	/	17.30	/
		50#0	/	17.99	/

LTE Band 41

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	18.81	19.02	18.52	18.38
		1#12	18.91	18.76	18.91	18.24
		1#24	18.92	19.08	18.07	18.83
		12#0	19.12	18.44	18.32	19.07
		12#6	18.47	18.49	18.13	18.59
		12#11	19.10	18.43	18.37	18.53
		25#0	19.10	18.17	18.24	18.33
	16-QAM	1#0	19.24	18.12	18.35	18.80
		1#12	18.80	18.36	18.97	19.05
		1#24	18.83	18.35	18.88	18.32
		12#0	18.83	19.06	18.56	18.14
		12#6	19.16	18.76	18.42	18.76
		12#11	19.11	18.37	18.73	18.41
		25#0	18.35	18.56	18.84	18.28
10M	QPSK	1#0	18.94	19.05	18.53	18.50
		1#24	18.86	18.64	18.53	18.70
		1#49	18.77	18.45	18.64	18.63
		25#0	18.37	18.98	18.50	18.79
		25#12	18.53	19.01	18.41	18.30
		25#24	18.42	18.54	18.30	18.37
		50#0	19.05	18.41	18.94	18.44
	16-QAM	1#0	19.03	18.97	18.67	18.31
		1#24	19.16	18.83	18.13	18.94
		1#49	18.71	18.60	18.47	18.34
		25#0	19.09	18.34	18.44	18.85
		25#12	19.22	18.37	18.59	18.50
		25#24	18.35	18.55	18.11	18.52
		50#0	18.40	18.64	18.45	18.71

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

Test Bandwidth	Test Modulation	Resource Block & RB offset	Lowest Channel (dBm)	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.77	18.35	18.11	18.98
		1#37	18.61	18.69	18.19	18.30
		1#74	18.53	18.49	18.40	18.48
		36#0	18.65	18.58	18.97	18.36
		36#17	18.28	19.01	18.94	18.54
		36#35	18.54	18.22	18.50	18.12
		75#0	19.17	18.70	18.71	18.25
	16-QAM	1#0	18.90	18.21	19.02	18.83
		1#37	18.32	18.91	18.22	18.50
		1#74	18.33	18.13	18.83	18.45
		36#0	18.43	18.75	18.96	18.41
		36#17	19.09	18.40	18.32	19.04
		36#35	19.13	18.39	18.42	18.81
		75#0	18.36	18.51	18.52	18.94
20M	QPSK	1#0	19.11	19.19	19.25	19.07
		1#49	18.34	18.23	18.90	18.54
		1#99	18.92	19.02	18.50	18.34
		50#0	19.14	19.16	19.20	19.10
		50#24	19.14	18.14	18.38	18.82
		50#49	19.12	18.63	18.14	18.85
		100#0	18.33	18.23	18.56	18.72
	16-QAM	1#0	18.53	18.77	18.88	18.15
		1#49	18.33	18.35	19.02	18.86
		1#99	18.90	18.66	18.66	18.15
		50#0	18.58	18.25	18.57	18.62
		50#24	18.36	18.27	18.74	19.00
		50#49	18.64	18.53	18.06	18.48
		100#0	19.06	19.05	18.41	18.25

Note: The lowest channel frequency, middle channel frequency and high channel frequency is low, middle and high test frequencies corresponding to different bandwidths within the frequency range 2555MHz~2655MHz, and the low channel frequency is 2580MHz.

LTE Band 66

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
1.4M	QPSK	1#0	18.31	18.96	18.27
		1#3	18.53	18.77	18.34
		1#5	19.23	18.30	18.18
		3#0	18.90	18.58	18.27
		3#1	19.25	18.38	18.71
		3#3	18.96	18.86	18.25
		6#0	19.06	18.23	19.02
	16-QAM	1#0	19.15	18.64	19.02
		1#3	18.36	18.96	18.65
		1#5	18.96	18.90	18.60
		3#0	18.84	18.15	18.96
		3#1	18.61	18.34	18.30
		3#3	19.17	18.24	18.91
		6#0	18.79	18.46	18.87
3M	QPSK	1#0	18.36	18.94	18.65
		1#7	18.43	18.99	18.54
		1#14	18.27	18.70	19.00
		8#0	19.06	18.40	18.34
		8#4	18.83	18.25	18.10
		8#7	18.43	19.11	18.27
		15#0	18.47	18.55	18.94
	16-QAM	1#0	18.26	18.18	18.46
		1#7	18.43	18.12	18.08
		1#14	18.66	18.89	18.73
		8#0	19.23	19.03	18.61
		8#4	18.37	18.11	18.22
		8#7	18.75	18.74	18.65
		15#0	18.85	18.20	18.50

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
5M	QPSK	1#0	19.12	18.13	18.95
		1#12	19.09	18.67	18.21
		1#24	18.74	18.86	18.69
		12#0	18.38	18.98	18.86
		12#6	18.72	18.25	18.36
		12#11	18.28	18.17	19.00
		25#0	18.99	18.66	18.42
	16-QAM	1#0	18.97	18.58	18.06
		1#12	19.01	19.03	18.34
		1#24	18.96	18.48	18.43
		12#0	18.39	18.17	18.30
		12#6	18.74	18.79	18.92
		12#11	18.60	18.49	18.46
		25#0	18.68	18.31	18.95
10M	QPSK	1#0	19.13	18.36	18.66
		1#24	18.62	18.97	18.58
		1#49	19.07	18.16	18.72
		25#0	18.52	19.09	18.83
		25#12	18.60	18.31	18.67
		25#24	18.59	18.56	18.56
		50#0	18.63	18.16	18.51
	16-QAM	1#0	18.33	18.89	18.26
		1#24	18.95	18.73	18.05
		1#49	18.49	18.98	18.03
		25#0	18.74	18.46	18.18
		25#12	18.87	19.00	18.60
		25#24	18.38	18.85	18.20
		50#0	19.09	18.49	18.23

Test Bandwidth	Test Modulation	Resource Block & RB offset	Low Channel (dBm)	Middle Channel (dBm)	High Channel (dBm)
15M	QPSK	1#0	18.79	18.95	18.53
		1#37	18.72	18.83	18.26
		1#74	18.90	18.44	18.17
		36#0	18.62	18.81	18.30
		36#17	18.28	18.96	18.04
		36#35	18.52	18.67	18.06
		75#0	18.73	18.40	18.32
	16-QAM	1#0	18.73	18.15	18.19
		1#37	18.33	18.73	18.96
		1#74	18.95	18.54	18.64
		36#0	19.15	18.62	18.56
		36#17	19.14	18.57	18.33
		36#35	18.40	18.57	18.24
		75#0	18.88	18.29	18.78
20M	QPSK	1#0	19.21	19.39	19.28
		1#49	19.05	19.09	18.14
		1#99	18.37	18.68	18.97
		50#0	19.20	19.33	19.10
		50#24	19.00	18.17	18.80
		50#49	18.62	18.30	18.72
		100#0	18.81	18.97	18.74
	16-QAM	1#0	18.74	19.06	18.53
		1#49	18.73	18.69	18.33
		1#99	18.99	18.14	18.93
		50#0	19.07	18.88	18.44
		50#24	18.62	18.19	18.47
		50#49	19.24	18.33	18.21
		100#0	18.97	18.57	18.21


WLAN 5G:

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5150-5250 MHz	5180	8.68
		5200	8.56
		5240	8.39
802.11ac20	5150-5250 MHz	5180	8.35
		5200	8.30
		5240	8.22
802.11n-HT20	5150-5250 MHz	5180	8.31
		5200	8.29
		5240	8.36
802.11ac40	5150-5250 MHz	5190	7.53
		5230	7.20
802.11n-HT40	5150-5250 MHz	5190	7.34
		5230	7.38
802.11ac80	/	5210	5.71

Test mode	Band	Frequency (MHz)	Average Conducted Output Power (dBm)
802.11a	5725-5850 MHz	5745	7.26
		5785	7.18
		5825	7.41
802.11ac20	5725-5850 MHz	5745	6.94
		5785	6.87
		5825	7.05
802.11n-HT20	5725-5850 MHz	5745	6.86
		5785	6.74
		5825	7.10
802.11ac40	5725-5850 MHz	5755	7.05
		5795	7.21
802.11n-HT40	5725-5850 MHz	5755	6.91
		5795	6.99
802.11ac80	/	5775	7.01

Standalone SAR test exclusion considerations

Antennas Location:

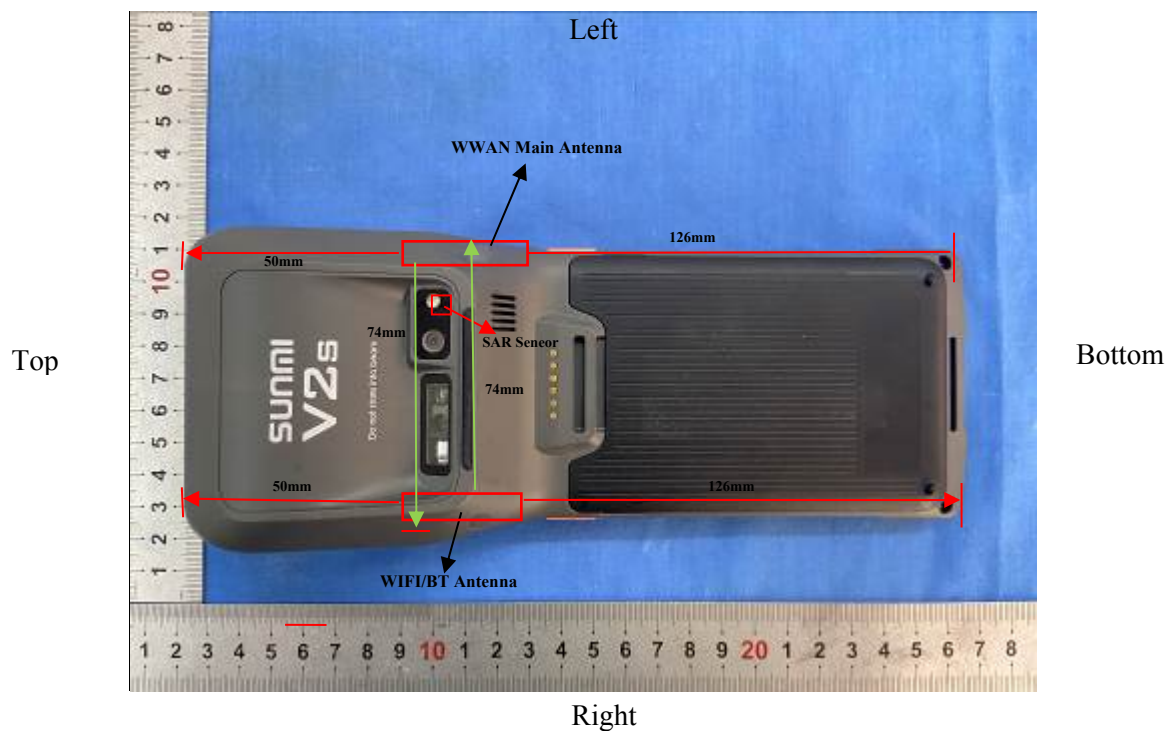

Antenna Distance To Edge

Antenna	Antenna Distance To Edge(mm)					
	Back	Front	Left	Right	Top	Bottom
WWAN Main	<5	<5	<5	74	50	126
WIFI/BT	<5	<5	74	<5	50	126

Note: The Main antenna has transmitting and receiving functions, while the DIV antenna only has receiving functions

Output power level shall be the higher of the maximum conducted or equivalent isotropically radiated power(e.r.i.p.) source-based, time-averaged output power. For controlled use devices where the 8W/kg for gram of tissue applies, the exemption limits for routine evaluation in Table 1 are multiplied by factor of 5. For limb-worn devices where the 10 gram value applies, the exemption limits for routine evaluation in Table 1 are multiplied by a factor of 2.5. If the operating frequency of the device is between two frequencies located in Table 1, linear interpolation shall be applied for the applicable separation distance. For test separation distance less than 5mm, the exemption limits for a separation distance of 5mm can be applied to determine if a routine evaluation is required.

Table 1: SAR evaluation – Exemption limits for routine evaluation based on frequency and separation distance^{4,5}

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of ≤5 mm	At separation distance of 10 mm	At separation distance of 15 mm	At separation distance of 20 mm	At separation distance of 25 mm
≤300	71 mW	101 mW	132 mW	162 mW	193 mW
450	52 mW	70 mW	88 mW	106 mW	123 mW
835	17 mW	30 mW	42 mW	55 mW	67 mW
1900	7 mW	10 mW	18 mW	34 mW	60 mW
2450	4 mW	7 mW	15 mW	30 mW	52 mW
3500	2 mW	6 mW	16 mW	32 mW	55 mW
5800	1 mW	6 mW	15 mW	27 mW	41 mW

Frequency (MHz)	Exemption Limits (mW)				
	At separation distance of 30 mm	At separation distance of 35 mm	At separation distance of 40 mm	At separation distance of 45 mm	At separation distance of ≥50 mm
≤300	223 mW	254 mW	284 mW	315 mW	345 mW
450	141 mW	159 mW	177 mW	195 mW	213 mW
835	80 mW	92 mW	105 mW	117 mW	130 mW
1900	99 mW	153 mW	225 mW	316 mW	431 mW
2450	83 mW	123 mW	173 mW	235 mW	309 mW
3500	86 mW	124 mW	170 mW	225 mW	290 mW
5800	56 mW	71 mW	85 mW	97 mW	106 mW

Position	Distance (mm)	Mode	Frequency (MHz)	Max Pavg (dBm)+Gain (dBi)	Max Pavg (mW)	Test exclusion Threshold (mW)	SAR test Exclusion
Front/Back/Left	<5	GSM 850	848.8	30.07	1016	16.8	No
		PCS 1900	1880	29	794	7.2	No
		WCDMA Band 2	1880	24.5	282	7.2	No
		WCDMA Band 4	836.4	23.65	132	16.9	No
		WCDMA Band 5	846.6	22.57	181	16.8	No
		LTE Band7	2560	22.92	196	3.8	No
		LTE Band12	711	24.5	282	28.4	No
		LTE Band25	1905	24.5	282	7.3	No
		LTE Band26	841.5	24.5	282	16.8	No
		LTE Band40-low	2310	24.5	282	4.6	No
		LTE Band40-up	2355	24.5	282	4.5	No
		LTE Band41	2645	24.5	282	3.7	No
		LTE Band66	1770	23.65	232	8.3	No

Position	Distance (mm)	Mode	Frequency (MHz)	Max Pavg (dBm)+Gain (dBi)	Max Pavg (mW)	Test exclusion Threshold (mW)	SAR test Exclusion
Top/Bottom/ Right	≥ 50	GSM 850	848.8	30.07	1016	130	No
		PCS 1900	1880	29	794	430	No
		WCDMA Band 2	1880	24.5	282	430	YES
		WCDMA Band 4	836.4	23.65	132	130	No
		WCDMA Band 5	846.6	22.57	181	130	No
		LTE Band7	2560	22.92	196	308	YES
		LTE Band12	711	24.5	282	166	No
		LTE Band25	1905	24.5	282	428	YES
		LTE Band26	841.5	24.5	282	130	No
		LTE Band40-low	2310	24.5	282	340	YES
		LTE Band40-up	2355	24.5	282	284	YES
		LTE Band41	2645	24.5	282	308	YES
		LTE Band66	1770	23.65	232	386	YES

SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation.

SAR Test Data

Environmental Conditions

Temperature:	22.1-22.5 °C	22.0-22.6 °C	21.5-22.6 °C	22.3-23.0 °C	22.4-23.2 °C
Relative Humidity:	51 %	49 %	53 %	50 %	48 %
ATM Pressure:	101.6 kPa	101.1 kPa	101.6 kPa	101.5 kPa	101.6 kPa
Test Date:	2021/04/23	2021/04/24	2021/04/25	2021/04/26	2021/04/27
Temperature:	22.1-22.8 °C	21.9-22.9 °C	22.1-22.8 °C		
Relative Humidity:	54 %	49 %	50 %		
ATM Pressure:	101.6 kPa	101.5 kPa	101.4 kPa		
Test Date:	2021/04/28	2021/04/29	2021/04/30		

Testing was performed by Bard Liu

GSM 850 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	836.6	GPRS4TX	On	27.64	28.00	1.086	0.543	0.590	1.6	/
Body-Back (0mm)	836.6	GPRS4TX	On	27.64	28.00	1.086	0.299	0.325	1.6	/
Body-Left (0mm)	836.6	GPRS4TX	On	27.64	28.00	1.086	0.732	0.795	1.6	/
Body-Left (0mm)	824.2	GPRS4TX	On	27.61	28.00	1.094	0.716	0.783	1.6	/
Body-Left (0mm)	848.8	GPRS4TX	On	27.49	28.00	1.125	0.763	0.858	1.6	1#
Body-Right (0mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.159	0.172	1.6	/
Body-Top (0mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.041	0.044	1.6	/
Body-Bottom (0mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.060	0.065	1.6	/
Body-Front (4mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.245	0.265	1.6	/
Body-Back (4mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.138	0.149	1.6	/
Body-Left (19mm)	836.6	GPRS4TX	Off	29.66	30.00	1.081	0.104	0.112	1.6	/

GSM 1900 :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	GPRS4TX	On	23.49	24.00	1.125	0.213	0.240	1.6	/
Body-Back (0mm)	1880	GPRS4TX	On	23.49	24.00	1.125	0.279	0.314	1.6	/
Body-Left (0mm)	1880	GPRS4TX	On	23.49	24.00	1.125	1.110	1.248	1.6	/
Body-Left (0mm)	1850.2	GPRS4TX	On	22.90	23.50	1.148	1.030	1.183	1.6	/
Body-Left (0mm)	1909.8	GPRS4TX	On	22.96	23.50	1.132	1.250	1.416	1.6	2#
Body-Right (0mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.045	0.048	1.6	/
Body-Top (0mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.058	0.063	1.6	/
Body-Bottom (0mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.042	0.046	1.6	/
Body-Front (4mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.121	0.130	1.6	/
Body-Back (4mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.218	0.235	1.6	/
Body-Left (19mm)	1880	GPRS4TX	Off	26.68	27.00	1.076	0.104	0.112	1.6	/

WCDMA Band II :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	RMC	On	18.21	18.50	1.069	0.189	0.202	1.6	/
Body-Back (0mm)	1880	RMC	On	18.21	18.50	1.069	0.198	0.212	1.6	/
Body-Left (0mm)	1880	RMC	On	18.21	18.50	1.069	1.010	1.080	1.6	/
Body-Left (0mm)	1852.4	RMC	On	18.11	18.50	1.094	0.987	1.080	1.6	/
Body-Left (0mm)	1907.6	RMC	On	17.93	18.50	1.140	0.966	1.101	1.6	3#
Body-Front (4mm)	1880	RMC	Off	22.19	22.50	1.074	0.204	0.219	1.6	/
Body-Back (4mm)	1880	RMC	Off	22.19	22.50	1.074	0.360	0.387	1.6	/
Body-Left (19mm)	1880	RMC	Off	22.19	22.50	1.074	0.264	0.284	1.6	/

WCDMA Band IV :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1732.6	RMC	ON	18.29	18.50	1.050	0.283	0.297	1.6	/
Body-Back (0mm)	1732.6	RMC	ON	18.29	18.50	1.050	0.157	0.165	1.6	/
Body-Left (0mm)	1732.6	RMC	ON	18.29	18.50	1.050	1.030	1.081	1.6	/
Body-Left (0mm)	1712.4	RMC	ON	18.13	18.50	1.089	1.050	1.143	1.6	/
Body-Left (0mm)	1752.6	RMC	ON	18.15	18.50	1.084	1.060	1.149	1.6	4#
Body-Right (0mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.189	0.196	1.6	/
Body-Top (0mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.050	0.051	1.6	/
Body-Bottom (0mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.061	0.063	1.6	/
Body-Front (4mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.337	0.350	1.6	/
Body-Back (4mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.263	0.273	1.6	/
Body-Left (19mm)	1732.6	RMC	OFF	22.34	22.50	1.038	0.255	0.265	1.6	/

WCDMA Band V :

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
				Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.501	0.542	1.6	/
Body-Back (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.254	0.275	1.6	/
Body-Left (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.812	0.878	1.6	/
Body-Left (0mm)	826.4	RMC	Off	22.06	22.50	1.107	0.769	0.851	1.6	/
Body-Left (0mm)	846.6	RMC	Off	22.15	22.50	1.084	0.855	0.927	1.6	5#
Body-Right (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.194	0.210	1.6	/
Body-Top (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.032	0.035	1.6	/
Body-Bottom (0mm)	836.6	RMC	Off	22.16	22.50	1.081	0.060	0.065	1.6	/

LTE Band 7 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2535	20	1RB	On	14.24	14.50	1.062	0.593	0.630	1.6	/
	2535	20	50%RB	On	14.23	14.50	1.064	0.543	0.578	1.6	/
Body-Back (0mm)	2535	20	1RB	On	14.24	14.50	1.062	0.222	0.236	1.6	/
	2535	20	50%RB	On	14.23	14.50	1.064	0.196	0.209	1.6	/
Body-Left (0mm)	2535	20	1RB	On	14.24	14.50	1.062	0.961	1.020	1.6	/
	2510	20	1RB	On	14.21	14.50	1.069	1.070	1.144	1.6	6#
	2560	20	1RB	On	14.22	14.50	1.067	0.881	0.940	1.6	/
	2535	20	50%RB	On	14.23	14.50	1.064	0.822	0.875	1.6	/
	2510	20	50%RB	On	14.16	14.50	1.081	0.889	0.961	1.6	/
	2560	20	50%RB	On	14.14	14.50	1.086	0.793	0.862	1.6	/
	2535	20	100%RB	On	13.58	14.50	1.236	0.829	1.025	1.6	/
Body-Front (4mm)	2535	20	1RB	Off	22.21	22.50	1.069	0.278	0.297	1.6	/
	2535	20	50%RB	Off	21.99	22.50	1.125	0.234	0.263	1.6	/
Body-Back (4mm)	2535	20	1RB	Off	22.21	22.50	1.069	0.179	0.191	1.6	/
	2535	20	50%RB	Off	21.99	22.50	1.125	0.151	0.170	1.6	/
Body-Left (19mm)	2535	20	1RB	Off	22.21	22.50	1.069	0.297	0.318	1.6	/
	2535	20	50%RB	Off	21.99	22.50	1.125	0.231	0.260	1.6	/

LTE FDD Band 12& LTE FDD Band 17:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.370	0.393	1.6	/
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.299	0.346	1.6	/
Body-Back (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.214	0.227	1.6	/
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.169	0.196	1.6	/
Body-Left (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.561	0.596	1.6	/
	704	10	1RB	Off	21.61	22.50	1.227	0.624	0.766	1.6	7#
	711	10	1RB	Off	22.19	22.50	1.074	0.676	0.726	1.6	/
	707.5	10	50%RB	On	21.86	22.50	1.159	0.461	0.534	1.6	/
Body-Right (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.153	0.162	1.6	/
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.129	0.149	1.6	/
Body-Top (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.064	0.068	1.6	/
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.052	0.060	1.6	/
Body-Bottom (0mm)	707.5	10	1RB	Off	22.24	22.50	1.062	0.044	0.047	1.6	/
	707.5	10	50%RB	Off	21.86	22.50	1.159	0.036	0.042	1.6	/

LTE Band 25 & LTE Band 2 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1880	20	1RB	On	19.24	19.50	1.062	0.165	0.175	1.6	/
	1880	20	50%RB	On	19.06	19.50	1.107	0.147	0.163	1.6	/
Body-Back (0mm)	1880	20	1RB	On	19.24	19.50	1.062	0.284	0.302	1.6	/
	1880	20	50%RB	On	19.06	19.50	1.107	0.245	0.271	1.6	/
Body-Left (0mm)	1880	20	1RB	On	19.24	19.50	1.062	1.060	1.125	1.6	/
	1860	20	1RB	On	19.11	19.50	1.094	1.090	1.192	1.6	8#
	1905	20	1RB	On	19.13	19.50	1.089	1.100	1.198	1.6	/
	1880	20	50%RB	On	19.06	19.50	1.107	0.891	0.986	1.6	/
	1860	20	50%RB	On	18.81	19.50	1.172	0.966	1.132	1.6	/
	1905	20	50%RB	On	18.86	19.50	1.159	1.030	1.194	1.6	/
	1880	20	100%RB	On	18.94	19.50	1.138	0.949	1.080	1.6	/
Body-Front (4mm)	1880	20	1RB	Off	22.25	22.50	1.059	0.180	0.191	1.6	/
	1880	20	50%RB	Off	22.14	22.50	1.086	0.112	0.122	1.6	/
Body-Back (4mm)	1880	20	1RB	Off	22.25	22.50	1.059	0.312	0.330	1.6	/
	1880	20	50%RB	Off	22.14	22.50	1.086	0.263	0.286	1.6	/
Body-Left (19mm)	1880	20	1RB	Off	22.25	22.50	1.059	0.156	0.165	1.6	/
	1880	20	50%RB	Off	22.14	22.50	1.086	0.124	0.135	1.6	/

LTE Band 26 & LTE Band 5 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	831.5	15	1RB	Off	22.43	22.8	1.089	0.538	0.586	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.345	0.422	1.6	/
Body-Back (0mm)	831.5	15	1RB	Off	22.43	22.8	1.089	0.369	0.402	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.291	0.356	1.6	/
Body-Left (0mm)	831.5	15	1RB	Off	22.43	22.8	1.089	0.337	0.367	1.6	/
	821.5	15	1RB	Off	22.04	22.50	1.112	0.629	0.699	1.6	9#
	841.5	15	1RB	Off	22.14	22.50	1.086	0.600	0.652	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.259	0.317	1.6	/
Body-Right (0mm)	841.5	15	1RB	Off	22.14	22.50	1.086	0.151	0.160	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.120	0.129	1.6	/
Body-Top (0mm)	831.5	15	1RB	Off	22.43	22.8	1.089	0.381	0.415	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.306	0.375	1.6	/
Body-Bottom (0mm)	841.5	15	1RB	Off	22.14	22.50	1.086	0.072	0.077	1.6	/
	831.5	15	50%RB	Off	21.92	22.8	1.225	0.058	0.062	1.6	/

LTE FDD Band 66&TE FDD Band 4

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	1745	20	1RB	On	19.39	19.50	1.026	0.347	0.356	1.6	/
	1745	20	50%RB	On	19.33	19.50	1.040	0.290	0.302	1.6	/
Body-Back (0mm)	1745	20	1RB	On	19.39	19.50	1.026	0.170	0.174	1.6	/
	1745	20	50%RB	On	19.33	19.50	1.040	0.151	0.157	1.6	/
Body-Left (0mm)	1745	20	1RB	On	19.39	19.50	1.026	1.220	1.251	1.6	/
	1720	20	1RB	On	19.21	19.50	1.069	1.120	1.197	1.6	/
	1770	20	1RB	On	19.28	19.50	1.052	1.200	1.262	1.6	10#
	1745	20	50%RB	On	19.33	19.50	1.040	0.985	1.024	1.6	/
	1720	20	50%RB	On	19.20	19.50	1.072	1.030	1.104	1.6	/
	1770	20	50%RB	On	19.10	19.50	1.096	1.040	1.140	1.6	/
	1745	20	100%RB	On	18.97	19.50	1.130	0.965	1.090	1.6	/
Body-Front (4mm)	1745	20	1RB	Off	22.35	22.50	1.035	0.276	0.286	1.6	/
	1745	20	50%RB	Off	22.11	22.50	1.094	0.237	0.259	1.6	/
Body-Back (4mm)	1745	20	1RB	Off	22.35	22.50	1.035	0.209	0.216	1.6	/
	1745	20	50%RB	Off	22.11	22.50	1.094	0.183	0.200	1.6	/
Body-Left (19mm)	1745	20	1RB	Off	22.35	22.50	1.035	0.201	0.208	1.6	/
	1745	20	50%RB	Off	22.11	22.50	1.094	0.176	0.193	1.6	/

LTE TDD Band 40 - Low:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2310	10	1RB	On	18.26	18.50	1.057	0.030	0.031	1.6	/
	2310	10	50%RB	On	17.99	18.50	1.125	0.023	0.026	1.6	/
Body-Back (0mm)	2310	10	1RB	On	18.26	18.50	1.057	0.051	0.054	1.6	/
	2310	10	50%RB	On	17.99	18.50	1.125	0.040	0.045	1.6	/
Body-Left (0mm)	2310	10	1RB	On	18.26	18.50	1.057	1.060	1.120	1.6	11#
	2310	10	50%RB	On	17.99	18.50	1.125	0.885	0.995	1.6	/
Body-Front (4mm)	2310	10	1RB	Off	22.16	22.50	1.081	0.052	0.056	1.6	/
	2310	10	50%RB	Off	22.06	22.50	1.107	0.040	0.044	1.6	/
Body-Back (4mm)	2310	10	1RB	Off	22.16	22.50	1.081	0.079	0.086	1.6	/
	2310	10	50%RB	Off	22.06	22.50	1.107	0.064	0.071	1.6	/
Body-Left (19mm)	2310	10	1RB	Off	22.16	22.50	1.081	0.095	0.103	1.6	/
	2310	10	50%RB	Off	22.06	22.50	1.107	0.077	0.085	1.6	/

LTE TDD Band 40 - upper:

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2355	10	1RB	On	18.21	18.50	1.069	0.016	0.017	1.6	/
	2355	10	50%RB	On	18.06	18.50	1.107	0.012	0.013	1.6	/
Body-Back (0mm)	2355	10	1RB	On	18.21	18.50	1.069	0.049	0.052	1.6	/
	2355	10	50%RB	On	18.06	18.50	1.107	0.038	0.042	1.6	/
Body-Left (0mm)	2355	10	1RB	On	18.21	18.50	1.069	1.230	1.315	1.6	12#
	2355	10	50%RB	On	18.06	18.50	1.107	1.020	1.129	1.6	/
Body-Front (4mm)	2355	10	1RB	Off	22.25	22.50	1.059	0.031	0.033	1.6	/
	2355	10	50%RB	Off	22.14	22.50	1.086	0.024	0.026	1.6	/
Body-Back (4mm)	2355	10	1RB	Off	22.25	22.50	1.059	0.076	0.080	1.6	/
	2355	10	50%RB	Off	22.14	22.50	1.086	0.060	0.065	1.6	/
Body-Left (19mm)	2355	10	1RB	Off	22.25	22.50	1.059	0.106	0.112	1.6	/
	2355	10	50%RB	Off	22.14	22.50	1.086	0.086	0.093	1.6	/

LTE Band 41 :

EUT Position	Frequency (MHz)	Bandwidth (MHz)	RB	SENSOR	Max Power (dBm)		Scaled Factor	1g SAR (W/kg)			Plot
					Meas.	Rated		Meas.	Rated	Limit	
Body-Front (0mm)	2605	20	1RB	On	19.25	19.50	1.059	0.352	0.373	1.6	/
	2605	20	50%RB	On	19.20	19.50	1.072	0.295	0.316	1.6	/
Body-Back (0mm)	2605	20	1RB	On	19.25	19.50	1.059	0.090	0.095	1.6	/
	2605	20	50%RB	On	19.20	19.50	1.072	0.073	0.078	1.6	/
Body-Left (0mm)	2605	20	1RB	On	19.25	19.50	1.059	0.889	0.942	1.6	/
	2565	20	1RB	On	19.11	19.50	1.094	1.020	1.116	1.6	13#
	2580	20	1RB	On	19.19	19.50	1.074	0.994	1.068	1.6	/
	2645	20	1RB	On	19.07	19.50	1.104	0.756	0.835	1.6	/
	2605	20	50%RB	On	19.20	19.50	1.072	0.759	0.813	1.6	/
	2565	20	50%RB	On	19.14	19.50	1.086	0.885	0.961	1.6	/
	2580	20	50%RB	On	19.16	19.50	1.081	0.864	0.934	1.6	/
	2645	20	50%RB	On	19.10	19.50	1.096	0.662	0.726	1.6	/
	2605	20	100%RB	On	18.56	19.50	1.242	0.751	0.932	1.6	/
Body-Front (4mm)	2605	20	1RB	Off	22.30	22.50	1.047	0.186	0.195	1.6	/
	2605	20	50%RB	Off	22.15	22.50	1.084	0.118	0.128	1.6	/
Body-Back (4mm)	2605	20	1RB	Off	22.30	22.50	1.047	0.046	0.049	1.6	/
	2605	20	50%RB	Off	22.15	22.50	1.084	0.039	0.042	1.6	/
Body-Left (19mm)	2605	20	1RB	Off	22.30	22.50	1.047	0.068	0.071	1.6	/
	2605	20	50%RB	Off	22.15	22.50	1.084	0.053	0.057	1.6	/

WLAN 2.4G:

EUT Position	Frequency (MHz)	Test Mode	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			Plot
							Meas. SAR	Scaled SAR	Limit	
Body-Front (0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.133	0.135	1.6	/
Body-Back (0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.059	0.061	1.6	/
Body-Left (0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.011	0.011	1.6	/
Body-Right(0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.464	0.473	1.6	/
	2412	802.11b	Off	16.75	17.00	1.059	0.486	0.515	1.6	14#
	2437	802.11b	Off	16.58	17.00	1.102	0.461	0.508	1.6	/
Body-Top (0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.011	0.011	1.6	/
Body-Bottom (0mm)	2462	802.11b	Off	16.92	17.00	1.019	0.050	0.051	1.6	/

Bluetooth:

EUT Position	Frequency (MHz)	Test Mode	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/Kg)			Plot
						Meas.	Scaled SAR	Limit	
Body Front(0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.057	0.058	1.6	/
Body Back(0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.016	0.016	1.6	/
Body-Left (0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.018	0.018	1.6	/
Body-Right(0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.246	0.251	1.6	15#
	2402	DH51Mbps	8.95	10.00	1.274	0.160	0.204	1.6	/
	2480	DH51Mbps	9.29	10.00	1.178	0.193	0.227	1.6	/
Body-Top (0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.009	0.009	1.6	/
Body-Bottom (0mm)	2441	DH51Mbps	9.91	10.00	1.021	0.020	0.020	1.6	/

Note:

1. When the SAR Value is less than half of the limit, testing for other channels are optional.
2. When SAR or MPE is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance.
3. KDB 248227 D01-SAR measurement is not required for 2.4 GHz OFDM(801.11g/n) when the highest reported SAR for DSSS(802.11b) is ≤ 1.2 W/kg, and the output power for DSSS is not less than that for OFDM.

WLAN 5.2G:

EUT Position	Frequency (MHz)	Test Mode	Bandwidth (MHz)	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			Plot
								Meas. SAR	Scaled SAR	Limit	
Body Front (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.021	0.024	1.6	/
Body-Back (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.040	0.045	1.6	/
Body-Left (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.005	0.006	1.6	/
Body- Right (0mm)	5180	802.11a	20	On	8.68	9.00	1.076	0.988	1.064	1.6	/
	5200	802.11a	20	On	8.56	9.00	1.107	0.999	1.106	1.6	/
	5240	802.11a	20	On	8.39	9.00	1.151	1.040	1.197	1.6	16#
Body-Top (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.001	0.002	1.6	/
Body-Bottom (0mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.017	0.019	1.6	/
Body-Right (4mm)	5180	802.11a	20	Off	11.56	12.00	1.107	0.891	0.986	1.6	/

WLAN 5.8G:

EUT Position	Frequency (MHz)	Test Mode	Bandwidth (MHz)	SENSOR	Max. Meas. Power (dBm)	Max. Rated Power (dBm)	Scaled Factor	1g SAR (W/kg)			Plot
								Meas. SAR	Scaled SAR	Limit	
Body Front (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.030	0.031	1.6	/
Body-Back (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.051	0.053	1.6	/
Body-Left (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.004	0.004	1.6	/
Body-Right (0mm)	5825	802.11a	20	On	7.41	7.50	1.021	0.886	0.905	1.6	/
	5745	802.11a	20	On	7.26	7.50	1.057	0.957	1.011	1.6	17#
	5785	802.11a	20	On	7.18	7.50	1.076	0.909	0.979	1.6	/
Body-Top (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.004	0.004	1.6	/
Body-Bottom (0mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.007	0.007	1.6	/
Body-Right (4mm)	5825	802.11a	20	Off	13.30	13.50	1.047	0.752	0.787	1.6	/

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN + WLAN 2.4G	√	√
WWAN+ WLAN 5G	√	√
WWAN+ Bluetooth	√	X

Simultaneous Transmission Consideration Detail

Transmitter Combination	Position	Max SAR(W/kg)		Σ SAR< 1.6W/kg
		SAR1(WWAN)	SAR2(WLAN)	
WWAN + WLAN 2.4G	Body Front	0.630	0.135	0.765
	Body Back	0.325	0.061	0.386
	Body Left	1.416	0.011	1.427
	Body Right	0.210	0.515	0.725
	Body Top	0.068	0.011	0.079
	Body Bottom	0.077	0.050	0.127

Transmitter Combination	Position	Max SAR(W/kg)		Σ SAR< 1.6W/kg
		SAR1(WWAN)	SAR2(WLAN)	
WWAN+ Bluetooth	Body Front	0.630	0.058	0.688
	Body Back	0.325	0.016	0.341
	Body Left	1.416	0.018	1.434
	Body Right	0.210	0.251	0.461
	Body Top	0.068	0.009	0.077
	Body Bottom	0.077	0.020	0.097

Transmitter Combination	Position	Max SAR(W/kg)		Σ SAR< 1.6W/kg
		SAR1(WWAN)	SAR2(WLAN)	
WWAN+ WLAN 5G	Body Front	0.630	0.031	0.661
	Body Back	0.325	0.053	0.378
	Body Left	1.416	0.004	1.420
	Body Right	0.210	1.197	1.407
	Body Top	0.068	0.004	0.072
	Body Bottom	0.077	0.007	0.084

Conclusion:

Sum of SAR: Σ SAR $\leq$ 1.6 W/kg for 1g Body SAR , therefore simultaneous transmission SAR with Volume Scans is **not required**.

APPENDIX A SAR PLOTS OF SAR MEASUREMENT

Test Plot 1#_ GSM850_ GPRS 4 Tx slots_ Left Side_ 0mm_ Ch251


Communication System: UID 0, GSM850 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 849$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.044$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.05, 10.05, 10.05); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 18.32 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.58 W/kg
SAR(1 g) = 0.763 W/kg; SAR(10 g) = 0.443 W/kg
Maximum value of SAR (measured) = 1.17 W/kg

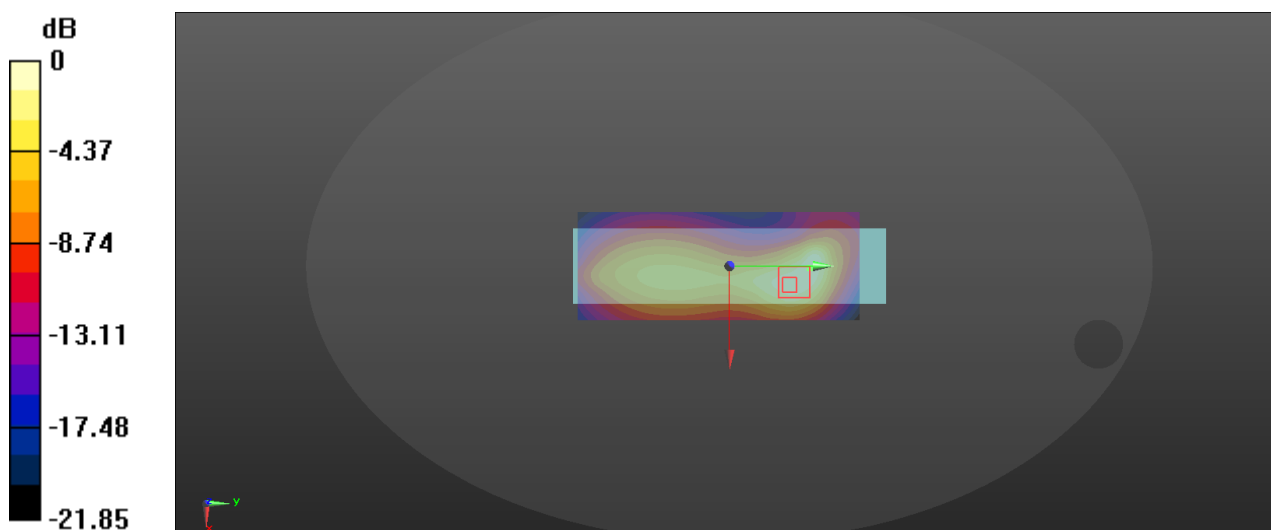

0 dB = 1.19 W/kg = 0.76 dBW/kg

Test Plot 2#_ GSM1900_GPRS 4 Tx slots_Left Side_0mm_Ch810

Communication System: UID 0, GSM 1900 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2
Medium parameters used: $f = 1910$ MHz; $\sigma = 1.453$ S/m; $\epsilon_r = 39.495$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.12, 8.12, 8.12); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.45 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 12.90 V/m; Power Drift = -0.20 dB

Peak SAR (extrapolated) = 2.78 W/kg

SAR(1 g) = 1.25 W/kg; SAR(10 g) = 0.592 W/kg

Maximum value of SAR (measured) = 2.00 W/kg

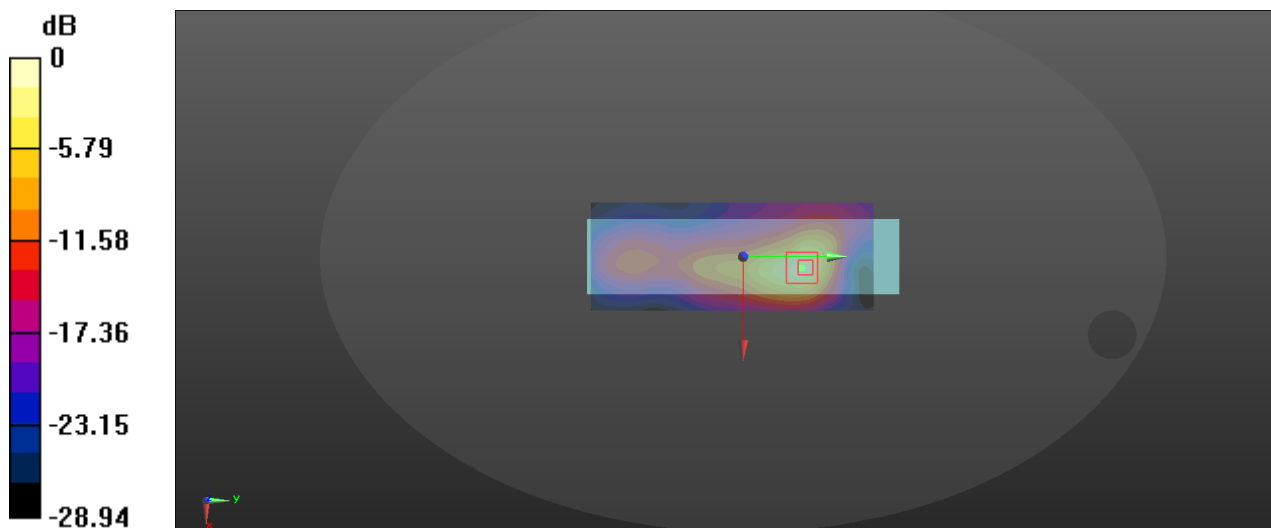

0 dB = 2.45 W/kg = 3.89 dBW/kg

Test plot 3# _WCDMA II_RMC 12.2Kbps_Left Side_0mm_Ch9538

Communication System: UID 0, WCDMA 3G (0); Frequency: 1907.6 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1908$ MHz; $\sigma = 1.451$ S/m; $\epsilon_r = 39.501$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(8.12, 8.12, 8.12); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.92 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.24 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.966 W/kg; SAR(10 g) = 0.446 W/kg

Maximum value of SAR (measured) = 1.73 W/kg

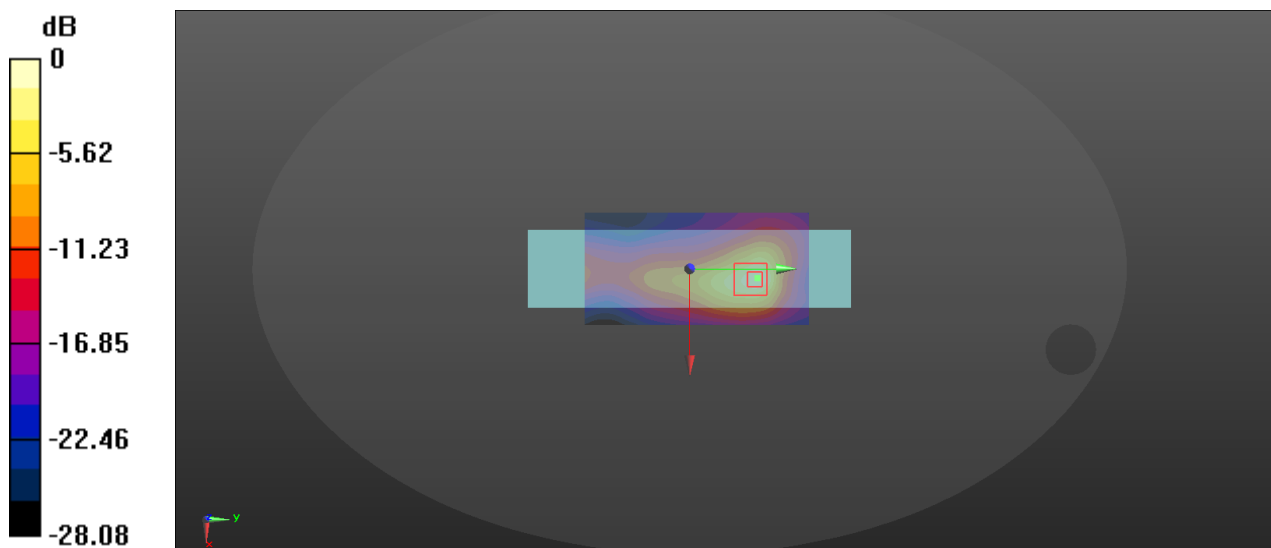

0 dB = 1.92 W/kg = 2.83 dBW/kg

Test plot 4# _WCDMA IV_RMC 12.2Kbps_Left Side_0mm_Ch1513

Communication System: UID 0, WCDMA 3G (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1753$ MHz; $\sigma = 1.366$ S/m; $\epsilon_r = 39.981$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.48, 8.48, 8.48); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.08 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.11 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 2.48 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.502 W/kg

Maximum value of SAR (measured) = 1.92 W/kg

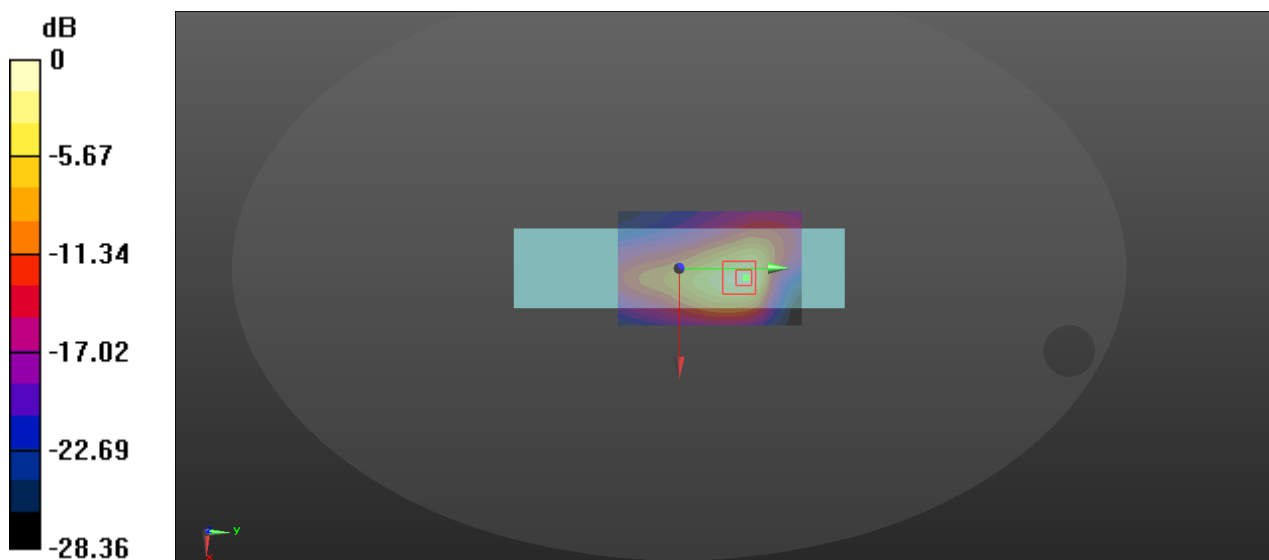

0 dB = 2.08 W/kg = 3.18 dBW/kg

Test plot 5#_ WCDMA V_RMC 12.2Kbps_Left Side_0mm_Ch4233

Communication System: UID 0, WCDMA 3G (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 847$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 42.082$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(10.05, 10.05, 10.05); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x101x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.27 W/kg


Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 20.73 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.99 W/kg

SAR(1 g) = 0.855 W/kg; SAR(10 g) = 0.466 W/kg

Maximum value of SAR (measured) = 1.41 W/kg

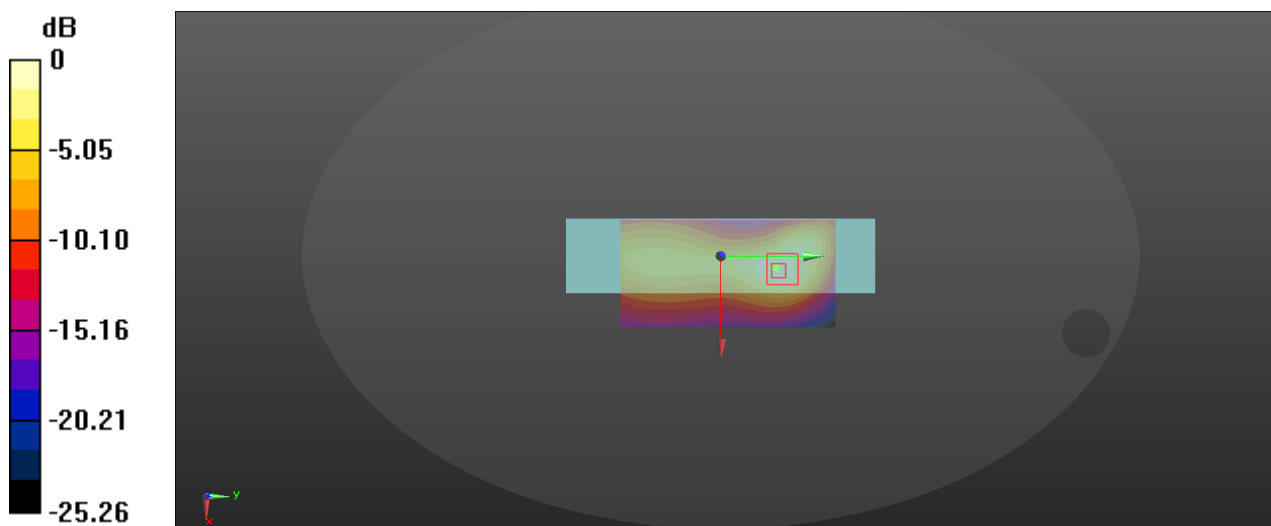

0 dB = 1.27 W/kg = 1.04 dBW/kg

Test plot 6#_LTE Band 7_20M_QPSK_1RB_Offset_Left Side_0mm_Ch20850

Communication System: UID 0, FDD LTE 4G (0); Frequency: 2510 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2510$ MHz; $\sigma = 1.943$ S/m; $\epsilon_r = 38.127$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.23, 7.23, 7.23); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (61x131x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.87 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.302 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.394 W/kg

Maximum value of SAR (measured) = 1.98 W/kg

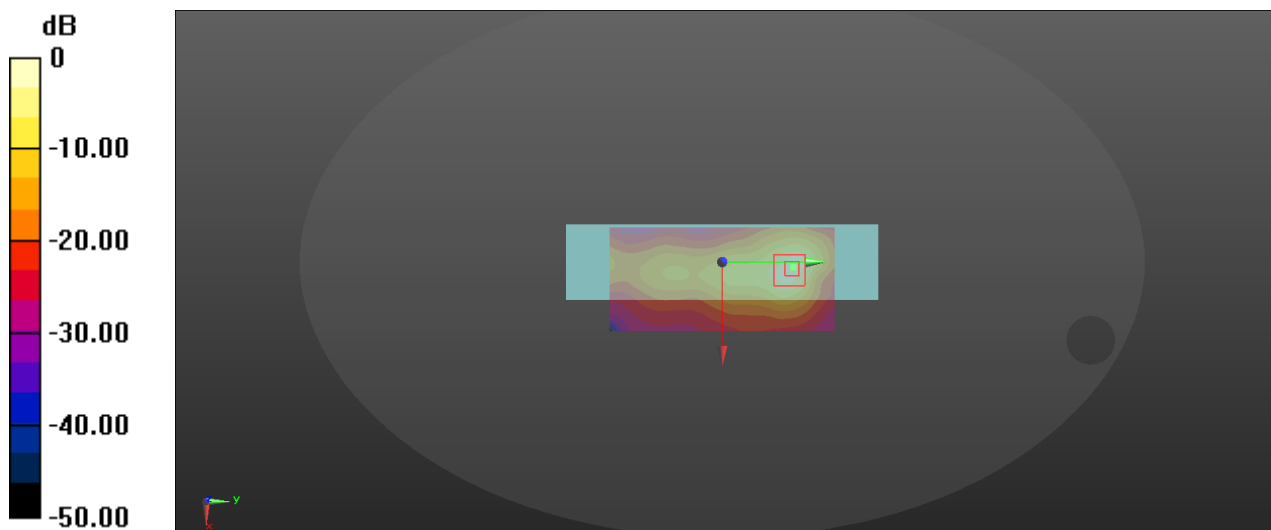

$$0 \text{ dB} = 1.87 \text{ W/kg} = 2.72 \text{ dBW/kg}$$

Test plot 7#_LTE Band 12_10M_QPSK_1RB_0offset_Left Side_0mm_Ch23060

Communication System: UID 0, FDD LTE 4G (0); Frequency: 704 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 704 \text{ MHz}$; $\sigma = 0.853 \text{ S/m}$; $\epsilon_r = 42.116$; $\rho = 1000 \text{ kg/m}^3$

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(10.39, 10.39, 10.39); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x101x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.30 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 17.36 V/m ; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.624 W/kg ; SAR(10 g) = 0.317 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

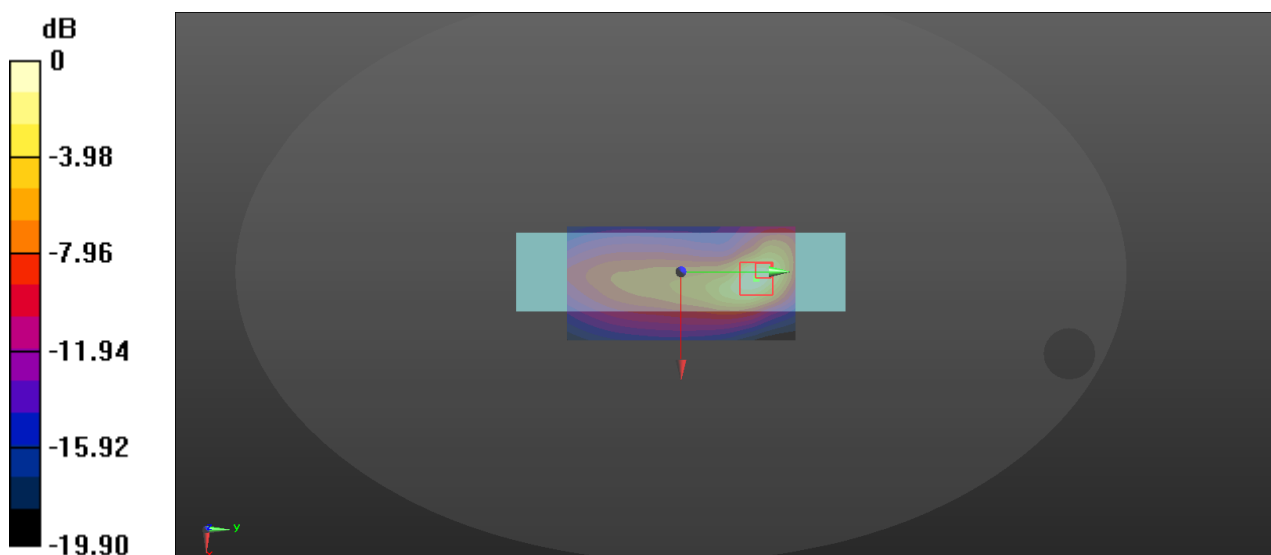

$$0 \text{ dB} = 1.30 \text{ W/kg} = 1.14 \text{ dBW/kg}$$

Test plot 8#_LTE Band 25_20M_QPSK_1RB_0offset_Left Side_0mm_Ch26140

Communication System: UID 0, FDD LTE 4G (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.399$ S/m; $\epsilon_r = 39.736$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(8.12, 8.12, 8.12); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x111x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 2.01 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 11.31 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 2.61 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.496 W/kg

Maximum value of SAR (measured) = 1.75 W/kg

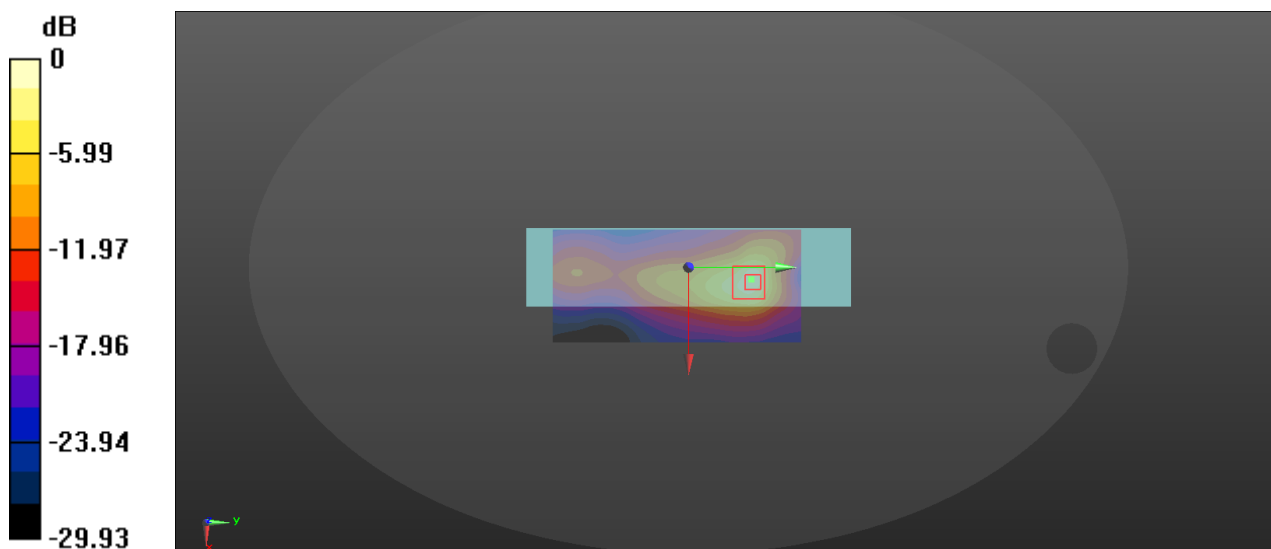

$$0 \text{ dB} = 2.01 \text{ W/kg} = 3.03 \text{ dBW/kg}$$

Test plot 9#_LTE Band 26_15M_QPSK_1RB_0offset_Left Side_0mm_Ch26765

Communication System: UID 0, FDD LTE 4G (0); Frequency: 821.5 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 821.5$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 42.377$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(10.05, 10.05, 10.05); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x101x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.22 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.02 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.629 W/kg; SAR(10 g) = 0.343 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

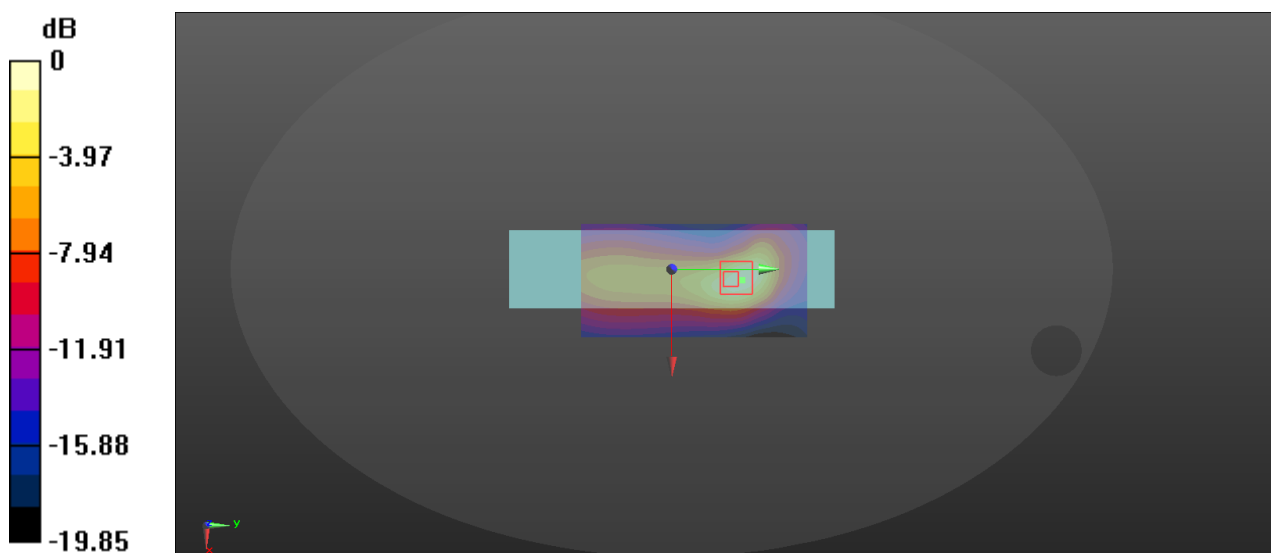

$$0 \text{ dB} = 1.22 \text{ W/kg} = 0.86 \text{ dBW/kg}$$

Test plot 10#_ LTE Band 66_20M_QPSK_1RB_0offset_Left Side_0mm_Ch132572

Communication System: UID 0, FDD LTE 4G (0); Frequency: 1770 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1770$ MHz; $\sigma = 1.383$ S/m; $\epsilon_r = 39.9$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(8.48, 8.48, 8.48); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x121x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 2.13 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.53 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.558 W/kg

Maximum value of SAR (measured) = 2.05 W/kg

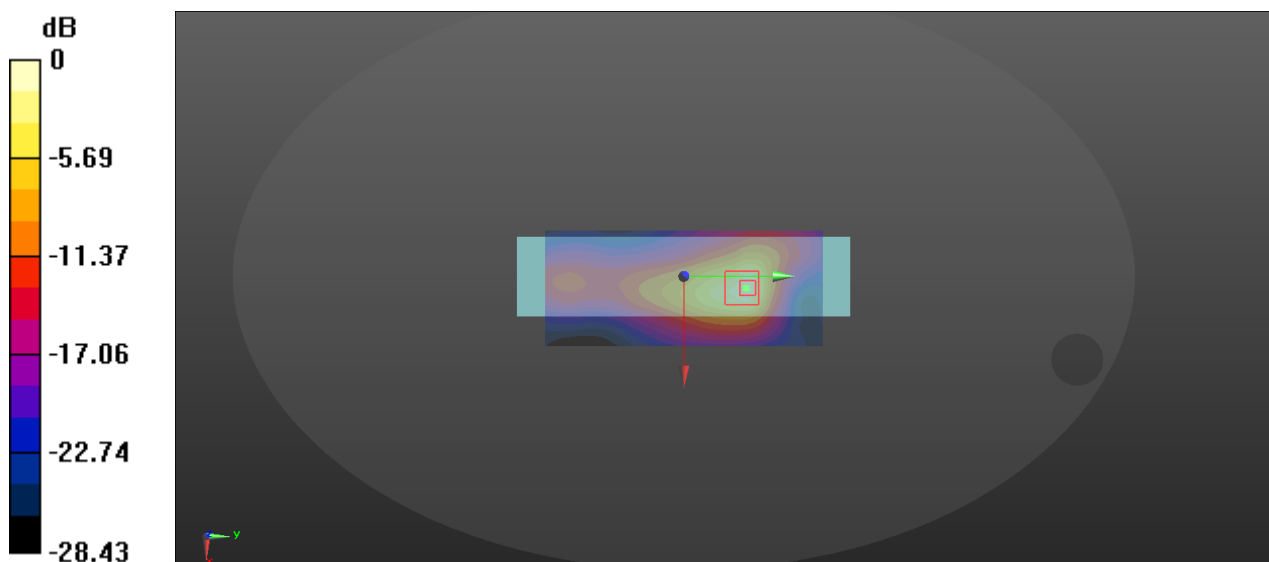

$$0 \text{ dB} = 2.13 \text{ W/kg} = 3.28 \text{ dBW/kg}$$

Test plot 11#_LTE Band 40_10M_QPSK_1RB_0offset_Left Side_0mm_Ch38750

Communication System: UID 0, TDD LTE 4G (0); Frequency: 2310 MHz;Duty Cycle: 1:1.59
Medium parameters used: $f = 2310$ MHz; $\sigma = 1.692$ S/m; $\epsilon_r = 38.67$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(7.6, 7.6, 7.6); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 2.96 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.139 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 2.83 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.384 W/kg

Maximum value of SAR (measured) = 1.96 W/kg

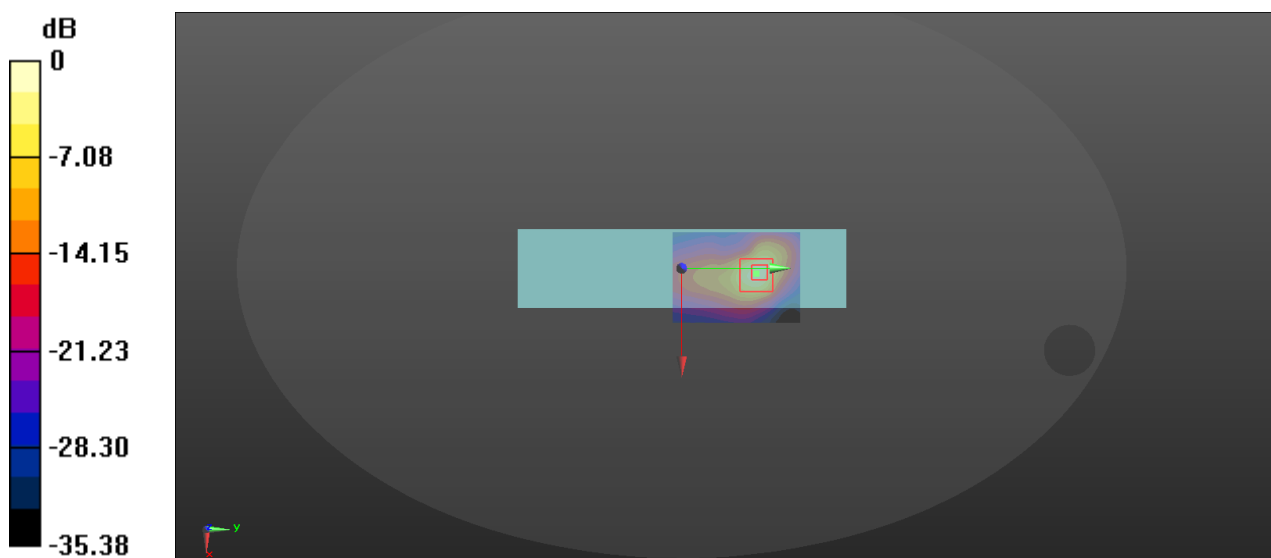

0 dB = 2.96 W/kg = 4.71 dBW/kg

Test plot 12#_LTE Band 40_10M_QPSK_1RB_0offset_Left Side_0mm_Ch39200

Communication System: UID 0, TDD LTE 4G (0); Frequency: 2355 MHz; Duty Cycle: 1:1.59
Medium parameters used: $f = 2355$ MHz; $\sigma = 1.744$ S/m; $\epsilon_r = 38.49$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.6, 7.6, 7.6); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (51x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.25 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.440 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.21 W/kg

SAR(1 g) = 1.23 W/kg; SAR(10 g) = 0.442 W/kg

Maximum value of SAR (measured) = 2.23 W/kg

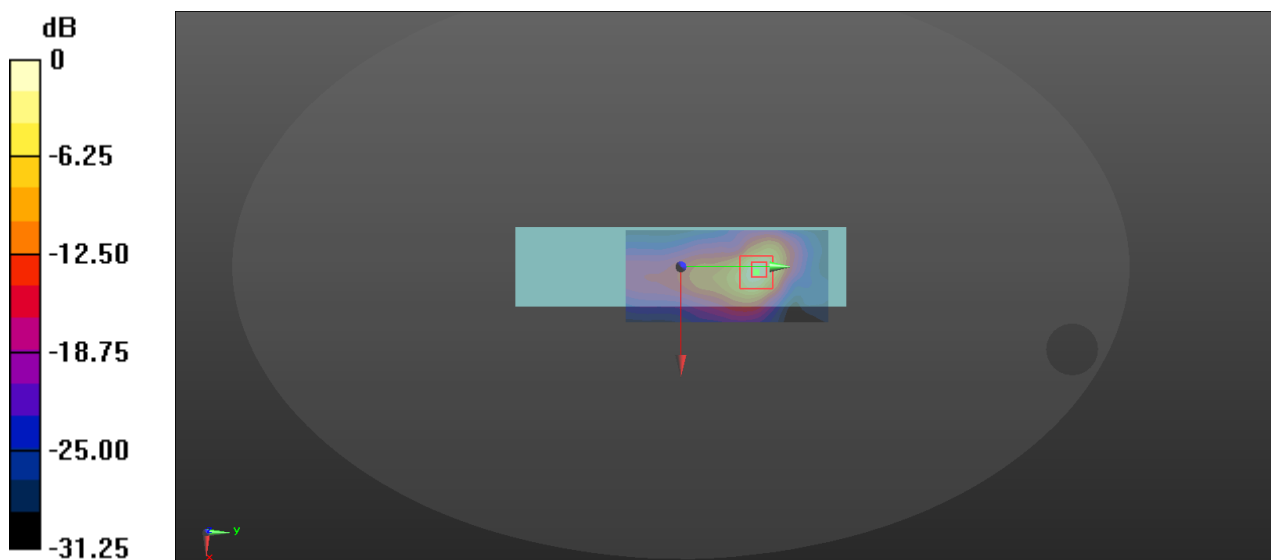

$$0 \text{ dB} = 2.25 \text{ W/kg} = 3.52 \text{ dBW/kg}$$

Test plot 13#__LTE Band 41_20M_QPSK_1RB_0offset_Left Side_0mm_Ch40340

Communication System: UID 0, TDD LTE 4G (0); Frequency: 2565 MHz;Duty Cycle: 1:1.59
Medium parameters used: $f = 2565$ MHz; $\sigma = 2.007$ S/m; $\epsilon_r = 37.89$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(7.13, 7.13, 7.13); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (61x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.65 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.06 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 2.41 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 1.81 W/kg

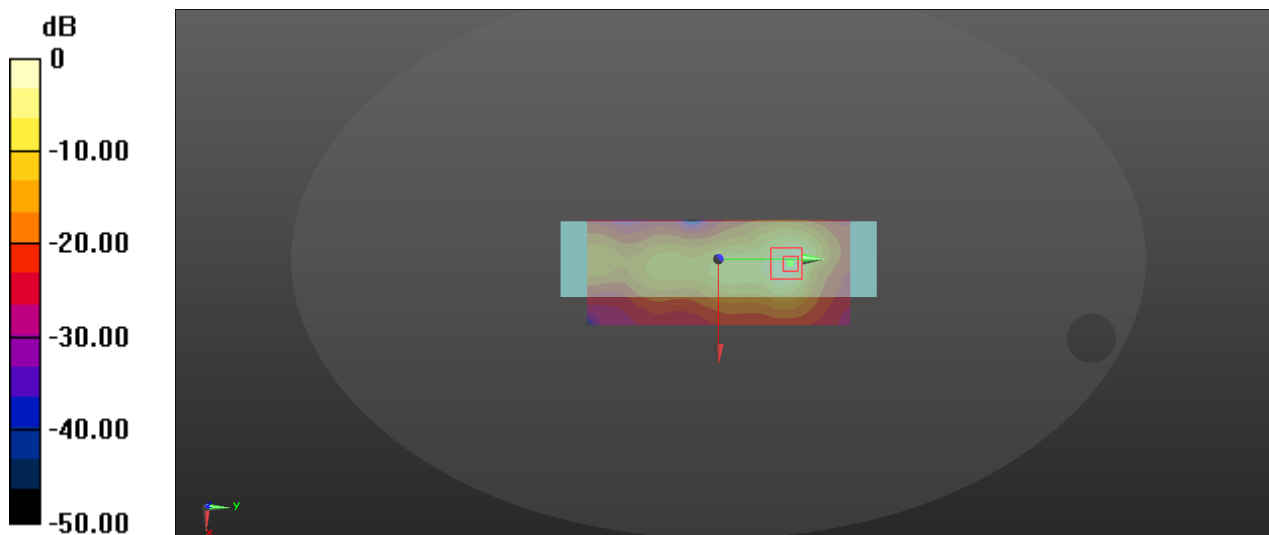

0 dB = 1.65 W/kg = 2.17 dBW/kg

Test plot 14#_WLAN 2.4GHz_802.11g 6Mbps_Right Side_0mm_Ch1

Communication System: UID 0, WIFI2.4G (0); Frequency: 2412 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2412$ MHz; $\sigma = 1.828$ S/m; $\epsilon_r = 38.957$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(7.23, 7.23, 7.23); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (61x111x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.873 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.12 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.486 W/kg; SAR(10 g) = 0.228 W/kg

Maximum value of SAR (measured) = 0.817 W/kg

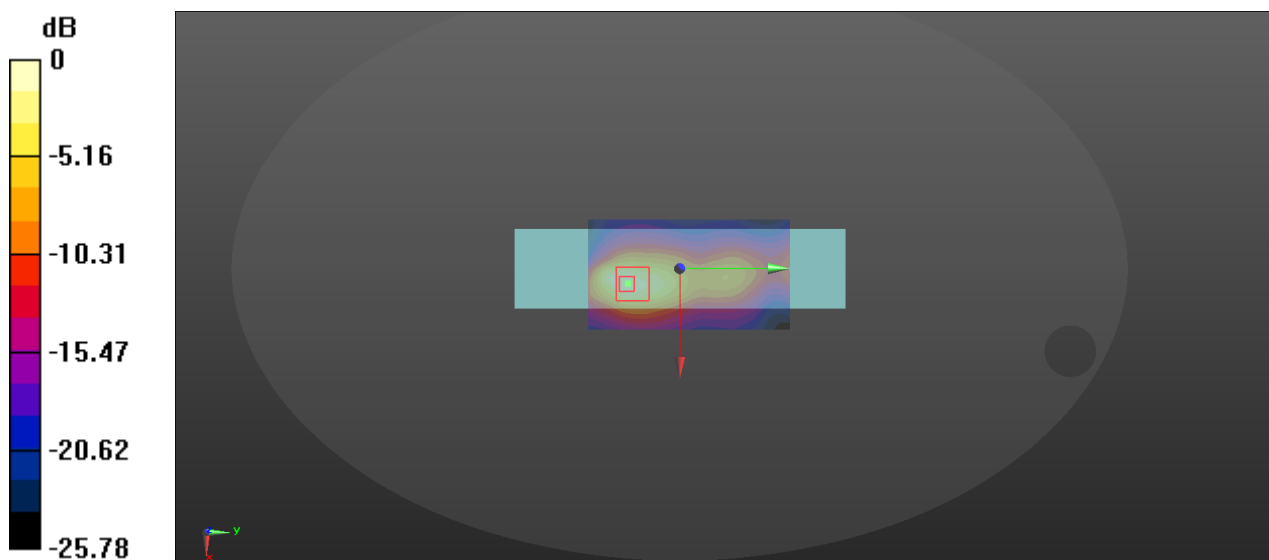

0 dB = 0.873 W/kg = -0.59 dBW/kg

Test plot 15#_BT_DH5 1Mbps_Right Side_0mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2441$ MHz; $\sigma = 1.862$ S/m; $\epsilon_r = 38.833$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(7.23, 7.23, 7.23); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (71x151x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.475 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 6.092 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.246 W/kg; SAR(10 g) = 0.112 W/kg

Maximum value of SAR (measured) = 0.427 W/kg

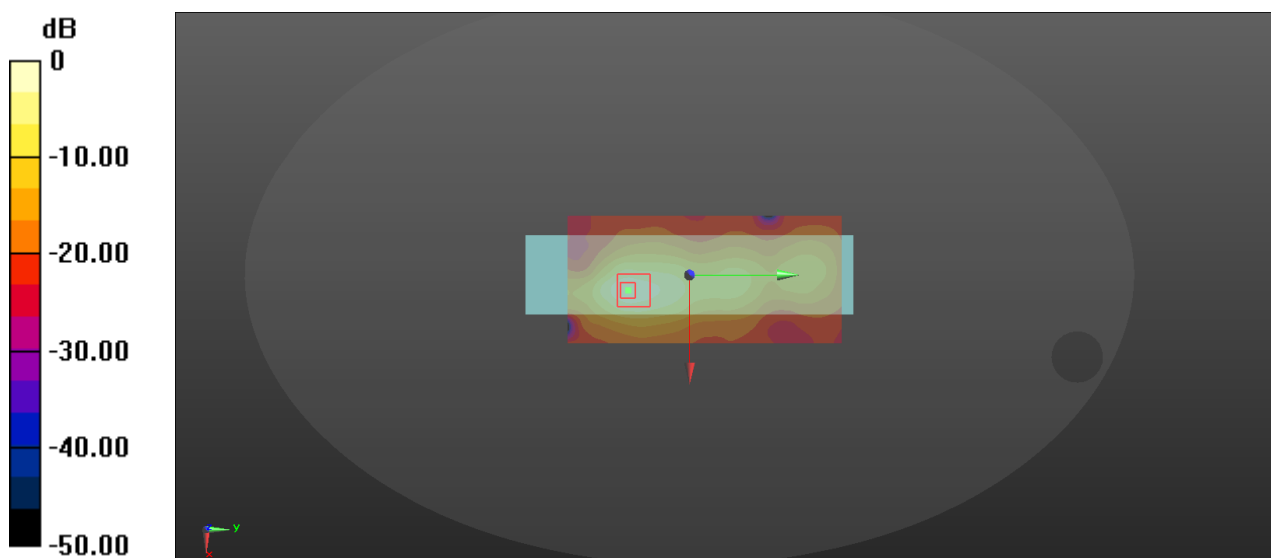

$$0 \text{ dB} = 0.475 \text{ W/kg} = -3.23 \text{ dBW/kg}$$

Test plot 16#_WLAN 5.2GHz_802.11a 6Mbps_Right Side_0mm_Ch48

Communication System: UID 0, WIFI 5G (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 5240$ MHz; $\sigma = 4.837$ S/m; $\epsilon_r = 36.995$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557;ConvF(5.38, 5.38, 5.38); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 2.24 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.8940 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 5.30 W/kg

SAR(1 g) = 1.04 W/kg; SAR(10 g) = 0.215 W/kg

Maximum value of SAR (measured) = 2.83 W/kg

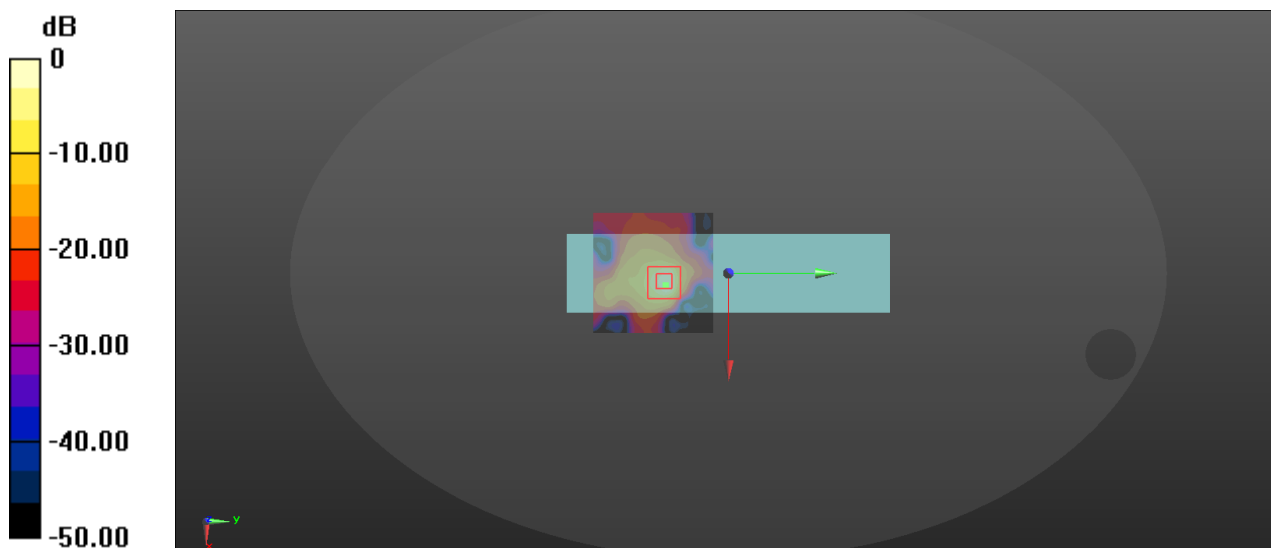

$$0 \text{ dB} = 2.24 \text{ W/kg} = 3.50 \text{ dBW/kg}$$

Test plot 17#_WLAN 5.8GHz_802.11a 6Mbps_Right Side_0mm_Ch149

Communication System: UID 0, WIFI 5G (0); Frequency: 5745 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5745$ MHz; $\sigma = 5.371$ S/m; $\epsilon_r = 36.237$; $\rho = 1000$ kg/m³

DASY5 Configuration:

- Probe: EX3DV4 - SN7557; ConvF(4.73, 4.73, 4.73); Calibrated: 11/5/2020,
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn527; Calibrated: 7/9/2020
- Phantom: ELI V8.0; Type: QD OVA 004 Ax; Serial: 2095
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7437)

Area Scan (81x81x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
Maximum value of SAR (interpolated) = 1.84 W/kg


Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 0.2970 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 4.91 W/kg

SAR(1 g) = 0.957 W/kg; SAR(10 g) = 0.207 W/kg

Maximum value of SAR (measured) = 2.67 W/kg

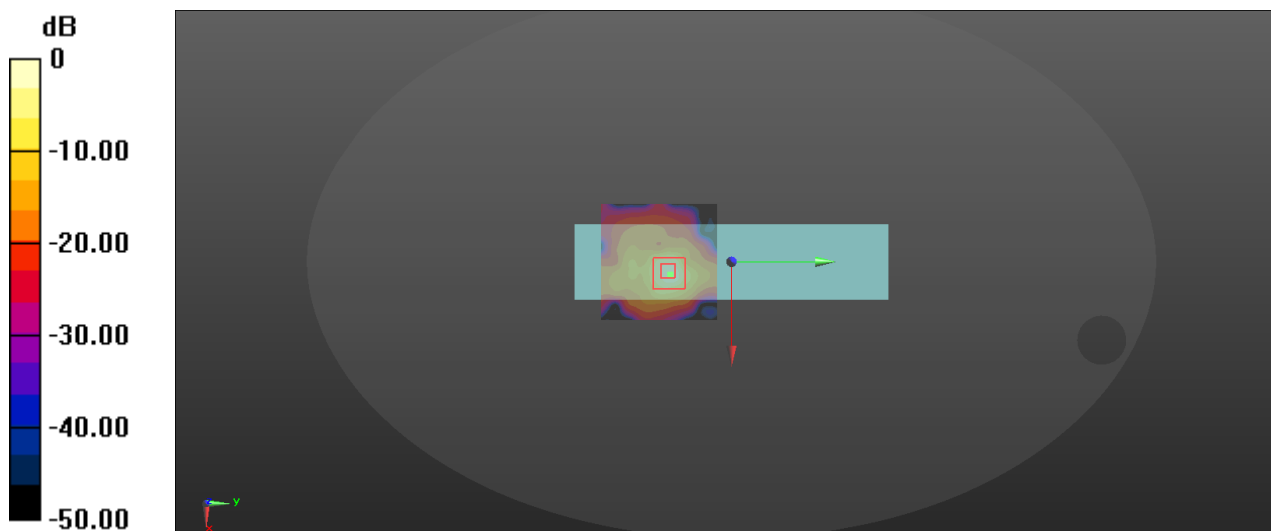

0 dB = 1.84 W/kg = 2.65 dBW/kg

APPENDIX B MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the measurement system and is given in the following Table.

Measurement uncertainty evaluation for IEEE1528-2013 SAR test

Source of uncertainty	Tolerance/ uncertainty ± %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty ± %, (1 g)	Standard uncertainty ± %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Device holder uncertainty	6.3	N	1	1	1	6.3	6.3
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Liquid conductivity target)	5.0	R	$\sqrt{3}$	0.64	0.43	1.8	1.2
Liquid conductivity meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity target)	5.0	R	$\sqrt{3}$	0.6	0.49	1.7	1.4
Liquid permittivity meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Combined standard uncertainty		RSS				12.2	12.0
Expanded uncertainty 95 % confidence interval)						24.3	23.9

Measurement uncertainty evaluation for IEC62209-2 SAR test

Source of uncertainty	Tolerance/ uncertainty $\pm$ %	Probability distribution	Divisor	ci (1 g)	ci (10 g)	Standard uncertainty $\pm$ %, (1 g)	Standard uncertainty $\pm$ %, (10 g)
Measurement system							
Probe calibration	6.55	N	1	1	1	6.6	6.6
Axial Isotropy	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Hemispherical Isotropy	9.6	R	$\sqrt{3}$	0	0	0.0	0.0
Linearity	4.7	R	$\sqrt{3}$	1	1	2.7	2.7
Modulation Response	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Detection limits	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Boundary effect	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Readout electronics	0.3	N	1	1	1	0.3	0.3
Response time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
Integration time	0.0	R	$\sqrt{3}$	1	1	0.0	0.0
RF ambient conditions – noise	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
RF ambient conditions–reflections	1.0	R	$\sqrt{3}$	1	1	0.6	0.6
Probe positioner mech. Restrictions	0.8	R	$\sqrt{3}$	1	1	0.5	0.5
Probe positioning with respect to phantom shell	6.7	R	$\sqrt{3}$	1	1	3.9	3.9
Post-processing	2.0	R	$\sqrt{3}$	1	1	1.2	1.2
Test sample related							
Device holder Uncertainty	6.3	N	1	1	1	6.3	6.3
Test sample positioning	2.8	N	1	1	1	2.8	2.8
Power scaling	4.5	R	$\sqrt{3}$	1	1	2.6	2.6
Drift of output power	5.0	R	$\sqrt{3}$	1	1	2.9	2.9
Phantom and set-up							
Phantom uncertainty (shape and thickness tolerances)	4.0	R	$\sqrt{3}$	1	1	2.3	2.3
Algorithm for correcting SAR for deviations in permittivity and conductivity	1.9	N	1	1	0.84	1.1	0.9
Liquid conductivity (meas.)	2.5	N	1	0.64	0.43	1.6	1.1
Liquid permittivity (meas.)	2.5	N	1	0.6	0.49	1.5	1.2
Temp. unc. - Conductivity	1.7	R	$\sqrt{3}$	0.78	0.71	0.8	0.7
Temp. unc. - Permittivity	0.3	R	$\sqrt{3}$	0.23	0.26	0.0	0.0
Combined standard uncertainty		RSS				12.2	12.1
Expanded uncertainty 95 % confidence interval)						24.5	24.2

APPENDIX C EUT TEST POSITION PHOTOS

Please Refer to the Attachment.

APPENDIX D CALIBRATION CERTIFICATES

Please Refer to the Attachment.

Declarations

- 1: BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.
- 2: Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.
- 3: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.
- 4: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.
- 5: This report cannot be reproduced except in full, without prior written approval of the Company.
- 6: This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

******* END OF REPORT *******