

## **FCC SAR TEST REPORT**

**Application No.:** SUCR2503000151AT  
**Applicant:** Shanghai Sunmi Technology Co.,Ltd.  
**Manufacturer:** Shanghai Sunmi Technology Co.,Ltd.  
**Product Name:** Smart POS System  
**Model No.(EUT):** T670A  
**Trade Mark:** SUNMI  
**FCC ID:** 2AH25T670A  
**Standards:** FCC 47CFR §2.1093  
**Date of Receipt:** 2025-03-06  
**Date of Test:** 2025-03-20 to 2025-04-07  
**Date of Issue:** 2025-04-28  
**Test conclusion:** **PASS \***

\* In the configuration tested, the EUT detailed in this report complied with the standards specified above.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Docment>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)**

**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250300015101  
Rev.: 01  
Page: 2 of 89

<b>Revision Record</b>			
<b>Version</b>	<b>Description</b>	<b>Date</b>	<b>Remark</b>
01	Original	2025/04/28	/

<b>Authorized for issue by:</b>	
<b>Prepared By</b>	 Leon Liu
	<b>Leon Liu/ Project Manager</b>
<b>Approved By</b>	
	 Nick Hu
<b>Nick Hu/ Technical Manager</b>	

**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250300015101

Rev.: 01

Page: 3 of 89

**TEST SUMMARY**

<b>Frequency Band</b>	<b>Maximum Reported SAR(W/kg)</b>
	<b>Body</b>
GSM850	1.00
GSM1900	<b>1.19</b>
WCDMA Band II	1.04
WCDMA Band IV	1.17
WCDMA Band V	1.06
LTE Band 7	<b>1.19</b>
LTE Band 12(17)	1.07
LTE Band 13	1.07
LTE Band 14	1.16
LTE Band 25(2)	1.16
LTE Band 26(5)	1.18
LTE Band 30	1.12
LTE Band 40	1.16
LTE Band 41(38)	1.09
LTE Band 66(4)	1.18
LTE Band 71	0.95
WI-FI (2.4GHz)	0.99
WI-FI (5GHz)	<b>1.19</b>
BT	0.31
NFC	0.01
SAR Limited(W/kg)	1.6
Maximum Simultaneous Transmission SAR (W/kg)	
Scenario	Body
Sum SAR	1.59
SPLSR	/
SPLSR Limited	0.04

Note: The Simultaneous transmission SAR is the same test position of the WWAN Antenna + WiFi/BT Antenna.

According to TCB workshop October,2014 RF Exposure Procedures Update (Overlapping Bands): SAR for LTE Band 2 (Frequency range:1850 - 1910 MHz)/LTE Band 4 (Frequency range:1710 - 1755 MHz)/LTE Band 5 (Frequency range:824 - 849 MHz)/ LTE band 17 (frequency range: 704-716 MHz)/LTE Band 38 (Frequency range:2570 - 2620 MHz) is respectively covered by LTE Band 25 (Frequency range:1850 - 1915 MHz)/LTE Band66 (Frequency range:1710 - 1780 MHz)/LTE Band26 (Frequency range:814 - 849 MHz)/LTE band 12 (frequency range: 699-716 MHz)/LTE Band41 (Frequency range:2496 - 2690 MHz) due to similar frequency range, same maximum tune up limit and same channel bandwidth. Because the frequency range is similar, the maximum tuning limit is the same, and the channel bandwidth and other operating parameters for the smaller band is fully supported by the larger band.

## CONTENTS

<b>1 General Information</b> .....	<b>6</b>
1.1 Details of Client.....	6
1.2 Test Location.....	6
1.3 Test Facility .....	6
1.4 General Description of EUT .....	7
1.4.1 DUT Antenna Locations (Back View).....	9
1.4.2 EUT side for SAR Testing .....	10
1.5 Test Specification.....	11
1.6 RF exposure limits .....	12
1.6.1 Power reduction specification .....	13
<b>2 Laboratory Environment</b> .....	<b>14</b>
<b>3 SAR Measurements System Configuration</b> .....	<b>15</b>
3.1 The SAR Measurement System.....	15
3.2 Isotropic E-field Probe EX3DV4 .....	17
3.3 Data Acquisition Electronics (DAE).....	18
3.4 SAM Twin Phantom .....	18
3.5 ELI Phantom .....	19
3.6 Device Holder for Transmitters .....	20
3.7 Measurement procedure .....	21
3.7.1 Scanning procedure .....	21
3.7.2 Data Storage .....	23
3.7.3 Data Evaluation by SEMCAD .....	23
<b>4 SAR measurement variability and uncertainty</b> .....	<b>25</b>
4.1 SAR measurement variability .....	25
4.2 SAR measurement uncertainty .....	25
<b>5 Description of Test Position</b> .....	<b>26</b>
5.1 Exposure Condition.....	26
5.1.1 The Body Test Position .....	26
5.2 Proximity Sensor Triggering Test.....	27
<b>6 SAR System Verification Procedure</b> .....	<b>41</b>
6.1 Tissue Simulate Liquid .....	41
6.1.1 Recipes for Tissue Simulate Liquid .....	41
6.1.2 Measurement for Tissue Simulate Liquid.....	42
6.2 SAR System Check.....	43
6.2.1 Justification for Extended SAR Dipole Calibrations .....	44
6.2.2 Summary System Check Result(s) .....	45
6.2.3 Detailed System Check Results.....	45
<b>7 Test Configuration</b> .....	<b>46</b>
7.1 3G SAR Test Reduction Procedure .....	46
7.2 Operation Configurations .....	46
7.2.1 GSM Test Configuration.....	46
7.2.2 WCDMA Test Configuration.....	47
7.2.3 WiFi Test Configuration.....	52
7.2.4 Duty cycle.....	52
7.2.5 LTE Test Configuration .....	58
<b>8 Test Result</b> .....	<b>61</b>

8.1 Measurement of RF Conducted Power.....	61
8.2 Measurement of SAR Data .....	63
8.2.1 SAR Result of GSM850 .....	64
8.2.2 SAR Result of GSM1900 .....	65
8.2.3 SAR Result of WCDMA Band II .....	66
8.2.4 SAR Result of WCDMA Band IV .....	67
8.2.5 SAR Result of WCDMA Band V .....	68
8.2.6 SAR Result of LTE Band 7.....	69
8.2.7 SAR Result of LTE Band 12.....	70
8.2.8 SAR Result of LTE Band 13.....	71
8.2.9 SAR Result of LTE Band 14.....	72
8.2.10 SAR Result of LTE Band 25.....	73
8.2.11 SAR Result of LTE Band 26.....	74
8.2.12 SAR Result of LTE Band 30.....	75
8.2.13 SAR Result of LTE Band 40.....	76
8.2.14 SAR Result of LTE Band 41.....	77
8.2.15 SAR Result of LTE Band 66.....	78
8.2.16 SAR Result of LTE Band 71.....	79
8.2.17 SAR Result of WIFI 2.4G .....	80
8.2.18 SAR Result of WIFI 5G .....	81
8.2.19 SAR Result of BT .....	83
8.2.20 SAR Result of NFC .....	84
8.3 Multiple Transmitter Evaluation.....	85
8.3.1 Simultaneous SAR test evaluation.....	85
8.3.2 Simultaneous Transmission SAR Summation Scenario .....	86
<b>9 Equipment list .....</b>	<b>88</b>
<b>10 Calibration certificate .....</b>	<b>89</b>
<b>11 Photographs.....</b>	<b>89</b>
<b>Appendix A: Detailed System Check Results .....</b>	<b>89</b>
<b>Appendix B: Detailed Test Results .....</b>	<b>89</b>
<b>Appendix C: Calibration certificate .....</b>	<b>89</b>
<b>Appendix D: Photographs.....</b>	<b>89</b>
<b>Appendix E: Conducted RF Output Power .....</b>	<b>89</b>

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 6 of 89

## 1 General Information

### 1.1 Details of Client

Applicant:	Shanghai Sunmi Technology Co.,Ltd.
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China
Manufacturer:	Shanghai Sunmi Technology Co.,Ltd.
Address:	Room 505,No.388,Song Hu Road,Yang Pu District,Shanghai,China

### 1.2 Test Location

Company:	SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.
Address:	South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone
Post code:	215000
Test Engineer:	Zhang Alan; Liu Leon-I

### 1.3 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **A2LA (Certificate No. 6336.01)**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 6336.01.

- **Innovation, Science and Economic Development Canada**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0120.

IC#: 27594.

- **FCC –Designation Number: CN1312**

SGS-CSTC STANDARDS TECHNICAL SERVICES (SUZHOU) CO., LTD. has been recognized as an accredited testing laboratory.

Designation Number: CN1312.

Test Firm Registration Number: 0031225543

**1.4 General Description of EUT**

Device Type :	portable device				
Exposure Category:	uncontrolled environment / general population				
Product Name:	Smart POS System				
Model No.(EUT):	T670A				
Trade Mark:	SUNMI				
Product Phase:	Production Unit				
Hardware Version:	V1.1				
Software Version:	4.1.0				
IMEI:	863864070010298				
Antenna Type:	Internal Antenna				
Device Operating Configurations :					
Modulation Mode:	<b>GSM:</b> GMSK, 8PSK; <b>WCDMA:</b> QPSK, 16QAM; <b>LTE:</b> QPSK,16QAM; <b>WIFI:</b> DSSS, OFDM; <b>BT:</b> GFSK, π/4DQPSK,8DPSK <b>NFC:</b> ASK				
Device Class:	B				
GPRS Multi-slots Class:	12	EGPRS Multi-slots Class:	12		
HSDPA UE Category:	24	HSUPA UE Category	7		
DC-HSDPA UE Category:	24				
Power Class	4, tested with power level 5(GSM850)				
	1, tested with power level 0(GSM1900)				
	3, tested with power control "all 1"(WCDMA Band)				
	3, tested with power control Max Power(LTE Band)				
Frequency Bands:	Band	Tx (MHz)	Rx (MHz)		
	GSM850	824 - 849	869 - 894		
	GSM1900	1850 - 1910	1930 - 1990		
	WCDMA Band II	1850 - 1910	1930 - 1990		
	WCDMA Band IV	1710 - 1755	2110 - 2155		
	WCDMA Band V	824 - 849	869 - 894		
	LTE Band 2	1850 - 1910	1930 - 1990		
	LTE Band 4	1710 - 1755	2110 - 2155		
	LTE Band 5	824 - 849	869 - 894		
	LTE Band 7	2500 - 2570	2620 - 2690		
	LTE Band 12	699 - 716	729 - 746		
	LTE Band 13	777 - 787	746 - 756		
	LTE Band 14	788 - 798	758 - 768		
	LTE Band 17	704 - 716	734 - 746		
	LTE Band 25	1850 - 1915	1930 - 1995		
	LTE Band 26	814 - 849	859 - 894		
	LTE Band 30	2305 - 2315	2350 - 2360		
	LTE Band 66	1710 - 1780	2110 - 2200		
	LTE Band 71	663-698	617- 652		
	LTE Band 38	2570 - 2620	2570 - 2620		
	LTE Band 40	2300 - 2400	2300 - 2400		
	LTE Band 41	2496 - 2690	2496 - 2690		
	Bluetooth	2400 - 2483.5	2400 - 2483.5		
	Wi-Fi 2.4G	2412 - 2462	2412 - 2462		
	Wi-Fi 5G	5150 - 5250	5150 - 5250		


# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 8 of 89

		5250 - 5350	5250 - 5350
		5470 - 5725	5470 - 5725
		5725 - 5850	5725 - 5850
	NFC	13.56MHz	13.56MHz
RF Cable:	<input checked="" type="checkbox"/> Provided by the applicant <input type="checkbox"/> Provided by the laboratory		
Battery Information:	Model:	FHPL 1ICP3/93/99-2	
	Normal Voltage:	3.87V	
	Rated capacity:	8000mAh	
	Manufacturer:	Guangdong Fenghua New Energy Co.,Ltd.	
<p>Note: *Since the above data and/or information is provided by the client relevant results or conclusions of this report are only made for these data and/or information, SGS is not responsible for the authenticity, integrity and results of the data and information and/or the validity of the conclusion.</p> <p>As above information is provided and confirmed by the applicant. SGS is not liable to the accuracy, suitability, reliability or/and integrity of the information.</p>			

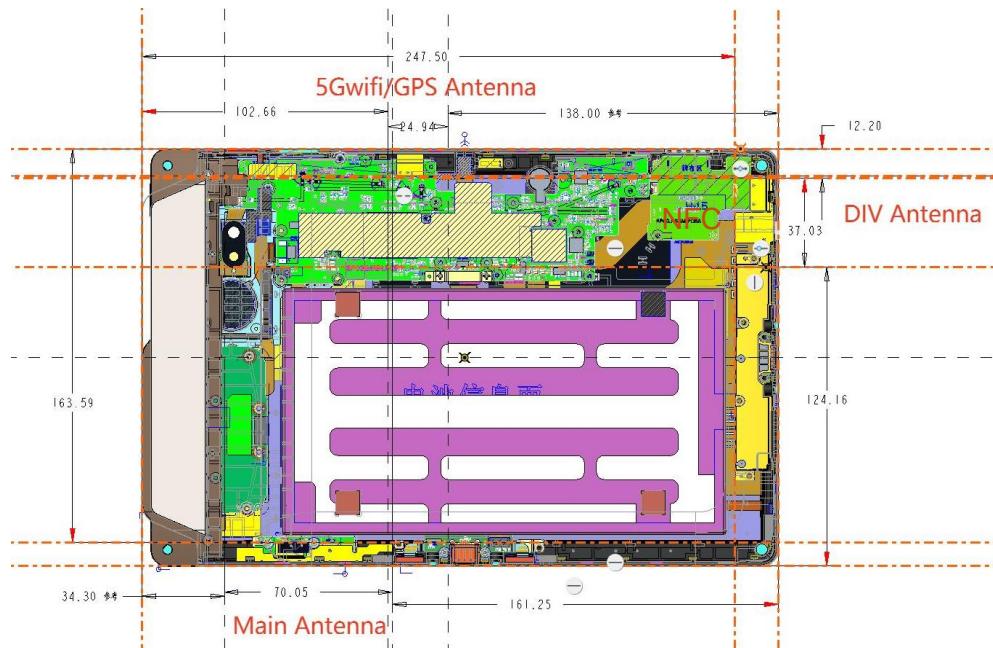**1.4.1 DUT Antenna Locations (Back View)**

Ant	Band:
Ant0	GSM850/1900 WCDMA: B2/4/5 LTE: B2/4/5/7/12/13/14/17/25/26/30/66/71/38/40/41
Ant2	WIFI2.4G WIFI5G Bluetooth
Ant3	NFC

### 1.4.2 EUT side for SAR Testing

- **Stand-alone SAR test evaluation**

1) Per FCC KDB 447498 D04, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances  $\leq$  50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where:}$

- $f(\text{GHz})$  is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

When the minimum test separation distance is  $<$  5 mm, a distance of 5 mm is applied to determine SAR test exclusion.

2) At 100 MHz to 6 GHz and for test separation distances  $>$  50 mm, the SAR test exclusion threshold is determined according to the following:

- [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm)  $\cdot$  ( $f(\text{MHz})/150$ )] mW, at 100 MHz to 1500 MHz
- [Power allowed at numeric threshold for 50 mm in step 1) + (test separation distance - 50 mm)  $\cdot$  10] mW at  $>$  1500 MHz and  $\leq$  6 GHz

Exposure Position	Wireless Interface	GPRS 850	GPRS 1900	WCDMA Band V	WCDMA Band IV	WCDMA Band II	LTE Band 71	LTE Band 12	LTE Band 13	LTE Band 14	LTE Band 17	LTE Band 5	LTE Band 26	LTE Band 4	LTE Band 66	LTE Band 2	LTE Band 25	LTE Band 30	LTE Band 7	LTE Band 38	LTE Band 40	LTE Band 41	BT ANT3	WIFI 2.4G ANT3	WIFI 5.2G ANT3	WIFI 5.3G ANT3	WIFI 5.5G ANT3	WIFI 5.8G ANT3
		Calculated Frequency (MHz)	848	1909	846	1750	1907	695	715	784	795	713	848	848	1754	1779	1909	1914	2312	2567	2617	2300	2687	2480	2462	5200	5300	5500
	Maximum power (dBm)	30	27	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	24.00	8	19	20	20	20
	Maximum rated power(mW)	1000.0	501.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	251.0	6.0	79.0	100.0	100.0	100.0
Back side	Separation distance(mm)	5.0																				5.0		5.0	5.0	5.0	5.0	
	exclusion threshold	9.0	3.4	9.1	3.6	3.4	12.0	11.5	10.1	9.9	11.5	9.0	9.0	3.6	3.5	3.4	3.3	2.9	2.6	2.6	2.9	2.5	2.7	2.7	1.5	1.5	1.4	1.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Left side	Separation distance(mm)	161.0																				138.0		138.0	138.0	138.0	138.0	
	exclusion threshold	1270.2	2049.4	1267.6	2057.8	2049.5	1070.7	1097.1	1187.4	1201.7	1094.5	1270.2	1270.2	2057.6	2056.3	2049.4	2049.2	2031.0	2021.0	2019.2	2031.5	2016.7	1509.3	1510.1	1421.8	1419.7	1415.4	1408.9
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No
Right side	Separation distance(mm)	34.3																				103.0		103.0	103.0	103.0	103.0	
	exclusion threshold	140.5	117.7	140.5	121.7	117.7	144.7	144.1	142.1	141.8	144.1	140.5	140.5	121.5	120.9	117.7	117.6	109.3	105.1	104.3	109.6	103.2	864.5	865.4	777.0	774.9	770.8	764.4
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No	No
Top side	Separation distance(mm)	164.0																				5.0		5.0	5.0	5.0	5.0	
	exclusion threshold	1304.0	2120.6	1301.4	2128.5	2120.7	1096.6	1124.0	1217.9	1232.8	1121.3	1304.0	1304.0	2128.3	2127.0	2120.6	2120.3	2103.1	2093.7	2101.9	2103.6	2089.6	2.7	2.7	1.5	1.5	1.4	1.4
	Testing required?	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Bottom side	Separation distance(mm)	5.0																				164.0		164.0	164.0	164.0	164.0	
	exclusion threshold	9.0	3.4	9.1	3.6	3.4	12.0	11.5	10.1	9.9	11.5	9.0	9.0	3.6	3.5	3.4	3.3	2.9	2.6	2.6	2.9	2.5	2096.8	2097.4	2030.9	2029.3	2026.0	2021.0
	Testing required?	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	No	No	No	No	No	No

Table 1: Estimated SAR calculation for WiFi and BT

Note:

1) \* - maximum possible output power declared by manufacturer

## 1.5 Test Specification

Identity	Document Title
FCC 47CFR §2.1093	Radiofrequency Radiation Exposure Evaluation: Portable Devices
ANSI/IEEE C95.1-1992	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz – 300 GHz.
IEEE 1528-2013	Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
IEC/IEEE 62209-1528:2020	Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices – Part 1528: Human models, instrumentation, and procedures (Frequency range of 4 MHz to 10 GHz)
KDB 941225 D01	3G SAR Measurement Procedures v03r01
KDB 941225 D05	SAR for LTE Devices v02r05
KDB 941225 D05A	LTE Rel.10 KDB Inquiry Sheet v01r02
KDB 248227 D01	SAR Guidance for IEEE 802 11 Wi-Fi SAR v02r02
KDB 447498 D04	General RF Exposure Guidance v01
KDB 865664 D01	SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02	RF Exposure Reporting v01r02
KDB 690783 D01	SAR Listings on Grants v01r03
KDB 616217 D04	SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers. v01r02

## 1.6 RF exposure limits

Human Exposure	Uncontrolled Environment General Population	Controlled Environment Occupational
<b>Spatial Peak SAR*</b> (Brain*Trunk)	<b>1.60 mW/g</b>	8.00 mW/g
<b>Spatial Average SAR**</b> (Whole Body)	0.08 mW/g	0.40 mW/g
<b>Spatial Peak SAR***</b> (Hands/Feet/Ankle/Wrist)	4.00 mW/g	20.00 mW/g

**Notes:**

\* The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time

\*\* The Spatial Average value of the SAR averaged over the whole body.

\*\*\* The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

**Uncontrolled Environments** are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure.

**Controlled Environments** are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation.)

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101  
Rev.: 01  
Page: 13 of 89

### 1.6.1 Power reduction specification

This device uses a single fixed level of power reduction through static table look-up for SAR compliance and it is triggered by a single event or operation

- 1) A fixed level power reduction is applied for some frequency bands when simultaneously transmitting with the other antennas in certain simultaneous transmission conditions. The standalone SAR compliance still uses the standalone SAR results tested at the maximum output power level without any power reduction
- 2) The proximity sensor is used to indicate when the device is held close to a user's body exposure condition. It utilizes the proximity sensor to reduce the output power in specific wireless and operating modes of main antenna to ensure SAR compliance (Refer to section 5.4 for detailed proximity Sensor information and validation data per KDB 616217).

The detailed power reduction information can be referred to Appendix E.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101  
Rev.: 01  
Page: 14 of 89

## 2 Laboratory Environment

Temperature	Min. = 18°C, Max. = 25 °C
Relative humidity	Min. = 30%, Max. = 70%
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

Table 2: The Ambient Conditions

## 3 SAR Measurements System Configuration

### 3.1 The SAR Measurement System

This SAR Measurement System uses a Computer-controlled 3-D stepper motor system (SPEAG DASY professional system). A E-field probe is used to determine the internal electric fields. The SAR can be obtained from the equation  $SAR = \sigma (|E_i|^2) / \rho$  where  $\sigma$  and  $\rho$  are the conductivity and mass density of the tissue-Simulate.


The DASY system for performing compliance tests consists of the following items:

A standard high precision 6-axis robot (Stabile RX family) with controller, teach pendant and software. An arm extension for accommodation the data acquisition electronics (DAE).

A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.

A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.

The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.

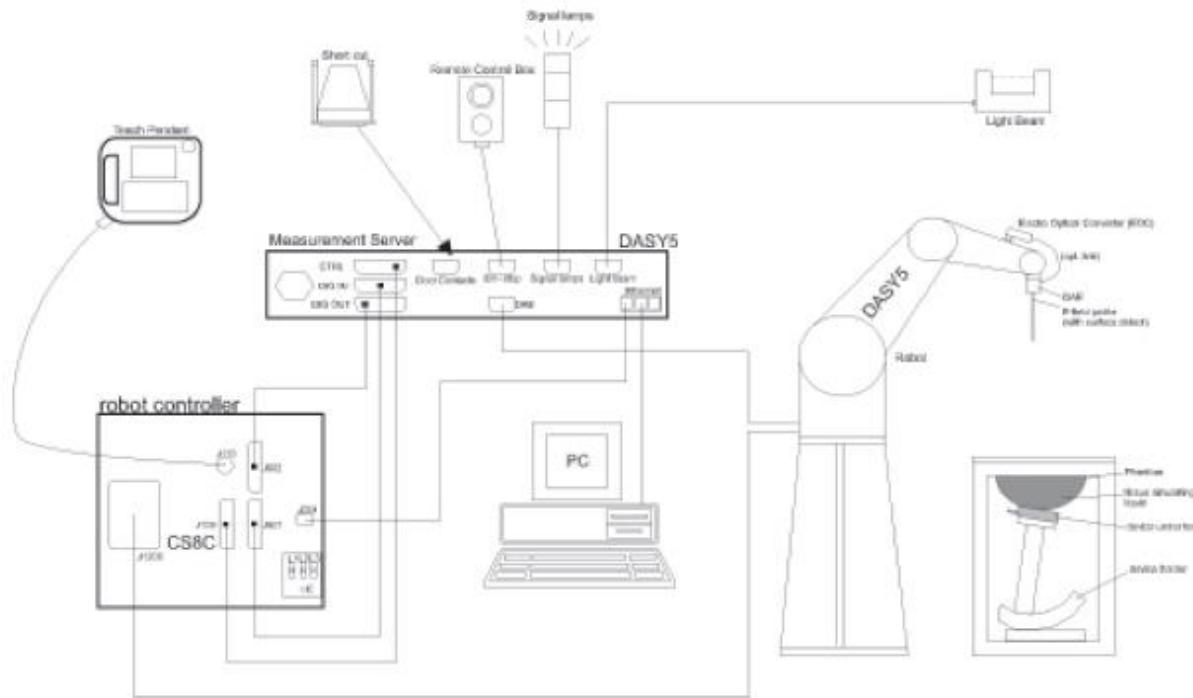


F-1. SAR Measurement System Configuration

- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 7.
- DASY5 software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand, right-hand and Body Worn usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing to validating the proper functioning of the system.

### 3.2 Isotropic E-field Probe EX3DV4

	<p>Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)</p>
<b>Calibration</b>	ISO/IEC 17025 <a href="#">calibration service available</a> .
<b>Frequency</b>	10 MHz to > 6 GHz Linearity: $\pm 0.2$ dB (30 MHz to 6 GHz)
<b>Directivity</b>	$\pm 0.3$ dB in TSL (rotation around probe axis) $\pm 0.5$ dB in TSL (rotation normal to probe axis)
<b>Dynamic Range</b>	10 $\mu$ W/g to > 100 mW/g Linearity: $\pm 0.2$ dB (noise: typically < 1 $\mu$ W/g)
<b>Dimensions</b>	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better 30%.
<b>Compatibility</b>	DASY52 SAR and higher, EASY4/MRI

### 3.3 Data Acquisition Electronics (DAE)
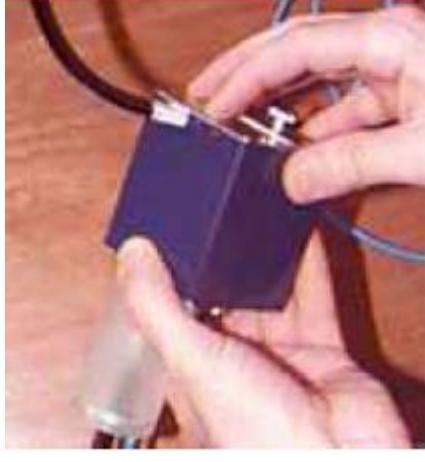
<b>Model</b>	DAE	
<b>Construction</b>	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY4/5 embedded system (fully remote controlled). Two step probe touch detector for mechanical surface detection and emergency robot stop.	
<b>Measurement Range</b>	-100 to +300 mV (16 bit resolution and two range settings: 4mV,400mV)	
<b>Input Offset Voltage</b>	< 5µV (with auto zero)	
<b>Input Bias Current</b>	< 50 f A	
<b>Dimensions</b>	60 x 60 x 68 mm	

### 3.4 SAM Twin Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
<b>Dimensions (incl. Wooden Support)</b>	Length: 1000 mm Width: 500 mm Height: adjustable feet	
<b>Filling Volume</b>	approx. 25 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	

The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.

Twin SAM V5.0 has the same shell geometry and is manufactured from the same material as Twin SAM V4.0, but has reinforced top structure.

### 3.5 ELI Phantom

<b>Material</b>	Vinylester, glass fiber reinforced (VE-GF)	
<b>Liquid Compatibility</b>	Compatible with all SPEAG tissue simulating liquids (incl. DGBE type)	
<b>Shell Thickness</b>	2.0 ± 0.2 mm (bottom plate)	
<b>Dimensions</b>	Major axis: 600 mm Minor axis: 400 mm	
<b>Filling Volume</b>	approx. 30 liters	
<b>Wooden Support</b>	SPEAG standard phantom table	
Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles. ELI V5.0 has the same shell geometry and is manufactured from the same material as ELI4, but has reinforced top structure.		

### 3.6 Device Holder for Transmitters



F-2. Device Holder for Transmitters

- The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation centres for both scales are the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.
- The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon=3$  and loss tangent  $\delta=0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

## 3.7 Measurement procedure

### 3.7.1 Scanning procedure

#### Step 1: Power reference measurement

The “reference” and “drift” measurements are located at the beginning and end of the batch process. They measure the field drift at one single point in the liquid over the complete procedure.

#### Step 2: Area scan

The SAR distribution at the exposed side of the head was measured at a distance of 4mm from the inner surface of the shell. The area covered the entire dimension of the head and the horizontal grid spacing was 15mm\*15mm or 12mm\*12mm or 10mm\*10mm. Based on the area scan data, the area of the maximum absorption was determined by spline interpolation.

#### Step 3: Zoom scan

Around this point, a volume of 32mm\*32mm\*30mm (f≤2GHz), 30mm\*30mm\*30mm (f for 2-3GHz) and 24mm\*24mm\*22mm (f for 5-6GHz) was assessed by measuring 5x5x7 points (f≤2GHz), 7x7x7 points (f for 2-3GHz) and 7x7x12 points (f for 5-6GHz). On this basis of this data set, the spatial peak SAR value was evaluated with the following procedure:

The data at the surface was extrapolated, since the centre of the dipoles is 2.0mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.2mm. (This can be variable. Refer to the probe specification). The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3D-Spline interpolation algorithm. The volume was integrated with the trapezoidal algorithm. One thousand points were interpolated to calculate the average. All neighbouring volumes were evaluated until no neighboring volume with a higher average value was found.

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

	$\leq 3$ GHz	$> 3$ GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	$5 \pm 1$ mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
	$\leq 2$ GHz: $\leq 15$ mm $2 - 3$ GHz: $\leq 12$ mm	$3 - 4$ GHz: $\leq 12$ mm $4 - 6$ GHz: $\leq 10$ mm	
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$	$\leq 2$ GHz: $\leq 8$ mm $2 - 3$ GHz: $\leq 5$ mm*	$3 - 4$ GHz: $\leq 5$ mm* $4 - 6$ GHz: $\leq 4$ mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$	$\leq 5$ mm	$3 - 4$ GHz: $\leq 4$ mm $4 - 5$ GHz: $\leq 3$ mm $5 - 6$ GHz: $\leq 2$ mm
	graded grid $\Delta z_{\text{Zoom}}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	$\leq 4$ mm	$3 - 4$ GHz: $\leq 3$ mm $4 - 5$ GHz: $\leq 2.5$ mm $5 - 6$ GHz: $\leq 2$ mm
Minimum zoom scan volume	$x, y, z$	$\geq 30$ mm	$3 - 4$ GHz: $\geq 28$ mm $4 - 5$ GHz: $\geq 25$ mm $5 - 6$ GHz: $\geq 22$ mm

#### Step 4: Power reference measurement (drift)

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The indicated drift is mainly the variation of the DUT's output power and should vary max.  $\pm 5$  %

### 3.7.2 Data Storage

The DASY software stores the acquired data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension ".DAE4". The software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of incorrect parameter settings. For example, if a measurement has been performed with a wrong crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be re-evaluated. The measured data can be visualized or exported in different units or formats, depending on the selected probe type ([V/m], [A/m], [°C], [m W/g], [m W/cm<sup>2</sup>], [dBrel], etc.). Some of these units are not available in certain situations or show meaningless results, e.g., a SAR output in a lossless media will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 3.7.3 Data Evaluation by SEMCAD

The SEMCAD software automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters:	- Sensitivity	Normi, ai0, ai1, ai2
- Conversion factor	ConvFi	
- Diode compression point	DcpI	
Device parameters:	- Frequency	f
- Crest factor	cf	
Media parameters:	- Conductivity	$\epsilon$
- Density	$\rho$	

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics.

If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot c_f / d_c p_i$$

With  $V_i$  = compensated signal of channel  $i$  ( $i = x, y, z$ )

$U_i$  = input signal of channel  $i$  ( $i = x, y, z$ )

cf = crest factor of exciting field (DASY parameter)

dcp i = diode compression point (DASY parameter)

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 24 of 89

From the compensated input signals the primary field data for each channel can be evaluated:

E-field probes:

$$E_i = (V_i / Norm_i \cdot ConvF)^{1/2}$$

H-field probes:

$$H_i = (V_i)^{1/2} \cdot (a_{i0} + a_{i1}f + a_{i2}f^2)/f$$

With  $V_i$  = compensated signal of channel i (i = x, y, z)

Norm<sub>i</sub> = sensor sensitivity of channel i (i = x, y, z)

[mV/(V/m)<sup>2</sup>] for E-field Probes

ConvF = sensitivity enhancement in solution

a<sub>ij</sub> = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

E<sub>i</sub> = electric field strength of channel i in V/m

H<sub>i</sub> = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = (E_x^2 + E_y^2 + E_z^2)^{1/2}$$

The primary field data are used to calculate the derived field units.

$$SAR = (E_{tot}^2 \cdot \sigma) / (\epsilon \cdot 1000)$$

with SAR = local specific absorption rate in mW/g

E<sub>tot</sub> = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\epsilon$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1 (or 1.06), to account for actual brain density rather than the density of the simulation liquid. The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = E_{tot}^2 / 3770 \text{ or } P_{pwe} = H_{tot}^2 \cdot 37.7$$

with P<sub>pwe</sub> = equivalent power density of a plane wave in mW/cm<sup>2</sup>

E<sub>tot</sub> = total electric field strength in V/m

H<sub>tot</sub> = total magnetic field strength in A/m

## 4 SAR measurement variability and uncertainty

### 4.1 SAR measurement variability

Per KDB 865664 D01 SAR measurement 100 MHz to 6 GHz v01r04, SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. The additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

- 1) Repeated measurement is not required when the original highest measured SAR is  $< 0.80 \text{ W/kg}$ ; steps 2) through 4) do not apply.
- 2) When the original highest measured SAR is  $\geq 0.80 \text{ W/kg}$ , repeat that measurement once.
- 3) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45 \text{ W/kg}$  ( $\sim 10\%$  from the 1-g SAR limit).
- 4) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5 \text{ W/kg}$  and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

The same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.

### 4.2 SAR measurement uncertainty


Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is  $< 1.5 \text{ W/kg}$ , the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. The equivalent ratio (1.5/1.6) is applied to extremity and occupational exposure conditions.

## 5 Description of Test Position

### 5.1 Exposure Condition

#### 5.1.1 The Body Test Position

The overall diagonal dimension of the display section of a tablet is > 20 cm, Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. SAR evaluation for the front surface of tablet display screens is generally not necessary. The SAR Exclusion Threshold in KDB 447498 D04 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

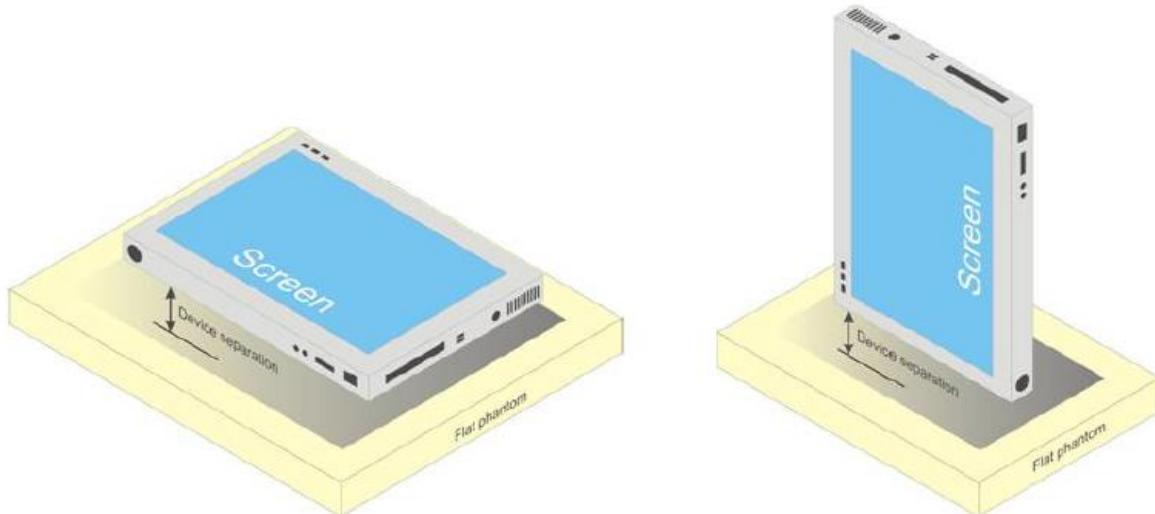


F-3. Tablet form factor portable computer.

## 5.2 Proximity Sensor Triggering Test

### Proximity sensor triggering distances:

The Proximity sensor triggering was applied to WWAN antenna. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

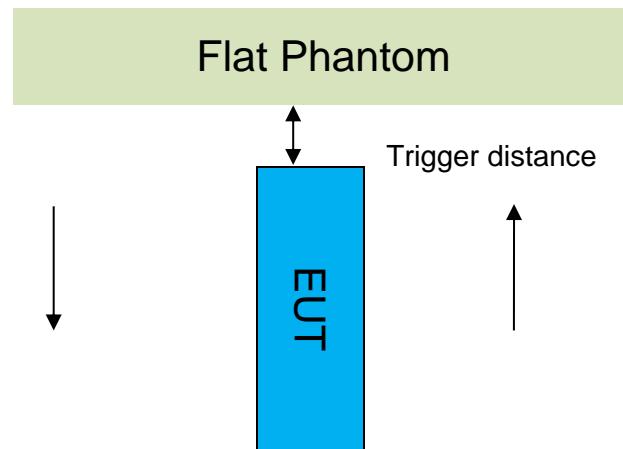

Proximity Sensor Triggering Distance(mm)		
Ant.0		
Position	Back side	Bottom side
Minimum	20	20
Required SAR Test	19	19
WLAN 2.4G		
Position	Back side	Top side
Minimum	20	20
Required SAR Test	19	19
WLAN 5G		
Position	Back side	Top side
Minimum	14	15
Required SAR Test	13	14

Note:

SAR tests with proximity sensor power reduction are only required for the sides of frequency bands in the table above. For the other sides or other frequency bands of the device, SAR is still tested at the maximum power level with sensor off.

## Proximity sensor coverage


If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For p-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”.

The proximity sensor and main antenna use same metallic electrode, so there is no spatial offset.


## Device tilt angle influences to proximity sensor triggering


The influence of device tilt angles to proximity sensor triggering was determined by positioning each tablet edge that contains a transmitting antenna, perpendicular to the flat phantom.

Rotating the tablet around the edge next to the phantom in  $\leq 10^\circ$  increments until the tablet is  $\pm 45^\circ$  from the vertical position at  $0^\circ$ , and the maximum output power remains in the reduced mode.

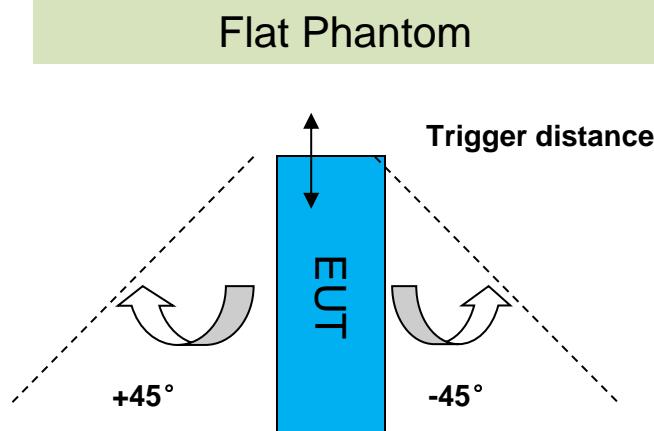



- Ant 0 DUT Moving Toward (Trigger)the Phantom

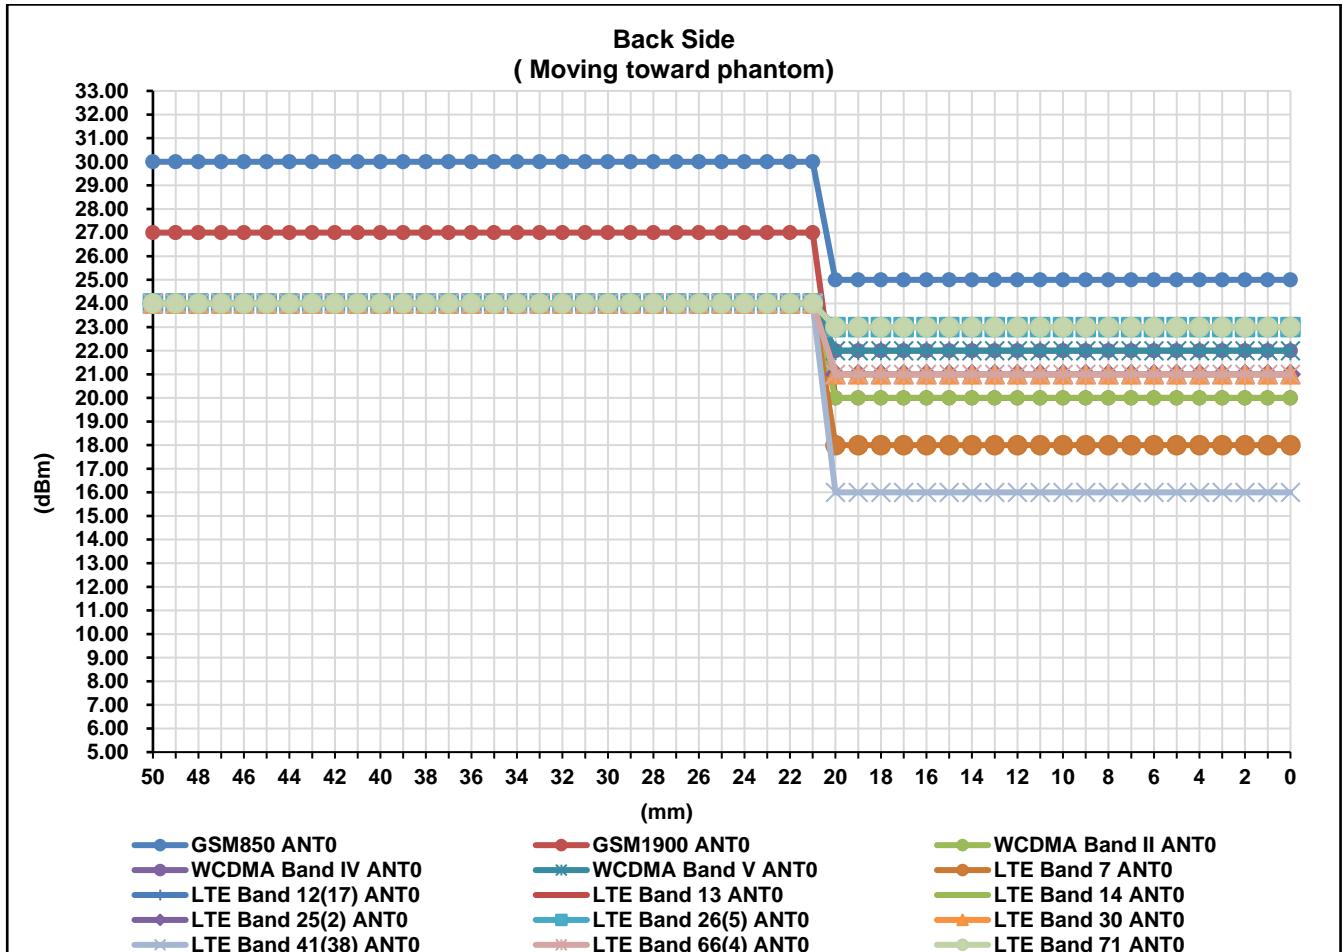

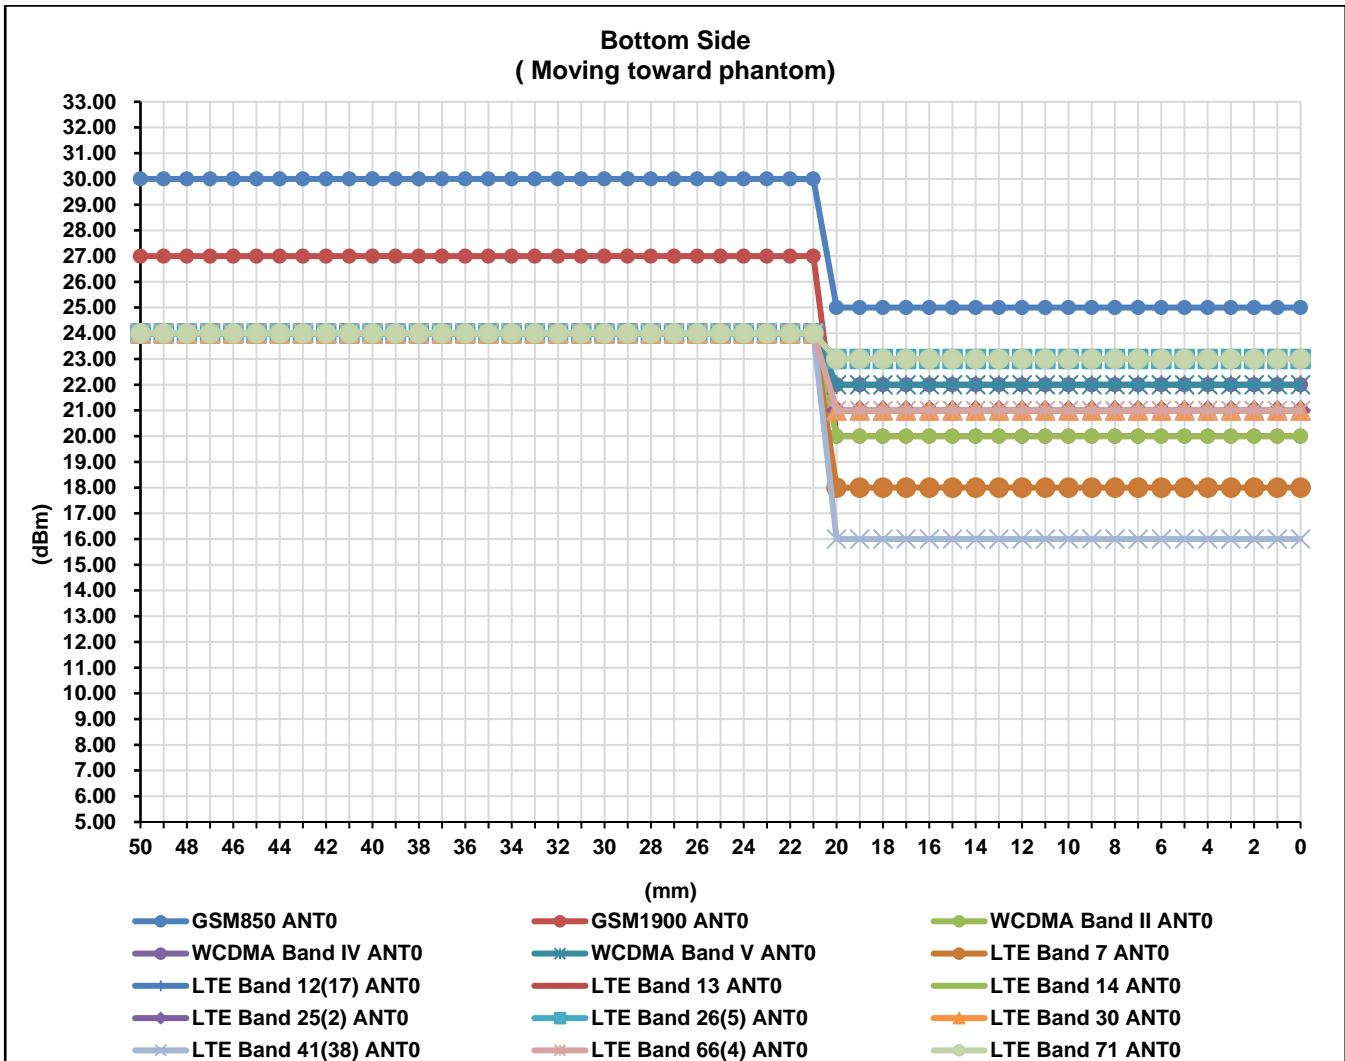



- Ant 0 DUT Moving Away (Release) from the Phantom

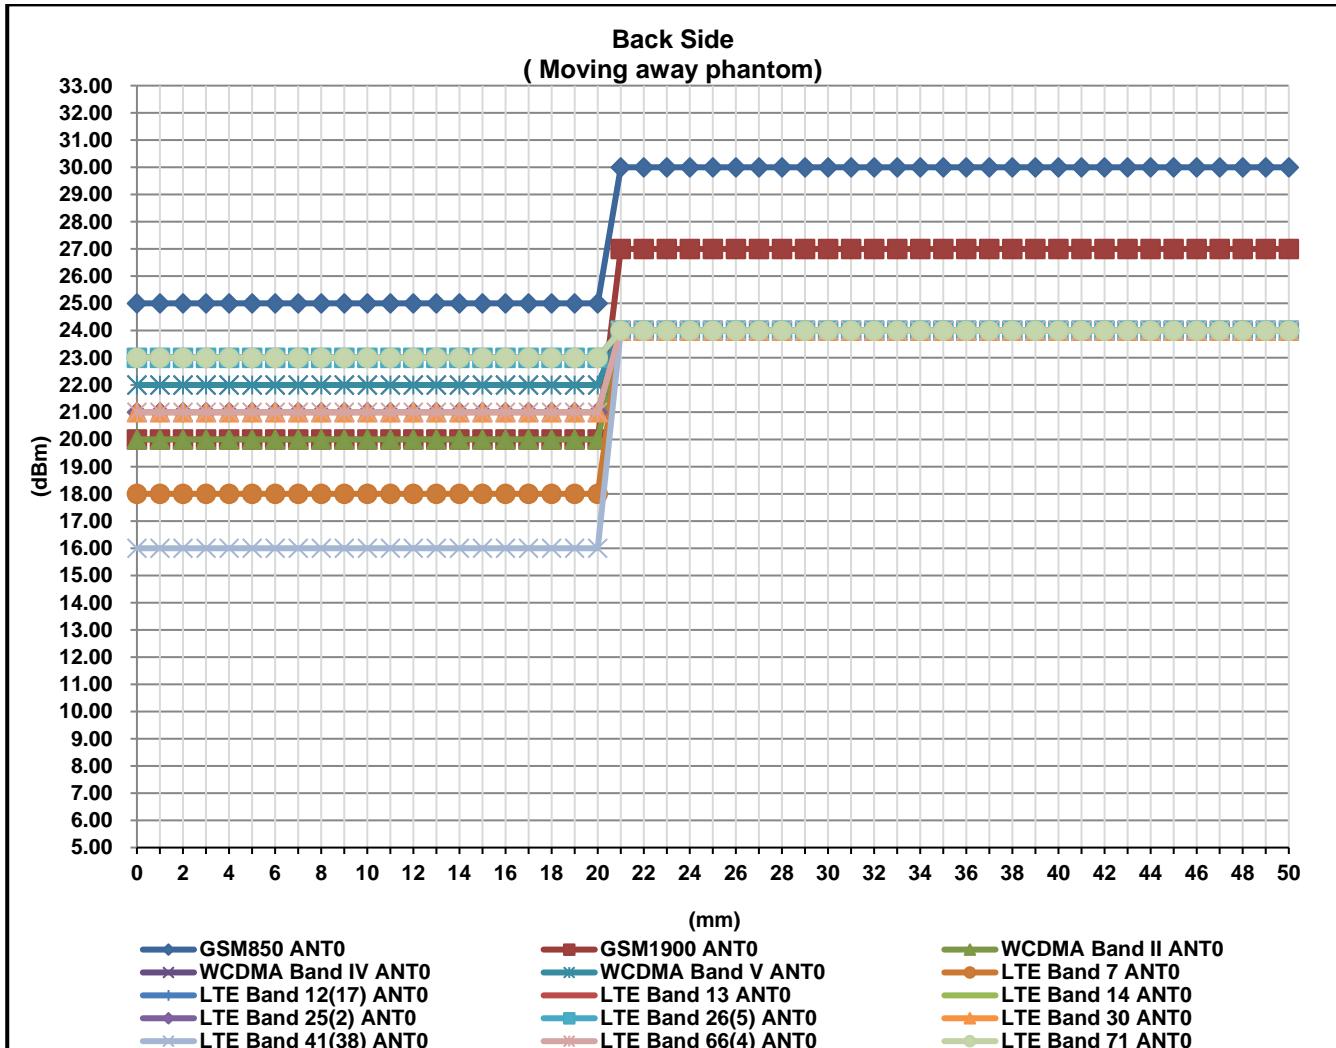

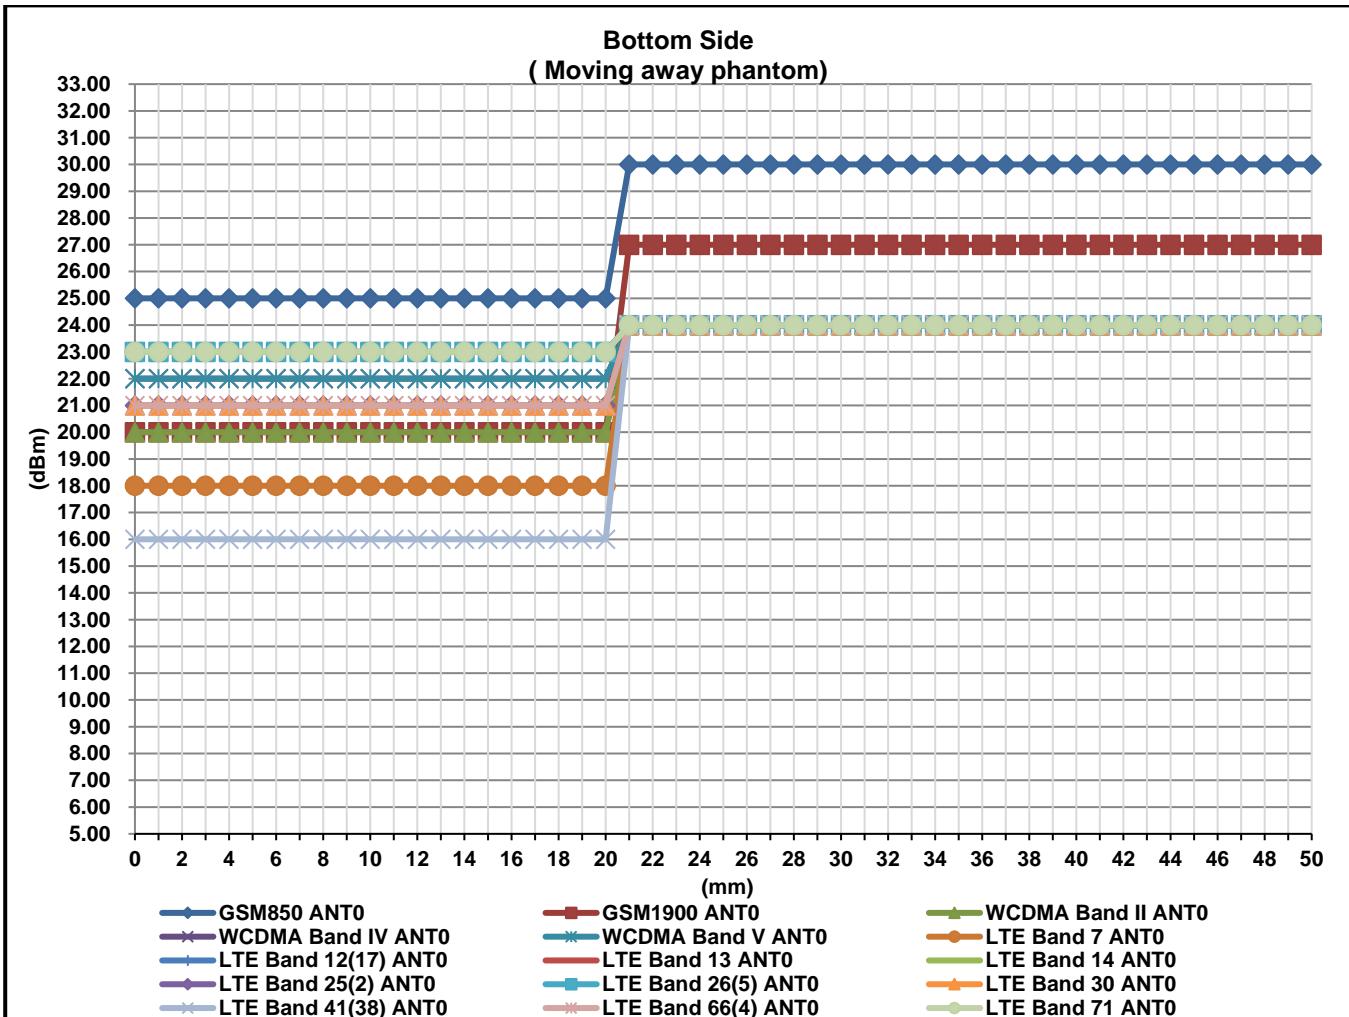



- WLAN 2.4G DUT Moving Toward (Trigger)the Phantom

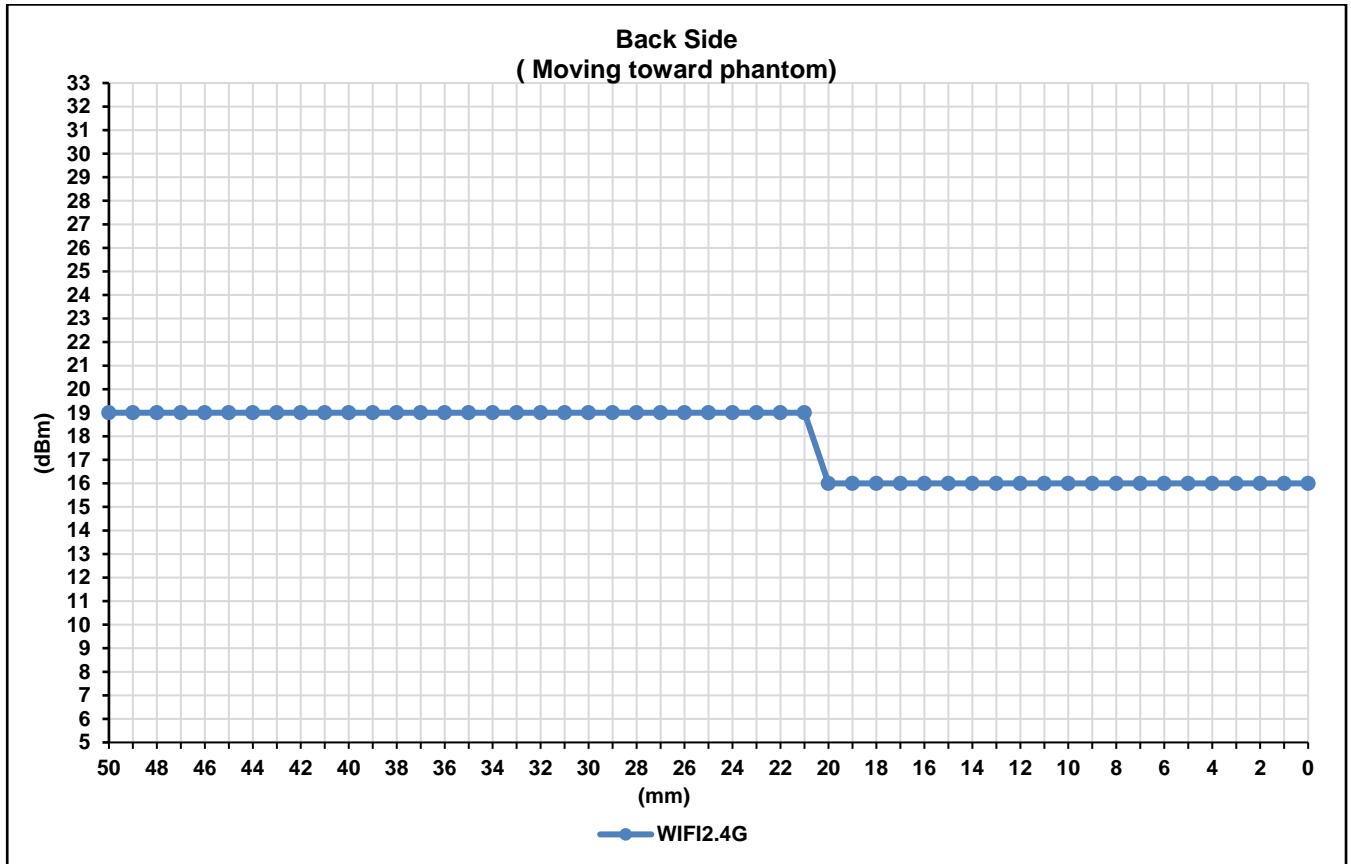

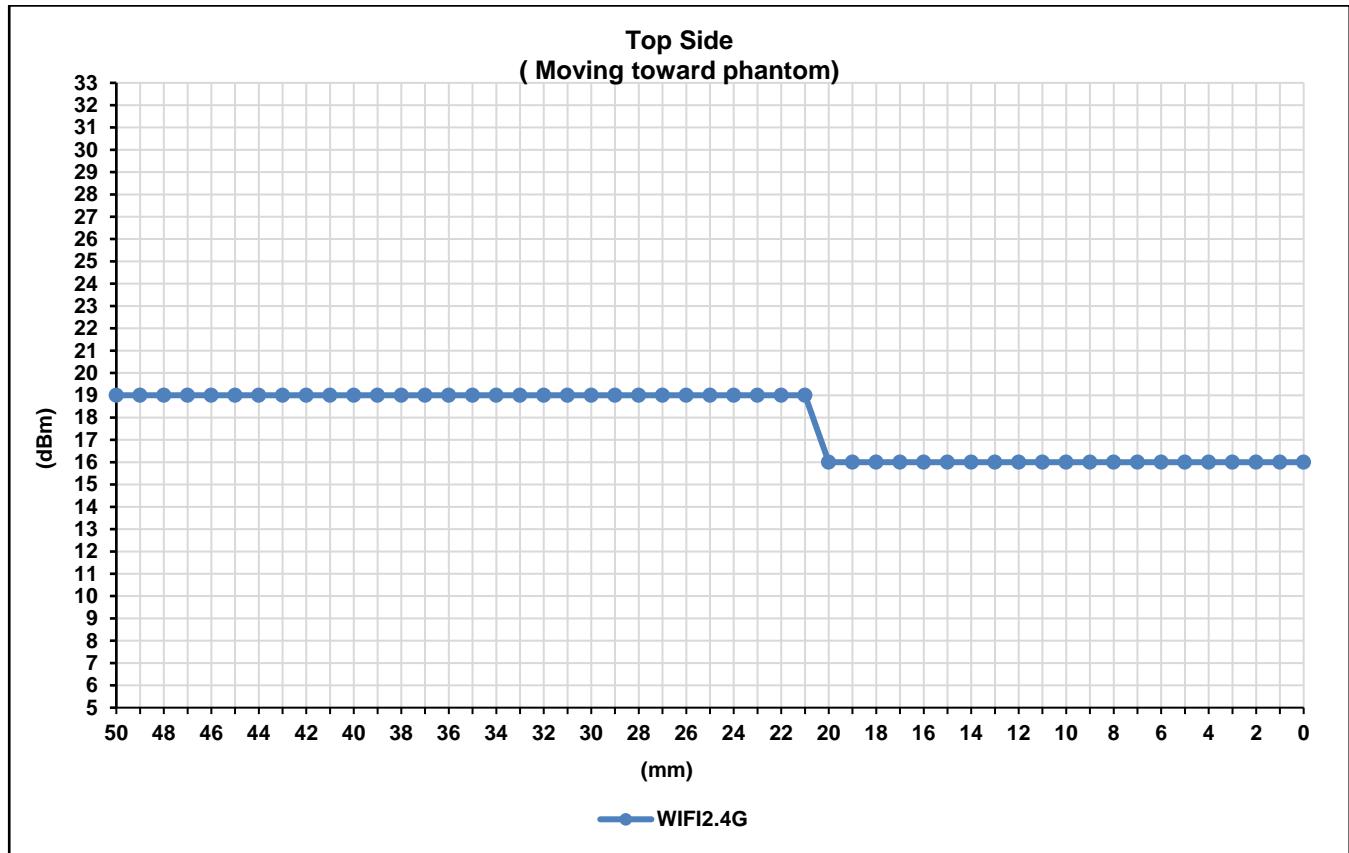



- WLAN 2.4G DUT Moving Away (Release) from the Phantom

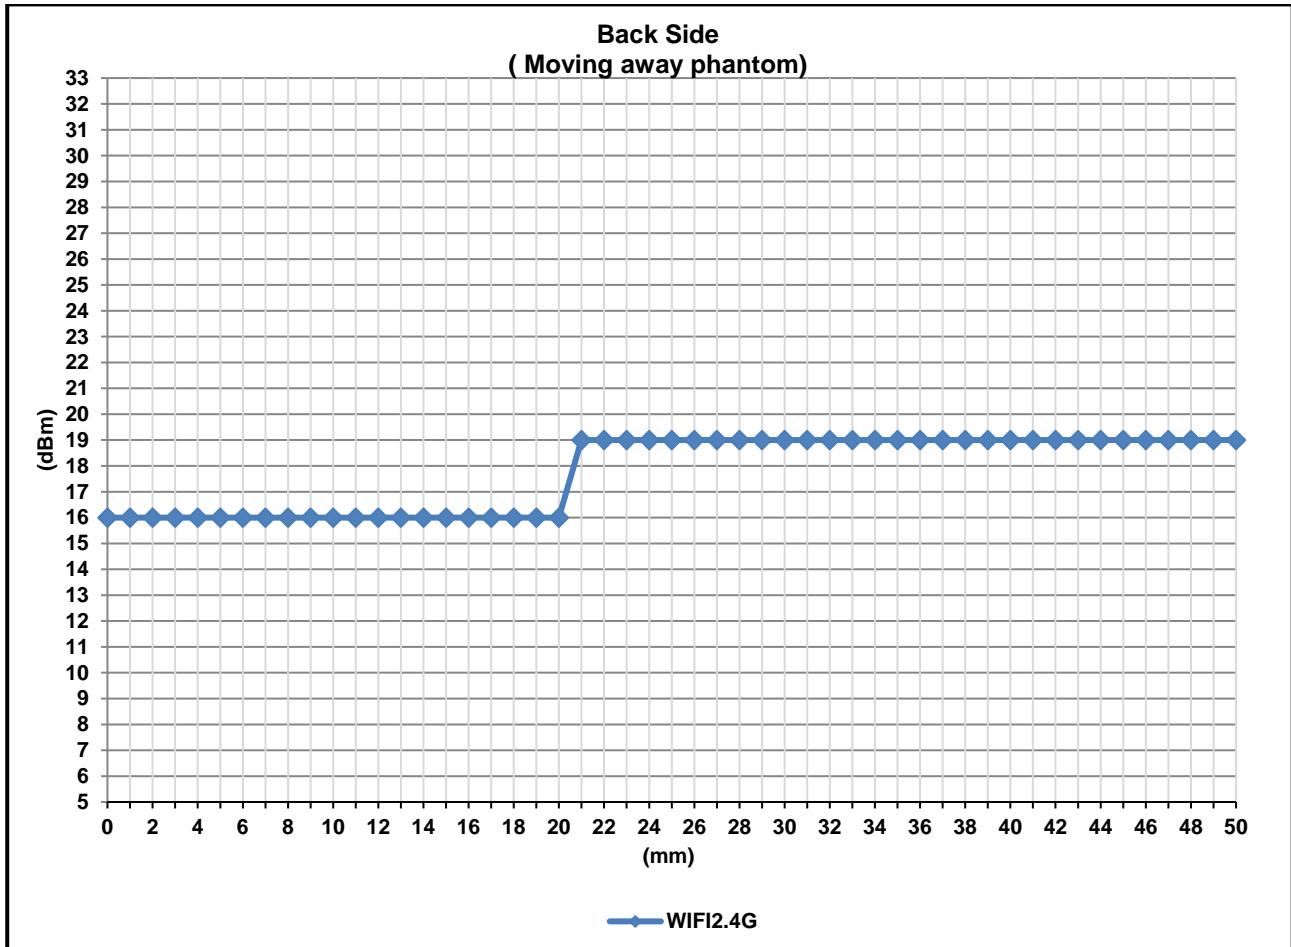

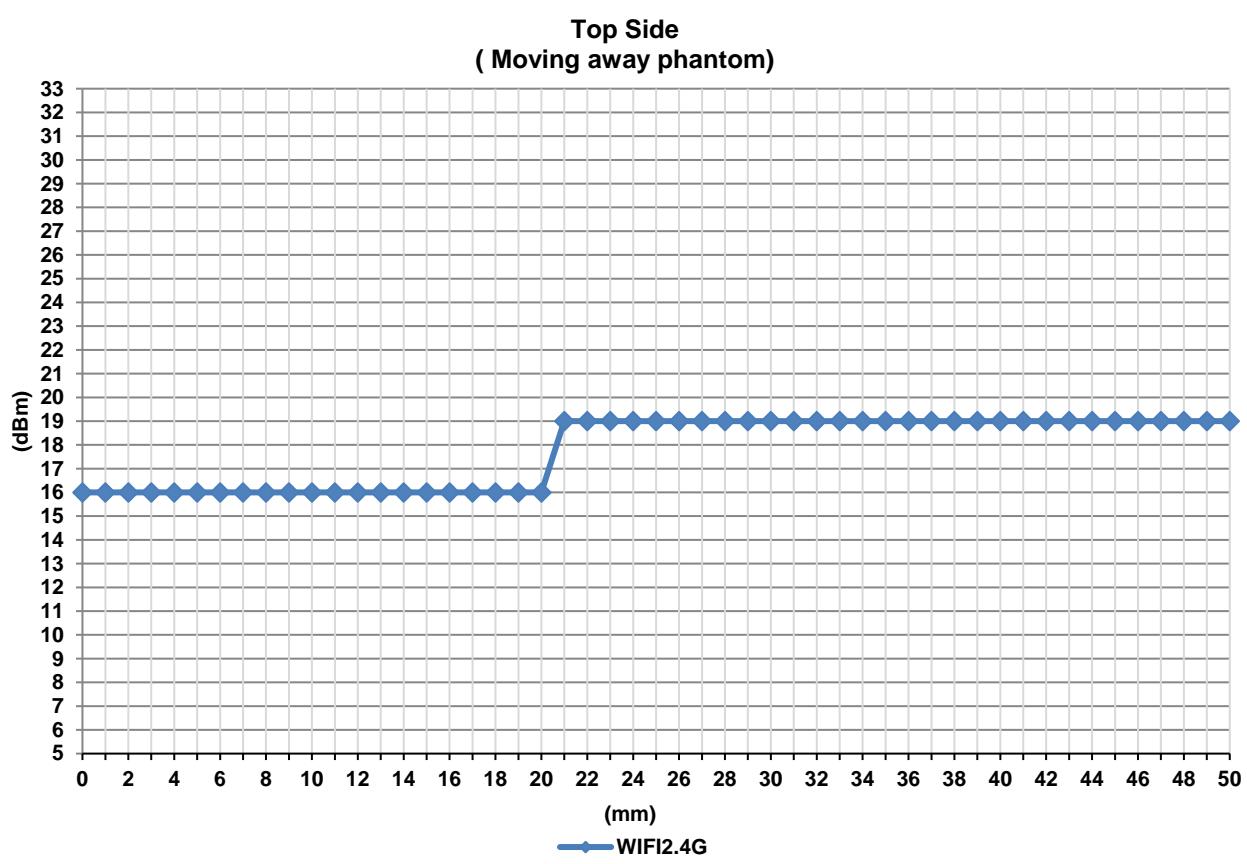



- WLAN 5G DUT Moving Toward (Trigger)the Phantom

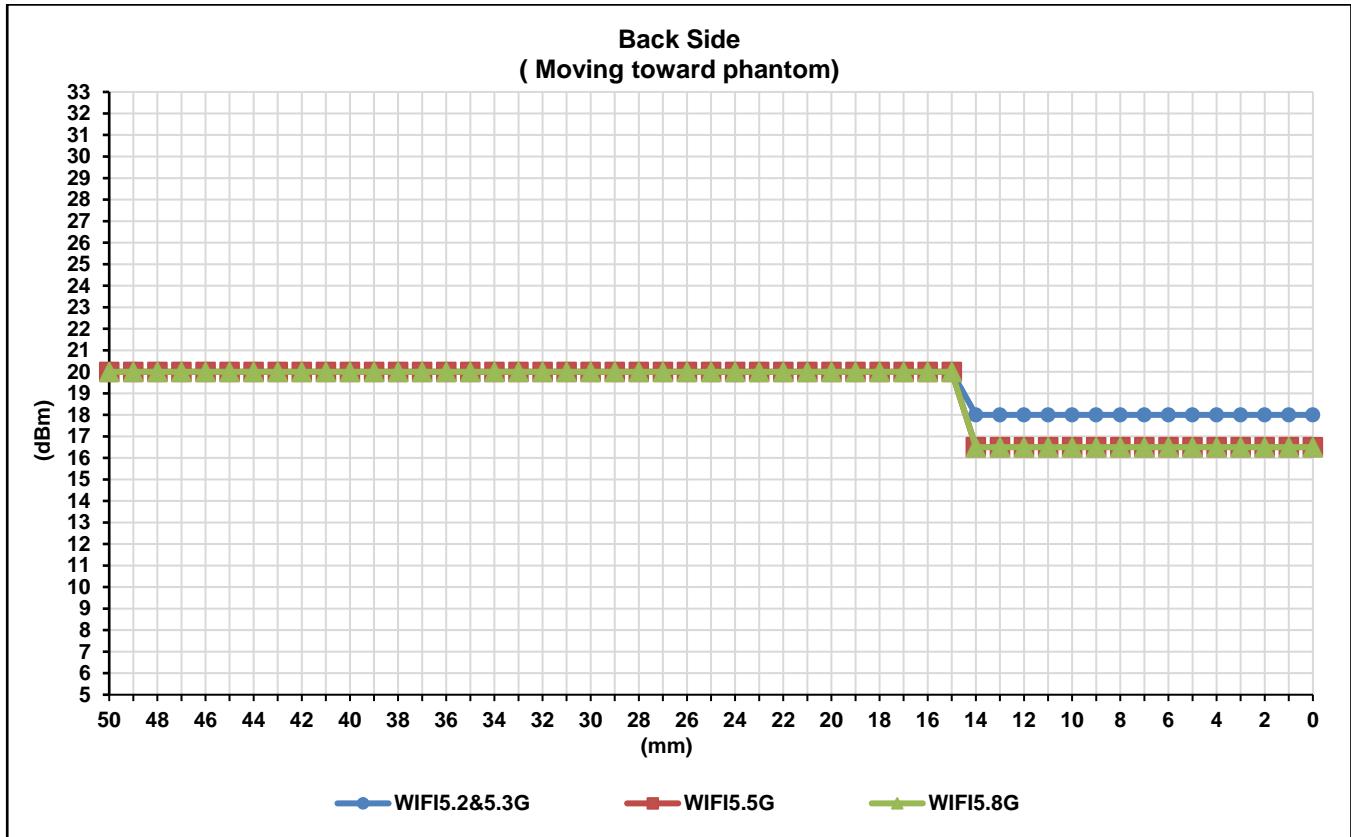

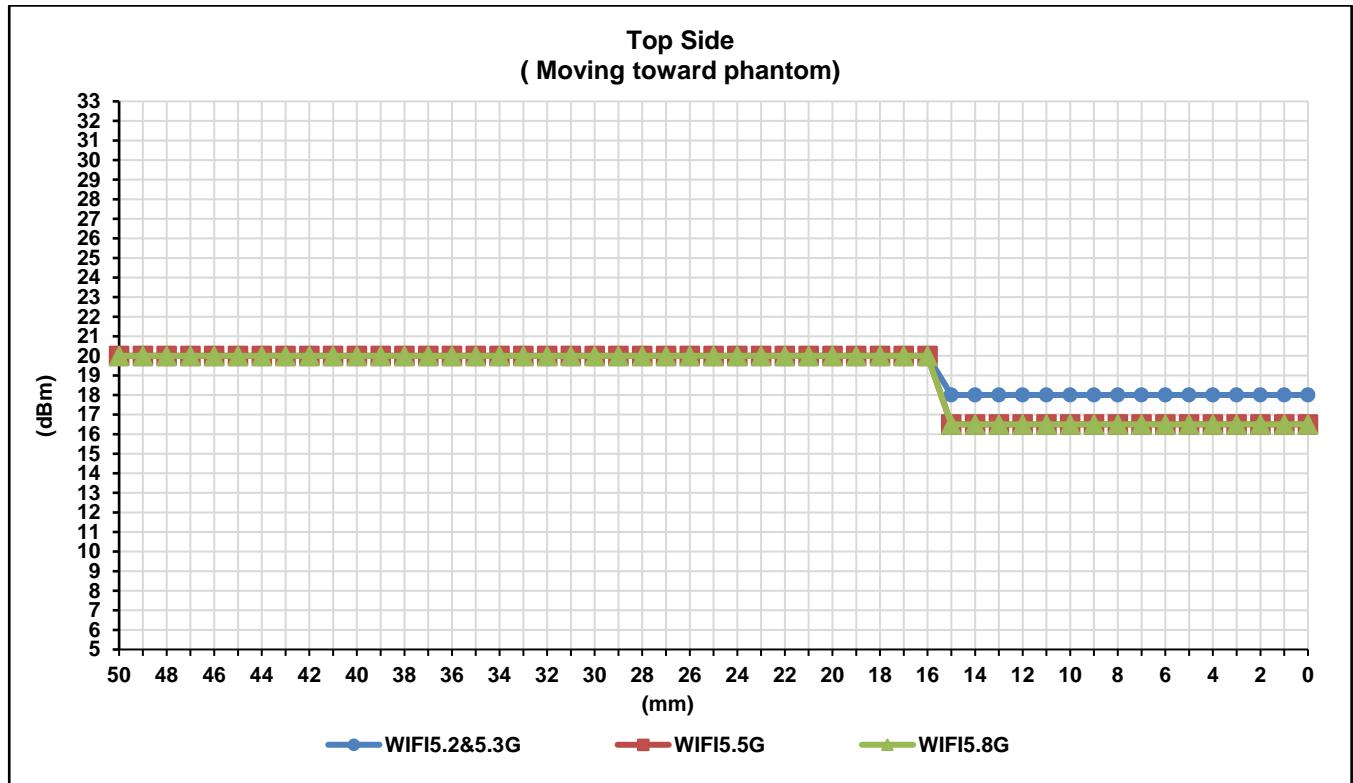

- WLAN 5G DUT Moving Away (Release) from the Phantom

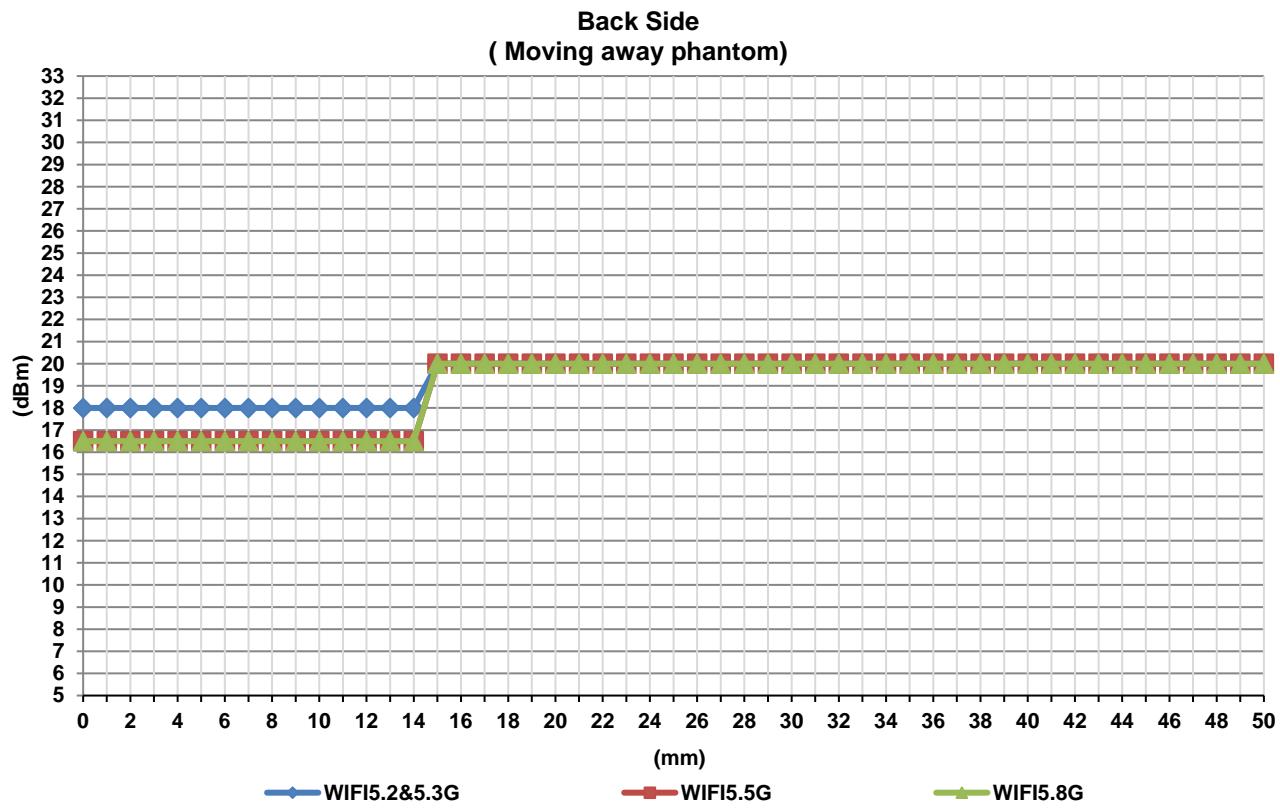

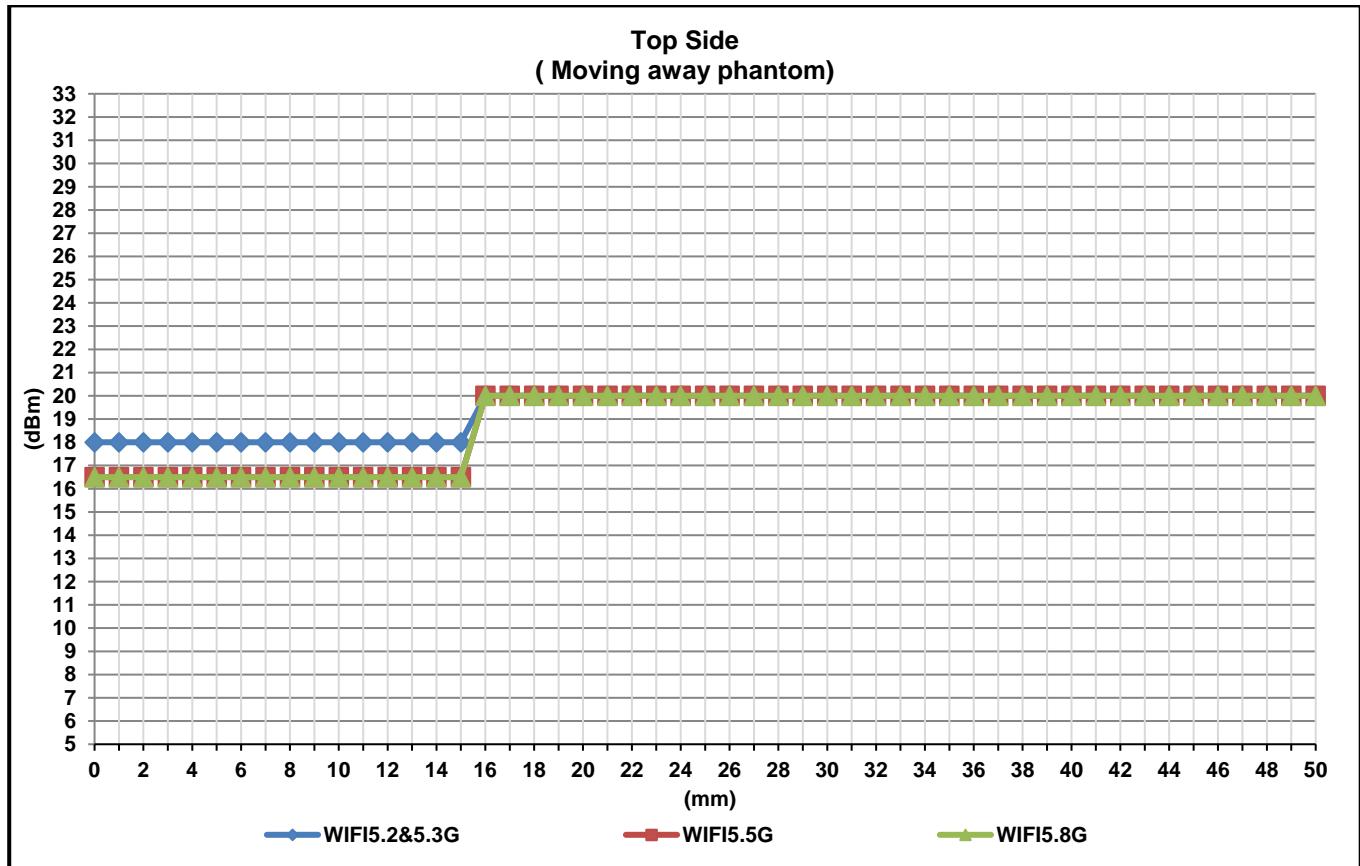

## 6 SAR System Verification Procedure

### 6.1 Tissue Simulate Liquid

#### 6.1.1 Recipes for Tissue Simulate Liquid

The following tables give the recipes for tissue simulating liquids to be used in different frequency bands:

Ingredients (% by weight)	Frequency (MHz)									
	450	700-900	1750-2000	2300-2500	2500-2700					
Water	38.56	40.30	55.24	55.00	54.92					
Salt (NaCl)	3.95	1.38	0.31	0.2	0.23					
Sucrose	56.32	57.90	0	0	0					
HEC	0.98	0.24	0	0	0					
Bactericide	0.19	0.18	0	0	0					
Tween	0	0	44.45	44.80	44.85					
Salt: 99+% Pure Sodium Chloride	Sucrose: 98+% Pure Sucrose									
Water: De-ionized, 16 MΩ <sup>+</sup> resistivity	HEC: Hydroxyethyl Cellulose									
Tween: Polyoxyethylene (20) sorbitan monolaurate										
HSL13MHz is composed of the following ingredients:										
Water: 50-90%										
Non-ionic detergents: 5-50%										
NaCl: 0-2%										
Preservative: 0.03-0.1%										
HSL5GHz is composed of the following ingredients:										
Water: 50-65%										
Mineral oil: 10-30%										
Emulsifiers: 8-25%										
Sodium salt: 0-1.5%										

Table 3: Recipe of Tissue Simulate Liquid

### 6.1.2 Measurement for Tissue Simulate Liquid


The Conductivity ( $\sigma$ ) and Permittivity ( $\rho$ ) are listed in bellow table. For the SAR measurement given in this report. The temperature variation of the Tissue Simulate Liquids was  $22\pm2^\circ\text{C}$ .

Measurement for Tissue Simulate Liquid									
Tissue Type	Measured Frequency (MHz)	Target Tissue ( $\pm 5\%$ )		Measured Tissue		Deviation (Within $\pm 5\%$ )		Liquid Temp. (°C)	Test Date
		$\epsilon_r$	$\sigma(\text{S/m})$	$\epsilon_r$	$\sigma(\text{S/m})$	$\epsilon_r$	$\sigma(\text{S/m})$		
13 Head	13	55.0	0.75	55.800	0.728	1.45%	-2.93%	22.3	2025/4/7
750 Head	750	42	0.9	43.425	0.872	3.39%	-3.11%	22.7	2025/3/20
835 Head	835	41.5	0.9	41.580	0.913	0.19%	1.44%	22.9	2025/3/22
1750 Head	1750	40.1	1.37	38.467	1.328	-4.07%	-3.07%	23.0	2025/3/25
1950 Head	1950	40	1.4	40.507	1.417	1.27%	1.21%	23.1	2025/3/27
2300 Head	2300	39.50	1.67	39.625	1.645	0.32%	-1.50%	22.8	2025/3/30
2300 Head	2300	39.50	1.67	40.484	1.646	2.49%	-1.44%	23.0	2025/4/21
2450 Head	2450	39.2	1.8	38.744	1.809	-1.16%	0.50%	22.8	2025/4/2
2600 Head	2600	39	1.96	38.949	2.028	-0.13%	3.47%	22.8	2025/4/4
5250 Head	5250	35.9	4.71	36.853	4.844	2.65%	2.85%	23.0	2025/4/6
5600 Head	5600	35.5	5.07	35.950	5.260	1.27%	3.75%	23.0	2025/4/6
5750 Head	5750	35.4	5.22	35.523	5.424	0.35%	3.91%	23.0	2025/4/6

Table 4: Measurement result of Tissue electric parameters.

## 6.2 SAR System Check

The microwave circuit arrangement for system Check is sketched in F-12. The daily system accuracy verification occurs within the flat section of the SAM phantom. A SAR measurement was performed to see if the measured SAR was within  $+\/- 10\%$  from the target SAR values. The tests were conducted on the same days as the measurement of the EUT. The obtained results from the system accuracy verification are displayed in the following table (A power level of 250mW (below 3GHz) or 100mW (3-6GHz) was input to the dipole antenna). During the tests, the ambient temperature of the laboratory was in the range  $22\pm 2^\circ\text{C}$ , the relative humidity was in the range 60% and the liquid depth above the ear reference points was above  $15\pm 0.5\text{ cm}$  in all the cases. It is seen that the system is operating within its specification, as the results are within acceptable tolerance of the reference values.

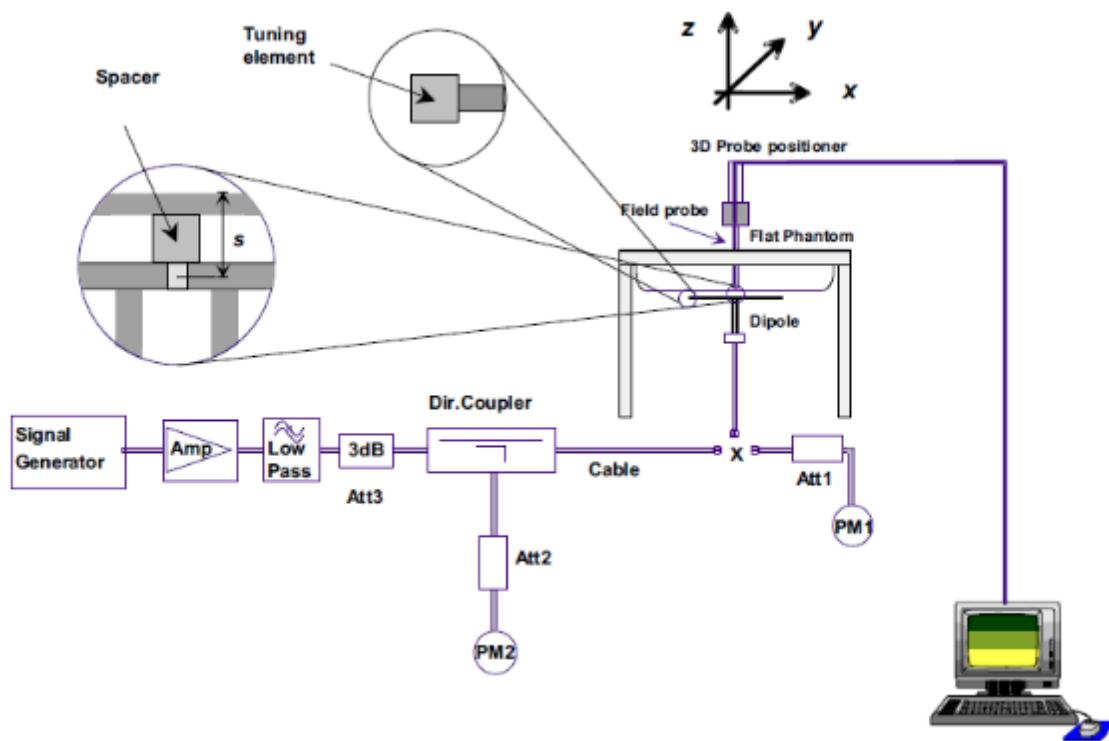

F-4. the microwave circuit arrangement used for SAR system check

**6.2.1 Justification for Extended SAR Dipole Calibrations**

1) Referring to KDB865664 D01 requirements for dipole calibration, instead of the typical annual calibration recommended by measurement standards, longer calibration intervals of up to three years may be considered when it is demonstrated that the SAR target, impedance and return loss of a dipole have remain stable according to the following requirements. Each measured dipole is expected to evaluate with the following criteria at least on annual interval in Appendix C.

- a) There is no physical damage on the dipole;
- b) System check with specific dipole is within 10% of calibrated value;
- c) Return-loss is within 10% of calibrated measurement;
- d) Impedance is within  $5\Omega$  from the previous measurement.

2) Network analyzer probe calibration against air, distilled water and a shorting block performed before measuring liquid parameters.

### 6.2.2 Summary System Check Result(s)

SAR System Validation Result(s)											
Validation Kit		Measured SAR 250mW	Measured SAR 250mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Deviation (Within ±10% )		Liquid Temp. (°C)	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
CLA-13	Head	0.109	0.071	0.44	0.28	0.421	0.266	3.56%	6.77%	22.3	2025/4/7
D750V3	Head	1.90	1.29	7.60	5.16	8.27	5.48	-8.10%	-5.84%	22.7	2025/3/20
D835V2	Head	2.34	1.54	9.36	6.16	9.6	6.16	-2.50%	0.00%	22.9	2025/3/22
D1750V2	Head	9.46	5.02	37.84	20.08	37	19.3	2.27%	4.04%	23.0	2025/3/25
D1950V3	Head	9.44	4.89	37.76	19.56	40.4	20.8	-6.53%	-5.96%	23.1	2025/3/27
D2300V2	Head	12.70	6.03	50.80	24.12	49.20	23.40	3.25%	3.08%	22.8	2025/3/30
D2300V2	Head	12.30	5.88	49.20	23.52	49.20	23.40	0.00%	0.51%	23.0	2025/4/21
D2450V2	Head	13.00	6.08	52.00	24.32	52.7	24.6	-1.33%	-1.14%	22.8	2025/4/2
D2600V2	Head	14.50	6.47	58.00	25.88	54.8	24.5	5.84%	5.63%	22.8	2025/4/4
Validation Kit		Measured SAR 100mW	Measured SAR 100mW	Measured SAR (normalized to 1W)	Measured SAR (normalized to 1W)	Target SAR (normalized to 1W) (±10%)	Target SAR (normalized to 1W) (±10%)	Deviation (Within ±10% )		Liquid Temp. (°C)	Test Date
		1g (W/kg)	10g (W/kg)	1g (W/kg)	10g (W/kg)	1-g(W/kg)	10-g(W/kg)	1-g(W/kg)	10-g(W/kg)		
D5GHzV2	Head(5.25GHz)	7.87	2.21	78.70	22.10	77.2	21.9	1.94%	0.91%	23.0	2025/4/6
	Head(5.6GHz)	8.31	2.30	83.10	23.00	81.1	22.8	2.47%	0.88%	23.0	2025/4/6
	Head(5.75GHz)	8.25	2.30	82.50	23.00	77.8	21.7	6.04%	5.99%	23.0	2025/4/6

Table 5: SAR System Check Result.

### 6.2.3 Detailed System Check Results

Please see the Appendix A

## 7 Test Configuration

### 7.1 3G SAR Test Reduction Procedure

According to KDB 941225D01, in the following procedures, the mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq 1/4$  dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for the secondary mode. This is referred to as the 3G SAR test reduction procedure in the following SAR test guidance, where the primary mode is identified in the applicable wireless mode test procedures and the secondary mode is wireless mode being considered for SAR test reduction by that procedure. When the 3G SAR test reduction procedure is not satisfied, it is identified as "otherwise" in the applicable procedures; SAR measurement is required for the secondary mode.

### 7.2 Operation Configurations

#### 7.2.1 GSM Test Configuration

SAR tests for GSM 850 and GSM 1900, a communication link is set up with a base station by air link. Using CMW500 the power lever is set to "5" and "0" in SAR of GSM 850 and GSM 1900. The tests in the band of GSM 850 and GSM 1900 are performed in the mode of GPRS/EGPRS function. Since the GPRS class is 12 for this EUT, it has at most 4 timeslots in uplink and at most 4 timeslots in downlink, the maximum total timeslot is 5. The EGPRS class is 12 for this EUT, it has at most 4 timeslots in uplink, and at most 4 timeslots in downlink, the maximum total timeslot is 5.

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.

When SAR tests for EGPRS mode is necessary, GMSK modulation should be used to minimize SAR measurement error due to higher peak-to-average power (PAR) ratios inherent in 8-PSK.

The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode

## 7.2.2 WCDMA Test Configuration

### 1) . Output Power Verification

Maximum output power is verified on the high, middle and low channels according to procedures described in section 5.2 of 3GPP TS 34.121, using the appropriate RMC or AMR with TPC (transmit power control) set to all “1’s” for WCDMA/HSDPA or by applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HSDPA, HSPA) are required in the SAR report. All configurations that are not supported by the handset or cannot be measured due to technical or equipment limitations must be clearly identified.

### 2) . Body SAR

SAR for body configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCHn, for the highest reported body-worn accessory exposure SAR configuration in 12.2 kbps RMC. When more than 2 DPDCHn are supported by the handset, it may be necessary to configure additional DPDCHn using FTM (Factory Test Mode) or other chipset based test approaches with parameters similar to those used in 384 kbps and 768 kbps RMC.

### 3) . HSDPA / HSUPA / DC-HSDPA

According to KDB 941225 D01v03, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

#### a) HSDPA

HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH/HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors( $\beta_c$ ,  $\beta_d$ ), and HS-DPCCH power offset parameters ( $\Delta ACK$ ,  $\Delta NACK$ ,  $\Delta CQI$ ) are set according to values indicated in the following table. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	$\beta_c$	$\beta_d$	$\beta_d(SF)$	$\beta_c/\beta_d$	$\beta_{hs}$	CM(dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	0.0	0
2	12/15(3)	15/15(3)	64	12/15(3)	24/15	1.0	0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note1:  $\Delta ACK$ ,  $\Delta NACK$  and  $\Delta CQI = 8$  Ahs =  $\beta_{hs}/\beta_c = 30/15$   $\beta_{hs} = 30/15 * \beta_c$

Note2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude(EVM) with HS-DPCCH test in clause 5.13.1.A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta ACK$  and  $\Delta NACK = 8$  ( Ahs=30/15) with  $\beta_{hs}=30/15 * \beta_c$ , and  $\Delta CQI = 7$  ( Ahs=24/15) with  $\beta_{hs}=24/15 * \beta_c$ .

Note3: CM=1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 48 of 89

The measurements were performed with a Fixed Reference Channel (FRC) and H-Set 1 QPSK.

Parameter	Value
<b>Nominal average inf. bit rate</b>	534 kbit/s
<b>Inter-TTI Distance</b>	3 TTI's
<b>Number of HARQ Processes</b>	2 Processes
<b>Information Bit Payload</b>	3202 Bits
<b>MAC-d PDU size</b>	336 Bits
<b>Number Code Blocks</b>	1 Block
<b>Binary Channel Bits Per TTI</b>	4800 Bits
<b>Total Available SMLs in UE</b>	19200 SMLs
<b>Number of SMLs per HARQ Process</b>	9600 SMLs
<b>Coding Rate</b>	0.67
<b>Number of Physical Channel Codes</b>	5

Table 6: settings of required H-Set 1 QPSK acc. to 3GPP 34.121

HS-DSCH Category	Maximum HS-DSCH Codes Received	Minimum Inter-TTI Interval	MaximumH S-DSCH Transport Block Bits/HS-DSCH TTI	Total Soft Channel Bits
1	5	3	7298	19200
2	5	3	7298	28800
3	5	2	7298	28800
4	5	2	7298	38400
5	5	1	7298	57600
6	5	1	7298	67200
7	10	1	14411	115200
8	10	1	14411	134400
9	15	1	25251	172800
10	15	1	27952	172800
11	5	2	3630	14400
12	5	1	3630	28800
13	15	1	34800	259200
14	15	1	42196	259200
15	15	1	23370	345600
16	15	1	27952	345600

Table 7: HSDPA UE category

## b) HSUPA

Due to inner loop power control requirements in HSUPA, a commercial communication test set should be used for the output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSUPA should be configured according to the values indicated below as well as other applicable procedures described in the „WCDMA Handset“ and „Release 5 HSUPA Data Device“ sections of 3G device.

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 49 of 89

Sub-test <sup>a</sup>	$\beta_c$	$\beta_d$	$\beta_d$ (SF) <sup>b</sup>	$\beta_c/\beta_d$	$\beta_{hs}^{(1)}$	$\beta_{ee}$	$\beta_{ed}$	$\beta_{z_{code}}$ (SF) <sup>c</sup>	$\beta_{ed}$ (code)	CM <sup>d</sup>	MP R <sup>e</sup> (dB)	AG <sup>f</sup> Inde- x	E-TFC I <sup>g</sup>	
1 <sup>h</sup>	11/15 <sup>(3)</sup>	15/15 <sup>(3)</sup>	64 <sup>h</sup>	11/15 <sup>(3)</sup>	22/15 <sup>h</sup>	209/22 <sup>5</sup>	1039/225 <sup>h</sup>	4 <sup>h</sup>	1 <sup>h</sup>	1.0 <sup>h</sup>	0.0 <sup>h</sup>	20 <sup>h</sup>	75 <sup>h</sup>	
2 <sup>h</sup>	6/15 <sup>h</sup>	15/15 <sup>h</sup>	64 <sup>h</sup>	6/15 <sup>h</sup>	12/15 <sup>h</sup>	12/15 <sup>h</sup>	94/75 <sup>h</sup>	4 <sup>h</sup>	1 <sup>h</sup>	3.0 <sup>h</sup>	2.0 <sup>h</sup>	12 <sup>h</sup>	67 <sup>h</sup>	
3 <sup>h</sup>	15/15 <sup>h</sup>	9/15 <sup>h</sup>	64 <sup>h</sup>	15/9 <sup>h</sup>	30/15 <sup>h</sup>	30/15 <sup>h</sup>	$\beta_{ed1}:47/1$ $\beta_{ed2}:47/1$ $5_4$		4 <sup>h</sup>	2 <sup>h</sup>	2.0 <sup>h</sup>	1.0 <sup>h</sup>	15 <sup>h</sup>	92 <sup>h</sup>
4 <sup>h</sup>	2/15 <sup>h</sup>	15/15 <sup>h</sup>	64 <sup>h</sup>	2/15 <sup>h</sup>	4/15 <sup>h</sup>	2/15 <sup>h</sup>	56/75 <sup>h</sup>	4 <sup>h</sup>	1 <sup>h</sup>	3.0 <sup>h</sup>	2.0 <sup>h</sup>	17 <sup>h</sup>	71 <sup>h</sup>	
5 <sup>h</sup>	15/15 <sup>(4)</sup>	15/15 <sup>(4)</sup>	64 <sup>h</sup>	15/15 <sup>(4)</sup>	30/15 <sup>h</sup>	24/15 <sup>h</sup>	134/15 <sup>h</sup>	4 <sup>h</sup>	1 <sup>h</sup>	1.0 <sup>h</sup>	0.0 <sup>h</sup>	21 <sup>h</sup>	81 <sup>h</sup>	

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8       $A_{hs} = \beta_{hs}/\beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_{ee}$

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3 : For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4 : For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5 : Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g<sup>h</sup>

Note 6:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.<sup>h</sup>

Table 8: Subtests for UMTS Release 6 HSUPA

UE E-DCH Category	Maximum E-DCH Codes Transmitted	Number of HARQ Processes	E-DCH TTI(ms)	Minimum Spreading Factor	Maximum E-DCH Transport Block Bits	Max Rate (Mbps)
1	1	4	10	4	7110	0.7296
2	2	8	2	4	2798	1.4592
	2	4	10	4	14484	
3	2	4	10	4	14484	1.4592
4	2	8	2	2	5772	2.9185
	2	4	10	2	20000	2.00
5	2	4	10	2	20000	2.00
(No DPDCH)	4	8	10	2SF2&2SF 4	11484	5.76
	4	4	2		20000	2.00
(No DPDCH)	4	8	2	2SF2&2SF 4	22996	?
	4	4	10		20000	?

NOTE: When 4 codes are transmitted in parallel, two codes shall be transmitted with SF2 and two with SF4. UE categories 1 to 6 support QPSK only. UE category 7 supports QPSK and 16QAM. (TS25.306-7.3.0).

Table 9: HSUPA UE category

**c) DC-HSDPA**

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a Second serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS 34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.0

**Table E.5.0: Levels for HSDPA connection setup**

Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13.

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.


The measurements were performed with a Fixed Reference Channel (FRC) H-Set 12 with QPSK.

Parameter	Value
Nominal average inf. bit rate	60 kbit/s
Inter-TTI Distance	1 TTI's
Number of HARQ Processes	6 Processes
Information Bit Payload	120 Bits
Number Code Blocks	1 Block
Binary Channel Bits Per TTI	960 Bits
Total Available SMLs in UE	19200 SMLs
Number of SMLs per HARQ Process	3200 SMLs
Coding Rate	0.15
Number of Physical Channel Codes	1

Table 10: settings of required H-Set 12 QPSK acc. to 3GPP 34.121

**Note:**

1. The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table above.
2. Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.

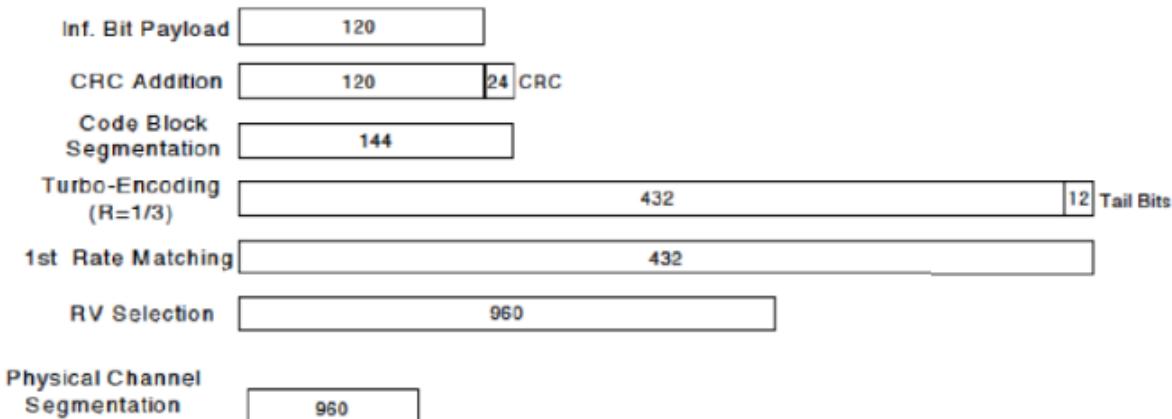
**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**

The following 4 Sub-tests for HSDPA were completed according to Release 5 procedures. A summary of subtest settings are illustrated below:

Sub-test <sup>o</sup>	$\beta_c^o$	$\beta_d^o$	$\beta_d^o(SF)^o$	$\beta_c^o/\beta_d^o$	$\beta_{hs}(1)^o$	CM(dB)(2) <sup>o</sup>	MPR (dB) <sup>o</sup>
1 <sup>o</sup>	2/15 <sup>o</sup>	15/15 <sup>o</sup>	64 <sup>o</sup>	2/15 <sup>o</sup>	4/15 <sup>o</sup>	0.0 <sup>o</sup>	0 <sup>o</sup>
2 <sup>o</sup>	12/15(3) <sup>o</sup>	15/15(3) <sup>o</sup>	64 <sup>o</sup>	12/15(3) <sup>o</sup>	24/15 <sup>o</sup>	1.0 <sup>o</sup>	0 <sup>o</sup>
3 <sup>o</sup>	15/15 <sup>o</sup>	8/15 <sup>o</sup>	64 <sup>o</sup>	15/8 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>
4 <sup>o</sup>	15/15 <sup>o</sup>	4/15 <sup>o</sup>	64 <sup>o</sup>	15/4 <sup>o</sup>	30/15 <sup>o</sup>	1.5 <sup>o</sup>	0.5 <sup>o</sup>

Note 1:  $\Delta$  ACK,  $\Delta$  NACK and  $\Delta$  CQI = 8       $A_{hs} = \beta_{hs}/\beta_c = 30/15$        $\beta_{hs} = 30/15 * \beta_c$   
 Note 2: CM=1 for  $\beta_c/\beta_d=12/15$ ,  $\beta_{hs}/\beta_c=24/15$ . For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.  
 Note 3: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c=11/15$  and  $\beta_d=15/15$ .

Up commands are set continuously to set the UE to Max power.

Note:

1. The Dual Carriers transmission only applies to HSDPA physical channels
2. The Dual Carriers belong to the same Node and are on adjacent carriers.
3. The Dual Carriers do not support MIMO to serve UEs configured for dual cell operation
4. The Dual Carriers operate in the same frequency band.
5. The device doesn't support the modulation of 16QAM in uplink but 64QAM in downlink for DC-HSDPA mode.
6. The device doesn't support carrier aggregation for it just can operate in Release 8.


### 7.2.3 WiFi Test Configuration

A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement.

### 7.2.4 Duty cycle


Wi-Fi 2.4GHz 802.11b:

Duty cycle= 98.67%

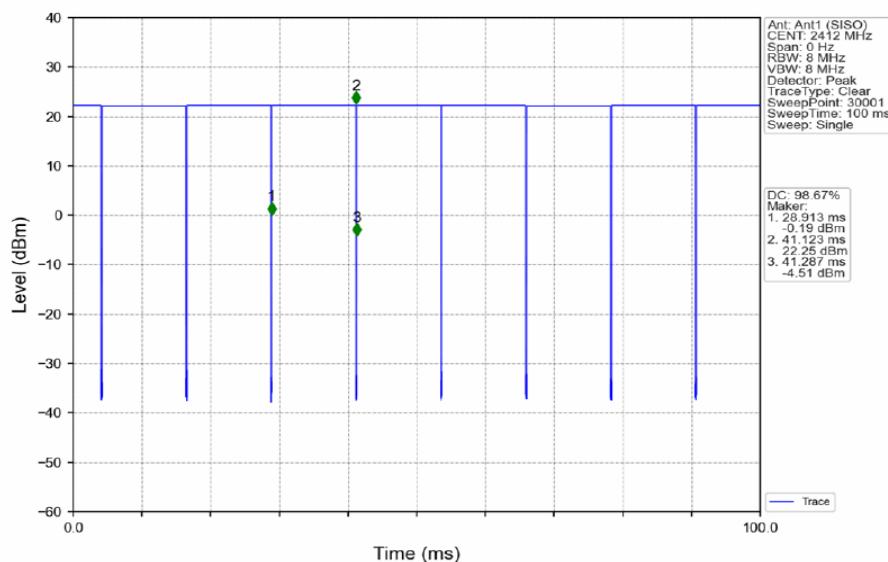

Wi-Fi 5GHz 802.11ac VHT80:

Duty cycle=92.89%

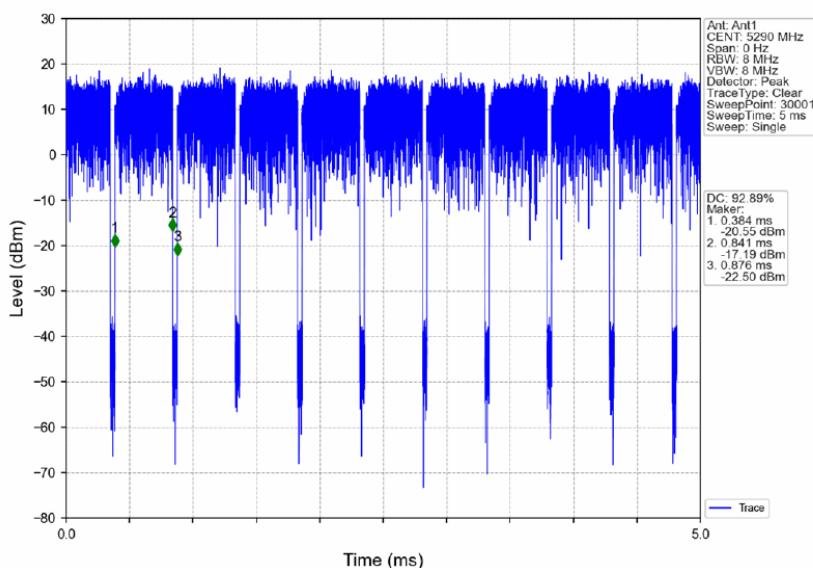

#### **7.2.4.1 Initial Test Position SAR Test Reduction Procedure**

DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures. The initial test position procedure is described in the following:

- 1) . When the reported SAR of the initial test position is  $\leq 0.4$  W/kg, further SAR measurement is not required for the other (remaining) test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band. SAR is also not required for that exposure configuration in the subsequent test configuration(s).
- 2) . When the reported SAR of the initial test position is  $> 0.4$  W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position using subsequent highest extrapolated or estimated 1-g SAR conditions determined by area scans or next closest/smallest test separation distance and maximum RF coupling test positions based on manufacturer justification, on the highest maximum output power channel, until the reported SAR is  $\leq 0.8$  W/kg or all required test positions (left, right, touch, tilt or subsequent surfaces and edges) are tested.
- 3) . For all positions/configurations tested using the initial test position and subsequent test positions, when the reported SAR is  $> 0.8$  W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2$  W/kg or all required channels are tested. a) Additional power measurements may be required for this step, which should be limited to those necessary for identifying the subsequent highest output power channels.

#### **7.2.4.2 Initial Test Configuration Procedures**

An initial test configuration is determined for OFDM transmission modes according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. SAR is measured using the highest measured maximum output power channel. For configurations with the same specified or measured maximum output power, additional transmission mode and test channel selection procedures are required. SAR test reduction for subsequent highest output test channels is determined according to *reported* SAR of the initial test configuration.

For next to the ear, hotspot mode and UMC mini-tablet exposure configurations where multiple test positions are required, the initial test position procedure is applied to minimize the number of test positions required for SAR measurement using the initial test configuration transmission mode. For fixed exposure conditions that do not have multiple SAR test positions, SAR is measured in the transmission mode determined by the initial test configuration.

When the *reported* SAR of the initial test configuration is  $> 0.8$  W/kg, SAR measurement is required for subsequent next highest measured output power channel(s) in the initial test configuration until *reported* SAR is  $\leq 1.2$  W/kg or all required channels are tested.

### 7.2.4.3 Subsequent Test Configuration Procedures

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units. The initial test position procedure is applied to next to the ear, UMPC mini-tablet and hotspot mode configurations. When the same maximum output power is specified for multiple transmission modes, additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. The subsequent test configuration and SAR measurement procedures are described in the following.

- 1) . When SAR test exclusion provisions of KDB Publication 447498 are applicable and SAR measurement is not required for the initial test configuration, SAR is also not required for the next highest maximum output power transmission mode subsequent test configuration(s) in that frequency band or aggregated band and exposure configuration.
- 2) . When the highest *reported* SAR for the initial test configuration (when applicable, include subsequent highest output channels), according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR is not required for that subsequent test configuration.
- 3) . The number of channels in the initial test configuration and subsequent test configuration can be different due to differences in channel bandwidth. When SAR measurement is required for a subsequent test configuration and the channel bandwidth is smaller than that in the initial test configuration, all channels in the subsequent test configuration that overlap with the larger bandwidth channel tested in the initial test configuration should be used to determine the highest maximum output power channel. This step requires additional power measurement to identify the highest maximum output power channel in the subsequent test configuration to determine SAR test reduction.
  - a) SAR should first be measured for the channel with highest measured output power in the subsequent test configuration.
  - b) SAR for subsequent highest measured maximum output power channels in the subsequent test configuration is required only when the *reported* SAR of the preceding higher maximum output power channel(s) in the subsequent test configuration is  $> 1.2$  W/kg or until all required channels are tested. i) For channels with the same measured maximum output power, SAR should be measured using the channel closest to the center frequency of the larger channel bandwidth channel in the initial test configuration.
- 4) . SAR measurements for the remaining highest specified maximum output power OFDM transmission mode configurations that have not been tested in the initial test configuration (highest maximum output) or subsequent test configuration(s) (subsequent next highest maximum output power) is determined by recursively applying the subsequent test configuration procedures in this section to the remaining configurations according to the following:
  - a) replace “subsequent test configuration” with “next subsequent test configuration” (i.e., subsequent next highest specified maximum output power configuration)
  - b) replace “initial test configuration” with “all tested higher output power configurations”

#### **7.2.4.4 2.4 GHz WiFi SAR Procedures**

Separate SAR procedures are applied to DSSS and OFDM configurations in the 2.4 GHz band to simplify DSSS test requirements. For 802.11b DSSS SAR measurements, DSSS SAR procedure applies to fixed exposure test position and initial test position procedure applies to multiple exposure test positions. When SAR measurement is required for an OFDM configuration, the initial test configuration, subsequent test configuration and initial test position procedures are applied. The SAR test exclusion requirements for 802.11g/n OFDM configurations are described in following.

- 802.11b DSSS SAR Test Requirements**

SAR is measured for 2.4 GHz 802.11b DSSS using either a fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) . When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) . When the reported SAR is  $> 0.8$  W/kg, SAR is required for that exposure configuration using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.

- 2.4 GHz 802.11g/n OFDM SAR Test Exclusion Requirements**

When SAR measurement is required for 2.4 GHz 802.11g/n OFDM configurations, the measurement and test reduction procedures for OFDM are applied (section 5.3, including sub-sections). SAR is not required for the following 2.4 GHz OFDM conditions.

- 1) . When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
- 2) . When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

- SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 g/n OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

#### 7.2.4.5 WiFi 5G SAR Test Procedures

##### 7.2.4.5.1 U-NII-1 and U-NII-2A Bands

For devices that operate in only one of the U-NII-1 and U-NII-2A bands, the normally required SAR procedures for OFDM configurations are applied. For devices that operate in both U-NII bands using the same transmitter and antenna(s), SAR test reduction is determined according to the following:

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. If the highest *reported* SAR for a test configuration is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for U-NII-1 band for that configuration (802.11 mode and exposure condition); otherwise, both bands are tested independently for SAR.
- 2) When different maximum output power is specified for the bands, begin SAR measurement in the band with higher specified maximum output power. The highest *reported* SAR for the tested configuration is adjusted by the ratio of lower to higher specified maximum output power for the two bands. When the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for the band with lower maximum output power in that test configuration; otherwise, both bands are tested independently for SAR.
- 3) The two U-NII bands may be aggregated to support a 160 MHz channel on channel number 50. Without additional testing, the maximum output power for this is limited to the lower of the maximum output power certified for the two bands. When SAR measurement is required for at least one of the bands and the highest *reported* SAR adjusted by the ratio of specified maximum output power of aggregated to standalone band is  $> 1.2 \text{ W/kg}$ , SAR is required for the 160 MHz channel. This procedure does not apply to an aggregated band with maximum output higher than the standalone band(s); the aggregated band must be tested independently for SAR. SAR is not required when the 160 MHz channel is operating at a reduced maximum power and also qualifies for SAR test exclusion.

##### 7.2.4.5.2 U-NII-2C and U-NII-3 Bands

The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, all channels that operate at 5.60 – 5.65 GHz must be included to apply the SAR test reduction and measurement procedures.

When the same transmitter and antenna(s) are used for U-NII-2C band and U-NII-3 band or 5.8 GHz band of §15.247, the bands may be aggregated to enable additional channels with 20, 40 or 80 MHz bandwidth to span across the band gap, as illustrated in Appendix B. The maximum output power for the additional band gap channels is limited to the lower of those certified for the bands. Unless band gap channels are permanently disabled, they must be considered for SAR testing. The frequency range covered by these bands is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. To maintain SAR measurement accuracy and to facilitate test reduction, the channels in U-NII-2C band above 5.65 GHz may be grouped with the 5.8 GHz channels in U-NII-3 or §15.247 band to enable two SAR probe calibration frequency points to cover the bands, including the band gap channels. When band gap channels are supported and the bands are not aggregated for SAR testing, band gap channels must be considered independently in each band according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

#### **7.2.4.5.3 OFDM Transmission Mode SAR Test Configuration and Channel Selection Requirements**

The initial test configuration for 5 GHz OFDM transmission modes is determined by the 802.11 configuration with the highest maximum output power specified for production units, including tune-up tolerance, in each standalone and aggregated frequency band. SAR for the initial test configuration is measured using the highest maximum output power channel determined by the default power measurement procedures. When multiple configurations in a frequency band have the same specified maximum output power, the initial test configuration is determined according to the following steps applied sequentially.

- 1) The largest channel bandwidth configuration is selected among the multiple configurations with the same specified maximum output power.
- 2) If multiple configurations have the same specified maximum output power and largest channel bandwidth, the lowest order modulation among the largest channel bandwidth configurations is selected.
- 3) If multiple configurations have the same specified maximum output power, largest channel bandwidth and lowest order modulation, the lowest data rate configuration among these configurations is selected.
- 4) When multiple transmission modes (802.11a/g/n/ac) have the same specified maximum output power, largest channel bandwidth, lowest order modulation and lowest data rate, the lowest order 802.11 mode is selected; i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n.  
After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following. These channel selection procedures apply to both the initial test configuration and subsequent test configuration(s), with respect to the default power measurement procedures or additional power measurements required for further SAR test reduction. The same procedures also apply to subsequent highest output power channel(s) selection.
  - The channel closest to mid-band frequency is selected for SAR measurement.
  - For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.

#### **7.2.4.5.4 SAR Test Requirements for OFDM configurations**

When SAR measurement is required for 802.11 a/n/ac OFDM configurations, each standalone and frequency aggregated band is considered separately for SAR test reduction. When the same transmitter and antenna(s) are used for U-NII-1 and U-NII-2A bands, additional SAR test reduction applies. When band gap channels between U-NII-2C band and 5.8 GHz U-NII-3 or §15.247 band are supported, the highest maximum output power transmission mode configuration and maximum output power channel across the bands must be used to determine SAR test reduction, according to the initial test configuration and subsequent test configuration requirements. In applying the initial test configuration and subsequent test configuration procedures, the 802.11 transmission configuration with the highest specified maximum output power and the channel within a test configuration with the highest measured maximum output power should be clearly distinguished to apply the procedures.

### 7.2.5 LTE Test Configuration

LTE modes were tested according to FCC KDB 941225 D05 publication. Please see notes after the tabulated SAR data for required test configurations. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The Anritsu MT8820C was used for LTE output power measurements and SAR testing. Max power control was used so the UE transmits with maximum output power during SAR testing. SAR must be measured with the maximum TTI (transmit time interval) supported by the device in each LTE configuration.


#### TDD LTE test consideration

For Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special subframe configuration 7.

LTE TDD Band support 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations and Table 4.2-1 for Special subframe configurations.

Frame structure type 2:

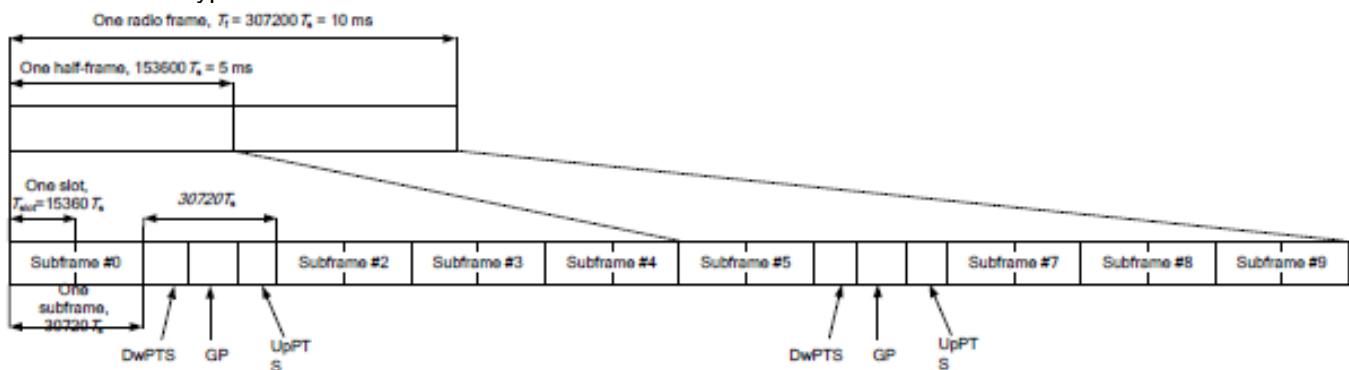

Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	6592.Ts			7680.Ts		
1	19760.Ts			20480.Ts		
2	21952.Ts			23040.Ts		
3	24144.Ts			25600.Ts		
4	26336.Ts			7680.Ts		
5	6592.Ts			20480.Ts		
6	19760.Ts			23040.Ts		
7	21952.Ts			25600.Ts		
8	24144.Ts			-		-
9	13168.Ts			-		-

Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Calculated Duty Cycle=[Extended cyclic prefix in uplink x (Ts) x # of S + # of U]/10ms

Uplink-Downlink Configuration	Downlink-to-Uplink Switch-point Periodicity	Subframe Number										Calculated Duty Cycle (%)
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33

#### A) Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

#### B) MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

Modulation	Channel bandwidth / Transmission bandwidth (N <sub>RB</sub> )						MPR (dB)
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3

#### C) A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

## SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101  
Rev.: 01  
Page: 60 of 89

### D) Largest channel bandwidth standalone SAR test requirements

#### 1) QPSK with 1 RB allocation

Start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is  $\leq 0.8$  W/kg, testing of the remaining RB offset configurations and required test channels is not required for 1 RB allocation; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is  $> 1.45$  W/kg, SAR is required for all three RB offset configurations for that required test channel.

#### 2) QPSK with 50% RB allocation

The procedures required for 1 RB allocation in 1) are applied to measure the SAR for QPSK with 50% RB allocation.

#### 3) QPSK with 100% RB allocation

For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation in 1) and 2) are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

#### 4) Higher order modulations

For each modulation besides QPSK; e.g., 16-QAM, 64-QAM, apply the QPSK procedures in above sections to determine the QAM configurations that may need SAR measurement. For each configuration identified as required for testing, SAR is required only when the highest maximum output power for the configuration in the higher order modulation is  $> \frac{1}{2}$  dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is  $> 1.45$  W/kg.

### E) Other channel bandwidth standalone SAR test requirements

For the other channel bandwidths used by the device in a frequency band, apply all the procedures required for the largest channel bandwidth in section A) to determine the channels and RB configurations that need SAR testing and only measure SAR when the highest maximum output power of a configuration requiring testing in the smaller channel bandwidth is  $> \frac{1}{2}$  dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is  $> 1.45$  W/kg.

## 8 Test Result

### 8.1 Measurement of RF Conducted Power

The detailed conducted power table can refer to Appendix E.

Note:

- 1) For GSM SAR the time-based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:


No. of timeslots	1	2	3	4
Duty Cycle	1:8.3	1:4.15	1:2.77	1:2.075
Time based avg. power compared to slotted avg. power	-9.19	-6.18	-4.42	-3.17

- 2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:  
Frame-averaged power =  $10 \times \log (\text{Burst-averaged power mW} \times \text{Slot used} / 8)$
- 3) When the maximum output power variation across the required test channels is  $> \frac{1}{2}$  dB, instead of the middle channel, the highest output power channel must be used
- 4) Conducted power measurement results of downlink LTE carrier aggregation are provided to quantify downlink only carrier aggregation SAR test exclusion per KDB 941225 D05A. Uplink maximum output power is measured with downlink carrier aggregation active, using the channel with highest measured maximum output power when downlink carrier aggregation is inactive, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than  $\frac{1}{4}$  dB higher than the maximum output power measured when downlink carrier aggregation inactive, therefore SAR evaluation with downlink carrier aggregation can be excluded.

5) . For conducted power of WIFI must be measured at each transmit antenna port according to the DSSS and OFDM transmission configurations in each standalone and aggregated frequency band. For each transmission mode configuration, power must be measured for the highest and lowest channels; and at the mid-band channel(s) when there are at least 3 channels. For configurations with multiple mid-band channels, due to an even number of channels, both channels should be measured. Power measurement is required for the transmission mode configuration with the highest maximum output power specified for production units.

- 1) When the same highest maximum output power specification applies to multiple transmission modes, the largest channel bandwidth configuration with the lowest order modulation and lowest data rate is measured.
- 2) When the same highest maximum output power is specified for multiple largest channel bandwidth configurations with the same lowest order modulation or lowest order modulation and lowest data rate, power measurement is required for all equivalent 802.11 configurations with the same maximum output power.

6) . The conducted power of BT is measured with RMS detector.  
BT 3DH5 Duty Cycle=77.07%

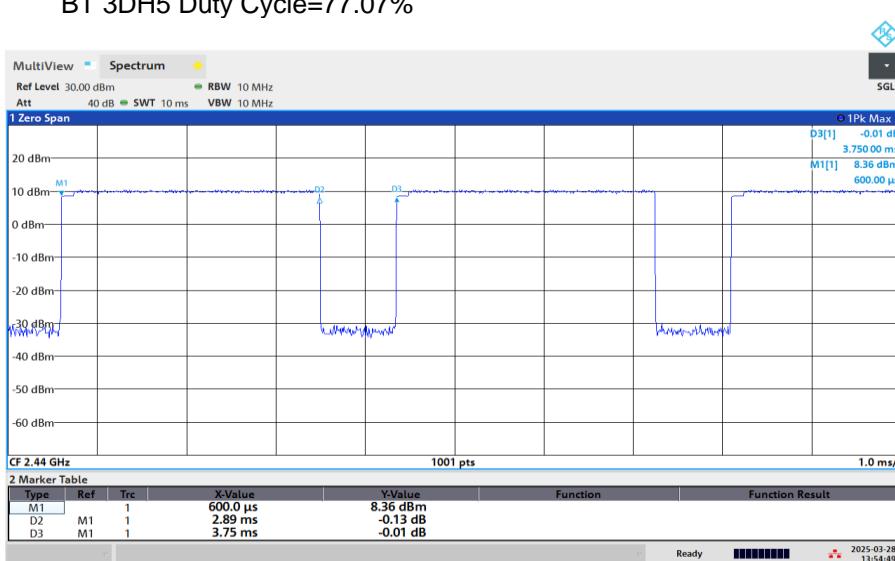

## 8.2 Measurement of SAR Data

**Note:**

- 1) The maximum reported SAR value is marked in **bold**. Graph results refer to Appendix B
- 2) Per KDB 447498 D04, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - $\leq 0.8\text{W/kg}$  for 1-g or  $2.0\text{W/kg}$  for 10-g respectively, when the transmission band is  $\leq 100\text{MHz}$ .
  - $\leq 0.6\text{ W/kg}$  or  $1.5\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is between  $100\text{ MHz}$  and  $200\text{ MHz}$ .
  - $\leq 0.4\text{ W/kg}$  or  $1.0\text{ W/kg}$ , for 1-g or 10-g respectively, when the transmission band is  $\geq 200\text{ MHz}$ .
- 3) Maximum bandwidth does not support at least three non-overlapping channels in certain channel bandwidths. When a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

**WiFi 2.4G:**

- 1) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR test for the other 802.11 modes are not required.

**WiFi 5G:**

- 1) When the same maximum output power is specified for both bands, begin SAR measurement in U-NII-2A band by applying the OFDM SAR requirements. As the highest reported SAR for a test configuration is  $\leq 1.2\text{ W/kg}$ , SAR is not required for U-NII-1 band for that configuration.
- 2) For Wi-Fi 5G, U-NII-2A (5250-5350 MHz) and U-NII-2C (5470-5725 MHz) bands does not support hotspot function.
- 3) When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ , SAR test for the other 802.11 modes are not required.

**NFC:**

- 1) NFC SAR is measured for all edges and surfaces of the device.
- 2) NFC 13.56MHz antenna port is not available on the device to support conducted power measurement, therefore the measured results are referred to as reported SAR.
- 3) NFC SAR test tissue-simulating liquid parameter refer to IEC/IEEE 62209-1528 2020.

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 64 of 89

## 8.2.1 SAR Result of GSM850

GSM850 SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm)										
Back side	GPRS 4TS	190/836.6	1:2.075	0.309	0.18	24.33	25.00	1.167	0.361	22.9
Bottom side	GPRS 4TS	190/836.6	1:2.075	0.762	0.05	24.33	25.00	1.167	0.889	22.9
Bottom side	GPRS 4TS	128/824.2	1:2.075	0.813	-0.04	24.09	25.00	1.233	<b>1.003</b>	22.9
Bottom side-Repeat SAR	GPRS 4TS	128/824.2	1:2.075	0.809	0.05	24.09	25.00	1.233	0.998	22.9
Bottom side	GPRS 4TS	251/848.8	1:2.075	0.595	-0.11	24.05	25.00	1.245	0.740	22.9
Sensor off of Test data										
Back side-19mm	GPRS 4TS	190/836.6	1:2.075	0.154	0.12	29.48	30.00	1.127	0.174	22.9
Right side-0mm	GPRS 4TS	190/836.6	1:2.075	0.062	0.13	29.48	30.00	1.127	0.070	22.9
Bottom side-19mm	GPRS 4TS	190/836.6	1:2.075	0.122	-0.11	29.48	30.00	1.127	0.138	22.9

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	128/824.2	0.813	0.809	1.004944376	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

### 8.2.2 SAR Result of GSM1900

GSM1900 SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm)										
Back side	GPRS 4TS	661/1880	1:2.075	0.346	-0.07	19.58	20.00	1.102	0.381	23.1
Bottom side	GPRS 4TS	661/1880	1:2.075	0.932	0.02	19.58	20.00	1.102	1.027	23.1
Bottom side	GPRS 4TS	512/1850.2	1:2.075	1.080	0.05	19.57	20.00	1.104	<b>1.192</b>	23.1
Bottom side-Repeat SAR	GPRS 4TS	512/1850.2	1:2.075	1.050	-0.01	19.57	20.00	1.104	1.159	23.1
Bottom side	GPRS 4TS	810/1909.8	1:2.075	0.856	-0.06	19.49	20.00	1.125	0.963	23.1
Sensor off of Test data										
Back side-19mm	GPRS 4TS	661/1880	1:2.075	0.122	0.05	26.16	27.00	1.213	0.148	23.1
Right side-0mm	GPRS 4TS	661/1880	1:2.075	0.011	0.17	26.16	27.00	1.213	0.013	23.1
Bottom side-19mm	GPRS 4TS	661/1880	1:2.075	0.285	-0.13	26.16	27.00	1.213	0.346	23.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated		Ratio	2 <sup>nd</sup> Repeated		3 <sup>rd</sup> Repeated	
			SAR (1g)			SAR (1g)	SAR (1g)	SAR (1g)	SAR (1g)
Bottom side	512/1850.2	1.08	1.05		1.028571429	N/A	N/A	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

### 8.2.3 SAR Result of WCDMA Band II

WCDMA Band II SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm)										
Back side	RMC	9400/1880	1:1	0.528	-0.05	19.44	20.00	1.138	0.601	23.1
Bottom side	RMC	9400/1880	1:1	0.784	0.11	19.44	20.00	1.138	0.892	23.1
Bottom side	RMC	9262/1852.4	1:1	0.556	-0.14	19.33	20.00	1.167	0.649	23.1
Bottom side	RMC	9538/1907.6	1:1	0.900	0.06	19.36	20.00	1.159	<b>1.043</b>	23.1
Bottom side-Repeat SAR	RMC	9538/1907.6	1:1	0.896	-0.11	19.36	20.00	1.159	1.038	23.1
Sensor off of Test data										
Back side-19mm	RMC	9400/1880	1:1	0.092	0.02	23.88	24.00	1.028	0.095	23.1
Right side-0mm	RMC	9400/1880	1:1	0.096	0.07	23.88	24.00	1.028	0.099	23.1
Bottom side-19mm	RMC	9400/1880	1:1	0.189	-0.11	23.88	24.00	1.028	0.194	23.1

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	9538/1907.6	0.9	0.896	1.004464286	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**8.2.4 SAR Result of WCDMA Band IV**

WCDMA Band IV SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm)										
Back side	RMC	1412/1732.4	1:1	0.431	-0.14	21.71	22.00	1.069	0.461	23.0
Bottom side	RMC	1412/1732.4	1:1	0.855	0.09	21.71	22.00	1.069	0.914	23.0
Bottom side	RMC	1312/1712.4	1:1	0.673	-0.16	21.55	22.00	1.109	0.746	23.0
Bottom side	RMC	1513/1752.6	1:1	1.080	-0.09	21.67	22.00	1.079	<b>1.165</b>	23.0
Bottom side-Repeat SAR	RMC	1513/1752.6	1:1	1.060	0.03	21.67	22.00	1.079	1.144	23.0
Sensor off of Test data										
Back side-19mm	RMC	1412/1732.4	1:1	0.058	-0.02	23.80	24.00	1.047	0.061	23.0
Right side-0mm	RMC	1412/1732.4	1:1	0.047	0.01	23.80	24.00	1.047	0.049	23.0
Bottom side-19mm	RMC	1412/1732.4	1:1	0.111	-0.09	23.80	24.00	1.047	0.116	23.0

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	1513/1752.6	1.08	1.06	1.018867925	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

# SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 68 of 89

## 8.2.5 SAR Result of WCDMA Band V

WCDMA Band V SAR Test Record										
Test position	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm)										
Back side	RMC	4182/836.4	1:1	0.436	0.01	21.64	22.00	1.086	0.474	22.9
Bottom side	RMC	4182/836.4	1:1	0.973	0.15	21.64	22.00	1.086	1.057	22.9
Bottom side-Repeat SAR	RMC	4182/836.4	1:1	0.969	0.05	21.64	22.00	1.086	1.053	22.9
Bottom side	RMC	4132/826.4	1:1	0.953	-0.10	21.56	22.00	1.107	1.055	22.9
Bottom side	RMC	4233/846.6	1:1	0.942	-0.03	21.51	22.00	1.119	1.055	22.9
Sensor off of Test data										
Back side-19mm	RMC	4182/836.4	1:1	0.108	0.03	23.79	24.00	1.050	0.113	22.9
Right side-0mm	RMC	4182/836.4	1:1	0.012	-0.14	23.79	24.00	1.050	0.013	22.9
Bottom side-19mm	RMC	4182/836.4	1:1	0.087	-0.13	23.79	24.00	1.050	0.091	22.9

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	4182/836.4	0.973	0.969	1.004127967	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 8.2.6 SAR Result of LTE Band 7

LTE Band 7 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	21100/2535	1:1	0.455	-0.01	16.91	18.00	1.285	0.585	22.8
Bottom side	20	QPSK 1_0	21100/2535	1:1	0.850	0.19	16.91	18.00	1.285	1.092	22.8
Bottom side	20	QPSK 1_0	20850/2510	1:1	0.834	-0.17	16.74	18.00	1.337	1.115	22.8
Bottom side	20	QPSK 1_0	21350/2560	1:1	0.896	0.09	16.76	18.00	1.330	1.192	22.8
Bottom side-Repeat SAR	20	QPSK 1_0	21350/2560	1:1	0.893	-0.07	16.76	18.00	1.330	1.188	22.8
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	21100/2535	1:1	0.403	-0.06	16.85	18.00	1.303	0.525	22.8
Bottom side	20	QPSK 50_0	21100/2535	1:1	0.793	-0.09	16.85	18.00	1.303	1.033	22.8
Bottom side	20	QPSK 50_0	20850/2510	1:1	0.769	-0.06	16.82	18.00	1.312	1.009	22.8
Bottom side	20	QPSK 50_0	21350/2560	1:1	0.811	0.11	16.74	18.00	1.337	1.084	22.8
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	21100/2535	1:1	0.658	-0.19	16.82	18.00	1.312	0.863	22.8
Sensor off of Test data(1RB)											
Back side-19mm	20	QPSK 1_0	21100/2535	1:1	0.223	0.14	22.74	24.00	1.337	0.298	22.8
Right side-0mm	20	QPSK 1_0	21100/2535	1:1	0.093	0.14	22.74	24.00	1.337	0.124	22.8
Bottom side-19mm	20	QPSK 1_0	21100/2535	1:1	0.212	0.02	22.74	24.00	1.337	0.283	22.8
Sensor off of Test data(50%RB)											
Back side-19mm	20	QPSK 50_0	21100/2535	1:1	0.215	-0.14	21.75	23.00	1.334	0.287	22.8
Right side-0mm	20	QPSK 50_0	21100/2535	1:1	0.088	-0.19	21.75	23.00	1.334	0.117	22.8
Bottom side-19mm	20	QPSK 50_0	21100/2535	1:1	0.204	0.02	21.75	23.00	1.334	0.272	22.8

## 8.2.7 SAR Result of LTE Band 12

LTE Band 12 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	10	QPSK 1_0	23095/707.5	1:1	0.281	-0.16	22.15	23.00	1.216	0.342	22.7
Bottom side	10	QPSK 1_0	23095/707.5	1:1	0.879	0.01	22.15	23.00	1.216	<b>1.069</b>	22.7
Bottom side-Repeat SAR	10	QPSK 1_0	23095/707.5	1:1	0.875	-0.16	22.15	23.00	1.216	1.064	22.7
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	23095/707.5	1:1	0.240	0.13	22.05	23.00	1.245	0.299	22.7
Bottom side	10	QPSK 25_0	23095/707.5	1:1	0.730	0.09	22.05	23.00	1.245	0.908	22.7
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	10	QPSK 50_0	23095/707.5	1:1	0.702	0.02	22.08	23.00	1.236	0.868	22.7
Sensor off of Test data(1RB)											
Back side-19mm	10	QPSK 1_0	23095/707.5	1:1	0.059	-0.15	23.11	24.00	1.227	0.072	22.7
Right side-0mm	10	QPSK 1_0	23095/707.5	1:1	0.060	-0.17	23.11	24.00	1.227	0.074	22.7
Bottom side-19mm	10	QPSK 1_0	23095/707.5	1:1	0.057	-0.16	23.11	24.00	1.227	0.070	22.7
Sensor off of Test data(50%RB)											
Back side-19mm	10	QPSK 25_0	23095/707.5	1:1	0.053	-0.17	22.05	23.00	1.245	0.066	22.7
Right side-0mm	10	QPSK 25_0	23095/707.5	1:1	0.055	-0.05	22.05	23.00	1.245	0.068	22.7
Bottom side-19mm	10	QPSK 25_0	23095/707.5	1:1	0.049	0.04	22.05	23.00	1.245	0.061	22.7

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	23095/707.5	0.879	0.875	1.004571429	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 8.2.8 SAR Result of LTE Band 13

LTE Band 13 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	10	QPSK 1_0	23230/782	1:1	0.338	0.05	22.09	23.00	1.233	0.417	22.7
Bottom side	10	QPSK 1_0	23230/782	1:1	0.866	0.04	22.09	23.00	1.233	1.068	22.7
Bottom side-Repeat SAR	10	QPSK 1_0	23230/782	1:1	0.865	-0.03	22.09	23.00	1.233	1.067	22.7
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	23230/782	1:1	0.211	0.04	21.92	23.00	1.282	0.271	22.7
Bottom side	10	QPSK 25_0	23230/782	1:1	0.726	0.18	21.92	23.00	1.282	0.931	22.7
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	10	QPSK 50_0	23230/782	1:1	0.692	0.17	21.91	23.00	1.285	0.889	22.7
Sensor off of Test data(1RB)											
Back side-19mm	10	QPSK 1_0	23230/782	1:1	0.049	0.12	22.86	24.00	1.300	0.064	22.7
Right side-0mm	10	QPSK 1_0	23230/782	1:1	0.012	-0.05	22.86	24.00	1.300	0.016	22.7
Bottom side-19mm	10	QPSK 1_0	23230/782	1:1	0.047	-0.15	22.86	24.00	1.300	0.061	22.7
Sensor off of Test data(50%RB)											
Back side-19mm	10	QPSK 25_0	23230/782	1:1	0.045	-0.04	21.93	23.00	1.279	0.058	22.7
Right side-0mm	10	QPSK 25_0	23230/782	1:1	0.005	-0.05	21.93	23.00	1.279	0.006	22.7
Bottom side-19mm	10	QPSK 25_0	23230/782	1:1	0.043	-0.08	21.93	23.00	1.279	0.055	22.7

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	23230/782	0.866	0.865	1.001156069	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 8.2.9 SAR Result of LTE Band 14

LTE Band 14 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	10	QPSK 1_0	23330/793	1:1	0.270	-0.12	21.95	23.00	1.274	0.344	22.7
Bottom side	10	QPSK 1_0	23330/793	1:1	0.908	-0.11	21.95	23.00	1.274	1.156	22.7
Bottom side-Repeat SAR	10	QPSK 1_0	23330/793	1:1	0.905	0.08	21.95	23.00	1.274	1.153	22.7
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	23330/793	1:1	0.194	-0.15	21.92	23.00	1.282	0.249	22.7
Bottom side	10	QPSK 25_0	23330/793	1:1	0.795	0.16	21.92	23.00	1.282	1.019	22.7
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	10	QPSK 50_0	23330/793	1:1	0.771	0.17	21.92	23.00	1.282	0.989	22.7
Sensor off of Test data(1RB)											
Back side-19mm	10	QPSK 1_0	23330/793	1:1	0.053	0.14	22.92	24.00	1.282	0.068	22.7
Right side-0mm	10	QPSK 1_0	23330/793	1:1	0.005	0.17	22.92	24.00	1.282	0.006	22.7
Bottom side-19mm	10	QPSK 1_0	23330/793	1:1	0.042	-0.01	22.92	24.00	1.282	0.054	22.7
Sensor off of Test data(50%RB)											
Back side-19mm	10	QPSK 25_0	23330/793	1:1	0.049	-0.06	21.86	23.00	1.300	0.064	22.7
Right side-0mm	10	QPSK 25_0	23330/793	1:1	0.003	-0.02	21.86	23.00	1.300	0.004	22.7
Bottom side-19mm	10	QPSK 25_0	23330/793	1:1	0.037	0.14	21.86	23.00	1.300	0.048	22.7

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	23330/793	0.908	0.905	1.003314917	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 73 of 89

## 8.2.10 SAR Result of LTE Band 25

LTE Band 25 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	26365/1882.5	1:1	0.460	0.02	20.15	21.00	1.216	0.559	23.1
Bottom side	20	QPSK 1_0	26365/1882.5	1:1	0.823	0.01	20.15	21.00	1.216	1.001	23.1
Bottom side	20	QPSK 1_0	26140/1860	1:1	0.633	0.06	20.10	21.00	1.230	0.779	23.1
Bottom side	20	QPSK 1_0	26590/1905	1:1	0.937	-0.03	20.08	21.00	1.236	1.158	23.1
Bottom side-Repeat SAR	20	QPSK 1_0	26590/1905	1:1	0.935	-0.08	20.08	21.00	1.236	1.156	23.1
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	26365/1882.5	1:1	0.445	-0.06	20.00	21.00	1.259	0.560	23.1
Bottom side	20	QPSK 50_0	26365/1882.5	1:1	0.728	0.19	20.00	21.00	1.259	0.916	23.1
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	26365/1882.5	1:1	0.689	0.19	19.98	21.00	1.265	0.871	23.1
Sensor off of Test data(1RB)											
Back side-19mm	20	QPSK 1_0	26365/1882.5	1:1	0.088	0.00	23.15	24.00	1.216	0.107	23.1
Right side-0mm	20	QPSK 1_0	26365/1882.5	1:1	0.073	-0.15	23.15	24.00	1.216	0.089	23.1
Bottom side-19mm	20	QPSK 1_0	26365/1882.5	1:1	0.222	0.00	23.15	24.00	1.216	0.270	23.1
Sensor off of Test data(50%RB)											
Back side-19mm	20	QPSK 50_0	26365/1882.5	1:1	0.063	-0.04	22.07	23.00	1.239	0.078	23.1
Right side-0mm	20	QPSK 50_0	26365/1882.5	1:1	0.058	-0.02	22.07	23.00	1.239	0.072	23.1
Bottom side-19mm	20	QPSK 50_0	26365/1882.5	1:1	0.189	0.09	22.07	23.00	1.239	0.234	23.1

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	26590/1905	0.937	0.935	1.002139037	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

### 8.2.11 SAR Result of LTE Band 26

LTE Band 26 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	15	QPSK 1_0	26865/831.5	1:1	0.542	0.08	22.15	23.00	1.216	0.659	22.9
Bottom side	15	QPSK 1_0	26865/831.5	1:1	0.971	0.18	22.15	23.00	1.216	<b>1.181</b>	22.9
Bottom side-Repeat SAR	15	QPSK 1_0	26865/831.5	1:1	0.966	-0.02	22.15	23.00	1.216	1.175	22.9
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	15	QPSK 36_0	26865/831.5	1:1	0.504	0.08	21.96	23.00	1.271	0.640	22.9
Bottom side	15	QPSK 36_0	26865/831.5	1:1	0.852	0.08	21.96	23.00	1.271	1.083	22.9
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	15	QPSK 75_0	26865/831.5	1:1	0.819	0.07	21.91	23.00	1.285	1.053	22.9
Sensor off of Test data(1RB)											
Back side-19mm	15	QPSK 1_0	26865/831.5	1:1	0.112	0.05	23.10	24.00	1.230	0.138	22.9
Right side-0mm	15	QPSK 1_0	26865/831.5	1:1	0.041	-0.19	23.10	24.00	1.230	0.050	22.9
Bottom side-19mm	15	QPSK 1_0	26865/831.5	1:1	0.076	-0.14	23.10	24.00	1.230	0.094	22.9
Sensor off of Test data(50%RB)											
Back side-19mm	15	QPSK 36_0	26865/831.5	1:1	0.087	-0.13	22.07	23.00	1.239	0.108	22.9
Right side-0mm	15	QPSK 36_0	26865/831.5	1:1	0.023	0.02	22.07	23.00	1.239	0.028	22.9
Bottom side-19mm	15	QPSK 36_0	26865/831.5	1:1	0.056	0.14	22.07	23.00	1.239	0.069	22.9

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	26865/831.5	0.971	0.966	1.005175983	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 75 of 89

## 8.2.12 SAR Result of LTE Band 30

LTE Band 30 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	10	QPSK 1_0	27710/2310	1:1	0.628	-0.10	20.10	21.00	1.230	0.773	22.8
Bottom side	10	QPSK 1_0	27710/2310	1:1	0.912	-0.04	20.10	21.00	1.230	1.122	22.8
Bottom side-Repeat SAR	10	QPSK 1_0	27710/2310	1:1	0.908	0.06	20.10	21.00	1.230	1.117	22.8
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	10	QPSK 25_0	27710/2310	1:1	0.559	0.09	19.98	21.00	1.265	0.707	22.8
Bottom side	10	QPSK 25_0	27710/2310	1:1	0.734	-0.08	19.98	21.00	1.265	0.928	22.8
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	10	QPSK 50_0	27710/2310	1:1	0.689	0.09	19.95	21.00	1.274	0.877	22.8
Sensor off of Test data(1RB)											
Back side-19mm	10	QPSK 1_0	27710/2310	1:1	0.262	-0.17	22.62	24.00	1.374	0.360	22.8
Right side-0mm	10	QPSK 1_0	27710/2310	1:1	0.112	0.16	22.62	24.00	1.374	0.154	22.8
Bottom side-19mm	10	QPSK 1_0	27710/2310	1:1	0.484	0.03	22.62	24.00	1.374	0.665	22.8
Sensor off of Test data(50%RB)											
Back side-19mm	10	QPSK 25_0	27710/2310	1:1	0.196	0.03	21.59	23.00	1.384	0.271	22.8
Right side-0mm	10	QPSK 25_0	27710/2310	1:1	0.079	-0.05	21.59	23.00	1.384	0.109	22.8
Bottom side-19mm	10	QPSK 25_0	27710/2310	1:1	0.431	-0.13	21.59	23.00	1.384	0.596	22.8

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	27710/2310	0.912	0.908	1.004405286	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 8.2.13 SAR Result of LTE Band 40

LTE Band 40 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	39150/2350	1:1	0.723	0.11	23.75	24.00	1.059	0.766	23
Right side	20	QPSK 1_0	39150/2350	1:1	0.102	-0.17	23.75	24.00	1.059	0.108	23
Bottom side	20	QPSK 1_0	39150/2350	1:1	1.090	0.14	23.75	24.00	1.059	1.155	23
Bottom side-Repeat SAR	20	QPSK 1_0	39150/2350	1:1	1.050	-0.07	23.75	24.00	1.059	1.112	23
Bottom side	20	QPSK 1_0	38750/2310	1:1	1.000	-0.09	23.41	24.00	1.146	1.146	23
Bottom side	20	QPSK 1_0	39550/2390	1:1	1.030	0.11	23.72	24.00	1.067	1.099	23
Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	39150/2350	1:1	0.566	0.11	22.62	23.00	1.091	0.618	23
Right side	20	QPSK 50_0	39150/2350	1:1	0.072	0.13	22.62	23.00	1.091	0.079	23
Bottom side	20	QPSK 50_0	39150/2350	1:1	0.732	-0.02	22.62	23.00	1.091	0.799	23
Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	39150/2350	1:1	0.708	-0.11	22.55	23.00	1.109	0.785	23

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	39150/2350	1.09	1.05	1.038095238	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 77 of 89

### 8.2.14 SAR Result of LTE Band 41

LTE Band 41 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	40620/2593	1:1.58	0.215	-0.17	15.19	16.00	1.205	0.259	22.8
Bottom side	20	QPSK 1_0	40620/2593	1:1.58	0.704	-0.12	15.19	16.00	1.205	0.848	22.8
Bottom side	20	QPSK 1_0	39750/2506	1:1.58	0.479	0.07	15.12	16.00	1.225	0.587	22.8
Bottom side	20	QPSK 1_0	40185/2549.5	1:1.58	0.693	-0.11	15.06	16.00	1.242	0.860	22.8
Bottom side	20	QPSK 1_0	41055/2636.5	1:1.58	0.734	0.04	15.14	16.00	1.219	0.895	22.8
Bottom side	20	QPSK 1_0	41490/2680	1:1.58	0.879	-0.04	15.07	16.00	1.239	<b>1.089</b>	22.8
Bottom side-Repeat SAR	20	QPSK 1_0	41490/2680	1:1.58	0.875	-0.11	15.07	16.00	1.239	1.084	22.8
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	40620/2593	1:1.58	0.150	0.16	15.15	16.00	1.216	0.182	22.8
Bottom side	20	QPSK 50_0	40620/2593	1:1.58	0.639	-0.02	15.15	16.00	1.216	0.777	22.8
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	40620/2593	1:1.58	0.605	0.18	15.12	16.00	1.225	0.741	22.8
Sensor off of Test data(1RB)											
Back side-19mm	20	QPSK 1_0	40620/2593	1:1.58	0.149	0.02	23.11	24.00	1.227	0.183	22.8
Right side-0mm	20	QPSK 1_0	40620/2593	1:1.58	0.069	0.10	23.11	24.00	1.227	0.085	22.8
Bottom side-19mm	20	QPSK 1_0	40620/2593	1:1.58	0.132	0.01	23.11	24.00	1.227	0.162	22.8
Sensor off of Test data(50%RB)											
Back side-19mm	20	QPSK 50_0	40620/2593	1:1.58	0.141	-0.01	22.11	23.00	1.227	0.173	22.8
Right side-0mm	20	QPSK 50_0	40620/2593	1:1.58	0.063	0.17	22.11	23.00	1.227	0.077	22.8
Bottom side-19mm	20	QPSK 50_0	40620/2593	1:1.58	0.125	-0.19	22.11	23.00	1.227	0.153	22.8

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	41490/2680	0.879	0.875	1.004571429	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

## 8.2.15 SAR Result of LTE Band 66

LTE Band 66 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	132322/1745	1:1	0.382	0.19	20.50	21.00	1.122	0.429	23
Bottom side	20	QPSK 1_0	132322/1745	1:1	0.757	-0.08	20.50	21.00	1.122	0.849	23
Bottom side	20	QPSK 1_0	132072/1720	1:1	0.564	-0.17	20.21	21.00	1.199	0.677	23
Bottom side	20	QPSK 1_0	132572/1770	1:1	0.982	-0.04	20.19	21.00	1.205	<b>1.183</b>	23
Bottom side-Repeat SAR	20	QPSK 1_0	132572/1770	1:1	0.979	-0.12	20.19	21.00	1.205	1.180	23
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	132322/1745	1:1	0.362	-0.01	20.40	21.00	1.148	0.416	23
Bottom side	20	QPSK 50_0	132322/1745	1:1	0.676	0.08	20.40	21.00	1.148	0.776	23
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	132322/1745	1:1	0.639	-0.02	20.35	21.00	1.161	0.742	23
Sensor off of Test data(1RB)											
Back side-19mm	20	QPSK 1_0	132322/1745	1:1	0.061	0.09	23.49	24.00	1.125	0.069	23
Right side-0mm	20	QPSK 1_0	132322/1745	1:1	0.050	-0.07	23.49	24.00	1.125	0.056	23
Bottom side-19mm	20	QPSK 1_0	132322/1745	1:1	0.098	-0.14	23.49	24.00	1.125	0.110	23
Sensor off of Test data(50%RB)											
Back side-19mm	20	QPSK 50_0	132322/1745	1:1	0.053	0.15	22.41	23.00	1.146	0.061	23
Right side-0mm	20	QPSK 50_0	132322/1745	1:1	0.031	0.16	22.41	23.00	1.146	0.036	23
Bottom side-19mm	20	QPSK 50_0	132322/1745	1:1	0.086	-0.19	22.41	23.00	1.146	0.099	23

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	132572/1770	0.982	0.979	1.003064351	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
 2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
 3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
 4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.

Report No.: SUCR250300015101

Rev.: 01

Page: 79 of 89

## 8.2.16 SAR Result of LTE Band 71

LTE Band 71 SAR Test Record											
Test position	BW.	Test mode	Test ch./Freq.	Duty Cycle	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data(Separate 0mm 1RB)											
Back side	20	QPSK 1_0	133322/683	1:1	0.381	0.15	22.06	23.00	1.242	0.473	22.7
Bottom side	20	QPSK 1_0	133322/683	1:1	0.761	0.01	22.06	23.00	1.242	0.945	22.7
Bottom side-Repeat SAR	20	QPSK 1_0	133322/683	1:1	0.758	0.13	22.06	23.00	1.242	0.941	22.7
Sensor on of Test data(Separate 0mm 50%RB)											
Back side	20	QPSK 50_0	133322/683	1:1	0.310	0.19	21.88	23.00	1.294	0.401	22.7
Bottom side	20	QPSK 50_0	133322/683	1:1	0.512	-0.04	21.88	23.00	1.294	0.663	22.7
Sensor on of Test data(Separate 0mm 100%RB)											
Bottom side	20	QPSK 100_0	133322/683	1:1	0.503	0.00	21.75	23.00	1.334	0.671	22.7
Sensor off of Test data(1RB)											
Back side-19mm	20	QPSK 1_0	133322/683	1:1	0.048	-0.06	23.13	24.00	1.222	0.059	22.7
Right side-0mm	20	QPSK 1_0	133322/683	1:1	0.003	-0.10	23.13	24.00	1.222	0.004	22.7
Bottom side-19mm	20	QPSK 1_0	133322/683	1:1	0.039	0.04	23.13	24.00	1.222	0.048	22.7
Sensor off of Test data(50%RB)											
Back side-19mm	20	QPSK 50_0	133322/683	1:1	0.042	0.02	22.04	23.00	1.247	0.052	22.7
Right side-0mm	20	QPSK 50_0	133322/683	1:1	0.001	-0.11	22.04	23.00	1.247	0.001	22.7
Bottom side-19mm	20	QPSK 50_0	133322/683	1:1	0.032	-0.09	22.04	23.00	1.247	0.040	22.7

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Bottom side	133322/683	0.761	0.758	1.003957784	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

### 8.2.17 SAR Result of WIFI 2.4G

Wi-Fi 2.4G SAR Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Sensor on of Test data (Separate 0mm)											
Back side	802.11b	1/2412	98.67%	1.013	0.677	0.08	15.44	16.00	1.138	0.781	22.8
Top side	802.11b	1/2412	98.67%	1.013	0.859	0.02	15.44	16.00	1.138	<b>0.990</b>	22.8
Top side-Repeat SAR	802.11b	1/2412	98.67%	1.013	0.856	0.01	15.44	16.00	1.138	0.987	22.8
Top side	802.11b	6/2437	98.67%	1.013	0.766	0.17	15.10	16.00	1.230	0.955	22.8
Top side	802.11b	11/2462	98.67%	1.013	0.813	-0.07	15.26	16.00	1.186	0.977	22.8
Sensor off of Test data											
Back side-19mm	802.11b	1/2412	98.67%	1.013	0.061	-0.13	18.40	19.00	1.148	0.071	22.8
Top side-19mm	802.11b	1/2412	98.67%	1.013	0.103	-0.17	18.40	19.00	1.148	0.120	22.8

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Top side	1/2412	0.859	0.856	1.003504673	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was performed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was performed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

Note: When the highest reported SAR for the initial test configuration is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg, SAR test for the other 802.11 modes are not required.

**8.2.18 SAR Result of WIFI 5G**

Wi-Fi 5G SAR Test Record												
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)	
Sensor on of Test data of U-NII-2A(Separate 0mm)												
Back side	802.11ac-VHT80	58/5290	92.89%	1.077	0.386	-0.17	17.11	18.00	1.227	0.510	23	
Top side	802.11ac-VHT80	58/5290	92.89%	1.077	0.903	0.03	17.11	18.00	1.227	1.193	23	
Top side-Repeat SAR	802.11ac-VHT80	58/5290	92.89%	1.077	0.897	0.02	17.11	18.00	1.227	1.185	23	
Top side	802.11ac-VHT80	42/5210	92.89%	1.077	0.812	-0.02	16.86	18.00	1.300	1.137	23	
Sensor on of Test data of U-NII-2C(Separate 0mm)												
Back side	802.11ac-VHT80	106/5530	92.89%	1.077	0.500	0.18	16.26	16.50	1.057	0.569	23	
Top side	802.11ac-VHT80	106/5530	92.89%	1.077	0.924	0.06	16.26	16.50	1.057	1.051	23	
Top side-Repeat SAR	802.11ac-VHT80	106/5530	92.89%	1.077	0.919	-0.11	16.26	16.50	1.057	1.046	23	
Top side	802.11ac-VHT80	122/5610	92.89%	1.077	0.801	0.04	15.69	16.50	1.205	1.039	23	
Sensor on of Test data of U-NII-3(Separate 0mm)												
Back side	802.11ac-VHT80	155/5775	92.68%	1.079	0.327	0.16	15.96	16.50	1.132	0.400	23	
Top side	802.11ac-VHT80	155/5775	92.68%	1.079	0.976	0.02	15.96	16.50	1.132	1.193	23	
Top side-Repeat SAR	802.11ac-VHT80	155/5775	92.68%	1.079	0.974	-0.09	15.96	16.50	1.132	1.190	23	
Sensor off of Test data of U-NII-2A												
Back side-13mm	802.11ac-VHT80	58/5290	92.89%	1.077	0.078	0.04	18.68	20.00	1.355	0.114	23	
Top side-14mm	802.11ac-VHT80	58/5290	92.89%	1.077	0.167	0.05	18.68	20.00	1.355	0.244	23	
Sensor off of Test data of U-NII-2C												
Back side-13mm	802.11ac-VHT80	106/5530	92.89%	1.077	0.168	-0.18	19.52	20.00	1.117	0.202	23	
Top side-14mm	802.11ac-VHT80	106/5530	92.89%	1.077	0.275	0.10	19.52	20.00	1.117	0.331	23	
Sensor off of Test data of U-NII-3												
Back side-13mm	802.11ac-VHT80	155/5775	92.68%	1.079	0.182	0.08	18.86	20.00	1.300	0.255	23	
Top side-14mm	802.11ac-VHT80	155/5775	92.68%	1.079	0.222	0.15	18.86	20.00	1.300	0.311	23	

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Top side	58/5290	0.903	0.897	1.006688963	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

Test Position	Channel/ Frequency (MHz)	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
			SAR (1g)		SAR (1g)	SAR (1g)
Top side	106/5530	0.924	0.919	1.005440696	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.

2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).

3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250300015101

Rev.: 01

Page: 82 of 89

Test Position	Channel/ Frequency	Measured SAR (1g)	1 <sup>st</sup> Repeated	Ratio	2 <sup>nd</sup> Repeated	3 <sup>rd</sup> Repeated
	(MHz)		SAR (1g)		SAR (1g)	SAR (1g)
Top side	155/5775	0.976	0.974	1.002053388	N/A	N/A

Note: 1) When the original highest measured SAR is  $\geq 0.80$  W/kg, the measurement was repeated once.  
2) A second repeated measurement was preformed only if the ratio of largest to smallest SAR for the original and first repeated measurements was  $> 1.20$  or when the original or repeated measurement was  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).  
3) A third repeated measurement was preformed only if the original, first or second repeated measurement was  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .  
4) Repeated measurements are not required when the original highest measured SAR is  $< 0.80$  W/kg

Note: As the highest reported SAR is smaller than 1.2 W/kg, and the tune-up of the other 802.11 modes are not higher than measurement, therefore the adjusted SAR is  $\leq 1.2$  W/kg for other 802.11 modes, SAR test for the other 802.11 modes are not required.

**8.2.19 SAR Result of BT**

Bluetooth SAR Test Record											
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 1-g	Power drift (dB)	Conducted Power(dBm)	Tune up Limit(dBm)	Scaled factor	Scaled SAR 1-g (W/kg)	Liquid Temp.(°C)
Test data (Separate 0mm)											
Back side	3DH5	39/2441	77.07%	1.298	0.157	0.10	7.36	8.00	1.159	0.236	22.8
Top side	3DH5	39/2441	77.07%	1.298	0.204	0.06	7.36	8.00	1.159	<b>0.307</b>	22.8

**8.2.20 SAR Result of NFC**

NFC SAR Test Record									
Test position	Test mode	Test ch./Freq.	Duty Cycle	Duty Cycle Scaled factor	SAR (W/kg) 10-g	Power drift (dB)	Scaled factor	Scaled SAR 10-g (W/kg)	Liquid Temp.(°C)
NFC Test data (Separate 0mm)									
Front side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.3
Back side	NFC	13.56MHz	100.00%	1.000	0.011	0.06	1.000	<b>0.011</b>	22.3
Left side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.3
Right side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.3
Top side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.3
Bottom side	NFC	13.56MHz	100.00%	1.000	0.000	0.00	1.000	0.000	22.3

## 8.3 Multiple Transmitter Evaluation

### 8.3.1 Simultaneous SAR test evaluation

#### •Simultaneous Transmission Possibilities

No.	Simultaneous Tx Combination	Body
1	WWAN + WLAN 2.4GHz + NFC	Yes
2	WWAN + WLAN 5GHz + BT + NFC	Yes

**Note:**

- 1) For Wi-Fi 5G, U-NII-1 (5150–5250 MHz) and U-NII-3 (5725-5850 MHz) bands does not support hotspot function.
- 2) Per FCC KDB Publication 648474 D04 Handset SAR, Phablet SAR tests were not required if wireless router 1g SAR(Scaled to the maximum output power ,including tolerance) < 1.2 W/Kg. Therefore, no further analysis beyond tables included in this section was required to determine that possible Simultaneous transmission scenarios would not exceed the SAR limit.

**8.3.2 Simultaneous Transmission SAR Summation Scenario**
**Body:**

Test position		SARmax (W/kg)					Summed SAR	
		Main	WiFi 2.4G	WiFi 5G	BT	NFC		
		1	2	3	4	5	1+2+5	1+3+4+5
GSM850	Back side	0.361	0.781	0.569	0.236	0.011	1.153	1.177
	Right side	0.070	0.000	0.000	0.000	0.000	0.070	0.070
	Bottom side	1.003	0.000	0.000	0.000	0.000	1.003	1.003
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
GSM1900	Back side	0.381	0.781	0.569	0.236	0.011	1.173	1.197
	Right side	0.013	0.000	0.000	0.000	0.000	0.013	0.013
	Bottom side	1.192	0.000	0.000	0.000	0.000	1.192	1.192
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
WCDMA Band II	Back side	0.601	0.781	0.569	0.236	0.011	1.393	1.417
	Right side	0.099	0.000	0.000	0.000	0.000	0.099	0.099
	Bottom side	1.043	0.000	0.000	0.000	0.000	1.043	1.043
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
WCDMA Band IV	Back side	0.461	0.781	0.569	0.236	0.011	1.253	1.277
	Right side	0.049	0.000	0.000	0.000	0.000	0.049	0.049
	Bottom side	1.165	0.000	0.000	0.000	0.000	1.165	1.165
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
WCDMA Band V	Back side	0.474	0.781	0.569	0.236	0.011	1.266	1.290
	Right side	0.013	0.000	0.000	0.000	0.000	0.013	0.013
	Bottom side	1.057	0.000	0.000	0.000	0.000	1.057	1.057
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 7	Back side	0.585	0.781	0.569	0.236	0.011	1.377	1.401
	Right side	0.124	0.000	0.000	0.000	0.000	0.124	0.124
	Bottom side	1.192	0.000	0.000	0.000	0.000	1.192	1.192
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 12 (17)	Back side	0.342	0.781	0.569	0.236	0.011	1.134	1.158
	Right side	0.074	0.000	0.000	0.000	0.000	0.074	0.074
	Bottom side	1.069	0.000	0.000	0.000	0.000	1.069	1.069
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 13	Back side	0.417	0.781	0.569	0.236	0.011	1.209	1.233
	Right side	0.016	0.000	0.000	0.000	0.000	0.016	0.016
	Bottom side	1.068	0.000	0.000	0.000	0.000	1.068	1.068
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 14	Back side	0.344	0.781	0.569	0.236	0.011	1.136	1.160
	Right side	0.006	0.000	0.000	0.000	0.000	0.006	0.006
	Bottom side	1.156	0.000	0.000	0.000	0.000	1.156	1.156
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 25 (2)	Back side	0.560	0.781	0.569	0.236	0.011	1.352	1.376
	Right side	0.089	0.000	0.000	0.000	0.000	0.089	0.089
	Bottom side	1.158	0.000	0.000	0.000	0.000	1.158	1.158
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 26 (5)	Back side	0.659	0.781	0.569	0.236	0.011	1.451	1.475
	Right side	0.050	0.000	0.000	0.000	0.000	0.050	0.050
	Bottom side	1.181	0.000	0.000	0.000	0.000	1.181	1.181
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500

**SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd.**

Report No.: SUCR250300015101

Rev.: 01

Page: 87 of 89

LTE Band 30	Back side	0.773	0.781	0.569	0.236	0.011	1.565	1.589
	Right side	0.154	0.000	0.000	0.000	0.000	0.154	0.154
	Bottom side	1.122	0.000	0.000	0.000	0.000	1.122	1.122
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 40	Back side	0.766	0.781	0.569	0.236	0.011	1.558	1.582
	Right side	0.108	0.000	0.000	0.000	0.000	0.108	0.108
	Bottom side	1.155	0.000	0.000	0.000	0.000	1.155	1.155
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 41 (38)	Back side	0.259	0.781	0.569	0.236	0.011	1.051	1.075
	Right side	0.085	0.000	0.000	0.000	0.000	0.085	0.085
	Bottom side	1.089	0.000	0.000	0.000	0.000	1.089	1.089
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 66 (4)	Back side	0.429	0.781	0.569	0.236	0.011	1.221	1.245
	Right side	0.056	0.000	0.000	0.000	0.000	0.056	0.056
	Bottom side	1.183	0.000	0.000	0.000	0.000	1.183	1.183
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500
LTE Band 71	Back side	0.473	0.781	0.569	0.236	0.011	1.265	1.289
	Right side	0.004	0.000	0.000	0.000	0.000	0.004	0.004
	Bottom side	0.945	0.000	0.000	0.000	0.000	0.945	0.945
	Top side	0.000	0.990	1.193	0.307	0.000	0.990	1.500

## 9 Equipment list

Test Platform	SPEAG DASY5 Professional					
Description	SAR Test System					
Software Reference	DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)					
<b>Hardware Reference</b>						
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Due date of calibration	
<input checked="" type="checkbox"/> Twin Phantom	SPEAG	ELI V8.0	2217	NCR	NCR	
<input checked="" type="checkbox"/> Twin Phantom	SPEAG	SAM7	1702	NCR	NCR	
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4	1245	2024-06-05	2025-06-04	
<input checked="" type="checkbox"/> DAE	SPEAG	DAE4ip	1826	2025-02-17	2026-02-16	
<input checked="" type="checkbox"/> E-Field Probe	SPEAG	EX3DV4	7735	2025-01-29	2026-01-28	
<input checked="" type="checkbox"/> E-Field Probe	SPEAG	EX3DV4	3923	2024-11-04	2025-11-03	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	CLA13	1032	2023-02-09	2026-02-08	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D750V3	1160	2022-06-06	2025-06-05	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D835V2	4d161	2023-08-25	2026-08-24	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D1750V2	1105	2023-11-03	2026-11-02	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D1950V3	1218	2023-05-04	2026-05-03	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D2300V2	1072	2022-06-16	2025-06-15	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D2450V2	922	2023-08-28	2026-08-27	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D2600V2	1125	2022-06-14	2025-06-13	
<input checked="" type="checkbox"/> Validation Kits	SPEAG	D5GHzV2	1174	2023-08-23	2026-08-22	
<input checked="" type="checkbox"/> Dielectric parameter probes	SPEAG	DAKS-3.5	1102	N/A	N/A	
<input checked="" type="checkbox"/> Universal Radio Communication Tester	R&S	CMW500	111637	2024-09-12	2025-09-11	
<input checked="" type="checkbox"/> RF Bi-Directional Coupler	Agilent	86205-60001	MY31400031	NCR	NCR	
<input checked="" type="checkbox"/> Signal Generator	R&S	SMB100A	182393	2025-02-05	2026-02-04	
<input checked="" type="checkbox"/> Preamplifier	Qiji	YX28980933	202104001	NCR	NCR	
<input checked="" type="checkbox"/> Power Sensor	Keysight	U2002H	121251	2024-09-13	2025-09-12	
<input checked="" type="checkbox"/> Attenuator	SHX	TS2-3dB	30704	NCR	NCR	
<input checked="" type="checkbox"/> Coaxial low pass filter	Mini-Circuits	VLF-2500(+)	NA	NCR	NCR	
<input checked="" type="checkbox"/> Coaxial low pass filter	Microlab Fxr	LA-F13	NA	NCR	NCR	
<input checked="" type="checkbox"/> DC POWER SUPPLY	SAKO	SK1730SL5A	NA	NCR	NCR	
<input checked="" type="checkbox"/> Speed reading thermometer	LKM	DTM3000	NA	2024-09-14	2025-09-13	
<input checked="" type="checkbox"/> Humidity and Temperature Indicator	MingGao	MingGao	NA	2024-09-16	2025-09-15	

Note: All the equipments are within the valid period when the tests are performed.

## **10 Calibration certificate**

Please see the Appendix C

## **11 Photographs**

Please see the Appendix D

## **Appendix A: Detailed System Check Results**

## **Appendix B: Detailed Test Results**

## **Appendix C: Calibration certificate**

## **Appendix D: Photographs**

## **Appendix E: Conducted RF Output Power**

---

**---END---**