

Appendix C for KSCR221000185701

Calibration Certificate

Object	Apply	No	Model	SN	Calibration Date
Dipole	☐	1	CLA150	4025	2021/04/26
	☐	2	D450V3	1103	2021/04/21
	☒	3	D750V3	1188	2022/03/29
	☒	4	D835V2	4d114	2022/03/31
	☐	5	D900V2	1d079	2022/06/07
	☒	6	D1800V2	2d170	2022/03/31
	☒	7	D1900V2	5d136	2022/06/07
	☐	8	D2000V2	1041	2022/06/06
	☐	9	D2300V2	1096	2022/03/31
	☒	10	D2450V2	817	2022/04/01
	☒	11	D2600V2	1158	2022/03/31
	☒	12	D5GHzV2	1095	2022/06/01
DAE	☒	13	DAE4	1245	2022/05/30
Probe	☒	14	EX3DV4	7346	2022/03/30



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1 Dipole

1.1 CLA150 - SN 4025

Calibration Laboratory of Schmid & Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland		S Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service	
Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates		Accreditation No.: SCS 0108	
Client: SGS-CN (Audiun)		Certificate No.: CLA150-4025_Apr21	
CALIBRATION CERTIFICATE			
Object: CLA150 - SN: 4025			
Calibration procedure(s): QA CAL-15.v0 Calibration Procedure for SAR Validation Sources below 700 MHz			
Calibration date: April 26, 2021			
The calibration certificate documents the traceability to national standards, which reduce the physical units of measurements (B). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility; environment temperature (22 ± 0.5 °C and humidity < 70%).			
Calibration Equipment Used (MATE critical for calibration)			
Primary Standards	Q 1	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 10476	09-Apr-21 (No. 217-03001/03002)	Apr-22
Power sensor NRP Z01	SN: 103944	09-Apr-21 (No. 217-03001)	Apr-22
Power sensor NRP Z01	SN: 103945	09-Apr-21 (No. 217-03002)	Apr-22
Reference 20 dB Attenuator	SN: C23602 (200)	09-Apr-21 (No. 217-03003)	Apr-22
Type-N mismatch combination	SN: 310902 / 0007	09-Apr-21 (No. 217-03004)	Apr-22
Reference Probe EX0804	SN: 3877	30-Dec-20 (No. 133-3877_Dec20)	Dec-21
EX04	SN: 661	19-Jul-20 (No. 13458-659_Jul20)	Jul-21
Secondary Standards	Q 2	Check Date (in house)	Scheduled Check
Power meter S44186	SN: G841300329	06-Apr-16 (in house check Jun-20)	in house check Jun-22
Power sensor E413A	SN: MY41490007	06-Apr-16 (in house check Jun-20)	in house check Jun-22
Power sensor E413A	SN: 00010010	06-Apr-16 (in house check Jun-20)	in house check Jun-22
RF generator HP 8594C	SN: US4004001709	06-Apr-16 (in house check Jun-20)	in house check Jun-22
Network Analyzer Agilent 8722A	SN: US4000477	31-Mar-14 (in house check Oct-20)	in house check Oct-21
Calibrated by:	name: Jeffrey Katsaros	Function: Laboratory Technician	Signature:
Approved by:	Kate Polovic	Technical Manager	Signature:
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Issued: April 26, 2021			
Certificate No.: CLA150-4025_Apr21 Page 1 of 6			

Calibration Laboratory of Schmid & Partner Engineering AG Zugstrasse 43, 8004 Zurich, Switzerland		S Schweizerischer Kalibrierdienst Service suisse d'étalonnage C Servizio svizzero di taratura S Swiss Calibration Service	
Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates		Accreditation No.: SCS 0108	
Glossary:			
TSL	Issue simulating liquid		
ConvF	sensitivity in TSL / NORM x,y,z		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEEE Std 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", June 2013			
b) IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2016			
c) IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010			
d) KDB 865864, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
e) DASY4/5 System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna Parameters with TSL: The source is mounted in a touch configuration below the center marking of the flat phantom.			
• Return Loss: This parameter is measured with the source positioned under the liquid filled phantom (as described in the measurement condition clause). The Return Loss ensures low reflected power. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No.: CLA150-4025_Apr21 Page 2 of 6			

Measurement Conditions DASY system configuration, as far as not given on page 1.		
DASY Version	DASY5	V52.10.4
Extrapolation	Advanced Extrapolation	
Phantom	ELIA Flat Phantom	Shell thickness: 2 ± 0.2 mm
EUT Positioning	Touch Position	
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)
Frequency	150 MHz ± 1 MHz	

Head TSL parameters The following parameters and calculations were applied.			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	52.3	0.75 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL		
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	1 W input power	3.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.88 W/kg ± 19.4 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL		
SAR measured	Condition	
SAR measured	1 W input power	2.60 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)	
Antenna Parameters with Head TSL	
Impedance, transformed to feed point	47.9 Ω ± 1.5 Ω
Return Loss	-31.4 dB
Additional EUT Data	
Manufactured by	SPEAG

Certificate No.: CLA150-4025_Apr21 Page 3 of 6	
Measurement Conditions DASY system configuration, as far as not given on page 1.	
DASY Version	DASY5
Extrapolation	Advanced Extrapolation
Phantom	ELIA Flat Phantom
EUT Positioning	Touch Position
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 1.4 mm
Frequency	150 MHz ± 1 MHz

Head TSL parameters The following parameters and calculations were applied.			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	52.3	0.75 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	51.1 ± 6 %	0.75 mho/m ± 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL		
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	1 W input power	3.90 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.88 W/kg ± 19.4 % (k=2)

SAR averaged over 10 cm ³ (10 g) of Head TSL		
SAR measured	Condition	
SAR measured	1 W input power	2.60 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	2.59 W/kg ± 18.0 % (k=2)

Certificate No.: CLA150-4025_Apr21 Page 4 of 6	
Appendix (Additional assessments outside the scope of SCS 0108)	
Antenna Parameters with Head TSL	
Impedance, transformed to feed point	47.9 Ω ± 1.5 Ω
Return Loss	-31.4 dB
Additional EUT Data	
Manufactured by	SPEAG




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

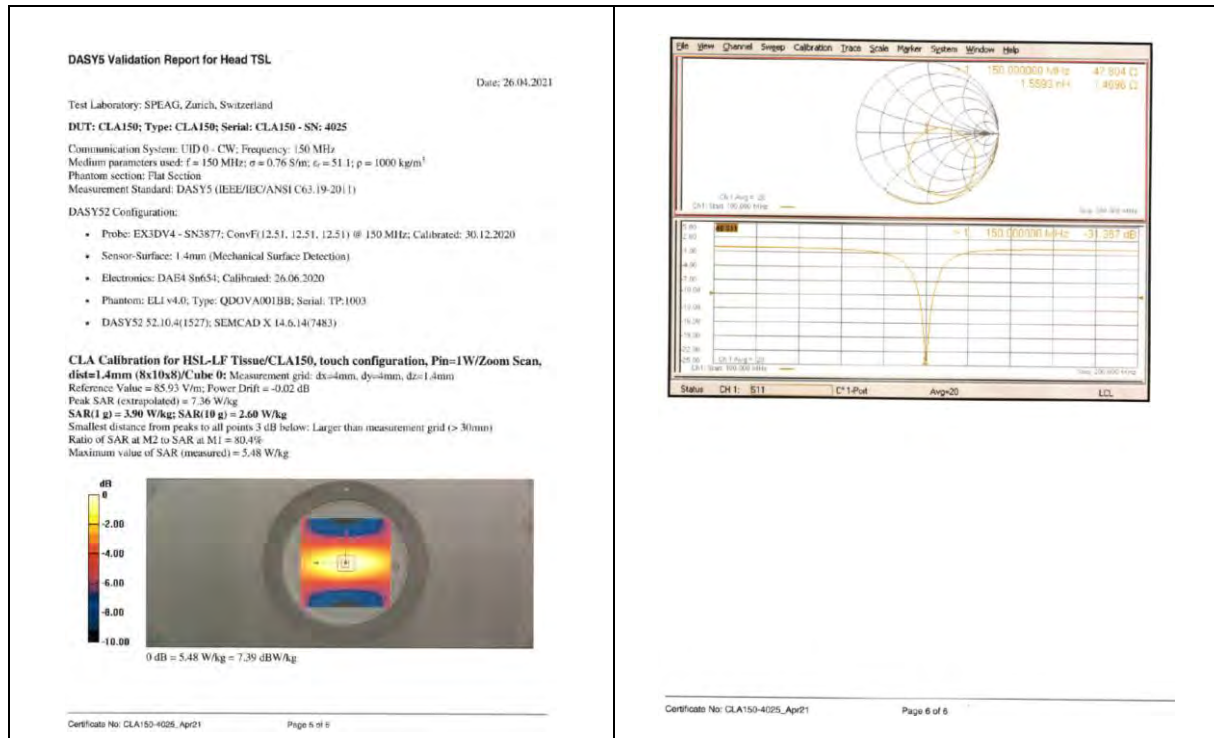

1.2 D450V3 - SN 1103

Calibration Laboratory of Schmid & Partner Engineering AG
Ziegelhausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **SGS-CN (Aiden)** Certificate No: **D450V3-1103_Apr21**

CALIBRATION CERTIFICATE

Object: **D450V3 - SN: 1103**

Calibration procedure(s): **QA CAL-15-V9**
Calibration Procedure for SAR Validation Sources below 700 MHz

Calibration date: **April 21, 2021**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (20 ± 2) °C and humidity < 75%.

Calibration Equipment used (MPE critical for calibration)

Primary Standards	ID #	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN 104779	09-Apr-21 (No. 217-0301103020)	Apr-22
Power sensor MHP-291	SN 103244	09-Apr-21 (No. 217-030211)	Apr-22
Power sensor MHP-291	SN 103245	09-Apr-21 (No. 217-030212)	Apr-22
Reference 20 dB Attenuator	SN C2552 (200)	09-Apr-21 (No. 217-03043)	Apr-22
Type-H measurement combination	SN 310852 / 06327	09-Apr-21 (No. 217-03044)	Apr-22
Reference Probe EX3DV4	SN 3877	30-Dec-20 (No. EX3-2077 Dec21)	Dec-21
DA54	SN 454	06-Jun-20 (No. DA54-664-Jun20)	Jun-21

Secondary Standards

ID #	Cal Date (In House)	Scheduled Check
Power meter E41488	SN GB41200274 09-Apr-21 (In house check Jun-20)	In house check Jun-20
Power sensor E41412A	SN MY41496047 06-Apr-20 (In house check Jun-20)	In house check Jun-20
Power sensor E41412A	SN 000110010 06-Apr-20 (In house check Jun-20)	In house check Jun-20
RF generator HP 8448C	SN L0340010100 06-Aug-19 (In house check Jun-20)	In house check Jun-22
Network Analyzer Agilent E8358A	SN L04080477 31-Mar-14 (In house check Dec-20)	In house check Oct-21

Calibrated by: **Christoph Linder** Function: **Laboratory Technician**

Approved by: **Klaus Frenkel** Function: **Technical Manager**

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: D450V3-1103_Apr21 Page 1 of 6

Calibration Laboratory of Schmid & Partner Engineering AG
Ziegelhausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **SGS-CN (Aiden)** Certificate No: **D450V3-1103_Apr21**

Glossary:

TSL: Issue simulating liquid sensitivity in TSL / NORM x,y,z

ConvF: not applicable or not measured

N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

- IEC 61010-1:2010, "Safety requirements for low voltage electrical equipment", July 2010
- IEC 62209-1, "Measurement procedure for the assessment of Specific Absorption Rate (SAR) from hand-held and body-mounted devices used next to the ear (frequency range of 300 MHz to 6 GHz)", July 2010
- IEC 62209-2, "Procedure to determine the Specific Absorption Rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz)", March 2010
- KDB 665664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:

- DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: D450V3-1103_Apr21 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Qoccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Measurement Conditions		
DASY system configuration, as far as not given on page 1.		
DASY Version	DASY5	V62.10.4
Extrapolation	Advanced Extrapolation	
Phantom	ELJ4 Flat Phantom	Shell thickness: 2 ± 0.2 mm
Distance Dipole Center - TSL	15 mm	with Spacer
Zoom Scan Resolution	$dx, dy, dz \leq 5$ mm	
Frequency	450 MHz ± 1 MHz	

Head TSL parameters			
The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	43.5	0.57 mho/m
Measured Head TSL parameters	(22.0 $\pm$ 0.2) °C	43.1 $\pm$ 6 %	0.57 mho/m $\pm$ 6 %
Head TSL temperature change during test	< 0.5 °C	---	---

SAR result with Head TSL		
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition	
SAR measured	250 mW input power	1.14 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	4.55 W/kg $\pm$ 18.1 % (k=2)

SAR result with Head TSL		
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition	
SAR measured	250 mW input power	0.757 W/kg
SAR for nominal Head TSL parameters	normalized to 1W	3.06 W/kg $\pm$ 17.6 % (k=2)

Appendix (Additional assessments outside the scope of SCS 0108)		
Antenna Parameters with Head TSL		
Impedance, transformed to feed point	57.1 Ω - j2.6 Ω	
Return Loss	> 23.0 dB	

General Antenna Parameters and Design	
Electrical Delay (one direction)	1.346 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard overmolded coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

Additional EUT Data	
Manufactured by	SPEAG

Certificate No: D450V3-1103_Apr21

Page 3 of 6

Certificate No: D450V3-1103_Apr21

Page 4 of 6

DASY5 Validation Report for Head TSL

Date: 21.04.2021

Test Laboratory: SPEAG, Zurich, Switzerland

DUT: Dipole 450 MHz; Type: D450V3; Serial: D450V3 - SN:1103

Communication System: UTD 0 - CW; Frequency: 450 MHz

Medium parameters used: $f = 450$ MHz; $\alpha = 0.87$ S/m; $\epsilon_r = 43.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Measurement Standard: DASY5 (IEC/ANSI C63.19-2011)

DASY5 Configuration:

- Probe: EX3DV4 - SN3877; ConvF: 10.64, 10.64, 10.64 @ 450 MHz; Calibrated: 30.12.2020
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn654; Calibrated: 26.06.2020
- Phantom: ELJ v4.0; Type: QDOVA001BB; Serial: TP:1003
- DASY52.10.4(1527); SEMCAD X 14.6.14(7483)

Dipole Calibration for Head Tissue/d=15mm, Pin=250mW/Zoom Scan (7x7x7)/Cube 0:

Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 39.18 V/m; Power DUT = 0.08 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.14 W/kg; SAR(10 g) = 0.767 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 64.9%

Maximum value of SAR (measured) = 1.53 W/kg

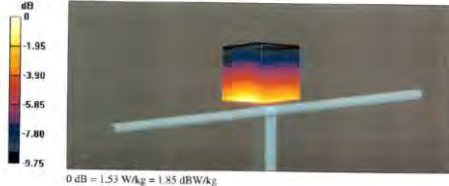

Certificate No: D450V3-1103_Apr21

Page 5 of 6

Certificate No: D450V3-1103_Apr21

Page 6 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.3 D750V3 - SN 1188

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191 Tel: +86-10-4236633-2172 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com		Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com	
Client: SGS-CN		Certificate No.: Z22-60103	
CALIBRATION CERTIFICATE			
Object	D750V3 - SN: 1188		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	March 28, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility; environment temperature (22±3)°C and humidity <70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	104277	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Power sensor NRP88	104291	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Reference Probe EX30V4	SN 7307	26-May-21 (SPEAG No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator S4436C	MY48071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL No.J22X00409)	Jan-23
Calibrated by:	Name: Zhao Jing	Function: SAR Test Engineer	Signature: [Signature]
Reviewed by:	Name: Lin Hao	Function: SAR Test Engineer	Signature: [Signature]
Approved by:	Name: Qi Dianyun	Function: SAR Project Leader	Signature: [Signature]
Issued: April 3, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60103		Page 1 of 6	

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com		Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com	
Measurement Conditions DASY system configuration, as far as not given on page 1:			
DASY Version	DASY52	V52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	15 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	750 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	42.0	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.4 ± 0.5 %	0.89 mho/m ± 0 %
Head TSL temperature change during test	<1.0 °C	---	---
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	2.07 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	8.27 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	1.37 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	5.48 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60103		Page 3 of 6	

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com		Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com	
Glossary:			
TSL	Issue simulating liquid		
ConvF	sensitivity in TSL / NORMx.y.z		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020			
b) KDB 855654, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
c) DASY4/5 System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.			
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.			
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-60103		Page 1 of 6	

TTL Speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com		Add: No.52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-4236633-2079 Fax: +86-10-4236633-2564 E-mail: csl@china-test.com.cn http://www.china-test.com	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	53.60-1.13jΩ		
Return Loss	>28.7dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	0.947 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and caps are added to the dipole arms in order to improve matching when placed according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60103		Page 4 of 6	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

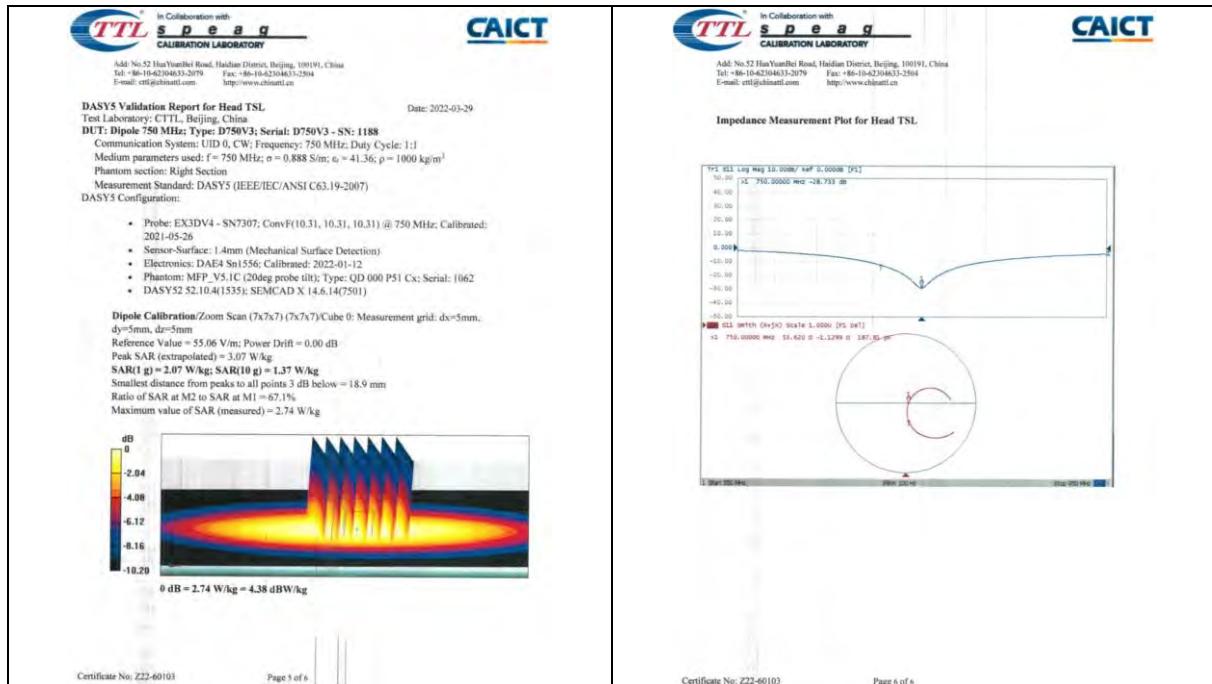

1.4 D835V2 - SN 4d114

TTS Calibration Laboratory		CAICT	
Add: No. 52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304631-2079 Fax: +86-10-42304631-2504 E-mail: cti@china.tts.com.cn http://www.china.tts.com.cn		Add: No. 52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304631-2079 Fax: +86-10-42304631-2504 E-mail: cti@china.tts.com.cn http://www.china.tts.com.cn	
Client: SGS-CN		Certificate No: Z22-60104	
CALIBRATION CERTIFICATE			
Object: D835V2 - SN: 4d114			
Calibration Procedure(s): FF-Z11-003-Q1 Calibration Procedures for dipole validation kits			
Calibration date: March 31, 2022			
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.			
Calibration Equipment used (M&E critical for calibration)			
Primary Standards		Secondary Standards	
ID #	Cal Date (Calibrated by: Certificate No.)	ID #	Cal Date (Calibrated by: Certificate No.)
Power Meter: NRP2 104281	24-Sep-21 (CTTL No.J21X08326)	Signal Generator E4438C MY49071430	13-Jan-22 (CTTL No.J22X00409)
Power sensor: NRPBS SN 7307	24-Sep-21 (CTTL No.J21X08326)	Network Analyzer E5071C MY46110873	14-Jan-22 (CTTL No.J22X00409)
Reference Probe EX3DV4 DAE4 SN 1556	26-May-21 (SPEAG No. EX3-7307_May21)		
	12-Jan-22 (CTTL-SPEAG No. Z22-60007)		
Calibrated by: Zhao Jing SAR Test Engineer		Reviewed by: Lin Hao SAR Test Engineer	
Approved by: Qi Dianyuan SAR Project Leader			
Issued: April 6, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory			

Glossary:
TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORMx.y.z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:
a) IEC/IEEE 62209-1528: "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 689864, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:
c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:
• **Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
• **Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
• **Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
• **Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
• **SAR measured:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
• **SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which, for a normal distribution Corresponds to a coverage probability of approximately 95%.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

TTL SPEAG CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Measurement Conditions DASY system configuration, as far as not given on page 1			
DASY Version	DASY52	VS2 10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	15 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	835 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	41.5	0.90 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	41.0 ± 0.5	0.91 mho/m ± 0.5 %
Head TSL temperature change during last	< 1.0 °C	—	—
SAR result with Head TSL			
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	2.37 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	9.40 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	1.54 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	6.12 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60104 Page 1 of 6			

TTL SPEAG CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	48.70 - j22.0j		
Return Loss	-25.3dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.307 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60104 Page 1 of 6			

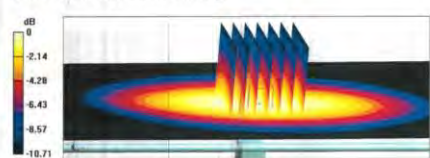TTL SPEAG CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China Date: 2022-03-31			
DUT: Dipole 835 MHz; Type: D835V2; Serial: D835V2 - SN: 40114			
Communication System: UHF 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1			
Medium parameters used: f = 835 MHz; σ = 0.907 S/m; ε = 40.98; ρ = 1000 kg/m ³			
Phantom section: Right Section			
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.9-2007)			
DASY5 Configuration:			
• Probe: EX3DV4 - SN7307; ConvF(10.13, 10.13, 10.13) @ 835 MHz; Calibrated: 2021-05-26			
• Sensor Surface: 1.4mm (Mechanical Surface Detection)			
• Electronics: DA64 Sn1556; Calibrated: 2022-01-12			
• Phantom: MFP_V5.1C (20deg probe til); Type: QD 000 P51 Cx; Serial: 1062			
• DASY52 52.10.4(1533); SEMCAD X 14.6.14(7501)			
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm			
Reference Value = 57.88 V/m; Power Drift = 0.04 dB			
Peak SAR (extrapolated) = 3.56 W/kg			
SAR(1 g) = 2.37 W/kg; SAR(10 g) = 1.54 W/kg			
Smallest distance from peaks to all points 3 dB below = 15.8 mm			
Ratio of SAR at M2 to SAR at M1 = 66.2%			
Maximum value of SAR (measured) = 3.17 W/kg			
			
0 dB = 3.17 W/kg = 5.01 dBW/kg			
Certificate No: Z22-60104 Page 1 of 6			

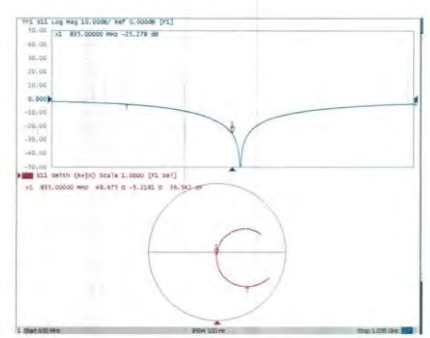TTL SPEAG CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com http://www.china.ttl.com			
Impedance Measurement Plot for Head TSL			
			
Certificate No: Z22-60104 Page 6 of 6			



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.5 D900V2 - SN 1d079

TTL Calibration Laboratory		CAICT																					
Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn		Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn																					
Client: SGS-CN		Certificate No: Z22-60184																					
CALIBRATION CERTIFICATE																							
Object: D900V2 - SN 1d079																							
Calibration Procedure(s): PF-Z11-003-01 Calibration Procedures for dipole validation kits																							
Calibration date: June 7, 2022																							
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.																							
All calibrations have been conducted in the closed laboratory facility, environment temperature (23±1)°C and humidity <70%.																							
Calibration Equipment used (M&TE critical for calibration)																							
<table border="1"><thead><tr><th>Primary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Power Meter NRP2</td><td>106277</td><td>24-Sep-21 (CTTL No. J21X08326)</td><td>Sep-22</td></tr><tr><td>Power sensor NRP85</td><td>104291</td><td>24-Sep-21 (CTTL No. J21X08326)</td><td>Sep-22</td></tr><tr><td>Reference Probe EX32V4</td><td>SN 7464</td><td>26-Jan-22 (SPEAG No. EX3-7464_Jan22)</td><td>Jan-23</td></tr><tr><td>DAE4</td><td>SN 1586</td><td>12-Jan-22 (CTTL-SPEAG No. Z22-60007)</td><td>Jan-23</td></tr></tbody></table>				Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Power Meter NRP2	106277	24-Sep-21 (CTTL No. J21X08326)	Sep-22	Power sensor NRP85	104291	24-Sep-21 (CTTL No. J21X08326)	Sep-22	Reference Probe EX32V4	SN 7464	26-Jan-22 (SPEAG No. EX3-7464_Jan22)	Jan-23	DAE4	SN 1586	12-Jan-22 (CTTL-SPEAG No. Z22-60007)	Jan-23
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																				
Power Meter NRP2	106277	24-Sep-21 (CTTL No. J21X08326)	Sep-22																				
Power sensor NRP85	104291	24-Sep-21 (CTTL No. J21X08326)	Sep-22																				
Reference Probe EX32V4	SN 7464	26-Jan-22 (SPEAG No. EX3-7464_Jan22)	Jan-23																				
DAE4	SN 1586	12-Jan-22 (CTTL-SPEAG No. Z22-60007)	Jan-23																				
<table border="1"><thead><tr><th>Secondary Standards</th><th>ID #</th><th>Cal Date (Calibrated by Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Signal Generator E2438C</td><td>MY43071430</td><td>13-Jan-22 (CTTL No. J22X00409)</td><td>Jan-23</td></tr><tr><td>Network Analyzer E5071C</td><td>MY43110473</td><td>14-Jan-22 (CTTL No. J22X00409)</td><td>Jan-23</td></tr></tbody></table>				Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration	Signal Generator E2438C	MY43071430	13-Jan-22 (CTTL No. J22X00409)	Jan-23	Network Analyzer E5071C	MY43110473	14-Jan-22 (CTTL No. J22X00409)	Jan-23								
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration																				
Signal Generator E2438C	MY43071430	13-Jan-22 (CTTL No. J22X00409)	Jan-23																				
Network Analyzer E5071C	MY43110473	14-Jan-22 (CTTL No. J22X00409)	Jan-23																				
Calibrated by: Name: Zhao Jing, Function: SAR Test Engineer, Signature: [Signature]																							
Reviewed by: Lin Hao, SAR Test Engineer, Signature: [Signature]																							
Approved by: Qi Dianyan, SAR Project Leader, Signature: [Signature]																							
Issued: June 13, 2022																							
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.																							
Certificate No: Z22-60184		Page 1 of 6																					

TTL Calibration Laboratory		CAICT	
Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn		Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn	
Glossary: TSL: tissue simulating liquid ConvF: sensitivity in TSL / NORM.y,z N/A: not applicable or not measured			
Calibration is Performed According to the Following Standards: a) IEC/IEEE 62209-1529, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices-Part 1529: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020 b) KDB 865664, "SAR Measurement Requirements for 100 MHz to 6 GHz" c) DASY4S System Handbook			
Additional Documentation: d) DASY4S System Handbook			
Methods Applied and Interpretation of Parameters: • Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in this certificate are valid at the frequency indicated. • Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis. • Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required. • Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required. • SAR measured: SAR measured at the stated antenna input power. • SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector. • SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-60184		Page 1 of 6	

TTL Calibration Laboratory		CAICT																			
Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn		Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn																			
Measurement Conditions DASY system configuration, as far as relevant given on page 1																					
<table border="1"><thead><tr><th>DASY Version</th><th>DASY2</th><th>52.10.4</th></tr></thead><tbody><tr><td>Extrapolation</td><td>Advanced Extrapolation</td><td></td></tr><tr><td>Phantom</td><td>Triple Flat Phantom 5.1C</td><td></td></tr><tr><td>Distance Dipole Center - TSL</td><td>15 mm</td><td>with Spacer</td></tr><tr><td>Zoom Scan Resolution</td><td>0x, dy, dz = 5 mm</td><td></td></tr><tr><td>Frequency</td><td>900 MHz ± 1 MHz</td><td></td></tr></tbody></table>				DASY Version	DASY2	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	15 mm	with Spacer	Zoom Scan Resolution	0x, dy, dz = 5 mm		Frequency	900 MHz ± 1 MHz	
DASY Version	DASY2	52.10.4																			
Extrapolation	Advanced Extrapolation																				
Phantom	Triple Flat Phantom 5.1C																				
Distance Dipole Center - TSL	15 mm	with Spacer																			
Zoom Scan Resolution	0x, dy, dz = 5 mm																				
Frequency	900 MHz ± 1 MHz																				
Head TSL parameters The following parameters and calculations were applied:																					
<table border="1"><thead><tr><th></th><th>Temperature</th><th>Permittivity</th><th>Conductivity</th></tr></thead><tbody><tr><td>Nominal Head TSL parameters</td><td>22.0 °C</td><td>41.5</td><td>0.97 mho/m</td></tr><tr><td>Measured Head TSL parameters</td><td>(22.0 ± 0.2) °C</td><td>42.1 ± 6 %</td><td>0.98 mho/m ± 6 %</td></tr><tr><td>Head TSL temperature change during test</td><td><±0.5 °C</td><td>—</td><td>—</td></tr></tbody></table>					Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 mho/m ± 6 %	Head TSL temperature change during test	<±0.5 °C	—	—		
	Temperature	Permittivity	Conductivity																		
Nominal Head TSL parameters	22.0 °C	41.5	0.97 mho/m																		
Measured Head TSL parameters	(22.0 ± 0.2) °C	42.1 ± 6 %	0.98 mho/m ± 6 %																		
Head TSL temperature change during test	<±0.5 °C	—	—																		
SAR result with Head TSL																					
<table border="1"><thead><tr><th>SAR averaged over 1 cm² (1 g) of Head TSL</th><th>Condition</th><th></th></tr></thead><tbody><tr><td>SAR measured</td><td>250 mW input power</td><td>2.75 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>11.0 W/kg ± 18.8 % (k=2)</td></tr><tr><td>SAR averaged over 10 cm² (10 g) of Head TSL</td><th>Condition</th><th></th></tr><tr><td>SAR measured</td><td>250 mW input power</td><td>1.75 W/kg</td></tr><tr><td>SAR for nominal Head TSL parameters</td><td>normalized to 1W</td><td>7.09 W/kg ± 18.7 % (k=2)</td></tr></tbody></table>				SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		SAR measured	250 mW input power	2.75 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		SAR measured	250 mW input power	1.75 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition																				
SAR measured	250 mW input power	2.75 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	11.0 W/kg ± 18.8 % (k=2)																			
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition																				
SAR measured	250 mW input power	1.75 W/kg																			
SAR for nominal Head TSL parameters	normalized to 1W	7.09 W/kg ± 18.7 % (k=2)																			
Certificate No: Z22-60184		Page 1 of 6																			

TTL Calibration Laboratory		CAICT							
Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn		Add: No.52 HuaYuan Road, Haidian District, Beijing, 100191 Tel: +86-10-62166137-2117 E-mail: cti@sgs.com.cn							
Appendix (Additional assessments outside the scope of CNAS L0670)									
Antenna Parameters with Head TSL									
<table border="1"><thead><tr><th></th><th>48 (10-9.450)</th></tr></thead><tbody><tr><td>Impedance, transformed to feed point</td><td></td></tr><tr><td>Return Loss</td><td>-23.3 dB</td></tr></tbody></table>					48 (10-9.450)	Impedance, transformed to feed point		Return Loss	-23.3 dB
	48 (10-9.450)								
Impedance, transformed to feed point									
Return Loss	-23.3 dB								
General Antenna Parameters and Design									
<table border="1"><thead><tr><th>Electrical Delay (one direction)</th><th>1.512 ns</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>				Electrical Delay (one direction)	1.512 ns				
Electrical Delay (one direction)	1.512 ns								
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.									
The dipole is made of standard serringid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.									
Additional EUT Data									
<table border="1"><thead><tr><th>Manufactured by</th><th>SPEAG</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>				Manufactured by	SPEAG				
Manufactured by	SPEAG								
Certificate No: Z22-60184		Page 1 of 6							




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>, and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

(86-512)57355888 (86-512)57370818 www.sgs.com.cn
(86-512)57355888 (86-512)57370818 sgs.china@sgs.com

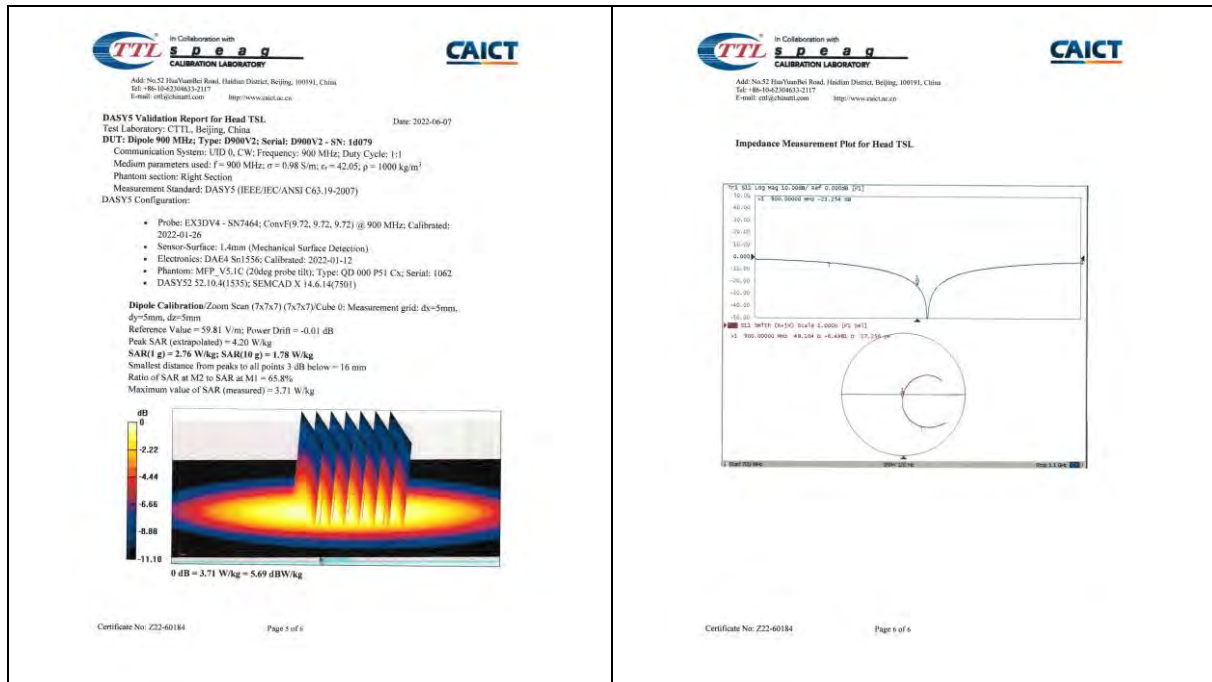

1.6 D1800V2 - SN 2d170

TTT Calibration Laboratory
In Collaboration with
CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-4230633-2117
E-mail: cti@china-test.com
http://www.china-test.com

Client: SGS-CN Certificate No: Z22-60105

CALIBRATION CERTIFICATE

Object: D1800V2 - SN 2d170

Calibration Procedure(s): FF-Z11-003-01
Calibration Procedures for dipole validation kits

Calibration date: March 31, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Reference Probe EX3DV4	SN 7307	26-May-21 (SPEAG No.EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No.Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No.J22X00409)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00409)	Jan-23

Calibrated by: Zhao Jing SAR Test Engineer
Reviewed by: Lin Hao SAR Test Engineer
Approved by: Qi Dianyan SAR Project Leader

Issued: April 6, 2022
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60105 Page 1 of 6

TTT Calibration Laboratory
In Collaboration with
CAICT
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-4230633-2117
E-mail: cti@china-test.com
http://www.china-test.com

Glossary:
TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORM_{x,y,z}
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 855664, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Additional Documentation:
c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
• SAR measured: SAR measured at the stated antenna input power.
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60105 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn	
Measurement Conditions DASY system configuration, as far as not given on page 1.			
DASY Version	DASY52	S2.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	1800 MHz ± 1 MHz		

Head TSL parameters			
The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	40.0	1.40 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	40.8 ± 6 %	1.41 mho/m ± 6 %
Head TSL temperature change during test	< 1.0 °C	—	—

SAR result with Head TSL	
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition
SAR measured	250 mW input power
SAR for nominal Head TSL parameters	normalized to 1W
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition
SAR measured	250 mW input power
SAR for nominal Head TSL parameters	normalized to 1W

Appendix (Additional assessments outside the scope of CNAS L0570)	
Antenna Parameters with Head TSL	
Impedance, transformed to feed point	47.90 - 2.54jΩ
Return Loss	-29.4dB

General Antenna Parameters and Design	
Electrical Delay (one direction)	1.116 ns

After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.


The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.

Additional EUT Data	
Manufactured by	SPEAG

Certificate No: Z22-60105 Page 3 of 6


TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn	
DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China DUT: Dipole 1800 MHz; Type: D1800V2; Serial: D1800V2 - SN: 2d170 Communication System: UID 0, CW; Frequency: 1800 MHz; Duty Cycle: 1:1 Medium parameters used: f = 1800 MHz; σ = 1.411 S/m; ε = 40.62; ρ = 1000 kg/m ³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7307; ConvF(8.34, 8.34, 8.34) @ 1800 MHz; Calibrated: 2021-05-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 SN1556; Calibrated: 2022-01-12 - Phantom: MFP-V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 S2.10.4(1535); SEMCAD X 14.6.14(7501) Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 98.14 W/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 18.2 W/kg SAR(1 g) = 9.73 W/kg; SAR(10 g) = 5.11 W/kg Smallest distance from peaks to all points 3 dB below = 10 mm Ratio of SAR at M2 to SAR at M1 = 54% Maximum value of SAR (measured) = 15.2 W/kg			

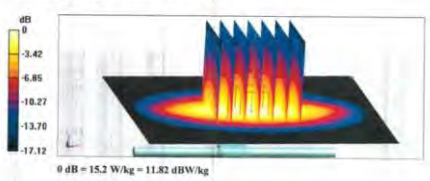

0 dB = 15.2 W/kg = 11.82 dBW/kg

Certificate No: Z22-60105 Page 3 of 6

TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com http://www.china-test.cn	
Impedance Measurement Plot for Head TSL			

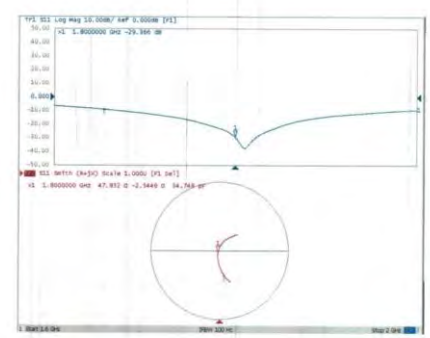

Certificate No: Z22-60105 Page 6 of 6

1.7 D1900V2 - SN 5d136

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn		Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn	
Client	SGS-CN	Certificate No.	Z22-60185
CALIBRATION CERTIFICATE			
Object	D1900V2 - SN 5d136		
Calibration Procedure(s)	FF-Z11-005-01 Calibration Procedures for dipole validation kits		
Calibration date:	June 7, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility; environment temperature (23±1)°C and humidity <70%.			
Calibration Equipment used (M&E critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No. J21X08326)	Sep-22
Power sensor NRP65	104291	24-Sep-21 (CTTL No. J21X08326)	Sep-22
Reference Probe EXSDV4	SN 7404	28-Jan-22 (SPEAG No. EX3-7404_Jan22)	Jan-23
DAEA	SN 1558	12-Jan-22 (CTTL No. J22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by: Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No. J22X00409)	Jan-23
Network Analyzer E5071C	MY48110073	14-Jan-22 (CTTL No. J22X00406)	Jan-23
Calibrated by:	Name: Zhao Jing	Function: SAR Test Engineer	Signature: [Signature]
Reviewed by:	Name: Lin Hao	Function: SAR Test Engineer	Signature: [Signature]
Approved by:	Name: Qi Diqian	Function: SAR Project Leader	Signature: [Signature]
Issued: June 13, 2022			
The calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60185		Page 1 of 4	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn		Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn	
Glossary:			
TSL	Issue simulating liquid		
ConF	sensitivity in TSL / NORM.y.z		
N/A	not applicable or not measured		
Calibration is Performed According to the Following Standards:			
a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020			
b) KDB 855884, "SAR Measurement Requirements for 100 MHz to 6 GHz"			
Additional Documentation:			
c) DASY4/S System Handbook			
Methods Applied and Interpretation of Parameters:			
• Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.			
• Antenna Parameters with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.			
• Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.			
• Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.			
• SAR measured: SAR measured at the stated antenna input power.			
• SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.			
• SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.			
The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.			
Certificate No: Z22-60185		Page 2 of 4	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn		Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn	
Measurement Conditions			
DASY system configuration, as far as not given on page 1:			
DASY Version	DASY52	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	1900 MHz ± 1 MHz		
Head TSL parameters			
The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	45.0	1.40 return
Measured Head TSL parameters	(22.0 ± 0.5) °C	39.9 ± 0.5 %	1.39 return ± 0.5 %
Head TSL temperature change during test	+1.0 °C		
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition:		
SAR measured	250 mW input power	9.65 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	40.0 W/kg ± 16.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition:		
SAR measured	250 mW input power	5.18 W/kg	
SAR for nominal TSL parameters	normalized to 1W	20.8 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60185		Page 3 of 4	

TTL S p e a g CALIBRATION LABORATORY		CAICT	
Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn		Add: No. 52 Huayuan Road, Haidian District, Beijing 100191 Tel: +86-10-4234612-2117 E-mail: csl@sgs.com.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	51.0Ω ± 1.5Ω (k=2)		
Return Loss	22.4dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.109 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC signals. On some of the dipoles, small caps are added to the dipole arms in order to improve matching when loaded according to the position as specified in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60185		Page 4 of 4	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

(86-512)57355888 (86-512)57370818 www.sgs.com.cn
(86-512)57355888 (86-512)57370818 sgs.china@sgs.com

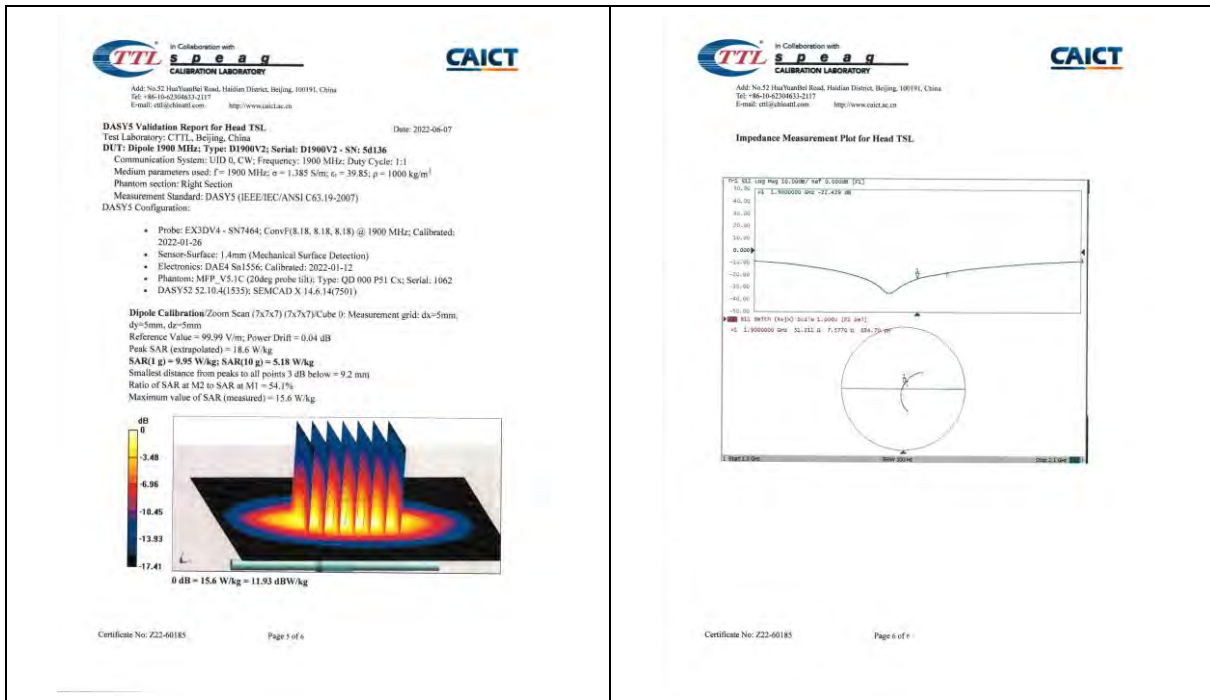

1.8 D2000V2 - SN 1041

TTLSPEAG Calibration Laboratory
 Add: No.52 Huaiyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62586311-117
 E-mail: cti@sgs.com.cn

CAICT

Client: **SGS-CN** Certificate No: **Z22-60186**

CALIBRATION CERTIFICATE

Object: D2000V2 - SN: 1041

Calibration Procedure(s): FF-Z11-003-01
 Calibration Procedure for dipole validation kits

Calibration date: June 6, 2022

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity <70%.

Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No. J21K08328)	Sep-22
Power sensor NRP5	104291	24-Sep-21 (CTTL No. J21K08328)	Sep-22
Reference Probe EX3DV4	SN 7464	26-Jan-22 (SPEAG No. EX3-7464-Jan22)	Jan-23
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No. Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY49071430	13-Jan-22 (CTTL No. Z22K00408)	Jan-23
Network Analyzer E5071C	MY46110673	14-Jan-22 (CTTL No. Z22K00408)	Jan-23

Calibrated by: Zhao Jing SAR Test Engineer
 Reviewed by: Lin Hao SAR Test Engineer
 Approved by: Qi Danyuan SAR Project Leader

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60186 Page 1 of 6

TTLSPEAG Calibration Laboratory
 Add: No.52 Huaiyuan Road, Haidian District, Beijing, 100191, China
 Tel: +86-10-62586311-117
 E-mail: cti@sgs.com.cn

CAICT

Glossary:
 TSL: Issue simulating liquid
 ConvF: sensitivity in TSL / NORMx.y.z
 N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:
 a) IEC/IEEE 62209-1528, Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-Head and Body-Mounted Wireless Communication Devices: Part 1528 Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz), October 2020
 b) KDB 865564, "SAR Measurement Requirements for 100 MHz to 6 GHz"
 Additional Documentation:
 c) DASY4/S System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions: Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameter with TSL: The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss: These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay: One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured: SAR measured at the stated antenna input power.
- SAR normalized: SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters: The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60186 Page 2 of 6



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com


No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 中国·江苏·昆山市留园创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
 t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

In Collaboration with TTL speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6208632-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn			
Measurement Conditions DASY system configuration, as for as not given on page 1.			
DASY Version	DASYV2	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom S.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	2000 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
Measured Head TSL parameters	22.9 °C	40.0	1.40 mho/cm
Head TSL temperature change during test	<1.0 °C		
SAR result with Head TSL			
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	10.4 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	41.8 W/kg ± 15.8 % (n=2)	
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	5.30 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	21.3 W/kg ± 18.7 % (n=2)	
Certificate No: Z22-60186 Page 3 of 6			

In Collaboration with TTL speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6208632-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn			
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	48.4Ω ± 0.74Ω		
Return Loss	> 34 dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.08 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semi-rigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small and large are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60186 Page 4 of 6			

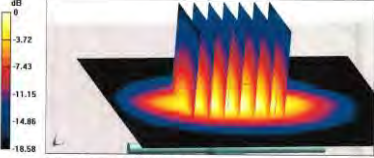In Collaboration with TTL speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6208632-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn			
DASY Validation Report for Head TSL Test Laboratory: CTIL, Beijing, China DUT: Dipole 2000 MHz; Type: D2000V2; Serial: D2000V2 - SN: 1041 Communication System: UTD 0; CW; Frequency: 2000 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2000 MHz; σ = 1.392 S/m; ε = 40.21; ρ = 1000 kg/m ³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration:			
• Probe: EX3DV4 - SN7464; ConvF(R2, R2, R2) @ 2000 MHz; Calibrated: 2022-01-26			
• Sensor-Surface: 1.4mm (Mechanical Surface Detection)			
• Electronics: DA64 Sn1556; Calibrated: 2022-01-12			
• Phantom: MPP_V5.1C (20kg probe kit); Type: QD 000 P51 Cx; Serial: 1062			
• DASY5: S2.10.4(1555); SEMCAD X 14.6.14(7501)			
Dipole Calibration/Zoom Scan (7x7x7) (7x7x7) Cube 0; Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 103.4 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 19.6 W/kg SAR(1 g) = 10.4 W/kg; SAR(10 g) = 5.3 W/kg Smallest distance from peaks to all points 3 dB below = 9.1 mm Ratio of SAR at M2 to SAR at M1 = 51.0%			
Maximum value of SAR (measured) = 16.3 W/kg			
			
0 dB = 16.3 W/kg = 12.12 dBW/kg			
Certificate No: Z22-60186 Page 5 of 6			

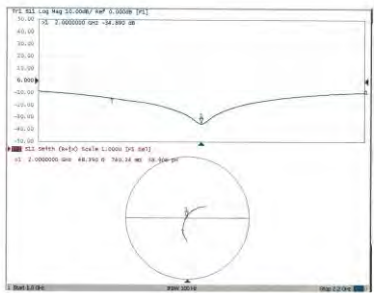In Collaboration with TTL speag CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6208632-2117 E-mail: cti@caict.ac.cn http://www.caict.ac.cn			
Impedance Measurement Plot for Head TSL			
			
Certificate No: Z22-60186 Page 6 of 6			

1.9 D2300V2 - SN 1096


TTL Speaq		CAICT	
In Collaboration with CALIBRATION LABORATORY		In Collaboration with CALIBRATION LABORATORY	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191 Tel: +86-10-6230433-2512 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6230433-2079 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Client	SGS-CN	Certificate No.	Z22-60106
CALIBRATION CERTIFICATE			
Object	D2300V2 - SN 1096		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date	March 31, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	106277	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Power sensor NRP8	104291	24-Sep-21 (CTTL No.J21X08328)	Sep-22
Reference Probe EX30V4	SN 7307	26-May-21 (SPEAG No.EK3-7307_May21)	May-22
DA4	SN 1556	12-Jan-22 (CTTL-SPEAG No.Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4439C	MY49071430	13-Jan-22 (CTTL No.J22X00406)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.J22X00406)	Jan-23
Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyan	SAR Project Leader	
Issued: April 6, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory			
Certificate No: Z22-60106		Page 1 of 6	
TTL Speaq		CAICT	
In Collaboration with CALIBRATION LABORATORY		In Collaboration with CALIBRATION LABORATORY	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6230433-2079 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6230433-2079 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Measurement Conditions DASY system configuration, as far as not given on page 1:			
DASY Version	DASY2	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom 5.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	2300 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	39.5	1.67 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.8 ± 9 %	1.70 mho/m ± 6 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	12.4 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	49.2 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	5.88 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	23.4 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60106		Page 3 of 6	
TTL Speaq		CAICT	
In Collaboration with CALIBRATION LABORATORY		In Collaboration with CALIBRATION LABORATORY	
Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6230433-2079 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn		Add: No.52 HuaYuanbei Road, Haidian District, Beijing, 100191, China Tel: +86-10-6230433-2079 Fax: +86-10-6230433-2504 E-mail: cti@chinaul.com http://www.chinaul.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	49.20 - 4.56jΩ		
Return Loss	-25.6dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.083 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60106		Page 4 of 6	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

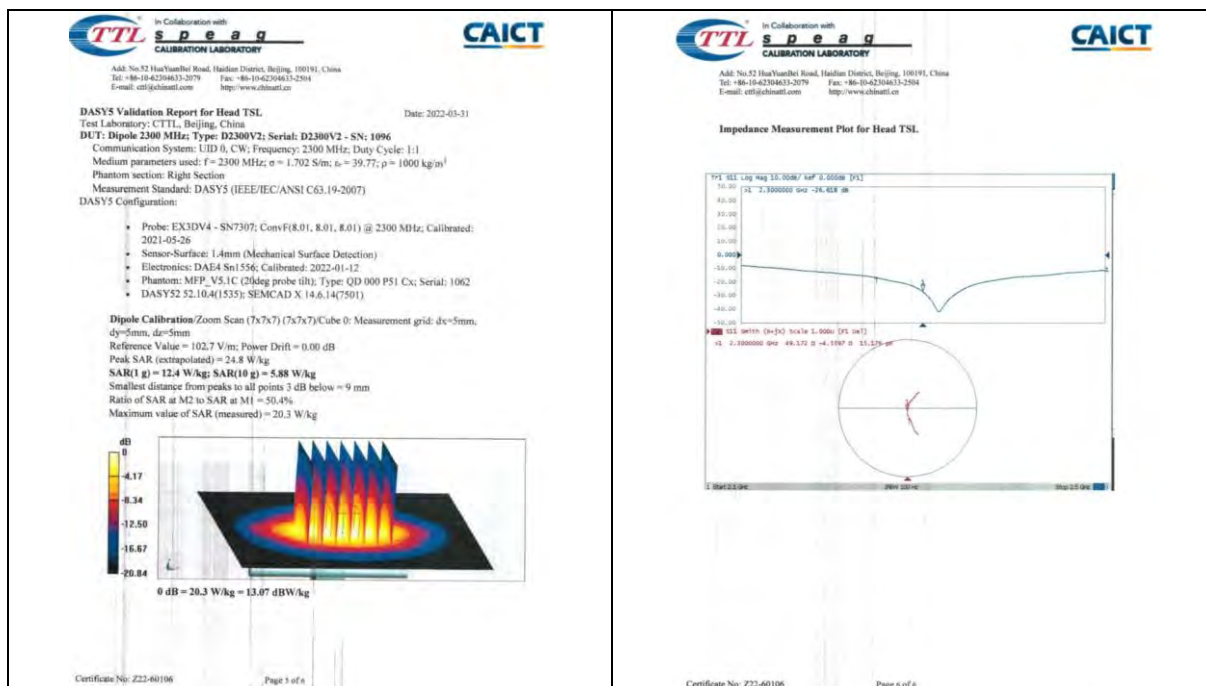

1.10 D2450V2 - SN 817

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Client: **SGS-CN** Certificate No: **Z22-60107**

CALIBRATION CERTIFICATE

Object: **D2450V2 - SN: 817**

Calibration Procedure(s): **FF-Z1(1-003-3)**
Calibration Procedures for dipole validation kits

Calibration date: **April 1, 2022**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements [B]. The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity <70%.

Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter: NRP2	106277	24-Sep-21 (CTTL No.J21X08320)	Sep-22
Power sensor: NRP8S	104291	24-Sep-21 (CTTL No.J21X08320)	Sep-22
Reference Probe EX3DV4	SN 7307	25-May-21 (SPEAG No EX3-7307_May21)	May-22
DAE4	SN 1555	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23

Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY40071430	13-Jan-22 (CTTL No.J22X00400)	Jan-23
Network Analyzer E5071C	MY48110873	14-Jan-22 (CTTL No.J22X00400)	Jan-23

Calibrated by: **Zhao Jing** SAR Test Engineer
Reviewed by: **Liu Hao** SAR Test Engineer
Approved by: **Qi Dianyan** SAR Project Leader

Issued: April 6, 2022

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: Z22-60107 Page 1 of 5

TTL In Collaboration with **CAICT**
CALIBRATION LABORATORY

Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China
Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504
E-mail: cti@china.ttl.com http://www.china.ttl.com

Glossary:
TSL: tissue simulating liquid
ConvF: sensitivity in TSL / NORMx.y.z
N/A: not applicable or not measured

Calibration is Performed According to the Following Standards:

a) IEC/IEEE 62209-1528, "Measurement Procedure for The Assessment of Specific Absorption Rate of Human Exposure to Radio Frequency Fields from Hand-held and Body-mounted Wireless Communication Devices- Part 1528: Human Models, Instrumentation and Procedures (Frequency range of 4 MHz to 10 GHz)", October 2020
b) KDB 865684, "SAR Measurement Requirements for 100 MHz to 5 GHz"

Additional Documentation:
c) DASY4/5 System Handbook

Methods Applied and Interpretation of Parameters:

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.

The reported uncertainty of measurement is stated as the standard uncertainty of Measurement multiplied by the coverage factor $k=2$, which for a normal distribution Corresponds to a coverage probability of approximately 95%.

Certificate No: Z22-60107 Page 2 of 5





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

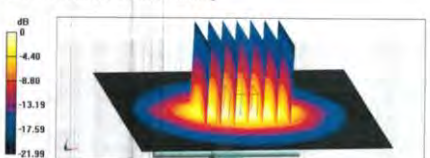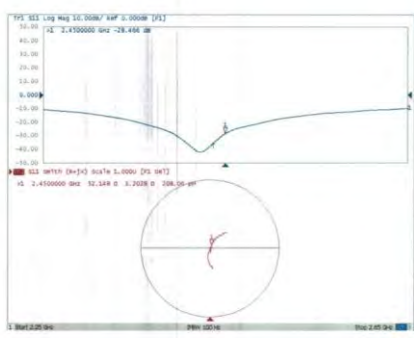TTL Speaq CALIBRATION LABORATORY		CAICT																		
Address: No. 52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn																				
Measurement Conditions DASY system configuration, as far as not given on page 1: <table border="1"> <tr> <td>DASY Version</td> <td>DASY52</td> <td>52.10.4</td> </tr> <tr> <td>Extrapolation</td> <td>Advanced Extrapolation</td> <td></td> </tr> <tr> <td>Phantom</td> <td>Triple Flat Phantom 5.1C</td> <td></td> </tr> <tr> <td>Distance Dipole Center - TSL</td> <td>10 mm</td> <td>with Spacer</td> </tr> <tr> <td>Zoom Scan Resolution</td> <td>dx, dy, dz = 5 mm</td> <td></td> </tr> <tr> <td>Frequency</td> <td>2450 MHz ± 1 MHz</td> <td></td> </tr> </table>			DASY Version	DASY52	52.10.4	Extrapolation	Advanced Extrapolation		Phantom	Triple Flat Phantom 5.1C		Distance Dipole Center - TSL	10 mm	with Spacer	Zoom Scan Resolution	dx, dy, dz = 5 mm		Frequency	2450 MHz ± 1 MHz	
DASY Version	DASY52	52.10.4																		
Extrapolation	Advanced Extrapolation																			
Phantom	Triple Flat Phantom 5.1C																			
Distance Dipole Center - TSL	10 mm	with Spacer																		
Zoom Scan Resolution	dx, dy, dz = 5 mm																			
Frequency	2450 MHz ± 1 MHz																			
Head TSL parameters The following parameters and calculations were applied: <table border="1"> <tr> <th></th> <th>Temperature</th> <th>Permittivity</th> <th>Conductivity</th> </tr> <tr> <td>Nominal Head TSL parameters</td> <td>22.0 °C</td> <td>39.2</td> <td>1.80 mho/m</td> </tr> <tr> <td>Measured Head TSL parameters</td> <td>(22.0 ± 0.2) °C</td> <td>39.5 ± 6 %</td> <td>1.79 mho/m ± 8 %</td> </tr> <tr> <td>Head TSL temperature change during test</td> <td>< 1.0 °C</td> <td>—</td> <td>—</td> </tr> </table>				Temperature	Permittivity	Conductivity	Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m	Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 8 %	Head TSL temperature change during test	< 1.0 °C	—	—		
	Temperature	Permittivity	Conductivity																	
Nominal Head TSL parameters	22.0 °C	39.2	1.80 mho/m																	
Measured Head TSL parameters	(22.0 ± 0.2) °C	39.5 ± 6 %	1.79 mho/m ± 8 %																	
Head TSL temperature change during test	< 1.0 °C	—	—																	
SAR result with Head TSL <table border="1"> <tr> <th>SAR averaged over 1 cm³ (1 g) of Head TSL</th> <th>Condition</th> <th></th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>13.2 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>53.0 W/kg ± 18.8 % (k=2)</td> </tr> <tr> <td>SAR averaged over 10 cm³ (10 g) of Head TSL</td> <th>Condition</th> <th></th> </tr> <tr> <td>SAR measured</td> <td>250 mW input power</td> <td>6.15 W/kg</td> </tr> <tr> <td>SAR for nominal Head TSL parameters</td> <td>normalized to 1W</td> <td>24.7 W/kg ± 18.7 % (k=2)</td> </tr> </table>			SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition		SAR measured	250 mW input power	13.2 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	53.0 W/kg ± 18.8 % (k=2)	SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition		SAR measured	250 mW input power	6.15 W/kg	SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)
SAR averaged over 1 cm ³ (1 g) of Head TSL	Condition																			
SAR measured	250 mW input power	13.2 W/kg																		
SAR for nominal Head TSL parameters	normalized to 1W	53.0 W/kg ± 18.8 % (k=2)																		
SAR averaged over 10 cm ³ (10 g) of Head TSL	Condition																			
SAR measured	250 mW input power	6.15 W/kg																		
SAR for nominal Head TSL parameters	normalized to 1W	24.7 W/kg ± 18.7 % (k=2)																		
Certificate No: Z22-40107 Page 3 of 6																				
TTL Speaq CALIBRATION LABORATORY		CAICT																		
Address: No. 52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn																				
DASY5 Validation Report for Head TSL Date: 2022-04-01 Test Laboratory: CTTL, Beijing, China DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN: 817 Communication System: UTD 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium parameters used: f = 2450 MHz; σ = 1.79 S/m; ε = 39.52; ρ = 1000 kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7307; ConvF(7.75, 7.75) @ 2450 MHz; Calibrated: 2021-05-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DA14 Snt1556; Calibrated: 2022-01-12 - Phantom: MFP-V5.1C (20kg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501) Dipole Calibration/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 104.6 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 27.0 W/kg SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.15 W/kg Smallest distance from peaks to all points 3 dB below = 8.9 mm Ratio of SAR at M2 to SAR at M1 = -49.2% Maximum value of SAR (measured) = 22.1 W/kg  0 dB = 22.1 W/kg = 13.44 dBW/kg																				
Certificate No: Z22-40107 Page 5 of 6																				
TTL Speaq CALIBRATION LABORATORY		CAICT																		
Address: No. 52 HuaYuanli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2079 Fax: +86-10-42304633-2504 E-mail: cti@china.ttl.com.cn http://www.china.ttl.com.cn																				
Impedance Measurement Plot for Head TSL 																				
Certificate No: Z22-40107 Page 6 of 6																				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

1.11 D2600V2 - SN 1158

TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191 Tel: +86-10-42304633-2512 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn		Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191 (China) Tel: +86-10-42304633-2519 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn	
Client: SGS-CN		Certificate No: Z22-60108	
CALIBRATION CERTIFICATE			
Object	D2600V2 - SN: 1158		
Calibration Procedure(s)	FF-Z11-003-01 Calibration Procedures for dipole validation kits		
Calibration date:	March 31, 2022		
This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility: environment temperature (23±3)°C and humidity<70%.			
Calibration Equipment used (MSTE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Power Meter NRP2	102377	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Power sensor NRP8S	104291	24-Sep-21 (CTTL No.J21X08326)	Sep-22
Reference Probe EX3/DVA	SN 7307	26-May-21 (SPEAG No EX3-7307_May21)	May-22
DAE4	SN 1556	12-Jan-22 (CTTL-SPEAG No Z22-60007)	Jan-23
Secondary Standards	ID #	Cal Date (Calibrated by Certificate No.)	Scheduled Calibration
Signal Generator E4438C	MY48071430	13-Jan-22 (CTTL No.Z22X00406)	Jan-23
Network Analyzer E5071C	MY48110673	14-Jan-22 (CTTL No.Z22X00406)	Jan-23
Calibrated by:	Name	Function	Signature
	Zhao Jing	SAR Test Engineer	
Reviewed by:	Lin Hao	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	
Issued: April 6, 2022			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			
Certificate No: Z22-60108		Page 1 of 6	

TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2519 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn		Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2519 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn	
Measurement Conditions DASY system configuration, as far as not given on page 1:			
DASY Version	DASY52	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom S.1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy, dz = 5 mm		
Frequency	2600 MHz ± 1 MHz		
Head TSL parameters The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	38.0	1.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	38.7 ± 6 %	1.96 mho/m ± 6 %
Head TSL temperature change during test	±1.0 °C		
SAR result with Head TSL			
SAR averaged over 1 cm² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	13.7 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	54.8 W/kg ± 18.8 % (k=2)	
SAR averaged over 10 cm² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	6.12 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	24.5 W/kg ± 18.7 % (k=2)	
Certificate No: Z22-60108		Page 3 of 6	

TTL Speaq CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2519 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn		Add: No.52 HuaYuanDeli Road, Haidian District, Beijing, 100191, China Tel: +86-10-42304633-2519 Fax: +86-10-42304633-2504 E-mail: cti@china-test.com.cn http://www.china-test.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL			
Impedance, transformed to feed point	49.90 - 6.49jΩ		
Return Loss	-23.8dB		
General Antenna Parameters and Design			
Electrical Delay (one direction)	1.053 ns		
After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured.			
The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard.			
No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged.			
Additional EUT Data			
Manufactured by	SPEAG		
Certificate No: Z22-60108		Page 4 of 6	




Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

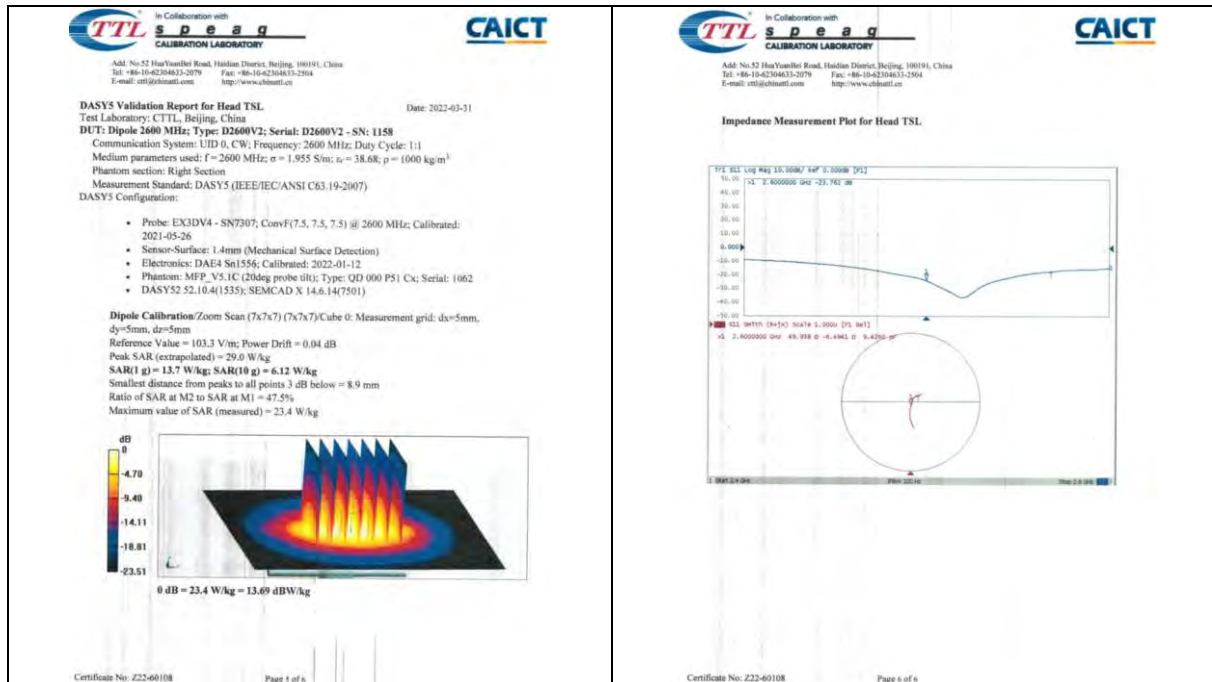

1.12 D5GHZV2 - SN 1095

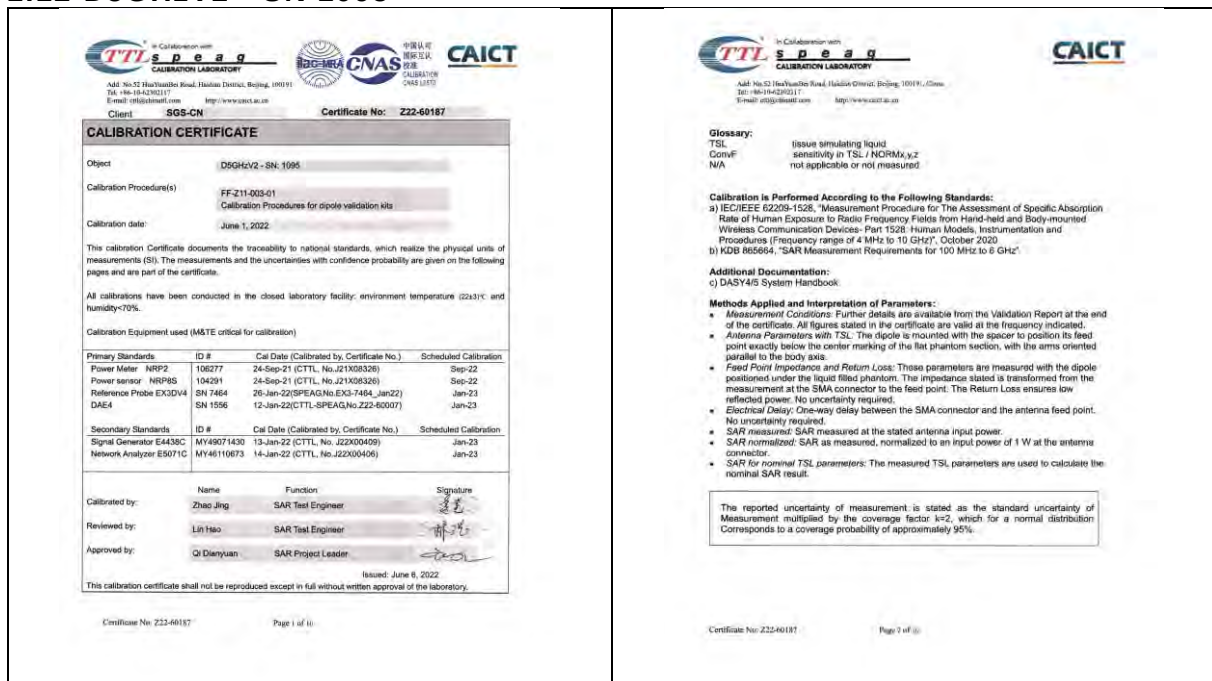

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.ttsl.com.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.caict.ac.cn	
Measurement Conditions SAR system configuration, as for as not given on page 1.			
DASY Version	DASY2	52.10.4	
Extrapolation	Advanced Extrapolation		
Phantom	Triple Flat Phantom S1C		
Distance Dipole Center - TSL	10 mm	with Spacer	
Zoom Scan Resolution	dx, dy = 4 mm, dz = 1.4 mm	Graded Ratio = 1.4 (Z direction)	
Frequency	5000 MHz ± 1 MHz 6300 MHz ± 1 MHz 3500 MHz ± 1 MHz 5600 MHz ± 1 MHz 5800 MHz ± 1 MHz		
Head TSL parameters at 5200MHz The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 5 %	4.73 mho/m ± 5 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL at 5200MHz			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	250 mW input power	7.75 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	77.5 W/kg ± 24.4 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	250 mW input power	2.27 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	22.7 W/kg ± 24.2 % (k=2)	
Certificate No: Z22-60187 Page 1 of 10			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.ttsl.com.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.caict.ac.cn	
Head TSL parameters at 5300MHz The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	35.9	4.76 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.2 ± 5 %	4.73 mho/m ± 5 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL at 5300MHz			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	100 mW input power	7.94 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	79.4 W/kg ± 24.4 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	100 mW input power	2.27 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	22.6 W/kg ± 24.2 % (k=2)	
Head TSL parameters at 5500MHz The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	35.8	4.88 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 5 %	4.84 mho/m ± 5 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL at 5500MHz			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	100 mW input power	8.26 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	82.6 W/kg ± 24.4 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	100 mW input power	2.34 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	23.3 W/kg ± 24.2 % (k=2)	
Certificate No: Z22-60187 Page 4 of 10			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.ttsl.com.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.caict.ac.cn	
Head TSL parameters at 5600MHz The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	35.5	5.07 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.7 ± 5 %	5.05 mho/m ± 5 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL at 5600MHz			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	100 mW input power	8.12 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	81.2 W/kg ± 24.4 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	100 mW input power	2.38 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	23.8 W/kg ± 24.2 % (k=2)	
Head TSL parameters at 5800MHz The following parameters and calculations were applied:			
Nominal Head TSL parameters	Temperature	Permittivity	Conductivity
	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.4 ± 5 %	5.25 mho/m ± 5 %
Head TSL temperature change during test	<1.0 °C	—	—
SAR result with Head TSL at 5800MHz			
SAR averaged over 1 cm ² (1 g) of Head TSL	Condition		
SAR measured	100 mW input power	7.71 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	77.1 W/kg ± 24.4 % (k=2)	
SAR averaged over 10 cm ² (10 g) of Head TSL	Condition		
SAR measured	100 mW input power	2.16 W/kg	
SAR for nominal Head TSL parameters	normalized to 1W	21.6 W/kg ± 24.2 % (k=2)	
Certificate No: Z22-60187 Page 5 of 10			

In Collaboration with TTL s p e a g CALIBRATION LABORATORY		CAICT	
Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.ttsl.com.cn		Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62362117 E-mail: csl@ttsl.com.cn http://www.caict.ac.cn	
Appendix (Additional assessments outside the scope of CNAS L0570)			
Antenna Parameters with Head TSL at 5200MHz			
Impedance, transformed to feed point	48.10 - j0.03j		
Return Loss	-23.8dB		
Antenna Parameters with Head TSL at 5300MHz			
Impedance, transformed to feed point	47.80 - 2.42j		
Return Loss	-23.5dB		
Antenna Parameters with Head TSL at 5500MHz			
Impedance, transformed to feed point	50.30 - 4.36j		
Return Loss	-27.4dB		
Antenna Parameters with Head TSL at 5600MHz			
Impedance, transformed to feed point	54.80 - 4.89j		
Return Loss	-24.6dB		
Antenna Parameters with Head TSL at 5800MHz			
Impedance, transformed to feed point	51.50 - 5.61j		
Return Loss	-24.9dB		
Certificate No: Z22-60187 Page 6 of 10			





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgs.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

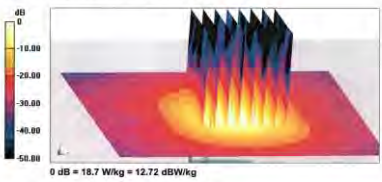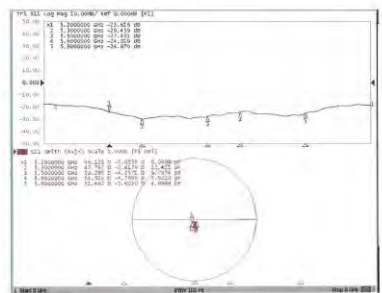In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@speaq.com http://www.speaq.com General Antenna Parameters and Design Electrical Delay (one direction) 1.021 ns After long term use with 100W radiated power, only a slight warming of the dipole near the feed-point can be measured. The dipole is made of standard semirigid coaxial cable. The carrier conductor of the feeding line is directly connected to the second arm of the dipole. This antenna is therefore short-circuited for DC signals. On some of the dipoles, small end caps are added to the dipole arms in order to improve matching when loaded according to the position as explained in the "Measurement Conditions" paragraph. The SAR data are not affected by this change. The overall dipole length is still according to the Standard. No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feed-point may be damaged. Additional EUT Data Manufactured by SPEAQ Certificate No: Z22-60187 Page 1 of 10	In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@speaq.com http://www.speaq.com DASY5 Validation Report for Head TSL Test Laboratory: CTTL, Beijing, China Date: 2022-09-01 DUT: Dipole 5GHz; Type: D5GHzV2; Serial: D5GHzV2 - SN: 1095 Communication System: CW; Frequency: 5200 MHz; Frequency: 5300 MHz; Frequency: 5500 MHz; Frequency: 5600 MHz; Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200$ MHz; $\sigma = 4.82$ S/m; $\epsilon = 35.39$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 5300$ MHz; $\sigma = 4.73$ S/m; $\epsilon = 35.19$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 5500$ MHz; $\sigma = 4.939$ S/m; $\epsilon = 34.83$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 5600$ MHz; $\sigma = 5.051$ S/m; $\epsilon = 34.89$; $\rho = 1000$ kg/m³ Medium parameters used: $f = 5800$ MHz; $\sigma = 5.247$ S/m; $\epsilon = 34.42$; $\rho = 1000$ kg/m³ Phantom section: Right Section Measurement Standard: DASY5 (IEEE/IEC/ANSI C38.19-2007) DASY5 Configuration: - Probe: EX3DV4 - SN7484; ConvF(5.6, 5.6) @ 5200 MHz; ConvF(5.32, 5.32) @ 5300 MHz; ConvF(5.11, 5.11) @ 5500 MHz; ConvF(4.91, 4.91) @ 5800 MHz; ConvF(5.5, 5.5) @ 5600 MHz - Calibrated: 2022-01-26 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DA84 Sn1556; Calibrated: 2022-01-12 - Phantom: MPF_V5.1C (20deg probe tilt); Type: QD 000 P51 Cx; Serial: 1062 - DASY52 52.10.4(1535); SEMCAD X 14.6.14(7501) Dipole Calibration /Pin=100mW, d=10mm, f=5200 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 60.80 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 29.8 W/kg SAR(1 g) = 7.73 W/kg; SAR(10 g) = 2.22 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 66.8% Maximum value of SAR (measured) = 19.3 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5300 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 61.08 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 31.5 W/kg SAR(1 g) = 7.94 W/kg; SAR(10 g) = 2.27 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 65.5% Maximum value of SAR (measured) = 19.0 W/kg Certificate No: Z22-60187 Page 2 of 10
In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@speaq.com http://www.speaq.com Dipole Calibration /Pin=100mW, d=10mm, f=5500 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 61.92 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 34.7 W/kg SAR(1 g) = 8.28 W/kg; SAR(10 g) = 2.34 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 63.9% Maximum value of SAR (measured) = 20.2 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5600 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 65.08 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 35.3 W/kg SAR(1 g) = 8.12 W/kg; SAR(10 g) = 2.3 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 62.5% Maximum value of SAR (measured) = 19.1 W/kg Dipole Calibration /Pin=100mW, d=10mm, f=5800 MHz/Zoom Scan, dist=1.4mm (8x8x7)/Cube 0; Measurement grid: dx=4mm, dy=4mm, dz=1.4mm Reference Value = 62.13 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 34.8 W/kg SAR(1 g) = 7.71 W/kg; SAR(10 g) = 2.16 W/kg Smallest distance from peaks to all points 3 dB below = 7.2 mm Ratio of SAR at M2 to SAR at M1 = 61.6% Maximum value of SAR (measured) = 18.7 W/kg  0 dB = 18.7 W/kg = 12.72 dBW/kg Certificate No: Z22-60187 Page 3 of 10	In Collaboration with TTL speaq CALIBRATION LABORATORY CAICT Address: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China Tel: +86-10-62302117 E-mail: cti@speaq.com http://www.speaq.com Impedance Measurement Plot for Head TSL  Certificate No: Z22-60187 Page 4 of 10

2 DAE4 - SN 1245

Schmid & Partner Engineering AG Zugzwangstrasse 43, 8004 Zurich, Switzerland Phone +41 (0)43 9700, Fax +41 (0)43 9775 www.speag.ch, info@speag.ch s p e a g IMPORTANT NOTICE USAGE OF THE DAE4 The DAE4 unit is a delicate, high precision instrument and requires careful treatment by the user. There are no serviceable parts inside the DAE4. Special attention shall be given to the following points: Battery Exchange: The battery cover of the DAE4 unit is fixed using a screw, over tightening the screw may cause the threads inside the DAE4 to wear out. Shipping of the DAE4: Before shipping the DAE4 to SPEAG for calibration, remove the batteries and pack the DAE4 in an anti-static bag. This anti-static bag shall then be packed into a larger box or container which protects the DAE4 from impacts during transportation. The package shall be marked to indicate that a fragile instrument is inside. E-Stop Failures: Touch detection may be malfunctioning due to broken magnets in the E-stop. Rough handling of the E-stop may lead to damage of these magnets. Touch and collision errors are often caused by dust and dirt accumulated in the E-stop. To prevent E-stop failure, the customer shall always mount the probe to the DAE4 carefully and keep the DAE4 unit in a non-dusty environment if not used for measurements. Repair: Minor repairs are performed at no extra cost during the annual calibration. However, SPEAG reserves the right to charge for any repair especially if rough unprofessional handling caused the defect. DASY Configuration Files: Since the exact values of the DAE4 input resistances, as measured during the calibration procedure of a DAE4 unit, are not used by the DASY software, a nominal value of 200 MOhm is given in the corresponding configuration file. Important Note: Warning and calibration is void if the DAE4 unit is disassembled partly or fully by the Customer. Important Note: Never attempt to grease or oil the E-stop assembly. Cleaning and readjusting of the E-stop assembly is allowed by certified SPEAG personnel only and is part of the annual calibration procedure. Important Note: To prevent damage of the DAE4 probe connector pins, use great care when installing the probe to the DAE4. Carefully connect the probe with the connector notch oriented in the mating position. Avoid any rotational movement of the probe body versus the DAE4 while turning the locking nut of the connector. The same care shall be used when disconnecting the probe from the DAE4. TN_EH190326AE_DAE4.docx 07.03.2019	Calibration Laboratory of Schmid & Partner Engineering AG Zugzwangstrasse 43, 8004 Zurich, Switzerland Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Client: SGS-CN (Auden) Certificate No.: DAE4-1245_May22 Accreditation No.: SCS 0108 CALIBRATION CERTIFICATE Object: DAE4 - SD 000 D04 BM - SN: 1245 Calibration procedure(s): QA CAL-06 v30 Calibration procedure for the data acquisition electronics (DAE) Calibration date: May 30, 2022 This calibration certificate documents the traceability to national standards, which include the physical units of measurement (SI). The measurement and the uncertainties with confidence probability are given on the following pages and are part of the certificate. All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 1 °C and humidity < 70%). Calibration Equipment used (MATE critical for calibration) <table border="1"><thead><tr><th>Primary Standards</th><th>Q#</th><th>Due Date (Certificate No.)</th><th>Scheduled Calibration</th></tr></thead><tbody><tr><td>Kathery Multimeter Type 2001</td><td>SN: 0810278</td><td>31-Aug-21 (No: 31368)</td><td>Aug-22</td></tr></tbody></table> <table border="1"><thead><tr><th>Secondary Standards</th><th>Q#</th><th>Check Date (in hours)</th><th>Scheduled Check</th></tr></thead><tbody><tr><td>Auto DAE Calibration Unit</td><td>SE LWS 05A AA 1001</td><td>24-Jan-22 (in hours check)</td><td>In house check: Jan-22</td></tr><tr><td>Calibration Box V2.1</td><td>SE LWS 00B AA 1002</td><td>24-Jan-22 (in hours check)</td><td>In house check: Jan-22</td></tr></tbody></table> Calibrated by: Dominique Stiller Function: Laboratory Technician Signature: <i>[Signature]</i> Approved by: (Ben Kuhn) Technical Manager Signature: <i>[Signature]</i> This calibration certificate shall not be reproduced except in full without written approval of the laboratory. Certificate No.: DAE4-1245_May22 Page 1 of 5	Primary Standards	Q#	Due Date (Certificate No.)	Scheduled Calibration	Kathery Multimeter Type 2001	SN: 0810278	31-Aug-21 (No: 31368)	Aug-22	Secondary Standards	Q#	Check Date (in hours)	Scheduled Check	Auto DAE Calibration Unit	SE LWS 05A AA 1001	24-Jan-22 (in hours check)	In house check: Jan-22	Calibration Box V2.1	SE LWS 00B AA 1002	24-Jan-22 (in hours check)	In house check: Jan-22
Primary Standards	Q#	Due Date (Certificate No.)	Scheduled Calibration																		
Kathery Multimeter Type 2001	SN: 0810278	31-Aug-21 (No: 31368)	Aug-22																		
Secondary Standards	Q#	Check Date (in hours)	Scheduled Check																		
Auto DAE Calibration Unit	SE LWS 05A AA 1001	24-Jan-22 (in hours check)	In house check: Jan-22																		
Calibration Box V2.1	SE LWS 00B AA 1002	24-Jan-22 (in hours check)	In house check: Jan-22																		
Calibration Laboratory of Schmid & Partner Engineering AG Zugzwangstrasse 43, 8004 Zurich, Switzerland Accredited by the Swiss Accreditation Service (SAS) The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates Accreditation No.: SCS 0108 Glossary DAE: data acquisition electronics Connector angle: information used in DASY system to align probe sensor X to the robot coordinate system. Methods Applied and Interpretation of Parameters • DC Voltage Measurement: Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range. • Connector angle: The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required. • The following parameters as documented in the Appendix contain technical information as a result from the performance test and require no uncertainty. • DC Voltage Measurement Linearity: Verification of the Linearity at +10% and -10% of the nominal calibration voltage. Influence of offset voltage is included in this measurement. • Common mode sensitivity: Influence of a positive or negative common mode voltage on the differential measurement. • Channel separation: Influence of a voltage on the neighbor channels not subject to an input voltage. • AD Converter Values with inputs shorted: Values on the internal AD converter corresponding to zero input voltage. • Input Offset Measurement: Output voltage and statistical results over a large number of zero voltage measurements. • Input Offset Current: Typical value for information; Maximum channel input offset current, not considering the input resistance. • Input resistance: Typical value for information; DAE input resistance at the connector, during internal auto-zeroing and during measurement. • Low Battery Alarm Voltage: Typical value for information. Below this voltage, a battery alarm signal is generated. • Power consumption: Typical value for information. Supply currents in various operating modes. Certificate No.: DAE4-1245_May22 Page 2 of 5	DC Voltage Measurement AD - Converter Resolution nominal High Range: 1LSB = 6.1 μV, full range = -190...+320 mV Low Range: 1LSB = 61 μV, full range = -1...+3 mV DASY measurement parameters: Auto Zero-Time: 3 sec; Measuring time: 3 sec <table border="1"><thead><tr><th>Calibration Factors</th><th>X</th><th>Y</th><th>Z</th></tr></thead><tbody><tr><td>High Range</td><td>405.265 ± 0.02% (k=2)</td><td>403.974 ± 0.02% (k=2)</td><td>406.092 ± 0.02% (k=2)</td></tr><tr><td>Low Range</td><td>3.99534 ± 1.50% (k=2)</td><td>3.99508 ± 1.50% (k=2)</td><td>4.01015 ± 1.50% (k=2)</td></tr></tbody></table> Connector Angle <table border="1"><thead><tr><th>Connector Angle to be used in DASY system</th><th>30.0° ± 1°</th></tr></thead></table> Certificate No.: DAE4-1245_May22 Page 3 of 5	Calibration Factors	X	Y	Z	High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)	Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)	Connector Angle to be used in DASY system	30.0° ± 1°						
Calibration Factors	X	Y	Z																		
High Range	405.265 ± 0.02% (k=2)	403.974 ± 0.02% (k=2)	406.092 ± 0.02% (k=2)																		
Low Range	3.99534 ± 1.50% (k=2)	3.99508 ± 1.50% (k=2)	4.01015 ± 1.50% (k=2)																		
Connector Angle to be used in DASY system	30.0° ± 1°																				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学生创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Appendix (Additional assessments outside the scope of SCS0108)

1. DC Voltage Linearity

High Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	19994.45	1.52	0.00
Channel X - Input	20004.58	2.22	0.01
Channel X + Input	-20000.14	1.12	-0.01
Channel Y + Input	19994.72	1.58	0.00
Channel Y - Input	20001.22	-1.00	-0.00
Channel Y + Input	-20003.05	-1.57	0.01
Channel Z + Input	19992.44	0.19	0.00
Channel Z - Input	20003.09	0.58	0.00
Channel Z + Input	-20001.73	-0.27	0.00

Low Range	Reading (µV)	Difference (µV)	Error (%)
Channel X + Input	2001.91	0.41	0.22
Channel X - Input	200.54	0.65	0.32
Channel X + Input	-197.86	0.07	-0.04
Channel Y + Input	2002.05	0.58	0.03
Channel Y - Input	201.27	-0.57	-0.28
Channel Y + Input	-196.23	-0.06	0.03
Channel Z + Input	2001.96	0.08	0.00
Channel Z - Input	200.09	-1.03	-0.76
Channel Z + Input	-199.85	-1.57	0.79

2. Common mode sensitivity

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Common mode Input Voltage (mV)	High Range Average Reading (µV)	Low Range Average Reading (µV)
Channel X	200	-5.87	-7.69
	-200	9.12	7.79
Channel Y	200	-8.68	-9.28
	-200	8.52	6.36
Channel Z	200	-5.36	-5.60
	-200	3.58	3.06

3. Channel separation

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	Input Voltage (mV)	Channel X (µV)	Channel Y (µV)	Channel Z (µV)
Channel X	200	-	4.07	-3.14
Channel Y	200	9.36	-	4.27
Channel Z	200	10.11	7.14	-

Certificate No: DAE4-1245_May22

Page 4 of 5

4. AD-Converter Values with inputs shorted

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

	High Range (LSB)	Low Range (LSB)
Channel X	15984	17040
Channel Y	16562	16768
Channel Z	16035	15968

5. Input Offset Measurement

DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Input (mV)	Average (µV)	min. Offset (µV)	max. Offset (µV)	Std. Deviation (µV)
Channel X	1.00	-0.15	1.93	0.45
Channel Y	-0.18	-1.28	0.94	0.45
Channel Z	-0.58	-2.61	0.58	0.60

6. Input Offset Current

Nominal input circuitry offset current on all channels: <25nA

7. Input Resistance (Typical values for information)

	Zeroing (kOhm)	Measuring (MOhm)
Channel X	200	200
Channel Y	200	200
Channel Z	200	200

8. Low Battery Alarm Voltage (Typical values for information)

Typical values	Alarm Level (VDC)
Supply (+ Vcc)	+7.9
Supply (- Vcc)	-7.6

9. Power Consumption (Typical values for information)

Typical values	Switched off (mA)	Stand by (mA)	Transmitting (mA)
Supply (+ Vcc)	+0.01	-8	+14
Supply (- Vcc)	-0.01	-8	-9

Certificate No: DAE4-1245_May22

Page 5 of 5

3 EX3DV4 - SN 7346

Calibration Laboratory of Schmid & Partner Engineering AG
Zugstrasse 6, 8484 Zug, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **Auden** Certificate No: **EX3-7346_Mar22**

Accreditation No: **SCS 0108**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN 7346**

Calibration procedure: **QA CAL-01-VL, QA CAL-14-VL, QA CAL-23-V5, QA CAL-25-V7**
Calibration procedure for domestic E-field probes

Calibration date: **March 30, 2022**

This calibration certificate documents the traceability to national standards, which includes the physical state of measurement (SI). The measurement and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 0.5 °C and humidity < 70%).

Calibration Equipment used (MKE): (virtual for calibration):

Primary Standards	SI	Cal Date (Certificate No.)	Scheduled Calibration
Power meter MPP	SN 10479	09-Apr-21 (No. 217-0201-03/20)	Apr-22
Power sensor MPP-291	SN 10204	09-Apr-21 (No. 217-0201-03/20)	Apr-22
Power sensor MPP-291	SN 10243	09-Apr-21 (No. 217-0201-03/20)	Apr-22
Reference 20 dB attenuator	SN 022828 (20)	09-Apr-21 (No. 217-0201-03/20)	Apr-22
DASA	SN 460	13-Dec-21 (No. DAE4-460_04/21)	Dec-22
Reference Probe (SD202)	SN 3913	17-Dec-21 (No. 025-0013_04/21)	Dec-22

Secondary Standards

SI	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4113B	SN 024126/2021	09-Apr-22 (in house check Jan-22)
Power sensor E4413A	SN 101414/2021	09-Apr-22 (in house check Jan-22)
Power sensor E4413A	SN 101414/2021	09-Apr-22 (in house check Jan-22)
Power sensor E4413A	SN 101414/2021	09-Apr-22 (in house check Jan-22)
RF generator HP 8446C	SN 024126/2021	09-Apr-22 (in house check Jan-22)
Network Analyzer B1500A	SN 174109/2021	09-Apr-22 (in house check Jan-22)

Calibrated by: **David Koller** Function: **Calibration Technician** Signature: *[Signature]*

Approved by: **David Koller** Function: **Director** Signature: *[Signature]*

This calibration certificate and/or not be reproduced, copied or full without express approval of the laboratory.

Certificate No: EX3-7346_Mar22 Page 1 of 24

Calibration Laboratory of Schmid & Partner Engineering AG
Zugstrasse 6, 8484 Zug, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client: **Auden** Certificate No: **EX3-7346_Mar22**

Accreditation No: **SCS 0108**

Glossary:

TSL: In-house simulating equipment

NORM(x,y,z): sensitivity in free space

Comp: sensitivity in TSL / NORM(x,y,z)

DCP: code compression (μV)

CF: crest factor (10μV, cycle) of the RF signal

A, B, C, D: modulation dependent polarization parameters

Polarization (μ): μ rotation around probe axis

Polarization (μ): μ rotation around probe axis

Connector Angle: (information used in DASY system to align probe sensor X to the robot coordinate system)

Calibration is Performed According to the Following Standards:

- IEC 61010-1:2011, Measurement Procedure for the Assessment of Specific Absorption Rate (SAR) Exposure to Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices, Part 1:001, Human Models, Implementation And Procedures (Frequency Range of 4 MHz to 10 GHz), October 2020
- ISO 9006:2018, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM(x,y,z): Assessed for E-field polarization: $\lambda = 0.1$ to 1000 MHz in TEM-cell; $f = 1000$ MHz: R22 waveguide; NORM(x,y,z) are only intermediate values, i.e., the uncertainties of NORM(x,y,z) do not affect the E-field uncertainty mode TSL (see below Comp)
- NORM(x,y,z) = NORM(x,y,z) * Frequency response (see Frequency Response Chart). The interpolation is implemented in DASY software version 4.2. The uncertainty of the frequency response is included in the stated uncertainty of Comp
- DCP(x,y,z): DCP is a numerical interpolation parameter assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media
- PAC: PAC is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A(x,y,z), B(x,y,z), C(x,y,z), D(x,y,z), V(x,y,z), A, B, C, D are numerical interpolation parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. V(x,y,z) is the maximum calibration range expressed as RMS voltage across the probe
- Comp and Boundary: E-field Parameters: Assessed in the probe using E-field (or Temperature Transfer Standard for f > 600 MHz) and inside waveguide using analytical field distributions based on power measurements for f < 600 MHz. The same values are used for assessment of the parameters applied by boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are NORM(x,y,z) * Comp, where the uncertainty corresponds to that given for Comp. A frequency dependent Comp is used in DASY version 4.4 and higher which always depending the validity from 50 MHz to 100 MHz
- Sensor geometry (3D resolution from geometry) in a field of low gradients instead using a flat phantom exposed by a patch antenna
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (see probe axis). No tolerance required
- Connector Angle: The angle is assessed using the information given by determining the NORM(x,y,z) uncertainty required

Certificate No: EX3-7346_Mar22 Page 2 of 24



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.


Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Qcccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com

Page 3 of 24Page 4 of 24Page 5 of 24

Page 6 of 20

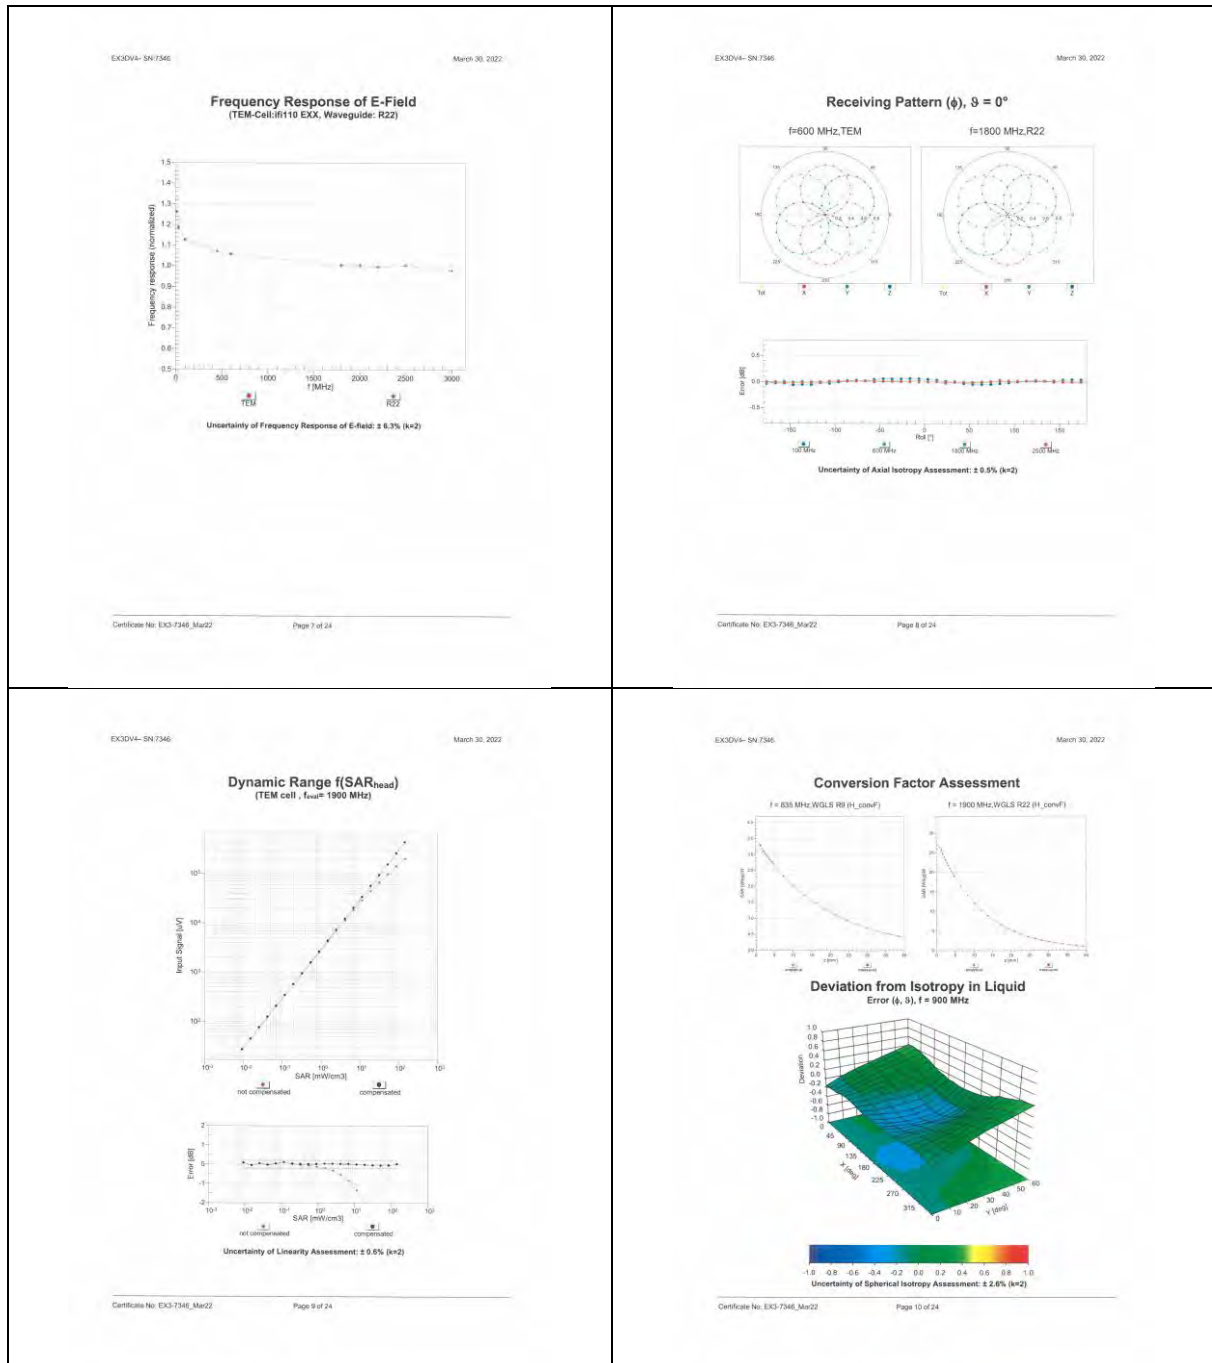

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of the Client's instructions, if any. The Company's sole responsibility is to its Client and it does not warrant or generate parties to any transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced, except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are not representative of the whole batch.

Attention: To check the authenticity of testing/inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 中国·苏州·昆山留学院创业园伟亚路10号 邮编 215300

(86-512) 57355888 (86-512) 57370818 www.sgsgroup.com.cn
 (86-512) 57355888 (86-512) 57370818 sgs.china@sgs.com



EX3034-SN-7346				March 30, 2022			
10414	AAA	WLAN CDFP 64-QAM, 4096Q	Generic	8.54	± 0.6 %		
10415	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 1 Mbps, R90c-d)	WLAN	1.54	± 0.6 %		
10416	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 5 Mbps, R90c-d)	WLAN	8.23	± 0.6 %		
10417	AAC	IEEE 802.11n WFI 5 GHz (OFDM, 4 Mbps, R90c-d)	WLAN	8.23	± 0.6 %		
10418	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 5 Mbps, R90c-d)	WLAN	8.14	± 0.6 %		
10419	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 5 Mbps, R90c-d)	WLAN	8.19	± 0.6 %		
10420	AAC	IEEE 802.11n HT Overhead, 7.2 Mbps, R90c-d	WLAN	8.32	± 0.6 %		
10421	AAC	IEEE 802.11n HT Overhead, 4.3 Mbps, 16-QAM, UL Sub	WLAN	8.47	± 0.6 %		
10424	AAC	IEEE 802.11n HT Overhead, 7.2 Mbps, 64-QAM, UL Sub	WLAN	8.40	± 0.6 %		
10425	AAC	IEEE 802.11n HT Overhead, 15 Mbps, R90c-d	WLAN	8.41	± 0.6 %		
10428	AAC	IEEE 802.11n HT Overhead, 30 Mbps, 16-QAM, UL Sub	WLAN	8.45	± 0.6 %		
10427	AAC	IEEE 802.11n HT Overhead, 180 Mbps, 64-QAM, UL Sub	WLAN	8.41	± 0.6 %		
10430	AAD	LTE-FDD OFDMA, 5 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	8.28	± 0.6 %		
10431	AAD	LTE-FDD OFDMA, 10 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	8.38	± 0.6 %		
10432	AAC	LTE-FDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	8.34	± 0.6 %		
10433	AAD	LTE-FDD OFDMA, 20 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	8.34	± 0.6 %		
10434	AAA	W-CDMA (BS Test Mode), 1.6 DPH, Clipping 44%	WCDMA	8.80	± 0.6 %		
10435	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	7.82	± 0.6 %		
10437	AAD	LTE-FDD OFDMA, 5 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	7.96	± 0.6 %		
10440	AAD	LTE-FDD OFDMA, 10 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	7.93	± 0.6 %		
10449	AAC	LTE-FDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	7.91	± 0.6 %		
10450	AAC	LTE-FDD OFDMA, 20 MHz, E-UTRA 1.1, Clipping 44%	LTE-FDD	7.88	± 0.6 %		
10451	AAA	W-CDMA (BS Test Mode), 1.6 DPH, Clipping 44%	WCDMA	7.99	± 0.6 %		
10452	AAD	Validation (Spurious, 10ms, 10ms)	Test	19.90	± 0.6 %		
10453	AAC	IEEE 802.11ac WFI (160MHz, 64-QAM, R90c-d)	WLAN	8.63	± 0.6 %		
10457	AAA	UMTS FDD (DC-HSPA)	WCDMA	6.62	± 0.6 %		
10458	AAA	CDMA2000 (1xEV-DO, Rev. 3, 3.1MHz)	CDMA2000	6.58	± 0.6 %		
10459	AAA	CDMA2000 (1xEV-DO, Rev. 3, 3.1MHz)	CDMA2000	8.25	± 0.6 %		
10460	AAA	UMTS FDD (DC-HSPA)	WCDMA	2.39	± 0.6 %		
10461	AAB	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, QPSK, UL Sub)	LTE-TDD	7.82	± 0.6 %		
10462	AAB	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %		
10463	AAB	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.30	± 0.6 %		
10464	AAC	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	7.82	± 0.6 %		
10465	AAC	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10466	AAC	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10467	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	7.82	± 0.6 %		
10468	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10469	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10470	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	7.82	± 0.6 %		
10471	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10472	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10473	AAB	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10474	AAC	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10475	AAC	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10477	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10478	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 16-QAM, UL Sub)	LTE-TDD	8.32	± 0.6 %		
10479	AAB	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Sub)	LTE-TDD	7.74	± 0.6 %		
10480	AAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Sub)	LTE-TDD	8.18	± 0.6 %		
10481	AAD	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Sub)	LTE-TDD	8.45	± 0.6 %		
10482	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.71	± 0.6 %		
10483	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 0.6 %		
10484	AAC	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.47	± 0.6 %		
10485	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Sub)	LTE-TDD	7.99	± 0.6 %		
10486	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Sub)	LTE-TDD	8.38	± 0.6 %		
10487	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	8.60	± 0.6 %		
10488	AAD	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Sub)	LTE-TDD	7.70	± 0.6 %		
Certificate No. EX3-7346_Mar22				Page 16 of 24			
EX3034-SN-7346				March 30, 2022			
10489	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.49	± 0.6 %		
10490	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.37	± 0.6 %		
10491	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.39	± 0.6 %		
10492	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.30	± 0.6 %		
10493	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.42	± 0.6 %		
10494	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.42	± 0.6 %		
10495	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.42	± 0.6 %		
10496	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.48	± 0.6 %		
10497	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.47	± 0.6 %		
10498	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.50	± 0.6 %		
10499	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.52	± 0.6 %		
10500	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.61	± 0.6 %		
10501	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.73	± 0.6 %		
10502	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.56	± 0.6 %		
10503	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.69	± 0.6 %		
10504	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.77	± 0.6 %		
10505	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 9 Mbps, R90c-d)	WLAN	8.25	± 0.6 %		
10506	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 12 Mbps, R90c-d)	WLAN	8.45	± 0.6 %		
10507	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 18 Mbps, R90c-d)	WLAN	8.13	± 0.6 %		
10508	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 24 Mbps, R90c-d)	WLAN	8.20	± 0.6 %		
10509	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 36 Mbps, R90c-d)	WLAN	8.37	± 0.6 %		
10510	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS-OFDM, 48 Mbps, R90c-d)	WLAN	8.10	± 0.6 %		
10511	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 1 Mbps, R90c-d)	WLAN	1.59	± 0.6 %		
10512	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 2 Mbps, R90c-d)	WLAN	1.58	± 0.6 %		
10513	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 5.5 Mbps, R90c-d)	WLAN	1.58	± 0.6 %		
10514	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 11 Mbps, R90c-d)	WLAN	1.58	± 0.6 %		
10515	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 4 Mbps, R90c-d)	WLAN	8.09	± 0.6 %		
10516	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 6 Mbps, R90c-d)	WLAN	8.60	± 0.6 %		
10517	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 12 Mbps, R90c-d)	WLAN	8.25	± 0.6 %		
10518	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 18 Mbps, R90c-d)	WLAN	8.49	± 0.6 %		
10519	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 24 Mbps, R90c-d)	WLAN	8.26	± 0.6 %		
10520	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 36 Mbps, R90c-d)	WLAN	8.18	± 0.6 %		
10521	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 48 Mbps, R90c-d)	WLAN	8.18	± 0.6 %		
10522	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10523	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10524	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10525	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10526	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10527	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10528	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10529	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10530	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.36	± 0.6 %		
10531	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.81	± 0.6 %		
10532	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.74	± 0.6 %		
10533	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.81	± 0.6 %		
10534	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10535	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10536	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10537	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10538	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10539	AAC	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.86	± 0.6 %		
10540	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10541	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10542	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10543	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10544	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10545	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10546	AAD	IEEE 802.11ac WFI (160MHz, MCS1, R90c-d)	WLAN	8.06	± 0.6 %		
10547	AAD	LTE-TDD (SC-FDMA, 1.8 MHz, 30 MHz, QPSK, UL Sub)	LTE-TDD	11.96	± 0.6 %		
10548	AAA	CDMA2000 (1xEV-DO, Rev. 3, 3.1MHz)	CDMA2000	6.58	± 0.6 %		
10549	AAA	LTE-TDD OFDMA, 5 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	6.91	± 0.6 %		
10550	AAA	LTE-TDD OFDMA, 10 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	7.20	± 0.6 %		
10551	AAA	LTE-TDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	7.20	± 0.6 %		
10552	AAA	LTE-TDD OFDMA, 20 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	7.20	± 0.6 %		
10553	AAA	LTE-TDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	6.96	± 0.6 %		
10554	AAA	LTE-TDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	6.96	± 0.6 %		
10555	AAA	LTE-TDD OFDMA, 15 MHz, E-UTRA 1.1, Clipping 44%	LTE-TDD	7.20	± 0.6 %		
10556	AAA	Pulse Waveform (20MHz, 20%)	Test	1.90	± 0.6 %		
10557	AAA	Pulse Waveform (20MHz, 20%)	Test	1.90	± 0.6 %		
10558	AAA	Pulse Waveform (20MHz, 20%)	Test	2.20	±		

Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
 中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

(t86-512)57355888 (t86-512)57370818 www.sgsgroup.com.cn
 (t86-512)57355888 (t86-512)57370818 sgs.china@sgs.com

Test Report Form Version: Rev01

Member of the SGS Group (SGS SA)

EXCIV4-SN 7346 March 30, 2022 15985 AAA 50 NR DL (CP-CFOM, TM 3.1, 40 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.54 ± 9.8 % 15986 AAA 50 NR DL (CP-CFOM, TM 3.1, 50 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.50 ± 9.8 % 15987 AAA 50 NR DL (CP-CFOM, TM 3.1, 60 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.50 ± 9.8 % 15988 AAA 50 NR DL (CP-CFOM, TM 3.1, 70 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.38 ± 9.8 % 15989 AAA 50 NR DL (CP-CFOM, TM 3.1, 80 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.33 ± 9.8 % 15990 AAA 50 NR DL (CP-CFOM, TM 3.1, 90 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.52 ± 9.8 % ¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the test value. Certificate No. EXC-7346_Mar22 Page 24 of 24	EXCIV4-SN 7346 March 30, 2022 15985 AAA 50 NR DL (CP-CFOM, TM 3.1, 40 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.54 ± 9.8 % 15986 AAA 50 NR DL (CP-CFOM, TM 3.1, 50 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.50 ± 9.8 % 15987 AAA 50 NR DL (CP-CFOM, TM 3.1, 60 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.50 ± 9.8 % 15988 AAA 50 NR DL (CP-CFOM, TM 3.1, 70 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.38 ± 9.8 % 15989 AAA 50 NR DL (CP-CFOM, TM 3.1, 80 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.33 ± 9.8 % 15990 AAA 50 NR DL (CP-CFOM, TM 3.1, 90 MHz, 64-QAM, 30 kHz) SG NR PR1 TDD 9.52 ± 9.8 % ¹ Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the test value. Certificate No. EXC-7346_Mar22 Page 24 of 24
---	---

4 Impedance and return loss

Dipole CLA150 SN 4025				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
2021/4/26	-31.4	/	47.8	/
Dipole D450V3 SN 1103				
Head Liquid				
Date of Measurement	Return Loss(dB)	Δ %	Impedance (Ω)	ΔΩ
2021/4/21	-23	/	57.1	/



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>; and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No.10, Weiye Road, Innovation Park, Kunshan, Jiangsu, China 215300
中国·江苏·昆山市留学院创业园伟业路10号 邮编 215300

t(86-512)57355888 f(86-512)57370818 www.sgsgroup.com.cn
t(86-512)57355888 f(86-512)57370818 sgs.china@sgs.com